

TEST REPORT

Applicant: FCC: Magtek Incorporated
IC: MagTek Inc

Address of Applicant: FCC: 1710 Apollo Court, seal beach, California 90740, United States
IC: 1710 Apollo Court Seal Beach CA 90740 United States

Manufacturer: FCC: Magtek Incorporated
IC: MagTek Inc

Address of Manufacturer: FCC: 1710 Apollo Court, seal beach, California 90740, United States
IC: 1710 Apollo Court Seal Beach CA 90740 United States

Equipment Under Test (EUT)

Product Name: DynaGlass

Model No.: 40000102, 40000101

Trade Mark: MAGTEK

FCC ID: U73-40000102

IC: 23169-40000102

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
RSS-247 Issue 2
RSS-Gen Issue 5

Date of sample receipt: July 07, 2020

Date of Test: July 08, 2020-August 31, 2020

Date of report issued: August 31, 2020

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	August 31, 2020	Original

Prepared By:



Date:

August 31, 2020

Project Engineer

Check By:



Reviewer

Date:

August 31, 2020

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 DEVIATION FROM STANDARDS.....	7
5.5 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.6 TEST FACILITY.....	7
5.7 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 CONDUCTED OUTPUT POWER	14
7.4 CHANNEL BANDWIDTH & 99% OCCUPY BANDWIDTH.....	16
7.5 POWER SPECTRAL DENSITY	18
7.6 BAND EDGES.....	20
7.6.1 Conducted Emission Method.....	20
7.6.2 Radiated Emission Method.....	21
7.7 SPURIOUS EMISSION.....	23
7.7.1 Conducted Emission Method.....	23
7.7.2 Radiated Emission Method.....	25
7.8 FREQUENCY STABILITY	33
8 TEST SETUP PHOTO.....	35
9 EUT CONSTRUCTIONAL DETAILS	35

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c) RSS-Gen Section 6.8	Pass
AC Power Line Conducted Emission	15.207 RSS-Gen Section 8.8	Pass
Conducted Output Power	15.247 (b)(3) RSS-247 Section 5.4(d)	Pass
Channel Bandwidth	15.247 (a)(2) RSS-247 Section 5.2(a)	Pass
99% Occupy Bandwidth	RSS-Gen Section 6.7	
Power Spectral Density	15.247 (e) RSS-247 Section 5.2(b)	Pass
Band Edge	15.247(d) RSS-247 Section 5.5	Pass
Spurious Emission	15.205/15.209 RSS-247 Section 5.5	Pass
Frequency stability	RSS-Gen Section 6.11& Section 8.11	Pass

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013 and RSS-Gen.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	DynaGlass
Model No.:	40000102, 40000101
Test Model No:	40000102
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
Test sample(s) ID:	GTS202007000071-1
Sample(s) Status:	Engineer sample
S/N:	B90A998
Hardware Version:	DynaGlass_AND_V040 DynaGlass_PAY_V040
Software Version:	Android:0.9.05; Max32550-LCS+:1.0.0
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Integral Antenna
Antenna Gain:	1.67dBi(declare by applicant)
Power Supply:	DC 5V or DC 7.4V 1850mAh 13.69Wh by Li-ion battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	11	2422 MHz	21	2442 MHz	31	2462 MHz
2	2404 MHz	12	2424 MHz	22	2444 MHz	32	2464 MHz
3	2406 MHz	13	2426 MHz	23	2446 MHz	33	2466 MHz
4	2408 MHz	14	2428 MHz	24	2448 MHz	34	2468 MHz
5	2410 MHz	15	2430 MHz	25	2450 MHz	35	2470 MHz
6	2412 MHz	16	2432 MHz	26	2452 MHz	36	2472 MHz
7	2414 MHz	17	2434 MHz	27	2454 MHz	37	2474 MHz
8	2416 MHz	18	2436 MHz	28	2456 MHz	38	2476 MHz
9	2418 MHz	19	2438 MHz	29	2458 MHz	39	2478 MHz
10	2420 MHz	20	2440 MHz	30	2460 MHz	40	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	--

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Lenovo	Notebook PC	E40-80	N/A
Apple	PC	A1278	C1MN99ERDTY3

5.4 Deviation from Standards

None.

5.5 Abnormalities from Standard Conditions

None.

5.6 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC —Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383. ● IC —Registration No.: 9079A The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

5.7 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

7 Test results and Measurement Data

7.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement:</p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
Standard requirement:	RSS-Gen Section 6.8
<p>A transmitter can only be sold or operated with antennas with which it was approved.</p> <p>When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power</p>	
E.U.T Antenna:	
<i>The antenna is Integral antenna, the best case gain of the is 1.67dBi, reference to the appendix II for details</i>	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207 RSS-Gen Section 8.8				
Test Method:	ANSI C63.10:2013 and RSS-Gen				
Test Frequency Range:	150KHz to 30MHz				
Class / Severity:	Class B				
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto				
Limit:	Frequency range (MHz)		Limit (dBuV)		
			Quasi-peak	Average	
	0.15-0.5		66 to 56*	56 to 46*	
	0.5-5		56	46	
5-30		60	50		
* Decreases with the logarithm of the frequency.					
Test setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>				
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2009 on conducted measurement. 				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.: 1012mbar
Test results:	Pass				


Measurement data

Line:

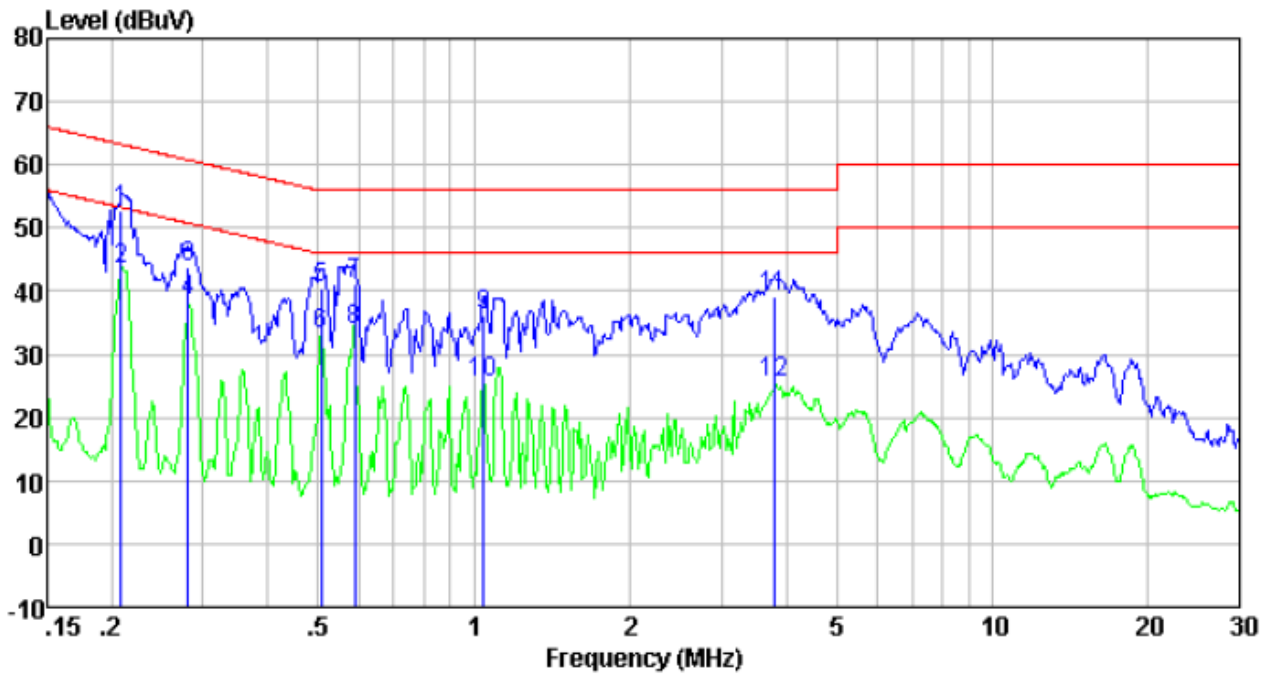

Freq. MHz	Read Level dBuV	Factor dB/m	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.21	32.09	20.51	52.60	63.27	-10.67	QP
0.21	22.93	20.51	43.44	53.27	-9.83	Average
0.28	23.40	20.50	43.90	60.81	-16.91	QP
0.28	17.97	20.50	38.47	50.81	-12.34	Average
0.51	19.98	20.42	40.40	56.00	-15.60	QP
0.51	12.73	20.42	33.15	46.00	-12.85	Average
0.59	20.74	20.41	41.15	56.00	-14.85	QP
0.59	13.39	20.41	33.80	46.00	-12.20	Average
1.04	15.72	20.35	36.07	56.00	-19.93	QP
1.04	5.23	20.35	25.58	46.00	-20.42	Average
3.78	18.80	20.38	39.18	56.00	-16.82	QP
3.78	5.03	20.38	25.41	46.00	-20.59	Average

Neutral:

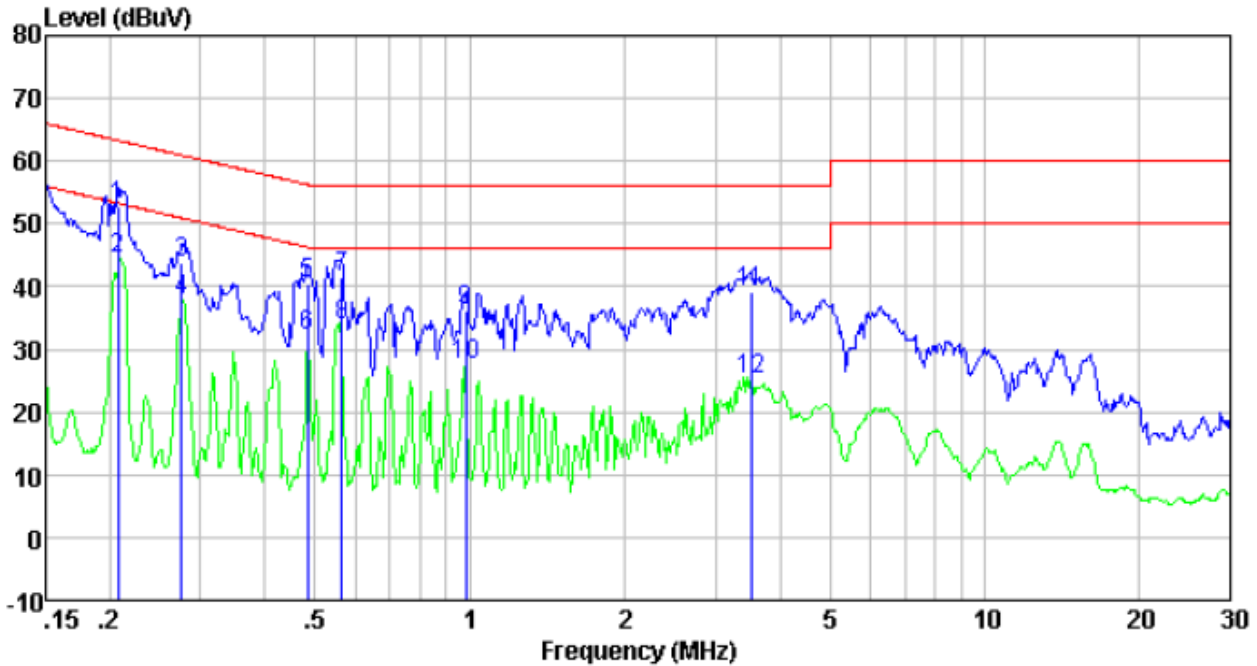


Freq. MHz	Read Level dBuV	Factor dB/m	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.21	32.10	20.51	52.61	63.32	-10.71	QP
0.21	24.03	20.51	44.54	53.32	-8.78	Average
0.28	23.23	20.50	43.73	60.94	-17.21	QP
0.28	17.31	20.50	37.81	50.94	-13.13	Average
0.48	20.08	20.43	40.51	56.27	-15.76	QP
0.48	11.62	20.43	32.05	46.27	-14.22	Average
0.56	21.00	20.42	41.42	56.00	-14.58	QP
0.56	13.38	20.42	33.80	46.00	-12.20	Average
0.98	15.93	20.35	36.28	56.00	-19.72	QP
0.98	7.26	20.35	27.61	46.00	-18.39	Average
3.51	18.80	20.38	39.18	56.00	-16.82	QP
3.51	4.96	20.38	25.34	46.00	-20.66	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Conducted Output Power

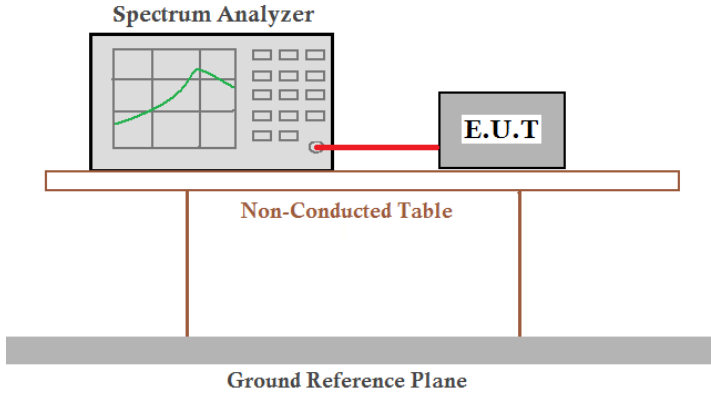
Test Requirement:	FCC Part15 C Section 15.247 (b)(3) RSS-247 Section 5.4(d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance v05r02 and RSS-Gen
Limit:	30dBm 36dBm(4W for e.i.r.p)
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data


Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	1.51	30.00	Pass
Middle	1.50		
Highest	0.80		

Test channel	e.i.r.p. (dBm)	Limit(dBm)	Result
Lowest	3.18	36.00	Pass
Middle	3.17		
Highest	2.47		


Test plot as follows:

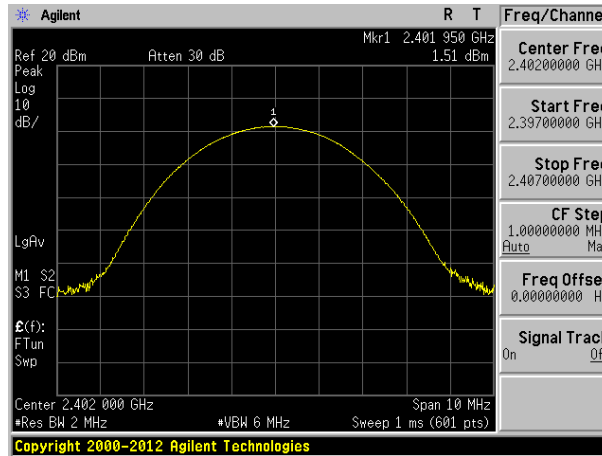

Lowest channel

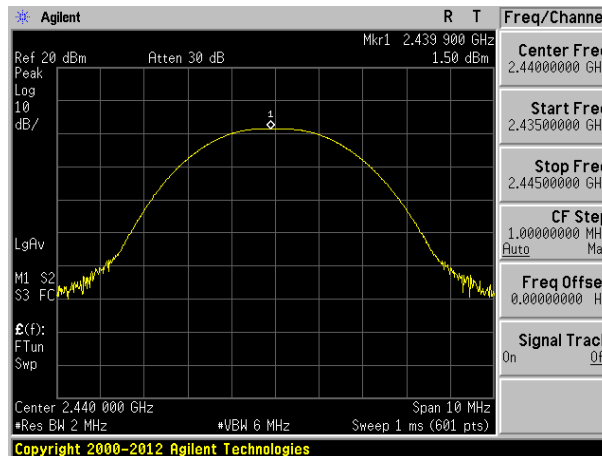


Middle channel

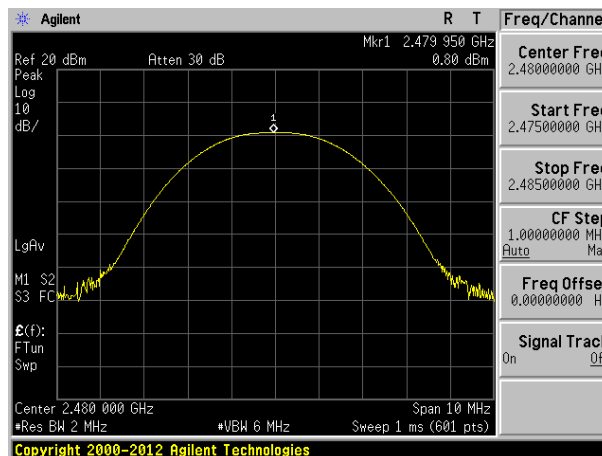

Highest channel

7.4 Channel Bandwidth & 99% Occupancy Bandwidth

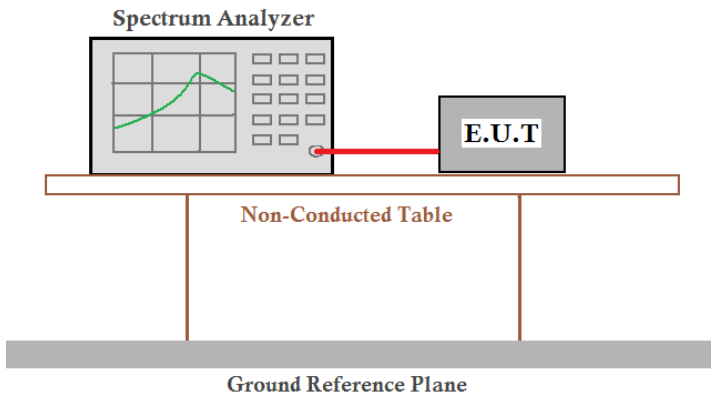Test Requirement:	FCC Part15 C Section 15.247 (a)(2) & RSS-247 Section 5.2(a)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance v05r02 and RSS-Gen
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
Lowest	0.676	>500	Pass
Middle	0.661		
Highest	0.674		


Test channel	99% Bandwidth (MHz)	Result
Lowest	1.077	Pass
Middle	1.0705	
Highest	1.0718	

Test plot as follows:



-6dB BW

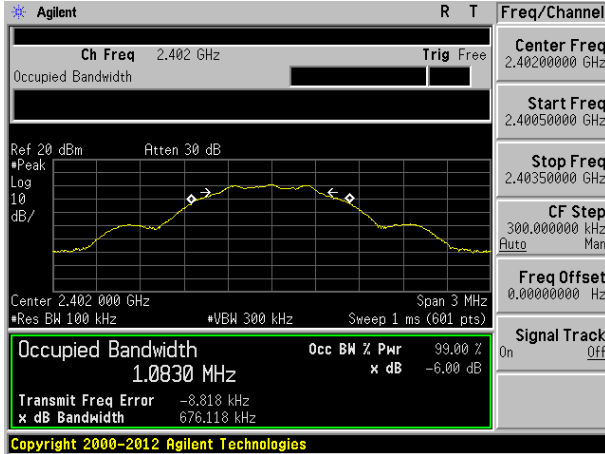



99% BW

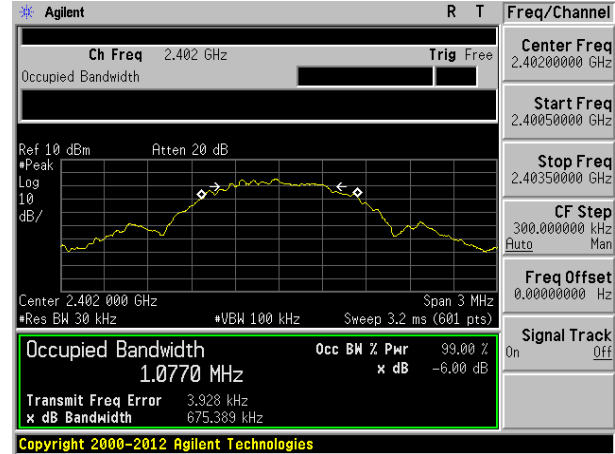

Lowest channel

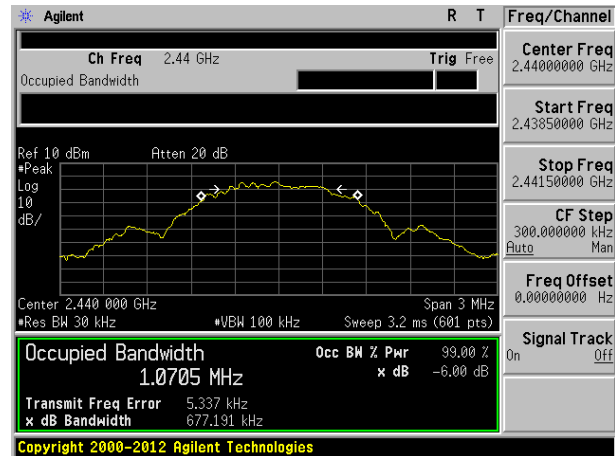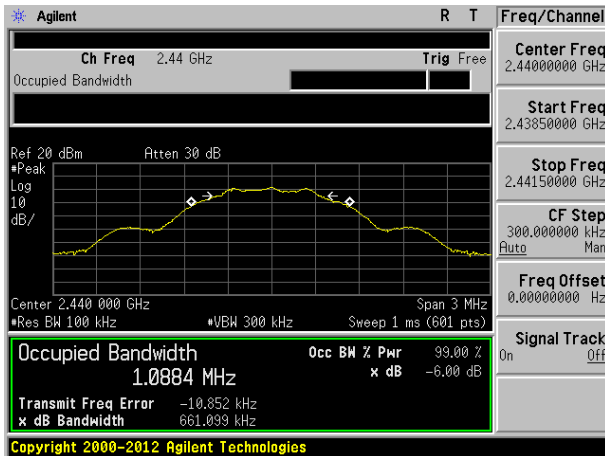


Middle channel

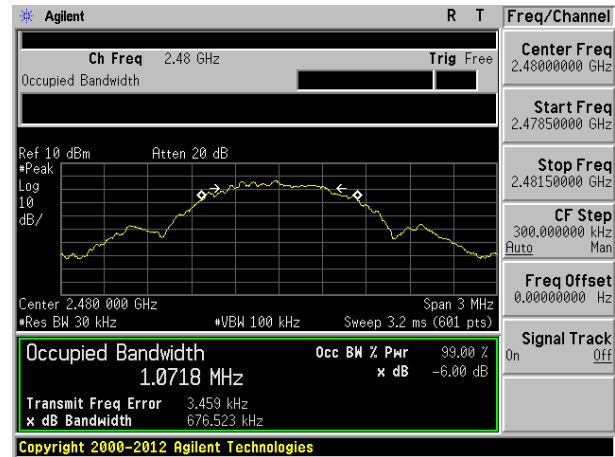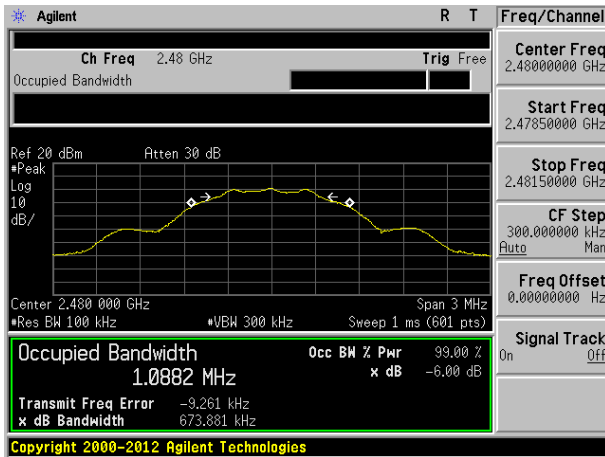

Highest channel


7.5 Power Spectral Density

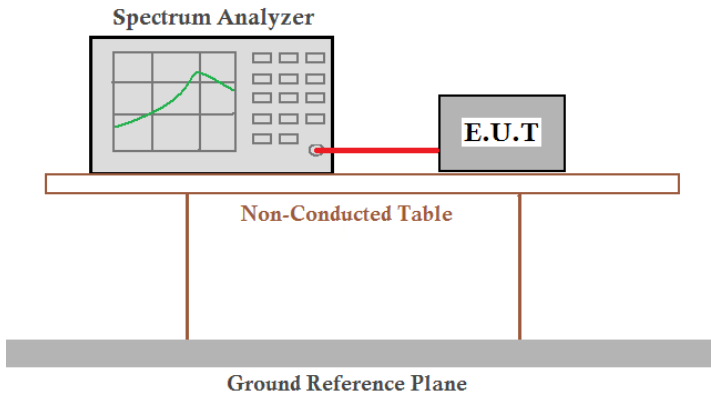Test Requirement:	FCC Part15 C Section 15.247 (e) RSS-247 Section 5.2(b)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance v05r02 and RSS-Gen
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Power Spectral Density (dBm/3kHz)	Limit(dBm/3kHz)	Result
Lowest	-14.16	8.00	Pass
Middle	-13.60		
Highest	-14.46		


Test plot as follows:

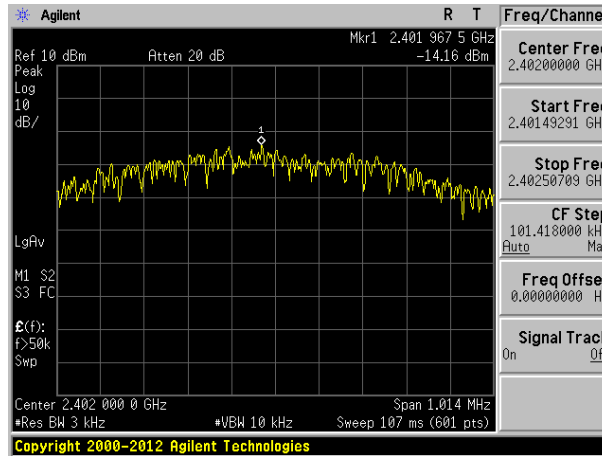

Lowest channel

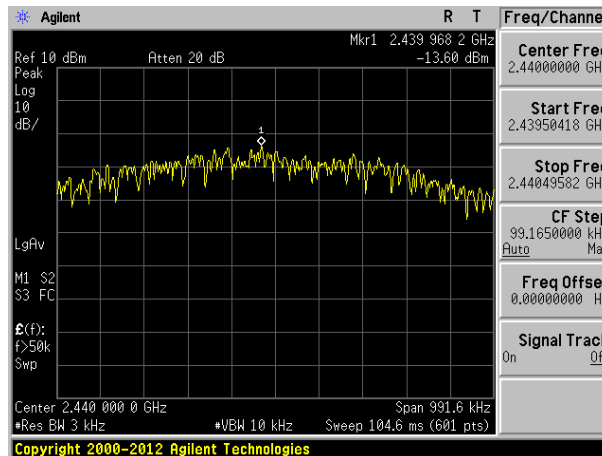


Middle channel

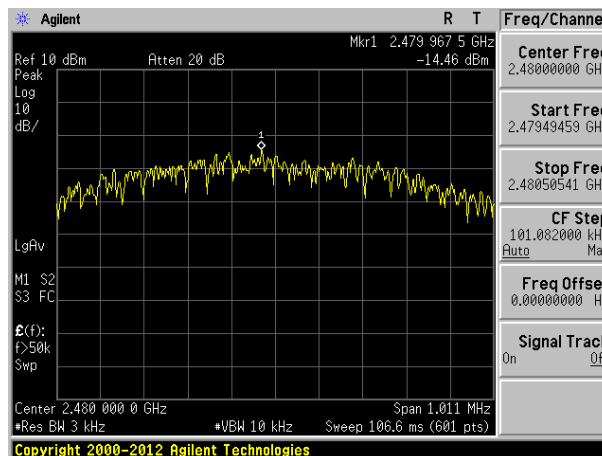


Highest channel

7.6 Band edges


7.6.1 Conducted Emission Method

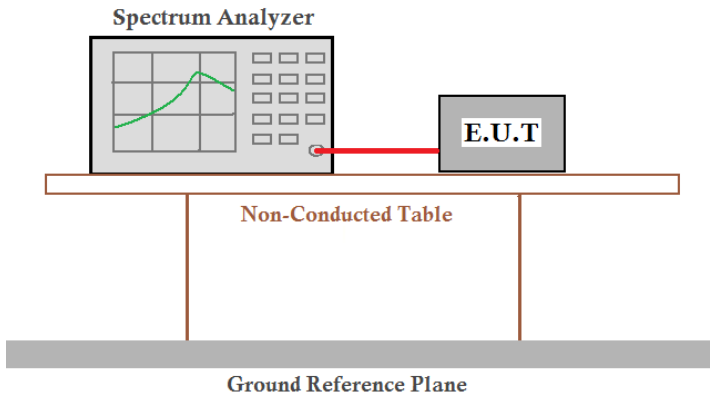Test Requirement:	FCC Part15 C Section 15.247 (d) RSS-247 Section 5.5
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance v05r02 & RSS-Gen
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an Equipment Under Test (E.U.T.) via a red cable. Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

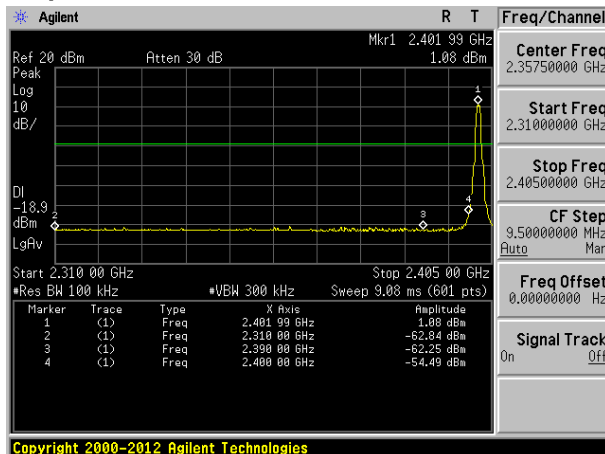


Lowest channel

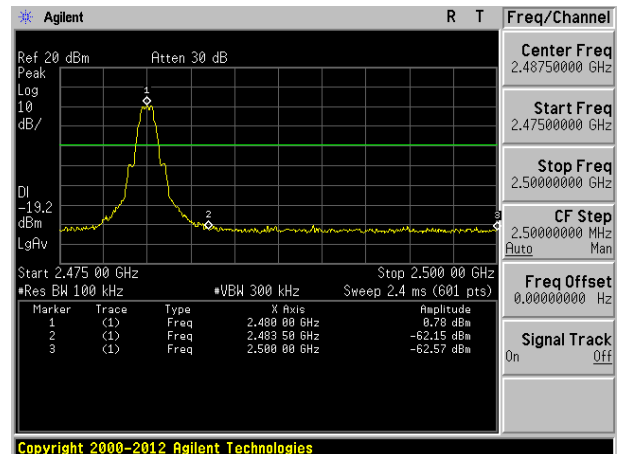

Highest channel

7.6.2 Radiated Emission Method

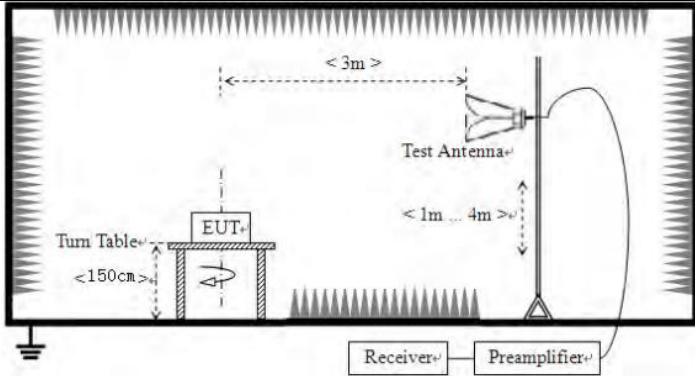Test Requirement:	FCC Part15 C Section 15.209 and 15.205 RSS-247 Section 3.3 & RSS-Gen Section 8.10				
Test Method:	ANSI C63.10:2013 & RSS-Gen				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. 				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

Measurement Data

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	42.08	27.91	5.30	24.64	50.65	74.00	-23.35	Horizontal
2390.00	45.76	27.59	5.38	24.71	54.02	74.00	-19.98	Horizontal
2310.00	42.56	27.91	5.30	24.64	51.13	74.00	-22.87	Vertical
2390.00	46.71	27.59	5.38	24.71	54.97	74.00	-19.03	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	32.81	27.91	5.30	24.64	41.38	54.00	-12.62	Horizontal
2390.00	34.00	27.59	5.38	24.71	42.26	54.00	-11.74	Horizontal
2310.00	32.70	27.91	5.30	24.64	41.27	54.00	-12.73	Vertical
2390.00	34.58	27.59	5.38	24.71	42.84	54.00	-11.16	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	44.09	27.53	5.47	24.80	52.29	74.00	-21.71	Horizontal
2500.00	43.42	27.55	5.49	24.86	51.60	74.00	-22.40	Horizontal
2483.50	44.80	27.53	5.47	24.80	53.00	74.00	-21.00	Vertical
2500.00	44.34	27.55	5.49	24.86	52.52	74.00	-21.48	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	33.63	27.53	5.47	24.80	41.83	54.00	-12.17	Horizontal
2500.00	33.75	27.55	5.49	24.86	41.93	54.00	-12.07	Horizontal
2483.50	34.54	27.53	5.47	24.80	42.74	54.00	-11.26	Vertical
2500.00	33.60	27.55	5.49	24.86	41.78	54.00	-12.22	Vertical

Remarks:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

7.7 Spurious Emission

7.7.1 Conducted Emission Method

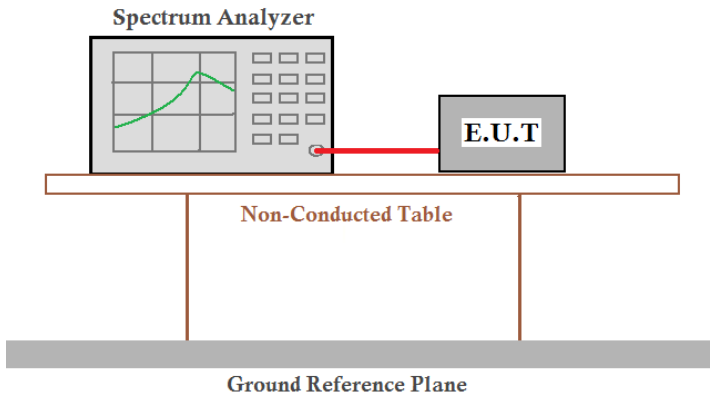
Test Requirement:	FCC Part15 C Section 15.247 (d) RSS-247 Section 5.5
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance v05r02 & RSS-Gen
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:
Lowest channel

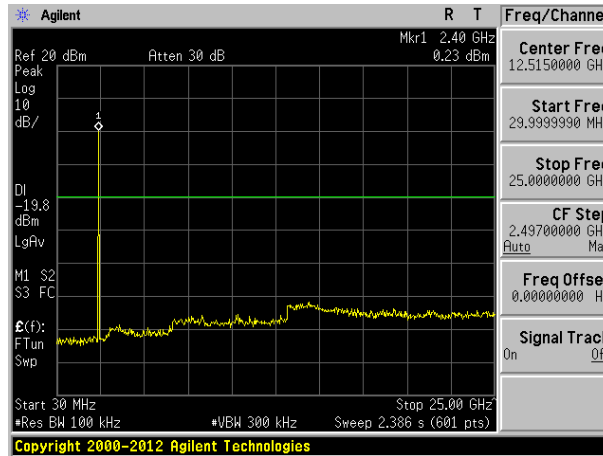


30MHz~25GHz

Middle channel

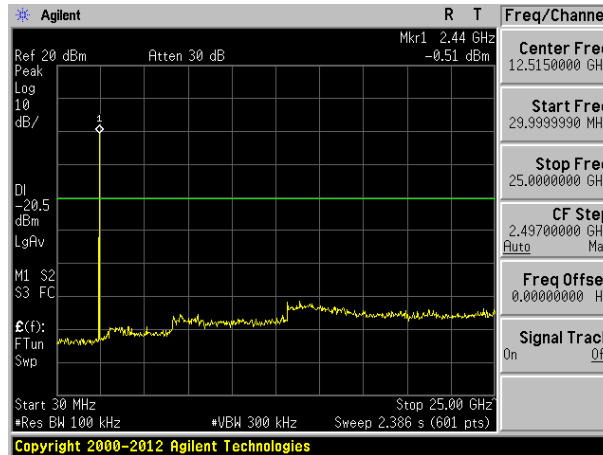

30MHz~25GHz




Highest channel

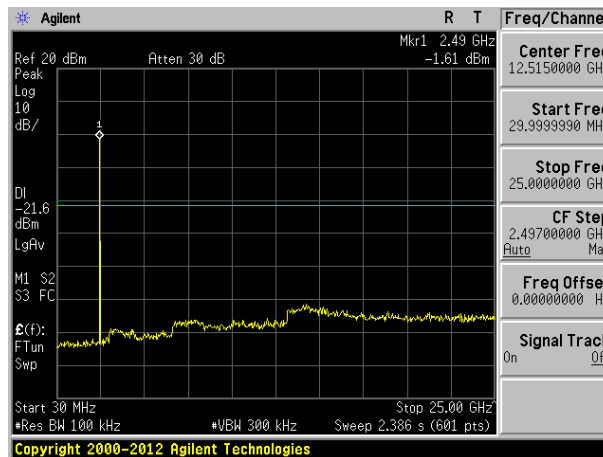

30MHz~25GHz

7.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 RSS-247 Section 3.3 & RSS-Gen Section 8.9																												
Test Method:	ANSI C63.10:2013 & RSS-Gen																												
Test Frequency Range:	9kHz to 25GHz																												
Test site:	Measurement Distance: 3m																												
Receiver setup:	Frequency	Detector	RBW	VBW	Value																								
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak																								
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak																								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak																								
	Above 1GHz	Peak	1MHz	3MHz	Peak																								
Peak		1MHz	10Hz	Average																									
FCC Limit:	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100**</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150**</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200**</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>					Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																										
0.009-0.490	2400/F(kHz)	300																											
0.490-1.705	24000/F(kHz)	30																											
1.705-30.0	30	30																											
30-88	100**	3																											
88-216	150**	3																											
216-960	200**	3																											
Above 960	500	3																											
IC Limit:	<p>Table 5 – General field strength limits at frequencies above 30 MHz</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (µV/m at 3 m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table> <p>Table 6 – General field strength limits at frequencies below 30 MHz</p> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Magnetic field strength (H-Field) (µA/m)</th> <th>Measurement distance (m)</th> </tr> </thead> <tbody> <tr> <td>9 - 490 kHz¹</td> <td>6.37/F (F in kHz)</td> <td>300</td> </tr> <tr> <td>490 - 1705 kHz</td> <td>63.7/F (F in kHz)</td> <td>30</td> </tr> <tr> <td>1.705 - 30 MHz</td> <td>0.08</td> <td>30</td> </tr> </tbody> </table> <p>Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.</p>					Frequency (MHz)	Field strength (µV/m at 3 m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)	9 - 490 kHz ¹	6.37/F (F in kHz)	300	490 - 1705 kHz	63.7/F (F in kHz)	30	1.705 - 30 MHz	0.08	30		
Frequency (MHz)	Field strength (µV/m at 3 m)																												
30 – 88	100																												
88 – 216	150																												
216 – 960	200																												
Above 960	500																												
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)																											
9 - 490 kHz ¹	6.37/F (F in kHz)	300																											
490 - 1705 kHz	63.7/F (F in kHz)	30																											
1.705 - 30 MHz	0.08	30																											
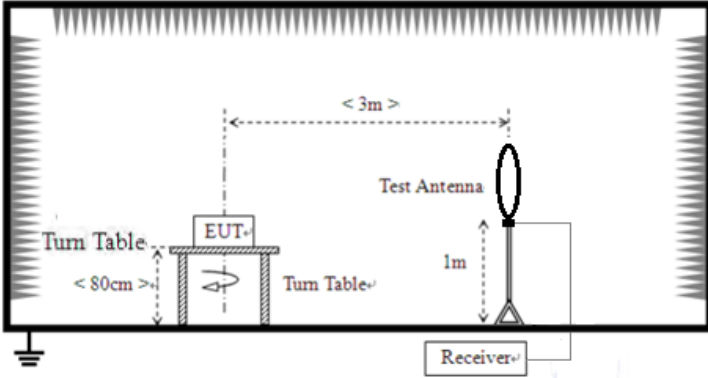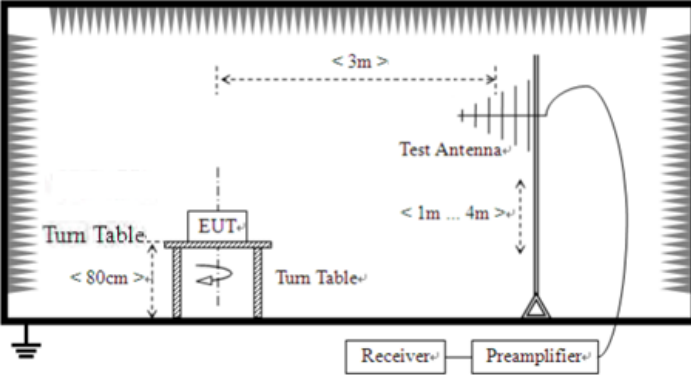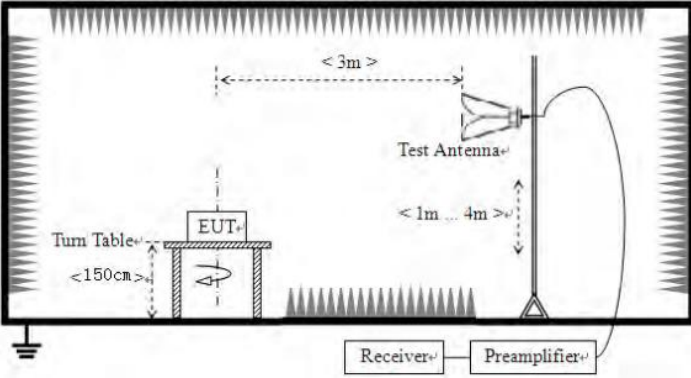
<p>Test setup:</p>	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>  <p>For radiated emissions above 1GHz</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

	<p>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Measurement data:

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.


■ **9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

■ Below 1GHz


Pre-scan all test modes, found worst case at 2480MHz, and so only show the test result of 2480MHz

Horizontal:

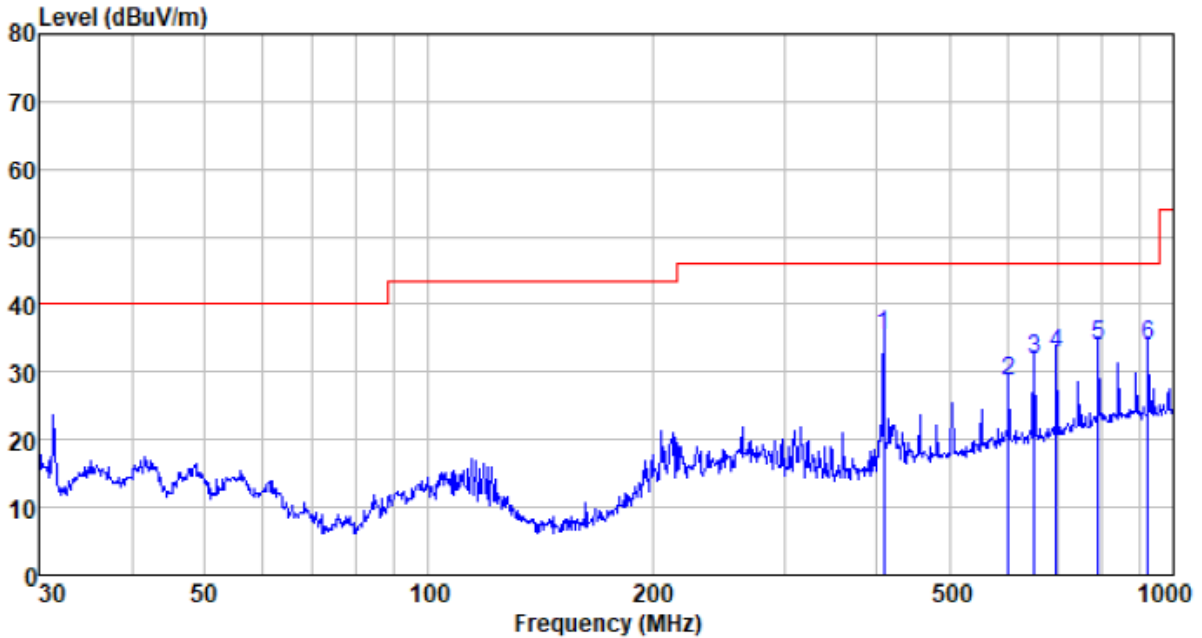

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
408.946	54.47	15.50	2.90	37.52	35.35	46.00	-10.65	QP
601.427	42.91	19.50	3.73	37.54	28.60	46.00	-17.40	QP
649.660	46.01	19.55	3.91	37.59	31.88	46.00	-14.12	QP
696.857	46.82	19.60	4.08	37.63	32.87	46.00	-13.13	QP
793.396	45.88	21.28	4.43	37.62	33.97	46.00	-12.03	QP
925.756	44.28	22.41	4.95	37.58	34.06	46.00	-11.94	QP

Vertical:

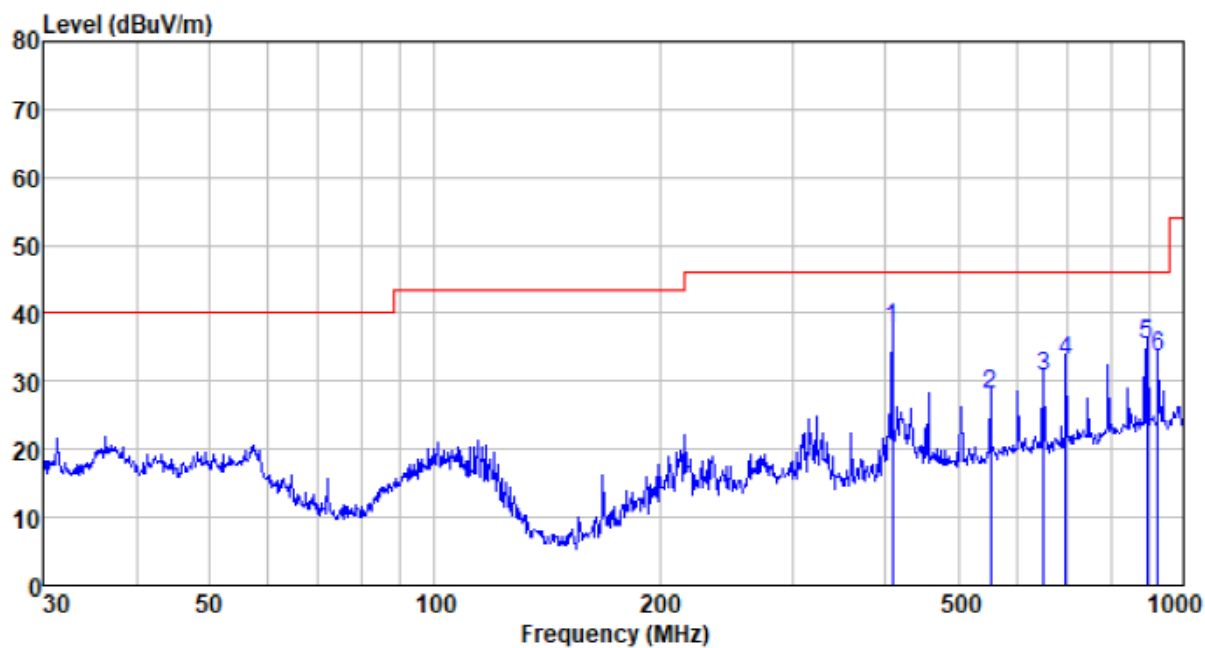

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
408.946	56.82	15.50	2.90	37.52	37.70	46.00	-8.30	QP
552.883	43.63	18.51	3.53	37.53	28.14	46.00	-17.86	QP
649.660	44.84	19.55	3.91	37.59	30.71	46.00	-15.29	QP
696.857	46.89	19.60	4.08	37.63	32.94	46.00	-13.06	QP
893.857	46.01	22.23	4.83	37.60	35.47	46.00	-10.53	QP
925.756	43.87	22.41	4.95	37.58	33.65	46.00	-12.35	QP

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	34.91	31.78	8.60	32.09	43.20	74.00	-30.80	Vertical
7206.00	30.24	36.15	11.65	32.00	46.04	74.00	-27.96	Vertical
9608.00	30.06	37.95	14.14	31.62	50.53	74.00	-23.47	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	38.71	31.78	8.60	32.09	47.00	74.00	-27.00	Horizontal
7206.00	31.79	36.15	11.65	32.00	47.59	74.00	-26.41	Horizontal
9608.00	29.25	37.95	14.14	31.62	49.72	74.00	-24.28	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	24.18	31.78	8.60	32.09	32.47	54.00	-21.53	Vertical
7206.00	19.20	36.15	11.65	32.00	35.00	54.00	-19.00	Vertical
9608.00	18.43	37.95	14.14	31.62	38.90	54.00	-15.10	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	28.14	31.78	8.60	32.09	36.43	54.00	-17.57	Horizontal
7206.00	21.22	36.15	11.65	32.00	37.02	54.00	-16.98	Horizontal
9608.00	17.96	37.95	14.14	31.62	38.43	54.00	-15.57	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	34.94	31.85	8.67	32.12	43.34	74.00	-30.66	Vertical
7320.00	30.26	36.37	11.72	31.89	46.46	74.00	-27.54	Vertical
9760.00	30.07	38.35	14.25	31.62	51.05	74.00	-22.95	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	38.75	31.85	8.67	32.12	47.15	74.00	-26.85	Horizontal
7320.00	31.81	36.37	11.72	31.89	48.01	74.00	-25.99	Horizontal
9760.00	29.27	38.35	14.25	31.62	50.25	74.00	-23.75	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	24.21	31.85	8.67	32.12	32.61	54.00	-21.39	Vertical
7320.00	19.22	36.37	11.72	31.89	35.42	54.00	-18.58	Vertical
9760.00	18.44	38.35	14.25	31.62	39.42	54.00	-14.58	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	28.17	31.85	8.67	32.12	36.57	54.00	-17.43	Horizontal
7320.00	21.24	36.37	11.72	31.89	37.44	54.00	-16.56	Horizontal
9760.00	17.98	38.35	14.25	31.62	38.96	54.00	-15.04	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	34.93	31.93	8.73	32.16	43.43	74.00	-30.57	Vertical
7440.00	30.26	36.59	11.79	31.78	46.86	74.00	-27.14	Vertical
9920.00	30.07	38.81	14.38	31.88	51.38	74.00	-22.62	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	38.73	31.93	8.73	32.16	47.23	74.00	-26.77	Horizontal
7440.00	31.80	36.59	11.79	31.78	48.40	74.00	-25.60	Horizontal
9920.00	29.27	38.81	14.38	31.88	50.58	74.00	-23.42	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.21	31.93	8.73	32.16	32.71	54.00	-21.29	Vertical
7440.00	19.22	36.59	11.79	31.78	35.82	54.00	-18.18	Vertical
9920.00	18.44	38.81	14.38	31.88	39.75	54.00	-14.25	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	28.17	31.93	8.73	32.16	36.67	54.00	-17.33	Horizontal
7440.00	21.24	36.59	11.79	31.78	37.84	54.00	-16.16	Horizontal
9920.00	17.98	38.81	14.38	31.88	39.29	54.00	-14.71	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8 Frequency Stability

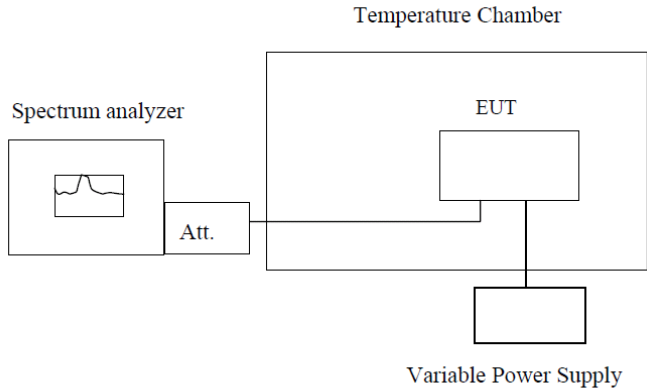Test Requirement:	RSS-Gen Section 6.11& Section 8.11
Test Method:	ANSI C63.10: 2013 & RSS-Gen
Limit:	Manufactures of devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.10, 2013; tested to 2.1055 for compliance to RSS-Gen requirements.
Test setup:	 <p style="text-align: center;">Note : Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark: Set the EUT transmits at un-modulation mode to test frequency stability.

Measurement data:

Frequency stability versus Temp.						
Power Supply: DC 7.4V						
Temp. (°C)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)	Pass /Fail
-30	2402	2402.305	2402.509	2402.902	2402.305	Pass
	2440	2440.100	2440.203	2440.609	2440.100	Pass
	2480	2480.723	2480.040	2480.356	2480.723	Pass
-20	2402	2402.457	2402.908	2402.898	2402.457	Pass
	2440	2440.148	2440.358	2440.976	2440.148	Pass
	2480	2480.116	2480.449	2480.992	2480.116	Pass
-10	2402	2402.290	2402.185	2402.941	2402.290	Pass
	2440	2440.822	2440.250	2440.922	2440.822	Pass
	2480	2480.563	2480.465	2480.744	2480.563	Pass
0	2402	2402.112	2402.276	2402.785	2402.112	Pass
	2440	2440.640	2440.085	2440.933	2440.640	Pass
	2480	2480.970	2480.423	2480.872	2480.970	Pass
10	2402	2402.815	2402.059	2402.301	2402.815	Pass
	2440	2440.032	2440.289	2440.316	2440.032	Pass
	2480	2480.497	2480.592	2480.624	2480.497	Pass
20	2402	2402.893	2402.984	2402.868	2402.893	Pass
	2440	2440.176	2440.532	2440.614	2440.176	Pass
	2480	2480.363	2480.916	2480.884	2480.363	Pass
30	2402	2402.248	2402.438	2402.041	2402.248	Pass
	2440	2440.765	2440.881	2440.863	2440.765	Pass
	2480	2480.062	2480.633	2480.389	2480.062	Pass
40	2402	2402.743	2402.190	2402.278	2402.743	Pass
	2440	2440.681	2440.378	2440.924	2440.681	Pass
	2480	2480.624	2480.666	2480.269	2480.624	Pass
50	2402	2402.086	2402.997	2402.934	2402.086	Pass
	2440	2440.857	2440.059	2440.079	2440.857	Pass
	2480	2480.495	2480.544	2480.230	2480.495	Pass
Frequency stability versus Voltage						
Temperature: 25°C						
Power Supply (VDC)	Operating Frequency (MHz)	0 minute Measured Frequency (MHz)	2 minute Measured Frequency (MHz)	5 minute Measured Frequency (MHz)	10 minute Measured Frequency (MHz)	Pass /Fail
7.8	2402	2402.218	2402.274	2402.395	2402.218	Pass
	2440	2440.521	2440.438	2440.281	2440.521	Pass
	2480	2480.209	2480.709	2480.134	2480.209	Pass
6.6	2402	2402.926	2402.059	2402.380	2402.926	Pass
	2440	2440.618	2440.387	2440.317	2440.618	Pass
	2480	2480.069	2480.159	2480.039	2480.069	Pass

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----