

# TEST REPORT

**Applicant:** FCC: Magtek Incorporated  
IC: MagTek Inc

**Address of Applicant:** FCC: 1710 Apollo Court, seal beach, California 90740, United States  
IC: 1710 Apollo Court Seal Beach CA 90740 United States

**Manufacturer:** FCC: Magtek Incorporated  
IC: MagTek Inc

**Address of Manufacturer:** FCC: 1710 Apollo Court, seal beach, California 90740, United States  
IC: 1710 Apollo Court Seal Beach CA 90740 United States

**Equipment Under Test (EUT)**

Product Name: DynaGlass  
Model No.: 40000102, 40000101  
Trade Mark: MAGTEK

**FCC ID:** U73-40000102

**IC:** 23169-40000102

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart E Section 15.407  
RSS-Gen Issue 5  
RSS-247 Issue 2

**Date of sample receipt:** July 07, 2020

**Date of Test:** July 08, 2020-August 31, 2020

**Date of report issued:** August 31, 2020

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



**Robinson Lo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	August 31, 2020	Original

Prepared By:



Date:

August 31, 2020

Project Engineer

Check By:



Reviewer

Date:

August 31, 2020

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 DESCRIPTION OF SUPPORT UNITS .....	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT .....	10
7.2 CONDUCTED EMISSIONS .....	11
7.3 CONDUCTED PEAK OUTPUT POWER .....	14
7.4 CHANNEL BANDWIDTH AND 99% OCCUPIED BANDWIDTH .....	15
7.5 POWER SPECTRAL DENSITY .....	18
7.6 BAND EDGE.....	20
7.6.1 Radiated Emission Method.....	20
7.7 SPURIOUS EMISSION.....	24
7.7.1 Radiated Emission Method.....	24
7.8 FREQUENCY STABILITY .....	31
8 TEST SETUP PHOTO .....	34
9 EUT CONSTRUCTIONAL DETAILS .....	34

## 4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203 & RSS-Gen 8.3	Pass
AC Power Line Conducted Emission	FCC part 15.207 & RSS-Gen 8.8	Pass
Conducted Peak Output Power	FCC part 15.407(a)(3) & RSS-247 6.2.4.1	Pass
Channel Bandwidth and 99% Occupied Bandwidth	FCC part 15.407(e) & RSS-247 6.2.4.1	Pass
Power Spectral Density	FCC part 15.407(a)(3) & RSS-247 6.2.4.1	Pass
Band Edge	FCC part 15.407(b)(4) RSS-Gen 8.10 & RSS-Gen	Pass
Spurious Emission	FCC part 15.205/15.209/15.407(b)(4) RSS-247 6.2.4.2 & RSS-Gen 8.9	Pass
Frequency Stability	FCC part 15.407(g) & RSS-Gen 8.11	Pass

*Remarks:*

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	DynaGlass
Model No.:	40000102, 40000101
Test Model No:	40000102
Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The differences are appearance color and model name for commercial purpose.	
S/N:	B90A998
Hardware Version:	DynaGlass_AND_V040 DynaGlass_PAY_V040
Software Version:	Android:0.9.05; Max32550-LCS+:1.0.0
Test sample(s) ID:	GTS202007000071-1
Sample(s) Status:	Engineer sample
Operation Frequency:	802.11a/802.11n(HT20): 5745MHz ~ 5825MHz
Channel numbers:	5
Channel bandwidth:	20MHz
Modulation technology:	Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integral Antenna
Antenna gain:	1.9dBi(declare by applicant)
Power supply:	DC 5V or DC 7.4V 1850mAh 13.69Wh by Li-ion battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745MHz	151	5755MHz	153	5765MHz	155	5775MHz
157	5785MHz	159	5795MHz	161	5805MHz	163	5815MHz
165	5825MHz						

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)		
	802.11a/n(HT20)		
Lowest channel	5745		
Middle channel	5785		
Highest channel	5825		

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	------------------------------------------------

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11a	6Mbps
802.11n(HT20)	6.5Mbps

## 5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
Lenovo	Notebook PC	E40-80	N/A
Apple	PC	A1278	C1MN99ERDTY3

## 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

- **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A.

- **CNAS (No. CNAS L5775)**

CNAS has accredited Global United Technology Services Co., Ltd., to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

## 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 25 2020	June. 24 2021
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 25 2020	June. 24 2021
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 25 2020	June. 24 2021
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 25 2020	June. 24 2021
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 25 2020	June. 24 2021
9	Coaxial Cable	GTS	N/A	GTS211	June. 25 2020	June. 24 2021
10	Coaxial cable	GTS	N/A	GTS210	June. 25 2020	June. 24 2021
11	Coaxial Cable	GTS	N/A	GTS212	June. 25 2020	June. 24 2021
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 25 2020	June. 24 2021
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 25 2020	June. 24 2021
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 25 2020	June. 24 2021
15	Band filter	Amindeon	82346	GTS219	June. 25 2020	June. 24 2021
16	Power Meter	Anritsu	ML2495A	GTS540	June. 25 2020	June. 24 2021
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 25 2020	June. 24 2021
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 25 2020	June. 24 2021
19	Splitter	Agilent	11636B	GTS237	June. 25 2020	June. 24 2021
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 25 2020	June. 24 2021
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 19 2019	Oct. 18 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 19 2019	Oct. 18 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 19 2019	Oct. 18 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 25 2020	June. 24 2021



Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.15 2019	May.14 2022
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 25 2020	June. 24 2021
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	June. 25 2020	June. 24 2021
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 25 2020	June. 24 2021
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 25 2020	June. 24 2021
9	ISN	SCHWARZBECK	NTFM 8158	GTD565	June. 25 2020	June. 24 2021

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 25 2020	June. 24 2021
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 25 2020	June. 24 2021
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 25 2020	June. 24 2021
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 25 2020	June. 24 2021
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 25 2020	June. 24 2021
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 25 2020	June. 24 2021
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 25 2020	June. 24 2021
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 25 2020	June. 24 2021

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 25 2020	June. 24 2021
2	Barometer	ChangChun	DYM3	GTS255	June. 25 2020	June. 24 2021

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<p><i>15.203 requirement:</i></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<b>Standard requirement:</b>	RSS-Gen 8.3
<p>A transmitter can only be sold or operated with antennas with which it was approved.</p> <p>When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power</p>	
<b>E.U.T Antenna:</b>	
<p><i>The antenna is Integral antenna, the best case gain of the antenna is 1.9dBi, reference to the appendix II for details</i></p>	


## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207 RSS-Gen 8.8					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
5-30		60		50		
* Decreases with the logarithm of the frequency.						
Test setup:	<p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.


**Measurement data**

Line:

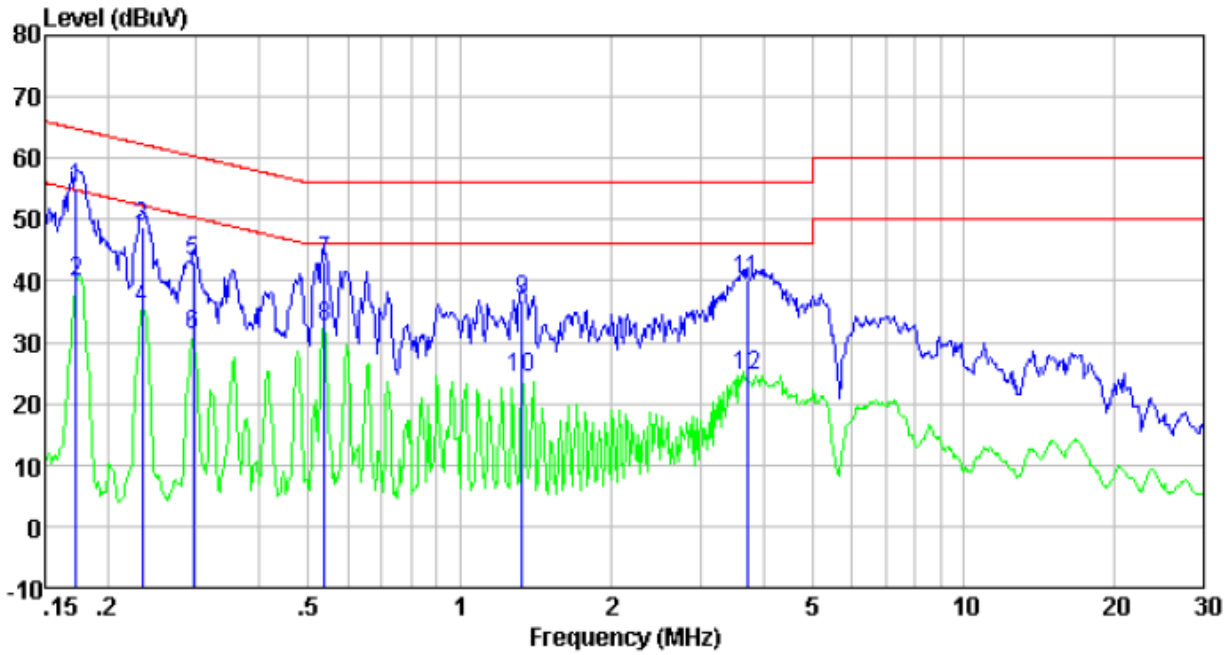

Freq. MHz	Read Level dBuV	Factor dB/m	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.17	34.65	20.49	55.14	64.81	-9.67	QP
0.17	19.46	20.49	39.95	54.81	-14.86	Average
0.23	28.30	20.51	48.81	62.30	-13.49	QP
0.23	15.06	20.51	35.57	52.30	-16.73	Average
0.30	22.48	20.50	42.98	60.37	-17.39	QP
0.30	10.77	20.50	31.27	50.37	-19.10	Average
0.54	22.62	20.41	43.03	56.00	-12.97	QP
0.54	12.11	20.41	32.52	46.00	-13.48	Average
1.33	16.57	20.36	36.93	56.00	-19.07	QP
1.33	3.72	20.36	24.08	46.00	-21.92	Average
3.72	19.73	20.38	40.11	56.00	-15.89	QP
3.72	4.28	20.38	24.66	46.00	-21.34	Average

**Neutral:**

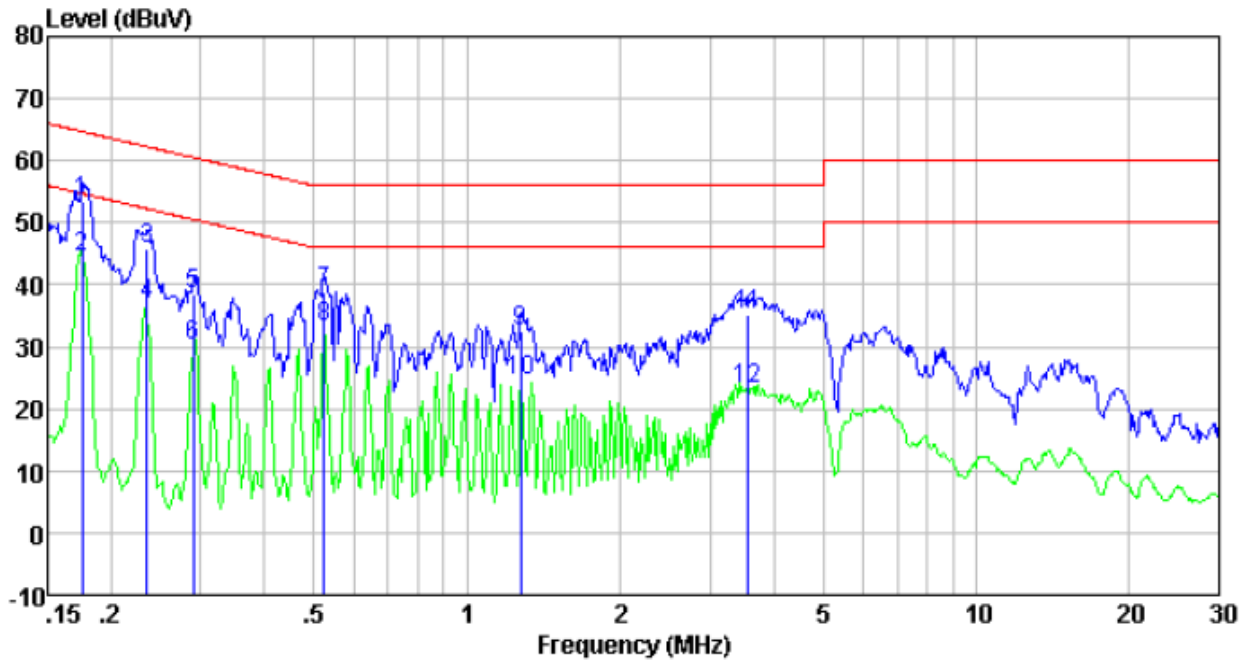


Freq. MHz	Read Level dBuV	Factor dB/m	Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.17	32.81	20.49	53.30	64.72	-11.42	QP
0.17	24.07	20.49	44.56	54.72	-10.16	Average
0.24	25.41	20.51	45.92	62.26	-16.34	QP
0.24	16.16	20.51	36.67	52.26	-15.59	Average
0.29	18.07	20.50	38.57	60.54	-21.97	QP
0.29	9.67	20.50	30.17	50.54	-20.37	Average
0.52	18.38	20.42	38.80	56.00	-17.20	QP
0.52	12.77	20.42	33.19	46.00	-12.81	Average
1.28	12.23	20.36	32.59	56.00	-23.41	QP
1.28	4.27	20.36	24.63	46.00	-21.37	Average
3.57	14.70	20.38	35.08	56.00	-20.92	QP
3.57	2.97	20.38	23.35	46.00	-22.65	Average

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both *limits and measurement with the average detector receiver is unnecessary.*


## 7.3 Conducted Peak Output Power

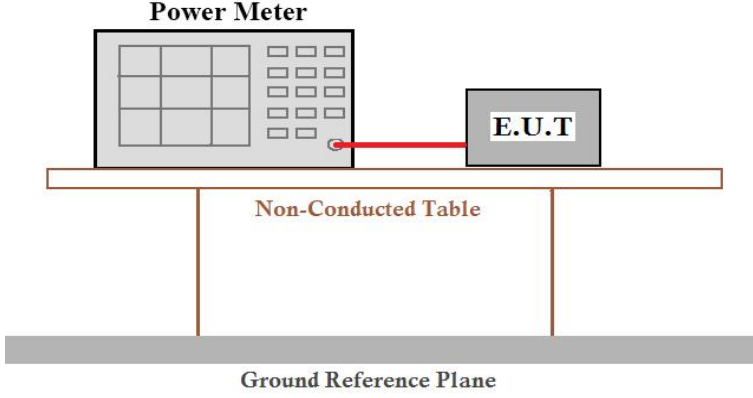Test Requirement:	FCC Part15 E Section 15.407(a)(3) RSS-247 6.2.4.1
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 & RSS-Gen
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Power Meter is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Test CH	Peak Output Power (dBm)		Limit(dBm)	Result
	802.11a	802.11n(HT20)		
Lowest	15.95	14.92	30.00	Pass
Middle	14.59	15.72		
Highest	14.86	14.97		

## 7.4 Channel Bandwidth and 99% Occupied Bandwidth

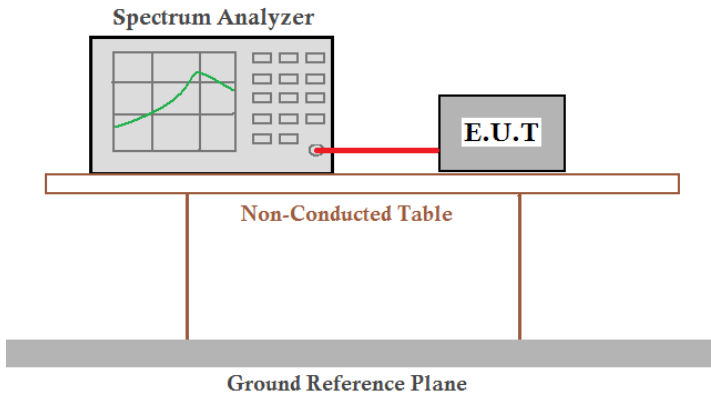
Test Requirement:	FCC Part15 E Section 15.407(e) RSS-247 Section 5.2 & RSS-Gen Section 6.2.4.1
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 & RSS-Gen
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


Test CH	Channel Bandwidth (MHz)		Limit (KHz)	Result
	802.11a	802.11n(HT20)		
Lowest	16.432	17.420	>500	Pass
Middle	16.395	17.621		
Highest	16.438	17.619		

Test CH	99% Occupied Bandwidth (MHz)		Limit (KHz)	Result
	802.11a	802.11n(HT20)		
Lowest	16.8797	18.0633	>500	Pass
Middle	16.8509	17.8648		
Highest	16.6851	17.8413		


Test plot as follows:

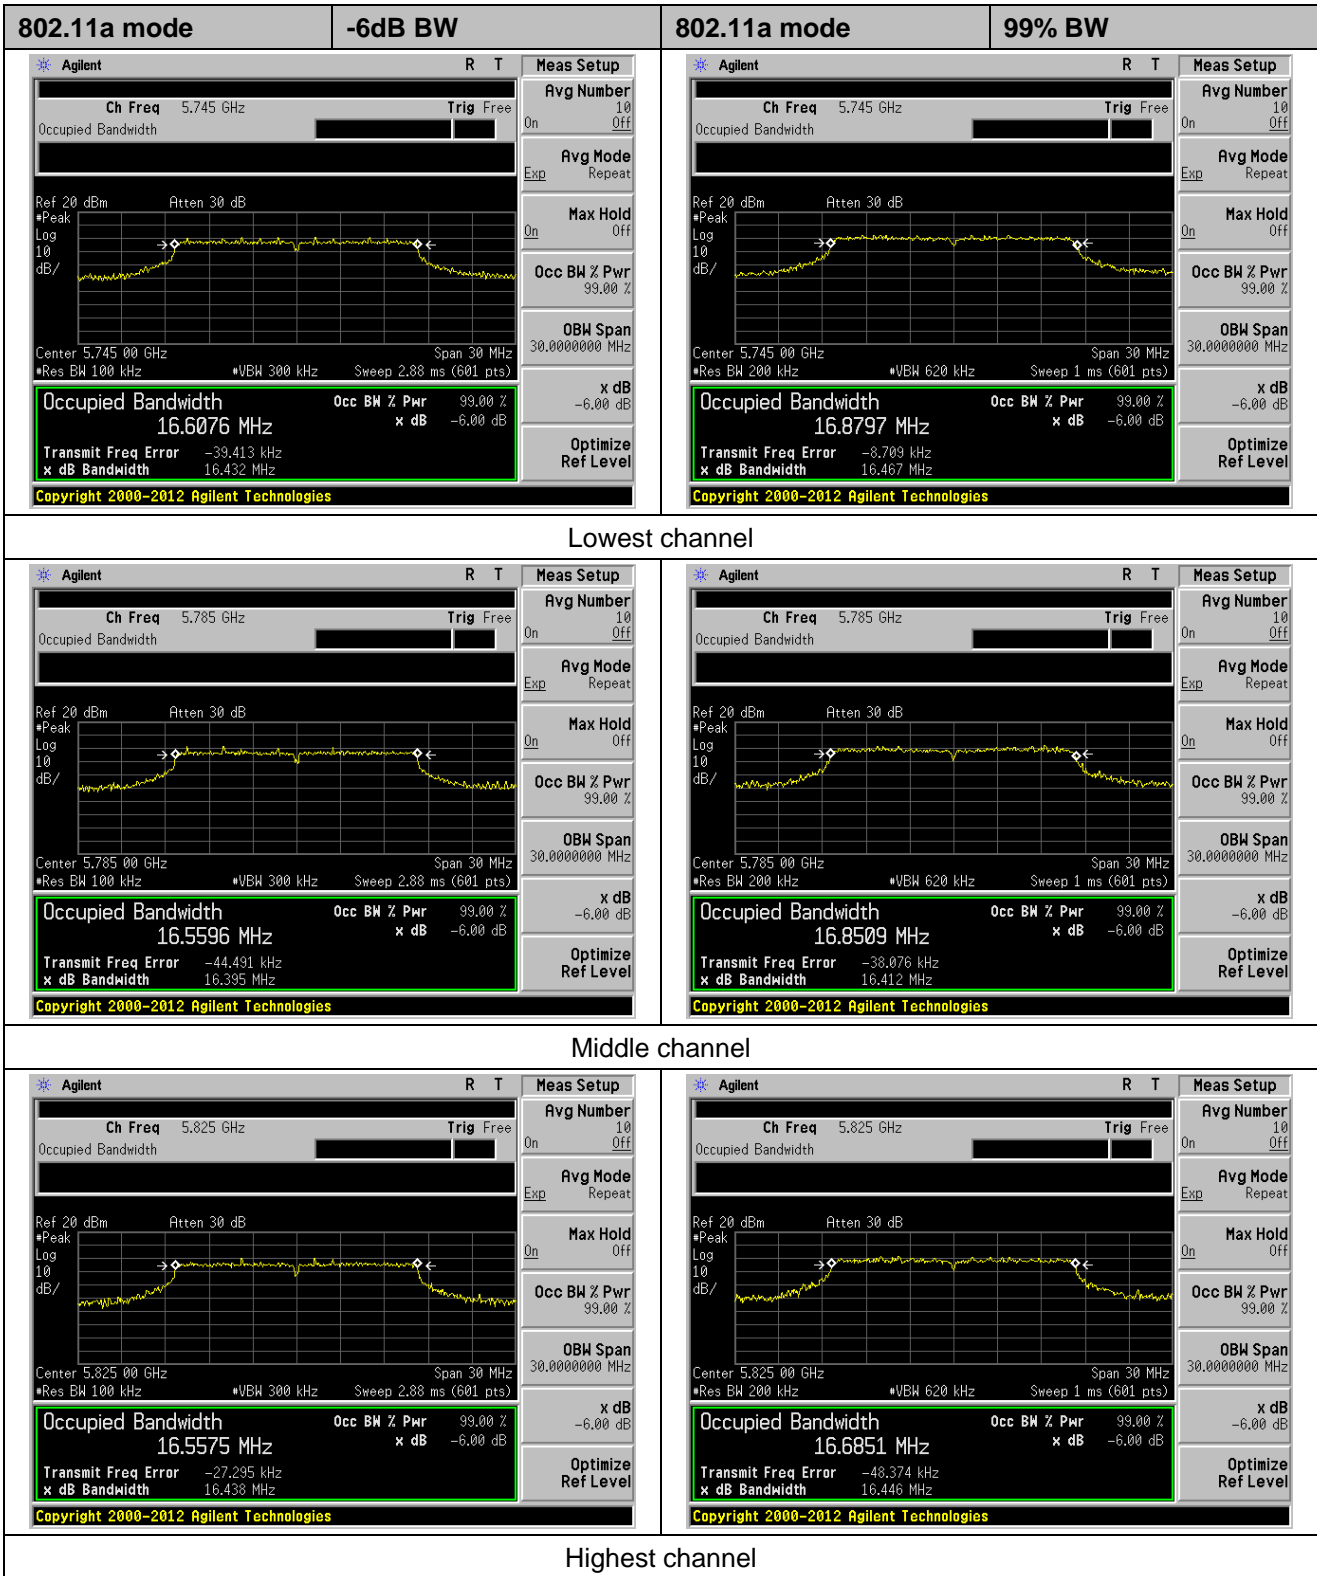




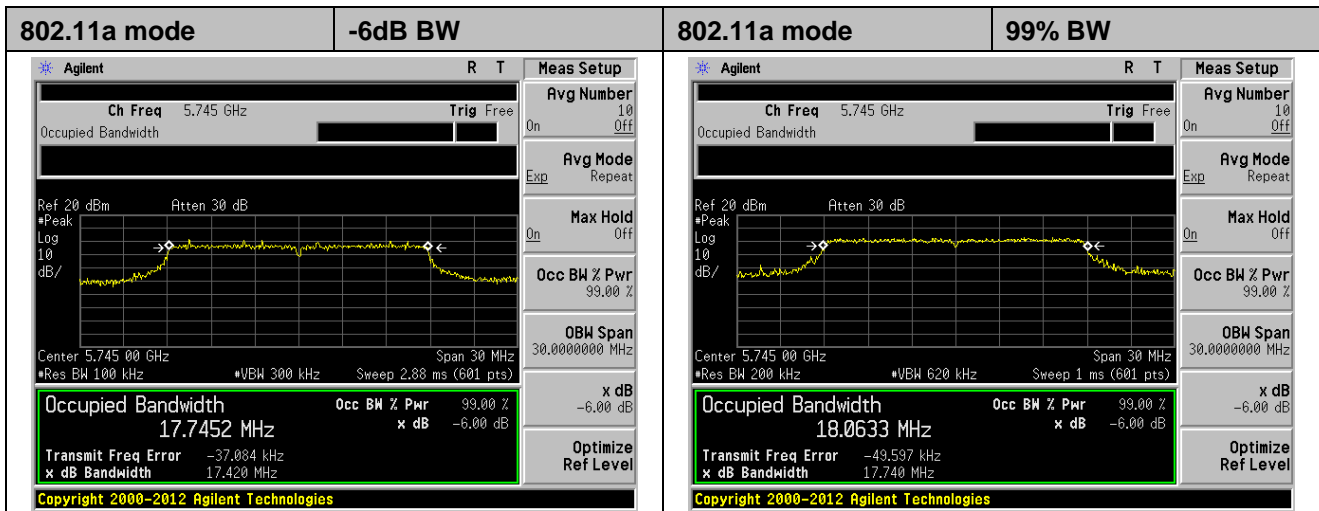

Lowest channel

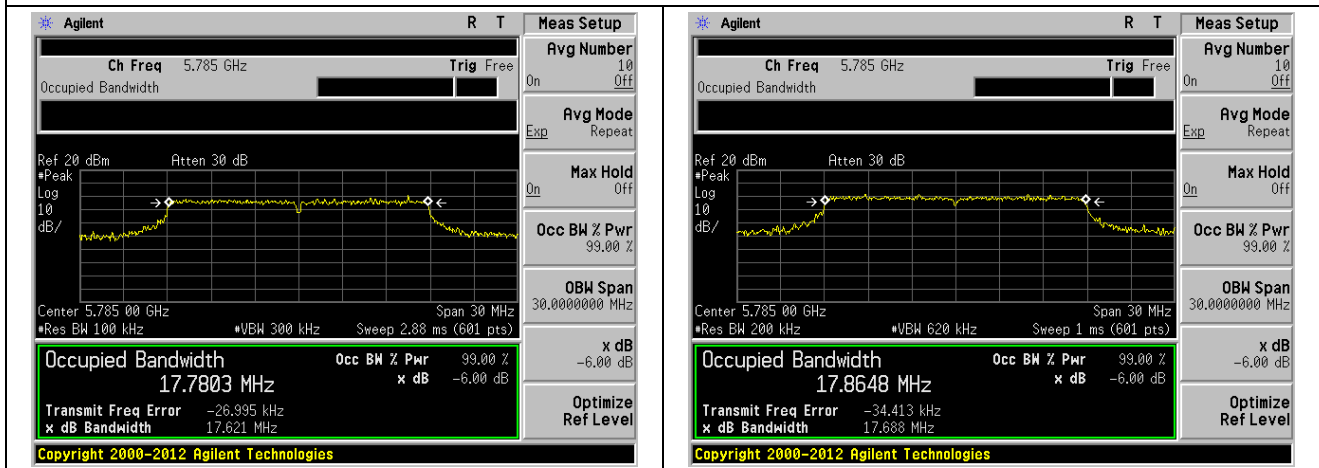


Middle channel

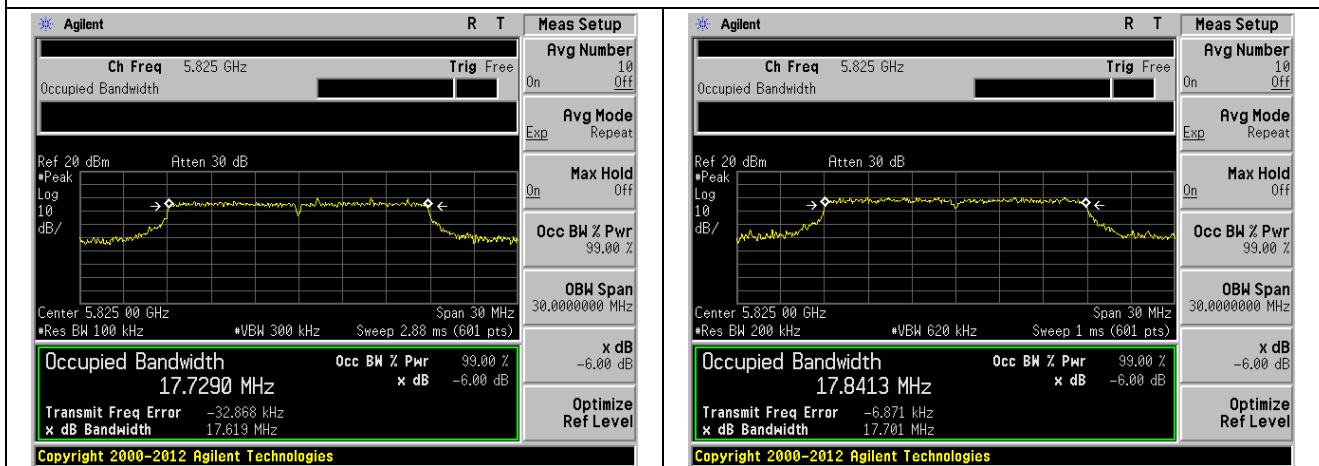

Highest channel


## 7.5 Power Spectral Density

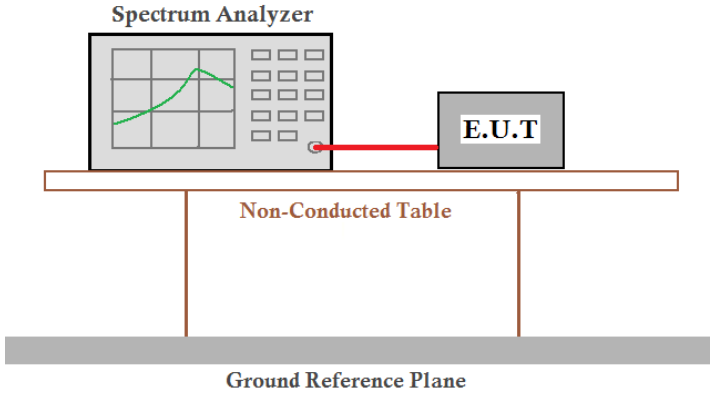Test Requirement:	FCC Part15 E Section 15.407(a)(3) RSS-247 Section 6.2.4.1
Test Method:	ANSI C63.10:2013 and KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 & RSS-Gen
Limit:	30dBm/500kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


Test CH	Power Spectral Density (dBm/500kHz)		Limit (dBm/500kHz)	Result
	802.11a	802.11n(HT20)		
Lowest	5.76	4.84	30.00	Pass
Middle	5.00	5.91		
Highest	4.42	3.77		

Test plot as follows:

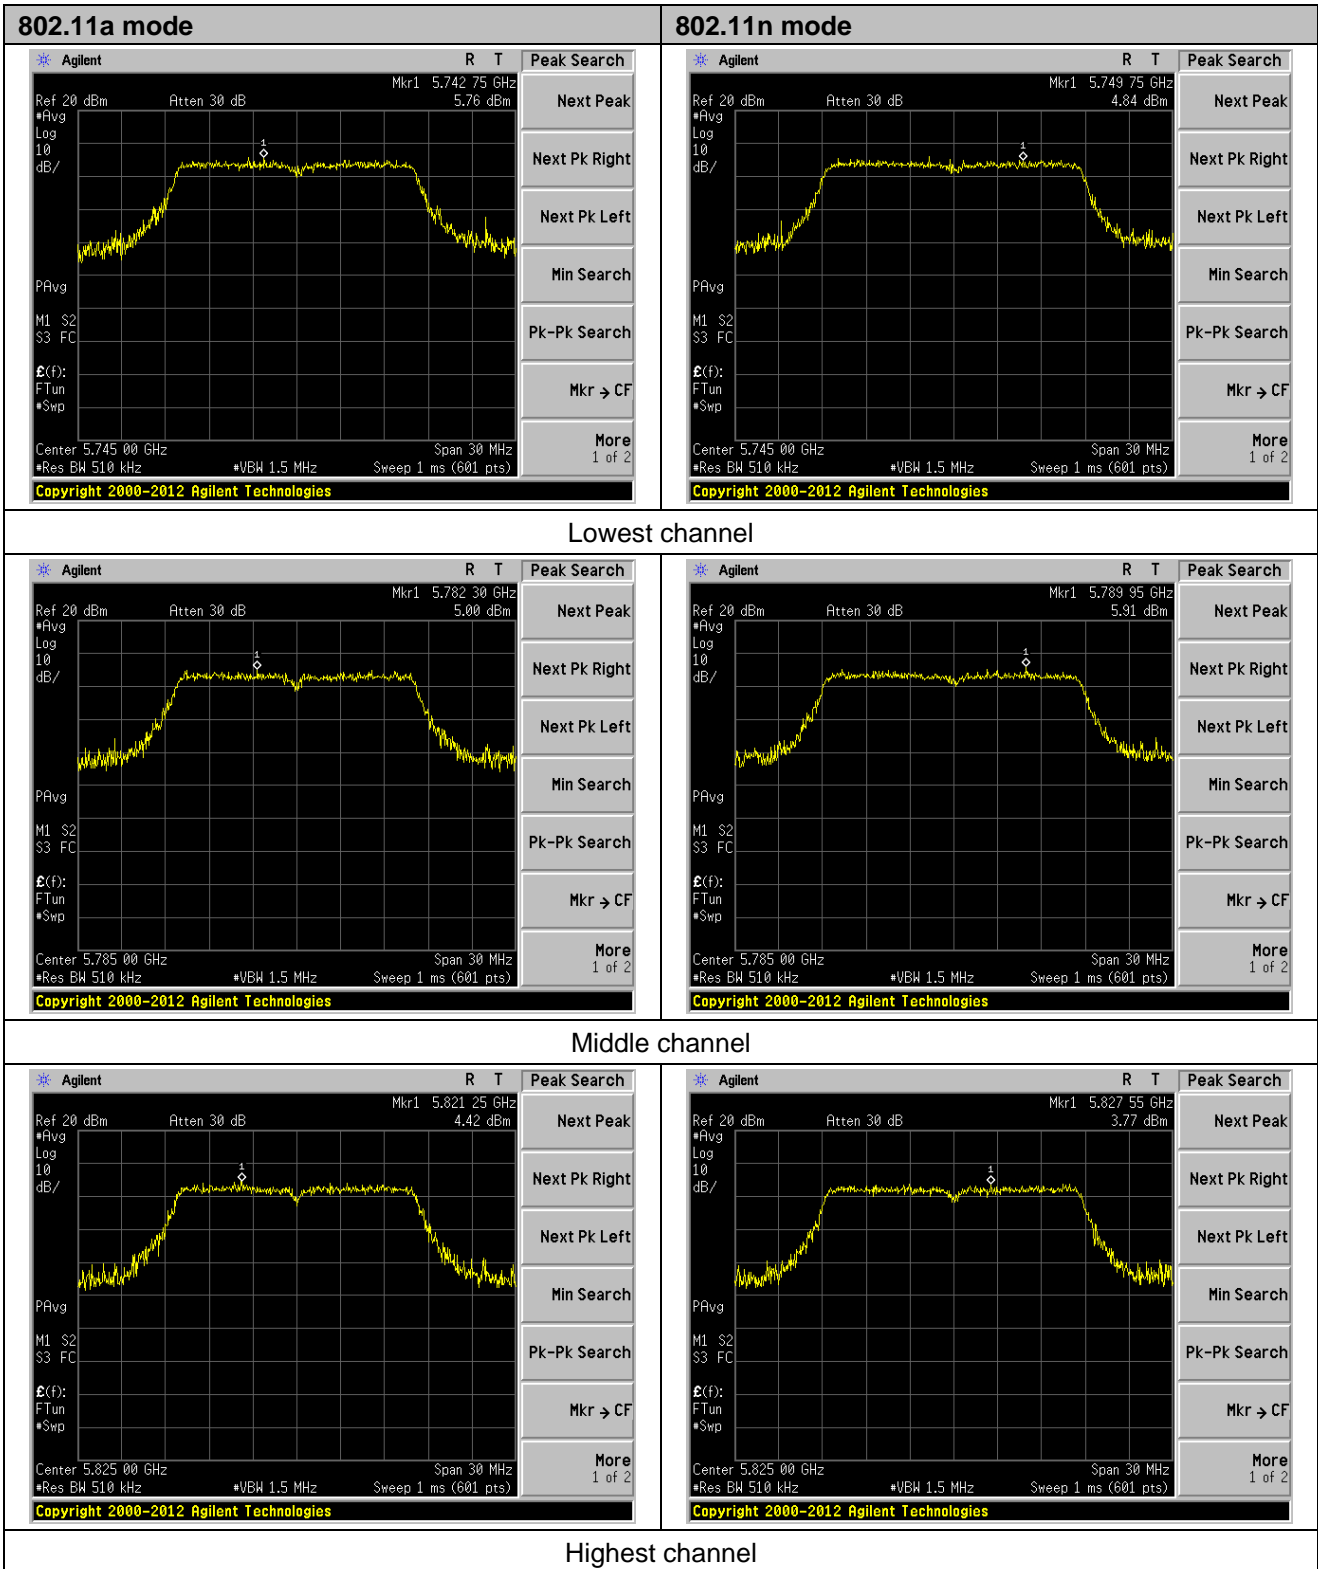

## 7.6 Band edge

### 7.6.1 Radiated Emission Method

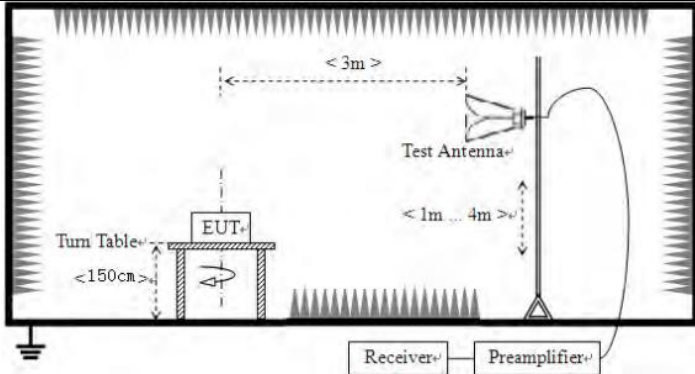Test Requirement:	FCC Part15 C Section 15.209 and 15.205 RSS-247 Section 6.2.4.2 & RSS-Gen 8.10				
Test Method:	ANSI C63.10: 2013 & RSS-Gen				
Test Frequency Range:	9kHz to 40GHz, only worse case is reported				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	RMS
Limit:	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.				
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning.</li> </ol>				

	And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

*Remarks:*

1. Only the worst case Main Antenna test data..
2. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
5. According to KDB 789033 D02v02r01 section G) 1) d),for measurements above 1000 MHz @3m distance, the limit of field strength is computed as follows:  
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$   
 $E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$   
 $E[\text{dBuV/m}] = 10 + 95.2 = 105.2\text{dBuV/m}.$   
 $E[\text{dBuV/m}] = 15.6 + 95.2 = 110.8\text{dBuV/m}.$   
 $E[\text{dBuV/m}] = 27 + 95.2 = 122.2\text{dBuV/m}$

**Measurement data:**

<b>IEEE 802.11a HT20</b>								
<b>Peak value:</b>								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	27.37	32.36	9.72	23.83	45.62	68.2	-22.58	Horizontal
5700.00	27.10	32.5	9.79	23.84	45.55	105.2	-59.65	Horizontal
5720.00	26.84	32.53	9.81	23.85	45.33	110.8	-65.47	Horizontal
5725.00	29.27	32.53	9.83	23.86	47.77	122.2	-74.43	Horizontal
5850.00	26.98	32.7	9.99	23.87	45.8	122.2	-76.4	Horizontal
5855.00	29.52	32.72	9.99	23.88	48.35	110.8	-62.45	Horizontal
5875.00	26.95	32.74	10.04	23.89	45.84	105.2	-59.36	Horizontal
5925.00	28.23	32.8	10.11	23.9	47.24	68.2	-20.96	Horizontal
5650.00	25.69	32.36	9.72	23.83	43.94	68.2	-24.26	Vertical
5700.00	27.99	32.5	9.79	23.84	46.44	105.2	-58.76	Vertical
5720.00	25.85	32.53	9.81	23.85	44.34	110.8	-66.46	Vertical
5725.00	26.52	32.53	9.83	23.86	45.02	122.2	-77.18	Vertical
5850.00	27.38	32.7	9.99	23.87	46.2	122.2	-76	Vertical
5855.00	29.50	32.72	9.99	23.88	48.33	110.8	-62.47	Vertical
5875.00	25.26	32.74	10.04	23.89	44.15	105.2	-61.05	Vertical
5925.00	25.95	32.8	10.11	23.9	44.96	68.2	-23.24	Vertical


IEEE 802.11n								
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
5650.00	27.68	32.36	9.72	23.83	45.93	68.2	-22.27	Horizontal
5700.00	29.20	32.5	9.79	23.84	47.65	105.2	-57.55	Horizontal
5720.00	28.47	32.53	9.81	23.85	46.96	110.8	-63.84	Horizontal
5725.00	26.87	32.53	9.83	23.86	45.37	122.2	-76.83	Horizontal
5850.00	27.93	32.7	9.99	23.87	46.75	122.2	-75.45	Horizontal
5855.00	29.30	32.72	9.99	23.88	48.13	110.8	-62.67	Horizontal
5875.00	28.80	32.74	10.04	23.89	47.69	105.2	-57.51	Horizontal
5925.00	29.35	32.8	10.11	23.9	48.36	68.2	-19.84	Horizontal
5650.00	29.10	32.36	9.72	23.83	47.35	68.2	-20.85	Vertical
5700.00	29.44	32.5	9.79	23.84	47.89	105.2	-57.31	Vertical
5720.00	29.99	32.53	9.81	23.85	48.48	110.8	-62.32	Vertical
5725.00	27.49	32.53	9.83	23.86	45.99	122.2	-76.21	Vertical
5850.00	29.86	32.7	9.99	23.87	48.68	122.2	-73.52	Vertical
5855.00	26.57	32.72	9.99	23.88	45.4	110.8	-65.4	Vertical
5875.00	27.12	32.74	10.04	23.89	46.01	105.2	-59.19	Vertical
5925.00	25.11	32.8	10.11	23.9	44.12	68.2	-24.08	Vertical

## 7.7 Spurious Emission


### 7.7.1 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209, Part 15E Section 15.407(b)(4) RSS-247 Section 6.2.4.2 & RSS-Gen Section 8.9																													
Test Method:	ANSI C63.10:2013 & RSS-Gen																													
Test Frequency Range:	9kHz to 40GHz																													
Test site:	Measurement Distance: 3m																													
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>9kHz-150KHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz-30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>AV</td> <td>1MHz</td> <td>3MHz</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Value	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value
Frequency	Detector	RBW	VBW	Value																										
9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																										
150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																										
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																										
Above 1GHz	Peak	1MHz	3MHz	Peak Value																										
	AV	1MHz	3MHz	Average Value																										
FCC Limit:	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100**</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150**</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200**</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3					
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																												
0.009-0.490	2400/F(kHz)	300																												
0.490-1.705	24000/F(kHz)	30																												
1.705-30.0	30	30																												
30-88	100**	3																												
88-216	150**	3																												
216-960	200**	3																												
Above 960	500	3																												
IC Limit:	<p><b>Table 5 – General field strength limits at frequencies above 30 MHz</b></p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (µV/m at 3 m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table> <p><b>Table 6 – General field strength limits at frequencies below 30 MHz</b></p> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Magnetic field strength (H-Field) (µA/m)</th> <th>Measurement distance (m)</th> </tr> </thead> <tbody> <tr> <td>9 - 490 kHz<sup>1</sup></td> <td>6.37/F (F in kHz)</td> <td>300</td> </tr> <tr> <td>490 - 1705 kHz</td> <td>63.7/F (F in kHz)</td> <td>30</td> </tr> <tr> <td>1.705 - 30 MHz</td> <td>0.08</td> <td>30</td> </tr> </tbody> </table> <p><b>Note 1:</b> The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.</p>	Frequency (MHz)	Field strength (µV/m at 3 m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)	9 - 490 kHz <sup>1</sup>	6.37/F (F in kHz)	300	490 - 1705 kHz	63.7/F (F in kHz)	30	1.705 - 30 MHz	0.08	30							
Frequency (MHz)	Field strength (µV/m at 3 m)																													
30 – 88	100																													
88 – 216	150																													
216 – 960	200																													
Above 960	500																													
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)																												
9 - 490 kHz <sup>1</sup>	6.37/F (F in kHz)	300																												
490 - 1705 kHz	63.7/F (F in kHz)	30																												
1.705 - 30 MHz	0.08	30																												
Test setup:	For radiated emissions from 9kHz to 30MHz																													




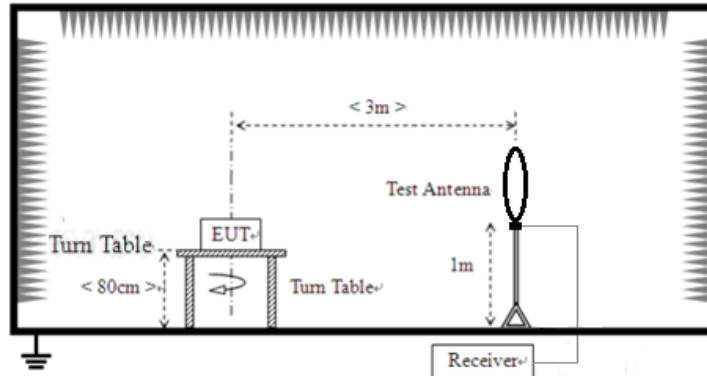

For radiated emissions from 30MHz to 1GHz

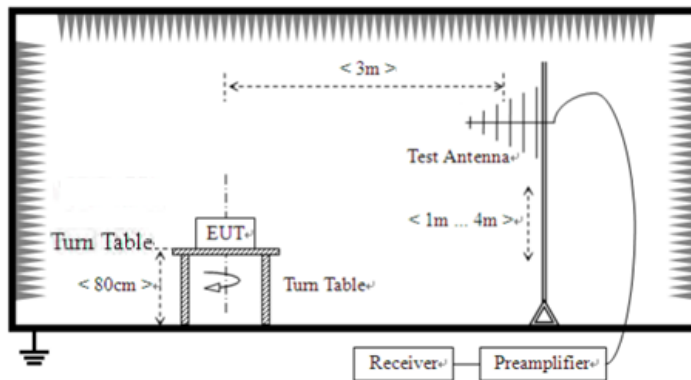

For radiated emissions above 1GHz

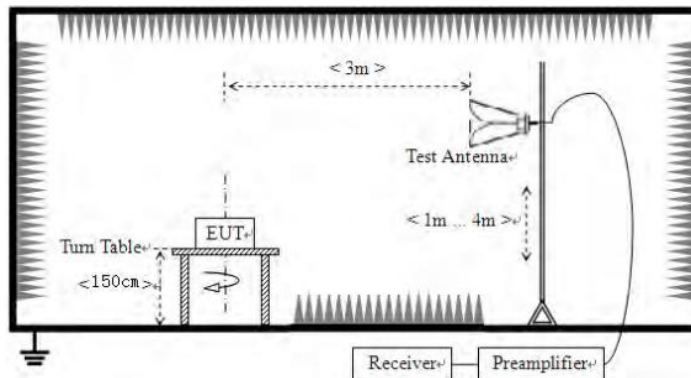

Test Procedure:

1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case

	<p>and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</p>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

*Remarks:*

1. Only the worst case Main Antenna test data.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

**Measurement Data:**


**9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

## Below 1GHz


Pre-scan all test modes, found worst case at 802.11ac(HT80) 5775MHz, and so only show the test result of 802.11ac(HT80) 5775MHz

### Horizontal:

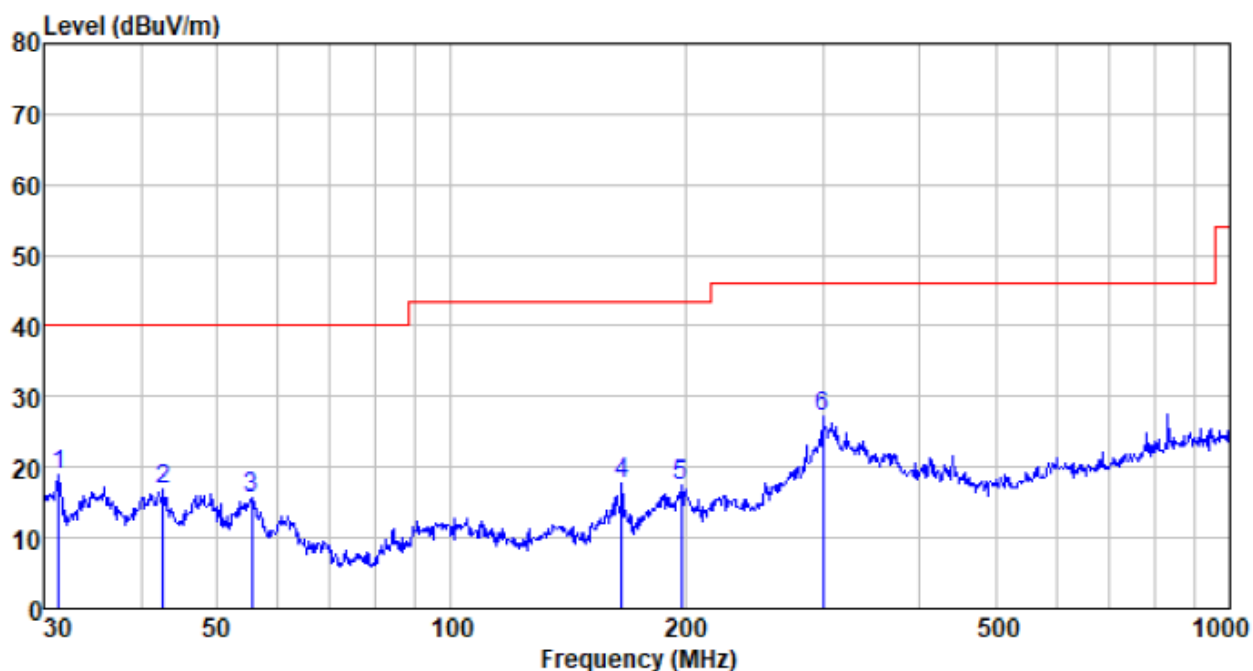

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
31.399	42.10	11.23	0.57	35.11	18.79	40.00	-21.21	QP
42.750	39.84	12.23	0.69	35.82	16.94	40.00	-23.06	QP
55.415	39.27	11.75	0.82	36.26	15.58	40.00	-24.42	QP
165.487	44.73	8.41	1.66	37.16	17.64	43.50	-25.86	QP
197.200	42.65	10.26	1.82	37.32	17.41	43.50	-26.09	QP
300.367	48.53	13.60	2.36	37.42	27.07	46.00	-18.93	QP

**Vertical:**

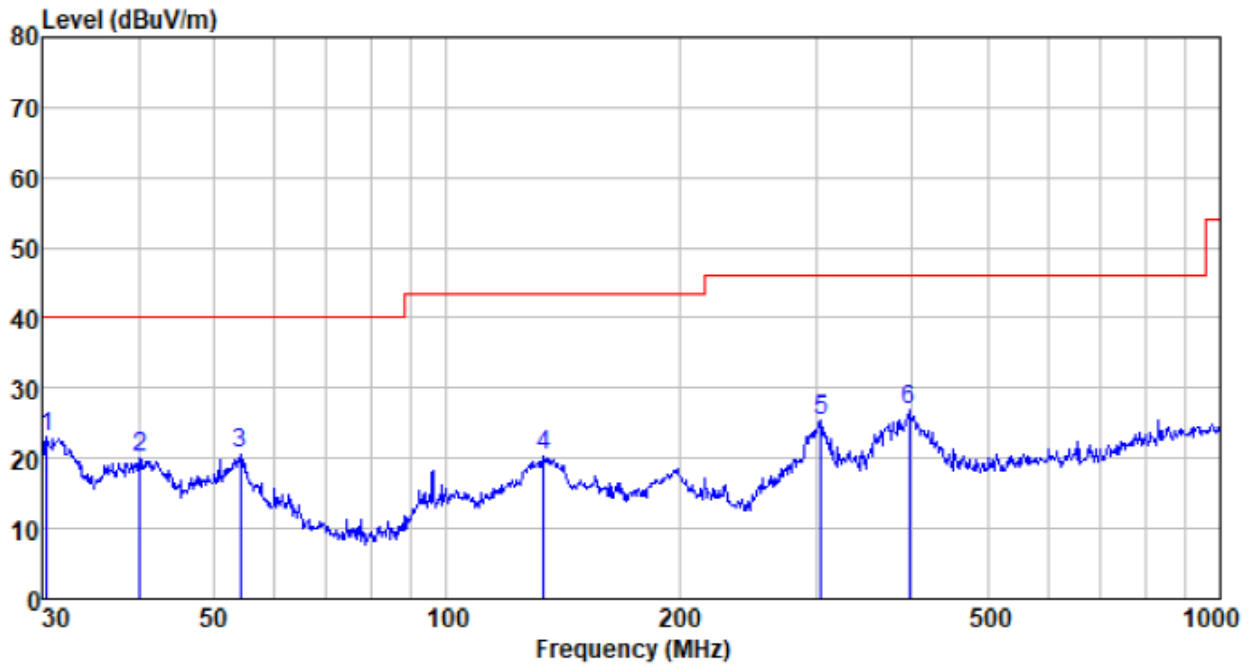

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
30.424	46.19	11.21	0.56	35.03	22.93	40.00	-17.07	QP
40.135	42.89	12.20	0.66	35.67	20.08	40.00	-19.92	QP
54.071	44.17	11.88	0.81	36.24	20.62	40.00	-19.38	QP
133.619	47.94	7.92	1.46	36.98	20.34	43.50	-23.16	QP
304.610	46.70	13.68	2.38	37.43	25.33	46.00	-20.67	QP
396.242	46.29	15.25	2.83	37.52	26.85	46.00	-19.15	QP

**Above 1GHz:**

Test mode:		802.11a		Test channel:		lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11490	28.65	21.64	50.29	74	-23.71	PK
V	17235	27.66	21.8	49.46	74	-24.54	PK
H	11490	28.05	21.83	49.88	74	-24.12	PK
H	17235	30.02	21.67	51.69	74	-22.31	PK

Test mode:		802.11a		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11570	29.65	21.64	51.29	74	-22.71	PK
V	17355	29.14	21.8	50.94	74	-23.06	PK
H	11570	28.44	21.83	50.27	74	-23.73	PK
H	17355	30.95	21.67	52.62	74	-21.38	PK

Test mode:		802.11a		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11650	26.87	21.64	48.51	74	-25.49	PK
V	17475	25.22	21.8	47.02	74	-26.98	PK
H	11650	24.86	21.83	46.69	74	-27.31	PK
H	17475	27.05	21.67	48.72	74	-25.28	PK

Test mode:		802.11n		Test channel:		lowest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11490	29.68	21.64	51.32	74	-22.68	PK
V	17235	28.50	21.8	50.3	74	-23.7	PK
H	11490	26.97	21.83	48.8	74	-25.2	PK
H	17235	26.99	21.67	48.66	74	-25.34	PK


Test mode:		802.11n		Test channel:		Middle	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11570	25.35	21.64	46.99	74	-27.01	PK
V	17355	26.66	21.8	48.46	74	-25.54	PK
H	11570	28.81	21.83	50.64	74	-23.36	PK
H	17355	26.59	21.67	48.26	74	-25.74	PK

Test mode:		802.11n		Test channel:		Highest	
Antenna Pol.	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dBuV/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Over limit(dB)	Detector
V	11650	30.34	21.64	51.98	74	-22.02	PK
V	17475	30.89	21.8	52.69	74	-21.31	PK
H	11650	28.84	21.83	50.67	74	-23.33	PK
H	17475	25.00	21.67	46.67	74	-27.33	PK

Notes:

1. Measure Level = Reading Level + Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. The test result on peak is lower than average limit, then average measurement needn't be performed.

## 7.8 Frequency stability

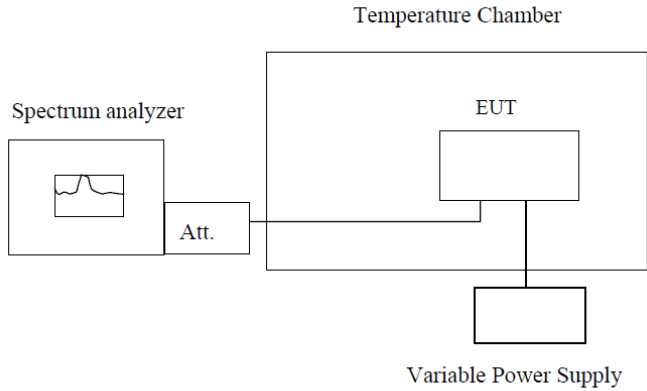Test Requirement:	FCC Part15 C Section 15.407(g) RSS-Gen Section 8.11
Test Method:	ANSI C63.10:2013, FCC Part 2.1055 & RSS-Gen
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 <p style="text-align: center;"><b>Note :</b> Measurement setup for testing on Antenna connector</p>
Test Instruments:	Refer to section 6 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

**Measurement data:**

Frequency stability versus Temp.					
Power Supply: DC 7.4V					
Temp. (°C)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
-30	5745	5745.879	5745.427	5745.896	5745.596
	5785	5785.434	5785.878	5785.169	5785.245
	5825	5825.406	5825.374	5825.399	5825.547
-20	5745	5745.216	5745.250	5745.276	5745.369
	5785	5785.790	5785.344	5785.999	5785.610
	5825	5825.760	5825.171	5825.216	5825.050
-10	5745	5745.565	5745.639	5745.172	5745.246
	5785	5785.546	5785.681	5785.018	5785.082
	5825	5825.928	5825.989	5825.994	5825.569
0	5745	5745.455	5745.055	5745.940	5745.047
	5785	5785.715	5785.921	5785.044	5785.898
	5825	5825.505	5825.175	5825.678	5825.629
10	5745	5745.635	5745.835	5745.706	5745.367
	5785	5785.389	5785.105	5785.488	5785.694
	5825	5825.737	5825.903	5825.754	5825.509
20	5745	5745.540	5745.224	5745.803	5745.794
	5785	5785.699	5785.926	5785.876	5785.584
	5825	5825.665	5825.795	5825.392	5825.861
30	5745	5745.123	5745.079	5745.685	5745.554
	5785	5785.959	5785.439	5785.573	5785.292
	5825	5825.591	5825.651	5825.144	5825.529
40	5745	5745.074	5745.681	5745.129	5745.902
	5785	5785.749	5785.153	5785.629	5785.250
	5825	5825.306	5825.958	5825.731	5825.606
50	5745	5745.866	5745.438	5745.052	5745.795
	5785	5785.311	5785.931	5785.206	5785.910
	5825	5825.038	5825.117	5825.432	5825.152



Frequency stability versus Voltage					
Temperature: 25°C					
Power Supply (VDC)	Operating Frequency (MHz)	0 minute	2 minute	5 minute	10 minute
		Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)	Measured Frequency (MHz)
7.8	5745	5745.788	5745.511	5745.202	5745.343
	5785	5785.890	5785.834	5785.952	5785.107
	5825	5825.884	5825.401	5825.654	5825.866
6.7	5745	5745.995	5745.453	5745.736	5745.555
	5785	5785.222	5785.001	5785.486	5785.991
	5825	5825.773	5825.455	5825.769	5825.918

## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----END-----