

FCC PART 90

EMI MEASUREMENT AND TEST REPORT

For

Klein Electronics, Inc.

349 North Vinewood Street, Escondido, CA 92029, USA

FCC ID: U7GBLACKBOXBU

Report Type: Original Report	Product Type: Two-Way Radio
Test Engineer: <u>Allan An</u> <i>Allan An</i>	
Report Number: <u>RSZ10110551</u>	
Report Date: <u>2010-11-25</u>	
Reviewed By: <u>EMC Engineer</u>	<i>Merry Zhao</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.
* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §1.1307(b) & §2.1093 - RF EXPOSURE.....	8
APPLICABLE STANDARD	8
FCC §2.1046 & §90.205- RF OUTPUT POWER.....	9
APPLICABLE STANDARD	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE	9
TEST DATA	10
FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC.....	14
APPLICABLE STANDARD	14
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST PROCEDURE	14
TEST DATA	14
FCC §2.1049, §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK	21
APPLICABLE STANDARD	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE	22
TEST DATA	22
FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	24
APPLICABLE STANDARD	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST PROCEDURE	25
TEST DATA	25
FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS	28
APPLICABLE STANDARD	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE	28
TEST RESULTS SUMMARY.....	28
TEST DATA	29
FCC §2.1055 & §90.213- FREQUENCY STABILITY.....	30
APPLICABLE STANDARD	30

TEST EQUIPMENT LIST AND DETAILS.....	30
TEST PROCEDURE	30
TEST DATA	30
FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....	32
APPLICABLE STANDARD	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST PROCEDURE	32
TEST DATA	32

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Klein Electronics, Inc's* product, model number: *Bantam-U (FCC ID: U7GBLACKBOXBU)* or the "EUT" as referred to in this report is a *Two-way radio* that operates in the frequency band 400~470 MHz and with two channel spacing of 12.5 kHz (narrow-band)/25 kHz (wide-band). The EUT is measured approximately 11.5 cm (L) x 5.9 cm (W) x 3.4 cm (H), rated input voltage: DC 7.5 V battery.

** All measurement and test data in this report was gathered from production sample serial number: 1011013 (Assigned by BAEL, Shenzhen). The EUT was received on 2010-11-05.*

Objective

This Type approval report is prepared on behalf of *Klein Electronics, Inc* in accordance with Part 2, and Part 90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-C and ANSI 63.4-2003.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

The uncertainty of any RF tests which use conducted method measurement is ± 0.96 dB, the uncertainty of any radiation emissions measurement is ± 4.0 dB.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/2007070.htm>.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

Equipment Modifications

No modifications were made to the unit tested.

Configuration of Test Setup



Lie




Side



Stand

Block Diagram of Test Setup

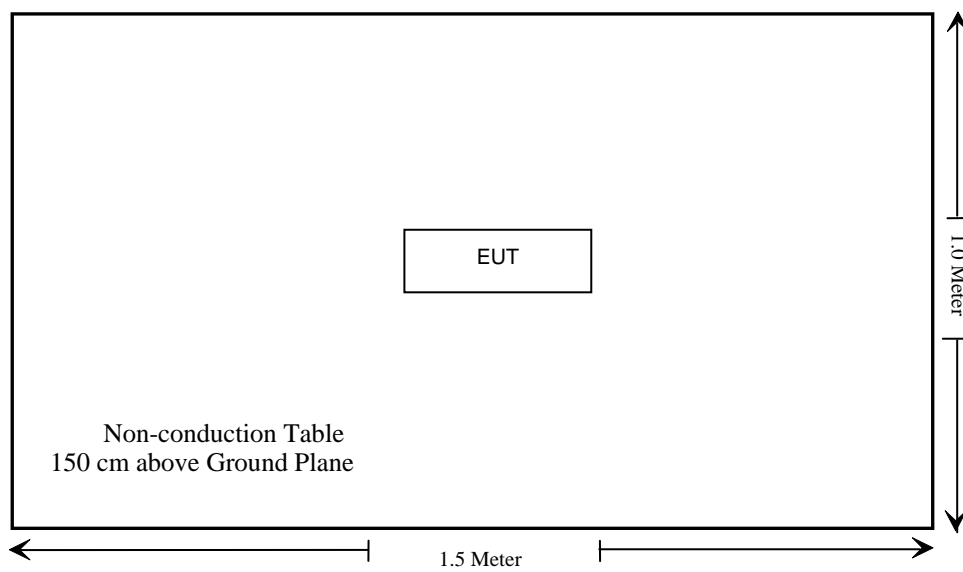

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1307 (b); §2.1093	RF Exposure	Compliance*
§2.1046; §90.205	RF Output Power	Compliance
§2.1047; §90.207	Modulation Characteristic	Compliance
§2.1049; §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §90.210	Spurious Radiated Emissions	Compliance**
§2.1055; §90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

Note: * Please refer to SAR report released by BACL report number: R1011177-SAR.

**Within measurement uncertainty

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §1.1307(b) and §2.1093, portable device operates Part 90 should be subjected to routine environmental evaluation for RF exposure prior or equipment authorization or use.

Result: Compliance.

Please refer to SAR Report Number: R1011177-SAR.

FCC §2.1046 & §90.205- RF OUTPUT POWER

Applicable Standard

FCC §2.1046 and §90.205.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-11
Sunol Sciences	Bilog Antenna	JB1	A040904-2	2010-05-05	2011-05-05
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-24
HP	Signal Generator	HP8657A	2849U00982	2010-10-28	2011-10-27

* **Statement of Tractability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure


1) Conducted RF Output Power:

TIA-603-C section 2.2.1

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer setting:

<u>RBW</u>	<u>Video B/W</u>
100 kHz	300 kHz

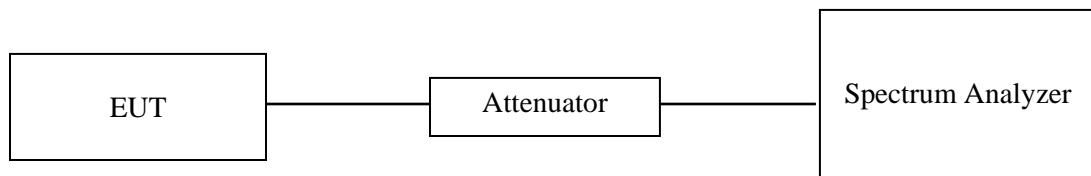

2) Radiated Power Output (ERP)

TIA-603-C section 2.2.17

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT, during the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the ERP were measured by the substitution.

Absolute level=substituted level+Antenna gain-Cable Loss

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.1 kPa

The testing was performed by Allan An on 2010-11-17.

Test Mode: Transmitting

Test Result: Compliance.

Please refer to following table and plots

1) Conducted Output Power:


Frequency Spacing (kHz)	Frequency (MHz)	Output Power (dBm)	Output Power (Watt)	Emission Power Lever Setting	Comment
Middle Channel					
12.5	435.025	36.42	4.385	High	Peak
12.5	435.025	31.95	1.567	Low	Peak
25	435.025	36.40	4.365	High	Peak
25	435.025	31.94	1.563	Low	Peak

2) Effective Radiated Power (ERP)

Indicated		Table Angle Degree	Test Antenna		Substituted					Absolute Level (dBm)	Output Power (Watt)
Freq. (MHz)	S.A. Amp. (dBμV)		Height (m)	Polar (H/V)	Freq. (MHz)	Level (dBm)	Polar (H/V)	Antenna Gain Cord. (dBd)	Cable Loss (dB)		
12.5 kHz Channel Spacing											
435.025	115.79	48	1.1	V	435.025	36.5	V	0	0.45	36.05	4.03
435.025	101.21	25	2.1	H	435.025	21.2	H	0	0.45	20.75	0.12
25 kHz Channel Spacing											
435.025	115.76	38	1.1	V	435.025	36.5	V	0	0.45	36.05	4.03
435.025	100.15	20	2.0	H	435.025	20.1	H	0	0.45	19.65	0.09


Antenna Port Conducted Output Power:

Low Power, 12.5 kHz Channel Spacing

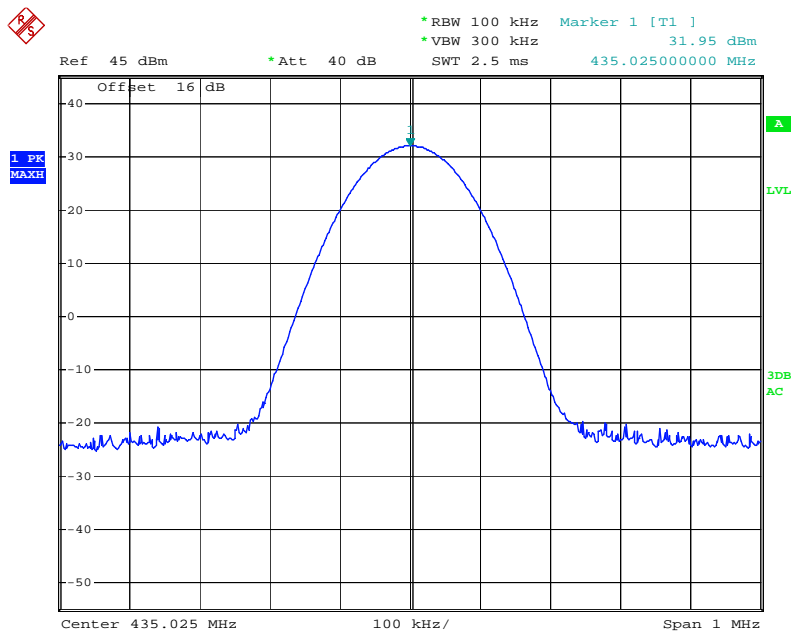


Date: 17.NOV.2010 22:31:17

High Power, 12.5 kHz Channel Spacing

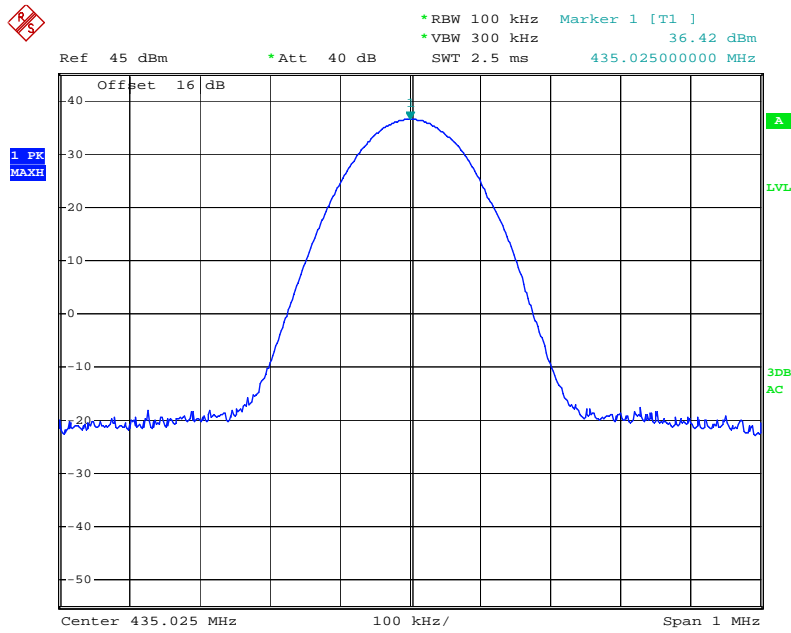


Date: 17.NOV.2010 22:30:03

Low Power, 25 kHz Channel Spacing

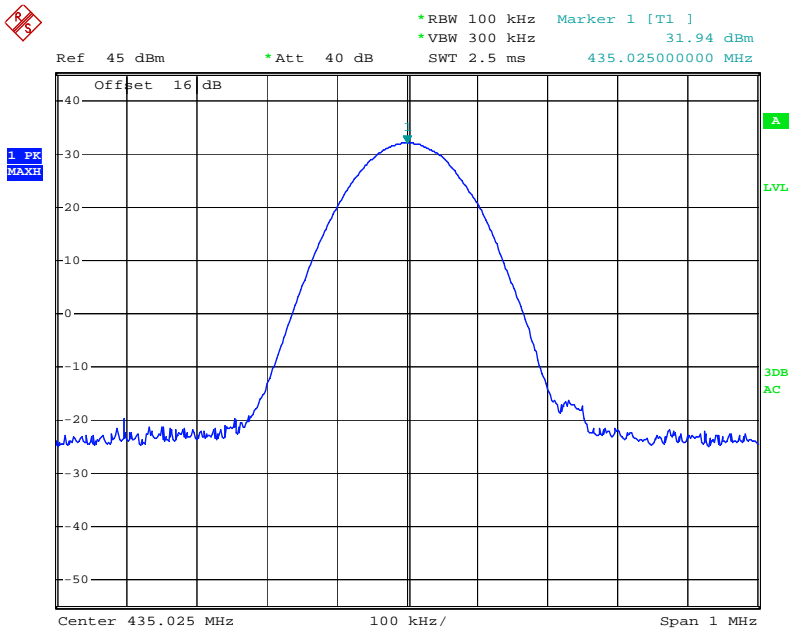

Date: 17.NOV.2010 22:21:24

High Power, 25 kHz Channel Spacing

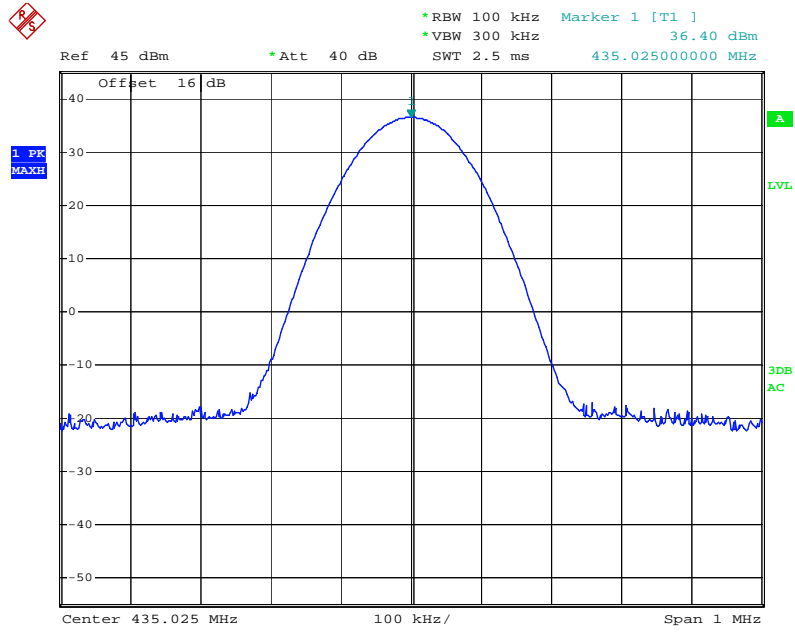

Date: 17.NOV.2010 22:19:05

FCC §2.1047 & §90.207 - MODULATION CHARACTERISTIC

Applicable Standard

FCC§2.1047 & §90.207:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
HP	Modulation Analyzer	8901B	3438A05208	2010-04-11	2011-04-11
NANYAN	Audio Generator	NY2201	019829	2009-12-23	2010-12-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Test Method: TIA/EIA-603 2.2.3

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.1 kPa


The testing was performed by Alvin Huang on 2010-11-20.

Test Mode: Transmitting

MODULATION LIMITING


Carrier Frequency: 435.025 MHz, Channel Separation=12.5 kHz

Audio Input Level [mV]	Frequency Deviation (kHz)			FCC Limit [kHz]
	@ 300 Hz	@ 1kHz	@ 3 kHz	
1.0	0.074	0.215	0.378	2.5
4.0	0.189	0.697	1.168	2.5
8.0	0.353	1.386	1.222	2.5
12.0	0.523	1.807	1.238	2.5
16.0	0.647	1.989	1.266	2.5
20.0	0.783	2.047	1.276	2.5
24.0	0.867	2.053	1.285	2.5
28.0	0.963	2.062	1.294	2.5
32.0	1.028	2.068	1.301	2.5
36.0	1.097	2.073	1.312	2.5

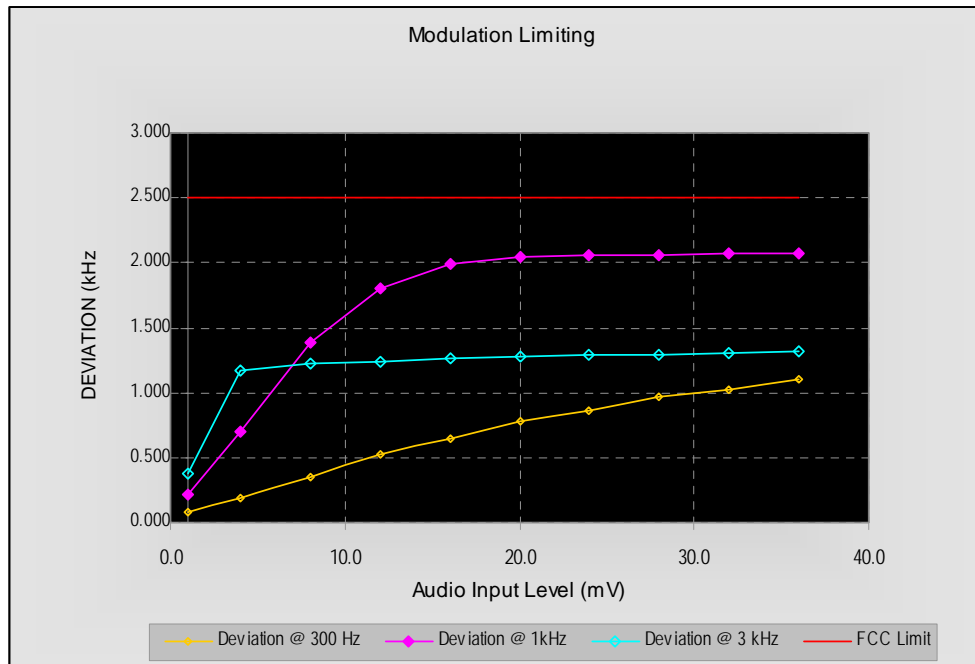

Carrier Frequency: 435.025 MHz, Channel Separation=25.0 kHz


Audio Input Level [mV]	Frequency Deviation (kHz)			FCC Limit [kHz]
	@ 300 Hz	@ 1kHz	@ 3 kHz	
1.0	0.148	0.416	0.603	5.0
4.0	0.423	1.385	2.045	5.0
8.0	0.690	2.668	2.388	5.0
12.0	1.017	3.437	2.403	5.0
16.0	1.376	3.843	2.457	5.0
20.0	1.584	4.015	2.488	5.0
24.0	1.751	4.067	2.504	5.0
28.0	1.918	4.086	2.525	5.0
32.0	2.128	4.105	2.557	5.0
36.0	2.175	4.121	2.594	5.0

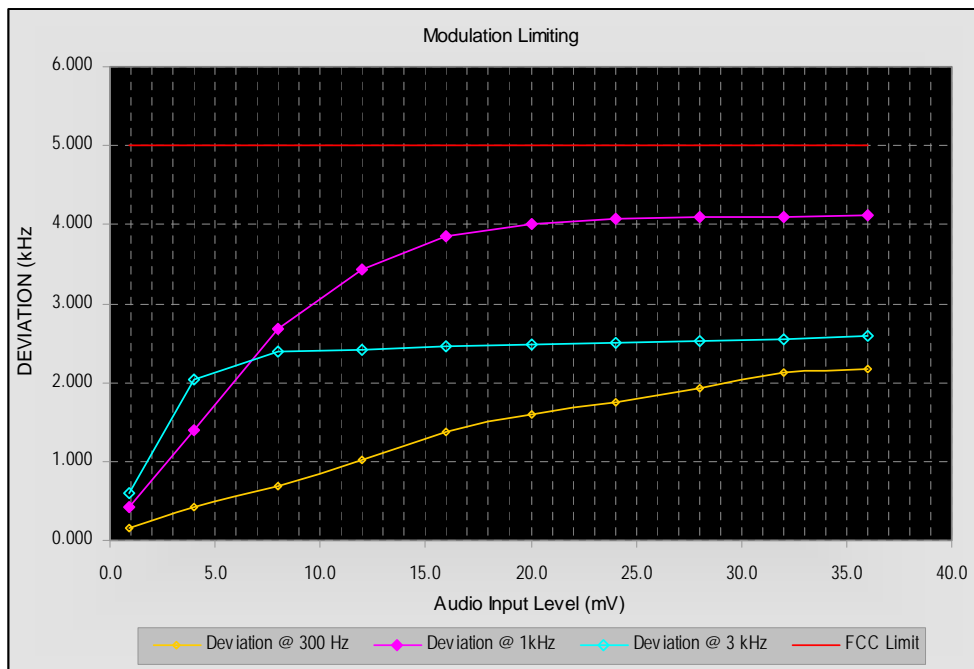

Audio Frequency Response


Carrier Frequency: 435.025 MHz, Channel Separation=12.5 kHz

Audio Frequency (Hz)	Response Attenuation (dB)
300	-7.54
400	-6.02
500	-5.04
600	-4.15
700	-2.85
800	-1.72
900	-0.72
1000	0.00
1200	0.83
1400	1.58
1600	2.41
1800	3.05
2000	3.64
2200	4.19
2400	4.61
2600	5.20
2800	5.67
3000	6.02

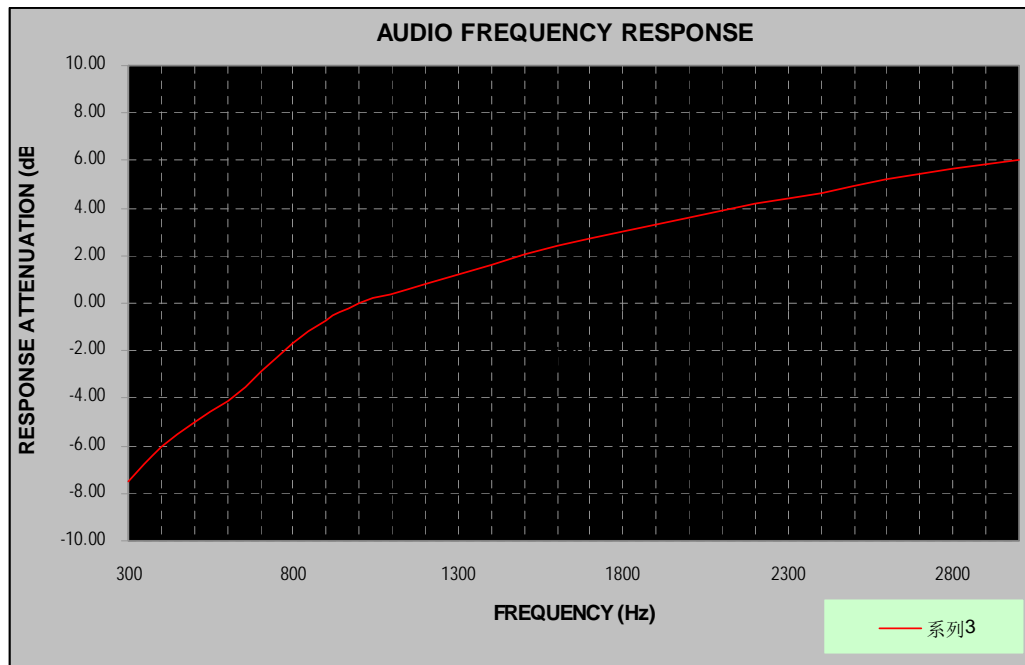

Carrier Frequency: 435.025 MHz, Channel Separation=25.0 kHz


Audio Frequency (Hz)	Response Attenuation (dB)
300	-8.18
400	-6.74
500	-4.58
600	-3.35
700	-2.50
800	-1.72
900	-0.54
1000	0.00
1200	2.01
1400	3.29
1600	4.03
1800	4.91
2000	5.34
2200	5.76
2400	6.36
2600	6.73
2800	7.20
3000	7.60

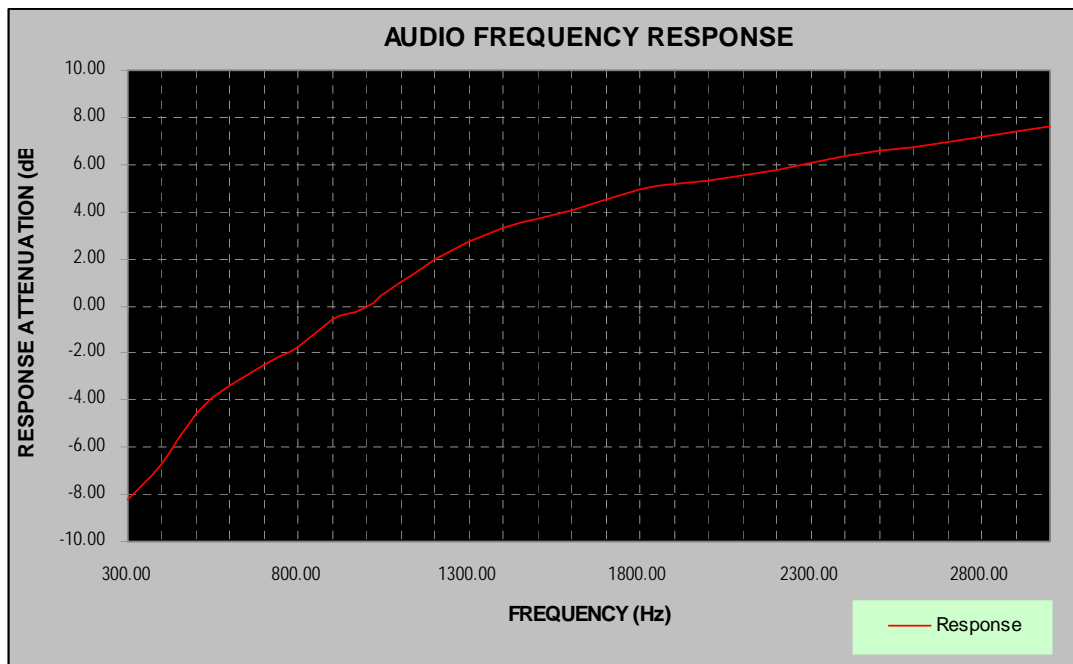

Audio Frequency Low Pass Filter Response


Carrier Frequency: 435.025 MHz, Channel Separation=12.5 kHz

Audio Frequency (kHz)	Response Attenuation (dB)	FCC Limit (dB)
3.0	-1.2	0.0
3.5	-4.9	-4.0
4.0	-7.7	-7.5
5.0	-14.5	-13.3
7.0	-22.6	-22.1
10.0	-32.7	-31.4
15.0	-43.9	-42.0
20.0	-54.7	-50.0
30.0	-57.6	-50.0
50.0	-59.2	-50.0
70.0	-62.3	-50.0

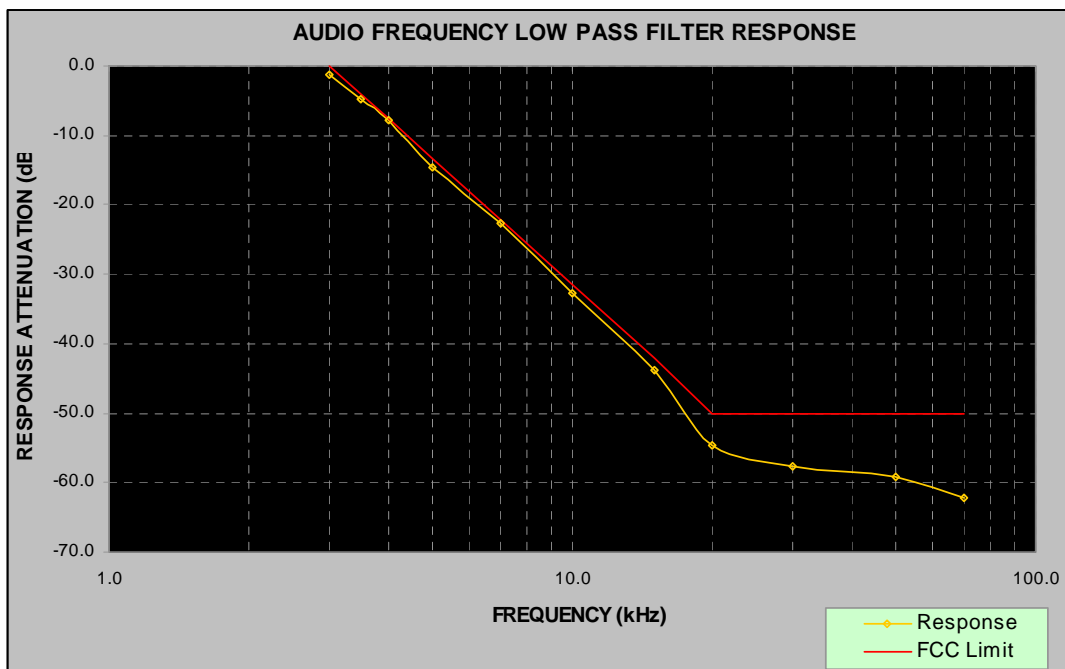

Carrier Frequency: 435.025MHz, Channel Separation=25.0 kHz

Audio Frequency (kHz)	Response Attenuation (dB)	FCC Limit (dB)
3.0	-1.2	0.0
3.5	-4.9	-4.0
4.0	-8.8	-7.5
5.0	-16.1	-13.3
7.0	-23.5	-22.1
10.0	-33.1	-31.4
15.0	-44.8	-42.0
20.0	-54.9	-50.0
30.0	-56.2	-50.0
50.0	-56.1	-50.0
70.0	-57.8	-50.0

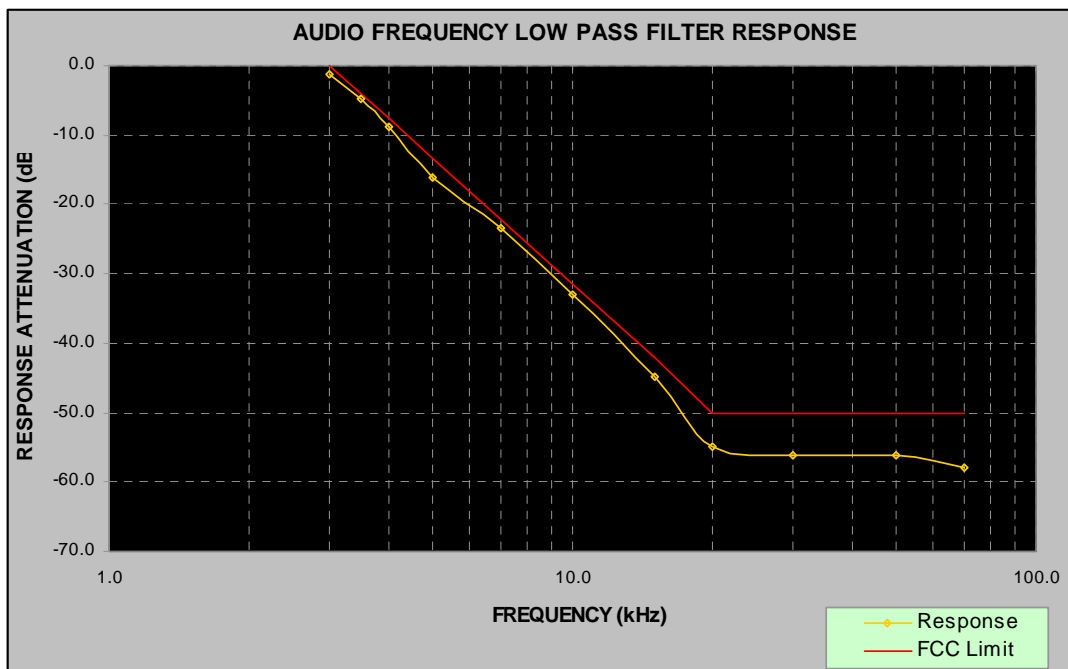

FCC §2.1049, §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §90.209 and §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least 7.27 ($f_d - 2.88$ kHz) dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least:

$$50 + 10 \log P = 50 + 10 \log(1.574) = 51.97 \text{ dB}$$

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- 1) For any frequency removed from the center of the assigned channel by more than 50 percent up to and including 100 percent of the authorized bandwidth, at least 25 dB.
- 2) On any frequency removed from the center of the assigned channel by more than 100 percent up to and including 250 percent, at least 35 dB.
- 3) On any frequency removed from the center of the assigned channel by more than 250 percent at least:

$$43 + 10 \log P = 43 + 10 \log(1.622) = 45.10 \text{ dB}$$

The resolution bandwidth was 300 Hz or greater for measuring up to 250 kHz from the edge of the authorized frequency segment, and 30 kHz or greater for measuring more than 250 kHz from the authorized frequency segment.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-24
HP	Modulation Analyzer	8901B	3438A05208	2010-03-03	2011-03-02
NANYAN	Audio Generator	NY2201	019829	2009-12-23	2010-12-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 300 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.1 kPa

The testing was performed by Allan An on 2010-11-20.

Emission Designator

According to CFR47 § 2.201 & § 2.202, $B_n=2M + 2DK$

1) 435.025MHz, Channel spacing =12.5 kHz

$$B_n=2M + 2DK$$

$$\text{Where } M = 3000, D = 2.5 \text{ kHz}, K = 1$$

$$B_n = 2*(3000) + 2*(2500) = 11 \text{ kHz}$$

Emission Designator: 11K0F3E

2) 435.025 MHz, Channel spacing =25 kHz

$$B_n=2M + 2DK$$


$$\text{Where } M = 3000, D = 5.0 \text{ kHz}, K = 1$$

$$B_n = 2*(3000) + 2*(5000) = 16 \text{ kHz}$$

Emission Designator: 16K0F3E


Please refer to the emission mask hereinafter plots.

Emission Mask D, 12.5 kHz Channel Spacing (Middle Channel)

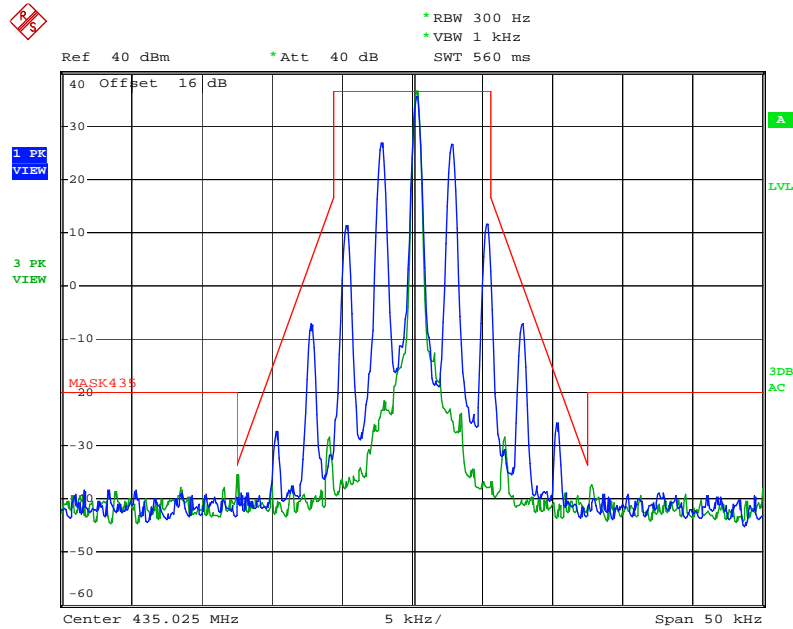

Date: 22.NOV.2010 20:16:39

Emission Mask B, 25.0 kHz Channel Spacing (Middle Channel)

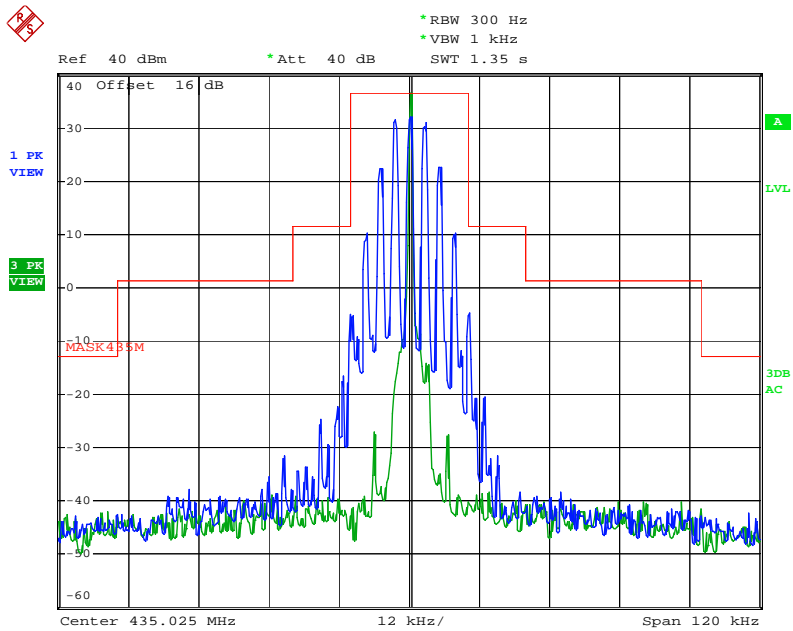

Date: 20.NOV.2010 11:21:17

FCC §2.1051 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0 dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least 7.27 ($f_d - 2.88$ kHz) dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least:

$$50 + 10 \log P = 50 + 10 \log (P) \text{ dB}$$

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- 1) For any frequency removed from the center of the assigned channel by more than 50 percent up to and including 100 percent of the authorized bandwidth, at least 25 dB.
- 2) On any frequency removed from the center of the assigned channel by more than 100 percent up to and including 250 percent, at least 35 dB.
- 3) On any frequency removed from the center of the assigned channel by more than 250 percent at least:

$$43 + 10 \log P = 43 + 10 \log (P) \text{ dB}$$

The resolution bandwidth was 300 Hz or greater for measuring up to 250 kHz from the edge of the authorized frequency segment, and 30 kHz or greater for measuring more than 250 kHz from the authorized frequency segment.

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-07-08	2011-07-08
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-24

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The RF output of the Two-way radio was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.1 kPa


The testing was performed by Allan An on 2010-11-17.

Test Mode: Transmitting


Please refer to the following plots.

12.5 kHz Channel Spacing, (Middle Channel)

30 MHz - 1000 MHz

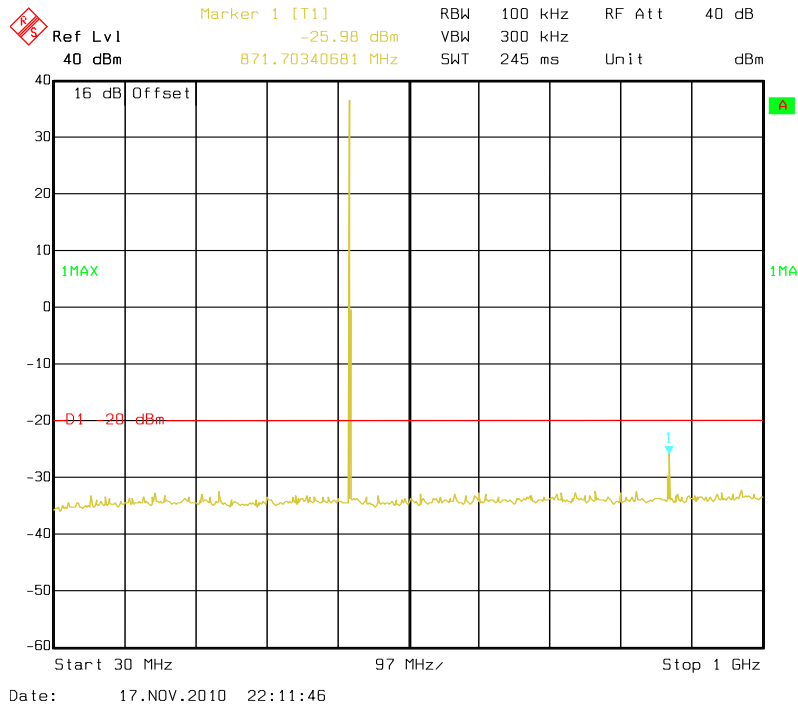


1 GHz - 5 GHz

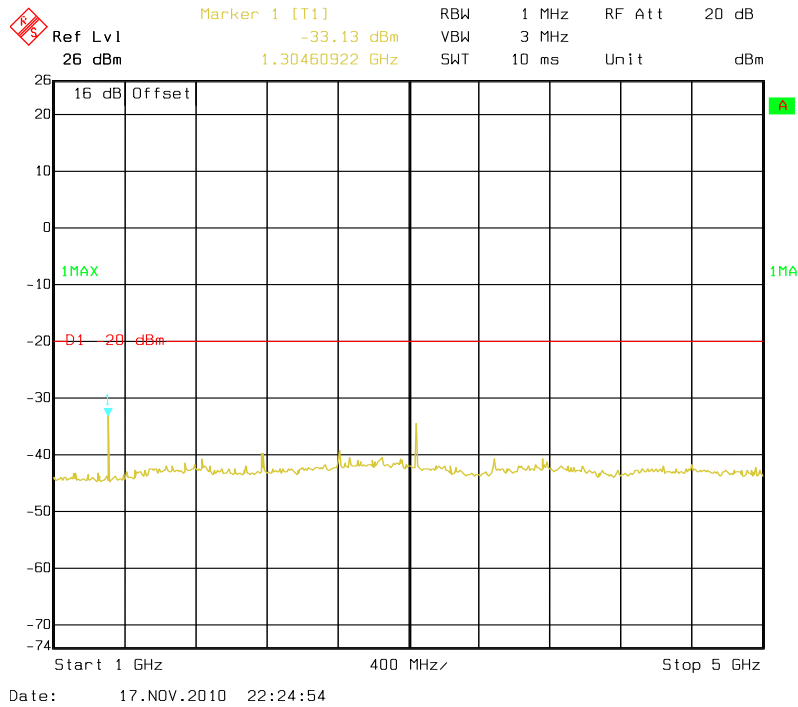


25.0 kHz Channel Spacing, (Middle Channel)

30 MHz - 1000 MHz

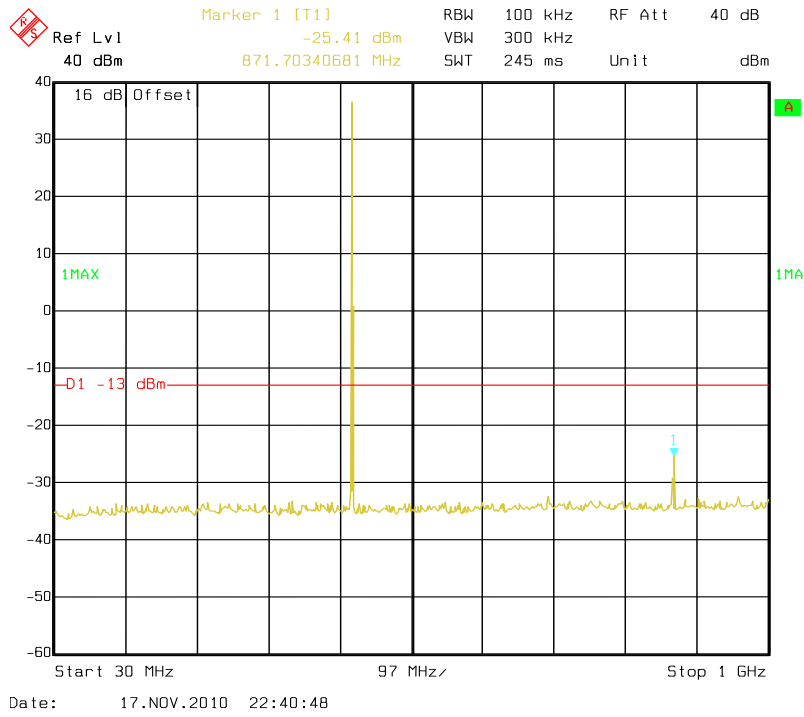

1 GHz - 5 GHz

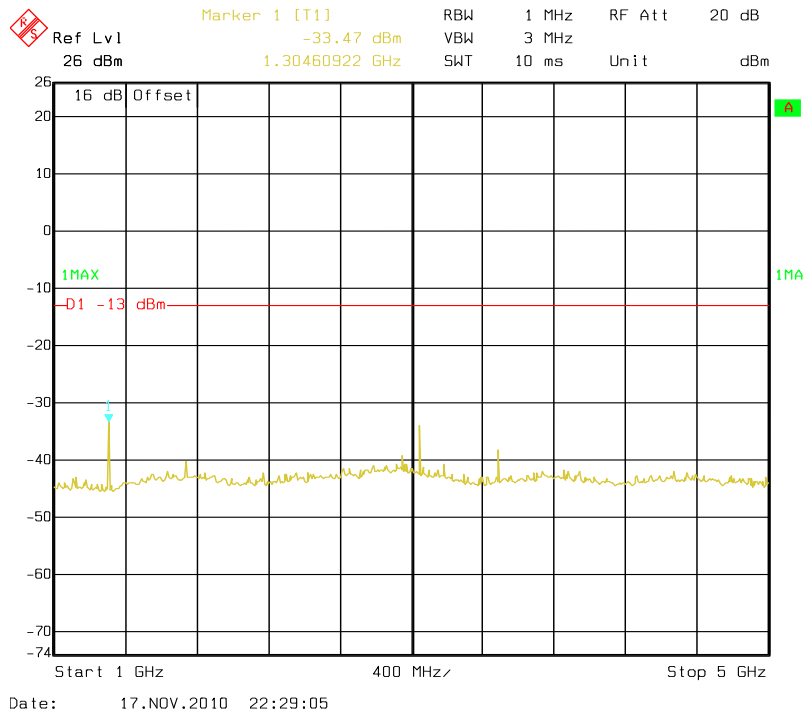

FCC §2.1053 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053 and §90.210

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
Sunol Sciences	Horn Antenna	DRH-118	A052604	2010-05-05	2011-05-04
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-11
Sunol Sciences	Bilog Antenna	JB1	A040904-2	2010-05-05	2011-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-07-08	2011-07-08
HP	Signal Generator	HP8657A	2849U00982	2010-10-28	2011-10-27
A.H. System	Horn Antenna	SAS-200/571	135	2010-05-17	2011-05-17
HP	Synthesized Sweeper	8341B	2624A00116	2010-03-03	2011-03-02

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 log (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 43 + 10 Log₁₀ (power out in Watts)

Spurious attenuation limit in dB = 50 + 10 Log₁₀ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Test Results Summary

2.79 dB at 870.05 MHz in the **Vertical** polarization for 12.5 kHz channel spacing

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.1 kPa

The testing was performed by Allan An on 2010-11-18.

Test Mode: Transmitting

Indicated		Table Angle (Degree)	Test Antenna		Substituted					Absolute Level (dBm)	FCC Part 90	
Freq. (MHz)	Receiver Reading (dBμV)		Height (m)	Polar (H/V)	Freq. (MHz)	Level (dBm)	Ant. Polar (H/V)	Ant. Gain Cord. (dB)	Cable Loss (dB)		Limit (dBm)	Margin (dB)
Middle channel 435.025MHz (12.5 kHz spacing)												
870.05	72.65	1	1.4	V	870.05	-22.1	V	0	0.69	-22.79	-20	2.79*
3045.175	65.95	194	1.7	H	3045.175	-29.7	H	7.5	1.31	-23.51	-20	3.51*
2175.125	65.77	110	1.8	H	2175.125	-31.8	H	7.1	1.10	-25.80	-20	5.80
3045.175	62.91	242	1.5	V	3045.175	-33.1	V	7.5	1.31	-26.91	-20	6.91
2175.125	61.30	256	1.3	V	2175.125	-37.7	V	7.1	1.10	-31.70	-20	11.70
870.05	62.94	197	1.3	H	870.05	-31.1	H	0	0.69	-31.79	-20	11.79
1305.075	64.39	210	1.4	V	1305.075	-41.6	V	6.3	0.84	-36.14	-20	16.14
1305.075	57.24	238	1.3	H	1305.075	-48.3	H	6.3	0.84	-42.84	-20	22.84
Middle channel 435.025MHz (25 kHz Spacing)												
3045.175	68.80	205	1.9	H	3045.175	-26.8	H	7.5	1.31	-20.61	-13	7.61
870.05	73.75	0	1.4	V	870.05	-20.9	V	0	0.69	-21.59	-13	8.59
3045.175	66.29	14	1.6	V	3045.175	-29.7	V	7.5	1.31	-23.51	-13	10.51
2175.125	68.29	211	1.9	H	2175.125	-30.3	H	7.1	1.10	-24.3	-13	11.30
2175.125	64.76	18	1.5	V	2175.125	-34.2	V	7.1	1.10	-28.20	-13	15.20
870.05	63.74	243	1.7	H	870.05	-30.2	H	0	0.69	-30.89	-13	17.89
1305.075	69.34	179	1.1	V	1305.075	-36.6	V	6.3	0.84	-31.14	-13	18.14
1305.075	60.82	255	1.0	H	1305.075	-44.8	H	6.3	0.84	-39.34	-13	26.34

*With measurement uncertainty!

FCC §2.1055 & §90.213- FREQUENCY STABILITY

Applicable Standard

FCC §2.1055& §90.213

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
WUHUAN	Temperature & Humidity Chamber	HTP205	20021115	2010-06-04	2011-06-03
Hewlett-Packard	Frequency Counter	5342A	2317A08289	2010-04-22	2011-04-22

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to an f Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.1 kPa

The testing was performed by Allan An on 2010-11-20.

Test Mode: Transmitting

For 12.5 kHz Channel Spacing

Reference Frequency: 435.025 MHz, Limit: 2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Power Supplied (V_{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.5	435.025382	0.87811
40	7.5	435.025265	0.60916
30	7.5	435.025182	0.418367
20	7.5	435.025125	0.28734
10	7.5	435.025250	0.57468
0	7.5	435.025325	0.747084
-10	7.5	435.025361	0.829837
-20	7.5	435.025374	0.859721
Frequency Stability versus Input Voltage			
20	6.5	435.025379	0.871214

For 25.0 kHz Channel Spacing

Reference Frequency: 435.025 MHz, Limit: 5.0 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Power Supplied (V_{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.5	435.025384	0.882708
40	7.5	435.025375	0.862019
30	7.5	435.025373	0.857422
20	7.5	435.025235	0.540199
10	7.5	435.025258	0.593069
0	7.5	435.025314	0.721798
-10	7.5	435.025328	0.753980
-20	7.5	435.025364	0.836734
Frequency Stability versus Input Voltage			
20	6.5	435.025378	0.868916

FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR

Applicable Standard

FCC §90.214

Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Due Date
TEKTRONIX	Digital Phosphor Oscilloscope	TDS 7104	B020518	2010-03-03	2011-03-02
HP	Modulation Analyzer	8901B	3438A05208	2010-03-03	2011-03-02
HP	Signal Generator	HP8657A	2849U00982	2010-10-28	2011-10-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

TIA/EIA-603 2.2.19

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.1 kPa

The testing was performed by Allan An on 2010-11-20.

Test Mode: Transmitting

For 12.5 kHz channel spacing


Operation Frequency (MHz)	Channel Separation (kHz)	Transient Period (ms)	Transient Frequency	Result
435.025	12.5	< 10	+/-12.5 kHz	Pass
		< 25	+/-6.25 kHz	
		< 10	+/-12.5 kHz	

For 25.0 kHz channel spacing


Operation Frequency (MHz)	Channel Separation (kHz)	Transient Period (ms)	Transient Frequency	Result
435.025	25	< 10	+/-25.0 kHz	Pass
		< 25	+/-12.5 kHz	
		< 10	+/-25.0kHz	

Please refer to the following plots.


Turn on (12.5 kHz Channel Spacing)

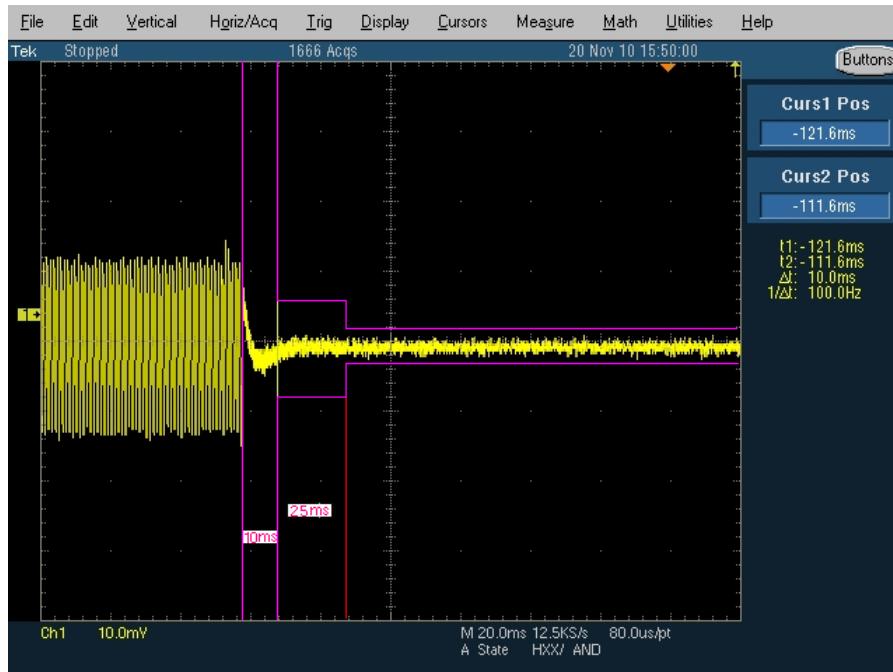


Turn off (12.5 kHz Channel Spacing)

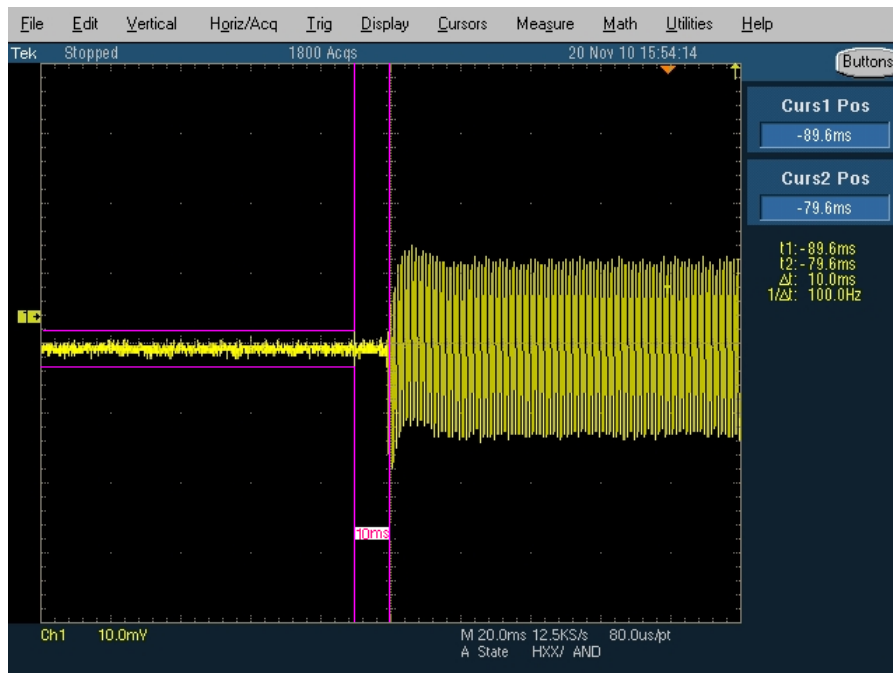

Turn on (25 kHz Channel Spacing)

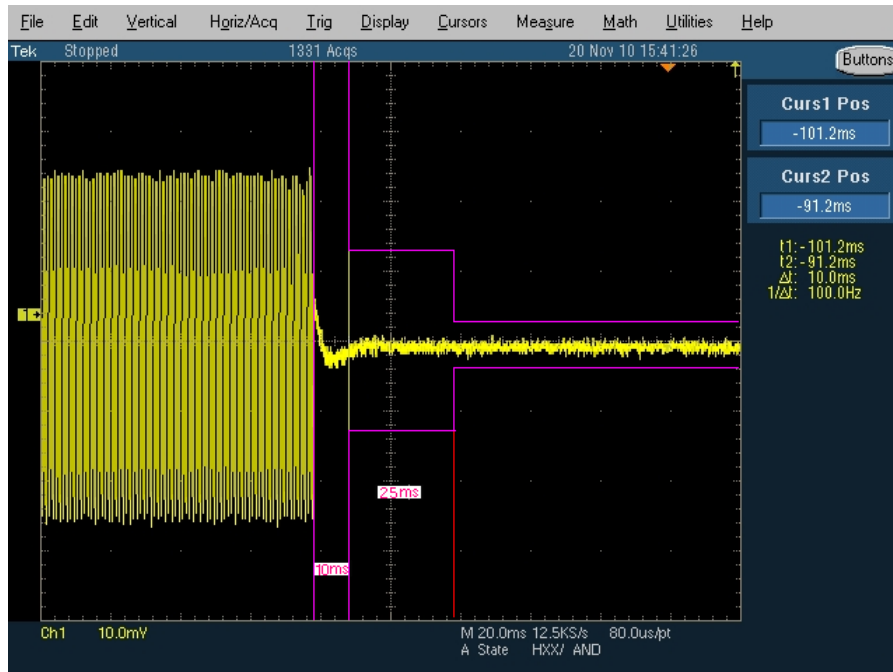

Turn off (25 kHz Channel Spacing)

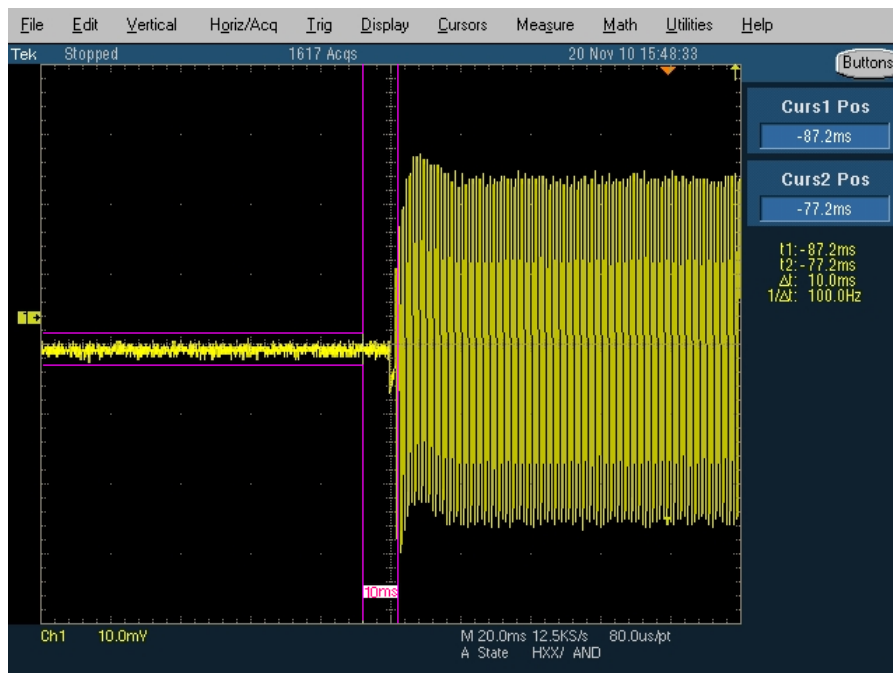

***** End of Report *****