

Report No EF/2007/30001 Issue Date: May 31, 2007 Page: 1 of 57

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT

OF

Product Name:	WatchBP Pro
Brand Name:	Microlife
Model Name:	Twin200
Model Difference:	N/A
FCC ID:	U7I-TWIN200
Report No.:	EF/2007/30001
Issue Date:	May 31, 2007
FCC Rule Part:	§15.247
	Microlife Corporation
Prepared for:	9F, 431, RuiGuang Road, Nei-Hu, Taipei, 114, Taiwan, R.O.C.
	SGS Taiwan Ltd.
Prepared by:	No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei County, Taiwan.



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.



Report No EF/2007/30001 Issue Date: May 31, 2007 Page: 2

VERIFICATION OF COMPLIANCE

Applicant:	Microlife Corporation
rippicant.	9F, 431, RuiGuang Road, Nei-Hu, Taipei, 114, Taiwan, R.O.C.
Equipment Under Test:	WatchBP Pro
FCC ID:	U7I-TWIN200
Brand Name:	Microlife
Model No.:	Twin200
Model Difference:	N/A
File Number:	EF/2007/30001
Date of test:	Mar. 24, 2007 ~ May 30, 2007
Date of EUT Received:	Mar. 23, 2007

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date	May 31, 2007
Prepared By:	Jazz Huang / Engineer Gigi Jeh	Date	May 31, 2007
Approved By:	Gigi Yeh / Clerk Tihlent In Vincent Su / Manager	Date	May 31, 2007

SGS Taiwan Ltd.	No. 134, Wu Kung Rd.,	Wuku Industrial Zone, Taipei Country, Taiwan. /	台北縣石股工業區石工路134號
台灣檢驗科技股份有限公司		f (886-2) 2298-2698	www.sgs.com.tw



Version

Version No.	Date
00	May 31, 2007



Table of Contents

1.	GEN	ERAL INFORMATION	7
	1.1.	Product Description	7
	1.2.	Related Submittal(s) / Grant (s)	7
	1.3.	Test Methodology	7
	1.4.	Test Facility	7
	1.5.	Special Accessories	7
	1.6.	Equipment Modifications	7
2.	SYST	TEM TEST CONFIGURATION	8
	2.1.	EUT Configuration	8
	2.2.	EUT Exercise	8
	2.3.	Test Procedure	8
	2.4.	Configuration of Tested System	9
3.	SUM	MARY OF TEST RESULTS	10
4.	DES	CRIPTION OF TEST MODES	10
5.	CON	DUCTED EMISSION TEST	11
	5.1.	Standard Applicable	
	5.2.	EUT Setup	11
	5.3.	Measurement Procedure	11
	5.4.	Measurement Equipment Used:	12
	5.5.	Measurement Result	12
6.	PEA	K OUTPUT POWER MEASUREMENT	13
	6.1.	Standard Applicable	
	6.2.	Measurement Procedure	15
	6.3.	Measurement Result	15
	6.4.	Measurement Equipment Used:	15
7.	20dB	BAND WIDTH	18
	7.1.	Standard Applicable	18
	7.2.	Measurement Procedure	18
	7.3.	Measurement Result	18
	7.4.	Measurement Equipment Used:	18



8.	100K	Hz BANDWIDTH OF BAND EDGES MEASUREMENT	21
	8.1.	Standard Applicable	21
	8.2.	Measurement Procedure	21
	8.3.	Measurement Result	21
	8.4.	Measurement Equipment Used:	21
9.	SPUR	RIOUS RADIATED EMISSION TEST	26
	9.1.	Standard Applicable	
	9.2.	EUT Setup	
	9.3.	Measurement Procedure	
	9.4.	Test SET-UP (Block Diagram of Configuration)	
	9.5.	Measurement Equipment Used:	
	9.6.	Field Strength Calculation	
	9.7.	Measurement Result	
10.	FREC	QUENCY SEPARATION	41
	10.1.	Standard Applicable	41
	10.2.	Measurement Procedure	41
	10.3.	Measurement Result	41
	10.4.	Measurement Equipment Used:	41
11.	NUM	BER OF HOPPING FREQUENCY	43
	11.1.	Standard Applicable	43
	11.2.	Measurement Procedure	43
	11.3.	Measurement Result	43
	11.4.	Measurement Equipment Used:	44
12.	TIME	E OF OCCUPANCY (DWELL TIME)	46
	12.1.	Standard Applicable	46
	12.2.	Measurement Procedure	46
	12.3.	Measurement Result	46
	12.4.	Measurement Equipment Used:	47
13.	Peak	Power Spectral Density	54
	13.1.	Standard Applicable	54
	13.2.	Measurement Procedure	54
	13.3.	Measurement Result	54
	13.4.	Measurement Equipment Used:	54



14.	ANTE	ENNA REQUIREMENT	57
	14.1.	Standard Applicable	57
	14.2.	Antenna Connected Construction	57
AP	PEND	IX 1 PHOTOGRPHS OF SET UP	58
AP	PEND	IX 2 PHOTOGRPHS OF EUT	61



1. GENERAL INFORMATION

1.1. **Product Description**

The Microlife Corporation, Model: Twin200 is WatchBP Pro

The EUT is compliance with Bluetooth Standard.

A major technical descriptions of EUT is described as following:

A). Operation Frequency: 2402 – 2480MHz, 79 channels

B). Rated output power: 8.23dBm

C). Modulation type: Frequency Hopping Spread Spectrum (FHSS)

- D). Antenna Designation: Chip Antenna, 1.0 dBi, Non-User Replaceable (Fixed)
- E). Power Supply: 3.7Vdc re-chargeable battery or

7.5 V from AC/DC adaptor model: DSA-20P-05

1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>U7I-TWIN200</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rule. The composite system (receiver) is compliance with Subpart B is authorized under a Doc procedure.

1.3. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of SGS Taiwan Ltd. No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and CISPR 22/EN 55022 requirements. Site No. 1(3 &10 meters) Registration Number: 94644, Both OATS and Anechoic chamber (3 meters) was accredited by TAF (0513). Canada Registration Number: 4620A-1

1.5. Special Accessories

Not available for this EUT intended for grant.

1.6. Equipment Modifications

Not available for this EUT intended for grant.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,受責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。



2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 7 and 13 of ANSI C63.4-2003.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 8 and 13 of ANSI C63.4-2003.



2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed channel)




Fig. 2-2 Configuration of Tested System (AC Power Line)



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/ Type No.	Series No.
1.	Notebook	Compaq	Presarlo 2100	CNF345Q1R
2.	Test software	BlueSuite 1.22	CSR	N/A



3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)	20dB Bandwidth	Compliant
§15.247(c)	100 KHz Bandwidth Of Fre-	Compliant
	quency Band Edges	
§15.209(a) (f)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(iii)	Time of Occupancy	Compliant
§15.247	Peak Power Density	Compliant
§15.203,	Antenna Requirement	Compliant
§15.247(b)(4)(i)		

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz) \cdot mid (2441MHz) and high (2480MHz) with highest data rate are chosen for full testing.

The EUT was placed on a 5 mm high non-metal supporter which was on the wooden table.

The AC power line conducted Emission was performed at power adaptor.

The Radiated Spurious Emission was performed at X. Y. and Z. axle. The worst carse. Y axle was reported.



5. CONDUCTED EMISSION TEST

5.1. Standard Applicable

According to §15.207. frequency within 150KHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)		
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	
Note 1.The lower limit shall apply at the transition frequencies			

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2. EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was plug-in the AC/DC Power adapter. The host system was placed on the center of the back edge on the test table. The peripherals was placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host system was connected with 110Vac/60Hz power source.

5.3. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中査閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
EMC Analyzer	HP	8594EM	3624A00203	09/02/2006	09/03/2007
EMI Test Receiver	R&S	ESCS30	828985/004	06/09/2006	06/10/2007
Transient Limiter	HP	11947A	3107A02062	09/02/2006	09/03/2007
LISN	Rolf-Heine	NNB-2/16Z	99012	12/31/2006	12/30/2007
LISN	Rolf-Heine	NNB-2/16Z	99013	12/24/2006	12/23/2007
Coaxial Cables	N/A	No. 3, 4	N/A	12/01/2006	12/01/2007

5.4. Measurement Equipment Used:


5.5. Measurement Result

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peake.



AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode		Test Date:	May 25, 2007	
Temperature:	25	Humidity:	62 %	Test By:	Jazz

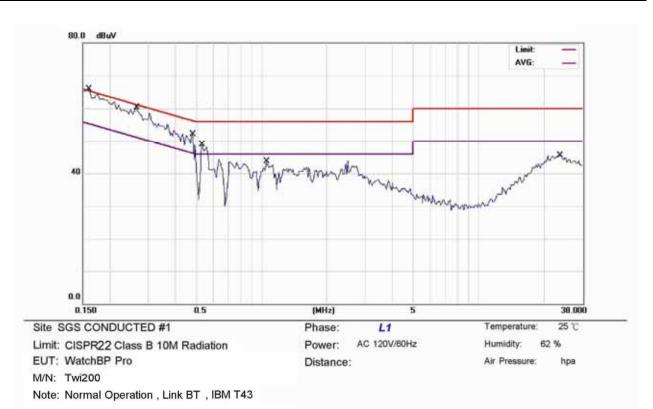


No.	Mk.	Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1600	54.78	0.95	55.73	65.46	-9.73	QP	
2		0.1600	36.34	0.95	37.29	55.46	-18.17	AVG	
3		0.2650	47.98	0.02	48.00	61.27	-13.27	QP	
4		0.2650	36.00	0.02	36.02	51.27	-15.25	AVG	
5		0.4800	40.29	0.02	40.31	56.34	-16.03	QP	
6		0.4800	28.90	0.02	28.92	46.34	-17.42	AVG	
7		0.5300	41.39	0.02	41.41	56.00	-14.59	QP	
8		0.5300	26.41	0.02	26.43	46.00	-19.57	AVG	
9		1.0550	37.87	0.01	37.88	56.00	-18.12	QP	
10		1.0550	25.59	0.01	25.60	46.00	-20.40	AVG	
11		23.8000	39.73	0.40	40.13	60.00	-19.87	QP	
12		23.8000	31.58	0.40	31.98	50.00	-18.02	AVG	

SGS Taiwan Ltd.	No. 134, Wu Kung Rd., Wi	uku Industrial Zone, Taipei Country, Taiwar	.1 台城石股工業區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3939	f (886-2) 2298-2698	www.sgs.com.tw



Conducted Emission Test Plot

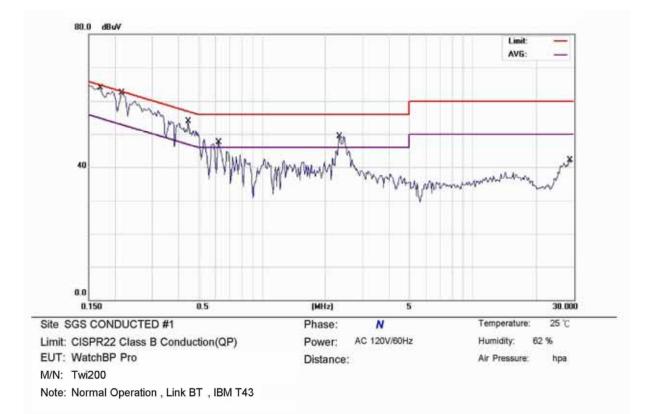

No. MI	k. Freq.	Reading Level	Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.1700	53.94	0.01	53.95	64.96	-11.01	QP	
2	0.1700	26.23	0.01	26.24	54.96	-28.72	AVG	
3	0.2150	50.00	0.02	50.02	63.01	-12.99	QP	
4	0.2150	33.77	0.02	33.79	53.01	-19.22	AVG	
5	0.4450	41.68	0.02	41.70	56.97	-15.27	QP	
6	0.4450	24.16	0.02	24.18	46.97	-22.79	AVG	
7	0.6200	35.99	0.02	36.01	56.00	-19.99	QP	
8	0.6200	18.70	0.02	18.72	46.00	-27.28	AVG	
9	2.3300	42.15	0.05	42.20	56.00	-13.80	QP	
10	2.3300	27.43	0.05	27.48	46.00	-18.52	AVG	
11	29.0200	33.94	0.44	34.38	60.00	-25.62	QP	
12	29.0200	20.67	0.44	21.11	50.00	-28.89	AVG	

SGS Taiwan Ltd.	No. 134, Wu Kung Rd., W	uku Industrial Zone, Taipei Country, Taiwan.	台標石股工業區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3939	f (886-2) 2298-2698	www.sgs.com.tw



6. PEAK OUTPUT POWER MEASUREMENT

6.1. Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 - 2483.5MHz band: 0.125 Watts.

6.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz)
- 3. Record the max. reading.
- 4. Repeat above procedures until all frequency measured were complete.

6.3. Measurement Result


Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	8.13	0.10	8.23	0.00665	1
2441.00	7.60	0.10	7.70	0.00589	1
2480.00	7.33	0.10	7.43	0.00553	1

6.4. Measurement Equipment Used:


Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.		
ТҮРЕ		NUMBER	NUMBER	CAL.			
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008		
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007		
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2006	11/10/2007		
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A		
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007		
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007		
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007		



Peak Power Output Data Plot (CH Low)

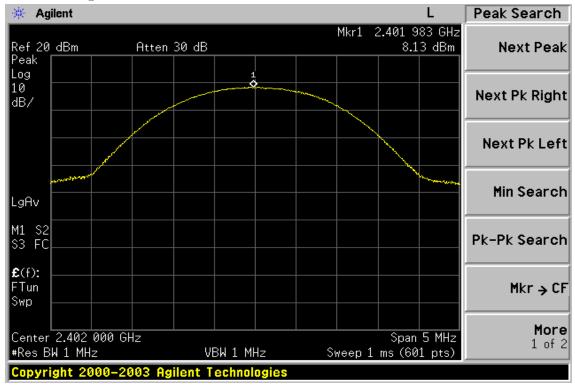

Peak Power Output Data Plot (CH Mid)

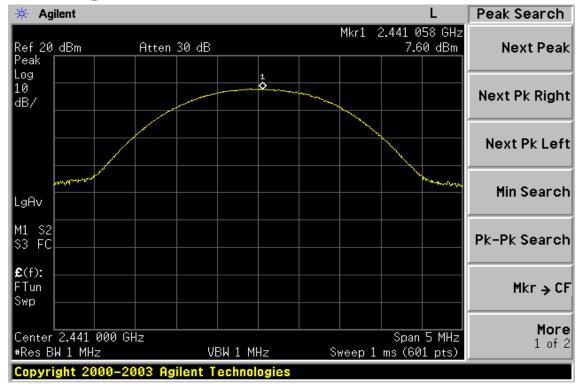



Peak Power Output Data Plot (CH High)





7. 20dB BAND WIDTH

7.1. Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

7.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span= 3MHz, Sweep=auto
- 4. Mark the peak frequency and –20dB (upper and lower) frequency.
- 5. Repeat above procedures until all frequency measured were complete.

7.3. Measurement Result

СН	Bandwidth
	(MHz)
Lower	1.164
Mid	1.232
Higher	1.214

7.4. Measurement Equipment Used:


	Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008			
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007			
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2006	11/10/2007			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A			
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007			
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007			
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007			

SGS Taiwan Ltd.	No. 134, Wu Kung Rd., W	uku Industrial Zone, Taipei Country, Taiwan. I	台標石股工業區石工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3939	f (886-2) 2298-2698	www.sgs.com.tw




Report No EF/2007/30001 Issue Date: May 31, 2007 Page: 19

20dB Band Width Test Data CH-Low

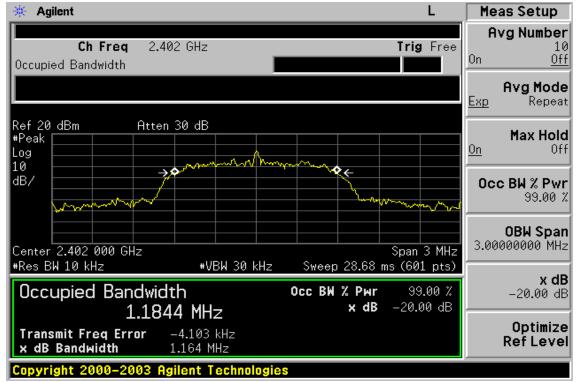


20dB Band Width Test Data CH-Mid

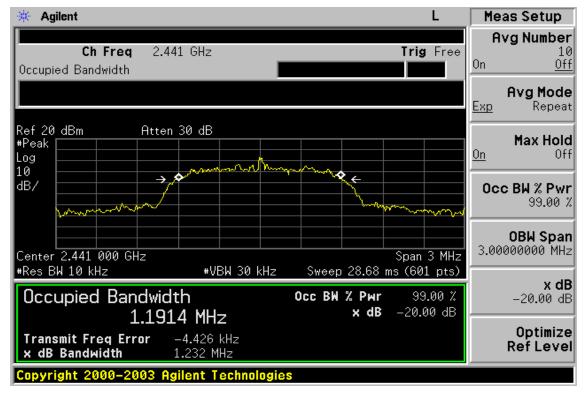



20dB Band Width Test Data CH-High

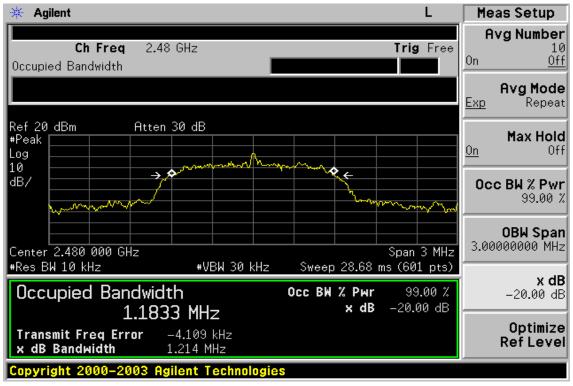



8. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

8.1. Standard Applicable

According to §15.247(c), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.488GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.
- 7. Radiated Emission refer to section 9.

8.3. Measurement Result

Refer to attach spectrum analyzer data chart.


Conducted Emission Test Site						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
ТҮРЕ		NUMBER	NUMBER	CAL.		
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008	
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007	
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2006	11/10/2007	
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A	
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007	
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007	
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007	

8.4. Measurement Equipment Used:


Note: Measurement Equipment for radiated emission refers to section 9.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。



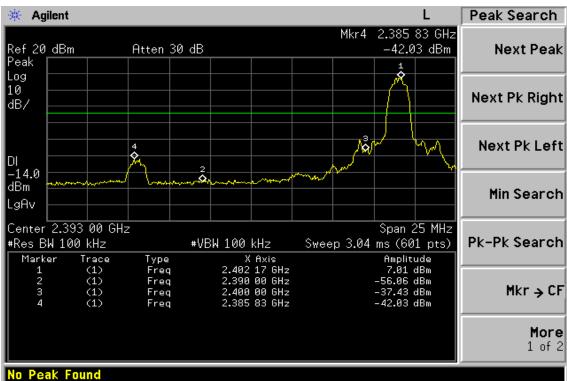


Conducted Emission: Test Data CH-Low

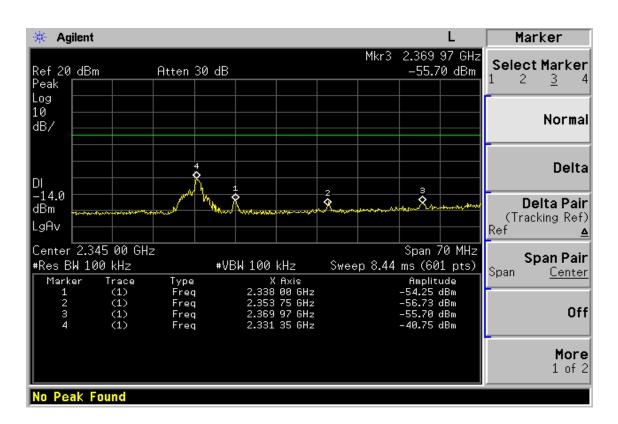

SGS Taiwan Ltd.	No. 134, Wu Kung Rd., '	Wuku Industrial Zone, Taipei Country, Taiwan. /	台北新田田工業區五丁路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3939	f (886-2) 2298-2698	www.sgs.com.tw
_			



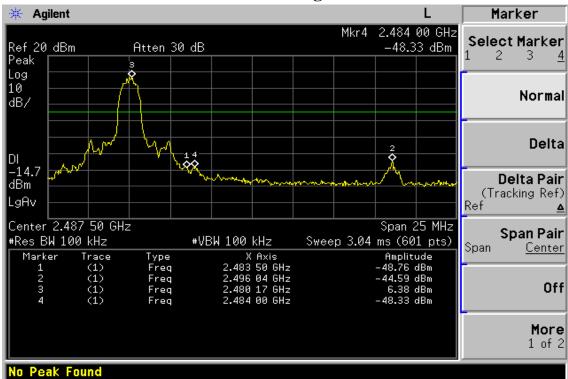

Conducted Emission: Test Data CH-High



Report No EF/2007/30001 Issue Date: May 31, 2007 Page: 24

Radiated Emission:

Operation Mode	TX CH Low	Test Date	May 25, 2007
Fundamental Frequency	2402 MHz	Test By	Jazz
Temperature	25	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2385.8	47.22		-1.40	45.82		74.00	54.00	-8.18	Peak
2390.0	38.29		-1.39	36.90		74.00	54.00	-17.10	Peak
Operation Fundamen Temperat Humidity	ntal Freque ure		CH Low 2 MHz 6				st Date st By	May 25, 2 Jazz Hor.	2007

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2385.8	47.33		-1.40	45.93		74.00	54.00	-8.07	Peak
2390.0	38.49		-1.39	37.10		74.00	54.00	-16.90	Peak

Remark :

- (1) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column₀
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Report No EF/2007/30001 Issue Date: May 31, 2007 Page: 25

Radiated Emission:

Operation Mode	TX CH High	Test Date	May 25, 2007
Fundamental Frequency	2480 MHz	Test By	Jazz
Temperature	25	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/n	n) (dB)	
2484.0	42.10		-0.92	41.18		74.00	54.00	-12.82	Peak
2486.0	39.58		-0.84	38.74		74.00	54.00	-15.26	Peak
Operation Fundamen Temperatu Humidity	tal Freque		CH High MHz			Test Test Pol	t Date t By	May 25, 2 Jazz Hor.	007

	Peak	AV		Actu	al FS	Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	Remark
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	
2484.0	42.83		-0.92	41.91		74.00	54.00	-12.09	Peak
2396.0	46.25		-0.84	45.41		74.00	54.00	-8.59	Peak

Remark :

- (1) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (3) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (4) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



9. SPURIOUS RADIATED EMISSION TEST

9.1. Standard Applicable

According to \$15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in \$15.209(a). And according to \$15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

9.2. EUT Setup

- 1. The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4-2003.
- 2. The EUT was put in the front of the test table. The peripherals was placed on the side of the host system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The spacing between the peripherals was 10 centimeters.
- 4. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 5. The host PC system was connected with 110Vac/60Hz power source.

9.3. Measurement Procedure


- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until all frequency measured were complete.




Report No EF/2007/30001 Issue Date: May 31, 2007 Page: 27

9.4. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

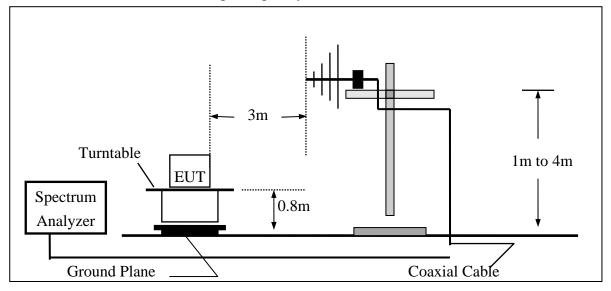

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

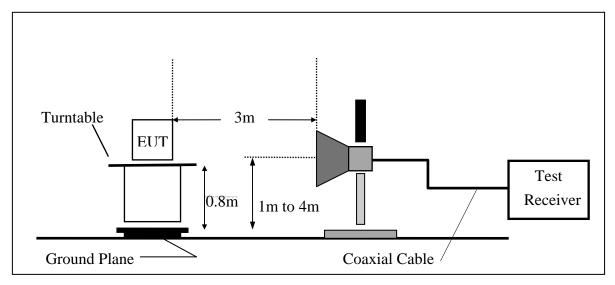



9.5. Measurement Equipment Used:

966 Chamber								
EQUIPMENT MFR MODEL SERIAL LAST CALE								
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	R&S	FSP 40	100034	05/27/2007	05/26/2008			
Spectrum Analyzer	Agilent	E7405A	US41160416	08/27/2006	08/26/2007			
Bilog Antenna	SCHWAZBECK	VULB9163	152	06/03/2006	06/02/2007			
Horn antenna	Schwarzbeck	BBHA 9120D	309/320	08/16/2006	08/15/2007			
Horn antenna	Schwarzbeck	BBHA 9170	184/185	07/04/2006	07/03/2007			
Pre-Amplifier	HP	8447D	2944A09469	07/19/2006	07/18/2007			
Pre-Amplifier	HP	8494B	3008A00578	02/26/2007	02/25/2008			
Turn Table	HD	DT420	N/A	N.C.R	N.C.R			
Antenna Tower	HD	MA240-N	240/657	N.C.R	N.C.R			
Controller	HD	HD100	N/A	N.C.R	N.C.R			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	10/09/2006	10/08/2007			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	10/09/2006	10/08/2007			
Site NSA	SGS	966 chamber	N/A	11/17/2006	11/16/2007			

9.6. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$\mathbf{FS} = \mathbf{RA} + \mathbf{AF} + \mathbf{CL} - \mathbf{AG}$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


9.7. Measurement Result

Refer to attach tabular data sheets.


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,受責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



Conducted Spurious Emission Measurement Result Ch Low 30MHz – 3GHz

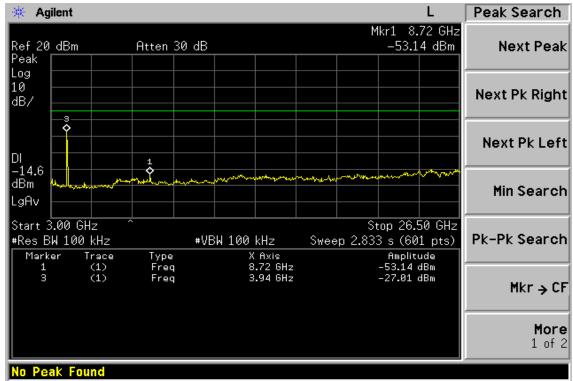




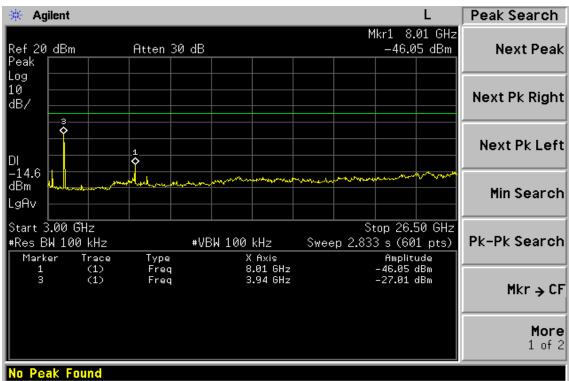




Ch Mid 30MHz – 3GHz

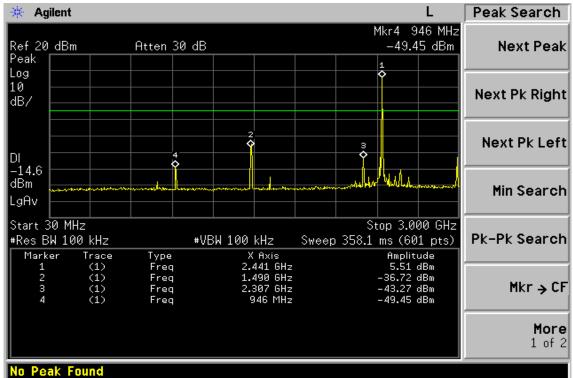



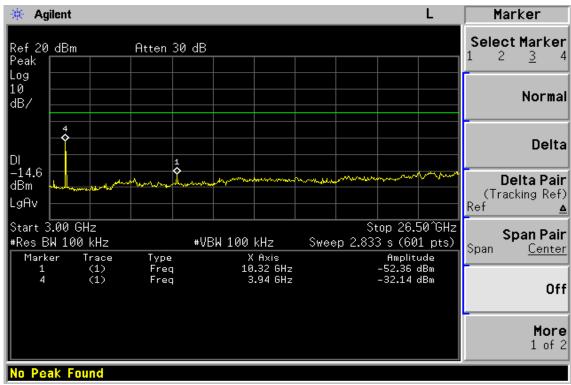


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在<u>www.sqs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。

 SGS Taiwan Ltd.
 No. 134, Wu Kung Rd., Wuku Industrial Zone, Taipei Country, Taiwan. / 台博統股工業區工路134號


 台灣檢驗科技股份有限公司
 t (886-2) 2299-3939
 f (886-2) 2298-2698
 www.sgs.com.tw



Ch High 30MHz – 3GHz

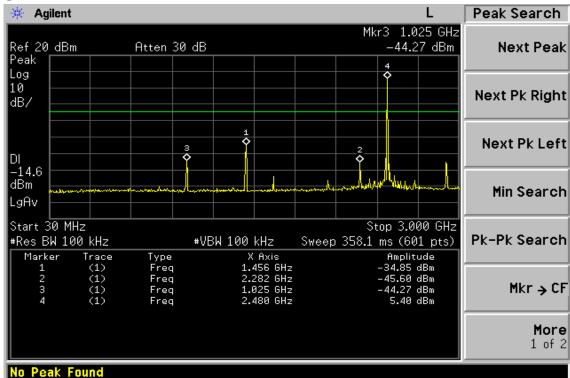

Ch High 3GHz – 26.5GHz

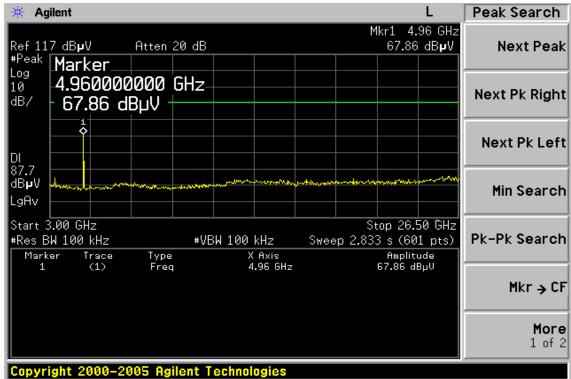



Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Low	Test Date	May 25, 2007
Fundamental Frequency	2402MHz	Test By	Jazz
Temperature	25	Pol	Ver./Hor.
Humidity	65 %		

	Freq.	Ant.Pol.	Detector Mode	Reading	Factor	Actual FS	Limit3m	Safe Margin	
_	(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
	61.04	V	Peak	53.93	-14.75	39.18	40.00	-0.82	
	155.13	V	Peak	51.56	-13.12	38.44	43.50	-5.06	
	187.14	V	Peak	52.98	-14.95	38.03	43.50	-5.47	
	61.04	Н	Peak	51.14	-14.75	36.39	40.00	-3.61	
	189.08	Н	Peak	50.52	-15.06	35.46	43.50	-8.04	
	300.63	Н	Peak	53.03	-13.11	39.92	46.00	-6.08	

Remark :

(1) Measuring frequencies from 30 MHz to the 1GHz_o

- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH Mid	Test Date	May 25, 2007
Fundamental Frequency	2441MHz	Test By	Jazz
Temperature	25	Pol	Ver./Hor
Humidity	65 %		

(dB)
-3.16
-7.66
-8.02
-0.53
-5.87
-5.06
-12.29

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode	TX CH High	Test Date	May 25, 2007
Fundamental Frequency	2480MHz	Test By	Jazz
Temperature	25	Pol	Ver./Hor
Humidity	65 %		

Freq.	Ant.Pol.	Detector Mode	Reading	Reading Factor		Limit3m	Safe Margin	
(MHz)	H/V	(PK/QP)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
61.04	V	Peak	54.22	-14.75	39.47	40.00	-0.53	
155.13	V	Peak	50.75	-13.12	37.63	43.50	-5.87	
191.99	V	Peak	53.67	-15.23	38.44	43.50	-5.06	
252.13	V	Peak	47.43	-13.72	33.71	46.00	-12.29	
61.04	Н	Peak	50.82	-14.75	36.07	40.00	-3.93	
126.03	Н	Peak	50.04	-14.78	35.26	43.50	-8.24	
189.08	Н	Peak	50.49	-15.06	35.43	43.50	-8.07	

Remark :

- (1) Measuring frequencies from 30 MHz to the 1GHz_o
- (2) Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/QP detector mode.
- (3) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	May 25, 2007
Fundamental Frequency	2402 MHz	Test By	Jazz
Temperature	25	Pol	Ver.
Humidity	65 %		

	Peak	AV		Actual FS		Peak	AV		
Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	_
1598.0	56.70		-5.48	51.22		74.00	54.00	-2.78	Peak
4804.0									
7206.0									
9608.0									
12010.0									
14412.0									
16814.0									
19216.0									
21618.0									
24020.0									

Remark :

- (1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.
- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Low	Test Date	May 25, 2007
Fundamental Frequency	2402 MHz	Test By	Jazz
Temperature	25	Pol	Hor
Humidity	65 %		

		Peak	AV		Actual FS		Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
-	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	_
	1598.0	56.56		-5.48	51.08		74.00	54.00	-2.92	Peak
	2391.0	38.40		-1.39	37.01		74.00	54.00	-16.99	Peak
	4804.0									
	7206.0									
	9608.0									
	12010.0									
	14412.0									
	16814.0									
	19216.0									
	21618.0									
	24020.0									

Remark:

(1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	May 25, 2007
Fundamental Frequency	2441 MHz	Test By	Jazz
Temperature	25	Pol	Ver
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	_
	1630.5	54.88		-5.26	49.62		74.00	54.00	-4.38	Peak
	4882.0									
	7323.0									
	9764.0									
	12205.0									
	14646.0									
	17087.0									
	19528.0									
	21969.0									
	24410.0									

Remark :

(1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	May 25, 2007
Fundamental Frequency	2441 MHz	Test By	Jazz
Temperature	25	Pol	Hor
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
-	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	_
	1643.5	55.24		-5.22	50.02		74.00	54.00	-3.98	Peak
	4882.0									
	7323.0									
	9764.0									
	12205.0									
	14646.0									
	17087.0									
	19528.0									
	21969.0									
	24410.0									

Remark :

(1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,受責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	May 25, 2007
Fundamental Frequency	2480 MHz	Test By	Jazz
Temperature	25	Pol	Ver.
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	_
	1643.5	55.24		-5.22	50.02		74.00	54.00	-3.98	Peak
	4960.0									
	7440.0									
	9920.0									
	12400.0									
	14880.0									
	17360.0									
	19840.0									
2	22320.0									
2	24800.0									

Remark :

(1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款 列印於背面, 亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,受責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。



Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH High	Test Date	May 25, 2007
Fundamental Frequency	2480 MHz	Test By	Jazz
Temperature	25	Pol	Hor
Humidity	65 %		

		Peak	AV		Actu	al FS	Peak	AV		
	Freq.	Reading	Reading	Ant./CL	Peak	AV	Limit	Limit	Margin	
_	(MHz)	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dB)	-
	1351.0	43.04		-6.56	36.48		74.00	54.00	-17.52	Peak
	1630.5	55.38		-5.22	50.16		74.00	54.00	-3.84	Peak
	4960.0									
	7440.0									
	9920.0									
	12400.0									
	14880.0									
	17360.0									
	19840.0									
	22320.0									
	24800.0									

Remark :

(1) Measuring frequencies from 1GHz to the 10th harmonic of highest fundamental frequency.

- (2) Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column_o
- (4) Spectrum Peak Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 3MHz, Sweep time= 200 ms.
- (5) Spectrum AV Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款 列印於背面, 亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,受責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。



10. FREQUENCY SEPARATION

10.1. Standard Applicable

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater.

10.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW,VBW=100KHz, Adjust Span to 5 MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

10.3. Measurement Result

Channel separation	Limit	Result
MHz	kHz	
1	>=25KHz or 2/3*20 dB bandwidth	PASS


10.4. Measurement Equipment Used:

	Conducted Emission Test Site							
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008			
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007			
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2006	11/10/2007			
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A			
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007			
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007			
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007			

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be repoduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在<u>www.sqs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。



Frequency Separation Test Data

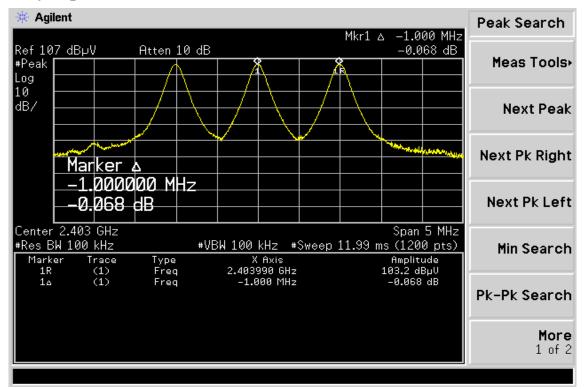

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告證循本公司訂定之通用服務條款所製作發放, 請注意此條款 列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



11. NUMBER OF HOPPING FREQUENCY

11.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

11.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW,VBW=100KHz,
- 5. Max hold, view and count how many channel in the band.

11.3. Measurement Result

The nominal channel spacing of the Bluetooth system is 1Mhz independent of the

operating mode.

The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is

fcenter = 75 kHz.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07-E) for three frequencies (2402, 2441, 2480 MHz).

Additionally an example for the channel separation is given in the test report

Total No of	Limit (CH)	Measurement result (CH)	Result
hopping channel	15	79	Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款 列印於背面,亦可在<u>www.sqs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



11.4. Measurement Equipment Used:


	Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
ТҮРЕ		NUMBER	NUMBER	CAL.					
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008				
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007				
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2006	11/10/2007				
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A				
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007				
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007				
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007				

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。




Channel Number

2.4 GHz – 2.441GHz

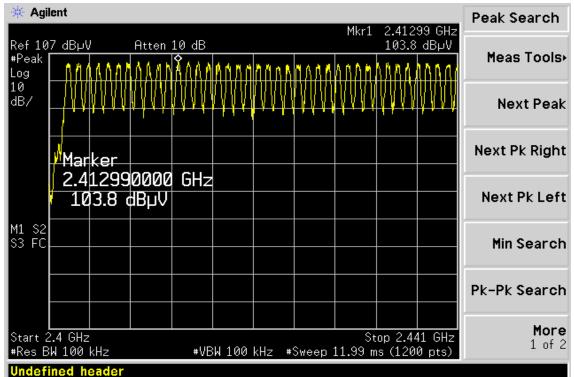

2.441 GHz – 2.4835GHz

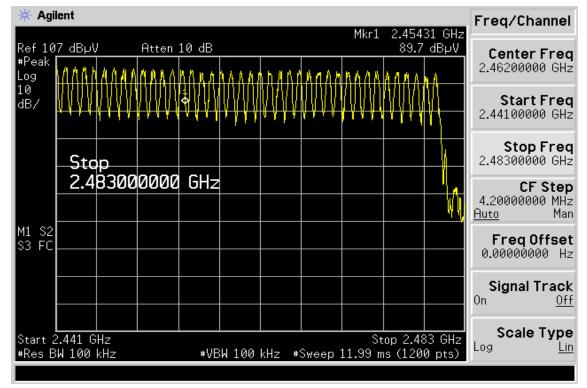

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在<u>www.sqs.com</u>中查閱。將本公司之義務, 免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。



12. TIME OF OCCUPANCY (DWELL TIME)

12.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

12.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=100KHz, Span = 0Hz, Adjust Sweep = 30s.
- 5. Repeat above procedures until all frequency measured were complete.

12.3. Measurement Result

The dwell time of 0.312 s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is a follows:

Dwell time = time slot length * hop rate / number of hopping channels *30s

A period time = 0.4 (ms) * 79 = 31.6 (s)

CH Low:	DH1 time slot = 0.405 (ms) * $(1600/(1*79))$ * $31.6 = 259.2$ (ms)
	DH3 time slot = $1.675 \text{ (ms)} * (1600/(3*79)) * 31.6 = 357.3 \text{ (ms)}$
	DH5 time slot = 2.925 (ms) * (1600/(5*79)) * 31.6 = 374.4 (ms)
CH Mid:	DH1 time slot = 0.405 (ms) * $(1600/(1*79))$ * $31.6 = 259.2$ (ms)
	DH3 time slot = 1.675 (ms) * (1600/(3*79)) * 31.6 = 357.3 (ms)
	DH5 time slot = 2.906 (ms) * (1600/(5*79)) * 31.6 = 371.9 (ms)
CH High:	DH1 time slot = 0.405 (ms) * $(1600/(1*79))$ * $31.6 = 259.2$ (ms)
	DH3 time slot = 1.662 (ms) * (1600/(3*79)) * 31.6 = 354.5 (ms)
	DH5 time slot = 2.906 (ms) * (1600/(5*79)) * 31.6 = 371.9 (ms)

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意比條款列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。



12.4. Measurement Equipment Used:


Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2006	11/10/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



Dwell Time Test Data


CH-Low

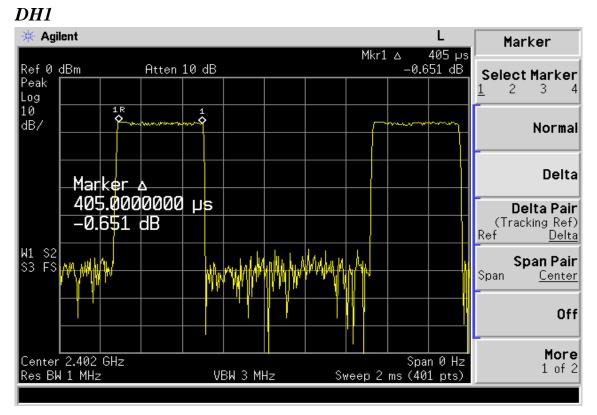


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告證循本公司訂定之通用服務條款所製作發放, 請注意此條款 列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。





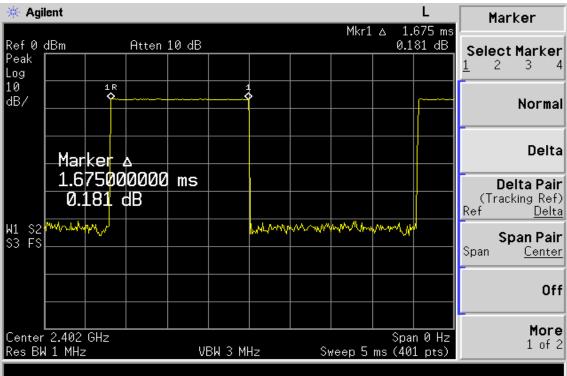


DH5

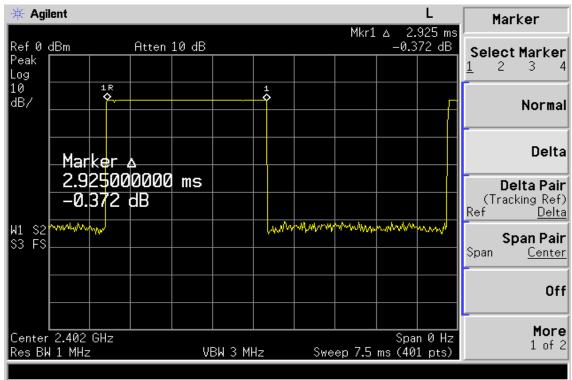


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告給果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



CH-Mid

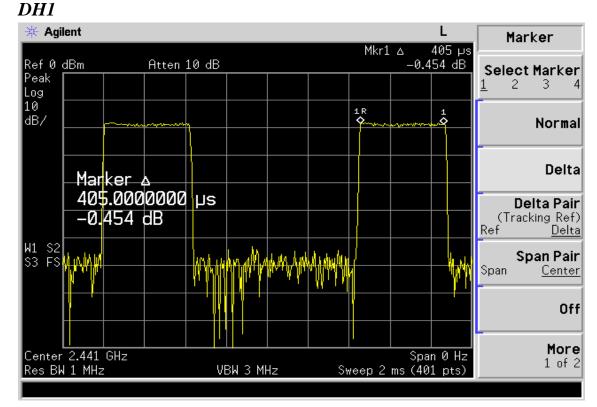

DH3

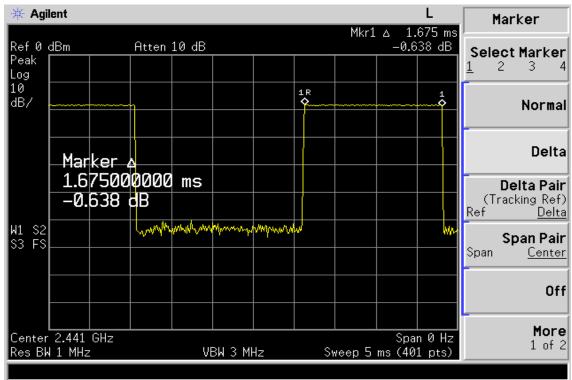


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd.	No. 134, Wu Kung Rd., W	uku Industrial Zone, Taipei Country, Taiwan. I	台標石股工業區石工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3939	f (886-2) 2298-2698	www.sgs.com.tw






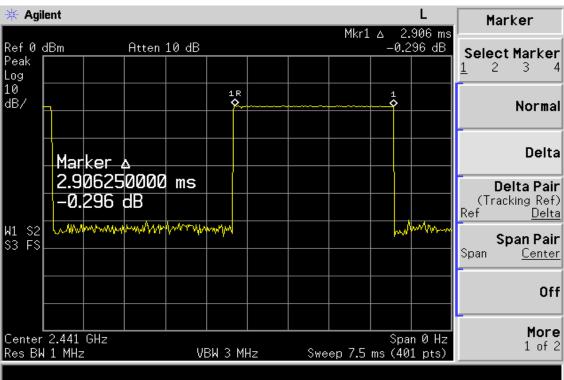


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告給果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。



CH-High

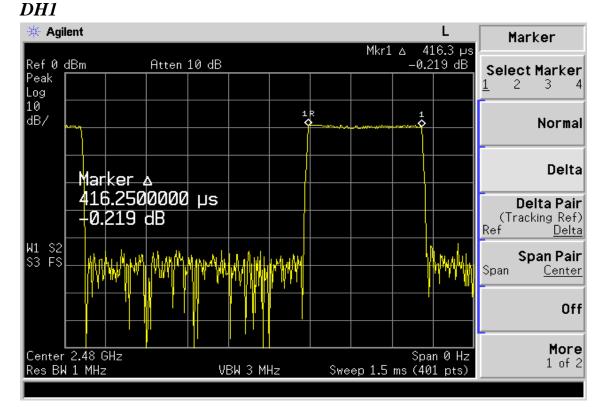

DH3

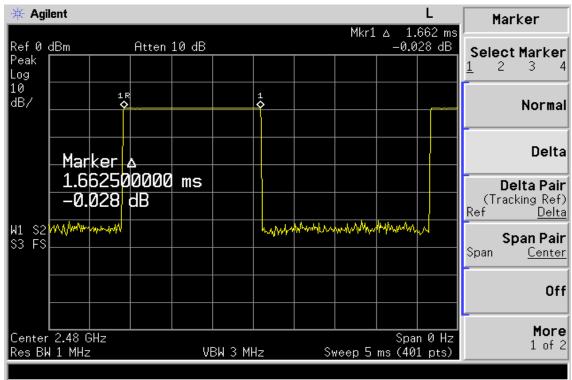


This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd.	No. 134, Wu Kung Rd., W	uku Industrial Zone, Taipei Country, Taiwan. /	台標石股工業區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3939	f (886-2) 2298-2698	www.sgs.com.tw





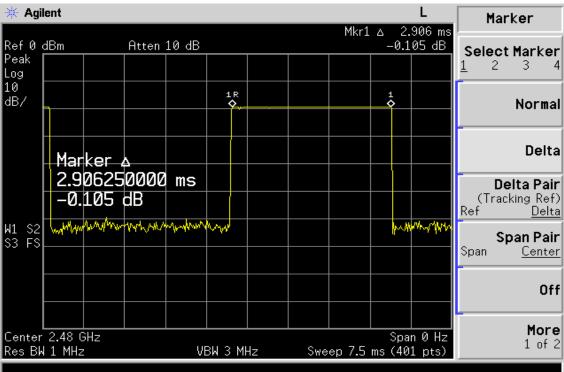

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



13. Peak Power Spectral Density

13.1. Standard Applicable

According to §15.247(d), for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3kHz band during any time interval of continuous transmission.

13.2. Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 3KHz, VBW = 10KHz, Span = 1.5MHz, Sweep=100s
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency measured were complete.

СН	RF Power Density	Cable loss	RF Power Density	Maximum Limit
	Reading (dBm)	(dB)	Level (dBm)	(dBm)
Low	-3.58	0.10	-3.48	8
Mid	-4.29	0.10	-4.19	8
High	-4.35	0.10	-4.25	8

13.3. Measurement Result

13.4. Measurement Equipment Used:


Conducted Emission Test Site					
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.
ТҮРЕ		NUMBER	NUMBER	CAL.	
Spectrum Analyzer	Agilent	E4446A	MY43360126	03/29/2007	03/28/2008
Spectrum Analyzer	Agilent	7405A	US41160416	06/28/2006	06/29/2007
Spectrum Analyzer	R&S	FSP 40	100034	11/09/2006	11/10/2007
Low Loss Cable	HUBER+SUHNER	SUCOFLEX 104PEA	N/A	N/A	N/A
Attenuator	Mini-Circult	BW-S10W5	N/A	10/07/2006	10/06/2007
Attenuator	Mini-Circult	BW-S6W5	N/A	10/07/2006	10/06/2007
Splitter	Mini-Circult	ZFSC-2-10G	N/A	10/07/2006	10/06/2007

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款 列印於背面,亦可在<u>www.sqs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。


SGS Taiwan Ltd.	No. 134, Wu Kung Rd., W	uku Industrial Zone, Taipei Country, Taiwan. /	台標石股工業區五工路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3939	f (886-2) 2298-2698	www.sgs.com.tw



Power Spectral Density Test Plot (CH-Low)

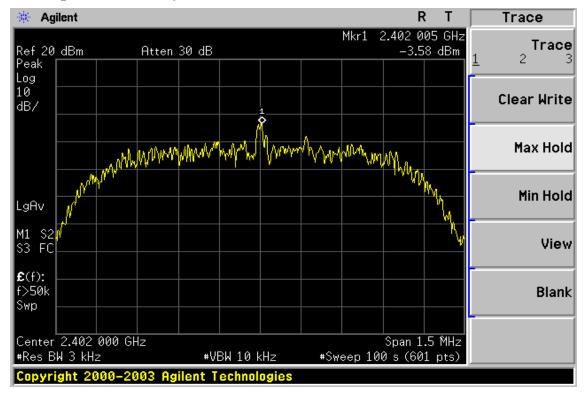


Power Spectral Density Test Plot (CH-Mid)

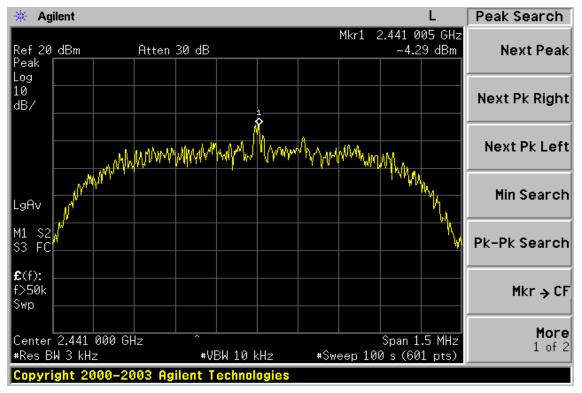

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放, 請注意此條款 列印於背面,亦可在<u>www.sgs.com</u>中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。

SGS Taiwan Ltd.	No. 134, Wu Kung Rd.,	Wuku Industrial Zone, Taipei Country, Taiwan. /	台北新田田業區五丁路134號
台灣檢驗科技股份有限公司	t (886-2) 2299-3939	f (886-2) 2298-2698	www.sgs.com.tw



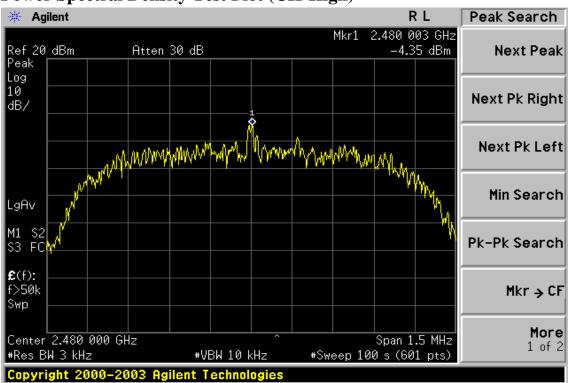

Power Spectral Density Test Plot (CH-High)

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sqs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告證循本公司訂定之通用服務條款所製作發放, 請注意此條款 列印於背面,亦可在www.sqs.com中查閱。將本公司之義務,免責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、寬改皆屬非法,違犯者將會被依法追訴。



14. ANTENNA REQUIREMENT

14.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 1 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

This document is issued by the Company subject to its General Conditions of Service printed overleaf or available on request and accessible at <u>www.sgs.com</u>. Attention is drawn to the limitations of liability, indemnification, and Jurisdictional issued defined therein. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report is unlawful and offenders may be prosecuted to the fullest extent of the law. 此報告是遵循本公司訂定之通用服務條款所製作發放,請注意此條款 列印於背面,亦可在www.sgs.com中查閱。將本公司之義務,受責,管轄權皆明確規範之。除非另有說明,此報告結果僅對檢驗之樣品負責。本報告未經本公司書面許可,不可部份複製。對本報告內容或外觀之任何未經授權之變更、偽造、竄改皆屬非法,違犯者將會被依法追訴。