



SAR TEST REPORT

HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD



EUT Type:	Portable Data Collection Terminal GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)		
FCC ID:	U7XMC-6500S		
Model:	MC-6500S	Trade Name	Mobile Comphia Co., Ltd.
Date of Issue:	June 26, 2007		
Test report no.:	HCT-SAR07-0609		
Test Laboratory:	HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD. SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA TEL: +82 31 639 8518 FAX: +82 31 639 8525		
Applicant :	Mobile Comphia Co., Ltd. DongWon B/D, 725-30, Yeoksam-dong, Gangnam-gu, Seoul, 135-080 Korea Tel: 82-2-574-0037 Fax: 82-2-574-0292 E-Mail: dj@mobilecompia.co.kr		
Testing has been carried out in accordance with:	47CFR §2.1093 FCC OET Bulletin 65(Edition 97-01), Supplement C (Edition 01-01) ANSI/ IEEE C95.1 – 2005 IEEE 1528-2003		
Test result:	The tested device complies with the requirements in respect of all parameters subject to the test. The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.		
Signature	 Report prepared by: Ki-Soo Kim Manager of Product Compliance Team		

Table of Contents

<u>1. INTRODUCTION</u>	3
<u>2. DESCRIPTION OF DEVICE</u>	4
<u>3. DESCRIPTION OF TEST EQUIPMENT</u>	5
<u>3.1 SAR MEASUREMENT SETUP</u>	5
<u>3.2 DASY E-FIELD PROBE SYSTEM</u>	6
<u>3.3 PROBE CALIBRATION PROCESS</u>	7
<u>3.4 SAM Phantom</u>	9
<u>3.5 Device Holder for Transmitters</u>	9
<u>3.6 Brain & Muscle Simulating Mixture Characterization</u>	10
<u>3.7 SAR TEST EQUIPMENT</u>	11
<u>4. SAR MEASUREMENT PROCEDURE</u>	12
<u>5. DESCRIPTION OF TEST POSITION</u>	13
<u>5.1 HEAD POSITION</u>	13
<u>5.2 Body Holster/Belt Clip Configurations</u>	14
<u>6. MEASUREMENT UNCERTAINTY</u>	15
<u>7. ANSI/ IEEE C95.1 - 2005 RF EXPOSURE LIMITS</u>	16
<u>8. SYSTEM VERIFICATION</u>	17
<u>8.1 Tissue Verification</u>	17
<u>8.2 System Validation</u>	17
<u>9. TEST CONFIGURATION</u>	19
<u>10. SAR TEST DATA SUMMARY</u>	19
<u>10.1 Measurement Results (GSM850 Head SAR Touch)</u>	19
<u>10.2 Measurement Results (GSM850 Head SAR Tilt)</u>	20
<u>10.3 Measurement Results (GSM1900 Head SAR Touch)</u>	21
<u>10.4 Measurement Results (GSM1900 Head SAR Tilt)</u>	22
<u>10.5 Measurement Results (GSM850 Body SAR)</u>	23
<u>10.6 Measurement Results (GSM1900 Body SAR)</u>	24
<u>10.7 Measurement Results (802.11b Module Body SAR)</u>	25
<u>10.8 Measurement Results (802.11g Module Body SAR)</u>	26
<u>11. CONCLUSION</u>	27
<u>12. REFERENCES</u>	28
Attachment 1. – SAR Test Plots	29
Attachment 2. – Dipole Validation Plots	66
Attachment 3. – Probe Calibration Data	76
Attachment 4. – Dipole Calibration Data	96

1. INTRODUCTION

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-2005 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. (c) 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.[2] The measurement procedure described in IEEE/ANSI C95.3-1992 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave[3] is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 (c) NCRP, 1986, Bethesda, MD 20814.[4] SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (r). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body .

$$S A R = \frac{d}{d t} \left(\frac{d U}{d m} \right) = \frac{d}{d t} \left(\frac{d U}{\rho d v} \right)$$

Figure 2. SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$S A R = \sigma E^2 / \rho$$

where:

σ = conductivity of the tissue-simulant material (S/m)

ρ = mass density of the tissue-simulant material (kg/m³)

E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[4]

2. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

EUT Type	Portable Data Collection Terminal GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
FCC ID	U7XMC-6500S
Model(s)	MC-6500S
Trade Name	Mobile Compia Co., Ltd.
Serial Number(s)	U7XMC-6500S #1
Application Type	Certification
Modulation(s)	GSM850/GSM1900
Tx Frequency	824.20 - 848.80 MHz (GSM850) 1850.20 - 1909.80 MHz (GSM1900) 2402 - 2480 MHz (Bluetooth) 2412 – 2462 MHz (DSSS/OFDM)
Rx Frequency	869.20 - 893.80 MHz (GSM850) 1930.20 - 1989.80 MHz (GSM1900) 2402 - 2480 MHz (Bluetooth) 2412 – 2462 MHz (DSSS/OFDM)
FCC Classification	Licensed Portable Transmitter Held to Ear (PCE)
Production Unit or Identical Prototype	Prototype
Max SAR	0.199 W/kg GSM850 Head SAR / 0.046 W/kg GSM850 Body SAR 0.141 W/kg GSM1900 Head SAR / 0.022 W/kg GSM1900 Body SAR 0.595 W/kg 802.11b Body SAR / 0.309 W/kg 802.11g Body SAR
Date(s) of Tests	June 22, 2007 ~ June 25, 2007
Antenna Type	Fixed

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR MEASUREMENT SETUP

These measurements are performed using the DASY4 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Staubli), robot controller, Pentium III computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig.3.1).

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the HP Pentium 4 3.0GHz computer with Windows XP system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

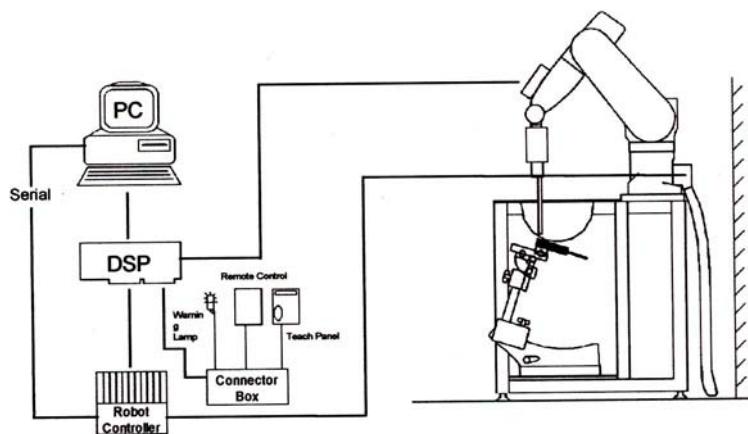


Figure 3.1 HCT SAR Lab. Test Measurement Set-up

The DAE3 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in [5].

3.2 DASY E-FIELD PROBE SYSTEM

3.2.1 ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System Built-in shielding against static charges
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at Frequencies of 450 MHz, 900 MHz and 1.8 GHz (accuracy.:8%)
Frequency	10 MHz to > 6 GHz; Linearity: . 0.2 dB (30 MHz to 3 GHz)
Directivity	0.2 dB in brain tissue (rotation around probe axis) 0.4 dB in brain tissue (rotation normal probe axis)
Dynamic	5 uW/g to > 100 mW/g;
Range Linearity:	0.2 dB
Surface Detection	0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces.
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dissymmetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



Figure 3.2 Photograph of the probe
and the Phantom

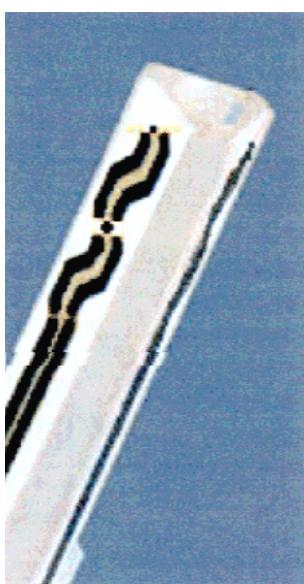


Figure 3.3 ET3DV6 E-field Probe

The SAR measurements were conducted with the dosimetric probe ET3DV6, designed in the classical triangular configuration [5] and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical mortifier line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches a maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY4 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

3.3 PROBE CALIBRATION PROCESS

3.3.1 E-Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure described in [6] with an accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in [7] and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe is tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1 GHz, and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E-field;

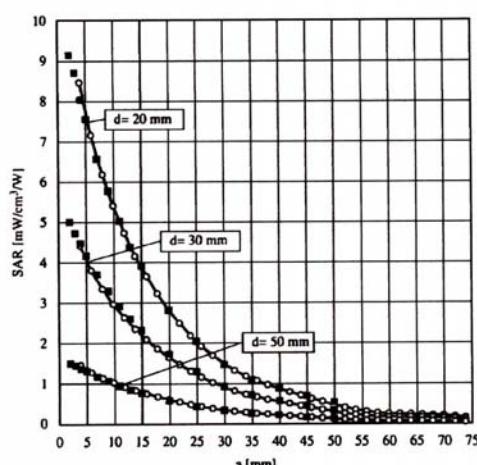


Figure 3.4 E-Field and Temperature measurements at 900MHz[5]

$$\text{SAR} = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

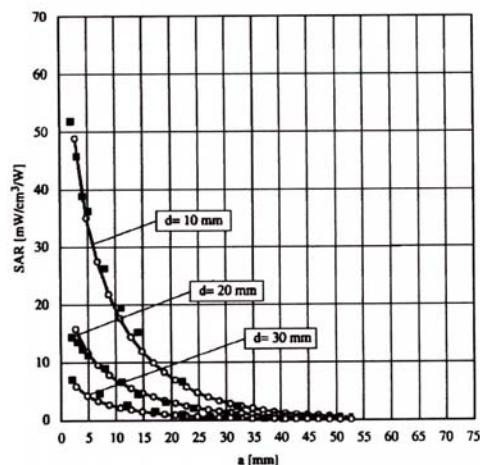


Figure 3.5 E-Field and temperature measurements at 1.8GHz [5]

3.3.2 Data Extrapolation

The DASY4 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as [8]:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i} \quad \text{with} \quad \begin{aligned} V_i &= \text{compensated signal of channel } i & (i=x,y,z) \\ U_i &= \text{input signal of channel } i & (i=x,y,z) \\ cf &= \text{crest factor of exciting field} & (\text{DASY parameter}) \\ dcp_i &= \text{diode compression point} & (\text{DASY parameter}) \end{aligned}$$

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$
 with
 V_i = compensated signal of channel i (i = x,y,z)
 $Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
 $\mu\text{V}/(\text{V}/\text{m})^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000} \quad \text{with} \quad \begin{aligned} SAR &= \text{local specific absorption rate in W/g} \\ E_{tot} &= \text{total field strength in V/m} \\ \sigma &= \text{conductivity in [mho/m] or [Siemens/m]} \\ \rho &= \text{equivalent tissue density in g/cm}^3 \end{aligned}$$

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{with} \quad \begin{aligned} P_{pwe} &= \text{equivalent power density of a plane wave in W/cm}^2 \\ E_{tot} &= \text{total electric field strength in V/m} \end{aligned}$$

3.4 SAM Phantom

The SAM Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users [9][10]. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

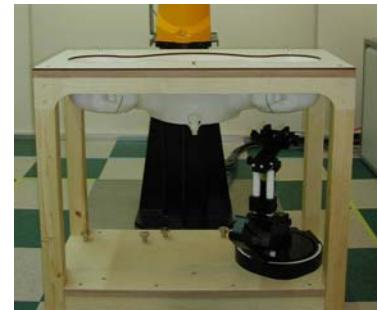


Figure 3.6 SAM Phantom

Shell Thickness	2.0 mm
Filling Volume	Volume Approx. 30 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)

3.5 Device Holder for Transmitters

In combination with the SAM Phantom V4.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatable positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations [10]. To produce the Worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Fig. 3.7 Device Holder

3.6 Brain & Muscle Simulating Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethyl cellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bacteriocide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Hartsgrove [11].

Ingredients (%by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7

Salt: 99%Pure Sodium Chloride Sugar: 98%Pure Sucrose
Water: De-ionized, 16M resistivity HEC: Hydroxyethyl Cellulose
DGBE: 99% Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy)ethanol]
Triton X-100(ultra pure): Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether

Table 3.1 Composition of the Tissue Equivalent Matter

3.7 SAR TEST EQUIPMENT

Manufacturer	Type / Model	S/N	Calib. Date	Calib.Interval	Calib.Due
SPEAG	SAM Phantom	-	N/A	N/A	N/A
Staubli	Robot RX90L	F01/5K09A1/A/01	N/A	N/A	N/A
Staubli	Robot ControllerCS7MB	F99/5A82A1/C/01	N/A	N/A	N/A
HP	Pavilion t000_puffer	KRJ51201TV	N/A	N/A	N/A
SPEAG	Light Alignment Sensor	265	N/A	N/A	N/A
Staubli	Teach Pendant (Joystick)	D221340.01	N/A	N/A	N/A
SPEAG	DAE4V1	447	Mar.06, 2007	Annual	Mar.06, 2008
SPEAG	DAE3V1	466	Jan.25, 2007	Annual	Jan.25, 2008
SPEAG	DAE3V1	446	Nov.15, 2006	Annual	Nov.15, 2007
SPEAG	E-Field Probe ET3DV6	1798	Aug.25, 2006	Annual	Aug.25, 2007
SPEAG	E-Field Probe ET3DV6	1607	Feb.21, 2007	Annual	Feb.21, 2008
SPEAG	Validation Dipole D450V2	1007	Mar.15, 2007	Annual	Mar.15, 2008
SPEAG	Validation Dipole D835V2	441	Aug.14, 2006	Annual	Aug.14, 2007
SPEAG	Validation Dipole D900V2	121	Feb.19, 2007	Annual	Feb.19, 2008
SPEAG	Validation Dipole D1800V2	2d007	Aug.16, 2006	Annual	Aug.16, 2007
SPEAG	Validation Dipole D1900V2	5d032	Feb.20, 2007	Annual	Feb.20, 2008
SPEAG	Validation Dipole D2450V2	743	Jan.17, 2007	Annual	Jan.17, 2008
Agilent	Power Meter(F) E4419B	MY40330223	Nov.08, 2006	Annual	Nov.08, 2007
Agilent	Power Sensor(G) 8481	MY41090870	Nov.21, 2006	Annual	Nov.21, 2007
HP	Dielectric Probe Kit 85070C	00721521	N/A	N/A	N/A
HP	Dual Directional Coupler	16072	Nov.09, 2006	Annual	Nov.09, 2007
R&S	Base Station CMU200	838207/050	Nov.14, 2006	Annual	Nov.14, 2007
Tescom	Bluetooth TC-3000	3000A490112	Jan.22, 2007	Annual	Jan.22, 2008
Agilent	Base Station E5515C	GB44400269	Feb.11, 2007	Annual	Feb.11, 2008
HP	Signal Generator E4438C	MY45092381	Feb.07, 2007	Annual	Feb.07, 2008
HP	Network Analyzer 8753ES	JP39240221	Apr.11, 2007	Annual	Apr.11, 2008
EM POWER	Power Amp BBS3Q7ELU	1013-D/C-0127	Apr.17, 2007	Annual	Apr.17, 2008

NOTE:

The E-field probe was calibrated by SPEAG, by the waveguide technique procedure. Dipole Validation measurement is performed by HCT Lab. before each test. The brain simulating material is calibrated by HCT using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material.

4. SAR MEASUREMENT PROCEDURE

The evaluation was performed with the following procedure:

1. The SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drop.
2. The SAR distribution at the exposed side of the head was measured at a distance of 3.9mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 20mm x 20mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.
3. Around this point, a volume of 32mm x 32mm x 34mm was assessed by measuring 5 x 5 x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - a. The data at the surface were extrapolated, since the center of the dipoles is 2.7mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. The extrapolation was based on a least square algorithm [13]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - b. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x,y, and z directions) [13][14]. The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR value, at the same location as procedure #1, was re-measured. If the value changed by more than 5%, the evaluation is repeated.

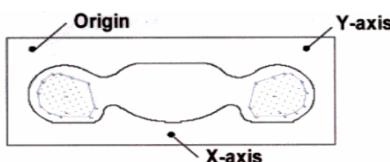


Fig. 4.1 SAR Measurement Point in Area Scan

5. DESCRIPTION OF TEST POSITION

5.1 HEAD POSITION

The device was placed in a normal operating position with the Point A on the device, as illustrated in following drawing, aligned with the location of the RE(ERP) on the phantom. With the ear-piece pressed against the head, the vertical center line of the body of the handset was aligned with an imaginary plane consisting of the RE, LE and M. While maintaining these alignments, the body of the handset was gradually moved towards the cheek until any point on the mouth-piece or keypad contacted the cheek. This is a cheek/touch position. For ear/tilt position, while maintain the device aligned with the BM and FN lines, the device was pivot against ERP back for 15° or until the device antenna touch the phantom. Please refer to IEEE SC-2 P1528 illustration below.

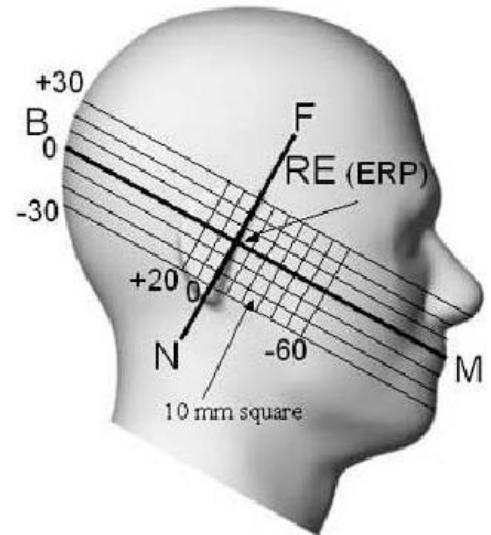


Figure 5.1 Side view of the phantom

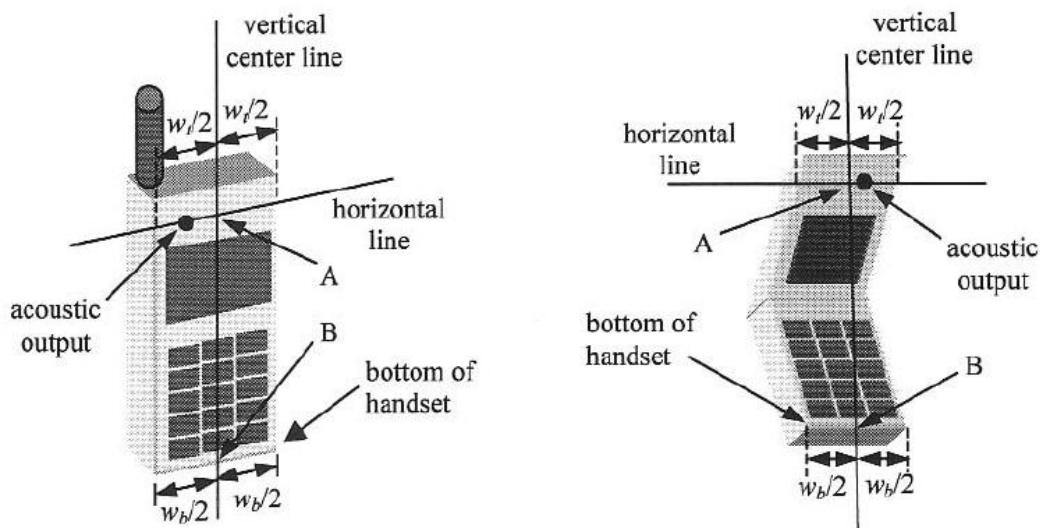


Figure 5.2 Handset vertical and horizontal reference lines

5.2 Body Holster/Belt Clip Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. A device with a headset output is tested with a headset connected to the device. Body dielectric parameters are used.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with each accessory. If multiple accessory share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some Devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used.

Since this EUT does not supply any body worn accessory to the end user a distance of 1.5 cm from the EUT back surface to the liquid interface is configured for the generic test.

"See the Test SET-UP Photo"

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessory(ies), Including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

In all cases SAR measurements are performed to investigate the worst-case positioning. Worstcase positioning is then documented and used to perform Body SAR testing.

6. MEASUREMENT UNCERTAINTY

Measurement uncertainties in SAR measurements are difficult to quantify due to several variables including biological, physiological, and environmental. However, we estimate the measurement uncertainties in SAR to be less than 15-25 % [16].

According to ANSI/IEEE C95.3, the overall uncertainties are difficult to assess and will vary with the type of meter and usage situation. However, accuracy's of 1 to ± 3 dB can be expected in practice, with greater uncertainties in near-field situations and at higher frequencies (shorter wavelengths), or areas where large reflecting objects are present. Under optimum measurement conditions, SAR measurement uncertainties of at least ± 2 dB can be expected.[3]

According to CENELEC [17], typical worst-case uncertainty of field measurements is 5 dB. For well-defined modulation characteristics the uncertainty can be reduced to ± 3 dB.

Error Description	Uncertainty value [%]	Probability Distribution	Divisor	ci	ci^2	Standard Uncertainty [%]	Stand Uncert 2	(Stand Uncert 2) X (ci 2)	Vi & Verif
1. Measurement System									
Probe Calibration	5.5	Normal	1.00	1	1	5.50	30.25	30.25	∞
Axial Isotropy	4.7	Rectangular	1.73	0.7	0.49	2.71	7.36	3.61	∞
Hemispherical Isotropy	9.6	Rectangular	1.73	0.7	0.49	5.54	30.72	15.05	∞
Linearity	4.7	Rectangular	1.73	1	1	2.71	7.36	7.36	∞
System Detection limits	1.0	Rectangular	1.73	1	1	0.58	0.33	0.33	∞
Boundary effect	1.0	Rectangular	1.73	1	1	0.58	0.33	0.33	∞
Response time	0.8	Rectangular	1.73	1	1	0.46	0.21	0.21	∞
RF Ambient conditions	3.0	Rectangular	1.73	1	1	1.73	3.00	3.00	∞
Readout Electronics	0.3	Normal	1.00	1	1	0.30	0.09	0.09	∞
Integration time	2.6	Rectangular	1.73	1	1	1.50	2.25	2.25	∞
Probe positioner	0.4	Rectangular	1.73	1	1	0.23	0.05	0.05	∞
Probe positioning	2.9	Rectangular	1.73	1	1	1.67	2.80	2.80	∞
Maximum SAR evaluation	1.0	Rectangular	1.73	1	1	0.58	0.33	0.33	∞
2. Test Sample Related									
Device Positioning	1.8	Normal	1.00	1	1	1.77	3.13	3.13	9
Device Holder	3.6	Normal	1.00	1	1	3.60	12.96	12.96	∞
Power Drift	5.0	Rectangular	1.73	1	1	2.89	8.33	8.33	∞
3. Phantom and Setup									
Phantom Uncertainty	4.0	Rectangular	1.73	1	1	2.31	5.33	5.33	∞
Liquid conductivity (target)	5.0	Rectangular	1.73	0.5	0.25	2.89	8.33	2.08	∞
Liquid conductivity (measurement error)	2.5	Normal	1.00	0.5	0.25	2.50	6.25	1.56	∞
Liquid permittivity (target)	5.0	Rectangular	1.73	0.5	0.25	2.89	8.33	2.08	∞
Liquid permittivity (measurement error)	2.5	Normal	1.00	0.5	0.25	2.50	6.25	1.56	∞
Sub Total									
12.63									
Combined standard uncertainty [%]									
10.14									
Expanded uncertainty [$k = 2$, confidence 95 %]									
$\pm 20.3 \%$									

Table 6.1 Breakdown of Errors

7. ANSI/ IEEE C95.1 - 2005 RF EXPOSURE LIMITS

HUMAN EXPOSURE	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Occupational (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.00

Table 7.1 Safety Limits for Partial Body Exposure

NOTES:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

** The Spatial Average value of the SAR averaged over the whole-body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

8. SYSTEM VERIFICATION

8.1 Tissue Verification

Freq. [MHz]	Date	Liquid	Liquid Temp[°C]	Parameters	Target Value	Measured Value	Deviation [%]	Limit [%]
835	June 22, 2007	Head	22.0	ϵ_r	41.5	41.1	- 0.96	$\pm 5\%$
				σ	0.90	0.876	- 2.67	$\pm 5\%$
835	June 22, 2007	Body	22.0	ϵ_r	55.2	53.3	- 3.44	$\pm 5\%$
				σ	0.97	0.99	+ 2.06	$\pm 5\%$
1900	June 23, 2007	Head	22.0	ϵ_r	40.0	38.5	- 3.75	$\pm 5\%$
				σ	1.40	1.44	+ 2.86	$\pm 5\%$
1900	June 23, 2007	Body	22.0	ϵ_r	53.3	52.0	- 2.44	$\pm 5\%$
				σ	1.52	1.57	+ 3.29	$\pm 5\%$
2450	June 25, 2007	Head	21.9	ϵ_r	39.2	38.8	- 1.02	$\pm 5\%$
				σ	1.80	1.80	0.00	$\pm 5\%$
2450	June 25, 2007	Body	21.9	ϵ_r	52.7	52.7	0.00	$\pm 5\%$
				σ	1.95	1.97	+ 1.03	$\pm 5\%$

8.2 System Validation

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 835MHz, 1900MHz, 2450MHz by using the system validation kit. (Graphic Plots Attached)

Freq. [MHz]	Date	Liquid	Liquid Temp [°C]	SAR Average	Target Value (SPEAG) (mW/g)	Measured Value (mW/g)	Deviation [%]	Limit [%]
835 MHz	June 22, 2007	Head	22.0	1 g	9.51	9.58	+ 0.74	$\pm 10\%$
1900 MHz	June 23, 2007	Head	22.0	1 g	37.2	37.8	+ 1.61	$\pm 10\%$
2450 MHz	June 25, 2007	Head	21.9	1 g	54.1	55.6	+ 2.77	$\pm 10\%$

* Input Power: 1 W

9. TEST CONFIGURATIONS

SAR Testing with IEEE 802.11 a/b/g Transmitters

Normal Network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

9. 1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9. 2 General Device Setup

80.11 a/b/g and 4.9 GHz operating modes are tested independently according to the service requirements in each frequency band. 80.211 b/g modes are tested on channels 1, 6 and 11. 802.11a is tested for UNII operations on channels 36 and 48 in the 5.15-5.25 GHz band; channels 52 and 64 in the 5.25-5.35 GHz band; Channels 104, 116, 124 and 136 in the 5.470-5.725 GHz band; and channels 149 and 161 in the 5.8 GHz band. When 5.8 GHz § 15.247 is also available, channels 149, 157 and 165 should be tested instead of the UNII channels. 4.9 GHz is tested on channels 1, 10 and 5 or 6, whichever has the higher output power, for 5 MHz channels; channels 11,15 and 19 for 10 MHz channels; and channels 21 and 25 for 20 MHz channels.

These are referred to as the "default test channels". 802.11g mode was evaluated only if the output power was 0.25 dB higher than the 802.11b mode.

Mode	GHz	Channel	Turbo Channel	"Default Test Channels"		
				§15.247		UNII
				802.11b	802.11g	
802.11 b/g	2.412	1		✓	✓	
	2.437	6	6	✓	✓	
	2.462	11		✓	✓	
	5.18	36				✓
	5.20	40	42 (5.21 GHz)			•
	5.22	44				•
	5.24	48	50 (5.25 GHz)		✓	
	5.26	52			✓	
	5.28	56	58 (5.29 GHz)			•
	5.30	60				•
802.11a	5.32	64			✓	
	5.500	100				•
	5.520	104			✓	
	5.540	108				•
	5.560	112				•
	5.580	116			✓	
	5.600	120				•
	5.620	124			✓	
	5.640	128				•
	5.660	132				•
	5.680	136			✓	
	5.700	140				•
	5.745	149		✓	✓	
UNII or §15.247	5.765	153	152 (5.76 GHz)		•	
	5.785	157		✓		•
	5.805	161	160 (5.80 GHz)		•	✓
	§15.247	5.825	165	✓		

Table 4. 802.11 Test Channels per FCC Requirements

10. SAR TEST DATA SUMMARY

10.1 Measurement Results (GSM850 Head SAR Touch)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Ant. Position	SAR(mW/g)
MHz	Channel.		Begin	End				
824.2	128 (Low)	GSM850	32.95	32.85	Standard	Left Ear	Fixed	0.155
836.6	190 (Mid)	GSM850	32.92	32.91	Standard	Left Ear	Fixed	0.171
848.8	251 (High)	GSM850	32.93	33.00	Standard	Left Ear	Fixed	0.199
824.2	128 (Low)	GSM850	32.95	32.81	Standard	Right Ear	Fixed	0.119
836.6	190 (Mid)	GSM850	32.92	32.79	Standard	Right Ear	Fixed	0.128
848.8	251 (High)	GSM850	32.93	32.83	Standard	Right Ear	Fixed	0.153
848.8	251 (High)	GSM850	32.93	32.80	Standard	Left Ear	Fixed	*0.196

ANSI/ IEEE C95.1 2005 – Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Head
1.6 W/kg (mW/g)
Averaged over 1 gram

NOTES:

- 1 The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- 2 All modes of operation were investigated and the worst-case are reported.
- 3 Measured Depth of Simulating Tissue is 15.0 ± 0.2 cm.
- 4 Tissue parameters and temperatures are listed on the SAR plot.
- 5 Battery Type Standard Extended Slim
Batteries are fully charged for all readings.
- 6 Test Signal Call Mode Manual Test cord Base Station Simulator
- 7 Highest SAR value measurement in this band repeated with *Bluetooth.

10.2 Measurement Results (GSM850 Head SAR Tilt)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Ant. Position	SAR(mW/g)
MHz	Channel.		Begin	End				
836.6	190 (Mid)	GSM850	32.92	32.75	Standard	Left Tilt 15°	Fixed	0.181
836.6	190 (Mid)	GSM850	32.92	32.80	Standard	Right Tilt 15°	Fixed	0.123
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) <small>Averaged over 1 gram</small>		

NOTES:

- 1 The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- 2 All modes of operation were investigated and the worst-case are reported.
- 3 Measured Depth of Simulating Tissue is $15.0 \pm 0.2\text{cm}$.
- 4 Tissue parameters and temperatures are listed on the SAR plot.
- 5 Battery Type Standard Extended Slim
Batteries are fully charged for all readings.
- 6 Test Signal Call Mode Manual Test cord Base Station Simulator
- 7 Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

10.3 Measurement Results (GSM1900 Head SAR Touch)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Ant. Position	SAR(mW/g)
MHz	Channel.		Begin	End				
1850.2	512 (Low)	GSM1900	29.91	29.98	Standard	Left Ear	Fixed	0.141
1880.0	661 (Mid)	GSM1900	29.94	30.10	Standard	Left Ear	Fixed	0.096
1909.8	810 (High)	GSM1900	29.96	29.92	Standard	Left Ear	Fixed	0.077
1850.2	512 (Low)	GSM1900	29.91	29.78	Standard	Right Ear	Fixed	0.061
1880.0	661 (Mid)	GSM1900	29.94	30.05	Standard	Right Ear	Fixed	0.043
1909.8	810 (High)	GSM1900	29.96	30.05	Standard	Right Ear	Fixed	0.036
1850.2	512 (Low)	GSM1900	29.91	29.73	Standard	Left Ear	Fixed	*0.137

ANSI/ IEEE C95.1 2005 – Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Head
1.6 W/kg (mW/g)
Averaged over 1 gram

NOTES:

- 1 The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- 2 All modes of operation were investigated and the worst-case are reported.
- 3 Measured Depth of Simulating Tissue is 15.0 ± 0.2 cm.
- 4 Tissue parameters and temperatures are listed on the SAR plot.
- 5 Battery Type Standard Extended Slim
Batteries are fully charged for all readings.
- 6 Test Signal Call Mode Manual Test cord Base Station Simulator
- 7 Highest SAR value measurement in this band repeated with *Bluetooth.

10.4 Measurement Results (GSM1900 Head SAR Tilt)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Ant. Position	SAR(mW/g)
MHz	Channel.		Begin	End				
1880.0	661 (Mid)	GSM1900	29.94	29.93	Standard	Left Tilt 15°	Fixed	0.074
1880.0	661 (Mid)	GSM1900	29.94	29.96	Standard	Right Tilt 15°	Fixed	0.060
ANSI/ IEEE C95.1 2005 – Safety Limit Spatial Peak Uncontrolled Exposure/ General Population						Head 1.6 W/kg (mW/g) <small>Averaged over 1 gram</small>		

NOTES:

- 1 The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- 2 All modes of operation were investigated and the worst-case are reported.
- 3 Measured Depth of Simulating Tissue is $15.0 \pm 0.2\text{cm}$.
- 4 Tissue parameters and temperatures are listed on the SAR plot.
- 5 Battery Type Standard Extended Slim
Batteries are fully charged for all readings.
- 6 Test Signal Call Mode Manual Test cord Base Station Simulator
- 7 Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

10.5 Measurement Results (GSM850 Body SAR)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Ant. Position	SAR(mW/g)
MHz	Channel.		Begin	End				
836.6	190 (Mid)	GSM850	32.92	32.85	Standard	1.5 cm without Holster	Fixed	0.029
836.6	190 (Mid)	GSM850	32.92	32.79	Standard	1.5 cm without Holster	Fixed	*0.029
836.6	190 (Mid)	GSM850	32.92	32.93	Standard	1.5 cm without Holster	Fixed	**0.023
836.6	190 (Mid)	GSM850	32.92	32.92	Standard	1.5 cm without Holster	Fixed	***0.046

ANSI/ IEEE C95.1 2005 – Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Body
1.6 W/kg (mW/g)
Averaged over 1 gram

NOTES:

- 1 The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- 2 All modes of operation were investigated and the worst-case are reported.
- 3 Measured Depth of Simulating Tissue is 15.0 ± 0.2 cm.
- 4 Tissue parameters and temperatures are listed on the SAR plot.
- 5 Battery Type Standard Extended Slim
 Batteries are fully charged for all readings.
- 6 Test Signal Call Mode Manual Test cord Base Station Simulator
- 7 Both side of the phone were tested and the worst-case side is reported.
- 8 HEADSET was connected.
- 9 Test Configuration With Holster Without Holster
- 10 Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- 11 Highest SAR value measurement in this band repeated with *Bluetooth/ **GPRS/**Front.

10.6 Measurement Results (GSM1900 Body SAR)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Ant. Position	SAR(mW/g)
MHz	Channel.		Begin	End				
1880.0	661 (Mid)	GSM1900	29.94	29.90	Standard	1.5 cm without Holster	Fixed	0.022
1880.0	661 (Mid)	GSM1900	29.94	29.81	Standard	1.5 cm without Holster	Fixed	*0.021
1880.0	661 (Mid)	GSM1900	29.94	30.07	Standard	1.5 cm without Holster	Fixed	**0.021
1880.0	661 (Mid)	GSM1900	29.94	30.06	Standard	1.5 cm without Holster	Fixed	***0.018

ANSI/ IEEE C95.1 2005 – Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Body
1.6 W/kg (mW/g)
Averaged over 1 gram

NOTES:

- 1 The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- 2 All modes of operation were investigated and the worst-case are reported.
- 3 Measured Depth of Simulating Tissue is 15.0 ± 0.2 cm.
- 4 Tissue parameters and temperatures are listed on the SAR plot.
- 5 Battery Type Standard Extended Slim
Batteries are fully charged for all readings.
- 6 Test Signal Call Mode Manual Test cord Base Station Simulator
- 7 Both side of the phone were tested and the worst-case side is reported.
- 8 HEADSET was connected.
- 9 Test Configuration With Holster Without Holster
- 10 Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).
- 11 Highest SAR value measurement in this band repeated with *Bluetooth/ **GPRS/**Front.

10.7 Measurement Results (802.11b Module Body SAR)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Ant. Position	SAR(mW/g)
MHz	Channel.		Begin	End				
2412	1(Low)	DSSS	15.32	15.21	Standard	1.5 cm without Holster	Fixed	0.575
2437	6(Middle)	DSSS	15.17	15.12	Standard	1.5 cm without Holster	Fixed	0.595
2462	11(High)	DSSS	14.84	14.82	Standard	1.5 cm without Holster	Fixed	0.393

ANSI/ IEEE C95.1 2005 – Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Body
1.6 W/kg (mW/g)
Averaged over 1 gram

NOTES:

- 1 The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- 2 All modes of operation were investigated and the worst-case are reported.
- 3 Measured Depth of Simulating Tissue is 15.0 ± 0.2 cm.
- 4 Tissue parameters and temperatures are listed on the SAR plot.
- 5 Battery Type Standard Extended Slim
Batteries are fully charged for all readings.
- 6 Test Signal Call Mode Manual Test cord Base Station Simulator
- 7 Both side of the phone were tested and the worst-case side is reported.
- 8 Test Configuration With Holster Without Holster
- 9 Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

10.8 Measurement Results (802.11g Module Body SAR)

Frequency		Modulation	Conducted Power (dBm)		Battery	Phantom Position	Ant. Position	SAR(mW/g)
MHz	Channel.		Begin	End				
2412	1(Low)	OFDM	11.08	10.09	Standard	1.5 cm without Holster	Fixed	0.309
2437	6(Middle)	OFDM	11.24	11.06	Standard	1.5 cm without Holster	Fixed	0.227
2462	11(High)	OFDM	10.96	10.85	Standard	1.5 cm without Holster	Fixed	0.294

ANSI/ IEEE C95.1 2005 – Safety Limit
Spatial Peak
Uncontrolled Exposure/ General Population

Body
1.6 W/kg (mW/g)
Averaged over 1 gram

NOTES:

- 1 The test data reported are the worst-case SAR value with the antenna-head position set in a typical configuration. Test procedures used are according to FCC/OET Bulletin 65, Supplement C [July 2001].
- 2 All modes of operation were investigated and the worst-case are reported.
- 3 Measured Depth of Simulating Tissue is 15.0 ± 0.2 cm.
- 4 Tissue parameters and temperatures are listed on the SAR plot.
- 5 Battery Type Standard Extended Slim
Batteries are fully charged for all readings.
- 6 Test Signal Call Mode Manual Test cord Base Station Simulator
- 7 Both side of the phone were tested and the worst-case side is reported.
- 8 Test Configuration With Holster Without Holster
- 9 Justification for reduced test configurations: per FCC/OET Supplement C (July, 2001), if the SAR measured at the middle channel for each test configuration (Left, right, cheek/touch, tilt/ear, extended and retracted) is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s).

11. CONCLUSION

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the ANSI/IEEE C95.1 2005.

These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests.

12. REFERENCES

- [1] Federal Communications Commission, OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01), Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields, July 2001.
- [2] IEEE Standards Coordinating Committee 34 – IEEE Std. 1528-2003, IEE Recommended Practice or Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body from Wireless Communications Devices.
- [3] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio frequency Radiation, Aug. 1996.
- [4] ANSI/IEEE C95.1 - 1991, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300kHz to 100GHz, New York: IEEE, Aug. 1992
- [5] ANSI/IEEE C95.3 - 1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, 1992.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 120-124.
- [9] K. Pokovi^o, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Head Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectro magnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] Federal Communications Commission, OET Bulletin 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields. Supplement C, Dec. 1997.
- [18] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [19] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [20] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

Attachment 1. – SAR Test Plots

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.4 °C

Ambient Temperature: 22.6 °C

Test Date: June.22, 2007

DUT: MC-6500S; Type: BAR; Serial: #1**Program Name: MC-6500S**

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.865 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch128/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.169 mW/g


Left touch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.096 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.167 mW/g

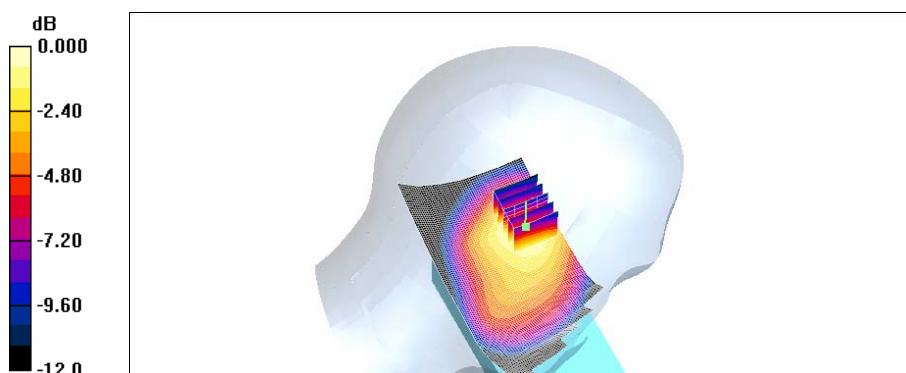

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.4 °C

Ambient Temperature: 22.6 °C

Test Date: June.22, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.878 \text{ mho/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 190/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.184 mW/g

Left touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.8 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.111 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.184 mW/g

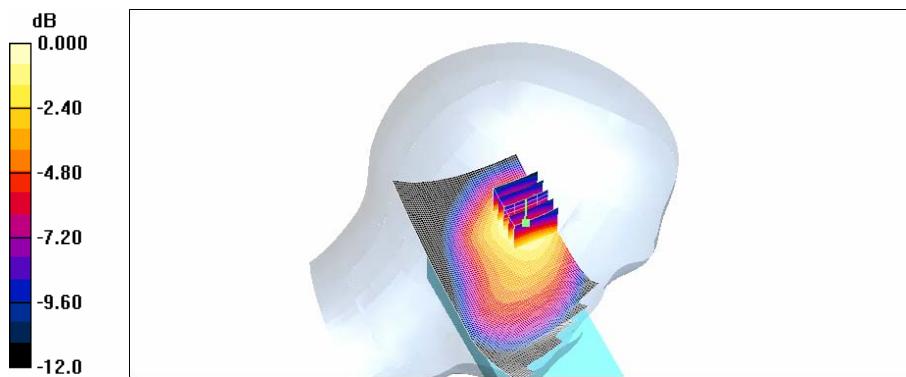

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.4 °C

Ambient Temperature: 22.6 °C

Test Date: June.22, 2007

DUT: MC-6500S; Type: BAR; Serial: #1**Program Name: MC-6500S**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850 \text{ MHz}$; $\sigma = 0.891 \text{ mho/m}$; $\epsilon_r = 41$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch251/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.217 mW/g


Left touch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = 0.071 dB

Peak SAR (extrapolated) = 0.295 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.131 mW/g

Maximum value of SAR (measured) = 0.215 mW/g

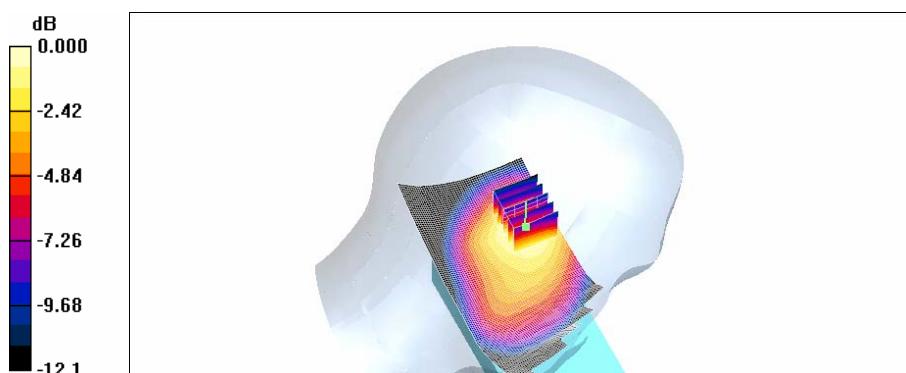

0 dB = 0.215mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.4 °C

Ambient Temperature: 22.6 °C

Test Date: June.22, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.865 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch128/Area Scan (61x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.126 mW/g


Right touch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.4 V/m; Power Drift = -0.139 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.126 mW/g

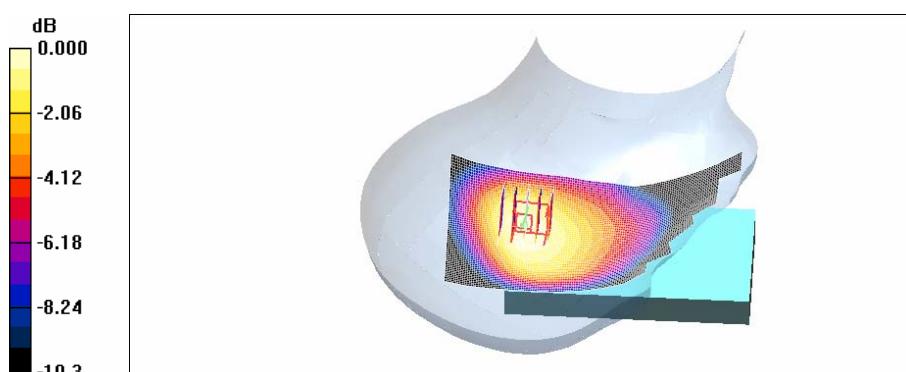

0 dB = 0.126mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.4 °C

Ambient Temperature: 22.6 °C

Test Date: June.22, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.878 \text{ mho/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 190/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.135 mW/g

Right touch 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.7 V/m; Power Drift = -0.134 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.128 mW/g; SAR(10 g) = 0.091 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.137 mW/g

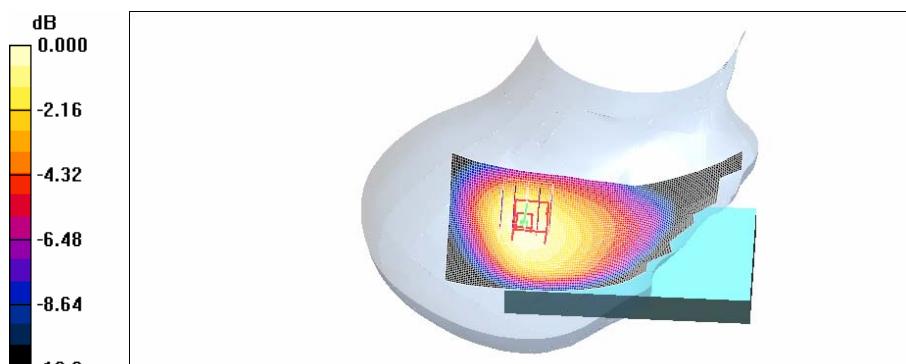

0 dB = 0.137mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.4 °C

Ambient Temperature: 22.6 °C

Test Date: June.22, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 850$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 251/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.162 mW/g


Right touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.153 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.162 mW/g

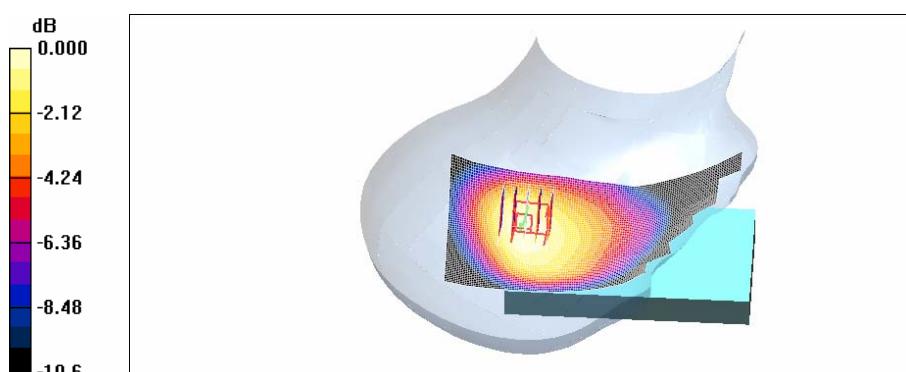

0 dB = 0.162mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD
EUT Type: Portable Data Collection Terminal
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 22.4 °C
Ambient Temperature: 22.6 °C
Test Date: June.22, 2007
Option: Bluetooth

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 850$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³
Phantom section: Left Section ;Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM


Left touch 251/Area Scan (71x141x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.211 mW/g

Left touch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.9 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.208 mW/g

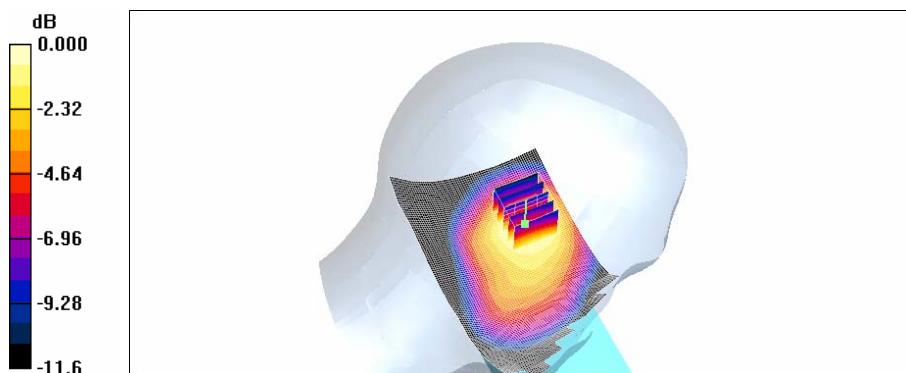

0 dB = 0.208mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.4 °C

Ambient Temperature: 22.6 °C

Test Date: June.22, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.878 \text{ mho/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt190/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.198 mW/g

Left tilt190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.3 V/m; Power Drift = -0.174 dB

Peak SAR (extrapolated) = 0.270 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.119 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.196 mW/g

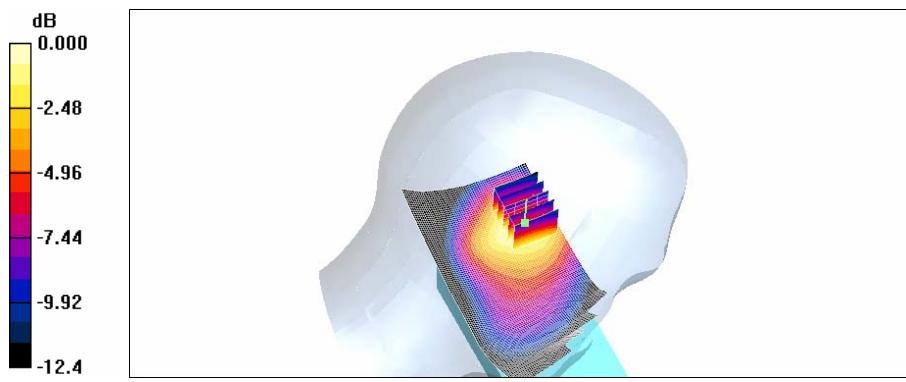

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.4 °C

Ambient Temperature: 22.6 °C

Test Date: June.22, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.878 \text{ mho/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 190/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.133 mW/g

Right tilt 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 12.0 V/m; Power Drift = -0.122 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.085 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.132 mW/g

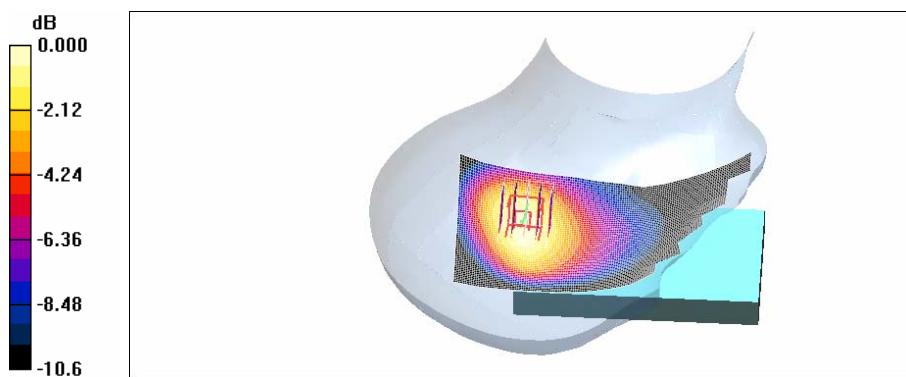

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.5 °C

Ambient Temperature: 22.7 °C

Test Date: June.23, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(5.6, 5.6, 5.6); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 512/Area Scan (71x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.151 mW/g

Left touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.91 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.233 W/kg

SAR(1 g) = 0.141 mW/g; SAR(10 g) = 0.080 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.156 mW/g

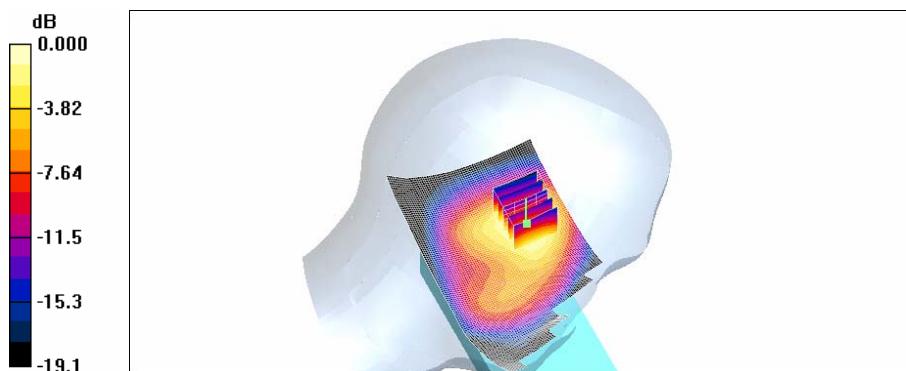

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.5 °C

Ambient Temperature: 22.7 °C

Test Date: June.23, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ;Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(5.6, 5.6, 5.6); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 661/Area Scan (61x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.103 mW/g


Left touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.73 V/m; Power Drift = 0.164 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.104 mW/g

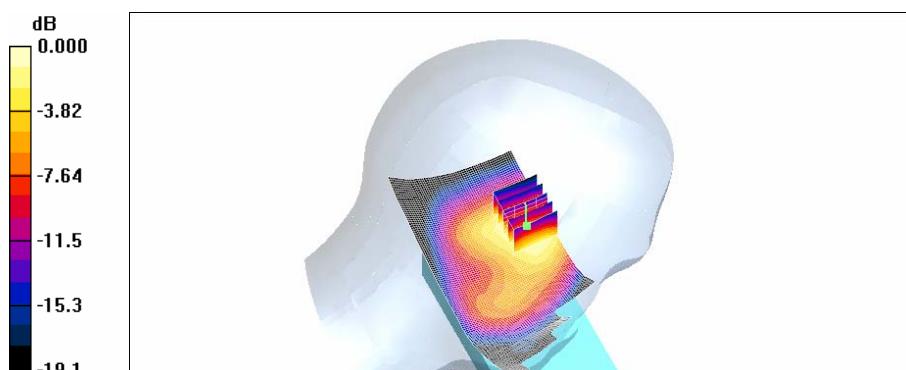

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.5 °C

Ambient Temperature: 22.7 °C

Test Date: June.23, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(5.6, 5.6, 5.6); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 810/Area Scan (71x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.080 mW/g


Left touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.23 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.085 mW/g

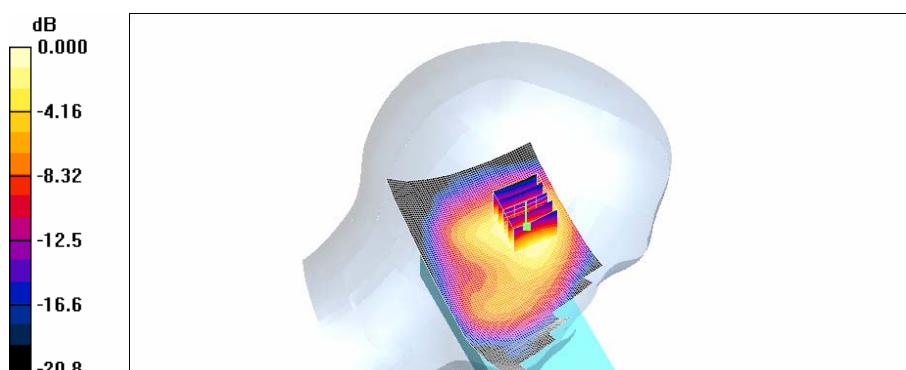

0 dB = 0.085mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.5 °C

Ambient Temperature: 22.7 °C

Test Date: June.23, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.39 \text{ mho/m}$; $\epsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(5.6, 5.6, 5.6); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 512/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.063 mW/g

Right touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.29 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 0.090 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.039 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.066 mW/g



Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.5 °C

Ambient Temperature: 22.7 °C

Test Date: June.23, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ;Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(5.6, 5.6, 5.6); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 661/Area Scan (71x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.046 mW/g


Right touch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.03 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 0.063 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.047 mW/g

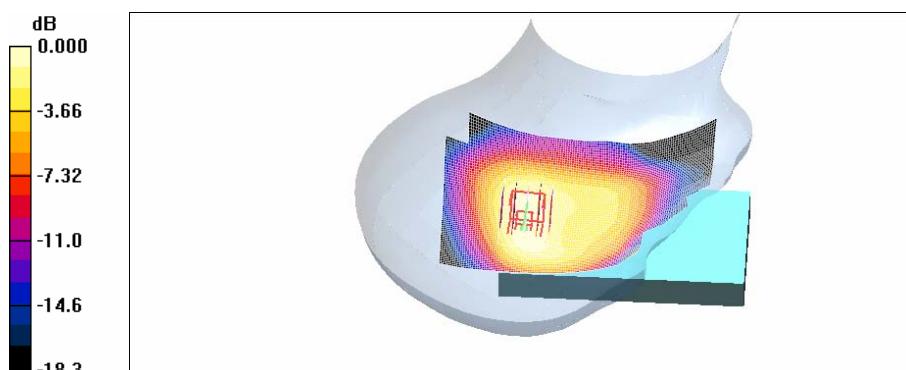

0 dB = 0.047mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.5 °C

Ambient Temperature: 22.7 °C

Test Date: June.23, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 38.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(5.6, 5.6, 5.6); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 810/Area Scan (61x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.039 mW/g


Right touch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.35 V/m; Power Drift = 0.090 dB

Peak SAR (extrapolated) = 0.055 W/kg

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.039 mW/g

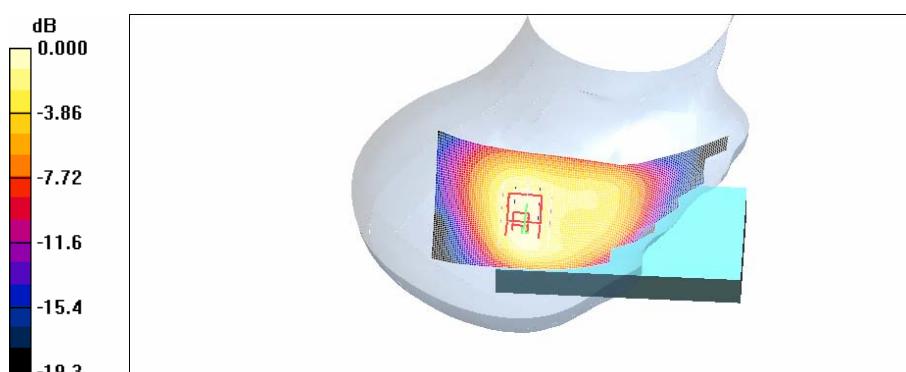

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD
EUT Type: Portable Data Collection Terminal
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 22.5 °C
Ambient Temperature: 22.7 °C
Test Date: June.23, 2007
Option: Bluetooth

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(5.6, 5.6, 5.6); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 512/Area Scan (71x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.144 mW/g


Left touch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.80 V/m; Power Drift = -0.184 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.078 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.154 mW/g

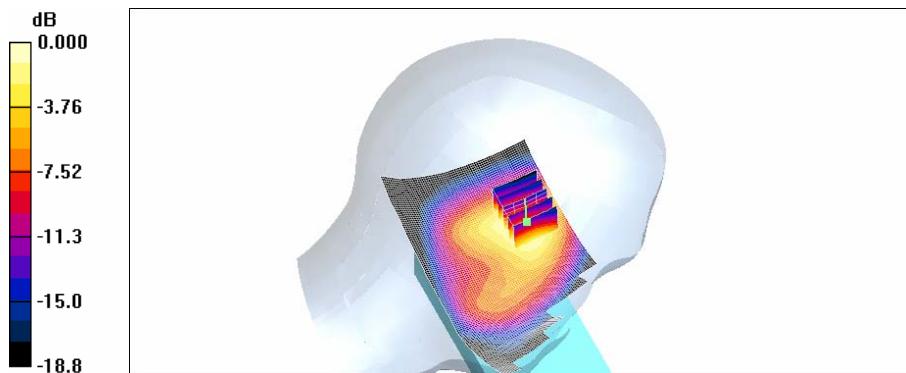

0 dB = 0.154mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.5 °C

Ambient Temperature: 22.7 °C

Test Date: June.23, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ;Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(5.6, 5.6, 5.6); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 661/Area Scan (71x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.083 mW/g


Left tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.86 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.080 mW/g

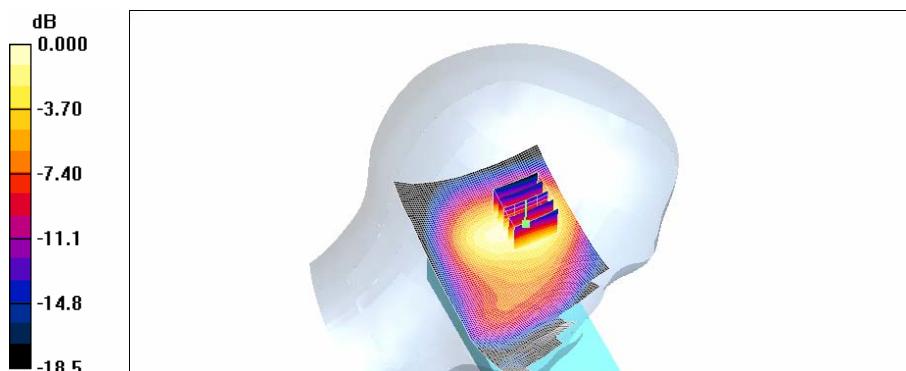

0 dB = 0.080mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.5 °C

Ambient Temperature: 22.7 °C

Test Date: June.23, 2007

DUT: MC-6500S; Type: BAR; Serial: #1**Program Name: MC-6500S**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 38.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ;Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(5.6, 5.6, 5.6); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 661/Area Scan (61x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.064 mW/g


Right tilt 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.24 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.089 W/kg

SAR(1 g) = 0.060 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

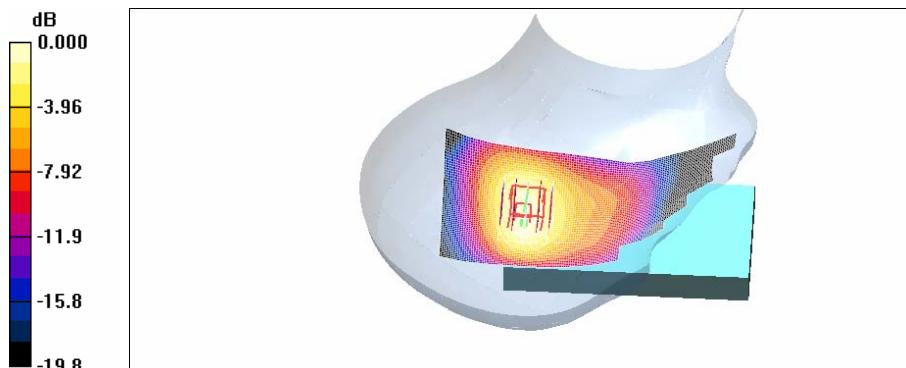

0 dB = 0.065mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.4 °C

Ambient Temperature: 22.6 °C

Test Date: June.22, 2007

DUT: MC-6500S; Type: BAR (BODY); Serial: #1**Program Name: MC-6500S**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.989 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.71, 6.71, 6.71); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

GSM850 body 190/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.031 mW/g

GSM850 body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.88 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.037 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.021 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.030 mW/g

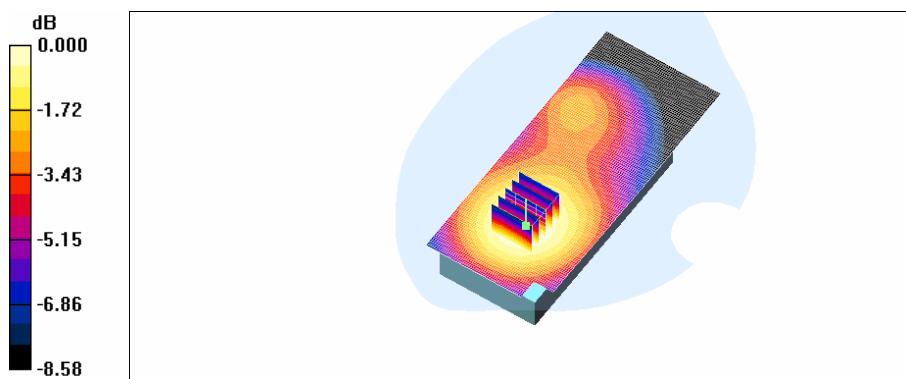

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD
EUT Type: Portable Data Collection Terminal
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 22.4 °C
Ambient Temperature: 22.6 °C
Test Date: June.22, 2007
Option: Bluetooth

DUT: MC-6500S; Type: BAR (BODY); Serial: #1

Program Name: MC-6500S

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.71, 6.71, 6.71); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

GSM850 body 190/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.030 mW/g

GSM850 body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.85 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 0.037 W/kg

SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.021 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.030 mW/g

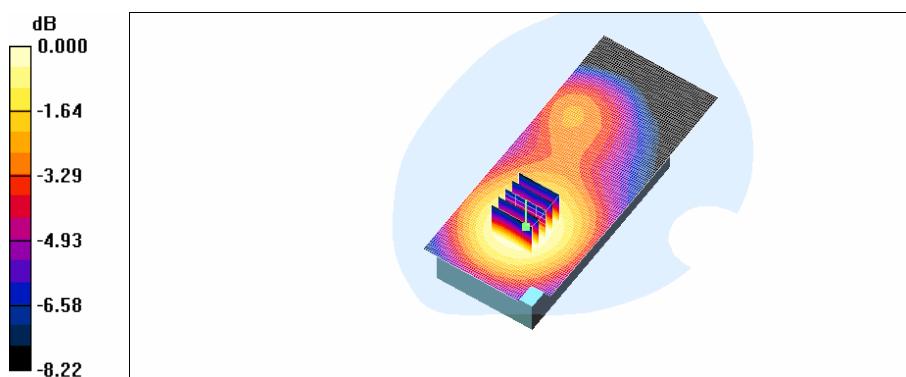

0 dB = 0.030mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD
EUT Type: Portable Data Collection Terminal
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 22.4 °C
Ambient Temperature: 22.6 °C
Test Date: June.22, 2007
Option GPRS

DUT: MC-6500S; Type: BAR (BODY); Serial: #1

Program Name: MC-6500S

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ;Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.71, 6.71, 6.71); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

GSM850 body 190/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.024 mW/g

GSM850 body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.14 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.030 W/kg

SAR(1 g) = 0.023 mW/g; SAR(10 g) = 0.017 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.024 mW/g

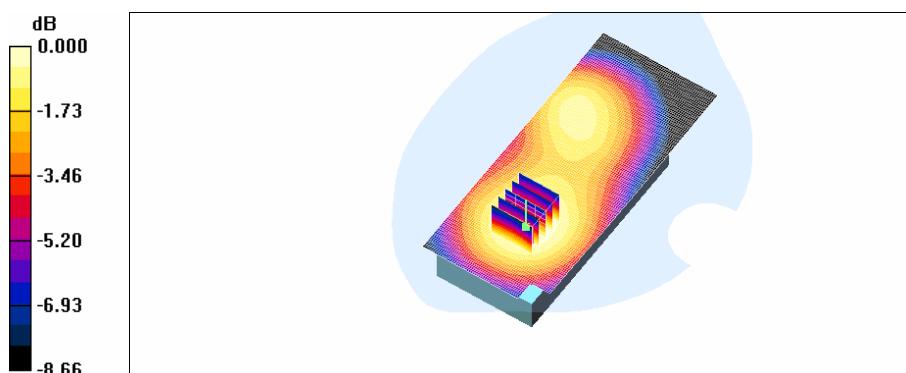

0 dB = 0.024mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD
EUT Type: Portable Data Collection Terminal
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 22.4 °C
Ambient Temperature: 22.6 °C
Test Date: June.22, 2007
Option: Front

DUT: MC-6500S; Type: BAR (BODY); Serial: #1

Program Name: MC-6500S

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.71, 6.71, 6.71); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 835/900 MHz; Type: SAM

GSM850 body 190/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.048 mW/g

GSM850 body 190/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.79 V/m; Power Drift = -0.118 dB

Peak SAR (extrapolated) = 0.058 W/kg

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.035 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.048 mW/g

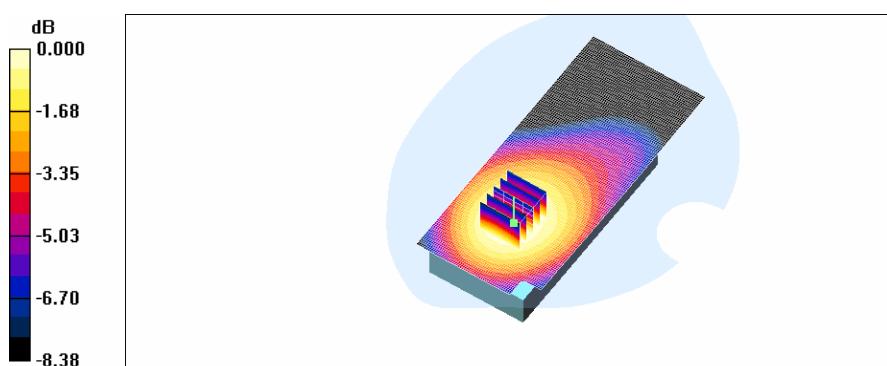

0 dB = 0.048mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD

EUT Type: Portable Data Collection Terminal

GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)

Liquid Temperature: 22.5 °C

Ambient Temperature: 22.7 °C

Test Date: June.23, 2007

DUT: MC-6500S; Type: BAR (BODY); Serial: #1**Program Name: MC-6500S**

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ;Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(4.8, 4.8, 4.8); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

GSM1900 body 661/Area Scan (61x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.024 mW/g


GSM1900 body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.46 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.033 W/kg

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.024 mW/g

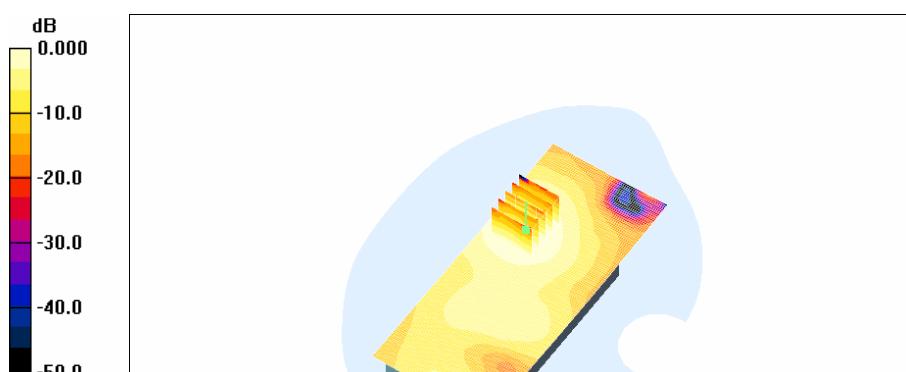

0 dB = 0.024mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD
EUT Type: Portable Data Collection Terminal
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 22.5 °C
Ambient Temperature: 22.7 °C
Test Date: June.23, 2007
Option: Bluetooth

DUT: MC-6500S; Type: BAR (BODY); Serial: #1

Program Name: MC-6500S

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ;Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(4.8, 4.8, 4.8); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM


GSM1900 body 661/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.023 mW/g

GSM1900 body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.53 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.032 W/kg

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

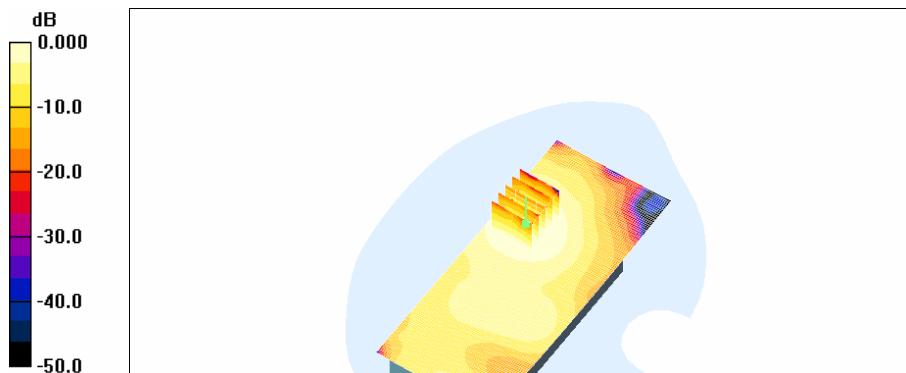

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD
EUT Type: Portable Data Collection Terminal
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 22.5 °C
Ambient Temperature: 22.7 °C
Test Date: June.23, 2007
Option GPRS

DUT: MC-6500S; Type: BAR (BODY); Serial: #1

Program Name: MC-6500S

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ;Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(4.8, 4.8, 4.8); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM


GSM1900 body 661/Area Scan (61x141x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.023 mW/g

GSM1900 body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.44 V/m; Power Drift = 0.131 dB

Peak SAR (extrapolated) = 0.031 W/kg

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.023 mW/g

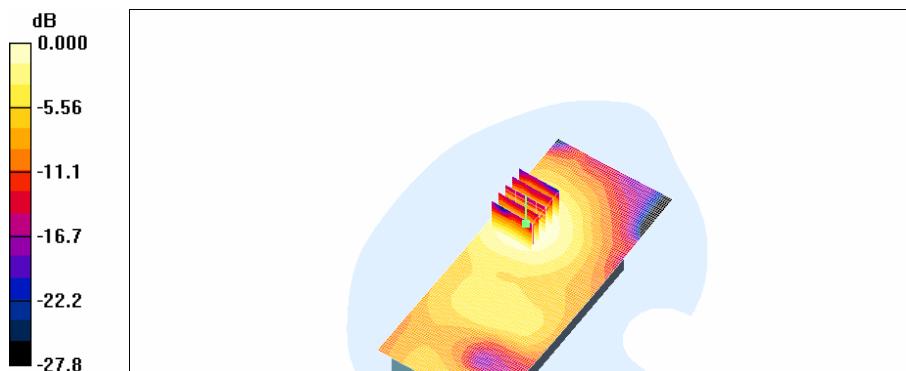

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD
EUT Type: Portable Data Collection Terminal
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 22.5 °C
Ambient Temperature: 22.7 °C
Test Date: June.23, 2007
Option: Front

DUT: MC-6500S; Type: BAR (BODY); Serial: #1

Program Name: MC-6500S


Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 52.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ;Measurement SW: DASY4, V4.7 Build 53

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(4.8, 4.8, 4.8); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

GSM1900 body 661/Area Scan (61x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.020 mW/g

GSM1900 body 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.87 V/m; Power Drift = -0.026 dB
Peak SAR (extrapolated) = 0.029 W/kg
SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.011 mW/g
Maximum value of SAR (measured) = 0.020 mW/g

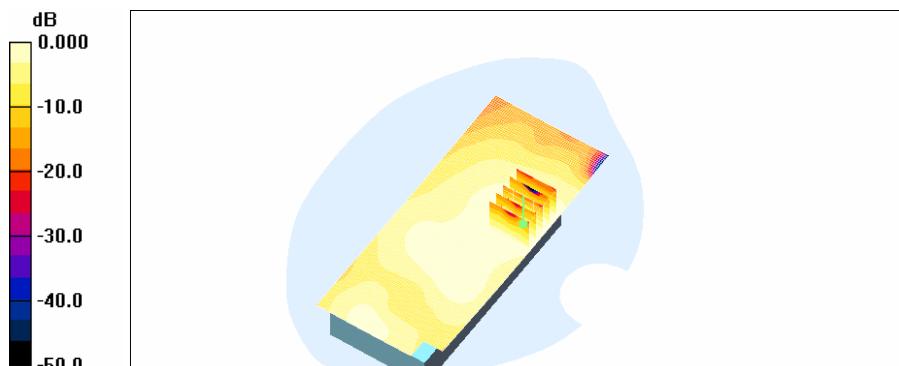

0 dB = 0.020mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD
EUT Type: Portable Data Collection Terminal
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 22.6 °C
Ambient Temperature: 22.8 °C
Test Date: June 25, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: 2450MHz FCC; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412 \text{ MHz}$; $\sigma = 1.92 \text{ mho/m}$; $\epsilon_r = 53.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 159

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.13, 4.13, 4.13); Calibrated: 2007-02-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

802.11b WiFi Body 1ch/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.740 mW/g


802.11b WiFi Body 1ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.92 V/m; Power Drift = -0.166 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.575 mW/g; SAR(10 g) = 0.241 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.624 mW/g

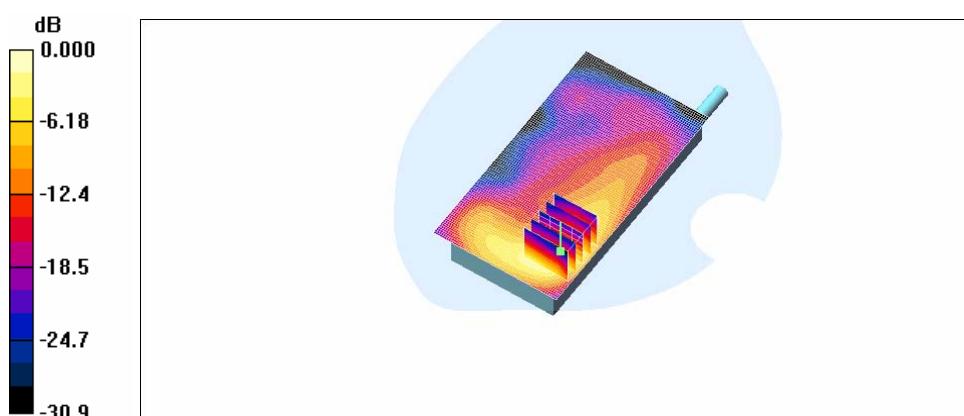

0 dB = 0.624mW/g

Test Laboratory: HYUNDAI CALIBRATION & CERTIFICATION TECHNOLOGIES CO., LTD
EUT Type: Portable Data Collection Terminal
GPRS Class 12 and GPRS mode class B(GPRS and GSM, but not simultaneously)
Liquid Temperature: 22.6 °C
Ambient Temperature: 22.8 °C
Test Date: June 25, 2007

DUT: MC-6500S; Type: BAR; Serial: #1

Program Name: MC-6500S

Communication System: 2450MHz FCC; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.96$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 159

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.13, 4.13, 4.13); Calibrated: 2007-02-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2007-03-06
- Phantom: SAM 1800/1900 MHz; Type: SAM

802.11b WiFi Body 6ch/Area Scan (61x111x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.747 mW/g

802.11b WiFi Body 6ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.64 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.595 mW/g; SAR(10 g) = 0.250 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.602 mW/g

