



TEST REPORT

Part 15 Subpart C 15.247

Equipment under test Bluetooth Embedded Module
Model name FB300BC-01
FB300BC-02, FB300BC-03, FB300BC-11,
FB300BC-12, FB300BC-13, FB300BC-21,
Derivative name FB300BC-22, FB300BC-23, FB301BC-01,
FB301BC-02, FB301BC-03, FB301BC-11,
FB301BC-12, FB301BC-13, FB301BC-21,
FB301BC-22, FB301BC-23
FCC ID U8D-FB300BC-01
Applicant Firmtech co.,Ltd
Manufacturer Firmtech co.,Ltd
Date of test(s) 2018.10.25 ~ 2018.10.30
Date of issue 2018.11.13

Issued to
Firmtech co.,Ltd

807, 555, Dunchon-daero, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea
Tel: +82-31-719-4812 / Fax: +82-31-719-4834

Issued by
KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

| Test and report completed by : | Report approval by : |
|--------------------------------|-------------------------------------|
| | |
| Young-Jin Lee Test engineer | Hyeon-Su, Jang Technical manager |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Revision history

| Revision | Date of issue | Test report No. | Description |
|----------|---------------|-------------------|--|
| - | 2018.11.06 | KES-RF-18T0105 | Initial |
| Rev1 | 2018.11.13 | KES-RF-18T0105-R1 | Remove EUT Pictures and Added Radiated emissions (Below 1 000 MHz) data |

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

| | | |
|------|---|----|
| 1. | General information | 4 |
| 1.1. | EUT description..... | 4 |
| 1.2. | Test configuration | 6 |
| 1.3. | Device modifications | 6 |
| 1.4. | Frequency/channel operations | 6 |
| 1.5. | Accessory information..... | 6 |
| 1.6. | Software and Firmware description..... | 7 |
| 1.7. | Measurement results explanation example | 7 |
| 1.8. | Measurement Uncertainty..... | 7 |
| 2. | Summary of tests | 8 |
| 3. | Test results | 9 |
| 3.1. | 20 dB bandwidth | 9 |
| 3.2. | Output power | 11 |
| 3.3. | Carrier frequency separation..... | 13 |
| 3.4. | Number of hopping frequency | 15 |
| 3.5. | Time of occupancy..... | 16 |
| 3.6. | Radiated restricted band and emissions | 19 |
| 3.7. | Conducted band edge and out of band emissions | 32 |
| 3.8. | AC conducted emissions..... | 35 |
| | Appendix A. Measurement equipment..... | 37 |



1. General information

Applicant: Firmtech co.,Ltd
Applicant address: 807, 555, Dunchon-daero, Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea
Test site: KES Co., Ltd.
Test site address: 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Test Facility FCC Accreditation Designation No.: KR0100, Registration No.: 444148
FCC rule part(s): 15.247
FCC ID: U8D-FB300BC-01
Test device serial No.: Production Pre-production Engineering

1.1. EUT description

Equipment under test Bluetooth Embedded Module
Frequency range 2 402 MHz ~ 2 480 MHz (BDR)
2 402 MHz ~ 2 480 MHz (LE)
Model: FB300BC-01
Modulation technique BT : GFSK
Number of channels 2 402 MHz ~ 2 480 MHz (BDR) : 79 ch
2 402 MHz ~ 2 480 MHz (LE) : 40 ch
Antenna specification 2.4 GHz Antenna type : Chip antenna, Peak gain : 2.01 dBi
Power source DC 3.3 V



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-18T0105-R1
Page (5) of (37)

15.247(a)(1) that the rx input bandwidths shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

Equal hopping frequency use

The channels of this system will be used equally over the long-term distribution of the hopsets.

Example of a 79 hopping sequence in data mode:

02, 05, 31, 24, 20, 10, 43, 36, 30, 23, 40, 06, 21, 50, 44, 09, 71, 78, 01, 13, 73, 07, 70, 72, 35, 62, 42, 11, 41, 08, 16, 29, 60, 15, 34, 61, 58, 04, 67, 12, 22, 53, 57, 18, 27, 76, 39, 32, 17, 77, 52, 33, 56, 46, 37, 47, 64, 49, 45, 38, 69, 14, 51, 26, 79, 19, 28, 65, 75, 54, 48, 03, 25, 66, 05, 16, 68, 74, 59, 63, 55

System receiver input bandwidth

Each channel bandwidth is 1 MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



1.2. Test configuration

The **Firmtech co.,Ltd FB300BC-01 FCC ID: U8D-FB300BC-01** was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.247
KDB 558074 D01 v05
ANSI C63.10-2013

1.3. Device modifications

The difference between basic and derivative model is External Type, software are fundamentally the same. So it is no affect that Bluetooth functionality.

Header Type : FB300BC-01, FB300BC-02, FB300BC-03, FB300BC-11, FB300BC-12, FB300BC-13, FB300BC-21, FB300BC-22, FB300BC-23

SMD Type : FB301BC-01, FB301BC-02, FB301BC-03, FB301BC-11, FB301BC-12, FB301BC-13, FB301BC-21, FB301BC-22, FB301BC-23

1.4. Frequency/channel operations

| Ch. | Frequency (MHz) | Rate(Mbps) |
|-----|-----------------|------------|
| 00 | 2402 | 1 |
| : | : | : |
| 40 | 2442 | 1 |
| : | : | : |
| 78 | 2480 | 1 |

1.5. Accessory information

| Equipment | Manufacturer | Model | Serial No. | Power source |
|-----------|--------------|-------|------------|--------------|
| - | - | - | - | - |



1.6. Software and Firmware description

The software and firmware installed in the EUT is version 1.0.

1.7. Measurement results explanation example

For all conducted test items

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 0.90 + 10 = 10.90 \text{ (dB)}\end{aligned}$$

1.8. Measurement Uncertainty

| Test Item | Uncertainty | |
|---|--------------|---------|
| Uncertainty for Conduction emission test | 2.62 dB | |
| Uncertainty for Radiation emission test (include Fundamental emission) | 9kHz - 30MHz | 4.54 dB |
| | 30MHz - 1GHz | 4.36 dB |
| | Above 1GHz | 5.00 dB |
| Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. | | |



2. Summary of tests

| Reference | Test description | Test results |
|-------------------|---|--------------|
| 15.247(a)(1)(iii) | 20 dB bandwidth | Pass |
| 15.247(b)(1) | Output power | Pass |
| 15.247(a)(1) | Channel separation | Pass |
| 15.247(a)(1)(iii) | Number of channels | Pass |
| 15.247(a)(1)(iii) | Time of occupancy | Pass |
| 15.205, 15.209 | Radiated restricted band and emission | Pass |
| 15.207(d) | Conducted band edge and out of band emissions | Pass |
| 15.207(a) | AC conducted emissions | Pass |


3. Test results

3.1. 20 dB bandwidth

Test procedure

ANSI C63.10-2013 clause 6.9.2 and 6.9.3

Test setup




Test setting

1. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
2. RBW \geq 1% of the 20 dB bandwidth
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace mode = max hold

Limit

Not applicable

| Frequency(MHz) | Channel no. | Data rate(Mbps) | Measured bandwidth(MHz) |
|----------------|-------------|-----------------|-------------------------|
| 2 402 | 00 | 1 | 0.755 |
| 2 442 | 40 | | 0.821 |
| 2 480 | 78 | | 0.829 |

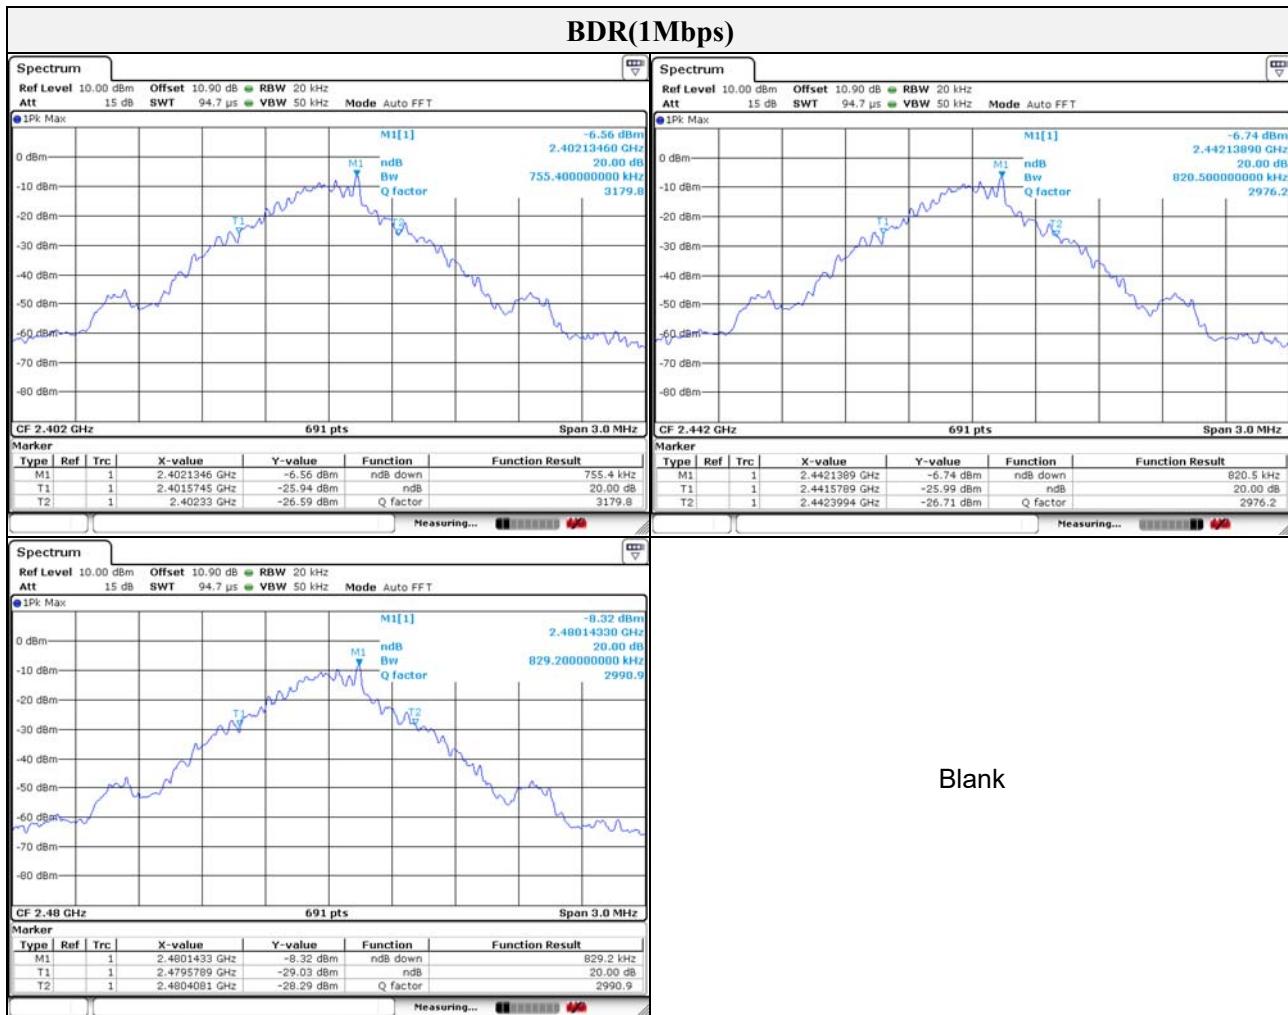


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

3.2. Output power

Test procedure

ANSI C63.10-2013 - Section 7.8.5

Test setup

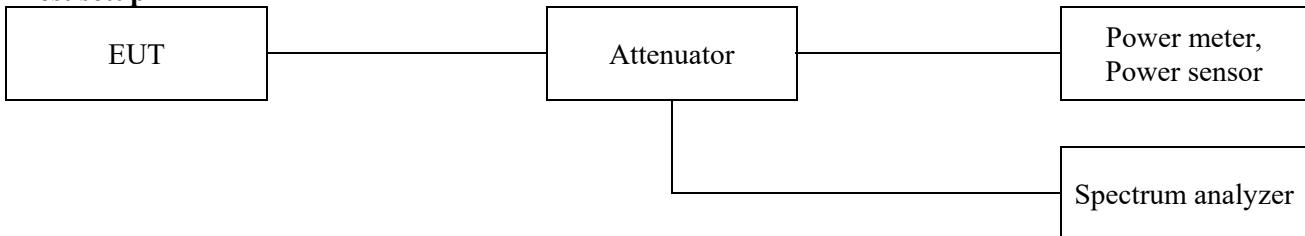

Test setting

1. Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
2. RBW > the 20 dB bandwidth of the emission being measured
3. VBW \geq RBW
4. Sweep = Auto
5. Detector function = Peak
6. Trace = Max hold

Limit


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(1), For frequency hopping systems operating in the 2 400 ~ 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 ~ 5 805 MHz band: 1 Watt.

| Frequency(MHz) | Channel no. | Data rate(Mbps) | Peak Power (dBm) | Average Power (dBm) ^{Note1} | Power Limit (dBm) |
|----------------|-------------|-----------------|------------------|--------------------------------------|-------------------|
| 2 402 | 00 | 1 | -3.86 | -4.21 | 20.97 |
| 2 442 | 40 | | -4.06 | -4.45 | 20.97 |
| 2 480 | 78 | | -5.54 | -5.89 | 20.97 |

Note.

1. The average power was tested using an average power meter.

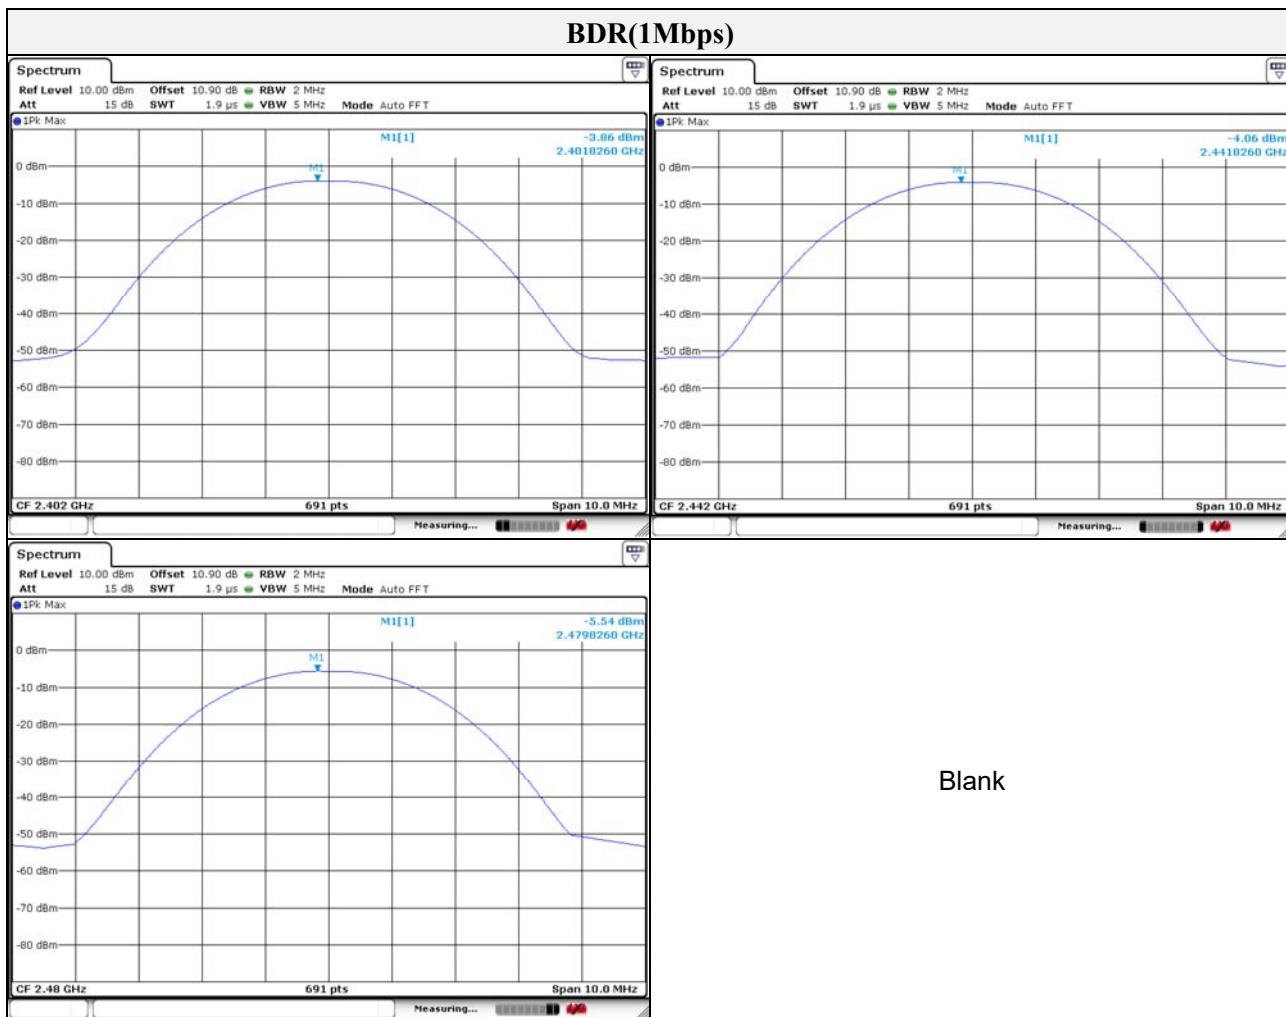


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

3.3. Carrier frequency separation

Test procedure

ANSI C63.10-2013 - Section 7.8.2

Test setup



Test Setting

1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Span = wide enough to capture the peaks of two adjacent channels
3. Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
4. Video (or Average) Bandwidth (VBW) \geq RBW
5. Sweep = auto
6. Detector function = peak
7. Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.


Limit

According to 15.247(a)(1), frequency hopping system operating in 2 400 ~ 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

| Frequency(MHz) | Channel no. | Data rate(Mbps) | Channel Separation (MHz) |
|----------------|-------------|-----------------|--------------------------|
| 2 442 | 40 | 1 | 0.999 |

Note:

Measurement is made with EUT operating in hopping mode between 79 channels providing a worse case scenario as compared to AFH mode hopping between 20 channels.

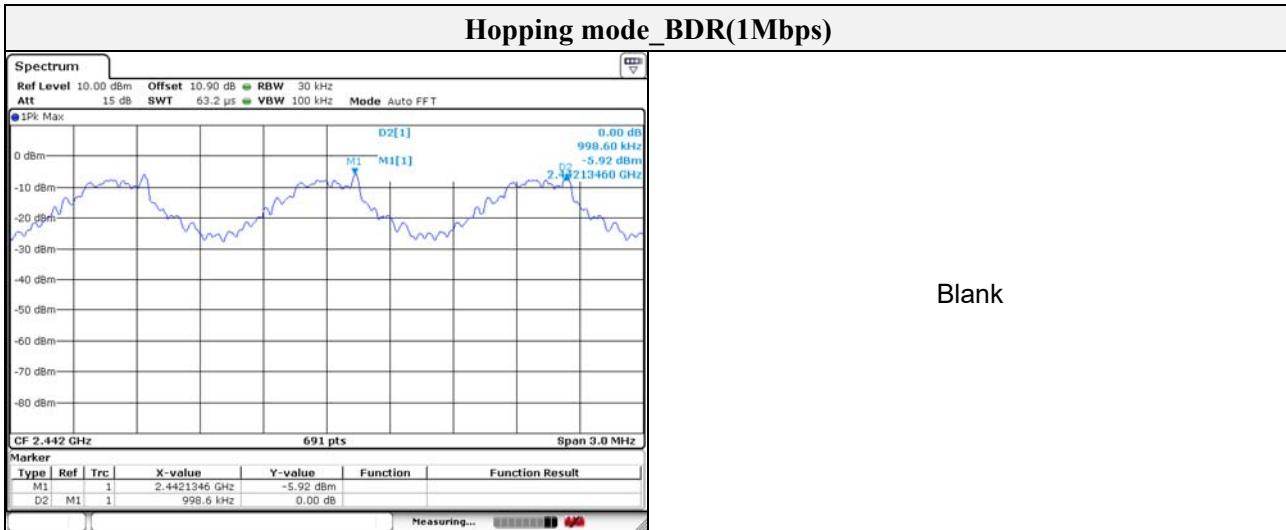


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

3.4. Number of hopping frequency

Test procedure

ANSI C63.10-2013 - Section 7.8.3

Test setup



Test setting


1. The EUT must have its hopping function enabled.
2. Frequency range: 2 400 MHz ~ 2 441.5 MHz, 2 441.5 MHz ~ 2 483.5 MHz
3. Span = the frequency band of operation
4. RBW = 300 kHz (\geq 1% of the span)
5. VBW = 1 MHz (\geq RBW)
6. Sweep = auto
7. Detector function = peak
8. Trace = max hold

All the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz bands shall use at least 15 hopping frequencies.

Note: In case of AFH mode, minimum number of hopping channels is 20.

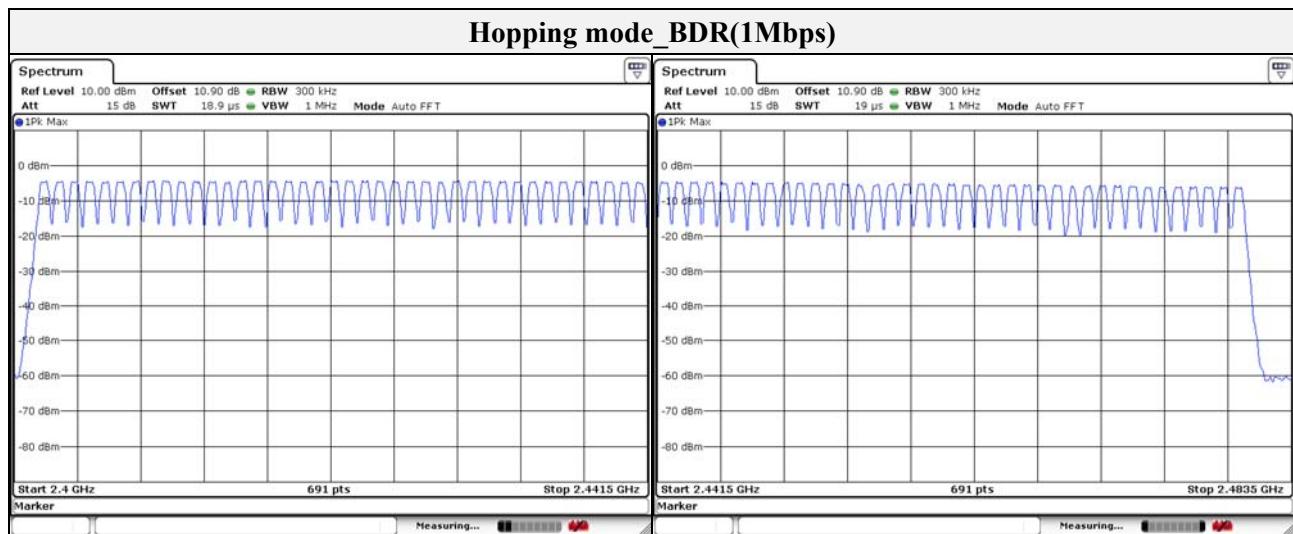


3.5. Time of occupancy

Test procedure

ANSI C63.10-2013 - Section 7.8.4

Test setup



Test setting

1. The EUT must have its hopping function enabled.
2. Span = zero span, centered on a hopping channel
4. RBW = 1 MHz
5. VBW = 1 MHz (\geq RBW)
6. Sweep = as necessary to capture the entire dwell time per hopping channel
7. Detector function = peak
8. Trace = max hold

Limit

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time = $0.4(s) \times 79 = 31.6(s)$

Time of occupancy on the TX channel in 31.6 sec

= time domain slot length \times (hop rate \div number of hop per channel) \times 31.6

• Adaptive Frequency Hopping

A period time = $0.4(s) \times 20 = 8.0(s)$

Time of occupancy on the TX channel in 8.0 sec

= time domain slot length \times (hop rate \div number of hop per channel) \times 8.0



Operation mode: GFSK

| Packet type | Frequency (MHz) | Dwell time (ms) | Time of occupancy on the Tx channel in 31.6 sec (ms) | Limit for time of occupancy on the Tx channel in 31.6 sec (ms) |
|-------------|-----------------|-----------------|--|--|
| DH1 | 2 442 | 0.403 | 128.96 | 400 |
| DH3 | 2 442 | 1.657 | 265.12 | 400 |
| DH5 | 2 442 | 2.920 | 311.47 | 400 |


Note:

Normal Mode

DH1: Dwell time (ms) \times [(1 600 \div 2) \div 79] \times 31.6(s) = 128.96 (ms)

DH3: Dwell time (ms) \times [(1 600 \div 4) \div 79] \times 31.6(s) = 265.12 (ms)

DH5: Dwell time (ms) \times [(1 600 \div 6) \div 79] \times 31.6(s) = 311.47 (ms)

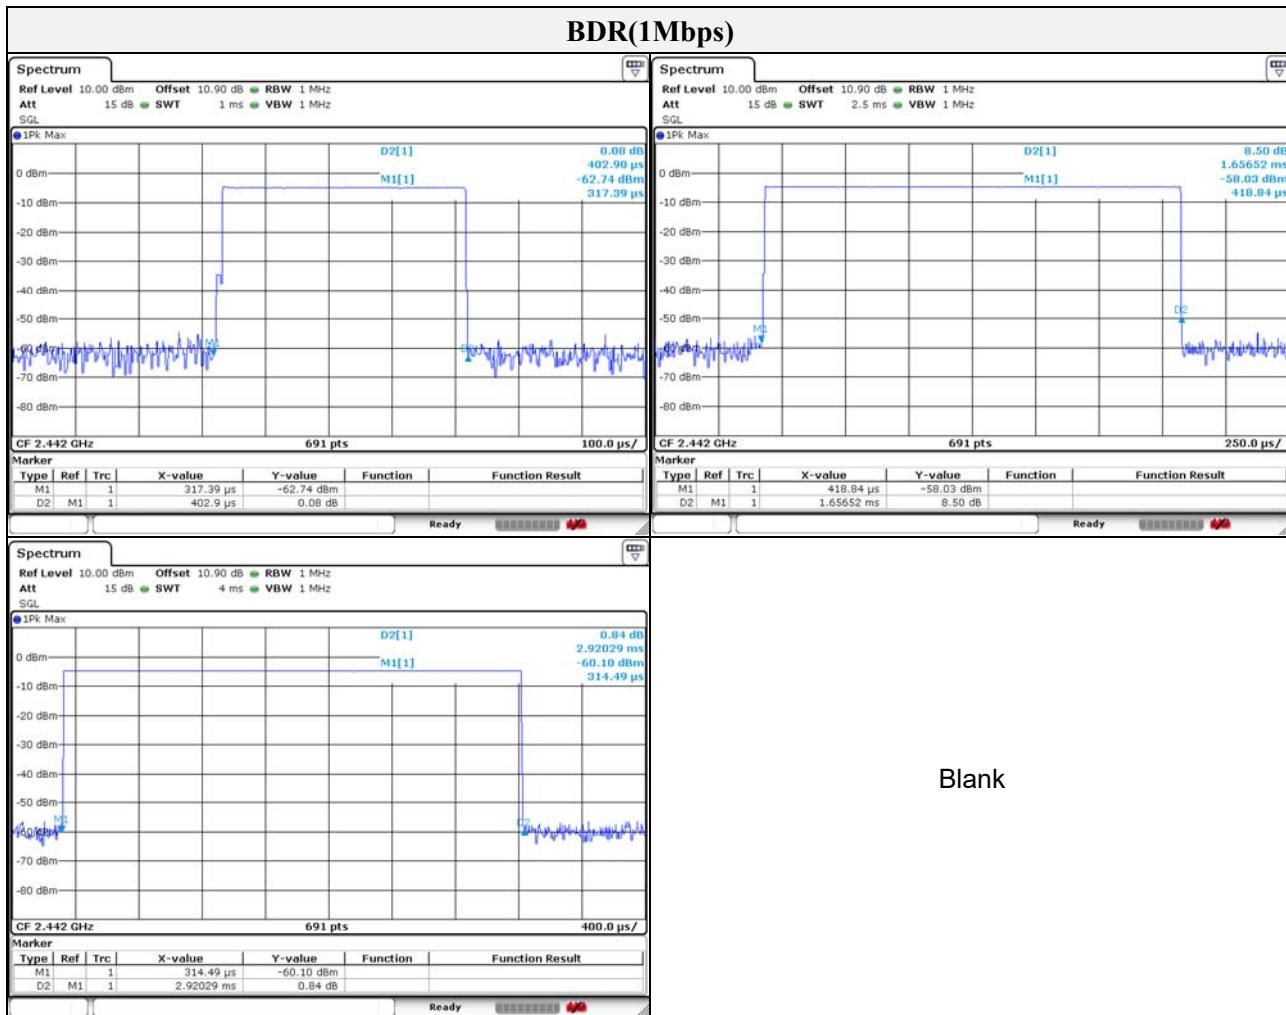


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr


3.6. Radiated restricted band and emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

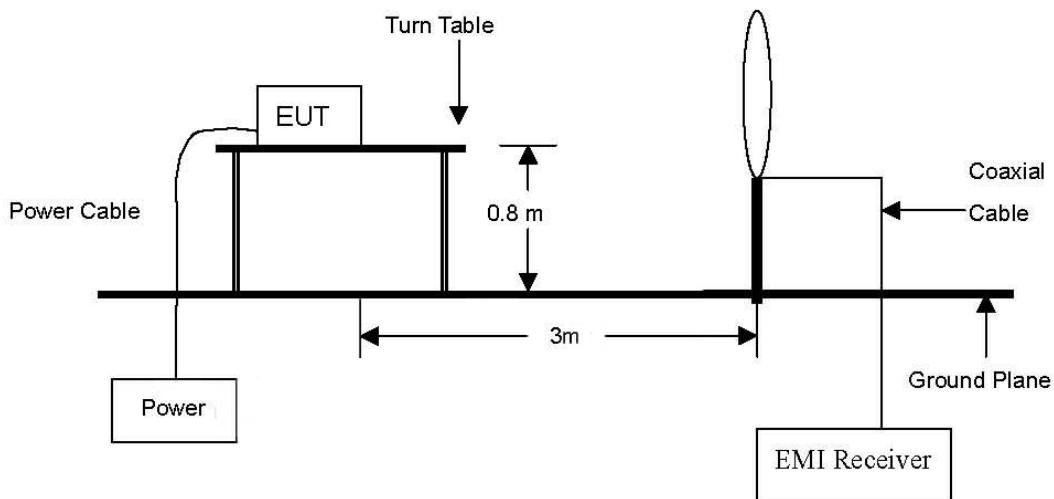

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

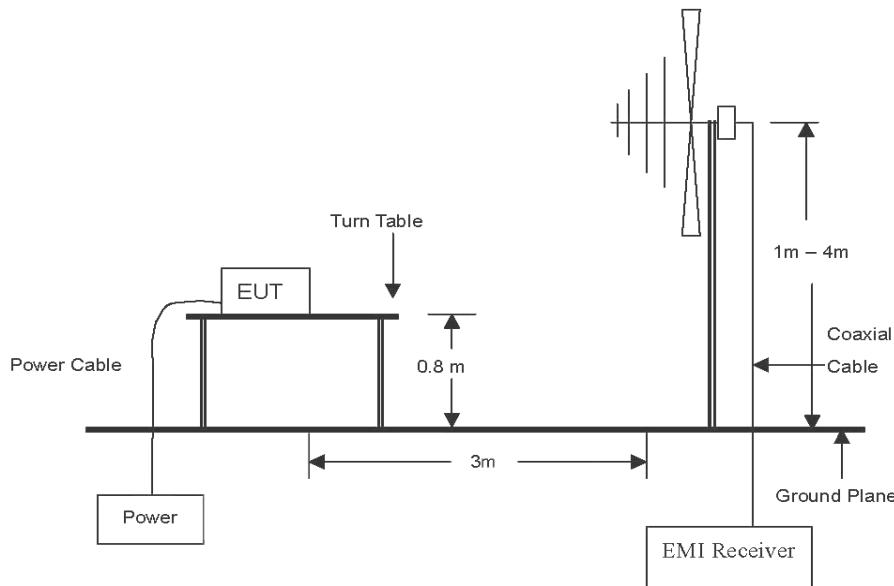

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

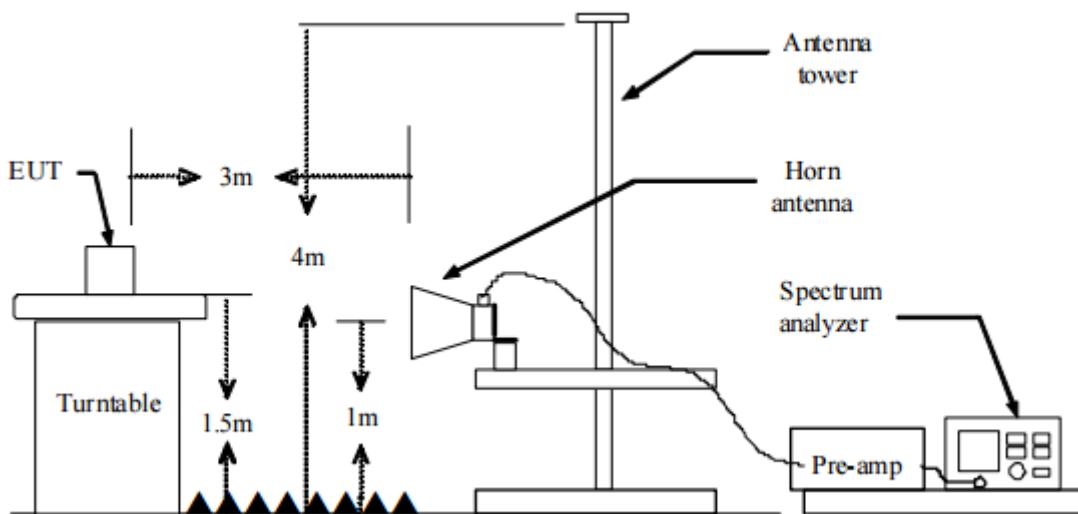



Test procedure

1. The EUT is placed on a turntable, which is 0.8 m (below 1 GHz) and 1.5 m (above 1 GHz) ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum analyzer settings for $f < 1 \text{ GHz}$:
Span = wide enough to fully capture the emission being measured
RBW = 100 kHz
VBW \geq RBW
Sweep = auto
Detector function = quasi peak
Trace = max hold
8. Spectrum analyzer settings for $f \geq 1 \text{ GHz}$: Peak
Span = wide enough to fully capture the emission being measured
RBW = 1 MHz
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold
9. Spectrum analyzer settings for $f \geq 1 \text{ GHz}$: Average
Span = wide enough to fully capture the emission being measured
RBW = 1 MHz
VBW $\geq 1/T \text{ Hz}$, where T= pulse width in seconds
Sweep = auto
Detector function = average
Trace = max hold
10. Duty Cycle Correction Factor (79 channel hopping)
 - a. Time to cycle through all channels = $\Delta t = \tau[\text{ms}] \times 79 \text{ channels} = 229.653 \text{ ms}$, where τ = pulse width
 - b. $100 \text{ ms} / \Delta t[\text{ms}] = H \rightarrow \text{Round up to next highest integer, } H' = 1$
 - c. Worst Case Dwell Time = $\tau[\text{ms}] \times H' = 2.907 \text{ ms}$
 - d. Duty Cycle Correction = $20\log(\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -30.73 \text{ dB}$



Note:

1. The spectrum is measured from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20 dB of the respective limits were not reported.
2. When Average result is different from peak result over 20 dB (over-averaging), according to 15.35 (c), as a “duty cycle correction factor”, pulse averaging with $20 \log(\text{duty cycle})$ has to be used.
Duty cycle correction factor = $20\log(\text{dwell time}/100 \text{ ms})$
3. Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
4. Average test would be performed if the peak result were greater than the average limit.
5. Field strength(dB μ V/m) = Level(dB μ V) + Correction factors(dB/m) + Cable loss(dB) + or F_d(dB)
6. Correction factors(dB/m) = Antenna factor(dB/m) + Cable loss(dB) + or Amp. gain(dB)
7. Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
8. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.
9. All channels, modes (e.g. BDR, EDR), and modulations/data rates were investigated among DSS band.
Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
10. According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
11. $f < 30 \text{ MHz}$, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m / D_s)$
 $f \geq 30 \text{ MHz}$, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m / D_s)$

Where:

- F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Test report No.:
KES-RF-18T0105-R1
Page (23) of (37)

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated (μ V/m) |
|-----------------|-------------------|-----------------------|
| 0.009 ~ 0.490 | 300 | 2 400 / F(kHz) |
| 0.490 ~ 1.705 | 30 | 24 000 / F(kHz) |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 3 | 100** |
| 88 ~ 216 | 3 | 150** |
| 216 ~ 960 | 3 | 200** |
| Above 960 | 3 | 500 |


**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test results (Below 30 MHz)

Mode: BDR
Transfer rate: 1 Mbps
Distance of measurement: 3 meter
Channel: 00(Worst case)

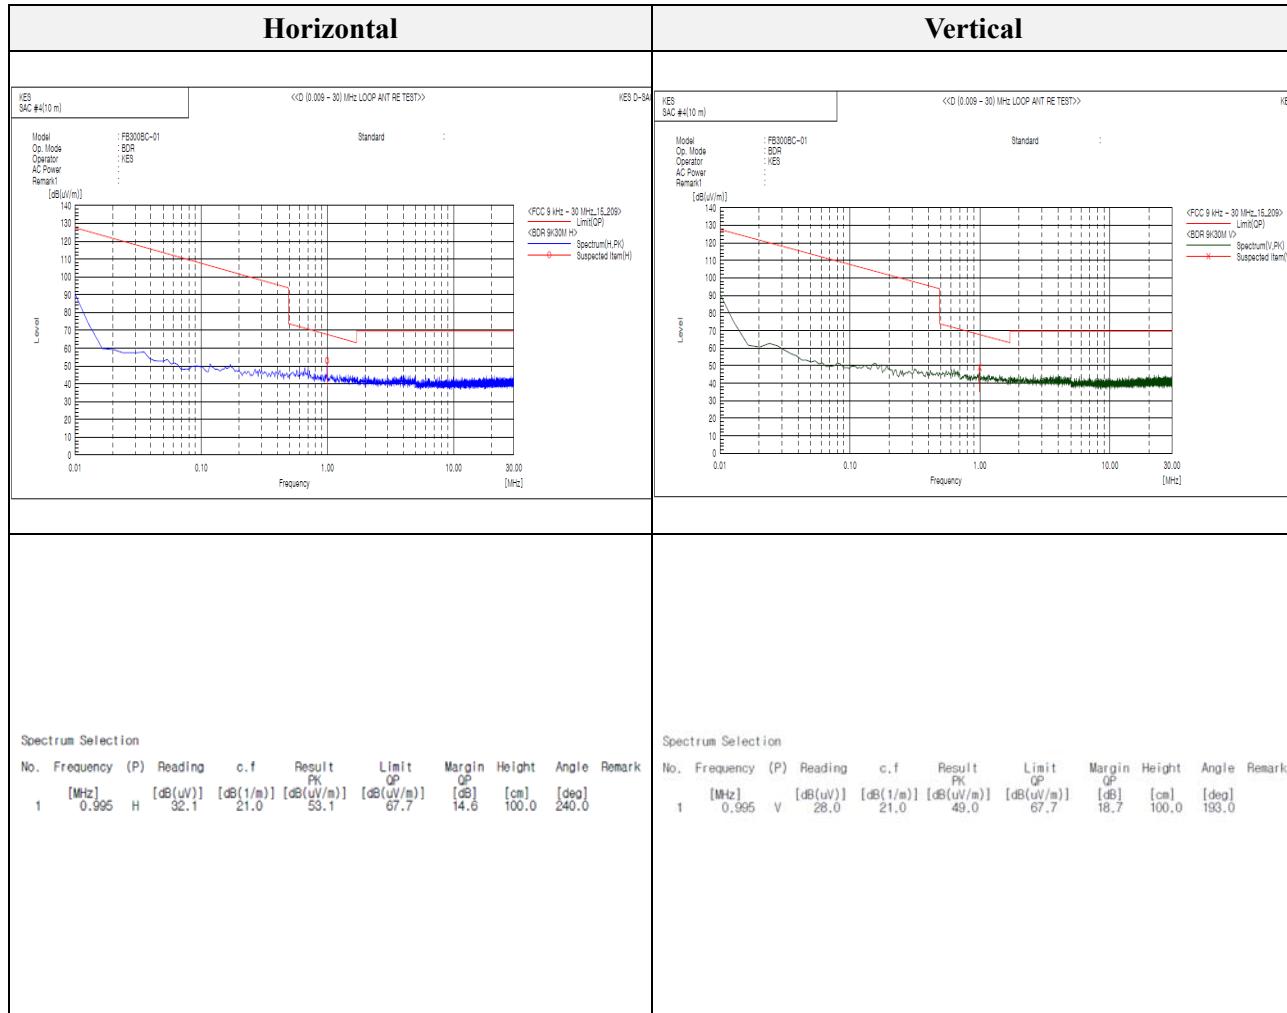


Test results (Below 1 000 MHz) – Worst case

Mode: BDR

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Channel: 00(Worst case)

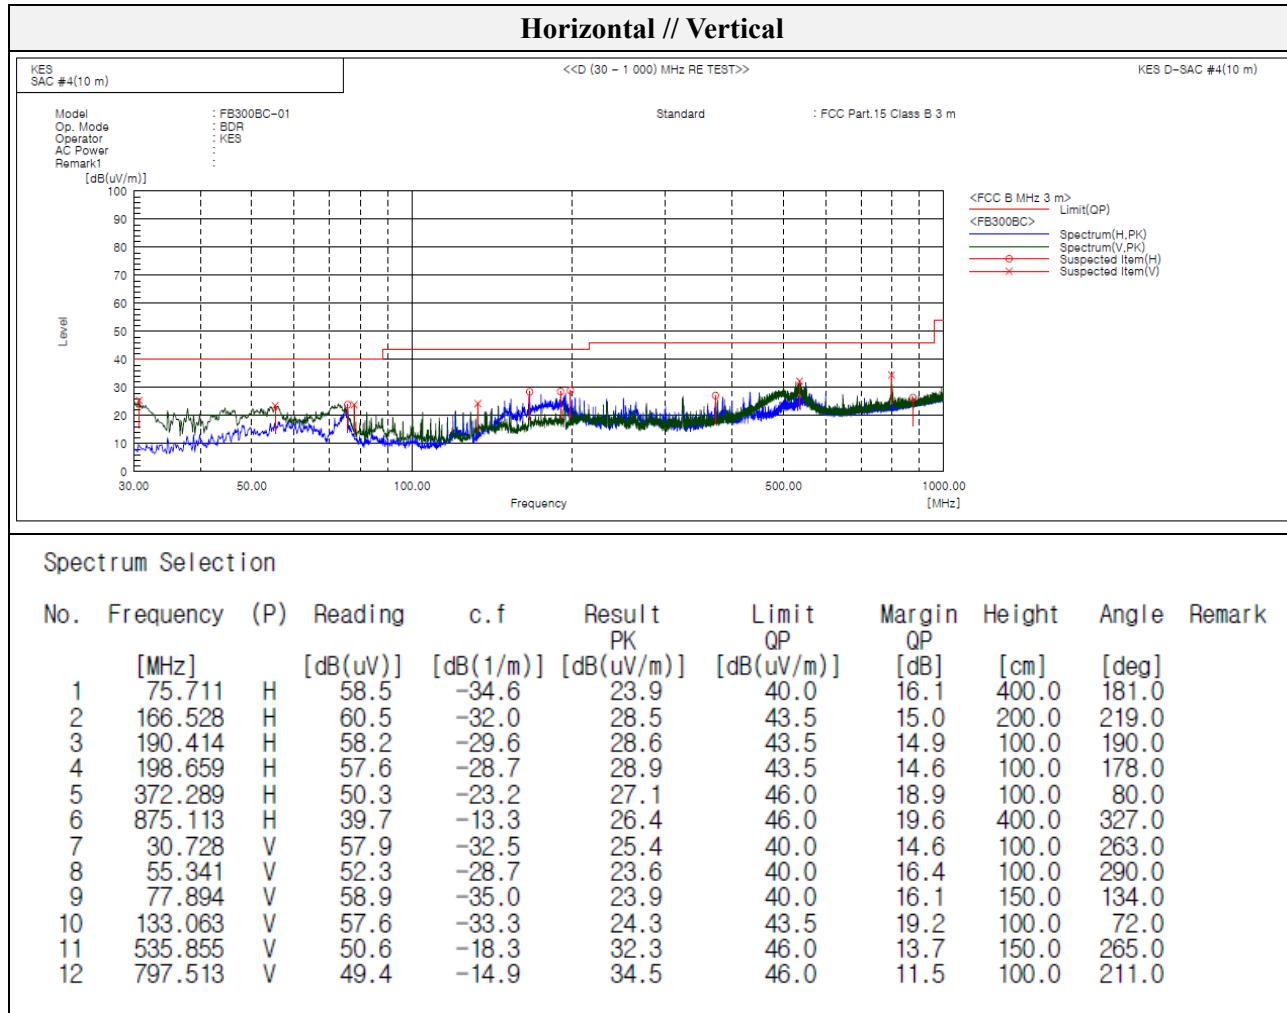

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr

Test results (Above 1 000 MHz)


| | |
|--------------------------|---------|
| Mode: | BDR |
| Transfer rate: | 1 Mbps |
| Distance of measurement: | 3 meter |
| Channel: | 00 |


- Spurious

| Frequency (MHz) | Level (dB μ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB μ N/m) | Limit (dB μ N/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1843.70 | 48.12 | Peak | H | -2.62 | - | 45.50 | 74.00 | 28.50 |
| 2112.90 | 49.30 | Peak | H | -0.75 | - | 48.55 | 74.00 | 25.45 |
| 1730.80 | 52.02 | Peak | V | -3.74 | - | 48.28 | 74.00 | 25.72 |
| 2112.90 | 50.58 | Peak | V | -0.75 | - | 49.83 | 74.00 | 24.17 |

- Band edge

| Frequency (MHz) | Level (dB μ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB μ N/m) | Limit (dB μ N/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 2346.88 | 46.71 | Peak | H | -0.30 | - | 46.41 | 74.00 | 27.59 |
| 2343.53 | 47.88 | Peak | V | -0.31 | - | 47.57 | 74.00 | 26.43 |

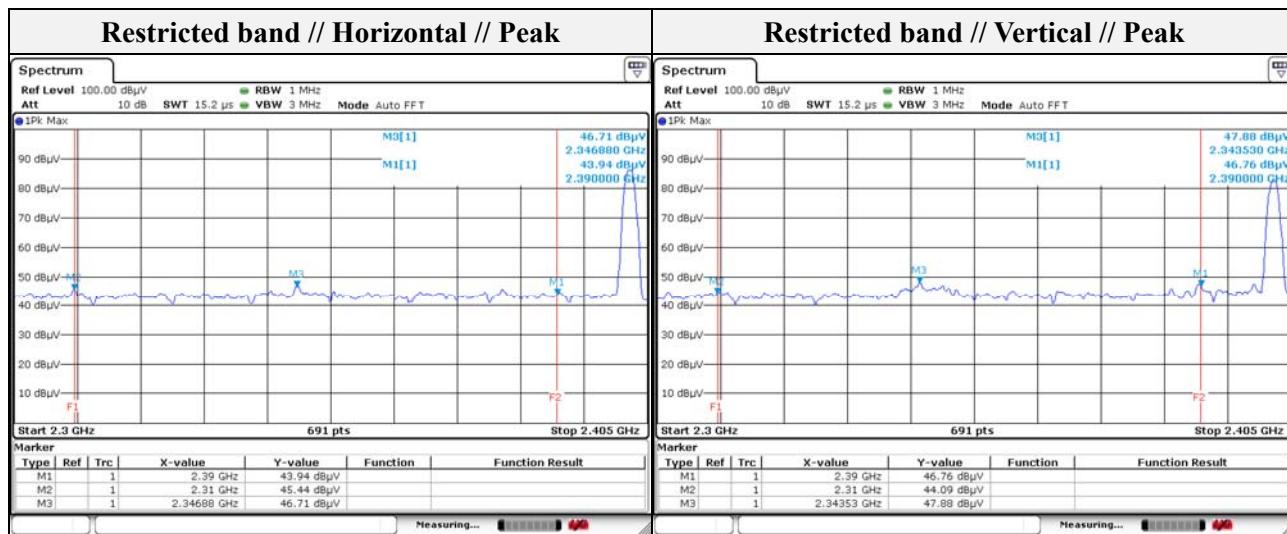

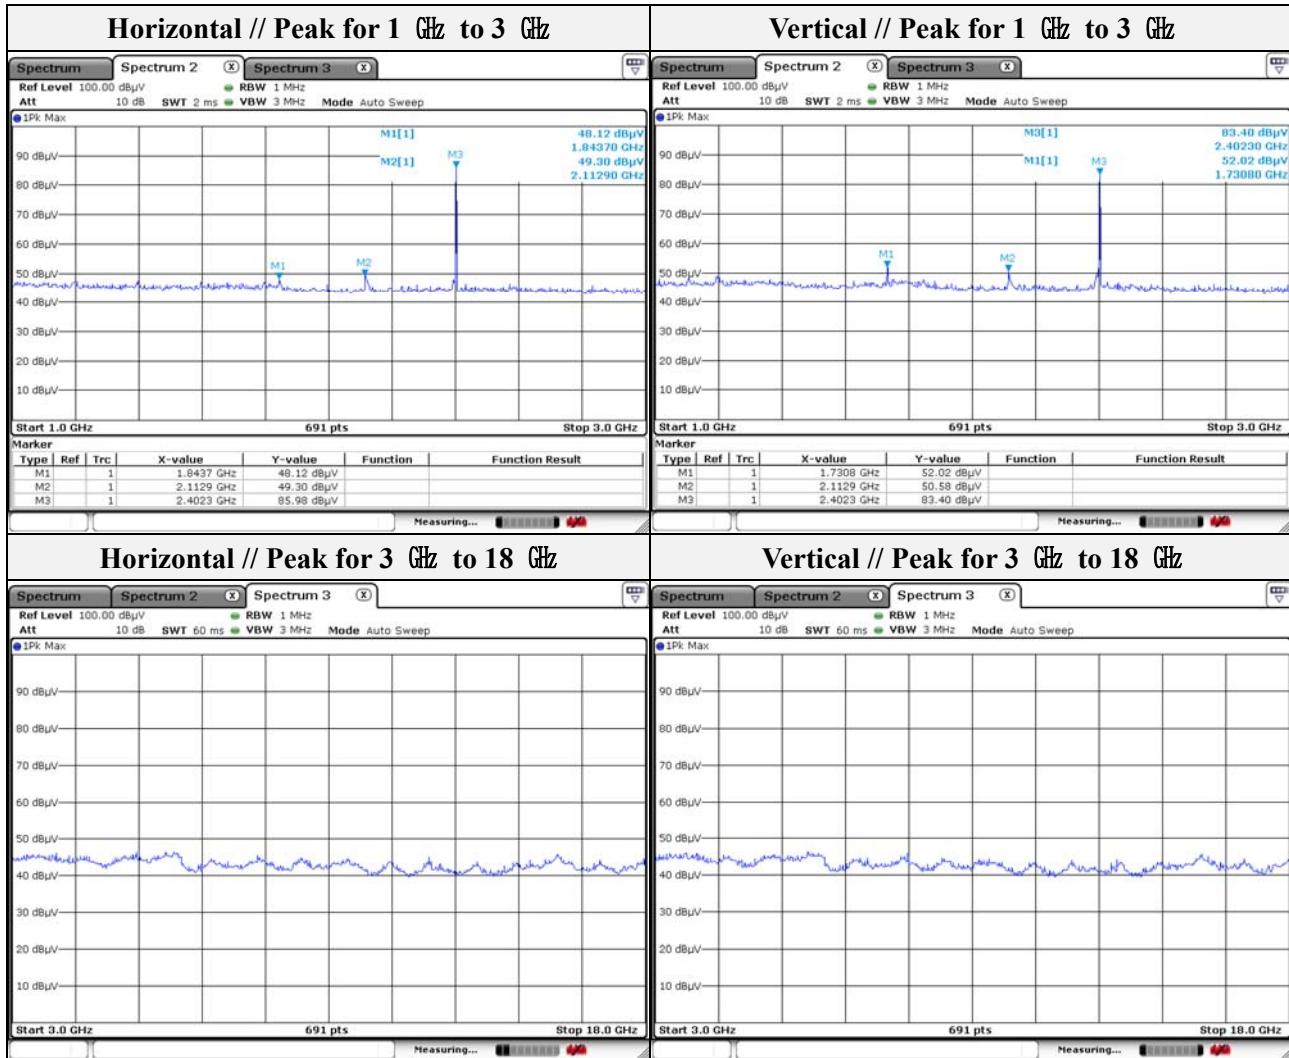

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


Mode: **BDR**

Transfer rate: **1 Mbps**

Distance of measurement: **3 meter**

Channel: **40**

| Frequency (MHz) | Level (dB μ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB μ N/m) | Limit (dB μ N/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 1797.40 | 48.53 | Peak | H | -3.10 | - | 45.43 | 74.00 | 28.57 |
| 2121.60 | 48.96 | Peak | H | -0.73 | - | 48.23 | 74.00 | 25.77 |
| 1725.00 | 50.68 | Peak | V | -3.79 | - | 46.89 | 74.00 | 27.11 |
| 2112.90 | 49.15 | Peak | V | -0.75 | - | 48.40 | 74.00 | 25.60 |

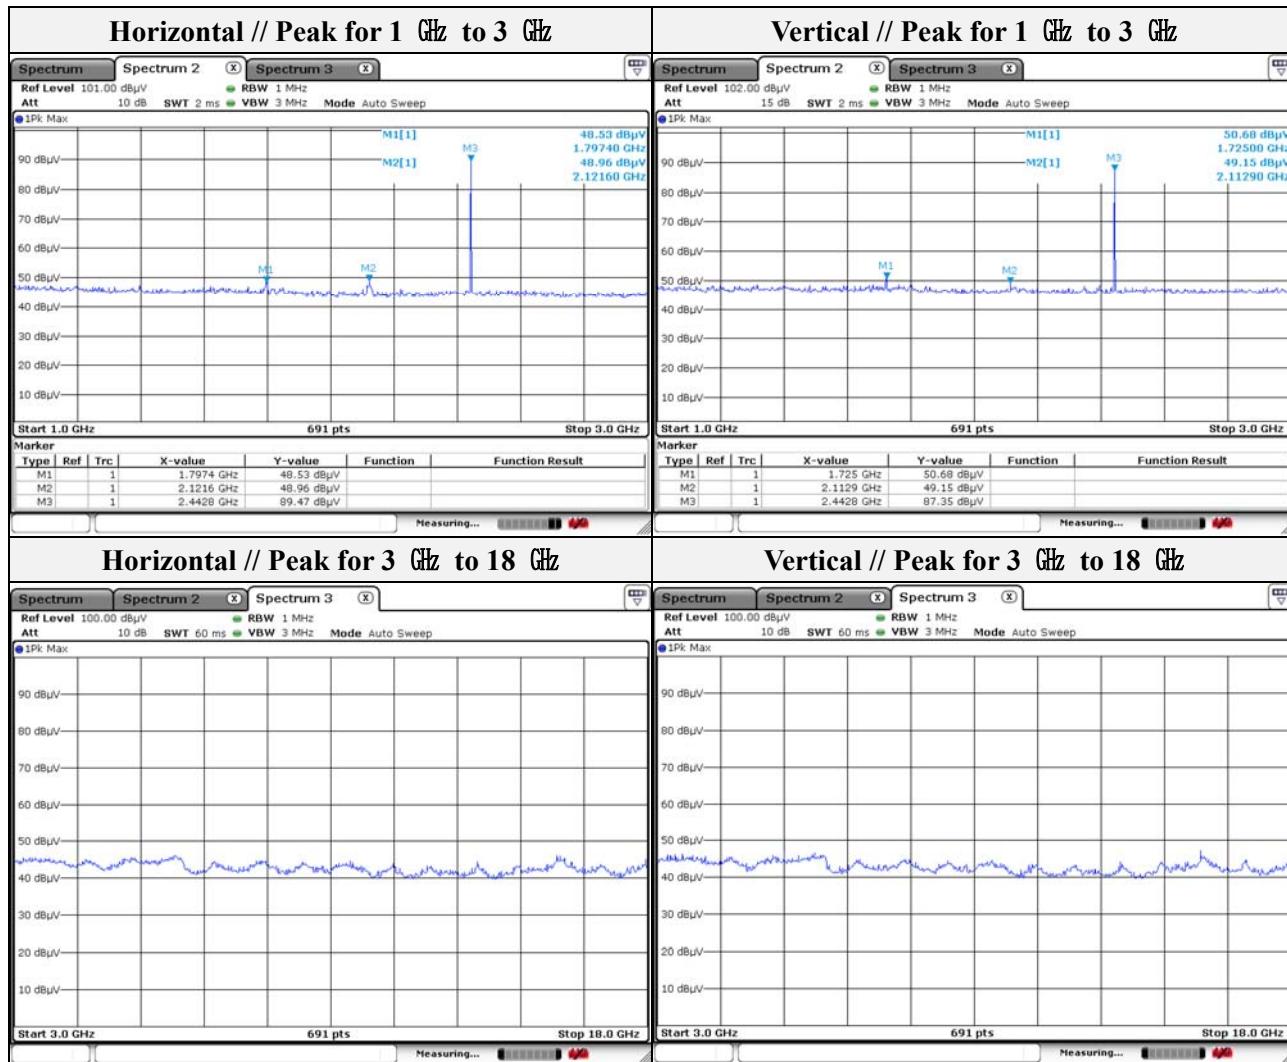

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr


| | |
|--------------------------|---------|
| Mode: | BDR |
| Transfer rate: | 1 Mbps |
| Distance of measurement: | 3 meter |
| Channel: | 78 |


- Spurious

| Frequency (MHz) | Level (dB μ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB μ N/m) | Limit (dB μ N/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 2112.88 | 50.07 | Peak | H | -0.75 | - | 49.32 | 74.00 | 24.68 |
| 2127.40 | 50.62 | Peak | H | -0.72 | - | 49.90 | 74.00 | 24.10 |
| 1762.70 | 48.65 | Peak | V | -3.43 | - | 45.22 | 74.00 | 28.78 |
| 2112.88 | 52.87 | Peak | V | -0.75 | - | 52.12 | 74.00 | 21.88 |

- Band edge

| Frequency (MHz) | Level (dB μ V) | Detect mode | Ant. Pol. (H/V) | CF (dB) | DCF (dB) | Field strength (dB μ N/m) | Limit (dB μ N/m) | Margin (dB) |
|-----------------|--------------------|-------------|-----------------|---------|----------|-------------------------------|----------------------|-------------|
| 2498.49 | 45.27 | Peak | H | -0.02 | - | 45.25 | 74.00 | 28.75 |
| 2498.31 | 47.05 | Peak | V | -0.02 | - | 47.03 | 74.00 | 26.97 |

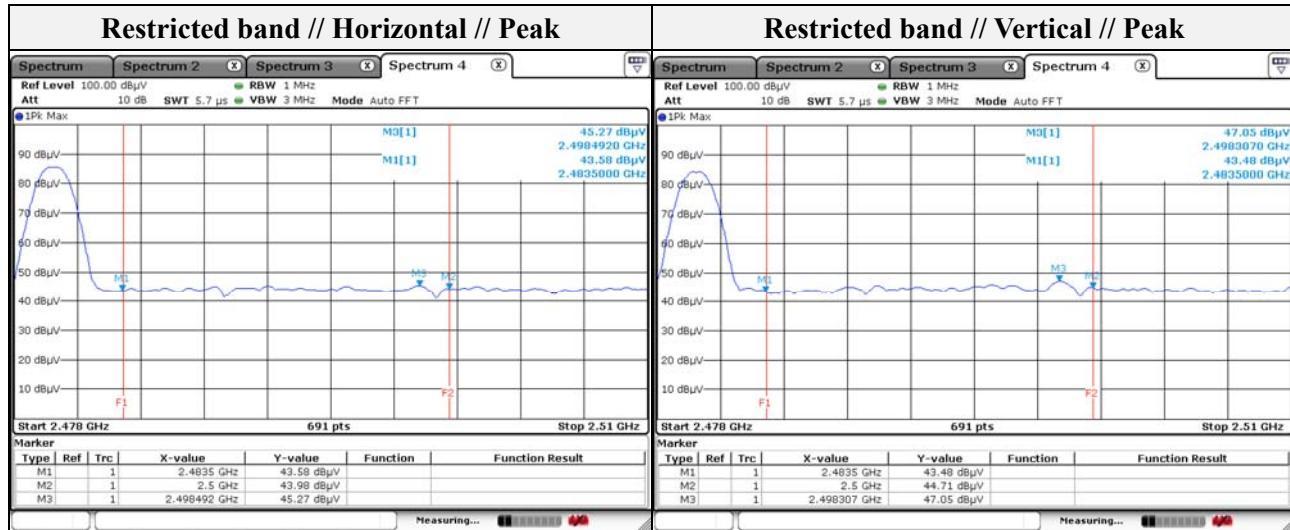

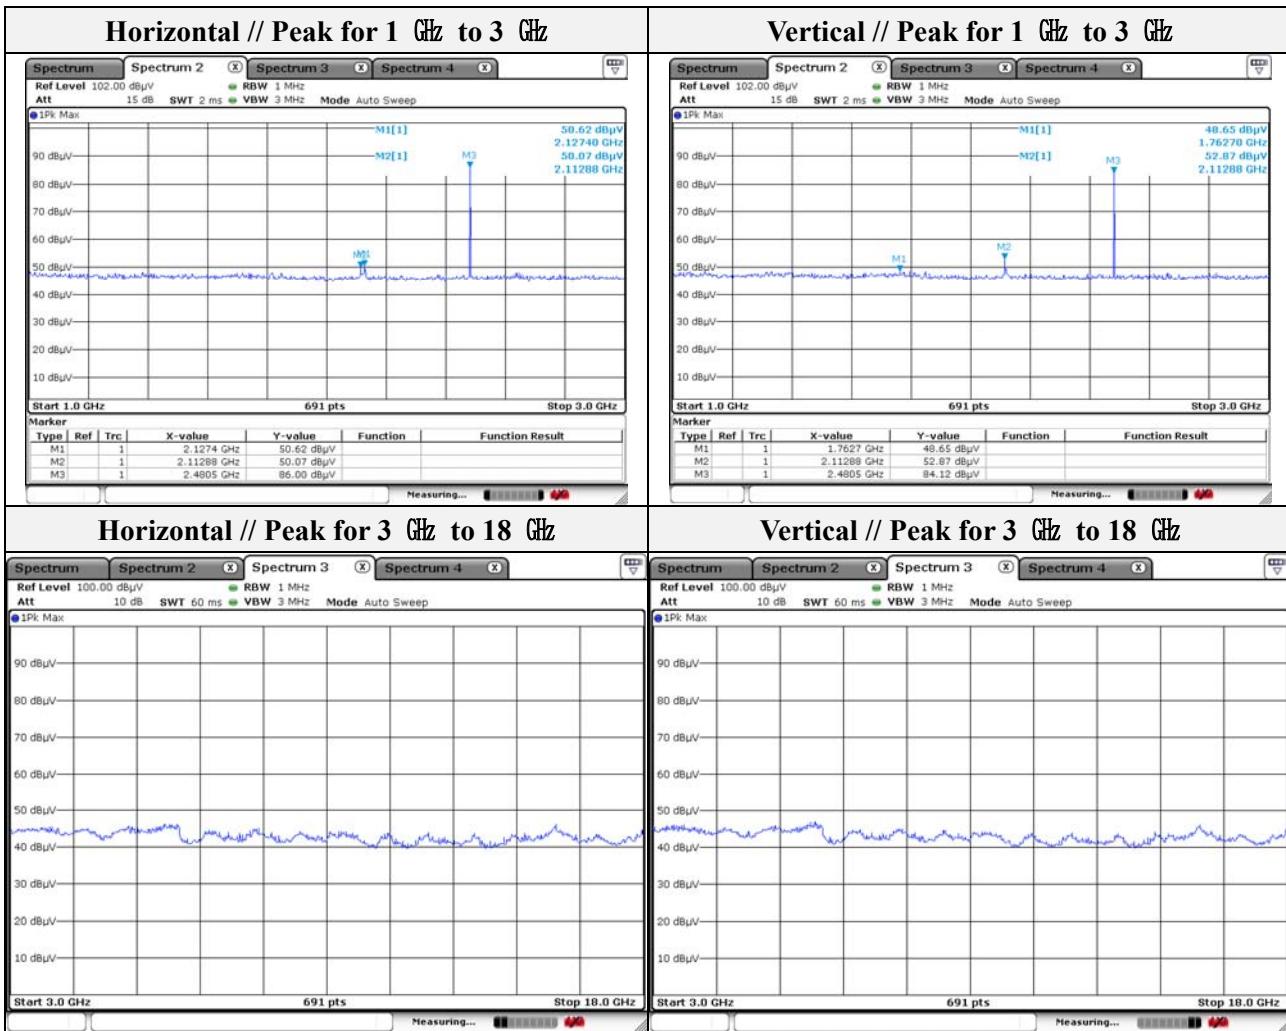


Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

Test results (18 GHz to 30 GHz) – Worst case

| | |
|--------------------------|----------------|
| Mode: | BDR |
| Transfer rate: | 1 Mbps |
| Distance of measurement: | 3 meter |
| Channel: | 00(Worst case) |

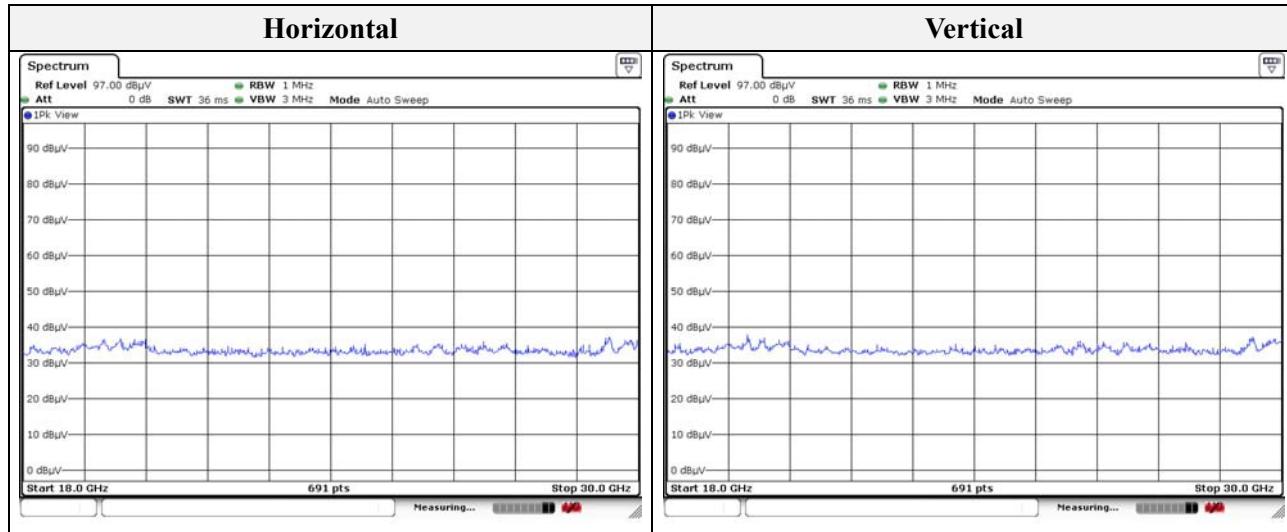

Note.


1. No spurious emission were detected above 18 GHz.

3.7. Conducted band edge and out of band emissions

Test procedure

ANSI C63.10-2013 - Section 7.8.4 and 7.8.8

Test setup




Test setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
2. RBW = 100 kHz
3. VBW \geq 300 kHz
4. Detector = Peak
5. Number of sweep points $\geq 2 \times$ Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Limit

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))

Test results

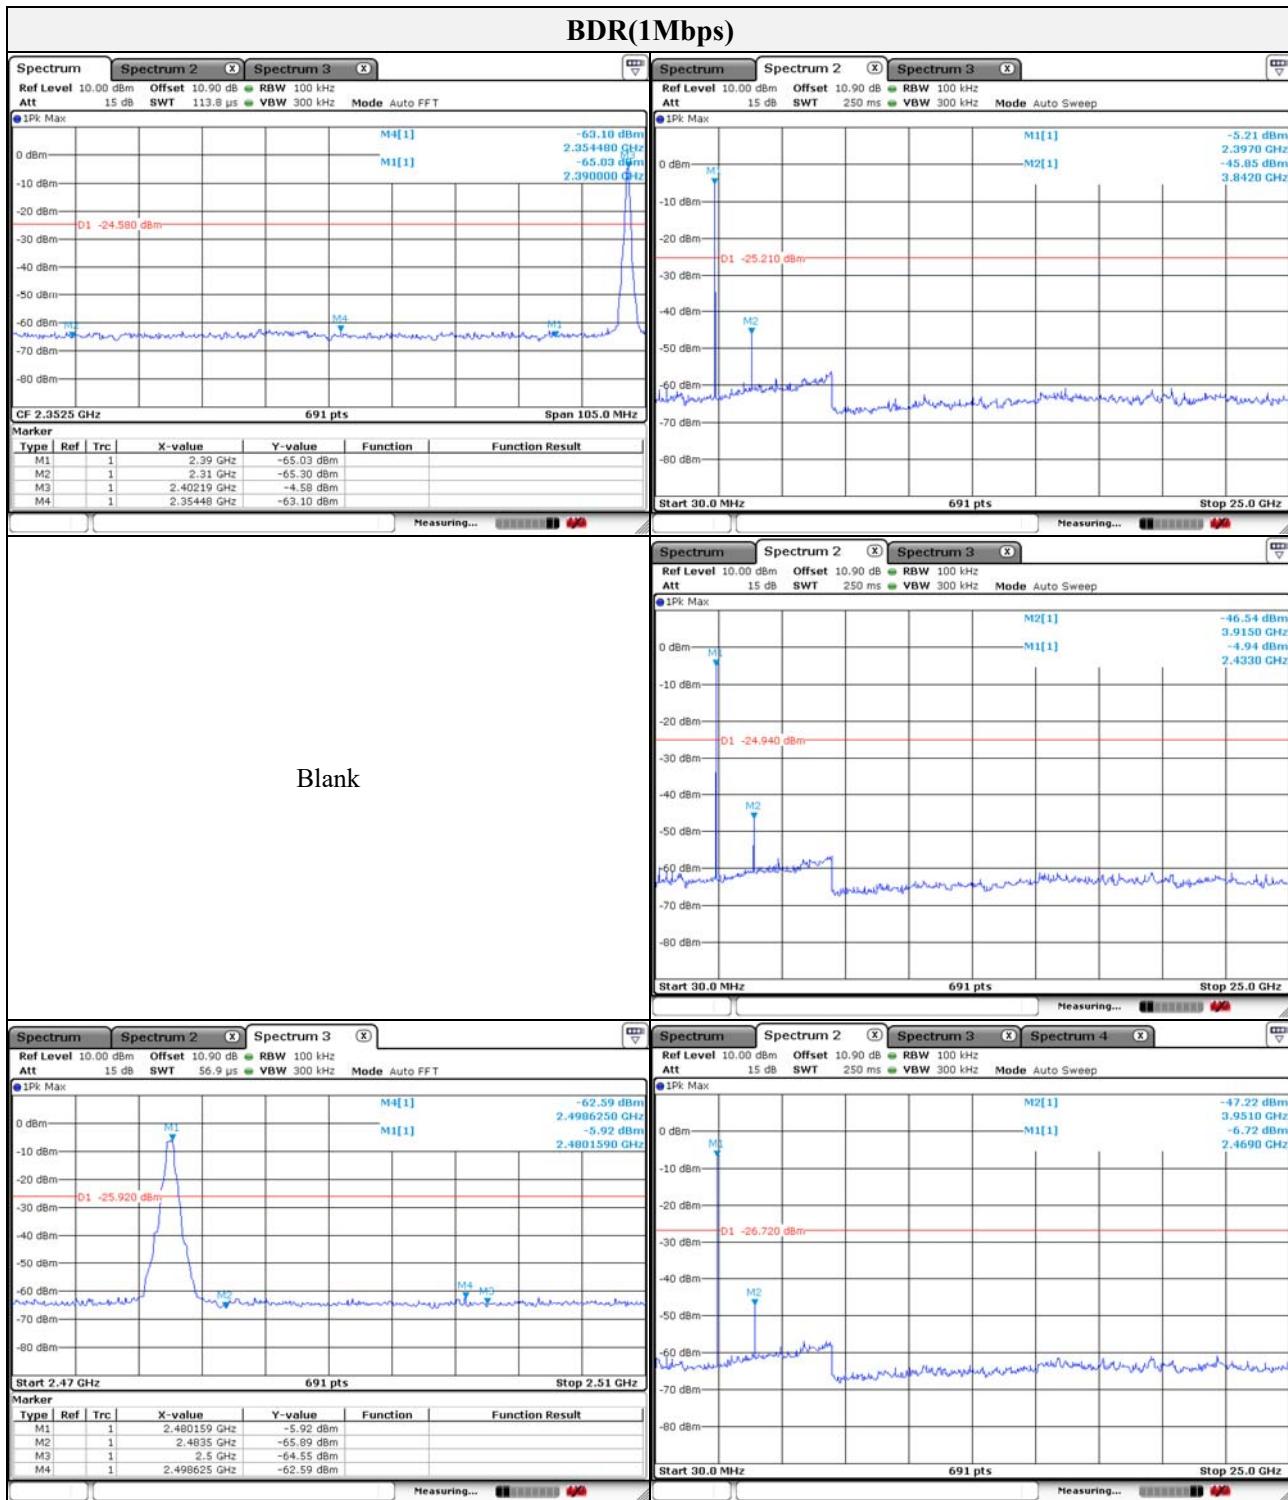


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

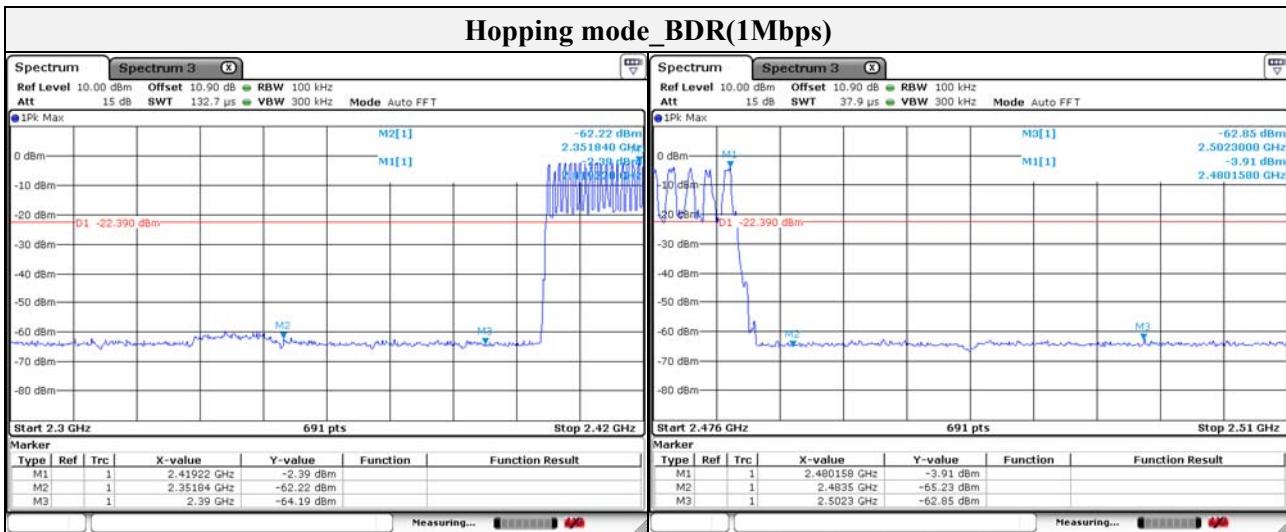

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

3.8. AC conducted emissions

Test setup

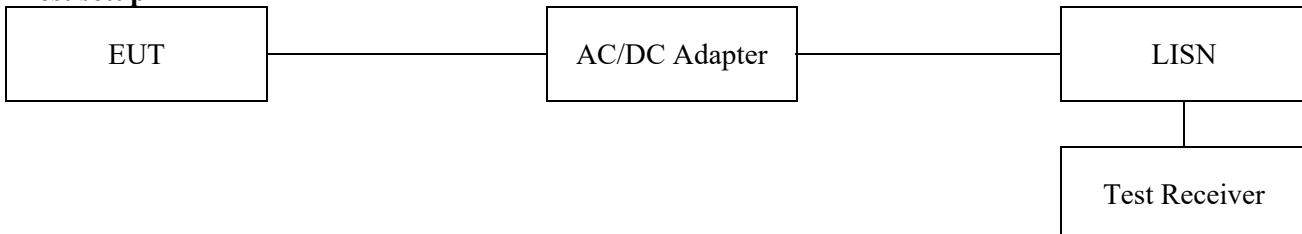

Limit


According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

| Frequency of Emission (MHz) | Conducted limit (dB μ V/m) | |
|-----------------------------|--------------------------------|----------|
| | Quasi-peak | Average |
| 0.15 – 0.50 | 66 - 56* | 56 - 46* |
| 0.50 – 5.00 | 56 | 46 |
| 5.00 – 30.0 | 60 | 50 |

Note:

1. All AC line conducted spurious emission are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and the appropriate frequencies. All data rates and modes were investigated for conducted spurious emission. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.
3. Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

Test results

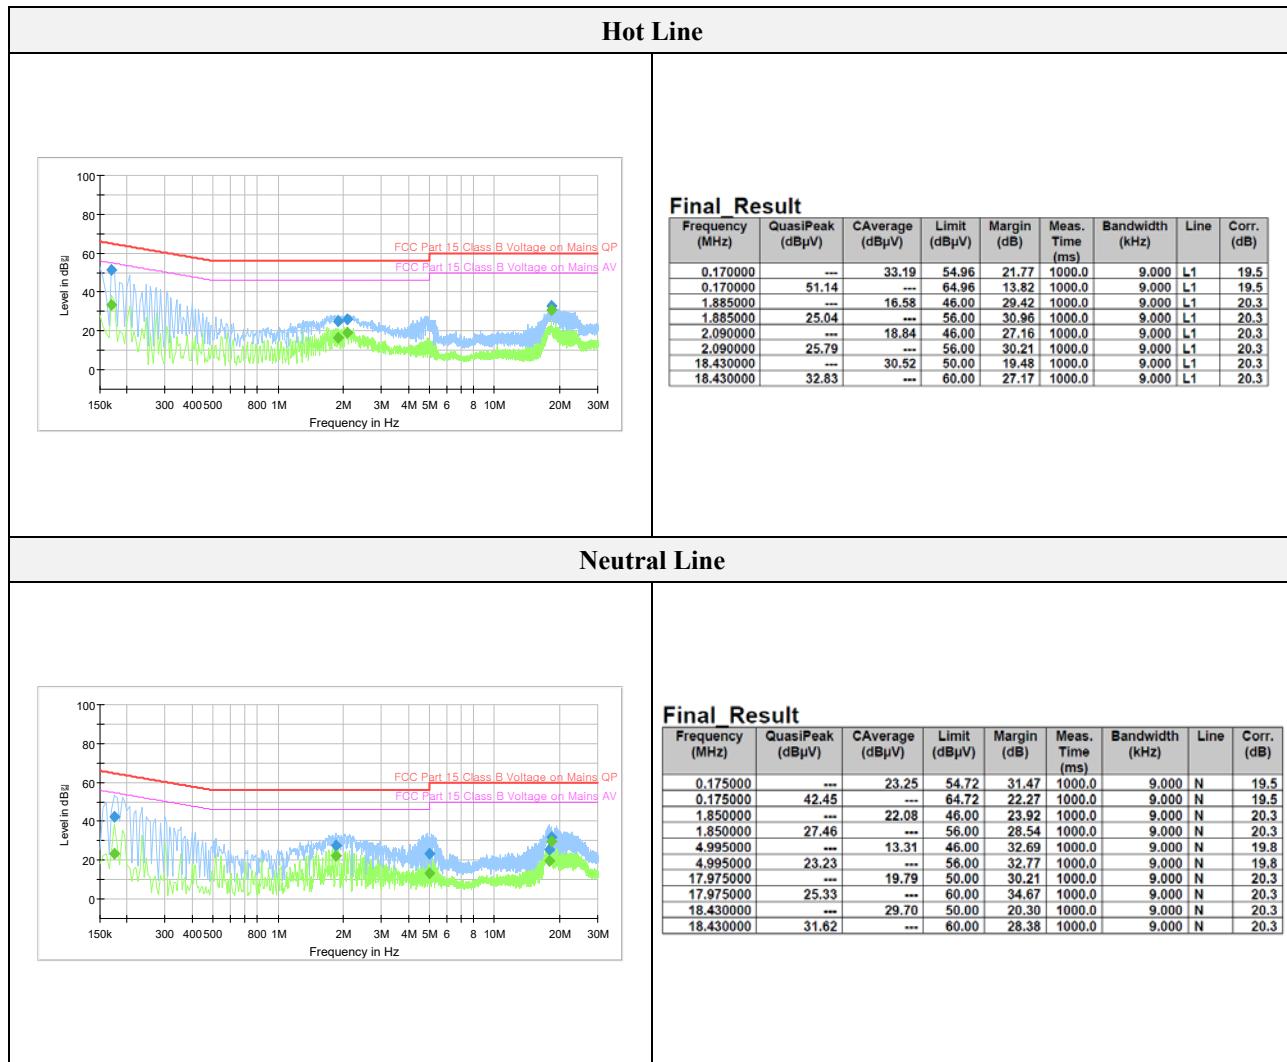

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

The authenticity of the test report, contact shchoi@kes.co.kr



Appendix A. Measurement equipment

| Equipment | Manufacturer | Model | Serial No. | Calibration interval | Calibration due. |
|-------------------------------------|----------------------------|-----------------|--------------|----------------------|------------------|
| Spectrum Analyzer | R&S | FSV30 | 100736 | 1 year | 2019.06.28 |
| Spectrum Analyzer | R&S | FSV40 | 101002 | 1 year | 2019.06.29 |
| 8360B Series Swept Signal Generator | HP | 83630B | 3844A00786 | 1 year | 2019.01.22 |
| Power Meter | Anritsu | ML2495A | 1438001 | 1 year | 2019.01.25 |
| Pulse Power Sensor | Anritsu | MA2411B | 1339205 | 1 year | 2019.01.25 |
| Attenuator | KEYSIGHT | 8493C | 82506 | 1 year | 2019.01.22 |
| Loop Antenna | Schwarzbeck | FMZB1513 | 225 | 2 years | 2019.05.10 |
| Trilog-broadband antenna | SCHWARZBECK | VULB 9163 | 9168-714 | 2 years | 2018.11.28 |
| Horn Antenna | A.H | SAS-571 | 414 | 2 years | 2019.02.15 |
| Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA 9170550 | 2 years | 2019.02.15 |
| High Pass Filter | Wainwright Instrument GmbH | WHJS3000-10TT | 1 | 1 year | 2019.06.29 |
| Low Pass Filter | Wainwright Instrument GmbH | WLK1.0/18G-10TT | 1 | 1 year | 2019.06.29 |
| Preamplifier | R&S | SCU01 | 100603 | 1 year | 2018.11.27 |
| Preamplifier | AGILENT | 8449B | 3008A01742 | 1 year | 2019.01.11 |
| EMI Test Receiver | R&S | ESU26 | 100552 | 1 year | 2019.04.11 |
| Pulse Limiter | R&S | ESH3-Z2 | 101915 | 1 year | 2018.11.27 |

Peripheral devices

| Device | Manufacturer | Model No. | Serial No. |
|-------------------|----------------------|-----------|-------------|
| Notebook computer | LG Electronics Inc., | LG15N53 | NEZ65167208 |

The end of test report.