



FCC TEST REPORT (15.407)

REPORT NO.: RF131210E02-1

MODEL NO.: Balance One, Balance, MAX, Pismo805

FCC ID: U8G-P1805

RECEIVED: Dec. 10, 2013

TESTED: Dec. 18, 2013 to Feb. 06, 2014

ISSUED: Apr. 02, 2014

APPLICANT: Pismo Labs Technology Limited

ADDRESS: FLAT/RM A5, 5/F, HK SPINNERS IND
BLDG PHASE 6, 481 CASTLE PEAK
ROAD, CHEUNG SHA WAN, HONG KONG.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	11
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DUTY CYCLE OF TEST SIGNAL	15
3.5 DESCRIPTION OF SUPPORT UNITS.....	18
3.6 CONFIGURATION OF SYSTEM UNDER TEST	19
4. TEST TYPES AND RESULTS	20
4.1 CONDUCTED EMISSION MEASUREMENT	20
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	20
4.1.2 TEST INSTRUMENTS.....	20
4.1.3 TEST PROCEDURES	21
4.1.4 DEVIATION FROM TEST STANDARD	21
4.1.5 TEST SETUP	21
4.1.6 EUT OPERATING CONDITIONS	22
4.1.7 TEST RESULTS	23
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	25
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	25
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	25
4.2.3 TEST INSTRUMENTS.....	26
4.2.4 TEST PROCEDURES	28
4.2.5 DEVIATION FROM TEST STANDARD	28
4.2.6 TEST SETUP	29
4.2.7 EUT OPERATING CONDITION.....	29
4.2.8 TEST RESULTS	30
4.3 TRANSMIT POWER MEASUREMENT	45
4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT	45
4.3.2 TEST INSTRUMENTS.....	45
4.3.3 TEST PROCEDURE.....	46
4.3.4 DEVIATION FROM TEST STANDARD	46
4.3.5 TEST SETUP	46
4.3.6 EUT OPERATING CONDITIONS	47
4.3.7 TEST RESULTS	48



A D T

4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT	51
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	51
4.4.2	TEST INSTRUMENTS.....	51
4.4.3	TEST PROCEDURES	51
4.4.4	DEVIATION FROM TEST STANDARD	51
4.4.5	TEST SETUP	51
4.4.6	EUT OPERATING CONDITIONS	52
4.4.7	TEST RESULTS	53
4.5	PEAK POWER EXCURSION MEASUREMENT	55
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	55
4.5.2	TEST INSTRUMENTS.....	55
4.5.3	TEST PROCEDURE.....	55
4.5.4	DEVIATION FROM TEST STANDARD	55
4.5.5	TEST SETUP	55
4.5.6	EUT OPERATING CONDITIONS	55
4.5.7	TEST RESULTS	56
4.6	FREQUENCY STABILITY.....	58
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	58
4.6.2	TEST INSTRUMENTS.....	58
4.6.3	TEST PROCEDURE.....	58
4.6.4	DEVIATION FROM TEST STANDARD	59
4.6.5	TEST SETUP	59
4.6.6	EUT OPERATING CONDITION	59
4.6.7	TEST RESULTS	60
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	61
6.	INFORMATION ON THE TESTING LABORATORIES	62
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	63



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF131210E02-1	Original release	Apr. 02, 2014



A D T

1. CERTIFICATION

PRODUCT: Pepwave / Peplink / Pismo Wireless Product
BRAND NAME: Pepwave/Peplink / Pismo
MODEL NO.: Balance One, Balance, MAX, Pismo805
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: Pismo Labs Technology Limited
TESTED: Dec. 18, 2013 to Feb. 06, 2014
STANDARDS: FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10-2009

The above equipment (Model: Balance One) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** Apr. 02, 2014
(Midoli Peng, Specialist)

APPROVED BY : May Chen , **DATE:** Apr. 02, 2014
(May Chen, Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -4.93dB at 0.150MHz
15.407(b/1/2/3) (b)(6)	Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5150.00MHz.
15.407(a/1/2)	Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a/1/2)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex not a standard connector.

NOTE: 1. For WLAN: The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.25GHz and 5.725~5.850GHz frequencies band. This report was recorded the RF parameters including 5.15~5.25GHz. For the 2400 ~ 2483.5MHz and 5.725~5.850GHz RF parameters was recorded in another test report.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz -6GHz)	3.72 dB
Radiated emissions (6GHz -18GHz)	4.00 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Pepwave / Peplink / Pismo Wireless Product
MODEL NO.	Balance One, Balance, MAX, Pismo805
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS,OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 300Mbps
OPERATING FREQUENCY	For 15.407 5GHz: 5.18 ~ 5.24GHz
	For 15.247 2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	For 15.407 4 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)
	For 15.247 (2.4GHz) 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
	For 15.247 (5GHz) 5 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)
MAXIMUM OUTPUT POWER	For 15.407 802.11a: 45.525mW 802.11n (HT20): 45.242mW 802.11n (HT40): 48.477mW For 15.247 (2.4GHz) 802.11b: 960.624mW 802.11g: 953.975mW 802.11n (HT20): 968.385mW 802.11n (HT40): 954.066mW For 15.247 (5GHz) 802.11a: 196.869mW 802.11n (HT20): 188.844mW 802.11n (HT40): 172.842mW



A D T

ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x 1

Note:

1. The EUT has four model names, which are identical to each other in all aspects except for the following information:

Product Name	Brand	Model No.	Different
Pepwave / Peplink / Pismo Wireless Product	Pepwave / Peplink / Pismo	Balance One	For marketing requirement
		Balance	
		MAX	
		Pismo805	

From the above models, model: **Balance One** was selected as representative model for the test and its data was recorded in this report.

2. The EUT must be supplied with a power adapter as following table:

Brand	Model No.	Spec.
Ten Pao	S024EM1200200	AC I/P: 100-240V, 50/60Hz, 0.6A DC O/P: 12V, 2000mA DC output cable (unshielded, 1.9m with 1 core)

3. The EUT incorporates a MIMO without beam forming function.

MODULATION MODE	Tx/Rx FUNCTION
802.11a	2Tx/2Rx
802.11b	2Tx/2Rx
802.11g	2Tx/2Rx
802.11n (HT20)	2Tx/2Rx
802.11n (HT40)	2Tx/2Rx

4. The antennas provided to the EUT, please refer to the following table:

For 2.4GHz						
Transmitter Circuit	Brand	Antenna Type	Gain (dBi) (Include cable loss)	Connector Type	Cable Length (cm)	Frequency range (MHz to MHz)
Chain (0) Ant. 1	SmartAnt	PIFA	3.73	i-pex	20	2400 ~ 2483.5
Chain (1) Ant. 2	SmartAnt	PIFA	4.51	i-pex	20	2400 ~ 2483.5
For 5GHz						
Transmitter Circuit	Brand	Antenna Type	Gain (dBi) (Include cable loss)	Connector Type	Cable Length (cm)	Frequency range (MHz to MHz)
Chain (0) Ant. 3	SmartAnt	PIFA	2.14	i-pex	20	5150 ~ 5250
			4.22			5725 ~ 5850
Chain (1) Ant. 4	SmartAnt	PIFA	1.85	i-pex	20	5150 ~ 5250
			2.11			5725 ~ 5850

5. 2.4GHz and 5GHz technology can transmit at same time.

6. Spurious emission of the simultaneous operation (2.4GHz and 5GHz) has been evaluated and no non-compliance was found.

7. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Operated in 5150 ~ 5250MHz band:

4 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

NOTE: 1. "-" means no effect.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (MBPS)
802.11n (HT40)	38 to46	46	OFDM	BPSK	13.5

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT40)	38 to46	46	OFDM	BPSK	13.5



A D T

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATI ON TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (HT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (HT40)	38 to 46	38, 46	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATI ON TYPE	DATA RATE (Mbps)
802.11a	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11n (HT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11n (HT40)	38 to 46	38, 46	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	23deg. C, 59%RH	120Vac, 60Hz	Bear Lee
RE<1G	22deg. C, 67%RH	120Vac, 60Hz	Robert Cheng
RE ³ 1G	22deg. C, 66%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

789033 D01 General UNII Test Procedures v01 r03

662911 D01 Multiple Transmitter Output v02

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DUTY CYCLE OF TEST SIGNAL

If duty cycle of test signal is < 98%, duty factor shall be considered.


802.11a

BPSK: Duty cycle = 1.357 ms/1.404 ms = 0.967, Duty factor = $10 * \log(1/0.967) = 0.15$

QPSK: Duty cycle = 0.689 ms/0.735 ms = 0.937, Duty factor = $10 * \log(1/0.937) = 0.28$

16QAM: Duty cycle = 0.354 ms/0.399 ms = 0.887, Duty factor = $10 * \log(1/0.887) = 0.52$

64QAM: Duty cycle = 0.188 ms/0.232 ms = 0.81, Duty factor = $10 * \log(1/0.81) = 0.91$

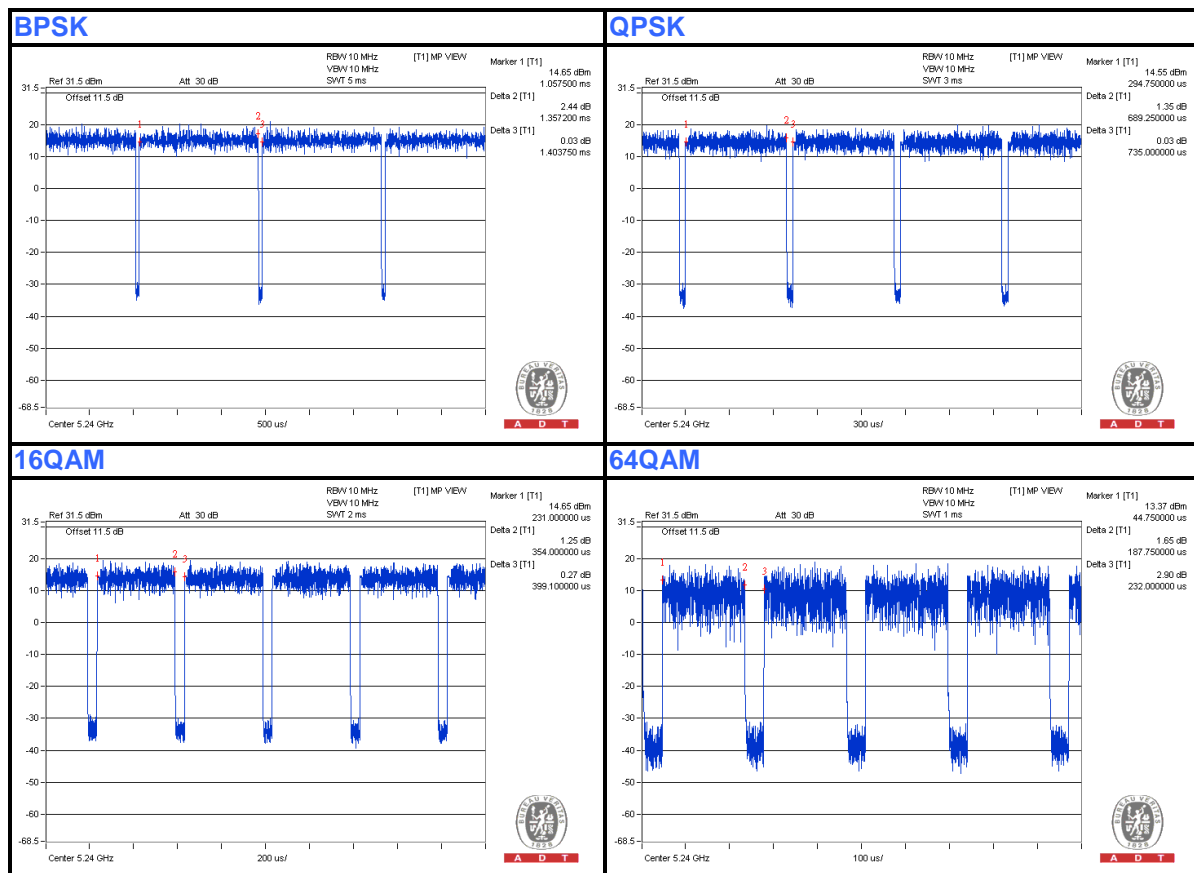



A D T


802.11n(HT20)

BPSK: Duty cycle = 1.267 ms/1.314 ms = 0.964, Duty factor = $10 * \log(1/0.964) = 0.16$

QPSK: Duty cycle = 0.653 ms/0.699 ms = 0.934, Duty factor = $10 * \log(1/0.934) = 0.3$

16QAM: Duty cycle = 0.347 ms/0.392 ms = 0.885, Duty factor = $10 * \log(1/0.885) = 0.53$

64QAM: Duty cycle = 0.192 ms/0.236 ms = 0.814, Duty factor = $10 * \log(1/0.814) = 0.9$

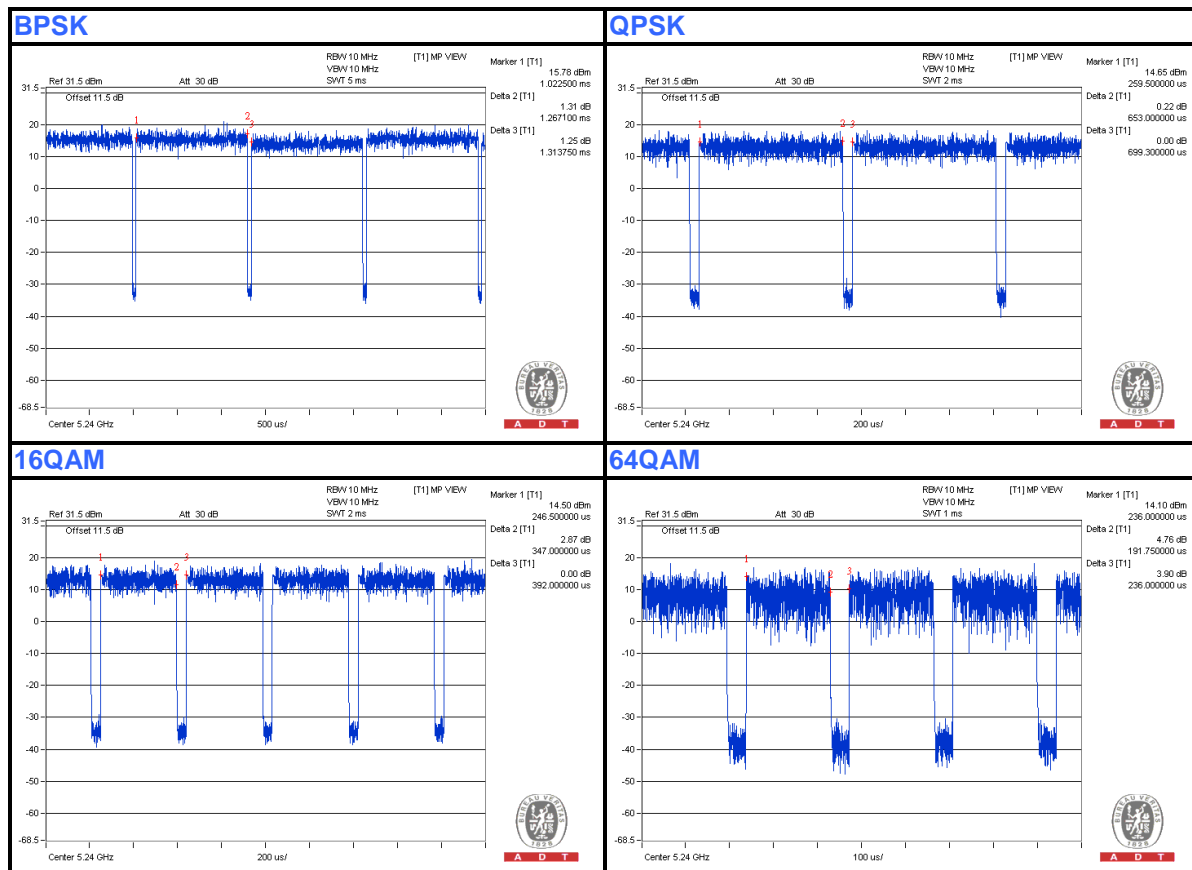



A D T


802.11n(HT40)

BPSK: Duty cycle = 0.63 ms/0.663 ms = 0.95, Duty factor = $10 * \log(1/0.95) = 0.22$

QPSK: Duty cycle = 0.335 ms/0.368 ms = 0.91, Duty factor = $10 * \log(1/0.91) = 0.41$

16QAM: Duty cycle = 0.187 ms/0.22 ms = 0.85, Duty factor = $10 * \log(1/0.85) = 0.71$

64QAM: Duty cycle = 0.112 ms/0.144 ms = 0.778, Duty factor = $10 * \log(1/0.778) = 1.09$

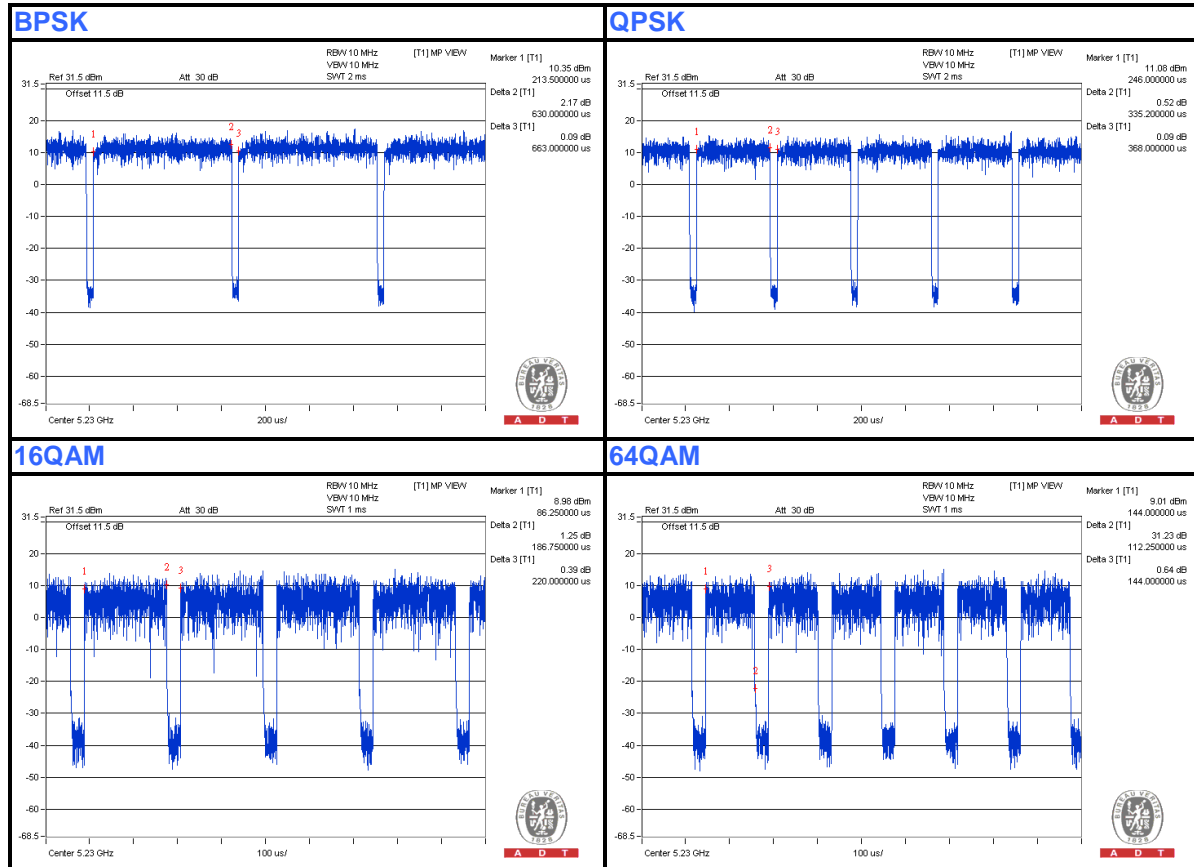



A D T

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	NOTEBOOK COMPUTER	DELL	PP32LA	HSLB32S	FCC DoC
3	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
4	iPod shuffle	Apple	MD778TA/A	CC4JMH7LF4T1	NA

No.	Signal cable description
1	UTP cable(10m)
2	UTP cable(10m)
3	UTP cable(10m)
4	USB cable(0.1m)

Note: The power cords of the above support units were unshielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

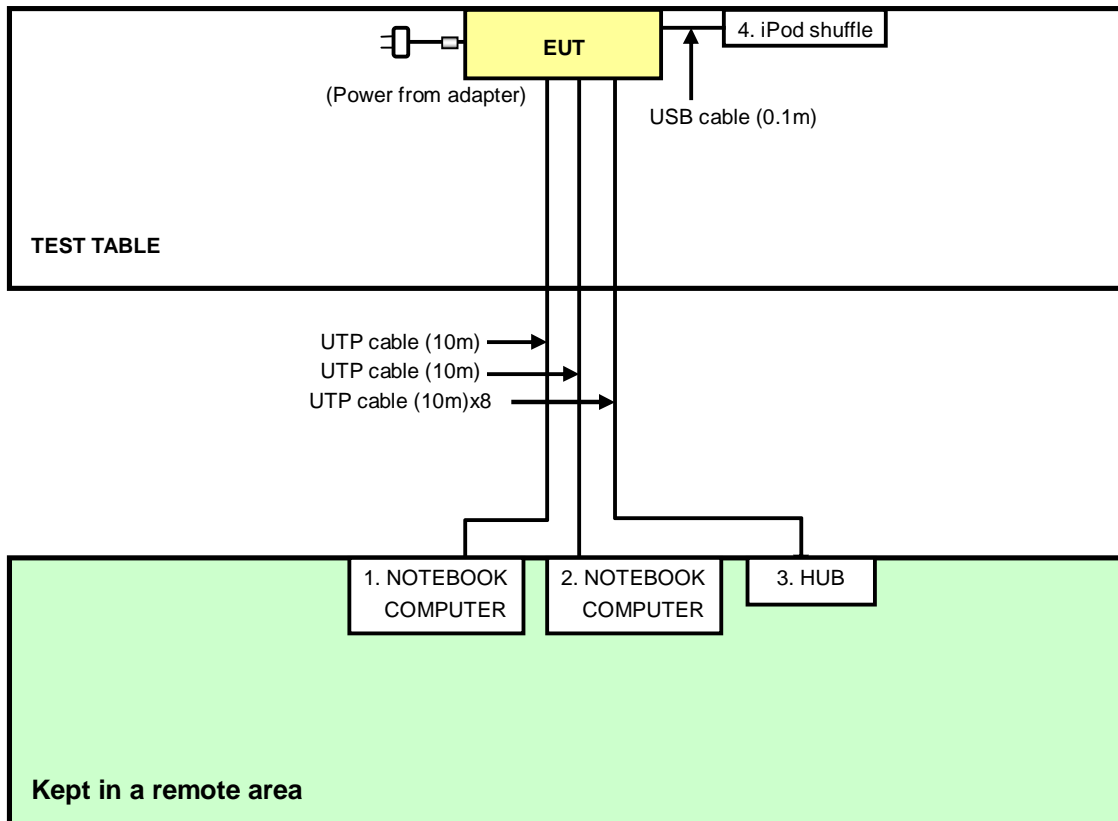



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Mar. 08, 2013	Mar. 07, 2014
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 05, 2013	Sep. 04, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 06, 2013	June 05, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 11, 2013	Mar. 10, 2014
50 ohms Terminator	50	EMC-03	Sep. 24, 2013	Sep. 23, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Dec. 18, 2013

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

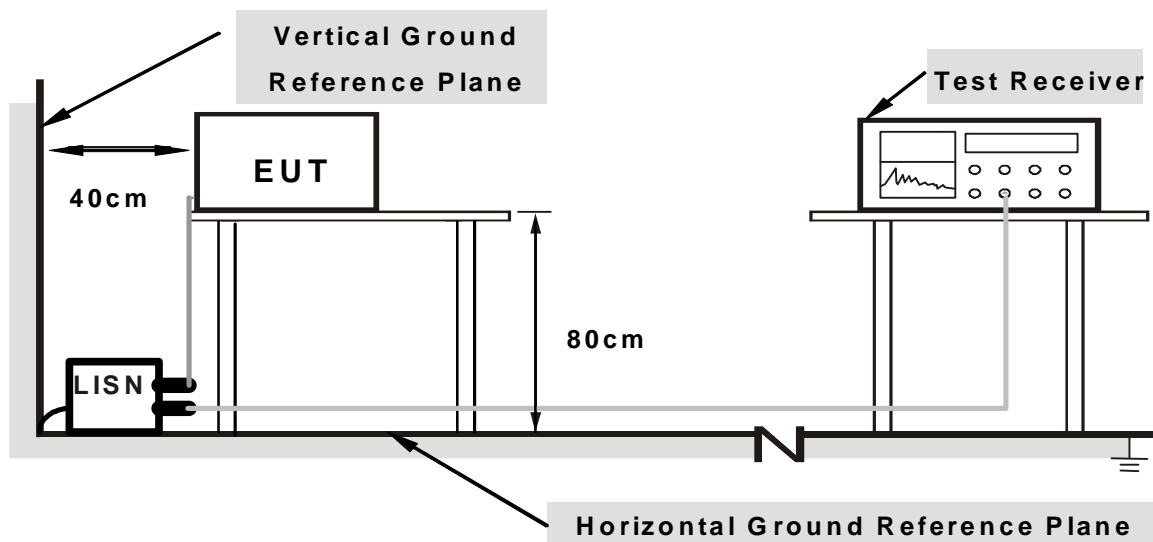

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



A D T

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared computer systems (support unit 1 & 2) to act as communication partner.
3. The communication partner ran test program “artgui.exe (Ver.2.3)” to enable EUT under transmission/receiving condition continuously.


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor [dB]	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.09	59.18	50.98	59.27	51.07	66.00	56.00	-6.73	-4.93
2	0.16953	0.10	51.96	29.30	52.06	29.40	64.98	54.98	-12.93	-25.59
3	0.25547	0.12	45.77	37.06	45.89	37.18	61.58	51.58	-15.68	-14.39
4	0.48203	0.17	46.75	39.63	46.92	39.80	56.30	46.30	-9.39	-6.51
5	1.91406	0.26	39.86	31.98	40.12	32.24	56.00	46.00	-15.88	-13.76
6	7.01953	0.55	37.71	31.81	38.26	32.36	60.00	50.00	-21.74	-17.64

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

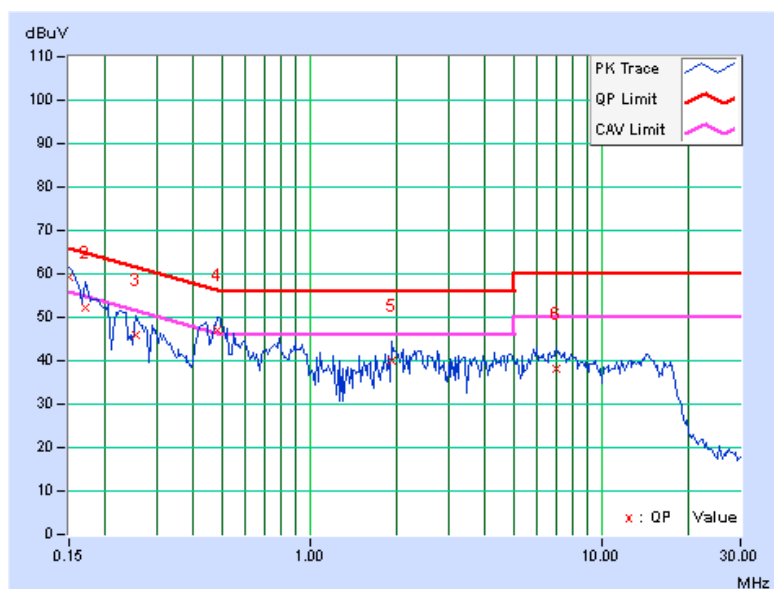




A D T

PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.10	59.00	49.93	59.10	50.03	66.00	56.00	-6.90	-5.97
2	0.18516	0.11	51.96	41.90	52.07	42.01	64.25	54.25	-12.18	-12.24
3	0.41953	0.16	43.57	34.58	43.73	34.74	57.46	47.46	-13.73	-12.72
4	0.48203	0.16	45.56	38.08	45.72	38.24	56.30	46.30	-10.58	-8.06
5	2.43750	0.29	37.74	29.76	38.03	30.05	56.00	46.00	-17.97	-15.95
6	13.56250	0.86	37.23	32.62	38.09	33.48	60.00	50.00	-21.91	-16.52

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

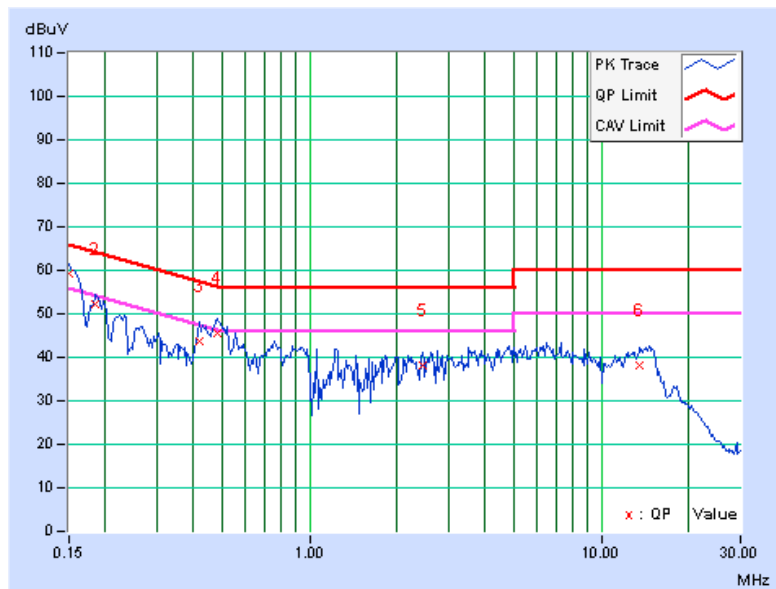



A D T

4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
√	FIELD STRENGTH AT 3m (dBμV/m)	
	PK	AV
	74	54
	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBμV/m)
	PK	PK
	-27	68.3

NOTE:

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$



A D T

4.2.3 TEST INSTRUMENTS

For Below 1GHz test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 21, 2014	Jan. 20, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Mar. 19, 2013	Mar. 18, 2014
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 15, 2013	July 14, 2014
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Jan. 29, 2014



A D T

For Above 1GHz test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 15, 2014	Jan. 14, 2015
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Mar. 25, 2013	Mar. 24, 2014
RF Cable	NA	CHHCAB_001	Oct. 06, 2013	Oct. 05, 2014
Spectrum Analyzer R&S	FSV40	100964	July 15, 2013	July 14, 2014
Horn_Antenna AISI	AIH.8018	0000220091110	Dec. 06, 2013	Dec. 05, 2014
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 29, 2013	Oct. 28, 2014
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Feb. 06, 2014

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.2.5 DEVIATION FROM TEST STANDARD


No deviation

4.2.6 TEST SETUP

<Frequency Range below 1GHz>

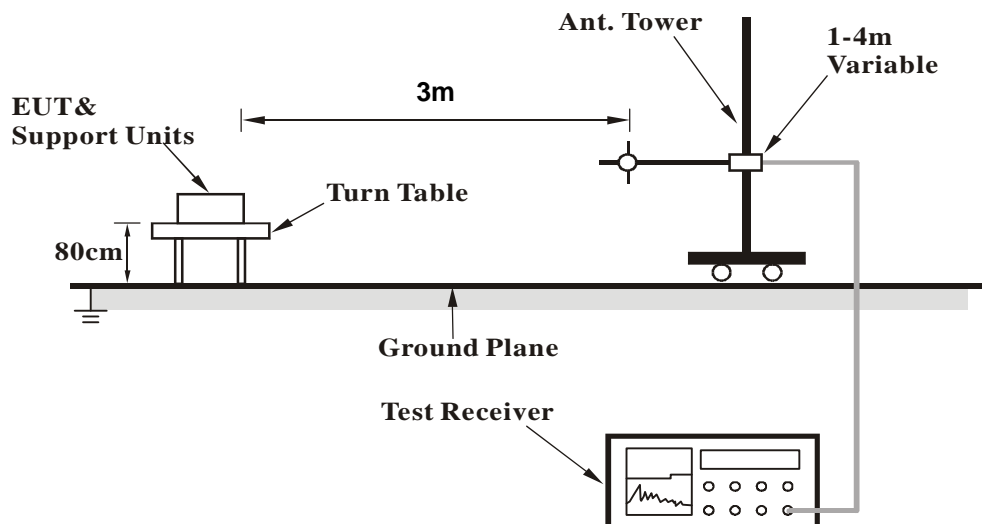

<Frequency Range above 1GHz>

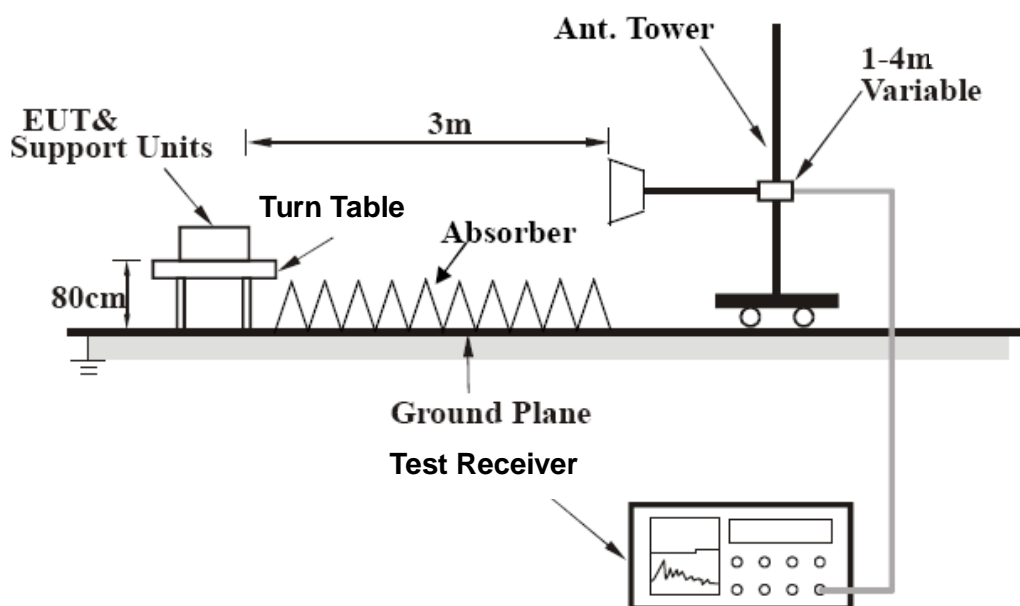

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6



A D T

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11n (HT40)

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	125.01	34.0 QP	43.5	-9.5	1.50 H	305	48.83	-14.83
2	250.00	41.0 QP	46.0	-5.0	1.50 H	73	55.34	-14.31
3	736.11	40.4 QP	46.0	-5.6	1.00 H	333	43.09	-2.72
4	778.79	40.1 QP	46.0	-5.9	1.00 H	267	41.73	-1.61
5	849.99	42.6 QP	46.0	-3.4	1.00 H	153	43.50	-0.88
6	950.00	41.9 QP	46.0	-4.1	1.50 H	227	40.83	1.06

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	40.77	36.5 QP	40.0	-3.5	1.00 V	79	50.54	-14.06
2	62.06	33.1 QP	40.0	-6.9	1.00 V	28	47.11	-13.99
3	75.69	34.2 QP	40.0	-5.8	1.00 V	64	51.52	-17.36
4	250.00	37.6 QP	46.0	-8.4	1.00 V	357	51.90	-14.31
5	375.03	40.3 QP	46.0	-5.7	1.50 V	339	50.80	-10.51
6	849.99	42.5 QP	46.0	-3.5	1.50 V	255	43.42	-0.88

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



ABOVE 1GHz DATA

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	54.6 PK	74.0	-19.4	1.45 H	280	58.27	-3.67
2	2333.30	49.8 AV	54.0	-4.2	1.45 H	280	53.47	-3.67
3	5000.00	58.7 PK	74.0	-15.3	1.43 H	228	52.18	6.52
4	5000.00	52.3 AV	54.0	-1.7	1.43 H	228	45.78	6.52
5	5150.00	69.6 PK	74.0	-4.4	1.00 H	350	62.76	6.84
6	5150.00	49.9 AV	54.0	-4.1	1.00 H	350	43.06	6.84
7	*5180.00	110.5 PK			1.00 H	350	103.57	6.93
8	*5180.00	101.1 AV			1.00 H	350	94.17	6.93
9	5400.00	60.8 PK	74.0	-13.2	1.00 H	15	53.37	7.43
10	5400.00	52.5 AV	54.0	-1.5	1.00 H	15	45.07	7.43
11	#10360.00	49.9 PK	74.0	-24.1	1.38 H	184	35.97	13.93
12	#10360.00	40.1 AV	54.0	-13.9	1.38 H	184	26.17	13.93
13	15540.00	60.4 PK	74.0	-13.6	1.42 H	339	41.22	19.18
14	15540.00	48.2 AV	54.0	-5.8	1.42 H	339	29.02	19.18



A D T

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	55.9 PK	74.0	-18.1	1.35 V	31	59.57	-3.67
2	2333.30	52.6 AV	54.0	-1.4	1.35 V	31	56.27	-3.67
3	5000.00	57.6 PK	74.0	-16.4	1.40 V	279	51.08	6.52
4	5000.00	48.3 AV	54.0	-5.7	1.40 V	279	41.78	6.52
5	5150.00	69.4 PK	74.0	-4.6	1.61 V	102	62.56	6.84
6	5150.00	49.2 AV	54.0	-4.8	1.61 V	102	42.36	6.84
7	*5180.00	109.2 PK			1.61 V	102	102.27	6.93
8	*5180.00	100.6 AV			1.61 V	102	93.67	6.93
9	5400.00	60.1 PK	74.0	-13.9	1.23 V	142	52.67	7.43
10	5400.00	51.3 AV	54.0	-2.7	1.23 V	142	43.87	7.43
11	#10360.00	53.7 PK	74.0	-20.3	1.00 V	14	39.77	13.93
12	#10360.00	44.2 AV	54.0	-9.8	1.00 V	14	30.27	13.93
13	15540.00	66.3 PK	74.0	-7.7	1.26 V	147	47.12	19.18
14	15540.00	53.1 AV	54.0	-0.9	1.26 V	147	33.92	19.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	54.8 PK	74.0	-19.2	1.53 H	282	58.47	-3.67
2	2333.30	50.2 AV	54.0	-3.8	1.53 H	282	53.87	-3.67
3	5000.00	59.4 PK	74.0	-14.6	1.38 H	221	52.88	6.52
4	5000.00	52.7 AV	54.0	-1.3	1.38 H	221	46.18	6.52
5	*5200.00	109.8 PK			1.00 H	356	102.81	6.99
6	*5200.00	100.9 AV			1.00 H	356	93.91	6.99
7	5400.00	60.9 PK	74.0	-13.1	1.00 H	10	53.47	7.43
8	5400.00	52.6 AV	54.0	-1.4	1.00 H	10	45.17	7.43
9	#10400.00	49.6 PK	74.0	-24.4	1.43 H	176	35.72	13.88
10	#10400.00	39.8 AV	54.0	-14.2	1.43 H	176	25.92	13.88
11	15600.00	60.3 PK	74.0	-13.7	1.42 H	337	41.21	19.09
12	15600.00	48.3 AV	54.0	-5.7	1.42 H	337	29.21	19.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	55.6 PK	74.0	-18.4	1.27 V	24	59.27	-3.67
2	2333.30	52.5 AV	54.0	-1.5	1.27 V	24	56.17	-3.67
3	5000.00	57.0 PK	74.0	-17.0	1.41 V	272	50.48	6.52
4	5000.00	47.9 AV	54.0	-6.1	1.41 V	272	41.38	6.52
5	*5200.00	108.6 PK			1.60 V	103	101.61	6.99
6	*5200.00	99.8 AV			1.60 V	103	92.81	6.99
7	5400.00	60.3 PK	74.0	-13.7	1.18 V	148	52.87	7.43
8	5400.00	51.3 AV	54.0	-2.7	1.18 V	148	43.87	7.43
9	#10400.00	53.8 PK	74.0	-20.2	1.00 V	5	39.92	13.88
10	#10400.00	44.2 AV	54.0	-9.8	1.00 V	5	30.32	13.88
11	15600.00	66.4 PK	74.0	-7.6	1.21 V	132	47.31	19.09
12	15600.00	53.1 AV	54.0	-0.9	1.21 V	132	34.01	19.09

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	54.3 PK	74.0	-19.7	1.47 H	266	57.97	-3.67
2	2333.30	49.6 AV	54.0	-4.4	1.47 H	266	53.27	-3.67
3	5000.00	58.4 PK	74.0	-15.6	1.38 H	235	51.88	6.52
4	5000.00	52.0 AV	54.0	-2.0	1.38 H	235	45.48	6.52
5	*5240.00	110.1 PK			1.00 H	352	103.02	7.08
6	*5240.00	101.3 AV			1.00 H	352	94.22	7.08
7	5350.00	56.3 PK	74.0	-17.7	1.00 H	352	48.97	7.33
8	5350.00	45.1 AV	54.0	-8.9	1.00 H	352	37.77	7.33
9	5400.00	61.0 PK	74.0	-13.0	1.00 H	8	53.57	7.43
10	5400.00	52.8 AV	54.0	-1.2	1.00 H	8	45.37	7.43
11	#10480.00	49.5 PK	74.0	-24.5	1.37 H	196	35.29	14.21
12	#10480.00	40.0 AV	54.0	-14.0	1.37 H	196	25.79	14.21
13	15720.00	59.9 PK	74.0	-14.1	1.44 H	344	40.74	19.16
14	15720.00	47.7 AV	54.0	-6.3	1.44 H	344	28.54	19.16



A D T

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	54.6 PK	74.0	-19.4	1.25 V	43	58.27	-3.67
2	2333.30	51.7 AV	54.0	-2.3	1.25 V	43	55.37	-3.67
3	5000.00	57.0 PK	74.0	-17.0	1.42 V	277	50.48	6.52
4	5000.00	47.9 AV	54.0	-6.1	1.42 V	277	41.38	6.52
5	*5240.00	109.6 PK			1.21 V	132	102.52	7.08
6	*5240.00	100.1 AV			1.21 V	132	93.02	7.08
7	5350.00	68.1 PK	74.0	-5.9	1.21 V	132	60.77	7.33
8	5350.00	52.6 AV	54.0	-1.4	1.21 V	132	45.27	7.33
9	5400.00	59.7 PK	74.0	-14.3	1.23 V	137	52.27	7.43
10	5400.00	51.0 AV	54.0	-3.0	1.23 V	137	43.57	7.43
11	#10480.00	53.9 PK	74.0	-20.1	1.05 V	16	39.69	14.21
12	#10480.00	44.4 AV	54.0	-9.6	1.05 V	16	30.19	14.21
13	15720.00	66.3 PK	74.0	-7.7	1.32 V	145	47.14	19.16
14	15720.00	53.2 AV	54.0	-0.8	1.32 V	145	34.04	19.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



802.11n (HT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	54.5 PK	74.0	-19.5	1.45 H	284	58.17	-3.67
2	2333.30	49.9 AV	54.0	-4.1	1.45 H	284	53.57	-3.67
3	5000.00	59.2 PK	74.0	-14.8	1.48 H	234	52.68	6.52
4	5000.00	52.5 AV	54.0	-1.5	1.48 H	234	45.98	6.52
5	5150.00	69.7 PK	74.0	-4.3	1.04 H	336	62.86	6.84
6	5150.00	49.8 AV	54.0	-4.2	1.04 H	336	42.96	6.84
7	*5180.00	110.9 PK			1.04 H	336	103.97	6.93
8	*5180.00	101.6 AV			1.04 H	336	94.67	6.93
9	5400.00	60.5 PK	74.0	-13.5	1.06 H	29	53.07	7.43
10	5400.00	52.4 AV	54.0	-1.6	1.06 H	29	44.97	7.43
11	#10360.00	49.6 PK	74.0	-24.4	1.35 H	180	35.67	13.93
12	#10360.00	40.0 AV	54.0	-14.0	1.35 H	180	26.07	13.93
13	15540.00	60.8 PK	74.0	-13.2	1.46 H	327	41.62	19.18
14	15540.00	48.4 AV	54.0	-5.6	1.46 H	327	29.22	19.18



A D T

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	55.2 PK	74.0	-18.8	1.25 V	23	58.87	-3.67
2	2333.30	52.3 AV	54.0	-1.7	1.25 V	23	55.97	-3.67
3	5000.00	58.4 PK	74.0	-15.6	1.44 V	270	51.88	6.52
4	5000.00	48.8 AV	54.0	-5.2	1.44 V	270	42.28	6.52
5	5150.00	69.0 PK	74.0	-5.0	1.66 V	88	62.16	6.84
6	5150.00	48.9 AV	54.0	-5.1	1.66 V	88	42.06	6.84
7	*5180.00	109.7 PK			1.66 V	88	102.77	6.93
8	*5180.00	100.2 AV			1.66 V	88	93.27	6.93
9	5400.00	60.1 PK	74.0	-13.9	1.17 V	158	52.67	7.43
10	5400.00	51.5 AV	54.0	-2.5	1.17 V	158	44.07	7.43
11	#10360.00	53.9 PK	74.0	-20.1	1.00 V	26	39.97	13.93
12	#10360.00	44.4 AV	54.0	-9.6	1.00 V	26	30.47	13.93
13	15540.00	66.4 PK	74.0	-7.6	1.24 V	149	47.22	19.18
14	15540.00	52.9 AV	54.0	-1.1	1.24 V	149	33.72	19.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	53.7 PK	74.0	-20.3	1.51 H	284	57.37	-3.67
2	2333.30	49.5 AV	54.0	-4.5	1.51 H	284	53.17	-3.67
3	5000.00	58.8 PK	74.0	-15.2	1.48 H	216	52.28	6.52
4	5000.00	52.6 AV	54.0	-1.4	1.48 H	216	46.08	6.52
5	*5200.00	110.2 PK			1.05 H	348	103.21	6.99
6	*5200.00	101.4 AV			1.05 H	348	94.41	6.99
7	5400.00	60.8 PK	74.0	-13.2	1.05 H	11	53.37	7.43
8	5400.00	52.4 AV	54.0	-1.6	1.05 H	11	44.97	7.43
9	#10400.00	50.5 PK	74.0	-23.5	1.40 H	188	36.62	13.88
10	#10400.00	40.4 AV	54.0	-13.6	1.40 H	188	26.52	13.88
11	15600.00	60.7 PK	74.0	-13.3	1.47 H	352	41.61	19.09
12	15600.00	48.3 AV	54.0	-5.7	1.47 H	352	29.21	19.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	55.1 PK	74.0	-18.9	1.36 V	46	58.77	-3.67
2	2333.30	51.8 AV	54.0	-2.2	1.36 V	46	55.47	-3.67
3	5000.00	57.4 PK	74.0	-16.6	1.34 V	264	50.88	6.52
4	5000.00	48.2 AV	54.0	-5.8	1.34 V	264	41.68	6.52
5	*5200.00	108.7 PK			1.64 V	96	101.71	6.99
6	*5200.00	99.9 AV			1.64 V	96	92.91	6.99
7	5400.00	60.8 PK	74.0	-13.2	1.29 V	129	53.37	7.43
8	5400.00	51.8 AV	54.0	-2.2	1.29 V	129	44.37	7.43
9	#10400.00	53.4 PK	74.0	-20.6	1.03 V	0	39.52	13.88
10	#10400.00	43.8 AV	54.0	-10.2	1.03 V	0	29.92	13.88
11	15600.00	66.5 PK	74.0	-7.5	1.29 V	141	47.41	19.09
12	15600.00	53.5 AV	54.0	-0.5	1.29 V	141	34.41	19.09

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	54.4 PK	74.0	-19.6	1.46 H	271	58.07	-3.67
2	2333.30	49.8 AV	54.0	-4.2	1.46 H	271	53.47	-3.67
3	5000.00	59.0 PK	74.0	-15.0	1.41 H	234	52.48	6.52
4	5000.00	52.6 AV	54.0	-1.4	1.41 H	234	46.08	6.52
5	*5240.00	111.3 PK			1.00 H	351	104.22	7.08
6	*5240.00	101.6 AV			1.00 H	351	94.52	7.08
7	5350.00	56.3 PK	74.0	-17.7	1.00 H	351	48.97	7.33
8	5350.00	45.1 AV	54.0	-8.9	1.00 H	351	37.77	7.33
9	5400.00	60.7 PK	74.0	-13.3	1.02 H	28	53.27	7.43
10	5400.00	52.5 AV	54.0	-1.5	1.02 H	28	45.07	7.43
11	#10480.00	49.8 PK	74.0	-24.2	1.36 H	194	35.59	14.21
12	#10480.00	40.2 AV	54.0	-13.8	1.36 H	194	25.99	14.21
13	15720.00	59.9 PK	74.0	-14.1	1.36 H	340	40.74	19.16
14	15720.00	47.8 AV	54.0	-6.2	1.36 H	340	28.64	19.16



A D T

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	54.8 PK	74.0	-19.2	1.24 V	21	58.47	-3.67
2	2333.30	51.8 AV	54.0	-2.2	1.24 V	21	55.47	-3.67
3	5000.00	60.2 PK	74.0	-13.8	1.22 V	133	53.68	6.52
4	5000.00	51.2 AV	54.0	-2.8	1.22 V	133	44.68	6.52
5	*5240.00	110.1 PK			1.43 V	288	103.02	7.08
6	*5240.00	100.2 AV			1.43 V	288	93.12	7.08
7	5350.00	57.9 PK	74.0	-16.1	1.43 V	288	50.57	7.33
8	5350.00	48.7 AV	54.0	-5.3	1.43 V	288	41.37	7.33
9	5400.00	56.9 PK	74.0	-17.1	1.00 V	205	49.47	7.43
10	5400.00	48.1 AV	54.0	-5.9	1.00 V	205	40.67	7.43
11	#10480.00	53.3 PK	74.0	-20.7	1.02 V	16	39.09	14.21
12	#10480.00	44.1 AV	54.0	-9.9	1.02 V	16	29.89	14.21
13	15720.00	67.0 PK	74.0	-7.0	1.24 V	157	47.84	19.16
14	15720.00	53.5 AV	54.0	-0.5	1.24 V	157	34.34	19.16

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (HT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	54.4 PK	74.0	-19.6	1.50 H	273	58.07	-3.67
2	2333.30	50.2 AV	54.0	-3.8	1.50 H	273	53.87	-3.67
3	5000.00	59.2 PK	74.0	-14.8	1.42 H	221	52.68	6.52
4	5000.00	52.6 AV	54.0	-1.4	1.42 H	221	46.08	6.52
5	5150.00	72.5 PK	74.0	-1.5	1.00 H	345	65.66	6.84
6	5150.00	53.9 AV	54.0	-0.1	1.00 H	345	47.06	6.84
7	*5190.00	104.3 PK			1.00 H	345	97.34	6.96
8	*5190.00	96.4 AV			1.00 H	345	89.44	6.96
9	5400.00	60.4 PK	74.0	-13.6	1.00 H	28	52.97	7.43
10	5400.00	52.4 AV	54.0	-1.6	1.00 H	28	44.97	7.43
11	#10380.00	50.5 PK	74.0	-23.5	1.43 H	191	36.59	13.91
12	#10380.00	40.6 AV	54.0	-13.4	1.43 H	191	26.69	13.91
13	15570.00	60.4 PK	74.0	-13.6	1.42 H	330	41.27	19.13
14	15570.00	48.4 AV	54.0	-5.6	1.42 H	330	29.27	19.13



A D T

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	54.8 PK	74.0	-19.2	1.35 V	41	58.47	-3.67
2	2333.30	51.9 AV	54.0	-2.1	1.35 V	41	55.57	-3.67
3	5000.00	57.9 PK	74.0	-16.1	1.38 V	270	51.38	6.52
4	5000.00	48.7 AV	54.0	-5.3	1.38 V	270	42.18	6.52
5	5150.00	53.8 PK	74.0	-20.2	1.62 V	102	46.96	6.84
6	5150.00	52.1 AV	54.0	-1.9	1.62 V	102	45.26	6.84
7	*5190.00	103.4 PK			1.62 V	102	96.44	6.96
8	*5190.00	95.0 AV			1.62 V	102	88.04	6.96
9	5400.00	60.4 PK	74.0	-13.6	1.17 V	127	52.97	7.43
10	5400.00	51.3 AV	54.0	-2.7	1.17 V	127	43.87	7.43
11	#10380.00	53.5 PK	74.0	-20.5	1.00 V	20	39.59	13.91
12	#10380.00	43.9 AV	54.0	-10.1	1.00 V	20	29.99	13.91
13	15570.00	66.5 PK	74.0	-7.5	1.20 V	148	47.37	19.13
14	15570.00	53.1 AV	54.0	-0.9	1.20 V	148	33.97	19.13

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	54.7 PK	74.0	-19.3	1.43 H	272	58.37	-3.67
2	2333.30	50.1 AV	54.0	-3.9	1.43 H	272	53.77	-3.67
3	5000.00	58.9 PK	74.0	-15.1	1.40 H	220	52.38	6.52
4	5000.00	52.4 AV	54.0	-1.6	1.40 H	220	45.88	6.52
5	*5230.00	109.6 PK			1.00 H	350	102.54	7.06
6	*5230.00	100.9 AV			1.00 H	350	93.84	7.06
7	5350.00	56.8 PK	74.0	-17.2	1.00 H	350	49.47	7.33
8	5350.00	46.0 AV	54.0	-8.0	1.00 H	350	38.67	7.33
9	5400.00	60.3 PK	74.0	-13.7	1.01 H	13	52.87	7.43
10	5400.00	52.0 AV	54.0	-2.0	1.01 H	13	44.57	7.43
11	#10460.00	49.9 PK	74.0	-24.1	1.40 H	172	35.78	14.12
12	#10460.00	40.4 AV	54.0	-13.6	1.40 H	172	26.28	14.12
13	15690.00	60.2 PK	74.0	-13.8	1.37 H	340	41.03	19.17
14	15690.00	47.9 AV	54.0	-6.1	1.37 H	340	28.73	19.17



A D T

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2333.30	55.3 PK	74.0	-18.7	1.25 V	24	58.97	-3.67
2	2333.30	52.2 AV	54.0	-1.8	1.25 V	24	55.87	-3.67
3	5000.00	58.1 PK	74.0	-15.9	1.42 V	264	51.58	6.52
4	5000.00	48.6 AV	54.0	-5.4	1.42 V	264	42.08	6.52
5	*5230.00	108.5 PK			1.43 V	284	101.44	7.06
6	*5230.00	99.1 AV			1.43 V	284	92.04	7.06
7	5350.00	57.7 PK	74.0	-16.3	1.43 V	284	50.37	7.33
8	5350.00	48.4 AV	54.0	-5.6	1.43 V	284	41.07	7.33
9	5400.00	60.3 PK	74.0	-13.7	1.21 V	150	52.87	7.43
10	5400.00	51.7 AV	54.0	-2.3	1.21 V	150	44.27	7.43
11	#10460.00	53.9 PK	74.0	-20.1	1.00 V	13	39.78	14.12
12	#10460.00	44.5 AV	54.0	-9.5	1.00 V	13	30.38	14.12
13	15690.00	66.6 PK	74.0	-7.4	1.30 V	137	47.43	19.17
14	15690.00	53.5 AV	54.0	-0.5	1.30 V	137	34.33	19.17

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

4.3 TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.250 ~ 5.350GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.470 ~ 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT ≥ 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

4.3.2 TEST INSTRUMENTS

FOR POWER OUTPUT MEASUREMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	1014008	Apr. 23, 2013	Apr. 22, 2014
Power Sensor	MA2411B	0917122	Apr. 23, 2013	Apr. 22, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 06, 2014

FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Jan. 21, 2014	Jan. 20, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 06, 2014

4.3.3 TEST PROCEDURE

FOR POWER OUTPUT MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 26dB OCCUPIED BANDWIDTH


1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.4 DEVIATION FROM TEST STANDARD


No deviation

4.3.5 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

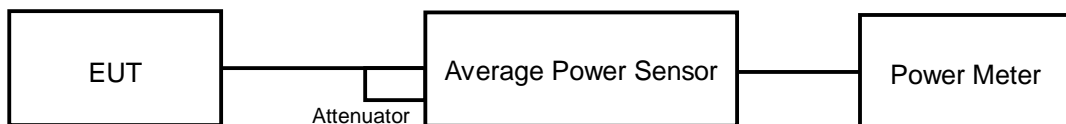

FOR 26dB OCCUPIED BANDWIDTH



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11a

POWER OUTPUT

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	13.71	13.43	45.525	16.58	17	PASS
40	5200	13.39	13.37	43.554	16.39	17	PASS
48	5240	13.25	13.41	43.063	16.34	17	PASS

26dB OCCUPIED BANDWIDTH

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
36	5180	22.95	22.09
40	5200	22.51	21.13
48	5240	22.82	22.14

Note: For output power limitation is determined based on 26dBc bandwidth.

Power Limit = 4dBm + 10logB < UNII Band 1 >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
36	5180	22.09	17.44 > 17
40	5200	21.13	17.24 > 17
48	5240	22.14	17.45 > 17



A D T

802.11n(HT20)

POWER OUTPUT

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	13.51	13.36	44.116	16.45	17	PASS
40	5200	13.51	13.38	44.216	16.46	17	PASS
48	5240	13.57	13.52	45.242	16.56	17	PASS

26dB OCCUPIED BANDWIDTH

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
36	5180	24.43	24.17
40	5200	23.93	22.34
48	5240	24.30	23.00

Note: For output power limitation is determined based on 26dBc bandwidth.

Power Limit = 4dBm + 10logB < UNII Band 1 >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
36	5180	24.17	17.83 > 17
40	5200	22.34	17.49 > 17
48	5240	23.00	17.61 > 17



A D T

802.11n(HT40)
POWER OUTPUT

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	13.81	13.87	48.422	16.85	17	PASS
46	5230	13.86	13.83	48.477	16.86	17	PASS

26dB OCCUPIED BANDWIDTH

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)	
		CHAIN 0	CHAIN 1
38	5190	48.09	49.66
46	5230	49.09	49.56

Note: For output power limitation is determined based on 26dBc bandwidth.

Power Limit = $4\text{dBm} + 10\log B$ < UNII Band 1 >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
38	5190	48.09	20.82 > 17
46	5230	49.09	20.9 > 17

4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 – 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Jan. 21, 2014	Jan. 20, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 06, 2014

4.4.3 TEST PROCEDURES


Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to “free run”.
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6



4.4.7 TEST RESULTS

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	PSD W/O DUTY FACTOR (dBm)		DUTY FACTOR (dB)	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	0.40	0.16	0.15	3.44	4	PASS
40	5200	-0.14	0.71	0.15	3.47	4	PASS
48	5240	0.11	0.46	0.15	3.45	4	PASS

NOTE: 1. Method 1) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$ = 5.01dBi < 6dBi , so the power density limit shall not be reduced.

3. Refer to section 3.4 for duty cycle spectrum plot.

802.11n(HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	PSD W/O DUTY FACTOR (dBm)		DUTY FACTOR (dB)	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
36	5180	-1.00	0.37	0.16	2.91	4	PASS
40	5200	-0.14	0.44	0.16	3.33	4	PASS
48	5240	-0.85	0.06	0.16	2.80	4	PASS

NOTE: 1. Method 1) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$ = 5.01dBi < 6dBi , so the power density limit shall not be reduced.

3. Refer to section 3.4 for duty cycle spectrum plot.



A D T


802.11n(HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	PSD W/O DUTY FACTOR (dBm)		DUTY FACTOR (dB)	TOTAL PSD WITH DUTY FACTOR (dBm)	MAX. LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
38	5190	-2.77	-2.58	0.22	0.56	4	PASS
46	5230	-3.64	-1.95	0.22	0.52	4	PASS

NOTE: 1. Method 1) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2] = 5.01\text{dBi} < 6\text{dBi}$, so the power density limit shall not be reduced.

3. Refer to section 3.4 for duty cycle spectrum plot.

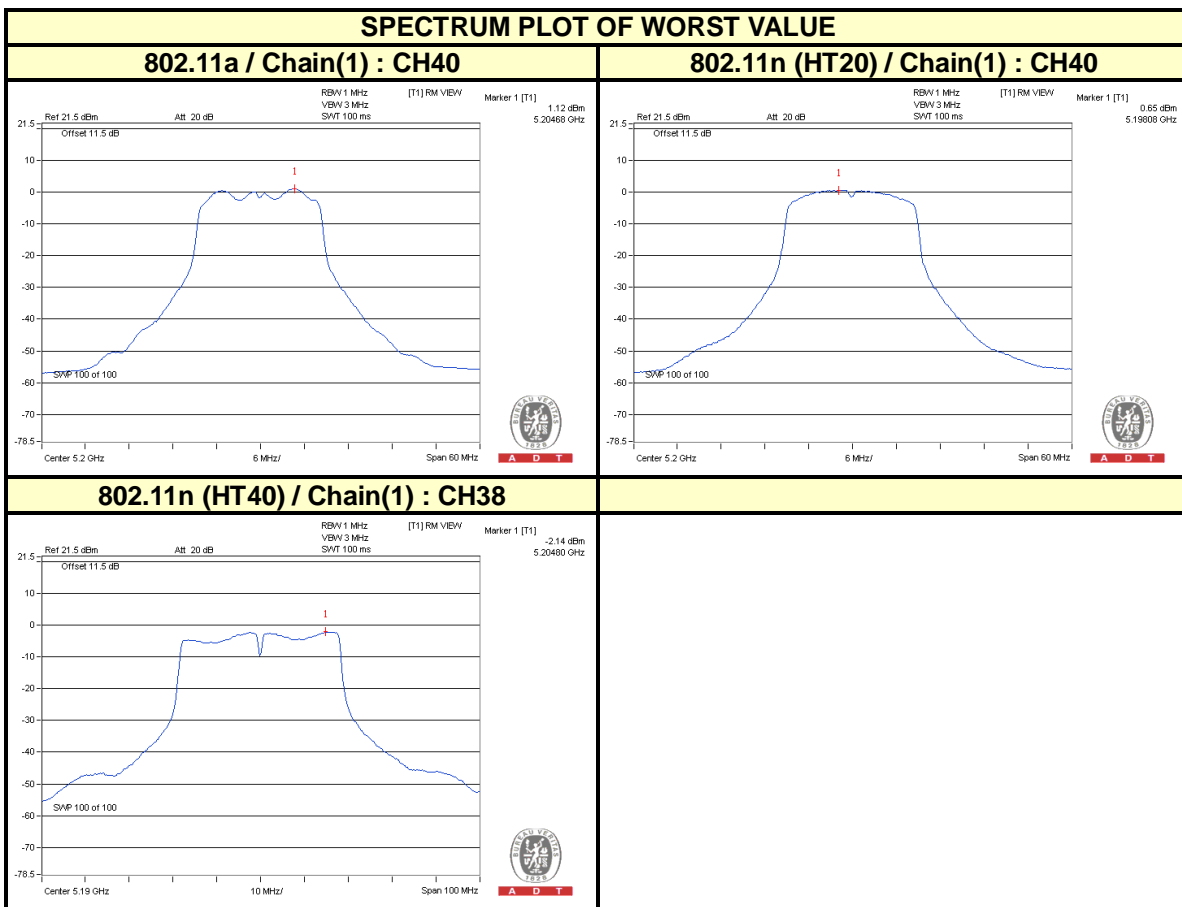

4.5 PEAK POWER EXCURSION MEASUREMENT

4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Jan. 21, 2014	Jan. 20, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 06, 2014


4.5.3 TEST PROCEDURE

1. Set RBW = 1 MHz, VBW \geq 3 MHz, Detector = peak.
2. Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak search function to find the peak of the spectrum.
4. Measure the PPSD.
5. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

4.5.7 TEST RESULTS

MODULATION MODE	MODULATION TYPE	CHAN. FREQ. (MHz)	PEAK VALUE (dBm)	PPSD WITHOUT DUTY FACTOR (dBm)	PPSD WITH DUTY FACTOR (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS /FAIL
802.11a	BPSK	5240	9.29	0.58	0.73	8.56	13	PASS
	QPSK		10.25	0.11	0.39	9.86	13	PASS
	16QAM		10.38	-0.19	0.33	10.05	13	PASS
	64QAM		9.71	-0.4	0.51	9.2	13	PASS
802.11n (HT20)	BPSK	5240	9.33	-0.58	-0.42	9.75	13	PASS
	QPSK		10.67	-0.71	-0.41	11.08	13	PASS
	16QAM		10.21	-0.74	-0.21	10.42	13	PASS
	64QAM		9.37	-1.09	-0.19	9.56	13	PASS
802.11n (HT40)	BPSK	5230	6.54	-2.7	-2.48	9.02	13	PASS
	QPSK		7.9	-2.19	-1.78	9.68	13	PASS
	16QAM		8.45	-1.94	-1.23	9.68	13	PASS
	64QAM		8.58	-2.25	-1.16	9.74	13	PASS



NOTE: 1. Refer to section 3.4 for duty cycle spectrum plot.





A D T

SPECTRUM PLOT OF WORST VALUE



802.11a / 16QAM

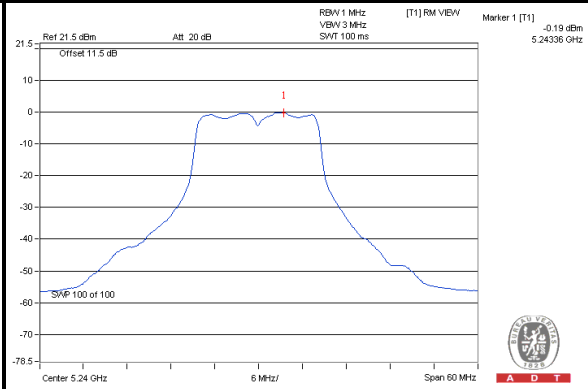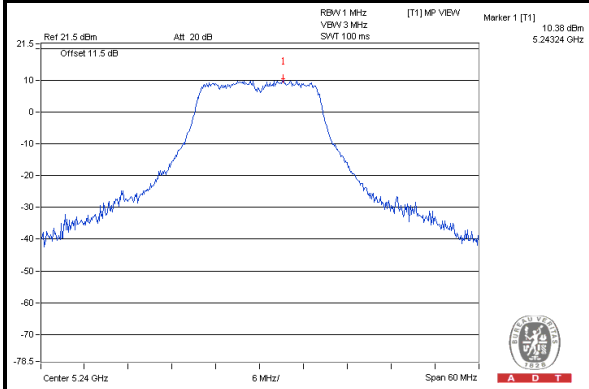

802.11n (HT20) / QPSK

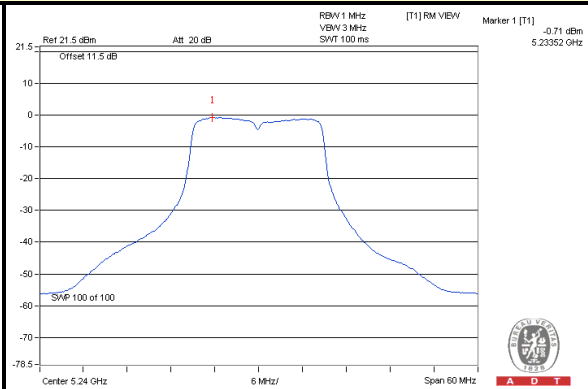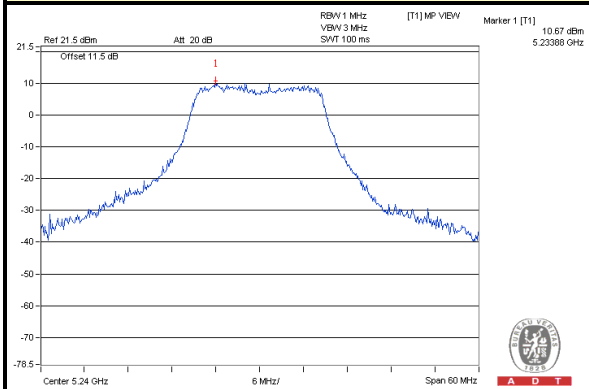

802.11n (HT40) / 64QAM

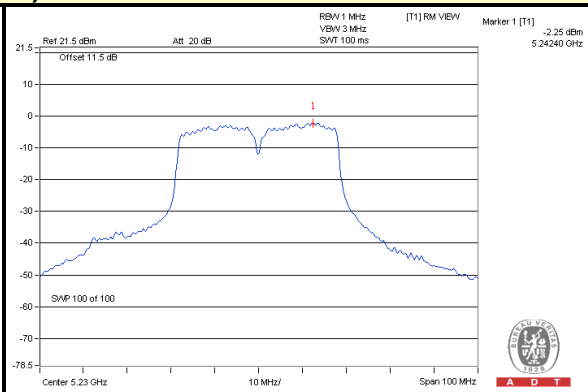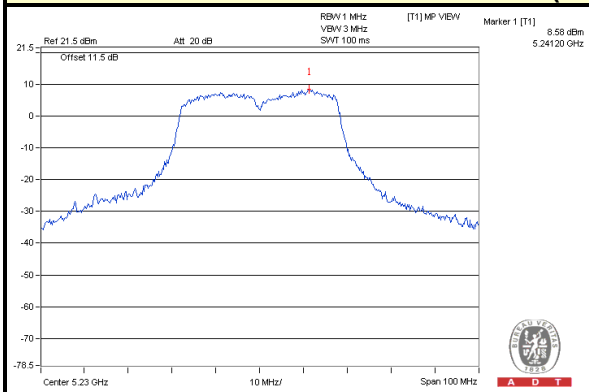



A D T

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100036	Jan. 21, 2014	Jan. 20, 2015
Temperature & Humidity Chamber GIANTFORCE	GTH-150-40-S P-AR	MAA0812-008	Jan. 13, 2014	Jan. 12, 2015

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 06, 2014


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

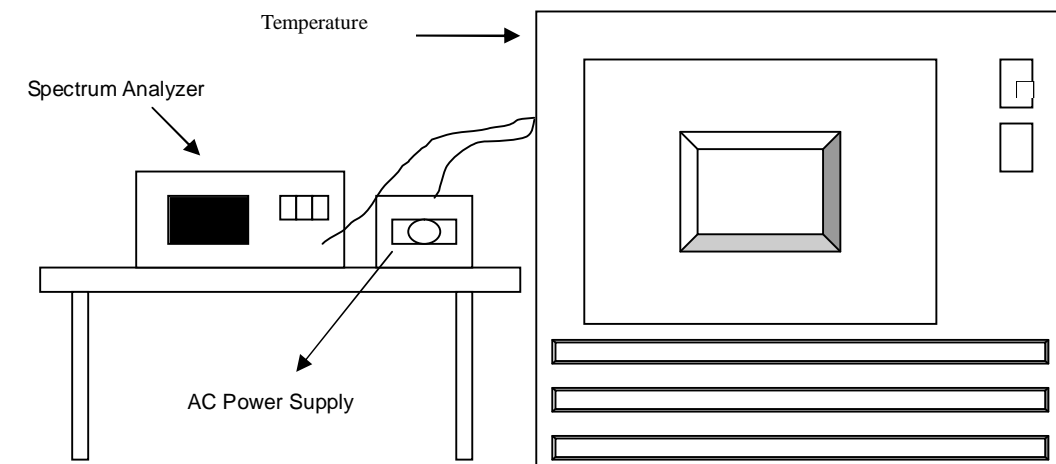

4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
50	120	5239.9915	-0.00016	5239.9961	-0.00007	5239.9906	-0.00018	5239.994	-0.00011
40	120	5240.0172	0.00033	5240.0273	0.00052	5240.0235	0.00045	5240.0206	0.00039
30	120	5240.0054	0.00010	5240.0023	0.00004	5240.0097	0.00019	5240.0074	0.00014
20	120	5239.9878	-0.00023	5239.9867	-0.00025	5239.9886	-0.00022	5239.9874	-0.00024
10	120	5240.0032	0.00006	5240.0024	0.00005	5240.0033	0.00006	5239.9964	-0.00007
0	120	5240.0264	0.00050	5240.0201	0.00038	5240.0225	0.00043	5240.0209	0.00040
-10	120	5240.0006	0.00001	5240.0016	0.00003	5240.0057	0.00011	5240.0012	0.00002
-20	120	5239.9804	-0.00037	5239.9742	-0.00049	5239.9834	-0.00032	5239.9759	-0.00046
-30	120	5239.9933	-0.00013	5239.9972	-0.00005	5240.001	0.00002	5239.9943	-0.00011

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5240MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	%	(MHz)	%	(MHz)	%	(MHz)	%
20	138	5239.9879	-0.00023	5239.9872	-0.00024	5239.9884	-0.00022	5239.9867	-0.00025
	120	5239.9878	-0.00023	5239.9867	-0.00025	5239.9886	-0.00022	5239.9874	-0.00024
	102	5239.9887	-0.00022	5239.986	-0.00027	5239.9886	-0.00022	5239.9881	-0.00023



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---