

Report No.: HKES160500092602

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 159

### **FCC REPORT**

Application No: HKES1605000926IT

Applicant: Pismo Labs Technology Limited

Product Name: Peplink/ Pepwave/ Pismo Labs wireless product

Model No.(EUT): AP One Rugged

Add Model No.: Pismo AC6, Device Connector, Device Connector Rugged

FCC ID: U8G-P1AC6

Standards: 47 CFR Part 15, Subpart C (2015)

**Date of Receipt:** 2016-05-23

**Date of Test:** 2016-05-25 to 2016-05-27

**Date of Issue:** 2016-06-22

Test Result: PASS \*

. \* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: HKES160500092602

Page: 2 of 159

### 2 Version

Revision Record								
Version	Chapter	Date	Modifier	Remark				
00		2016-06-13		Original				

Authorized for issue by:		
	Hank yan.	2016-05-27
Tested By	(Hank Yan) /Project Engineer	Date
	Joyce Shi	2016-06-22
Prepared By	(Joyce Shi) /Clerk	Date
	Eric Fu	2016-06-22
Checked By	(Eric Fu) /Reviewer	Date



Report No.: HKES160500092602

Page: 3 of 159

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS



Report No.: HKES160500092602

Page: 4 of 159

#### 4 Contents

			Page
1	CO	VER PAGE	1
2	VEF	RSION	2
3	TES	ST SUMMARY	3
4		NTENTS	4
4	COI	VI EN 13	
5	GEI	NERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT AND MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7 5.8	DEVIATION FROM STANDARDS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	
6	TES	ST RESULTS AND MEASUREMENT DATA	12
	6.1	ANTENNA REQUIREMENT	12
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	17
	6.4	6DB OCCUPY BANDWIDTH	
	6.5	Power Spectral Density	
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.7	RF CONDUCTED SPURIOUS EMISSIONS	
	6.8	RADIATED SPURIOUS EMISSIONS	
	6.8. 6.8.		
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7		OTOGRAPHS - EUT TEST SETUP	
•			
	7.1	CONDUCTED EMISSION	
	7.2 7.3	RADIATED EMISSIONRADIATED SPURIOUS EMISSION	
	_		-
8	PHO	DTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	159



Report No.: HKES160500092602

Page: 5 of 159

#### 5 General Information

#### 5.1 Client Information

Applicant:	Pismo Labs Technology Limited			
Address of Applicant:	FLAT/RM A5, 5/F HK SPINNERS IND BLDG PHASE 6, 481 CASTLE PEAK ROAD, CHEUNG SHA WAN, HONG KONG			

#### 5.2 General Description of EUT

Product Name:	Peplink/ Pepwave/ Pismo Labs wireless product
Model No.:	AP One Rugged
Type of Modulation:	IEEE for 802.11b: DSSS (CCK, DQPSK, DBPSK)
	IEEE for 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK)
	IEEE for 802.11n (HT20 and HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Operating Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
	IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Number:	IEEE 802.11b/g, IEEE 802.11n(HT20): 13 Channels
	IEEE 802.11n(HT40): 7 Channels
Channels Step:	Channels with 5MHz step
Antenna Type:	Dedicated Antenna
Antenna Gain:	3dBi
AC Adaptor:	I.T.E Power Supply:
	Model: MU24-Y120200-A1
	Intput: AC 100-240V, 50/60Hz, 0.7A
	Output: DC 12V, 2A
	Or DC 12V-36V

#### Remark:

Model No.: AP One Rugged, Pismo AC6, Device Connector, Device Connector Rugged

Only the model AP One Rugged was tested, since the circuit design, PCB layout, electrical components used, internal wiring and functions were identical for the above models, only different on model names for the marketing requirement.



Report No.: HKES160500092602

Page: 6 of 159

Operation Frequency each of channel(802.11b/g/n HT20)										
Channel	Fr	equency	Channe	I Frequency	Channel	Fre	quency	Chan	nel	Frequency
1	24	112MHz	4	2427MHz	7	244	12MHz	10	)	2457MHz
2	24	117MHz	5	2432MHz	8	244	17MHz	11		2462MHz
3	24	122MHz	6	2437MHz	9	245	2452MHz			
Operation F	requ	ency each	of channe	el(802.11n HT40	)					
Channe		Frequ	ency	Channel	Frequen	су	Chan	nel		Frequency
3 2422MHz		6	2437MHz		9			2452MHz		
4		2427	ИНz	7	2442MHz					
5 2432MHz		8	2447MH	lz						

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

#### For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

#### For 802.11n (HT40):

, ,	
Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz



Report No.: HKES160500092602

Page: 7 of 159

#### 5.3 Test Environment and Mode

Operating Environment:						
Temperature:	25.0 °C					
Humidity:	55% RH					
Atmospheric Pressure:	1020 mbar					
Test mode:						
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all					
	kind of data rate.					

#### 5.4 Description of Support Units

The EUT has been tested independent unit.

#### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: HKES160500092602

Page: 8 of 159

#### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### VCC

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### • FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.



Report No.: HKES160500092602

Page: 9 of 159

### 5.10Equipment List

	Conducted Emission								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13			
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2015-10-09	2016-10-09			
3	LISN	ETS- LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25			
4	8 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T8- 02	EMC0120	2015-08-30	2016-08-30			
5	4 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T4- 02	EMC0121	2015-08-30	2016-08-30			
6	2 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T2- 02	EMC0122	2015-08-30	2016-08-30			
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25			
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09			



Report No.: HKES160500092602

Page: 10 of 159

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2015-10-09	2016-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2015-10-09	2016-10-09
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEL0198	2016-05-13	2017-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2016-05-13	2017-05-13
3	EMI Test software	AUDIX	E3	SEL0201	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0202	2016-05-13	2017-05-13
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-11-15	2016-11-15
6	Amplifier (0.1-1300MHz)	HP	8447D	SEL0153	2015-10-09	2016-10-09
7	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEL0311	2015-06-14	2016-06-14
8	Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24
9	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEL0319	2015-10-09	2016-10-09
10	Band filter	Amindeon	Asi 3314	SEL0094	2016-05-13	2017-05-13



Report No.: HKES160500092602

Page: 11 of 159

	RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2015-10-17	2016-10-17
3	Barometer	ChangChun	DYM3	SEM002-01	2016-05-13	2017-05-13
4	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
5	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2015-10-09	2016-10-09



Report No.: HKES160500092602

Page: 12 of 159

#### 6 Test results and Measurement Data

#### 6.1 Antenna Requirement

Standard requirement

47 CFR Part 15C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**



The antenna is integrated antenna and no consideration of replacement. The best case gain of the antenna is 3dBi, and directional gain is 7.77dBi.



Report No.: HKES160500092602

Page: 13 of 159


#### 6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207					
Test Method:	ANSI C63.10: 2013, section 6.2					
Test Frequency Range:	150kHz to 30MHz					
Limit:	F (AUL.)	Limit (c	Limit (dBuV)			
	Frequency range (MHz)	Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
	* Decreases with the logarithm	n of the frequency.		1		
Test Procedure:	<ol> <li>The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT</li> </ol>					
	was placed on the horizontal ground reference plane,  4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.  5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.					



Report No.: HKES160500092602

Page: 14 of 159

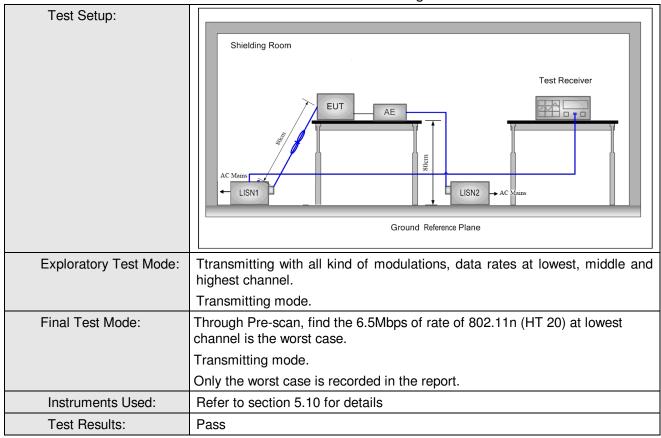



Report No.: HKES160500092602


Page: 15 of 159

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

#### Live Line:

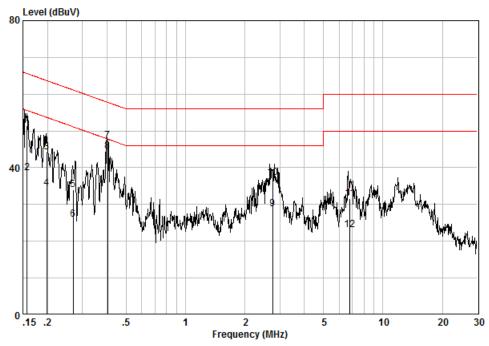

Site : Shielding Room
Condition : CE LINE
Job.No : 0926IT
Test Mode : TX mode


	Freq	Cable Loss	LISN Factor	Read Level		Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15723	0.02	9.59	41.76	51.37	65.61	-14.24	QP
2	0.15723	0.02	9.59	28.98	38.59	55.61	-17.02	AVERAGE
3	0.19817	0.02	9.60	34.70	44.32	63.69	-19.37	QP
4	0.19817	0.02	9.60	24.81	34.43	53.69	-19.26	AVERAGE
5	0.26900	0.01	9.60	24.38	33.99	61.15	-27.16	QP
6	0.26900	0.01	9.60	16.32	25.93	51.15	-25.22	AVERAGE
7	0.40220	0.01	9.60	37.59	47.20	57.81	-10.61	QP
8	0.40220	0.01	9.60	34.78	44.39	47.81	-3.42	AVERAGE
9	2.762	0.02	9.62	19.12	28.76	46.00	-17.24	AVERAGE
10	2.776	0.02	9.62	27.65	37.29	56.00	-18.71	QP
11	6.820	0.01	9.68	21.95	31.63	60.00	-28.37	QP
12	6.820	0.01	9.68	13.42	23.11	50.00	-26.89	AVERAGE



Report No.: HKES160500092602

Page: 16 of 159

#### Neutral Line:

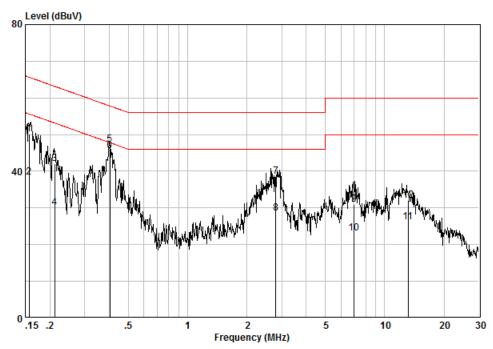

Site : Shielding Room Condition : CE NEUTRAL Job.No : 0926IT Test Mode : TX mode

	Freq	Cable Loss	LISN Factor	Read Level		Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15700	0.02	9.61	40.41	50.04	65.62	-15.58	QP
2	0.15700	0.02	9.61	28.74	38.37	55.62	-17.25	AVERAGE
3	0.21114	0.02	9.62	32.52	42.15	63.16	-21.01	QP
4	0.21114	0.02	9.62	20.44	30.08	53.16	-23.09	AVERAGE
5	0.40230	0.01	9.62	37.68	47.31	57.81	-10.49	QP
6 @	0.40230	0.01	9.62	35.84	45.47	47.81	-2.34	AVERAGE
7	2.803	0.02	9.67	28.83	38.52	56.00	-17.48	QP
8	2.803	0.02	9.67	18.76	28.45	46.00	-17.55	AVERAGE
9	6.998	0.01	9.74	21.24	30.99	60.00	-29.01	QP
10	6.998	0.01	9.74	13.42	23.17	50.00	-26.84	AVERAGE
11	13.124	0.01	9.86	16.25	26.13	50.00	-23.87	AVERAGE
12	13.124	0.01	9.86	22.18	32.06	60.00	-27.94	QP

#### Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: HKES160500092602

Page: 17 of 159

### 6.3 Conducted Peak Output Power

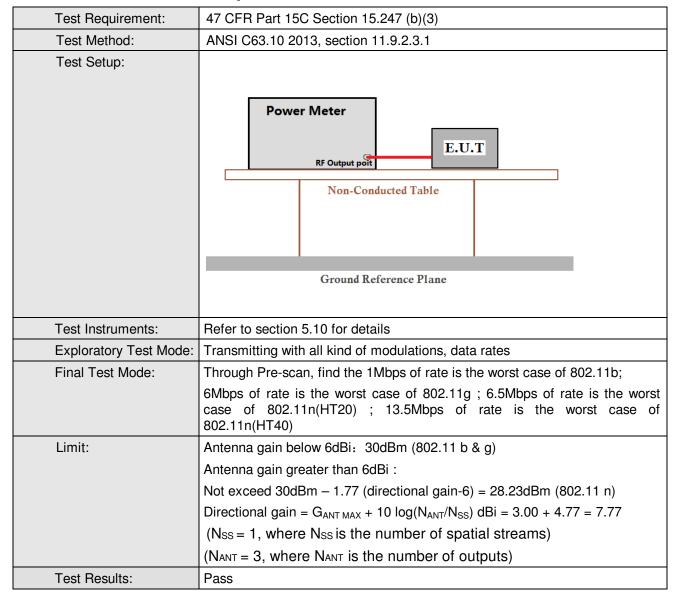



Report No.: HKES160500092602

Page: 18 of 159

Pre-scan und	Pre-scan under all rate at lowest channel 1								
Mode	802.11b								
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps					
Power (dBm)	9.91	9.85	9.90	9.84					
Mode	802.11g								
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
Power (dBm)	14.50	14.45	14.43	14.32	14.46	14.39	14.27	14.49	
Mode				802.11	n(HT20)				
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps	
Power (dBm)	17.54	17.49	17.41	17.50	17.51	17.40	17.38	17.51	
Mode	802.11n(HT40)								
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps	
Power (dBm)	12.71	12.68	12.70	12.65	12.58	12.51	12.63	12.60	

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).



Report No.: HKES160500092602

Page: 19 of 159

#### **Measurement Data**


802.11b mode								
Test channel	Pe	Peak Output Power (dBm)			Limit (dBm)	Result		
rest chamilei	Ant	i. 1 A	nt. 2	Ant. 3	Lilliit (dbill)	nesuit		
Lowest	9.9	91 9	9.64	9.16	30.00	Pass		
Middle	8.8	30 9	9.71	8.84	30.00	Pass		
Highest	7.9	95 9	9.70	9.87	30.00	Pass		
			8	02.11g mo	de			
Test channel	Pe	ak Outpu	ıt Powe	r (dBm)	Limit (dBm)	Result		
rest chamilei	Ant	i. 1 A	nt. 2	Ant. 3	Lilliit (dbill)	nesuit		
Lowest	14.	50 1	3.82	13.27	30.00	Pass		
Middle	13.	40 1	3.86	13.08	30.00	Pass		
Highest	12.	12.88 14.0		13.58	30.00	Pass		
			802.	11n(HT20)	mode			
Test channel	Pea	ık Output	Power	(dBm)	Limit (dBm)	Result		
rest channel	Ant. 1	Ant. 2	Ant.	3 Total	Lillill (dbill)	nesuit		
Lowest	13.20	12.84	12.22	2 17.54	28.23	Pass		
Middle	12.12	12.90	12.13	3 17.17	28.23	Pass		
Highest	11.60	12.84	12.53	3 17.13	28.23	Pass		
			802.	11n(HT40)	mode			
Test channel	Pea	ık Output	Power	(dBm)	Limit (dBm)	Result		
rest channel	Ant. 1	Ant. 2	Ant.	3 Total	Lillill (dbill)	nesuit		
Lowest	8.49	7.44	7.81	12.71	28.23	Pass		
Middle	7.28	7.58	7.73	12.31	28.23	Pass		
Highest	6.82	6.69	7.44	11.77	28.23	Pass		



Report No.: HKES160500092602

Page: 20 of 159

#### 6.4 6dB Occupy Bandwidth

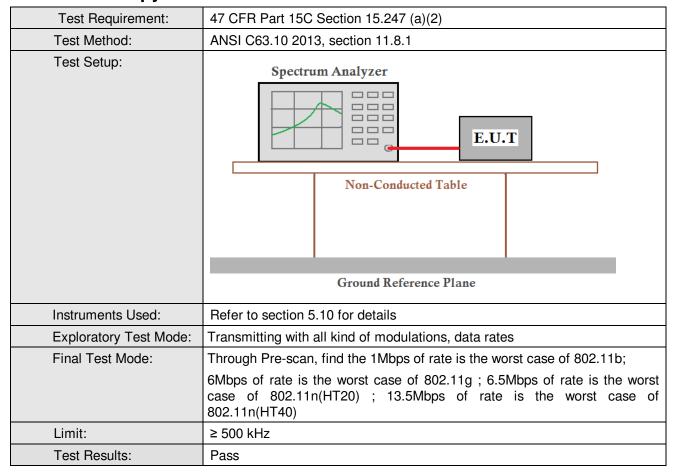



Report No.: HKES160500092602

Page: 21 of 159

#### **Measurement Data**

inicasurement Data										
	802.11b mode									
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result							
Lowest	7.11	≥500	Pass							
Middle	7.11	≥500	Pass							
Highest	7.11	≥500	Pass							
	802.11g mode									
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result							
Lowest	16.41	≥500	Pass							
Middle	16.41	≥500	Pass							
Highest	16.41	≥500	Pass							
	802.11n(HT20) mode									
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result							
Lowest	17.61	≥500	Pass							
Middle	17.64	≥500	Pass							
Highest	17.67	≥500	Pass							
	802.11n(HT40)mode									
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result							
Lowest	36.18	≥500	Pass							
Middle	35.88	≥500	Pass							
Highest	35.88	≥500	Pass							




Report No.: HKES160500092602


Page: 22 of 159

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

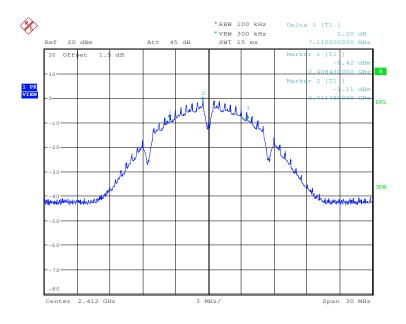

Test mode: 802.11b Test channel: Middle

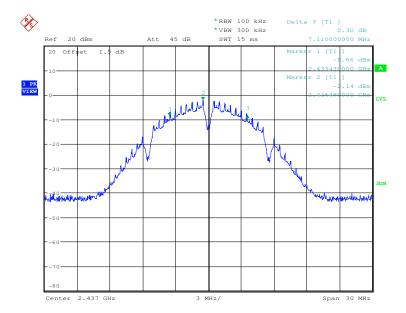





Report No.: HKES160500092602

Page: 23 of 159

Test mode: 802.11b Test channel: Highest

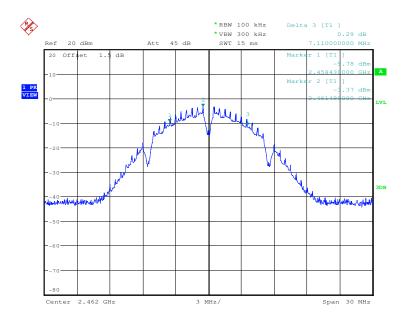



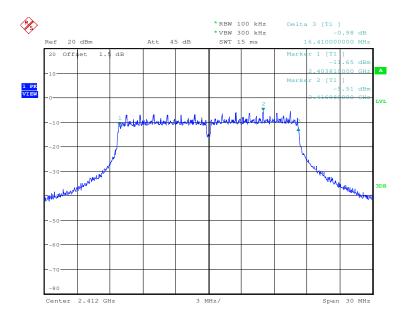





Report No.: HKES160500092602

Page: 24 of 159

Test mode: 802.11g Test channel: Middle

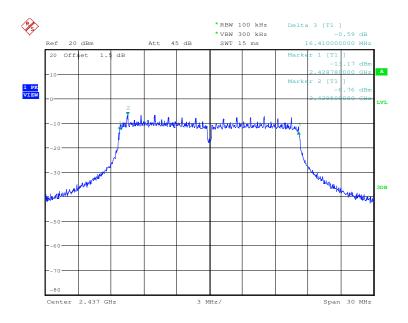



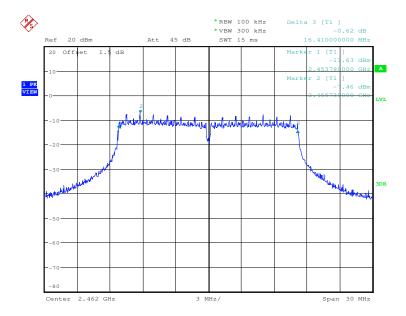





Report No.: HKES160500092602

Page: 25 of 159

Test mode: 802.11n(HT20) Test channel: Lowest

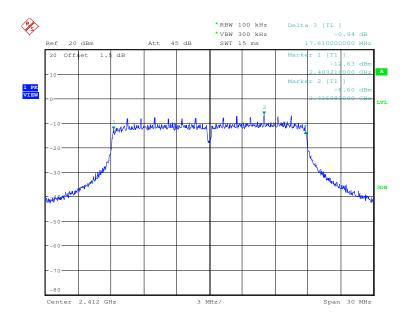



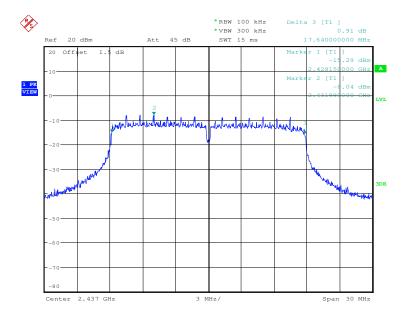





Report No.: HKES160500092602

Page: 26 of 159

Test mode: 802.11n(HT20) Test channel: Highest

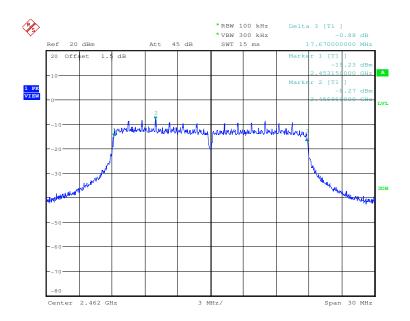



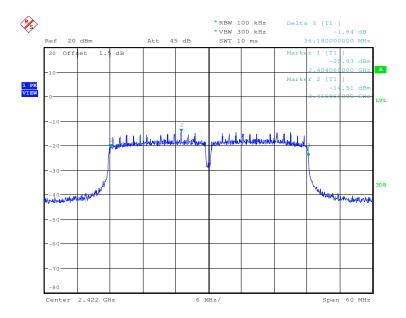





Report No.: HKES160500092602

Page: 27 of 159

Test mode: 802.11n(HT40) Test channel: Middle

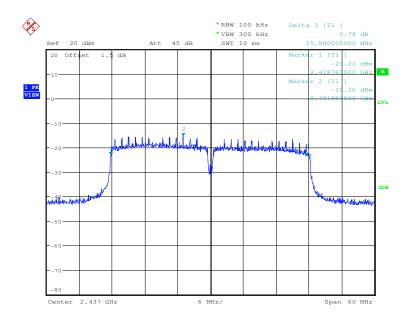



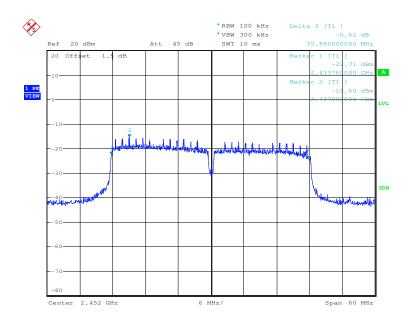



Report No.: HKES160500092602

Page: 28 of 159

### 6.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)					
Test Method:	ANSI C63.10 2013, section 11.10.2					
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Test Instruments:	Refer to section 5.10 for details					
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates					
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;					
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)					
Limit:	Antenna gain below 6dBi: 8dBm/3kHz (802.11 b & g)					
	Antenna gain greater than 6dBi :					
	Not exceed 8dBm/3kHz - 1.77 (directional gain-6) = 6.23dBm (802.11 n)					
	Directional gain = $G_{ANT MAX}$ + 10 log( $N_{ANT}/N_{SS}$ ) dBi = 3.00 + 4.77 = 7.77					
	$(N_{SS} = 1, where N_{SS} is the number of spatial streams)$					
	(Nant = 3, where Nant is the number of outputs)					
Test Results:	Pass					



Report No.: HKES160500092602

Page: 29 of 159

#### **Measurement Data**

			802.11	b mode				
Test channel	Power S	pectral De	ensity (d	Bm/3kHz)	Limit (dBm/3kHz)	Result		
	Ant.1	An	t.2	Ant.3				
Lowest	-15.29	-16	.22	-17.20	≤8.00	Pass		
Middle	-17.05	-15	.99	-17.18	≤8.00	Pass		
Highest	-18.02	-16	5.08	-15.45	≤8.00	Pass		
			802.11	g mode				
Test channel	Power S	pectral De	ensity (d	Bm/3kHz)	Limit (dBm/3kHz)	Result		
	Ant.1	An	t.2	Ant.3				
Lowest	-19.73	-20	.33	-20.62	≤8.00	Pass		
Middle	-20.56	-19	.12	-20.36	≤8.00	Pass		
Highest	-21.52	-19	.72	-19.93	≤8.00	Pass		
		80	)2.11n(H	IT20) mode				
Test channel	Power S	pectral De	ensity (d	Bm/3kHz)	Limit (dBm/3kHz)	Result		
	Ant.1	Ant.2	Ant.3	Total				
Lowest	-20.43	-21.74	-21.74	-16.48	≤6.23	Pass		
Middle	-21.76	-21.35	-21.94	-16.90	≤6.23	Pass		
Highest	-23.22	-21.39	-21.35	-17.13	≤6.23	Pass		
	802.11n(HT40) mode							
Test channel	Power S	pectral De	ctral Density (dBm/3kHz)		Limit (dBm/3kHz)	Result		
	Ant.1	Ant.2	Ant.3	Total				
Lowest	-28.69	-28.76	-28.48	-23.87	≤6.23	Pass		
Middle	-29.41	-29.53	-29.53	-24.71	≤6.23	Pass		
Highest	-28.86	-28.79	-29.92	-24.38	≤6.23	Pass		




Report No.: HKES160500092602

Page: 30 of 159


#### Test plot as follows:

#### Antenna 1

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

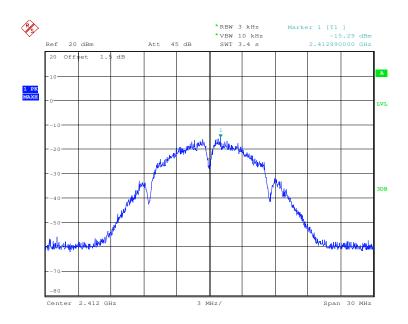

Test mode: 802.11b Test channel: Middle

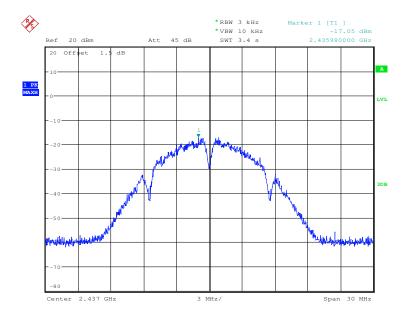





Report No.: HKES160500092602

Page: 31 of 159

Test mode: 802.11b Test channel: Highest

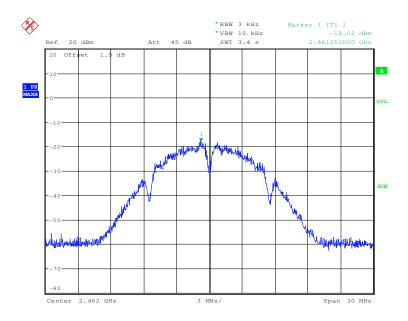



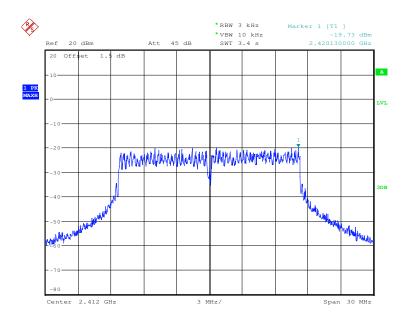





Report No.: HKES160500092602

Page: 32 of 159

Test mode: 802.11g Test channel: Middle

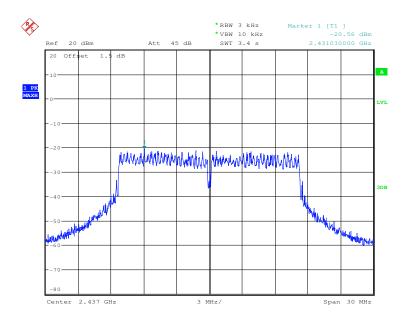



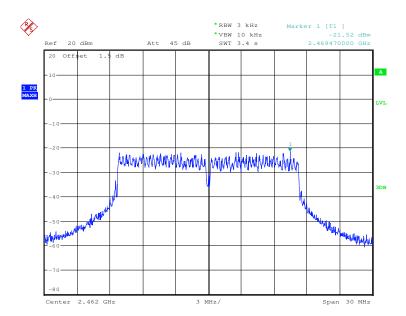





Report No.: HKES160500092602

Page: 33 of 159

Test mode: 802.11n(HT20) Test channel: Lowest

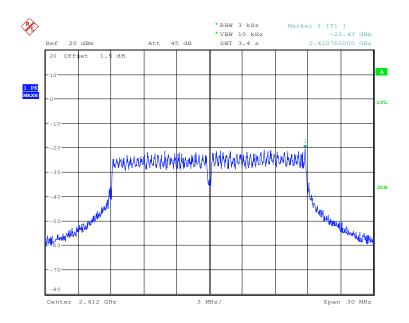



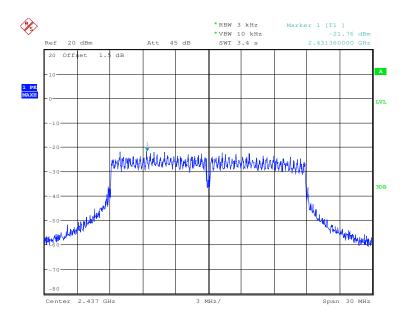





Report No.: HKES160500092602

Page: 34 of 159

Test mode: 802.11n(HT20) Test channel: Highest

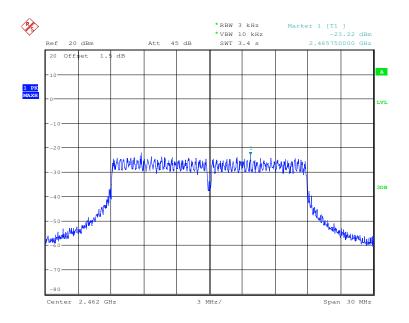



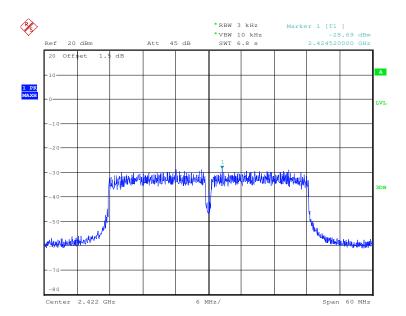





Report No.: HKES160500092602

Page: 35 of 159

Test mode: 802.11n(HT40) Test channel: Middle

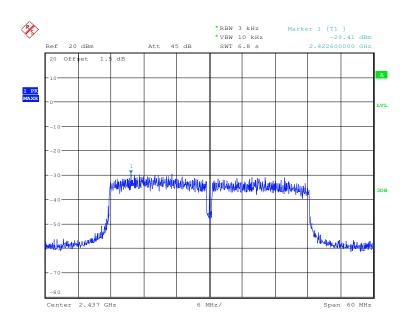



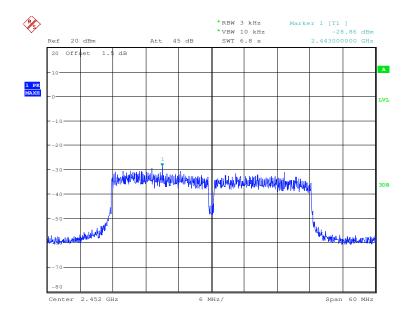




Report No.: HKES160500092602


Page: 36 of 159

#### Antenna 2

Test mode: 802.11b Test channel: Lowest

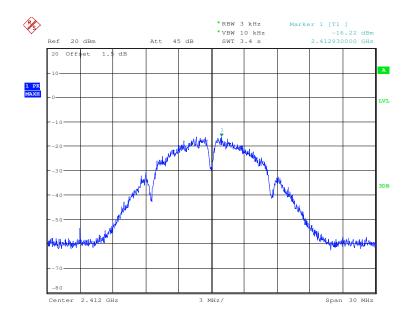




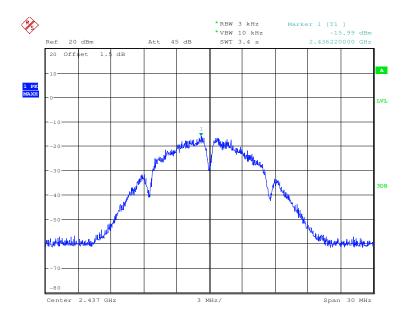




Report No.: HKES160500092602

Page: 37 of 159

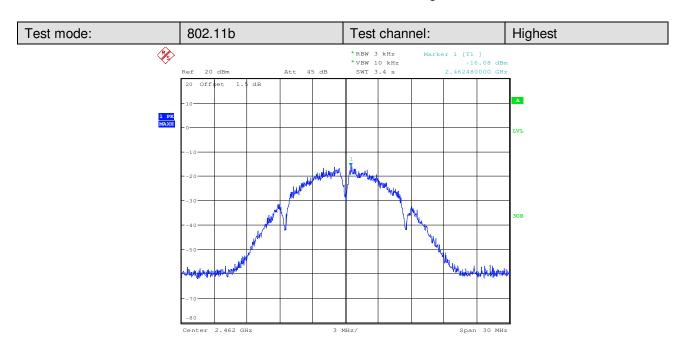



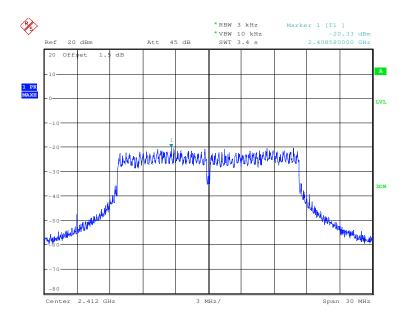





Report No.: HKES160500092602

Page: 38 of 159

Test mode: 802.11g Test channel: Middle

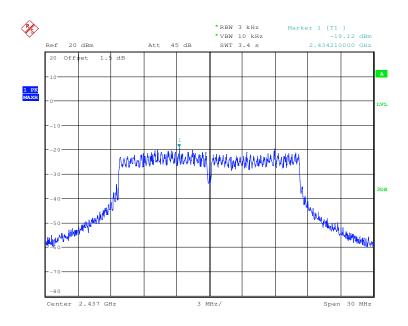

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

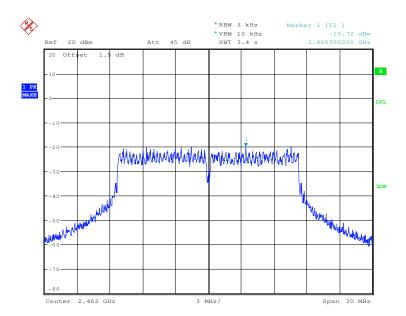





Report No.: HKES160500092602

Page: 39 of 159

Test mode: 802.11n(HT20) Test channel: Lowest

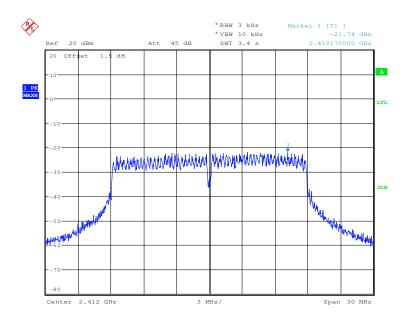

Test mode:	802.11n(HT20)	Test channel:	Middle
	( )		

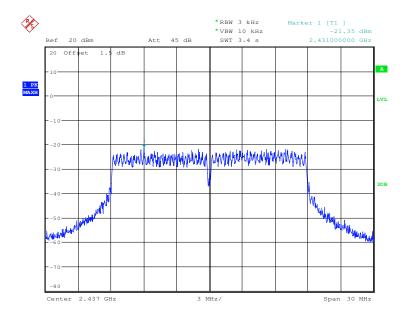





Report No.: HKES160500092602

Page: 40 of 159

Test mode: 802.11n(HT20) Test channel: Highest

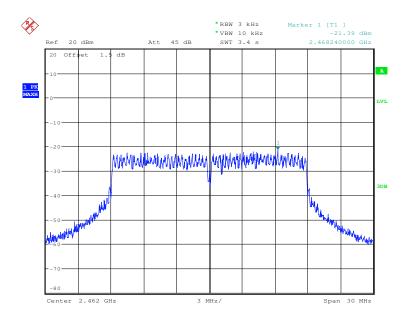



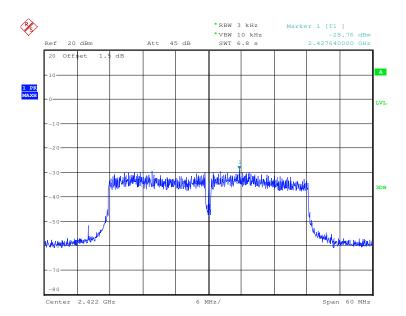





Report No.: HKES160500092602

Page: 41 of 159

Test mode: 802.11n(HT40) Test channel: Middle

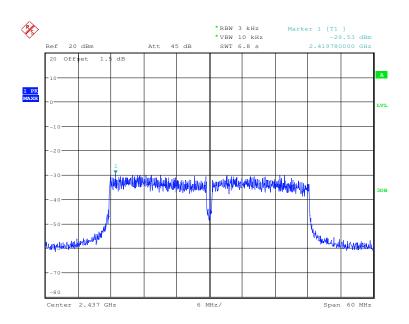



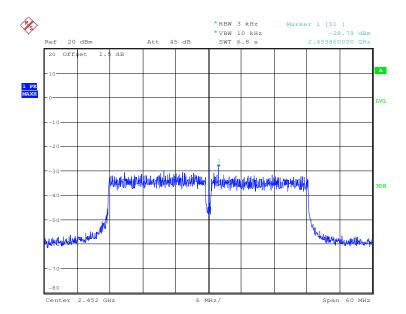




Report No.: HKES160500092602


Page: 42 of 159

#### Antenna 3

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

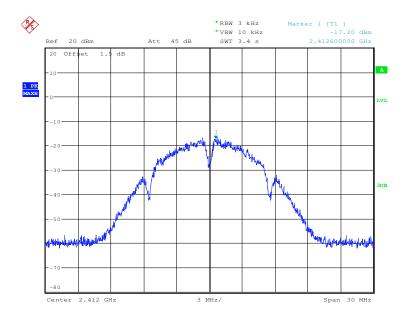

Test mode: 802.11b Test channel: Middle

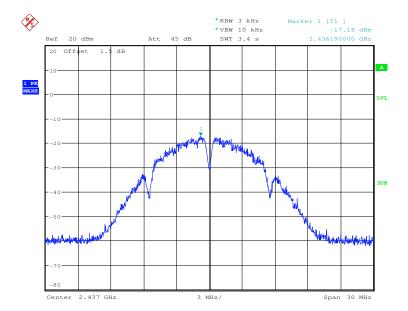





Report No.: HKES160500092602

Page: 43 of 159

Test mode: 802.11b Test channel: Highest

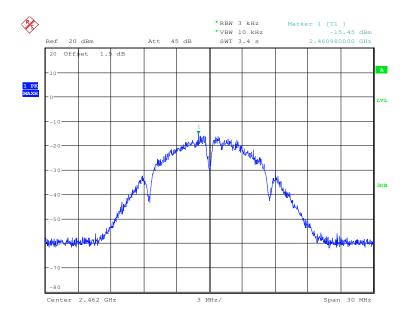



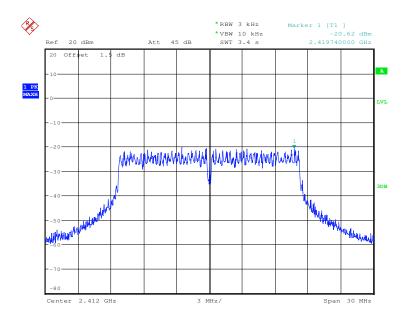





Report No.: HKES160500092602

Page: 44 of 159

Test mode: 802.11g Test channel: Middle

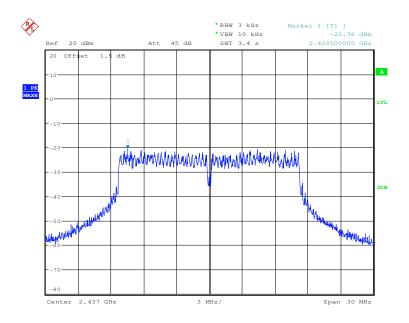



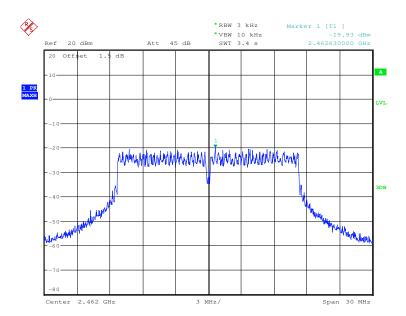





Report No.: HKES160500092602

Page: 45 of 159

Test mode: 802.11n(HT20) Test channel: Lowest

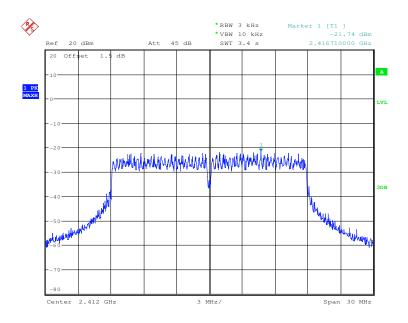



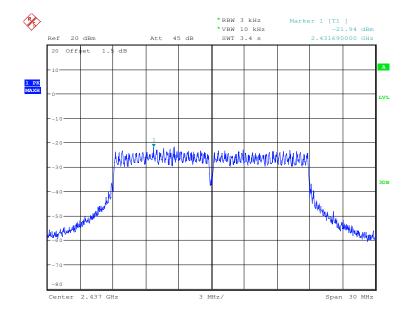





Report No.: HKES160500092602

Page: 46 of 159

Test mode: 802.11n(HT20) Test channel: Highest

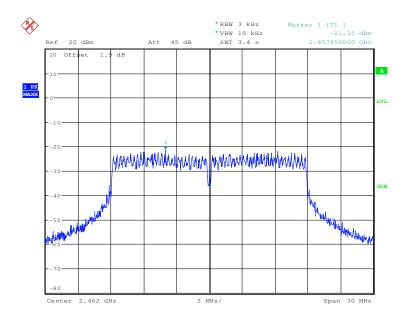



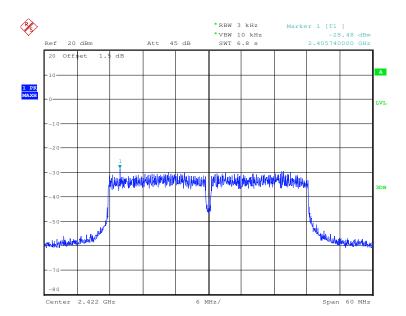





Report No.: HKES160500092602

Page: 47 of 159

Test mode: 802.11n(HT40) Test channel: Middle

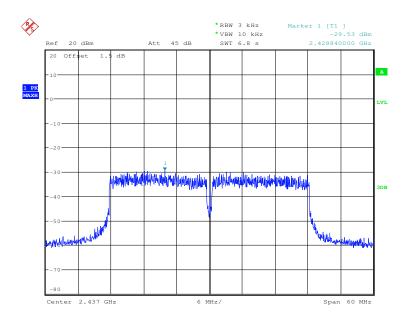



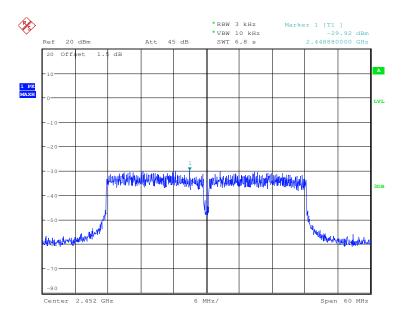



Report No.: HKES160500092602

Page: 48 of 159

#### 6.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)		
Test Method:	ANSI C63.10 2013, section 11.13.2		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:		
Exploratory Test Made:	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Exploratory Test Mode: Final Test Mode:			
i iliai Test Mode.	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)		
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread		
	spectrum intentional radiator is operating, the radio frequency power that is		
	produced by the intentional radiator shall be at least 20 dB below that in the		
	100 kHz bandwidth within the band that contains the highest level of the		
	desired power, based on either an RF conducted or a radiated		
	measurement.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		




Report No.: HKES160500092602

Page: 49 of 159


#### Test plot as follows:

#### Antenna 1

Test mode: 802.11b Test channel: Lowest

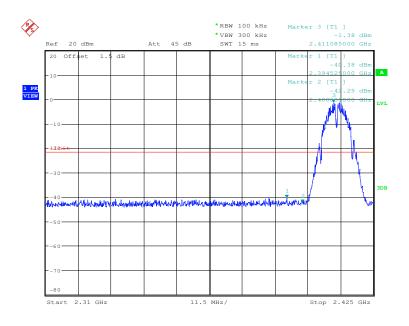



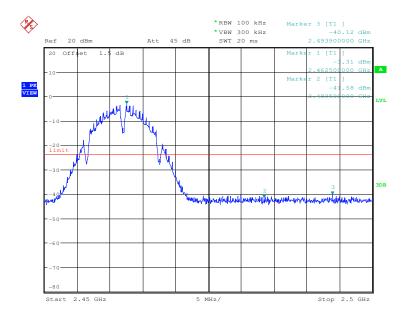





Report No.: HKES160500092602

Page: 50 of 159

Test mode: 802.11g Test channel: Lowest

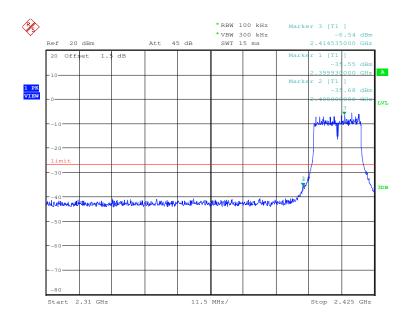



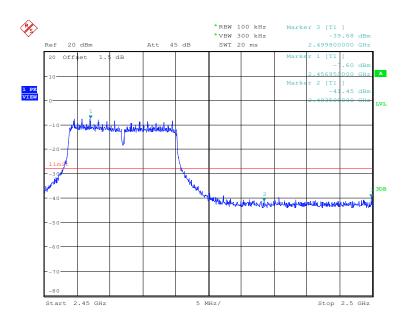





Report No.: HKES160500092602

Page: 51 of 159

Test mode: 802.11n(HT20) Test channel: Lowest

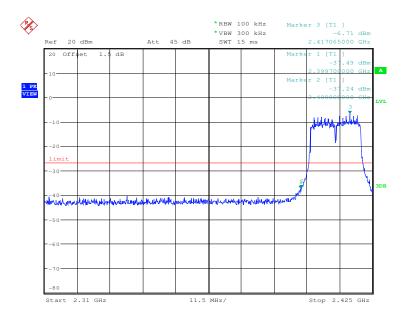



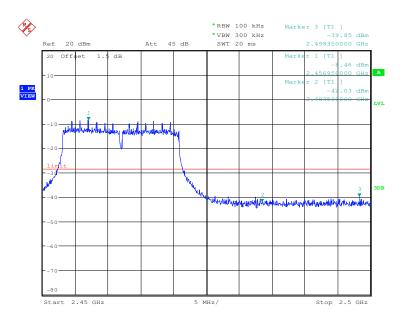





Report No.: HKES160500092602

Page: 52 of 159

Test mode: 802.11n(HT40) Test channel: Lowest

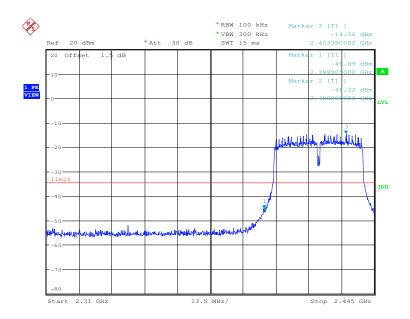



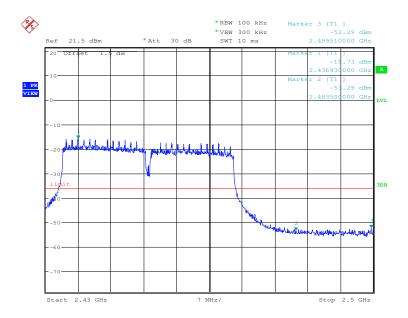




Report No.: HKES160500092602


Page: 53 of 159

#### Antenna 2

Test mode: 802.11b Test channel: Lowest

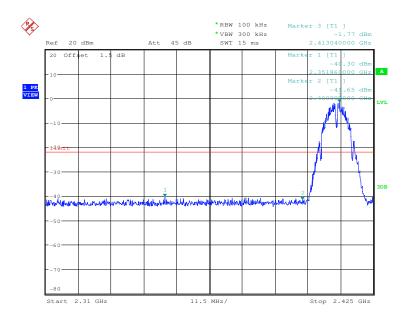

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

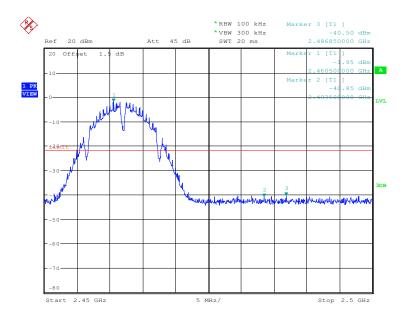





Report No.: HKES160500092602

Page: 54 of 159

Test mode: 802.11g Test channel: Lowest

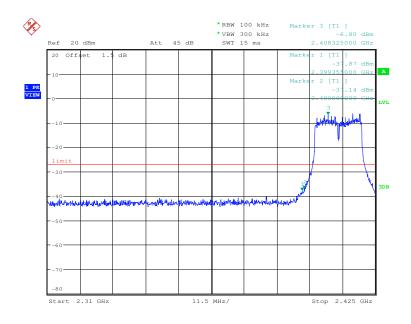



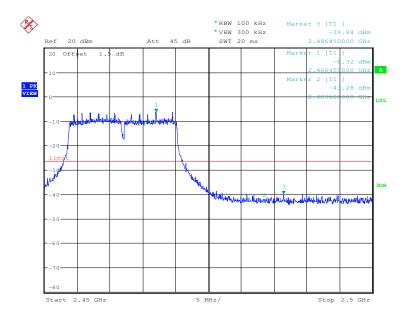





Report No.: HKES160500092602

Page: 55 of 159

Test mode: 802.11n(HT20) Test channel: Lowest

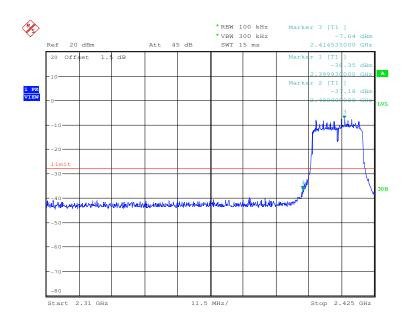



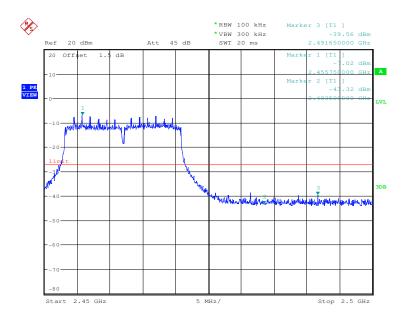





Report No.: HKES160500092602

Page: 56 of 159

Test mode: 802.11n(HT40) Test channel: Lowest

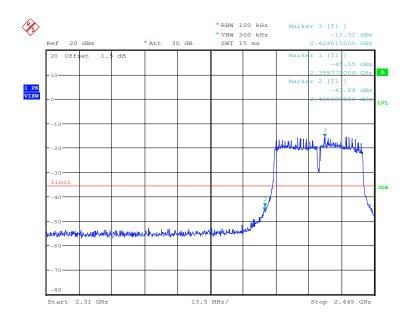



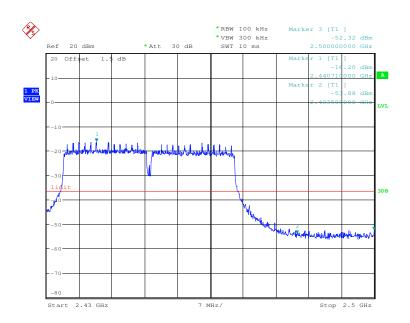





Report No.: HKES160500092602


Page: 57 of 159

#### Antenna 3

Test mode: 802.11b Test channel: Lowest

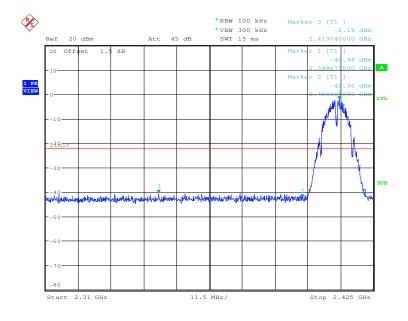



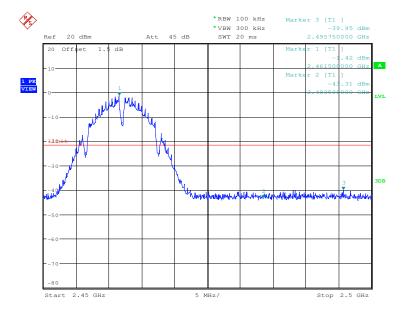





Report No.: HKES160500092602

Page: 58 of 159

Test mode: 802.11g Test channel: Lowest

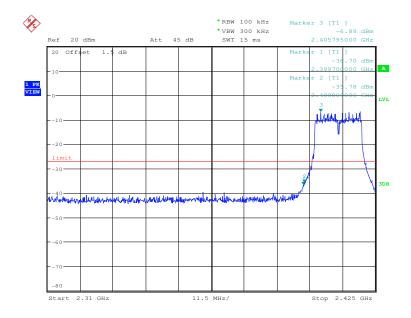



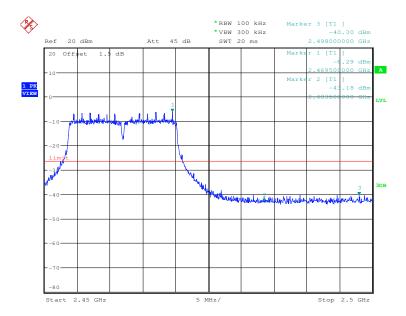





Report No.: HKES160500092602

Page: 59 of 159

Test mode: 802.11n(HT20) Test channel: Lowest

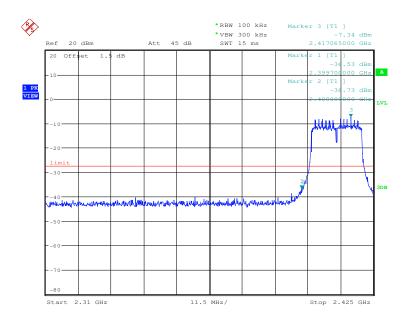



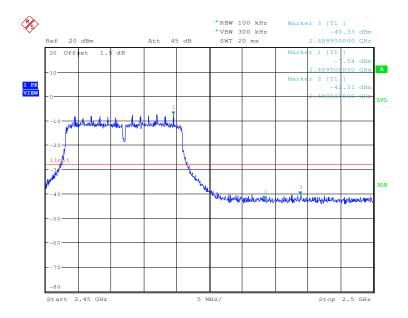





Report No.: HKES160500092602

Page: 60 of 159

Test mode: 802.11n(HT40) Test channel: Lowest

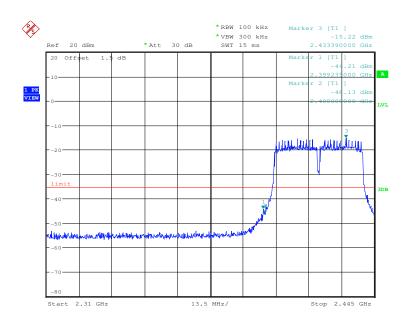



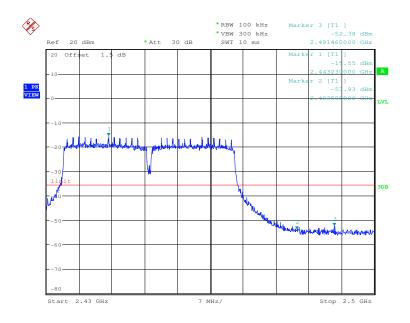



Report No.: HKES160500092602

Page: 61 of 159

#### 6.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10 2013, section 11.11	
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:	
Exploratory Test Mode:	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.  Transmitting with all kind of modulations, data rates	
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;	
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread	
	spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	





Report No.: HKES160500092602

Page: 62 of 159

#### Test plot as follows: Antenna 1


Test mode: 802.11b Test channel: Lowest

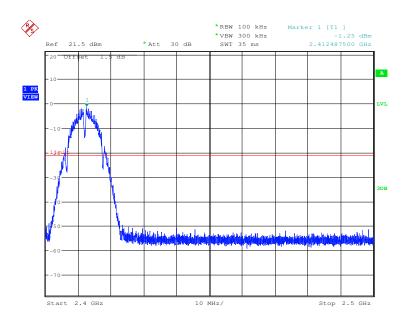


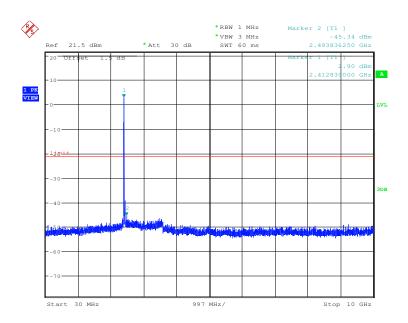




Report No.: HKES160500092602

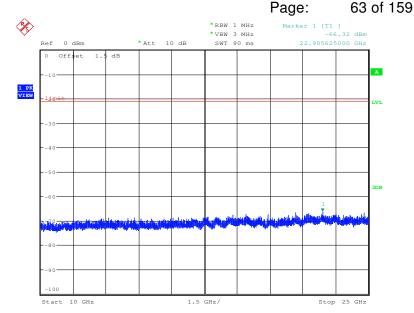





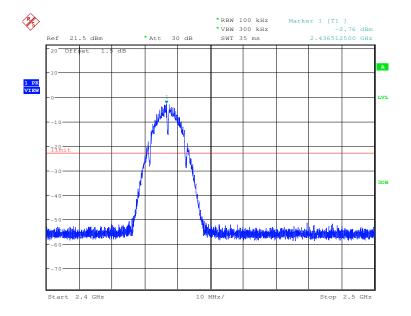



Report No.: HKES160500092602 Page: 64 of 159

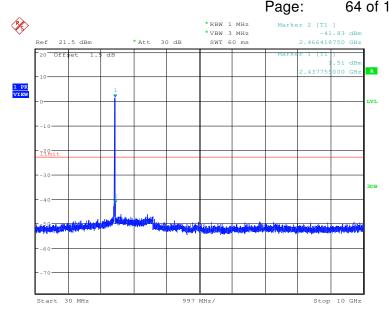

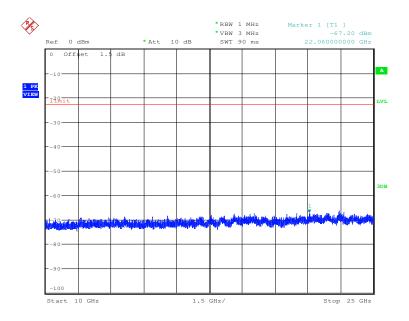





Report No.: HKES160500092602

Page: 65 of 159


Test mode: 802.11b Test channel: Highest

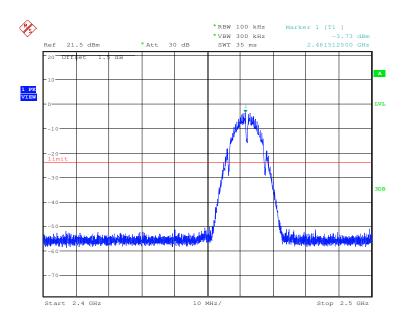

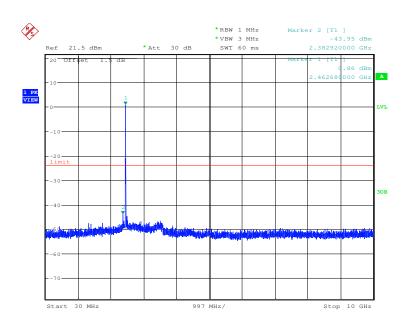




Report No.: HKES160500092602 Page: 66 of 159

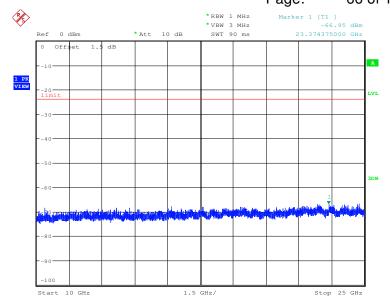



Test mode:	802.11g	Test channel:	Lowest	

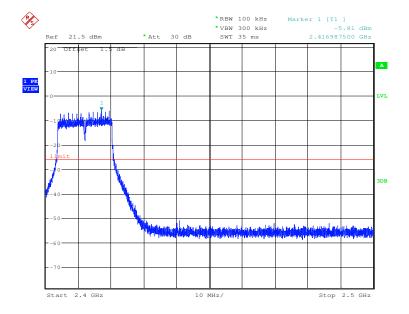



Report No.: HKES160500092602 Page: 67 of 159

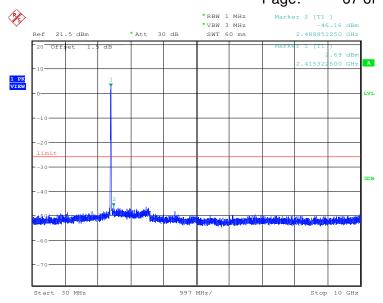

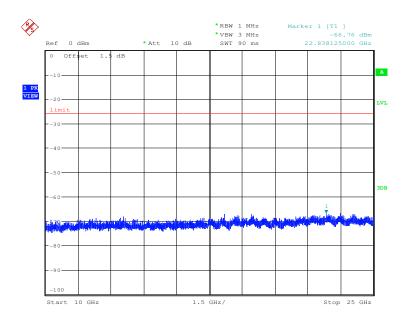





Report No.: HKES160500092602

Page: 68 of 159


Test mode: 802.11g Test channel: Middle

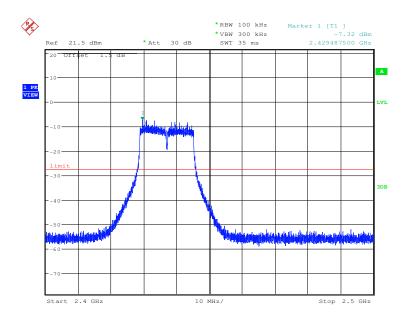

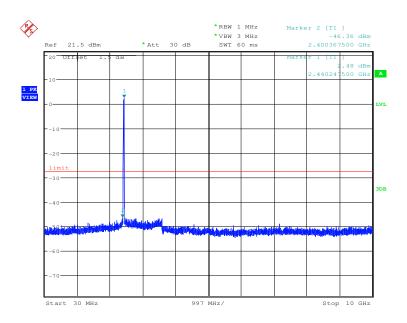




Report No.: HKES160500092602

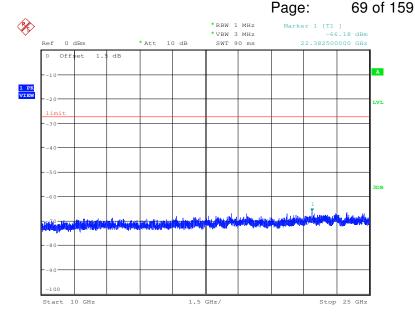



Test mode:	802.11g	Test channel:	Highest

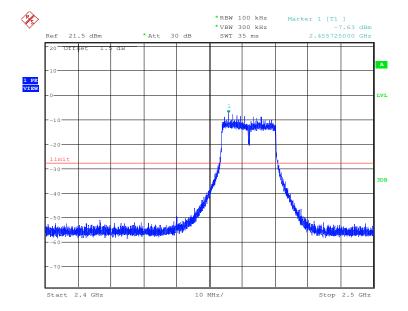



Report No.: HKES160500092602

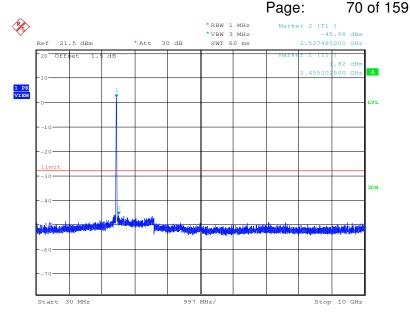

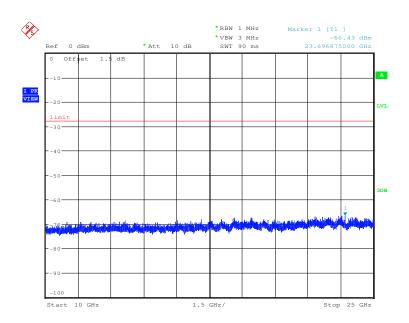





Report No.: HKES160500092602

Page: 71 of 159

Test mode: 802.11n(HT20) Test channel: Lowest

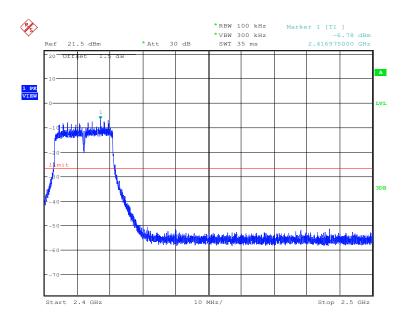


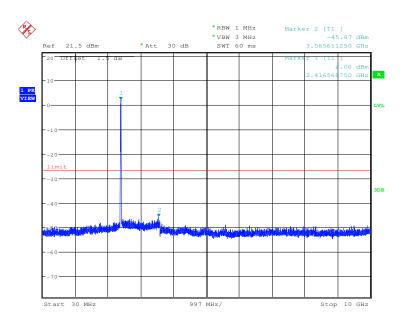




Report No.: HKES160500092602



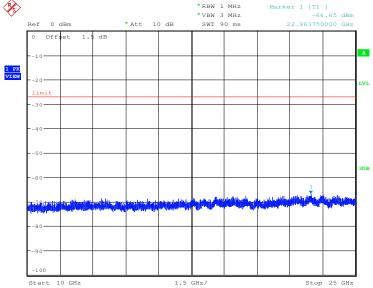



Test mode: 802.11n(HT20) Test channel: Middle

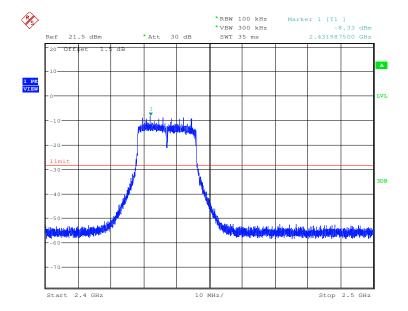



Report No.: HKES160500092602 Page: 73 of 159

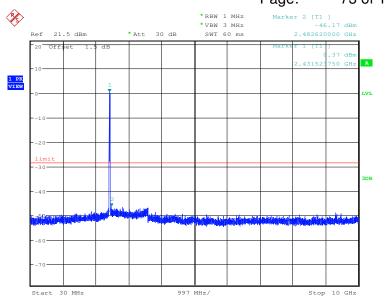

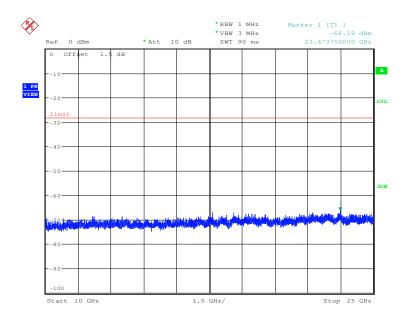





Report No.: HKES160500092602

Page: 74 of 159


Test mode: 802.11n(HT20) Test channel: Highest

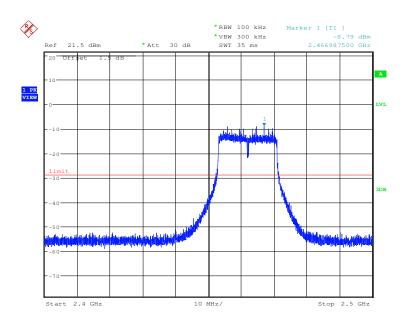

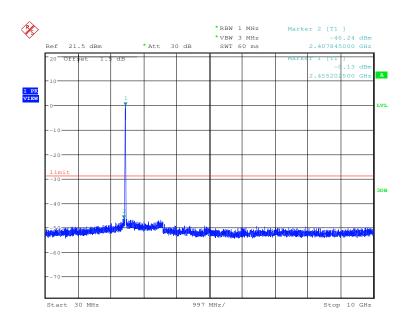




Report No.: HKES160500092602

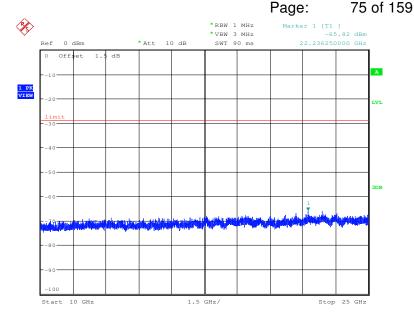





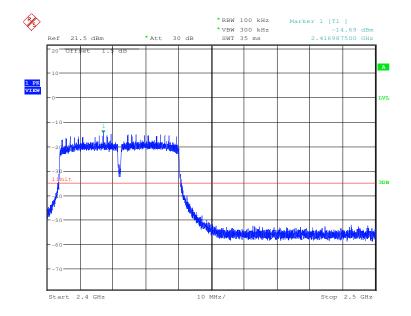



Report No.: HKES160500092602

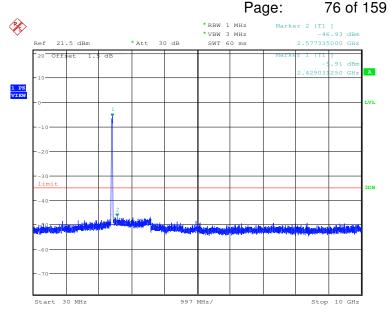

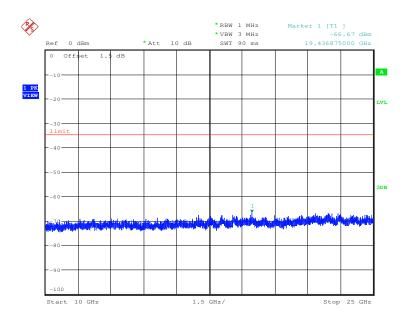





Report No.: HKES160500092602

Page: 77 of 159


Test mode: 802.11n(HT40) Test channel: Middle

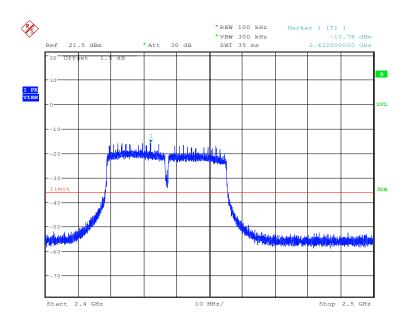

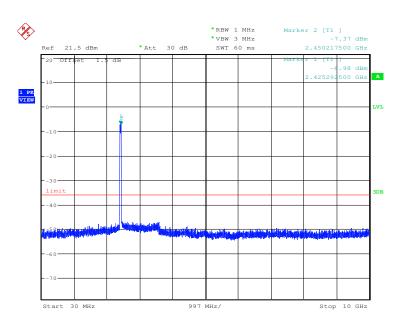




Report No.: HKES160500092602

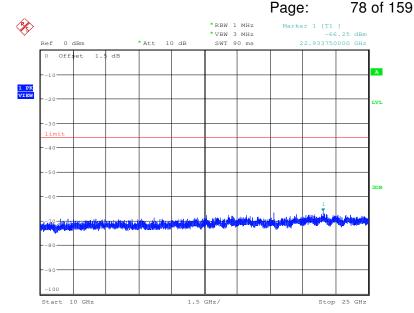



Test mode:	802.11n(HT40)	Test channel:	Highest

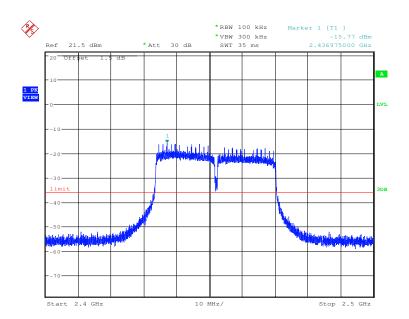



Report No.: HKES160500092602 Page: 79 of 159

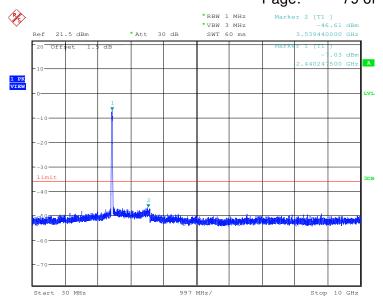

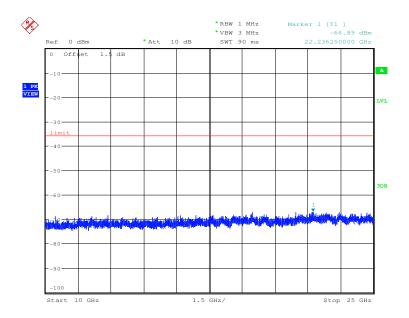





Report No.: HKES160500092602

Page: 80 of 159

#### Antenna 2


Test mode: 802.11b Test channel: Lowest

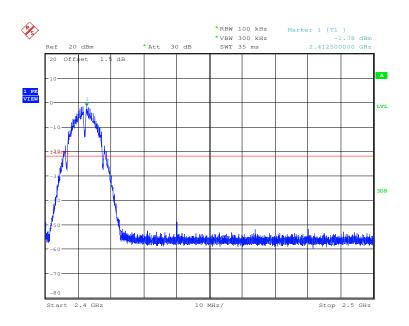

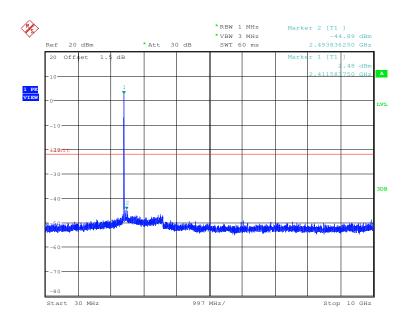




Report No.: HKES160500092602

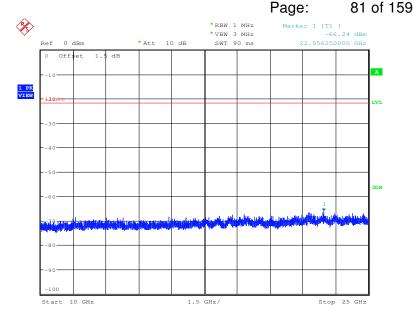





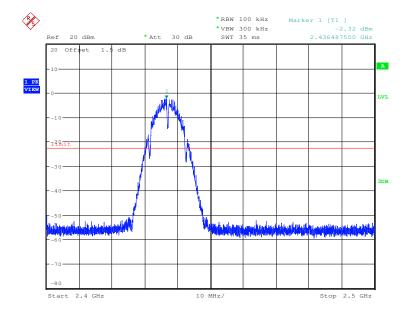



Report No.: HKES160500092602 Page: 82 of 159

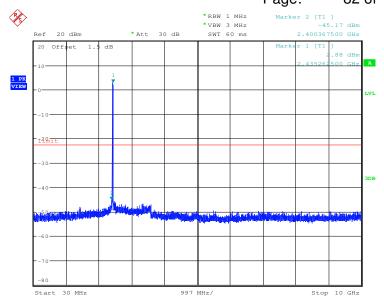

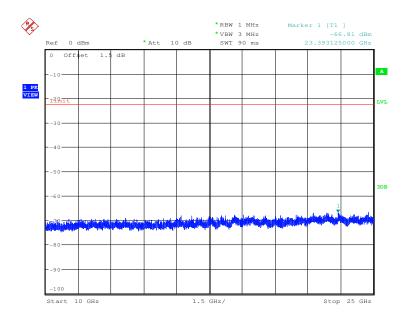





Report No.: HKES160500092602

Page: 83 of 159


Test mode: 802.11b Test channel: Highest

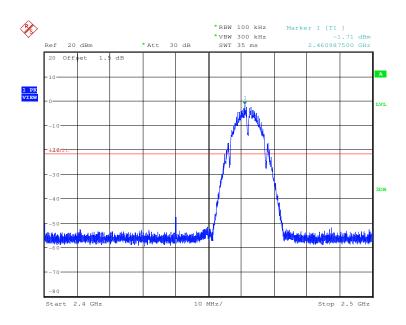


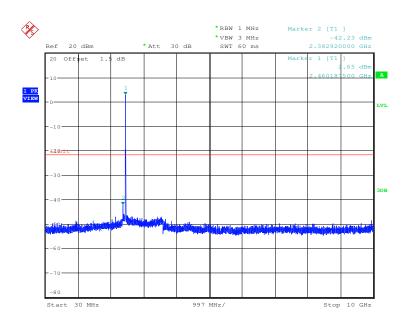




Report No.: HKES160500092602

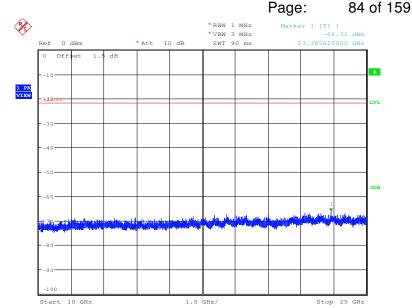




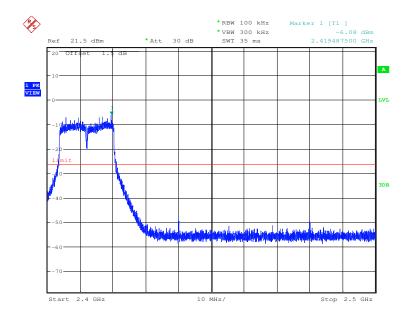



Report No.: HKES160500092602 Page: 85 of 159

Stop 25 GHz

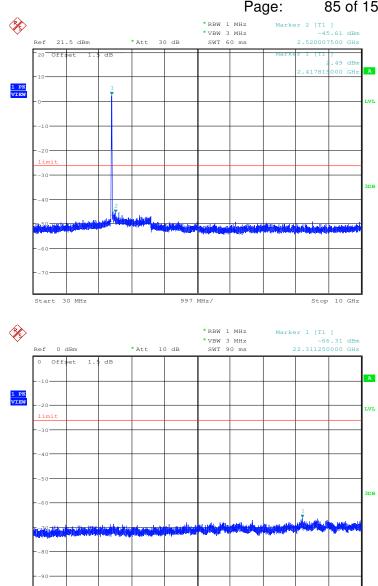


Start 10 GHz




Report No.: HKES160500092602

Page: 86 of 159


Test mode: 802.11g Test channel: Middle

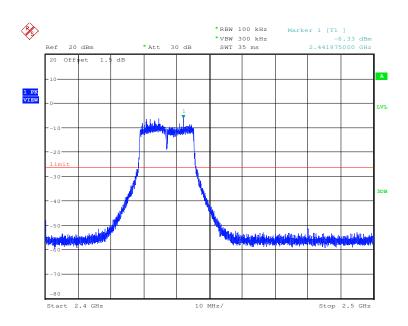

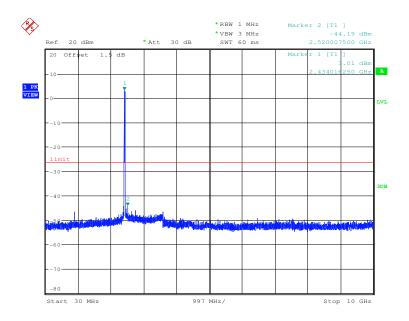




Report No.: HKES160500092602

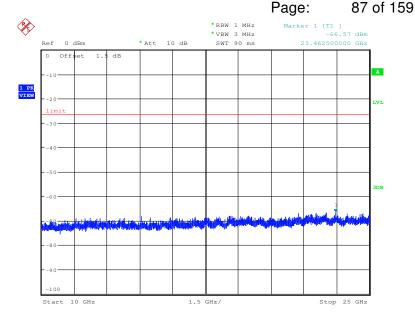



Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

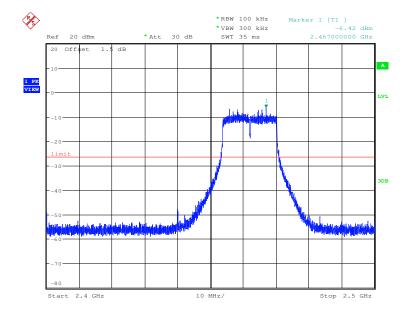



Report No.: HKES160500092602

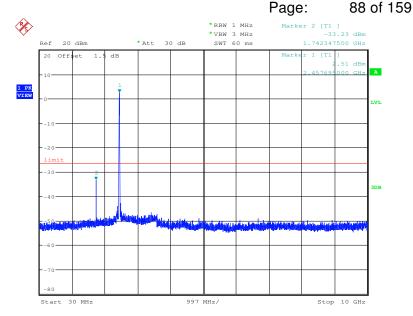

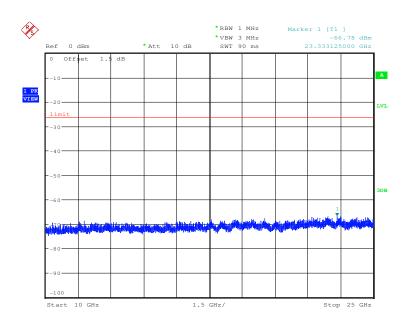




Report No.: HKES160500092602

Page: 89 of 159


Test mode: 802.11n(HT20) Test channel: Lowest

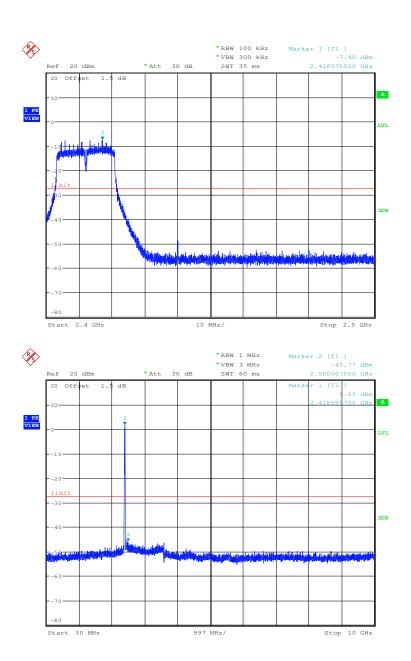



Report No.: HKES160500092602


Stop 25 GHz

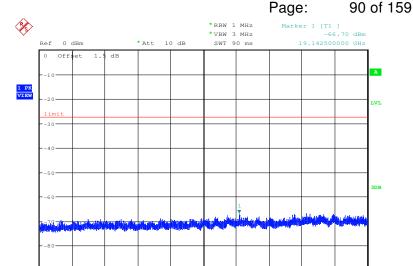




1.5 GHz


10 GHz

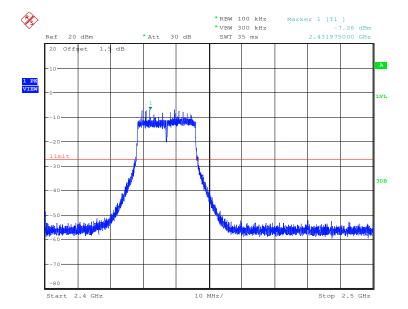



Report No.: HKES160500092602 Page: 91 of 159

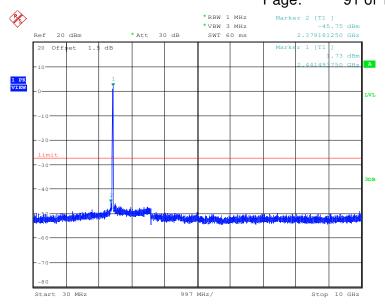

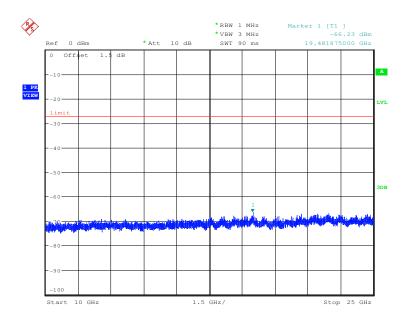





Report No.: HKES160500092602

Page: 92 of 159

Test mode: 802.11n(HT20) Test channel: Highest

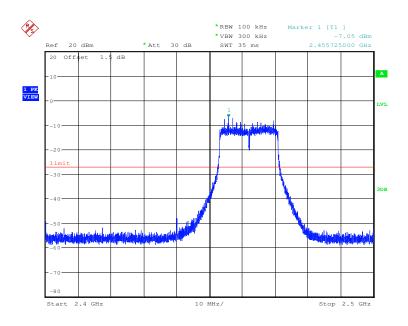


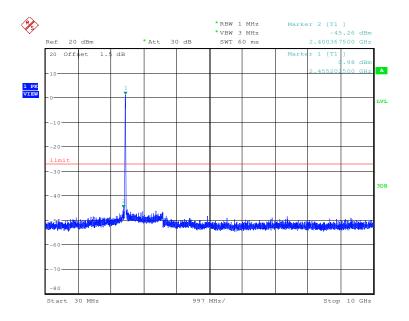




Report No.: HKES160500092602



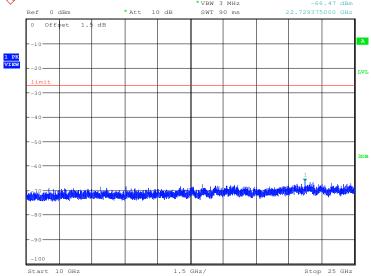



Test mode: 802.11n(HT40) Test channel: Lowest

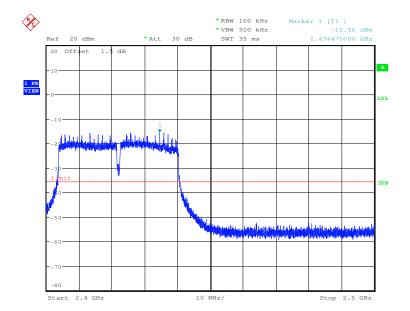



Report No.: HKES160500092602 Page: 94 of 159

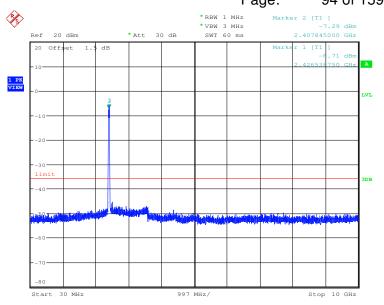

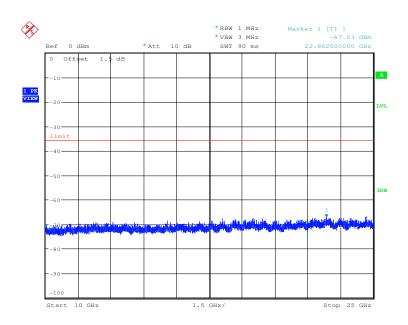





Report No.: HKES160500092602

Page: 95 of 159


Test mode: 802.11n(HT40) Test channel: Middle

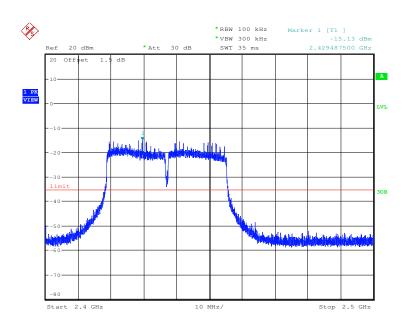

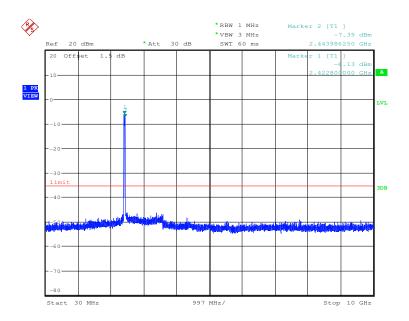




Report No.: HKES160500092602

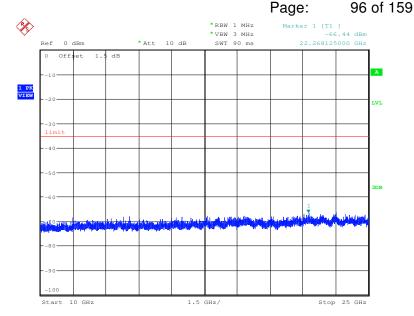





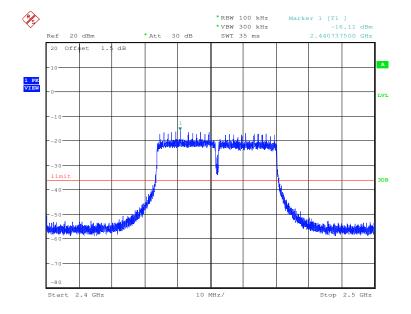



Report No.: HKES160500092602

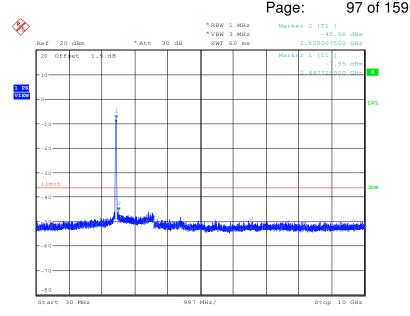

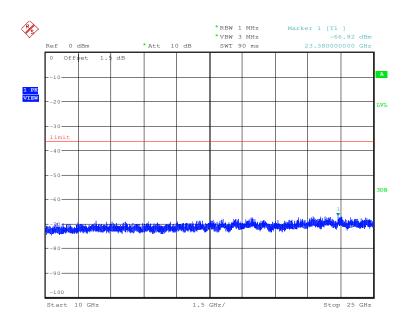





Report No.: HKES160500092602

Page: 98 of 159

#### Antenna 3


Test mode: 802.11b Test channel: Lowest

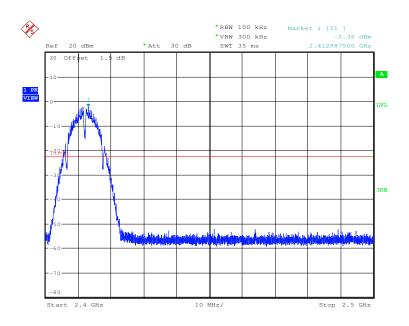


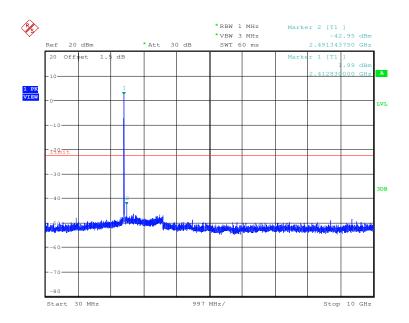




Report No.: HKES160500092602 Page: 99 of 159



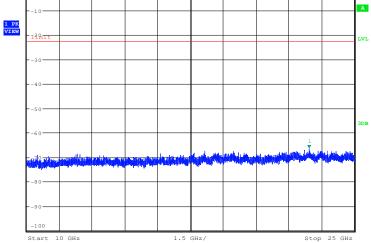



Test mode: 802.11b Test channel: Middle

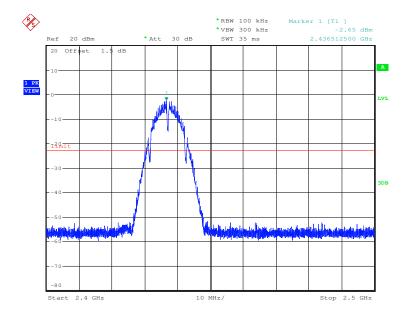



Report No.: HKES160500092602 Page: 100 of 159

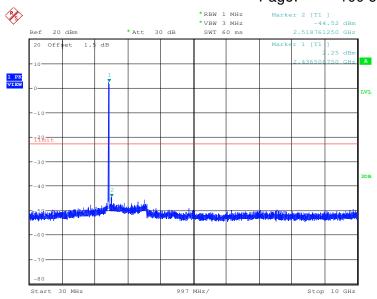

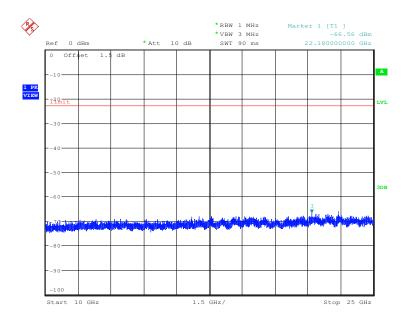




Report No.: HKES160500092602


Page: 101 of 159

Test mode: 802.11b Test channel: Highest

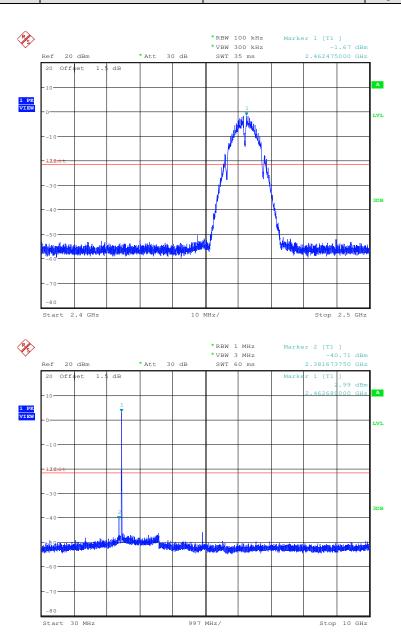




Report No.: HKES160500092602 Page: 102 of 159

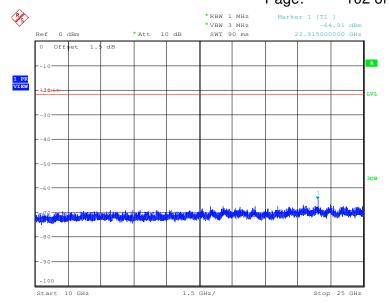



Test mode:	802.11g	Test channel:	Lowest
TOST IIIOGO.	002.11g	1 Cot onamici.	LOWCOL

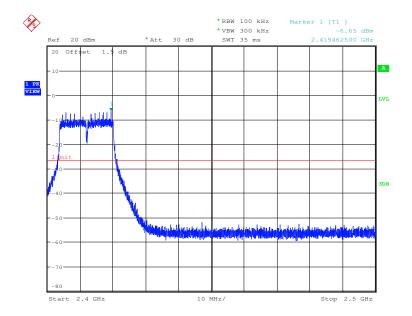



Report No.: HKES160500092602 Page: 103 of 159

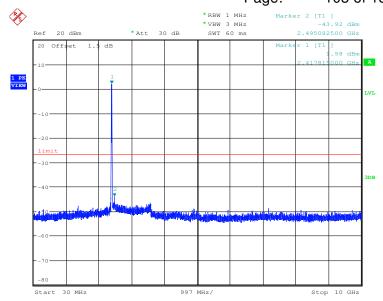

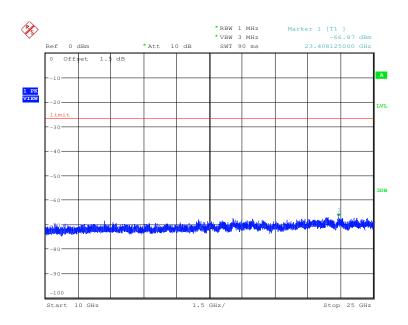





Report No.: HKES160500092602

Page: 104 of 159


Test mode: 802.11g Test channel: Middle

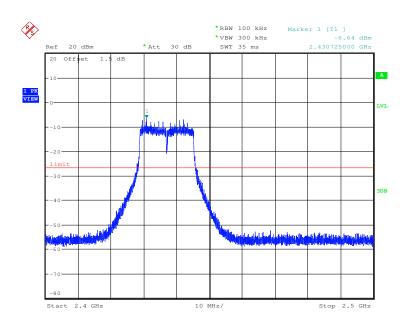

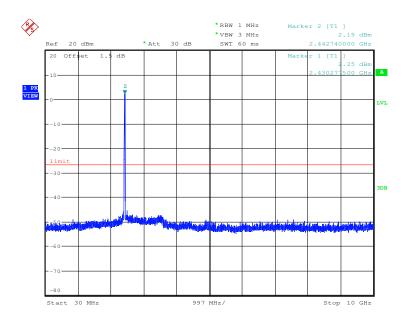




Report No.: HKES160500092602 Page: 105 of 159

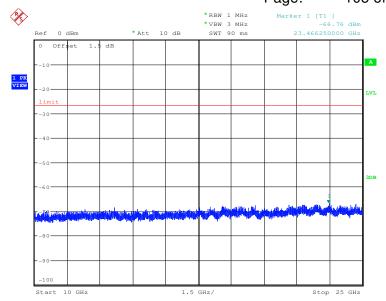



	000 44		
Test mode:	802.11g	Test channel:	Highest

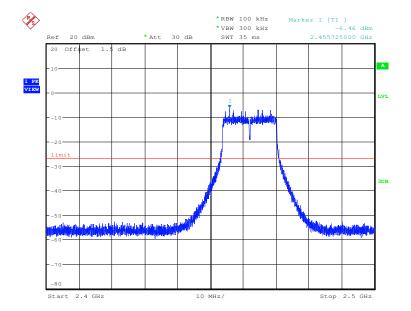



Report No.: HKES160500092602 Page: 106 of 159

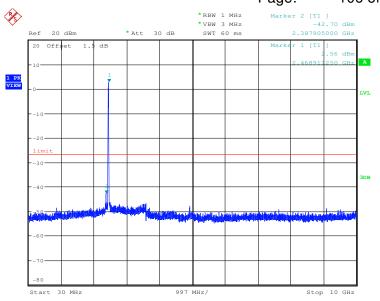

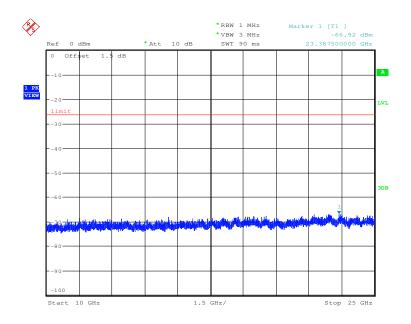




Report No.: HKES160500092602


Page: 107 of 159


Test mode: 802.11n(HT20) Test channel: Lowest

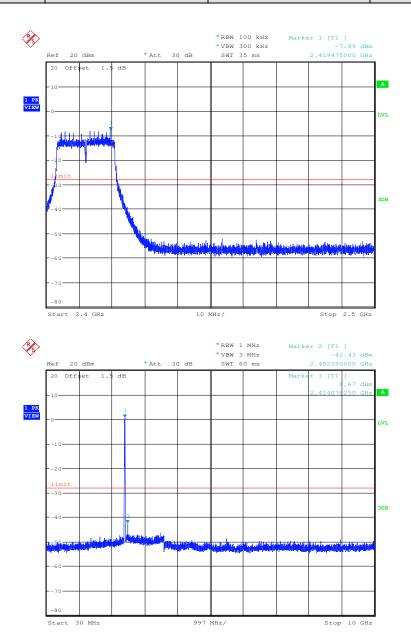




Report No.: HKES160500092602 Page: 108 of 159

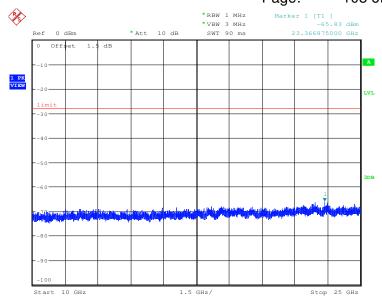


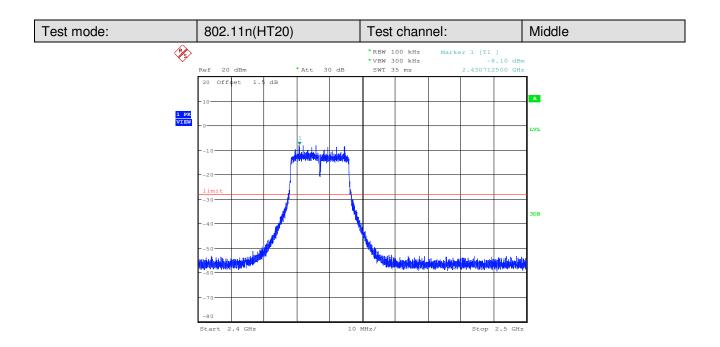



Report No.: HKES160500092602 Page: 109 of 159

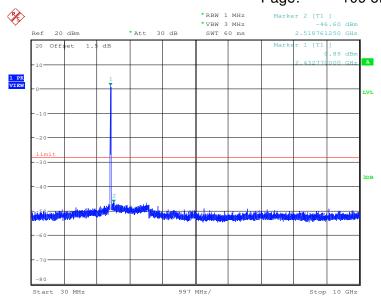

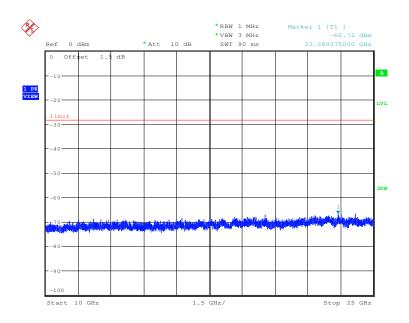





Report No.: HKES160500092602

Page: 110 of 159


Test mode: 802.11n(HT20) Test channel: Highest

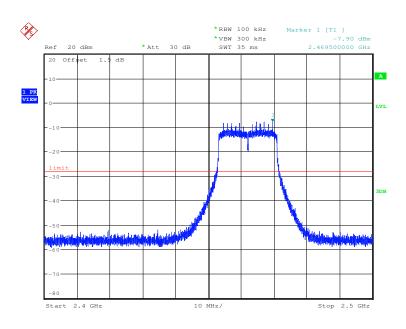

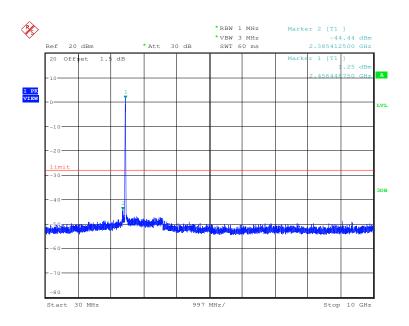




Report No.: HKES160500092602 Page: 111 of 159

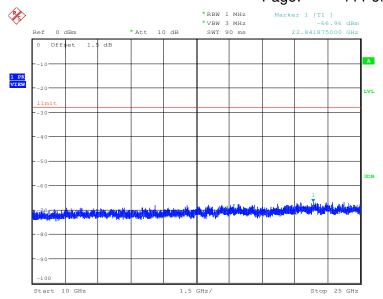



Test mode:   802.11n(HT40)   Test channel:   Lowest	Test mode:	802.11n(HT40)	Test channel:	Lowest
---	------------	---------------	---------------	--------

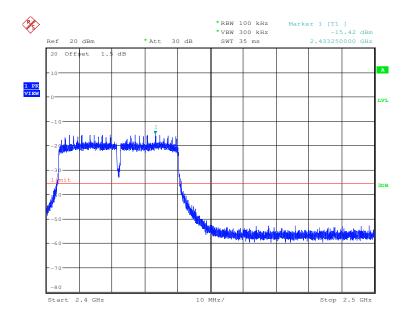



Report No.: HKES160500092602 Page: 112 of 159

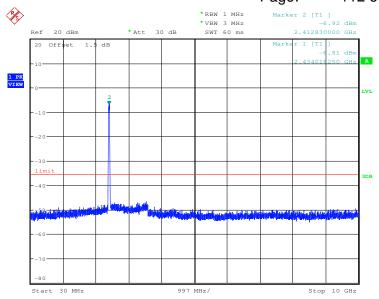

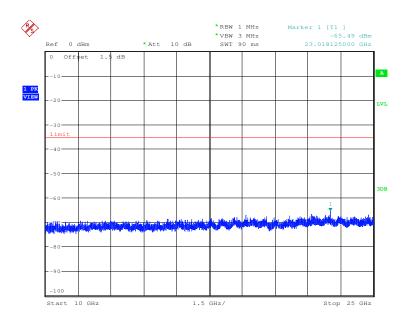





Report No.: HKES160500092602

Page: 113 of 159


Test mode: 802.11n(HT40) Test channel: Middle

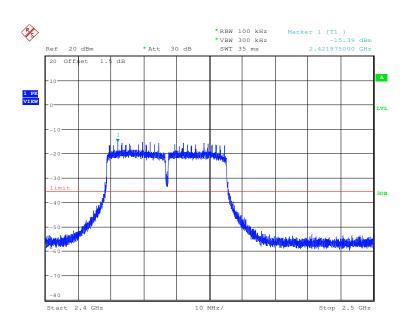

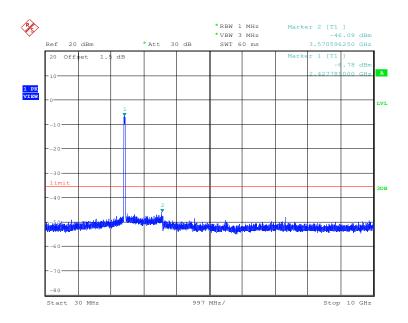




Report No.: HKES160500092602 Page: 114 of 159

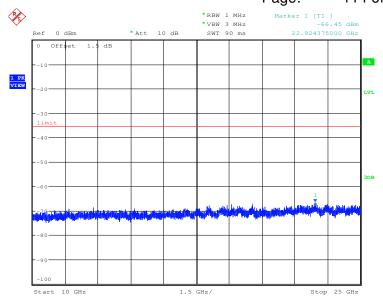



Test mode:   802.11n(HT40)   Test channel:   Highest
--

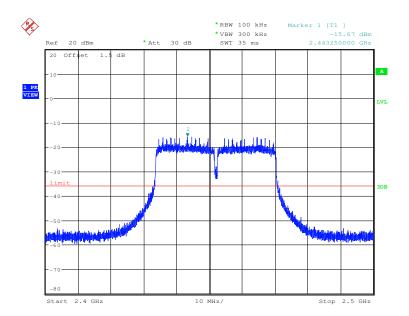



Report No.: HKES160500092602 Page: 115 of 159

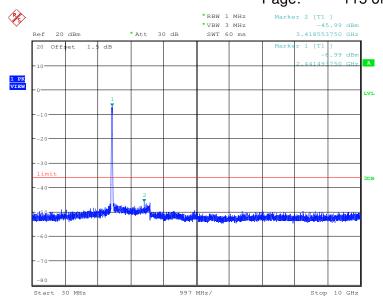

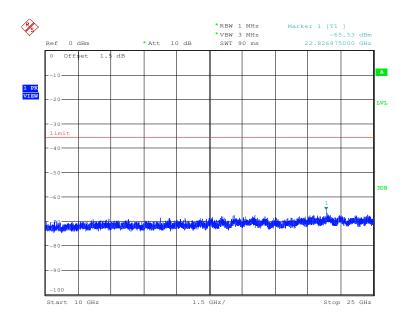

#### Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.



Report No.: HKES160500092602

Page: 116 of 159

#### 6.8 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2013, secti	on 11.12.2.7							
Test Site:	Measurement Distance: 3m								
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark				
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak				
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average				
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak				
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak				
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average				
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak				
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
	Above rariz	Peak	1MHz	10Hz	Average				
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)				
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30				
	1.705MHz-30MHz	30	-	-	30				
	30MHz-88MHz	100	40.0	Quasi-peak	3				
	88MHz-216MHz	150	43.5	Quasi-peak	3				
	216MHz-960MHz	200	46.0	Quasi-peak	3				
	960MHz-1GHz	500	54.0	Quasi-peak	3				
	Above 1GHz	500	54.0	Average	3				
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio freque emissions is 20dB above the maximum permitted average emission applicable to the equipment under test. This peak limit applies peak emission level radiated by the device.								



Report No.: HKES160500092602

Page: 117 of 159

#### Test Setup:

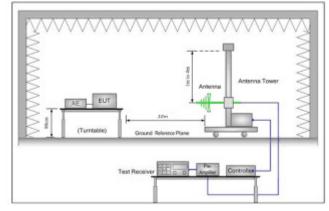

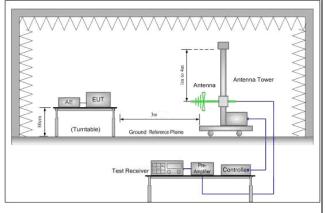


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

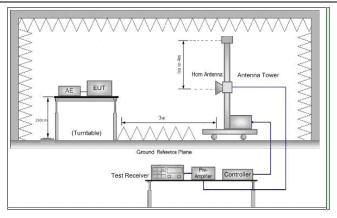


Figure 3. Above 1 GHz

#### Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table
   1.5 meters above the ground at a 3 meter semi-anechoic camber.
   The table was rotated 360 degrees to determine the position of the highest radiation
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.



Report No.: HKES160500092602

Page: 118 of 159

	f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
	h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
	For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: HKES160500092602

Page: 119 of 159

#### 6.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)						
Test mode:	Transmitting	Vertical				

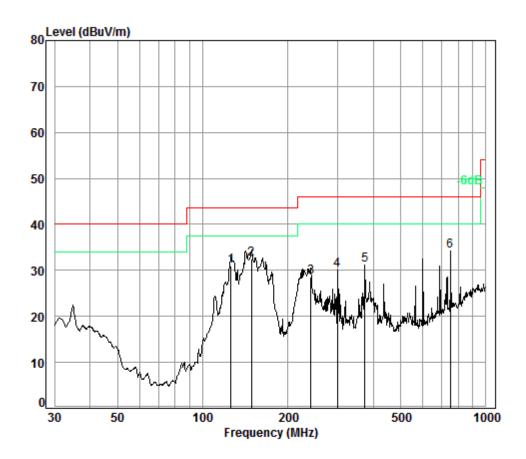

Condition: 3m HORIZONTAL


Job No. : 0926IT Test mode: TX mode


				Preamp				0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	125.89	1.27	7.18	25.86	48.43	31.02	43.50	-12.48
2 pp	148.44	1.31	9.30	25.83	47.73	32.51	43.50	-10.99
3	240.83	1.63	8.97	25.74	43.69	28.55	46.00	-17.45
4	299.32	1.90	11.13	25.70	42.68	30.01	46.00	-15.99
5	374.62	2.13	12.68	25.67	41.97	31.11	46.00	-14.89
6	750.11	3.06	18.40	25.76	38.58	34.28	46.00	-11.72



Report No.: HKES160500092602

Page: 120 of 159



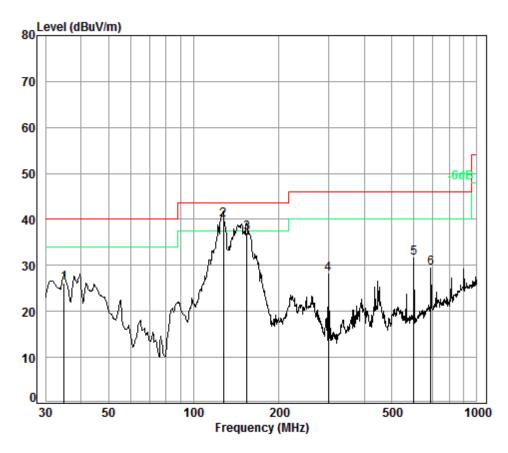

Condition: 3m VERTICAL

Job No. : 0926IT Test mode: TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	24 00	0.60	17 20	25 00	24 21	26.20	40.00	12 00
1	34.88	0.00	1/.20	25.99	34.31	20.20	40.00	-13.00
2 pp	127.22	1.27	7.28	25.86	57.20	39.89	43.50	-3.61
3	154.28	1.33	9.85	25.82	51.80	37.16	43.50	-6.34
4	299.32	1.90	11.13	25.70	40.74	28.07	46.00	-17.93
5	599.32	2.70	15.32	25.60	39.22	31.64	46.00	-14.36
6	687.15	2.88	17.83	25.69	34.37	29.39	46.00	-16.61



Report No.: HKES160500092602

Page: 121 of 159

#### 6.8.2 Transmitter emission above 1GHz

Test mode: 802.11b	Test channel:	Lowest	Remark:	Peak
--------------------	---------------	--------	---------	------

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3825.521	32.93	7.75	38.49	45.76	47.95	74	-26.05	Vertical
4824.000	34.12	8.90	38.75	49.30	53.57	74	-20.43	Vertical
5999.562	34.70	10.56	38.96	46.02	52.32	74	-21.68	Vertical
7236.000	35.58	10.69	37.63	42.53	51.17	74	-22.83	Vertical
9648.000	37.10	12.52	36.29	36.13	49.46	74	-24.54	Vertical
12603.270	37.90	14.44	37.75	38.69	53.28	74	-20.72	Vertical
3610.398	32.14	7.67	38.41	45.52	46.92	74	-27.08	Horizontal
4824.000	34.12	8.90	38.75	45.49	49.76	74	-24.24	Horizontal
5982.226	34.66	10.51	38.96	45.08	51.29	74	-22.71	Horizontal
7236.000	35.58	10.69	37.63	41.16	49.80	74	-24.20	Horizontal
9648.000	37.10	12.52	36.29	35.58	48.91	74	-25.09	Horizontal
12639.790	37.92	14.55	37.79	38.95	53.63	74	-20.37	Horizontal

Test mode:	802.	11b	Test ch	annel:	Middle	Middle Remark:		Peak	
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3825.521	32.93	7.75	38.49	45.24	47.43	74	-26.57	Vertical	
4874.000	34.17	8.97	38.76	48.84	53.22	74	-20.78	Vertical	
5811.590	34.23	10.03	38.93	46.89	52.22	74	-21.78	Vertical	
7311.000	35.54	10.72	37.59	43.11	51.78	74	-22.22	Vertical	
9748.000	37.10	12.58	36.16	38.76	52.28	74	-21.72	Vertical	
12676.420	37.94	14.65	37.82	38.68	53.45	74	-20.55	Vertical	
3694.956	32.49	7.70	38.44	44.12	45.87	74	-28.13	Horizontal	
4874.000	34.17	8.97	38.76	45.41	49.79	74	-24.21	Horizontal	
5999.562	34.70	10.56	38.96	45.26	51.56	74	-22.44	Horizontal	
7311.000	35.54	10.72	37.59	44.24	52.91	74	-21.09	Horizontal	
9748.000	37.10	12.58	36.16	38.54	52.06	74	-21.94	Horizontal	
12603.270	37.90	14.44	37.75	38.67	53.26	74	-20.74	Horizontal	



Report No.: HKES160500092602

Page: 122 of 159

Test mode:	802.1	l 1h	Test ch	annel·	Highest	Remark		Peak
1000111000	002.1		1000 011	ariiror.	Tilghoot	Homan	•	1 oan
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3836.607	32.94	7.75	38.50	45.78	47.97	74	-26.03	Vertical
4924.000	34.22	9.04	38.77	49.44	53.93	74	-20.07	Vertical
6069.413	34.74	10.47	38.87	46.74	53.08	74	-20.92	Vertical
7386.000	35.51	10.75	37.56	42.57	51.27	74	-22.73	Vertical
9848.000	37.15	12.63	36.03	39.28	53.03	74	-20.97	Vertical
12530.530	37.83	14.24	37.68	39.38	53.77	74	-20.23	Vertical
3858.877	32.96	7.76	38.51	45.07	47.28	74	-26.72	Horizontal
4924.000	34.22	9.04	38.77	45.94	50.43	74	-23.57	Horizontal
6104.642	34.75	10.42	38.82	45.79	52.14	74	-21.86	Horizontal
7386.000	35.51	10.75	37.56	39.72	48.42	74	-25.58	Horizontal
9848.000	37.15	12.63	36.03	39.65	53.40	74	-20.60	Horizontal
12603.270	37.90	14.44	37.75	37.87	52.46	74	-21.54	Horizontal

Test mode:	802.1	11g	Test ch	annel:	Lowest	Remark		Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3748.808	32.70	7.72	38.47	45.76	47.71	74	-26.29	Vertical
4824.000	34.12	8.90	38.75	47.10	51.37	74	-22.63	Vertical
5811.590	34.23	10.03	38.93	46.40	51.73	74	-22.27	Vertical
7236.000	35.58	10.69	37.63	43.23	51.87	74	-22.13	Vertical
9648.000	37.10	12.52	36.29	35.80	49.13	74	-24.87	Vertical
12603.270	37.90	14.44	37.75	37.98	52.57	74	-21.43	Vertical
3803.444	32.90	7.74	38.49	45.34	47.49	74	-26.51	Horizontal
4824.000	34.12	8.90	38.75	45.38	49.65	74	-24.35	Horizontal
6069.413	34.74	10.47	38.87	46.35	52.69	74	-21.31	Horizontal
7236.000	35.58	10.69	37.63	41.12	49.76	74	-24.24	Horizontal
9648.000	37.10	12.52	36.29	35.08	48.41	74	-25.59	Horizontal
12603.270	37.90	14.44	37.75	37.74	52.33	74	-21.67	Horizontal



Test mode:

802.11a

## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: HKES160500092602

Page: 123 of 159

Remark:

Peak

Test mode: 80	302.11g	Test channel:	Middle	Remark:	Peak
---------------	---------	---------------	--------	---------	------

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3825.521	32.93	7.75	38.49	45.16	47.35	74	-26.65	Vertical
4874.000	34.17	8.97	38.76	47.87	52.25	74	-21.75	Vertical
6069.413	34.74	10.47	38.87	46.17	52.51	74	-21.49	Vertical
7311.000	35.54	10.72	37.59	44.14	52.81	74	-21.19	Vertical
9748.000	37.10	12.58	36.16	37.69	51.21	74	-22.79	Vertical
12639.790	37.92	14.55	37.79	38.48	53.16	74	-20.84	Vertical
3892.524	32.99	7.77	38.52	46.10	48.34	74	-25.66	Horizontal
4874.000	34.17	8.97	38.76	45.54	49.92	74	-24.08	Horizontal
6087.002	34.74	10.45	38.85	45.86	52.20	74	-21.80	Horizontal
7311.000	35.54	10.72	37.59	44.03	52.70	74	-21.30	Horizontal
9748.000	37.10	12.58	36.16	39.76	53.28	74	-20.72	Horizontal
12676.420	37.94	14.65	37.82	38.09	52.86	74	-21.14	Horizontal

		9					-	
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3858.877	32.96	7.76	38.51	44.95	47.16	74	-26.84	Vertical
4924.000	34.22	9.04	38.77	49.01	53.50	74	-20.50	Vertical
6338.673	34.80	10.13	38.52	45.88	52.29	74	-21.71	Vertical

Test channel: Highest

7386.000 35.51 10.75 37.56 42.33 51.03 74 -22.97 Vertical 9848.000 37.15 36.03 39.43 53.18 74 -20.82 Vertical 12.63 12639.790 37.92 14.55 37.79 38.57 53.25 74 -20.75 Vertical 32.91 7.75 45.25 47.42 Horizontal 3814.467 38.49 74 -26.58 4924.000 34.22 9.04 38.77 46.94 51.43 74 -22.57 Horizontal 6140.076 34.77 10.38 38.78 45.46 51.83 74 -22.17 Horizontal 7386.000 35.51 10.75 37.56 41.41 50.11 74 -23.89Horizontal Horizontal 9848.000 37.15 12.63 36.03 39.58 53.33 74 -20.6712603.270 37.90 14.44 37.75 38.48 53.07 74 -20.93Horizontal



Report No.: HKES160500092602

Page: 124 of 159

Test mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3814.467	32.91	7.75	38.49	44.92	47.09	74	-26.91	Vertical
4824.000	34.12	8.90	38.75	45.67	49.94	74	-24.06	Vertical
6016.949	34.71	10.54	38.94	45.43	51.74	74	-22.26	Vertical
7236.000	35.58	10.69	37.63	42.88	51.52	74	-22.48	Vertical
9648.000	37.10	12.52	36.29	36.38	49.71	74	-24.29	Vertical
12603.270	37.90	14.44	37.75	38.32	52.91	74	-21.09	Vertical
3797.945	32.89	7.74	38.48	44.55	46.70	74	-27.30	Horizontal
4824.000	34.12	8.90	38.75	46.21	50.48	74	-23.52	Horizontal
6016.949	34.71	10.54	38.94	45.06	51.37	74	-22.63	Horizontal
7236.000	35.58	10.69	37.63	42.15	50.79	74	-23.21	Horizontal
9648.000	37.10	12.52	36.29	34.89	48.22	74	-25.78	Horizontal
12603.270	37.90	14.44	37.75	39.03	53.62	74	-20.38	Horizontal

Test mode: 8	802.11n(HT20)	Test channel:	Middle	Remark:	Peak
--------------	---------------	---------------	--------	---------	------

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3892.524	32.99	7.77	38.52	45.52	47.76	74	-26.24	Vertical
4874.000	34.17	8.97	38.76	45.86	50.24	74	-23.76	Vertical
6148.967	34.77	10.37	38.76	45.04	51.42	74	-22.58	Vertical
7311.000	35.54	10.72	37.59	41.60	50.27	74	-23.73	Vertical
9748.000	37.10	12.58	36.16	38.41	51.93	74	-22.07	Vertical
12639.790	37.92	14.55	37.79	38.96	53.64	74	-20.36	Vertical
3814.467	32.91	7.75	38.49	44.83	47.00	74	-27.00	Horizontal
4874.000	34.17	8.97	38.76	45.31	49.69	74	-24.31	Horizontal
6069.413	34.74	10.47	38.87	45.36	51.70	74	-22.30	Horizontal
7311.000	35.54	10.72	37.59	41.39	50.06	74	-23.94	Horizontal
9748.000	37.10	12.58	36.16	39.31	52.83	74	-21.17	Horizontal
12676.420	37.94	14.65	37.82	38.85	53.62	74	-20.38	Horizontal



#### SGS-CSTC Standards Technical Services Co., Ltd. **Shenzhen Branch**

Report No.: HKES160500092602

Page: 125 of 159

Test mode:	802.1	I1n(HT20)	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3792.453	32.87	7.74	38.48	44.33	46.46	74	-27.54	Vertical
4924.000	34.22	9.04	38.77	45.11	49.60	74	-24.40	Vertical
6087.002	34.74	10.45	38.85	45.65	51.99	74	-22.01	Vertical
7386.000	35.51	10.75	37.56	41.72	50.42	74	-23.58	Vertical
9848.000	37.15	12.63	36.03	38.98	52.73	74	-21.27	Vertical
12676.420	37.94	14.65	37.82	38.09	52.86	74	-21.14	Vertical
3825.521	32.93	7.75	38.49	45.13	47.32	74	-26.68	Horizontal
4924.000	34.22	9.04	38.77	45.18	49.67	74	-24.33	Horizontal
6140.076	34.77	10.38	38.78	45.63	52.00	74	-22.00	Horizontal
7386.000	35.51	10.75	37.56	41.96	50.66	74	-23.34	Horizontal
9848.000	37.15	12.63	36.03	39.29	53.04	74	-20.96	Horizontal
12639.790	37.92	14.55	37.79	38.27	52.95	74	-21.05	Horizontal

Test mode:	802.	11n(HT40)	Test ch	annel:	Lowest Remark:		-	Peak	
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
3836.607	32.94	7.75	38.5	44.71	46.90	74	-27.10	Vertical	
4844.000	34.14	8.92	38.76	46.38	50.68	74	-23.32	Vertical	
6087.002	34.74	10.45	38.85	44.93	51.27	74	-22.73	Vertical	
7266.000	35.57	10.7	37.61	41.77	50.43	74	-23.57	Vertical	
9688.000	37.1	12.54	36.24	35.96	49.36	74	-24.64	Vertical	
12639.790	37.92	14.55	37.79	39.01	53.69	74	-20.31	Vertical	
3915.118	33.02	7.78	38.53	45.58	47.85	74	-26.15	Horizontal	
4844.000	34.14	8.92	38.76	45.92	50.22	74	-23.78	Horizontal	
6016.949	34.71	10.54	38.94	44.99	51.30	74	-22.70	Horizontal	
7266.000	35.57	10.7	37.61	41.82	50.48	74	-23.52	Horizontal	
9688.000	37.1	12.54	36.24	36.76	50.16	74	-23.84	Horizontal	
12639.790	37.92	14.55	37.79	38.91	53.59	74	-20.41	Horizontal	



Report No.: HKES160500092602

Page: 126 of 159

Test mode: 802.11n(HT40) Test channel: Middle Remark: Peak

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3825.521	32.93	7.75	38.49	45.50	47.69	74	-26.31	Vertical
4874.000	34.17	8.97	38.76	45.24	49.62	74	-24.38	Vertical
5862.263	34.36	10.18	38.94	46.88	52.48	74	-21.52	Vertical
7311.000	35.54	10.72	37.59	44.68	53.35	74	-20.65	Vertical
9748.000	37.10	12.58	36.16	39.46	52.98	74	-21.02	Vertical
12566.850	37.87	14.34	37.72	38.89	53.38	74	-20.62	Vertical
3748.808	32.70	7.72	38.47	45.10	47.05	74	-26.95	Horizontal
4874.000	34.17	8.97	38.76	44.98	49.36	74	-24.64	Horizontal
6122.333	34.76	10.40	38.80	45.37	51.73	74	-22.27	Horizontal
7311.000	35.54	10.72	37.59	42.26	50.93	74	-23.07	Horizontal
9748.000	37.10	12.58	36.16	39.17	52.69	74	-21.31	Horizontal
12639.790	37.92	14.55	37.79	38.19	52.87	74	-21.13	Horizontal

Test mode:	802.11n(HT40)	Test channel:	Highest	Remark:	Peak
------------	---------------	---------------	---------	---------	------

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3903.804	33.01	7.78	38.52	44.43	46.70	74	-27.30	Vertical
4904.000	34.21	9.01	38.77	45.85	50.30	74	-23.70	Vertical
6122.333	34.76	10.40	38.80	45.93	52.29	74	-21.71	Vertical
7356.000	35.52	10.74	37.57	44.95	53.64	74	-20.36	Vertical
9808.000	37.11	12.61	36.08	39.54	53.18	74	-20.82	Vertical
12639.790	37.92	14.55	37.79	38.67	53.35	74	-20.65	Vertical
3825.521	32.93	7.75	38.49	44.70	46.89	74	-27.11	Horizontal
4904.000	34.21	9.01	38.77	45.14	49.59	74	-24.41	Horizontal
6140.076	34.77	10.38	38.78	45.49	51.86	74	-22.14	Horizontal
7356.000	35.52	10.74	37.57	42.03	50.72	74	-23.28	Horizontal
9808.000	37.11	12.61	36.08	40.29	53.93	74	-20.07	Horizontal
12639.790	37.92	14.55	37.79	38.21	52.89	74	-21.11	Horizontal



Report No.: HKES160500092602

Page: 127 of 159

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: HKES160500092602

Page: 128 of 159

#### 6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10 2013, section	ANSI C63.10 2013, section 6.10.5								
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m								
Limit:	Frequency	Limit (dBuV/m )	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.5	Quasi-peak Value							
	Above 10Uz	54.0	Average Value							
	Above IGHZ	Above 1GHz 74.0 Peak Value								
Test Setup:										

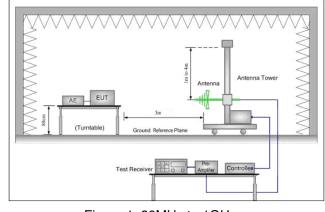

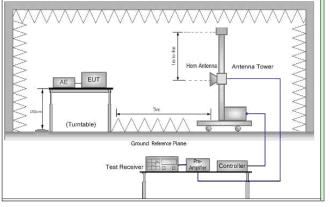


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: HKES160500092602

Page: 129 of 159

Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	h. Test the EUT in the lowest channel, the Highest channel
	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40)
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: HKES160500092602

Page: 130 of 159

Test plot as follows:

Worse case mode: 802.11b Test channel: Lowest Remark: Peak Vertical

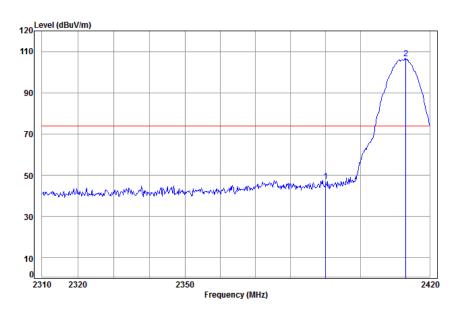

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2412 Band edge

: B


Cable Ant Preamp Read Limit 0ver Loss Factor Factor Frea Level Line Limit Level MHz dB dB/m dB dBuV dBuV/m dBuV/m 5.34 28.57 38.11 51.35 47.15 74.00 -26.85 2390.00 28.66 38.11 110.66 106.57 2413.14 5.36 74.00 32.57



Report No.: HKES160500092602

Page: 131 of 159

Worse case mode: 802.11b Test channel: Lowest Remark: Peak Horizontal

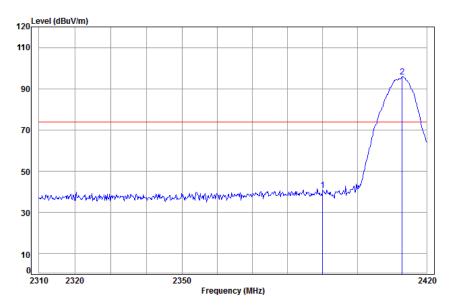

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2412 Band edge

: B


				Preamp Factor			Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	-
							2390.00	pp



Report No.: HKES160500092602

Page: 132 of 159

Worse case mode: 802.11b Test channel: Highest Remark: Peak Vertical

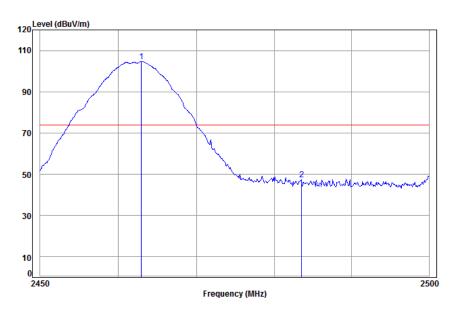

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2462 Band edge

: B


Cable Ant Preamp Read Limit 0ver Loss Factor Factor Frea Level Limit Level Line MHz dB dB/m dB dBuV dBuV/m dBuV/m 5.39 28.89 38.12 108.63 104.79 74.00 30.79 1 pp 2462.90 28.98 38.12 51.01 47.28 74.00 -26.72 2483.50 5.41



Report No.: HKES160500092602

Page: 133 of 159

Worse case mode: 802.11b Test channel: Highest Remark: Peak Horizontal

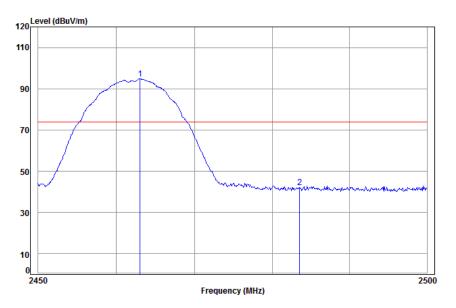

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2462 Band edge

: B


				Preamp Factor			Freq	
dB	dBuV/m	dBuV/m	dBuV	dB	dB/m	dB	MHz	-
							2463.00	
-31.87	74.00	42.13	45.86	38.12	28.98	5.41	2483.50	2



Report No.: HKES160500092602

Page: 134 of 159

Worse case mode: 802.11g Test channel: Lowest Remark: Peak Vertical

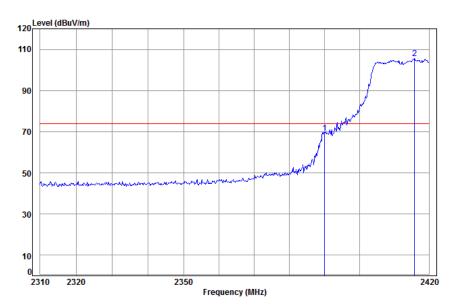

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2412 Band edge

: G


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit dBuV dBuV/m dBuV/m dB dB/m 5.34 28.57 38.11 73.47 69.27 74.00 -4.73 2390.00 2415.84 5.36 28.67 38.11 109.74 105.66 74.00 31.66



Report No.: HKES160500092602

Page: 135 of 159

Worse case mode: 802.11g Test channel: Lowest Remark: Peak Horizontal

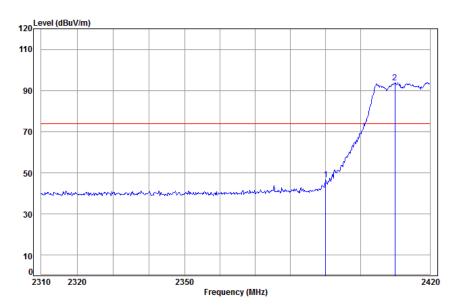

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2412 Band edge

: 0


	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
nn	2390.00			38.11				



Report No.: HKES160500092602

Page: 136 of 159

Worse case mode: 802.11g Test channel: Lowest Remark: Average Vertical

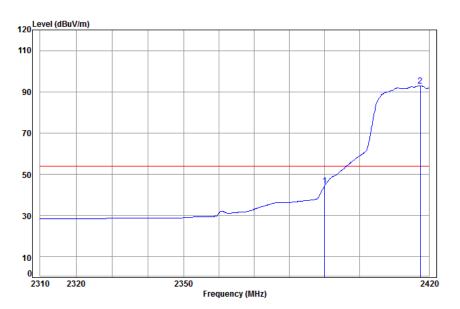

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2412 Band edge

: G


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Line Limit Level MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 5.34 28.57 38.11 48.67 44.47 2390.00 54.00 -9.53 97.07 93.00 54.00 39.00 2417.53 5.36 28.68 38.11



Report No.: HKES160500092602

Page: 137 of 159

Worse case mode: 802.11g Test channel: Lowest Remark: Average Horizontal

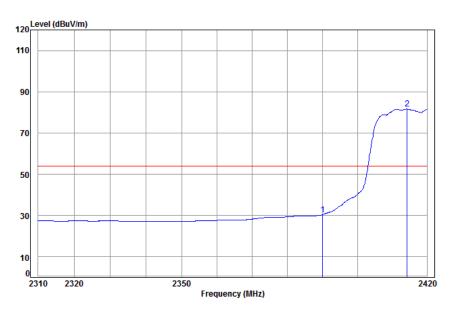

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2412 Band edge

: G


Cable Ant Preamp Read Limit 0ver Loss Factor Factor Frea Level Limit Level Line MHz dB dB/m dB dBuV dBuV/m dBuV/m 5.34 28.57 38.11 34.66 30.46 54.00 -23.54 2390.00 85.68 2414.27 5.36 28.67 38.11 81.60 54.00 27.60



Report No.: HKES160500092602

Page: 138 of 159

Worse case mode: 802.11g Test channel: Highest Remark: Peak Vertical

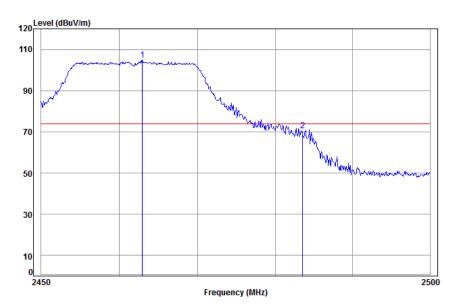

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2462 Band edge

: G


Ant Preamp Cable Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m 2462.90 5.39 28.89 38.12 108.73 104.89 74.00 30.89 5.41 28.98 38.12 74.49 70.76 74.00 -3.24



Report No.: HKES160500092602

Page: 139 of 159

Worse case mode: 802.11g Test channel: Highest Remark: Peak Horizontal

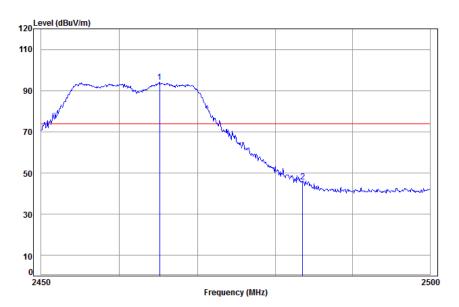

Condition: 3m Horizontal

Job No: : 0926IT

1 p

Mode: : 2462 Band edge

: G


	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
р	2465.14 2483.50							



Report No.: HKES160500092602

Page: 140 of 159

Worse case mode: 802.11g Test channel: Highest Remark: Average Vertical

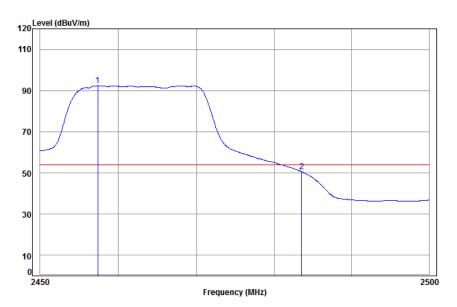

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2462 Band edge

: G


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit dBuV dBuV/m dBuV/m dB dB/m 5.39 28.87 38.12 96.24 92.38 54.00 38.38 2457.34 2483.50 5.41 28.98 38.12 54.47 50.74 54.00 -3.26



Report No.: HKES160500092602

Page: 141 of 159

Worse case mode: 802.11g Test channel: Highest Remark: Average Horizontal

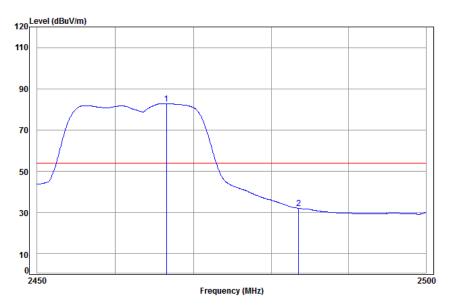

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2462 Band edge

: G


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Line Limit Level MHz dB dB/m dB dBuV dBuV/m dBuV/m 5.40 28.91 38.12 86.65 82.84 1 pp 2466.54 54.00 28.84 38.12 35.88 2483.50 5.41 28.98 32.15 54.00 -21.85



Report No.: HKES160500092602

Page: 142 of 159

Worse case mode: | 802.11n(HT20) | Test channel: | Lowest | Remark: | Peak | Vertical

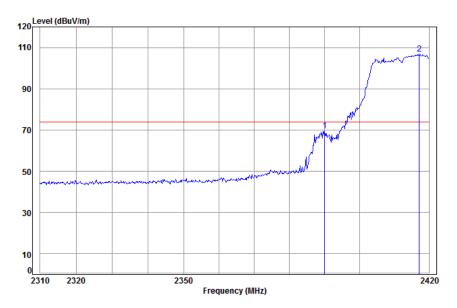

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2412 Band edge

: N20


Cable Ant Preamp Read Limit 0ver Loss Factor Factor Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB 2390.00 5.34 28.57 38.11 73.94 69.74 74.00 -4.26 5.36 28.68 38.11 110.83 106.76 74.00 32.76 2417.19



Report No.: HKES160500092602

Page: 143 of 159

802.11n(HT20) Test channel: Remark: Peak Worse case mode: Lowest Horizontal

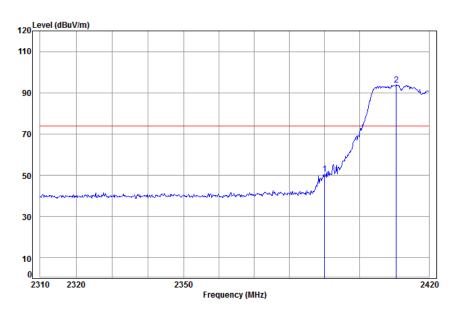

Condition: 3m Horizontal

Job No: : 0926IT

: 2412 Band edge Mode:


	: N20 Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 pp	2390.00 2410.56							



Report No.: HKES160500092602

Page: 144 of 159

Worse case mode: 802.11n(HT20) Test channel: Lowest Remark: Average Vertical

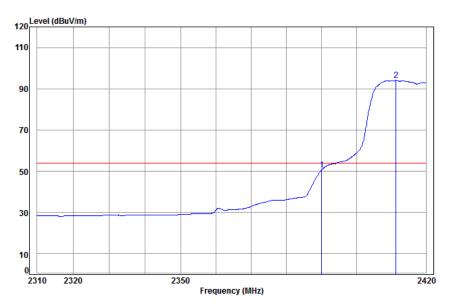

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2412 Band edge

: N20


Ant Preamp Cable Read Limit 0ver Loss Factor Factor Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB 2390.00 5.34 28.57 38.11 54.84 50.64 54.00 -3.36 5.35 28.65 38.11 98.19 94.08 54.00 40.08 2411.35



Report No.: HKES160500092602

Page: 145 of 159

Worse case mode: | 802.11n(HT20) | Test channel: | Lowest | Remark: | Average | Horizontal

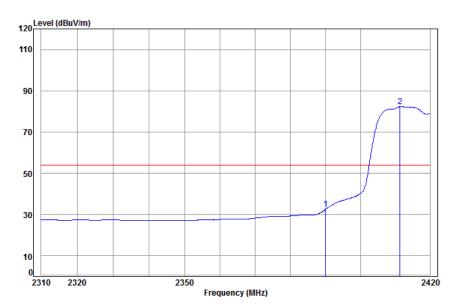

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2412 Band edge

: N20


Cable Ant Preamp Read Limit 0ver Loss Factor Factor Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB 2390.00 5.34 28.57 38.11 36.76 32.56 54.00 -21.44 5.35 28.65 38.11 86.50 82.39 54.00 28.39 2411.35



Report No.: HKES160500092602

Page: 146 of 159

Worse case mode: 802.11n(HT20) Test channel: Highest Remark: Peak Vertical

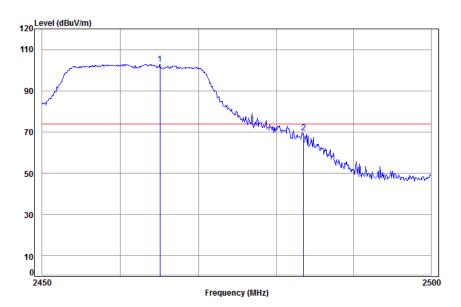

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2462 Band edge

: N20


Cable Ant Preamp Read Limit 0ver Loss Factor Factor Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB 2465.04 5.39 28.90 38.12 106.75 102.92 74.00 28.92 5.41 28.98 38.12 73.32 69.59 74.00 -4.41



Report No.: HKES160500092602

Page: 147 of 159

Worse case mode: 802.11n(HT20) Test channel: Highest Remark: Peak Horizontal

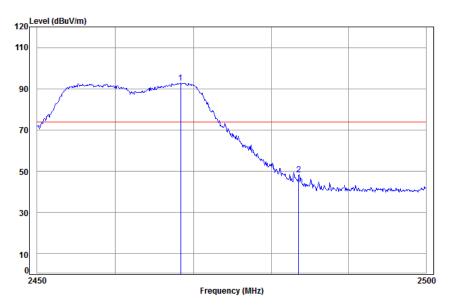

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2462 Band edge

: N20


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Limit Level Line MHz dB dB/m dB dBuV dBuV/m dBuV/m 5.40 28.92 38.12 96.52 1 pp 2468.33 92.72 74.00 18.72 28.98 38.12 52.13 2483.50 5.41 48.40 74.00 -25.60



Report No.: HKES160500092602

Page: 148 of 159

Worse case mode: 802.11n(HT20) Test channel: Highest Remark: Average Vertical

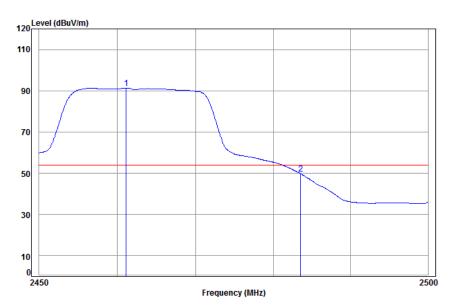

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2462 Band edge

: N20


Cable Ant Preamp Read Limit 0ver Loss Factor Factor Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB 2461.11 5.39 28.88 38.12 95.16 91.31 54.00 37.31 5.41 28.98 38.12 53.57 49.84 54.00 -4.16



Report No.: HKES160500092602

Page: 149 of 159

Worse case mode: 802.11n(HT20) Test channel: Highest Remark: Average Horizontal

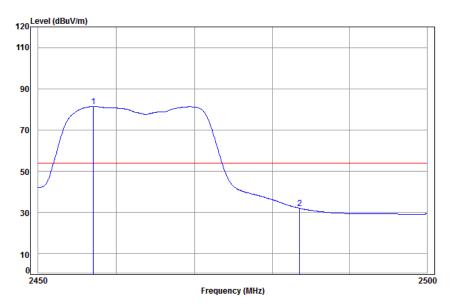

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2462 Band edge

: N20


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Limit Level Line MHz dB dB/m dB dBuV dBuV/m dBuV/m 5.39 28.86 38.12 85.21 81.34 1 pp 2457.04 54.00 27.34 38.12 35.81 32.08 54.00 -21.92 2483.50 5.41 28.98



Report No.: HKES160500092602

Page: 150 of 159

Worse case mode: 802.11n(HT40) Test channel: Lowest Remark: Peak Vertical

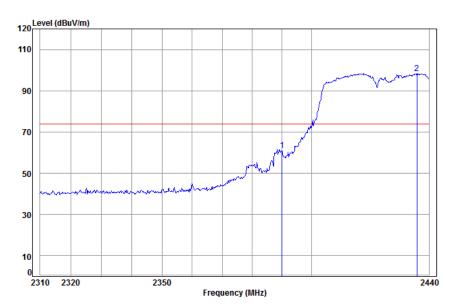

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2422 Band edge

: N40

2435.86


5.37 28.77 38.11 102.55 98.58 74.00 24.58



Report No.: HKES160500092602

Page: 151 of 159

Worse case mode: 802.11n(HT40) Test channel: Lowest Remark: Peak Horizontal

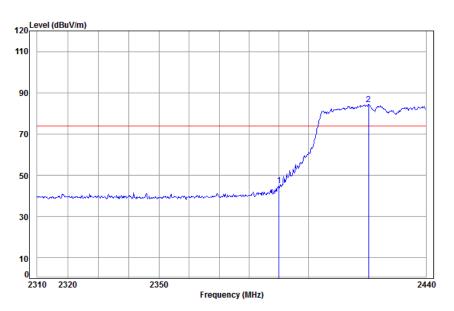

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2422 Band edge

: N40


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Line Limit Level MHz dB dB/m dB dBuV dBuV/m dBuV/m 5.34 38.11 49.42 45.22 74.00 -28.78 2390.00 28.57 88.46 84.41 74.00 10.41 2420.44 5.36 28.70 38.11



Report No.: HKES160500092602

Page: 152 of 159

Worse case mode: 802.11n(HT40) Test channel: Lowest Remark: Average Vertical

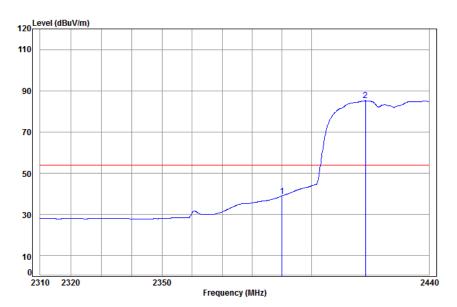

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2422 Band edge

: N40

Cable Ant Preamp Read Limit Over Loss Factor Factor Level Level Line Limit

MHz dB dB/m dB dBuV dBuV/m dBuV/m dBuV/m dB


2390.00 5.34 28.57 38.11 43.24 39.04 54.00 -14.96 p 2418.32 5.36 28.69 38.11 89.24 85.18 54.00 31.18



Report No.: HKES160500092602

Page: 153 of 159

Worse case mode: | 802.11n(HT40) | Test channel: | Lowest | Remark: | Average | Horizontal

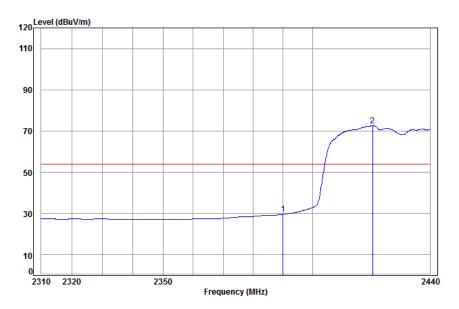

Condition: 3m Horizontal

Job No: : 0926IT

2 pp

Mode: : 2422 Band edge

: N40


Freq			Preamp Factor				
MHz	dB	dB/m	——dB	dBuV	dBuV/m	dBuV/m	dB
			38.11 38.11				



Report No.: HKES160500092602

Page: 154 of 159

Worse case mode: 802.11n(HT40) Test channel: Highest Remark: Peak Vertical

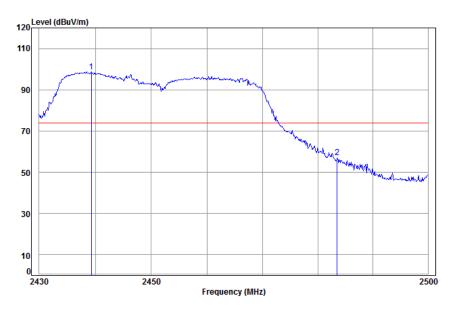

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2452 Band edge

: N40

1 pp


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Limit Level Line MHz dB dB/m dB dBuV dBuV/m dBuV/m 5.37 28.78 38.11 102.74 98.78 2439.27 74.00 24.78 38.12 60.82 57.09 2483.50 5.41 28.98 74.00 -16.91



Report No.: HKES160500092602

Page: 155 of 159

Worse case mode: 802.11n(HT40) Test channel: Highest Remark: Peak Horizontal

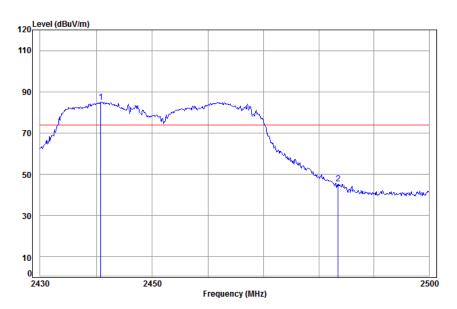

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2452 Band edge

: N40


Cable Ant Preamp Read Limit 0ver Loss Factor Factor Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB 2440.79 5.38 28.79 38.11 88.96 85.02 74.00 11.02 5.41 28.98 38.12 49.25 45.52 74.00 -28.48



Report No.: HKES160500092602

Page: 156 of 159

Worse case mode: | 802.11n(HT40) | Test channel: | Highest | Remark: | Average | Vertical

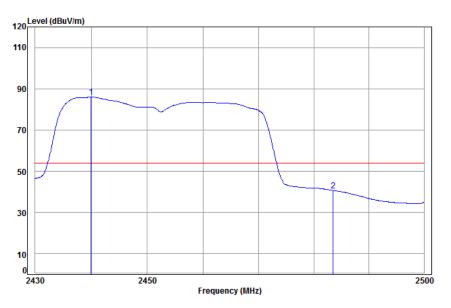

Condition: 3m Vertical Job No: : 0926IT

Mode: : 2452 Band edge

: N40

1 pp


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Limit Level Line MHz dB dB/m dB dBuV dBuV/m dBuV/m 5.38 28.79 38.11 89.87 85.93 54.00 31.93 2439.96 38.12 44.41 40.68 54.00 -13.32 2483.50 5.41 28.98



Report No.: HKES160500092602

Page: 157 of 159

Worse case mode: 802.11n(HT40) Test channel: Highest Remark: Average Horizontal

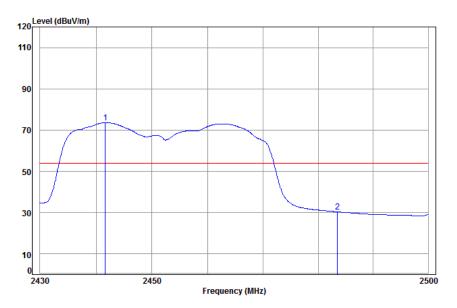

Condition: 3m Horizontal

Job No: : 0926IT

Mode: : 2452 Band edge

: N40

			Cable	Ant	Preamp	Read		Limit	0ver
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp	2441.62	5.38	28.79	38.11	77.53	73.59	54.00	19.59
2		2483.50	5.41	28.98	38.12	34.08	30.35	54.00	-23.65

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: HKES160500092602

Page: 158 of 159

#### 7 Photographs - EUT Test Setup

Test model No.: AP One Rugged

#### 7.1 Conducted Emission



#### 7.2 Radiated Emission





Report No.: HKES160500092602

Page: 159 of 159

#### 7.3 Radiated Spurious Emission



#### 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for HKES1605000926IT.