

Test Report

Product Name	Peplink Pepwave Wireless Product
Model No	AP Pro AX, APP-AX-IP67
FCC ID	U8G-P1PROAX

Applicant	PISMO LABS TECHNOLOGY LIMITED
Address	A8, 5/F, HK Spinners Industrial Building, Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Hong Kong

Date of Receipt	Nov. 29, 2022
Issued Date	Mar. 02, 2023
Report No.	22B1024R-RFUSV03S-A
Report Version	V3.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.


This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report



Product Name	Peplink Pepwave Wireless Product
Applicant	PISMO LABS TECHNOLOGY LIMITED
Address	A8, 5/F, HK Spinners Industrial Building, Phase 6, 481 Castle Peak Road, Cheung Sha Wan, Hong Kong
Manufacturer	PISMO LABS TECHNOLOGY LIMITED
Model No.	AP Pro AX, APP-AX-IP67
FCC ID	U8G-P1PROAX
EUT Rated Voltage	DC 12 V (by Power Adapter) or 802.3at PoE
EUT Test Voltage	DC 12 V (by Power Adapter) or 802.3at PoE
Trade Name	 PEPWAVE
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E ANSI C63.4: 2014, ANSI C63.10: 2013 KDB Publication 789033
Test Result	Complied

Documented By : Jinn Chen
(Supervisor / Jinn Chen)

Tested By : Ivan Chuang
(Senior Engineer / Ivan Chuang)

Approved By : Alan Chen
(Senior Engineer / Alan Chen)

TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. EUT Description	6
1.2. Tested System Details	8
1.3. Configuration of tested System	8
1.4. EUT Exercise Software	9
1.5. Test Facility	10
1.6. List of Test Equipment	11
1.7. Uncertainty	12
2. Conducted Emission	13
2.1. Test Setup	13
2.2. Limits	13
2.3. Test Procedure	14
2.4. Test Result of Conducted Emission	15
3. Maximun conducted output power	16
3.1. Test Setup	16
3.2. Limits	17
3.3. Test Procedure	19
3.4. Test Result of Maximum conducted output power	20
4. Maximun Power Spectral Density	29
4.1. Test Setup	29
4.2. Limits	29
4.3. Test Procedure	30
4.4. Test Result of Maximun Power Spectral Density	31
5. Radiated Emission	39
5.1. Test Setup	39
5.2. Limits	40
5.3. Test Procedure	41
5.4. Test Result of Radiated Emission	43
6. Band Edge.....	55
6.1. Test Setup	55
6.2. Limits	55
6.3. Test Procedure	56
6.4. Test Result of Band Edge	57
7. Occupied Bandwidth	69
7.1. Test Setup	69

7.2. Limits	69
7.3. Test Procedure	69
7.4. Test Result of Occupied Bandwidth.....	69
8. Duty Cycle	74
8.1. Test Setup	74
8.2. Test Procedure	74
8.3. Test Result of Duty Cycle	75

Appendix 1: EUT Test Photographs


Appendix 2: Product Photos-Please refer to the file: 22B1024R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
22B1024R-RFUSV03S-A	V1.0	Initial issue of report.	Jan. 16, 2023
22B1024R-RFUSV03S-A	V2.0	Add antenna photo.	Jan. 31, 2023
22B1024R-RFUSV03S-A	V3.0	Corrected to full report.	Mar. 02, 2023

1. General Information

1.1. EUT Description

Product Name	Peplink Pepwave Wireless Product
Trade Name	 PEPWAVE
Model No.	AP Pro AX, APP-AX-IP67
FCC ID	U8G-P1PROAX
Frequency Range	802.11a/n/ac/ax-20 MHz: 5180-5240 MHz, 5745-5825 MHz 802.11n/ac/ax-40 MHz: 5190-5230 MHz, 5755-5795 MHz 802.11ac/ax-80 MHz: 5210 MHz, 5775 MHz
Number of Channels	802.11a/n/ac/ax-20 MHz: 9CH, 802.11n/ac/ax-40 MHz: 4CH 802.11ac/ax-80 MHz: 2CH
Data Rate	802.11a: 6-54 Mbps, 802.11n: up to 300 MHz 802.11ac: up to 866.7 MHz, 802.11ax: up to 1201 MHz
Type of Modulation	OFDM, OFDMA
Channel Control	Auto

For Without Sell Accessories Information

Power Adapter	Brand: JG, M/N: ZZU1588-150120-2A Input: AC 100-240V~50-60Hz, 1.5A Output: 12V==1.5A
PoE	Brand: BILLION, M/N: BP035-560054QAX Input: AC 100-240V~50-60Hz, 0.8A Output: 56V==0.536A

Antenna List_ Without Sell Accessories

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	WHA YU INDUSTRIAL CO., LTD.	SRF20171227	Omni-directional	4.08 dBi for 5150-5250 MHz 4.08 dBi for 5725-5850 MHz

Note: The antenna of EUT is conform to FCC 15.203.

802.11a/n/ac/ax-20 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	40	5200	44	5220	48	5240
149	5745	153	5765	157	5785	161	5805
165	5825	--	--	--	--	--	--

802.11n/ac/ax-40 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	151	5755	159	5795

802.11ac/ax-80 MHz Center Working Frequency of Each Channel:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775	--	--	--	--

Note:

1. This device is a Peplink Pepwave Wireless Product with built-in WLAN, this report for 5GHz WLAN.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest data rates are tested in each mode. Only worst case is shown in the report.
(802.11a is 6Mbps 、802.11ax-20 MHz/40 MHz/80 MHz is MCS0)
4. These tests were conducted on a sample for the purpose of demonstrating compliance of 802.11a/n/ac/ax transmitter with Part 15 Subpart E for Unlicensed National Information Infrastructure devices.

Test Mode	Mode 1	Transmit (802.11a) Transmit (802.11n-20 MHz) Transmit (802.11n-40 MHz) Transmit (802.11ac-20 MHz) Transmit (802.11ac-40 MHz) Transmit (802.11ac-80 MHz) Transmit (802.11ax-20 MHz) Transmit (802.11ax-40 MHz) Transmit (802.11ax-80 MHz)
-----------	--------	--

1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

PoE Mode:

Product	Brand	Model No.	Serial No.	Power Cord
1 Notebook PC	ASUS	P5430U	G8NXCVC07J11032C	N/A
2 PoE	BILLION	BP035-560054QAX	N/A	N/A

Cable Type	Cable Description
A LAN Cable	Non-shielded, 2m
B LAN Cable	Non-shielded, 3m


Adapter Mode:

Product	Brand	Model No.	Serial No.	Power Cord
1 Power Adapter	JG	ZZU1588-150120-2A	N/A	N/A
2 Notebook PC	ASUS	P5430U	G8NXCVC07J11032C	N/A


Cable Type	Cable Description
A Power Cable	Non-shielded, 1.5m
B LAN Cable	Non-shielded, 3m

1.3. Configuration of tested System

PoE Mode:

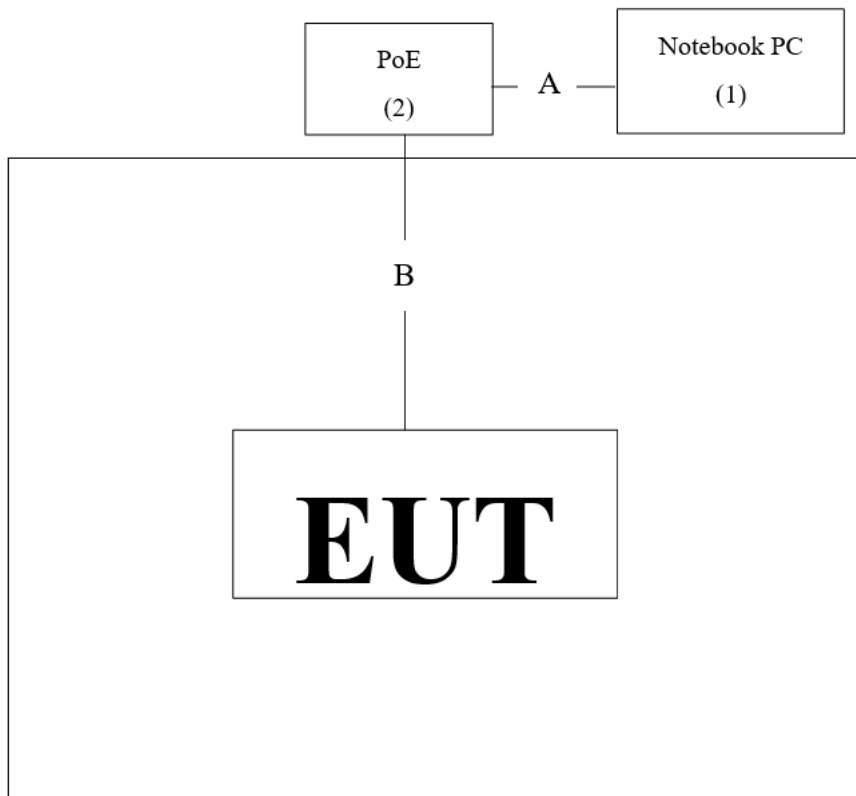

Adapter Mode:

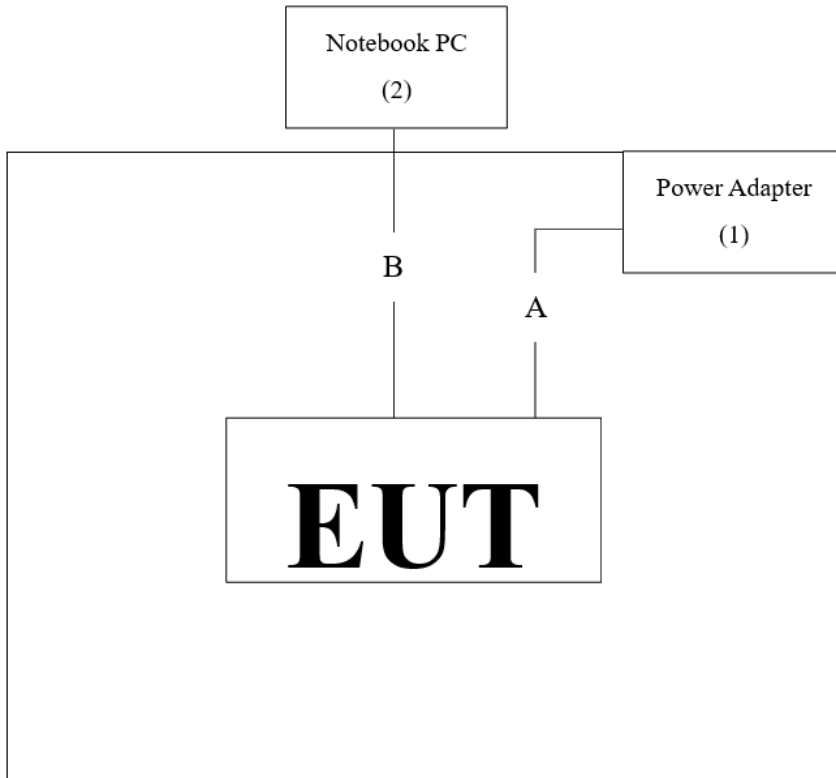

1.4. EUT Exercise Software

1. Setup the EUT as shown in Section 1.3.
2. Execute software “QSPR Version 5.0-00197” on the Notebook PC.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Conducted Emission	Temperature (°C)	10~40 °C	21.5 °C
	Humidity (%RH)	10~90 %	47.6 %
Radiated Emission	Temperature (°C)	10~40 °C	22.3 °C
	Humidity (%RH)	10~90 %	33.1 %
Conductive	Temperature (°C)	10~40 °C	22.0 °C
	Humidity (%RH)	10~90 %	55.0 %

USA : FCC Registration Number: TW0033

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
 Address : No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan
 Performed Location : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan,
R.O.C.
 Phone Number : +886-3-275-7255
 Fax Number : +886-3-327-8031
 Email Address : info.tw@dekra.com
 Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conduction Measurements /HY-SR01

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	EMI Test Receiver	R&S	ESR7	101601	2022/06/23	2023/06/22
V	Two-Line V-Network	R&S	ENV216	101306	2022/05/23	2023/05/22
V	Two-Line V-Network	R&S	ENV216	101307	2022/07/04	2023/07/03
V	Coaxial Cable	SUHNER	RG400_BNC	RF001	2022/05/24	2023/05/23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software version: E3 210616 dekra V9.

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103467	2022/04/26	2023/04/25
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000539	2022/05/27	2023/05/26
V	Power Sensor	KEYSIGHT	N1923A	MY59240002	2022/05/19	2023/05/18
V	Power Sensor	KEYSIGHT	N1923A	MY59240003	2022/05/19	2023/05/18

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software version: RF Conducted Test Tools R3 V3.0.1.14.

For Radiated Measurements / HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	AMETEK	HLA6121	49611	2022/03/18	2023/03/17
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-675	2021/08/11	2023/08/10
V	Horn Antenna	RF SPIN	DRH18-E	210508A18ES	2022/06/08	2023/06/07
V	Horn Antenna	Com-Power	AH-840	101100	2021/10/04	2023/10/03
V	Pre-Amplifier	SGH	SGH0301-9	20211007-10	2022/02/22	2023/02/21
V	Pre-Amplifier	SGH	PRAMP118	20200701	2022/07/28	2023/07/27
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2022/07/28	2023/07/27
V	Pre-Amplifier	EMCI	EMC184045SE	980369	2022/05/12	2023/05/11
	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314		
	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242		
	Filter	MICRO TRONICS	BRM50702	G269	2022/07/31	2023/07/30
V	Filter	MICRO TRONICS	BRM50716	G196	2022/07/27	2023/07/26
V	EMI Test Receiver	R&S	ESR3	102793	2022/12/05	2023/12/04
V	Spectrum Analyzer	R&S	FSV3044	101114	2022/02/11	2023/02/10
V	Coaxial Cable	SGH	SGH18	2021005-1	2022/03/18	2023/03/17
	Coaxial Cable	SGH	SGH18	202108-4		
	Coaxial Cable	SGH	SGH18	GD20110223-1		
	Coaxial Cable	SGH	HA800	GD20110222-3		

Note:

1. Bi-Log Antenna and Horn Antenna(AH-840) is calibrated every two years, the other equipments are calibrated every one year.
2. The test instruments marked with “V” are used to measure the final test results.
3. Test Software version: E3 210616 dekra V9.

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Item	Uncertainty	
Conducted Emission	±3.42 dB	
Maximum conducted output power	Power Meter ±0.89 dB	Spectrum Analyzer ±2.06 dB
Maximum Power Spectral Density	±2.06 dB	
Radiated Emission	Under 1 GHz ±4.05 dB	Above 1 GHz ±3.73 dB
Band Edge	Under 1 GHz ±4.05 dB	Above 1 GHz ±3.73 dB
Occupied Bandwidth	±1544.74 Hz	
Duty Cycle	±2.31msec	

2. Conducted Emission

2.1. Test Setup

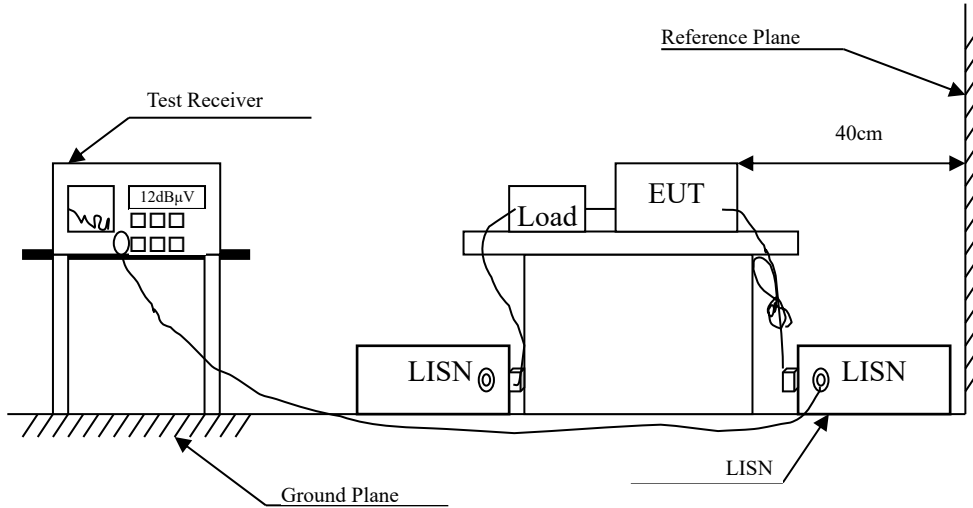

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks : In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure


The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50 μ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50 μ H coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2014 on conducted measurement.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

2.4. Test Result of Conducted Emission

PoE Mode

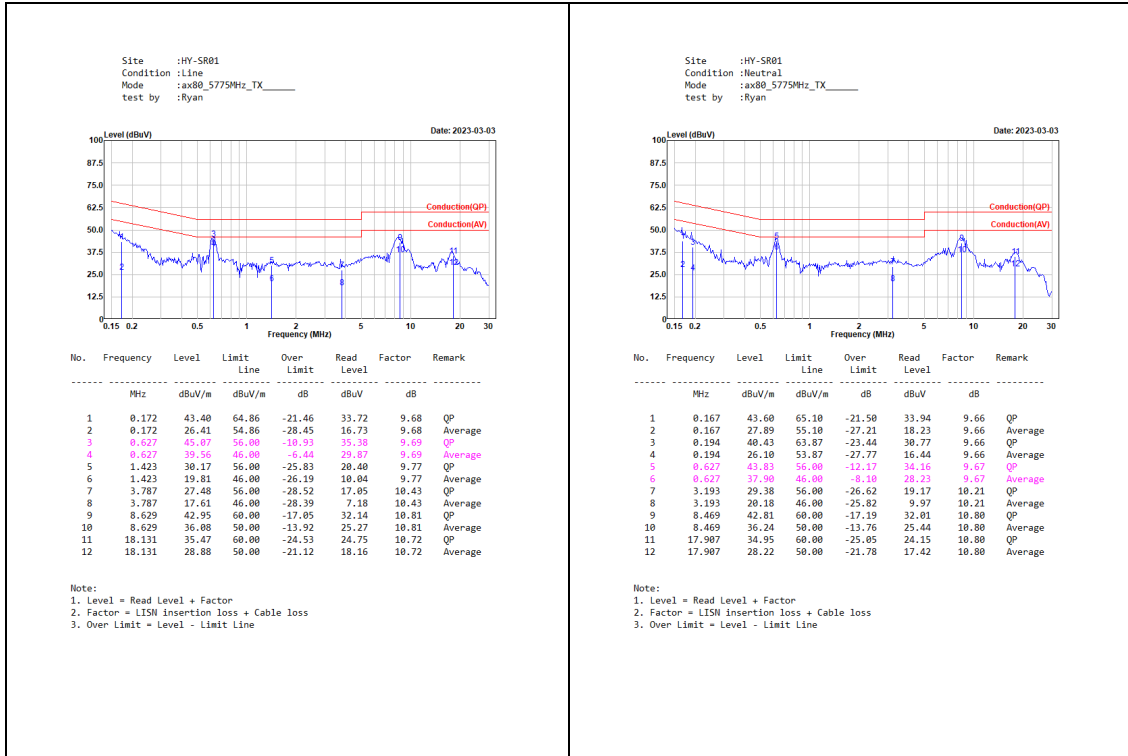


Adapter Mode

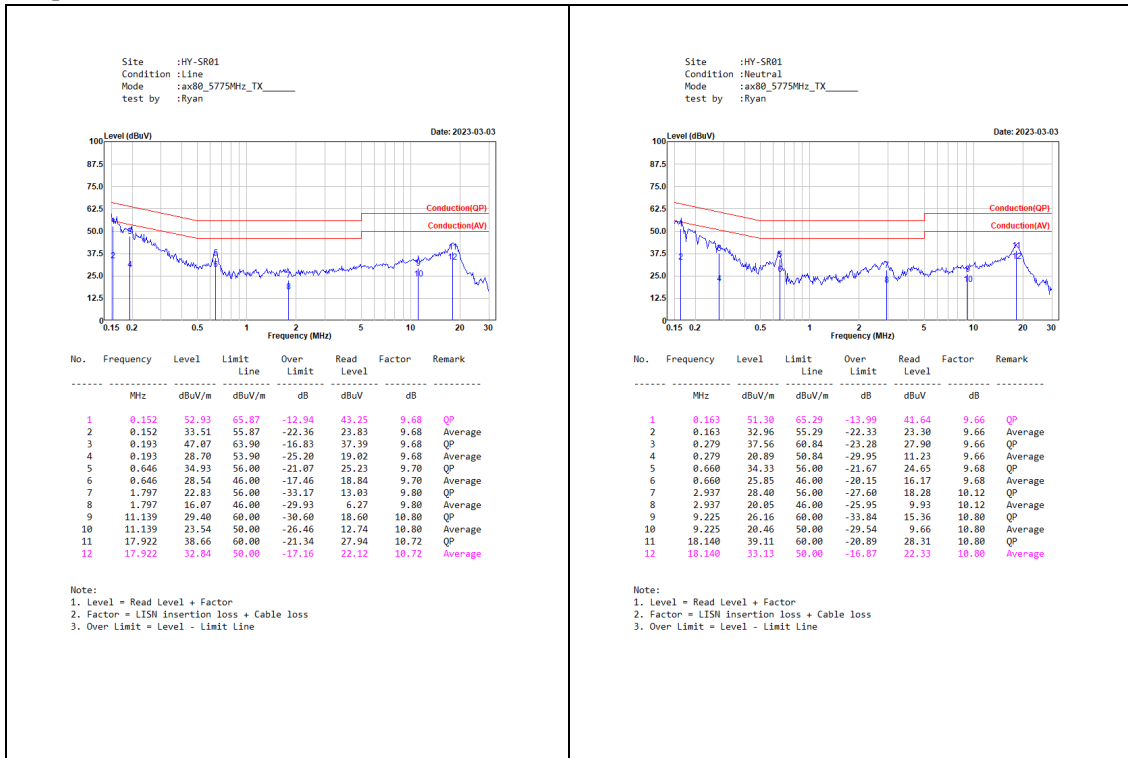

3. Maximun conducted output power


3.1. Test Setup

26dB Occupied Bandwidth

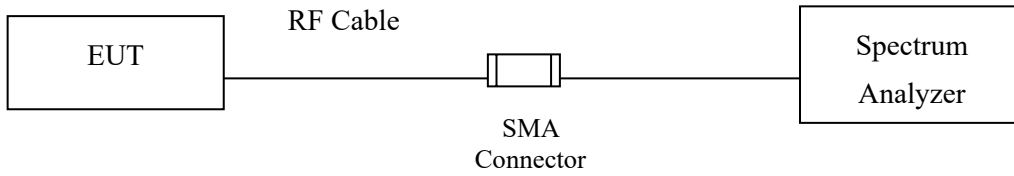


Conduction Power Measurement

Conduction Power Measurement (for 802.11an)

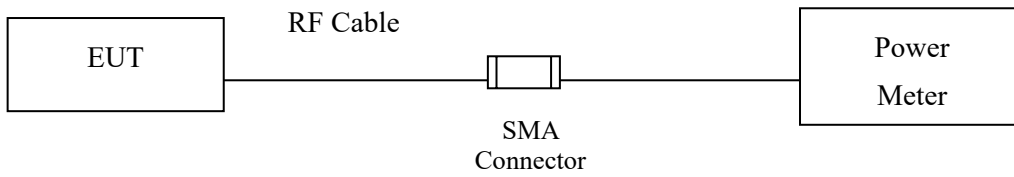

Conduction Power Measurement (for 802.11ac/ax)

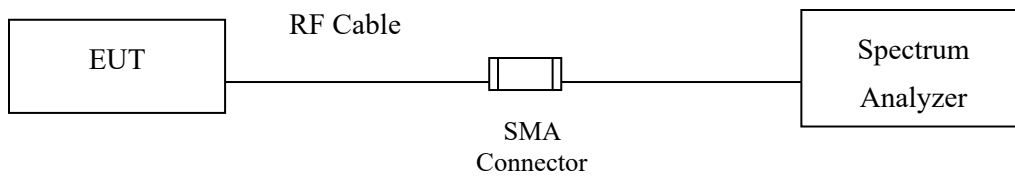

3.2. Limits

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W, provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, if transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, if transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 99% emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

The maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3. Test Procedure

As an alternative to FCC KDB-789033, the EUT maximum conducted output power was measured with an average power meter employing a video bandwidth greater than the 6dB BW of the emission under test. Maximum conducted output power was read directly from the meter across all data rates, and across three channels within each sub-band. Special care was used to make sure that the EUT was transmitting in continuous mode. This method exceeds the limitations of FCC KDB-789033, and provides more accurate measurements.

802.11an (BW \leq 40MHz) Maximum conducted output power using KDB 789033 section E)3)b) Method PM-G (Measurement using a gated RF average power meter)

Note: the power meter have a video bandwidth that is greater than or equal to the measurement bandwidth, (Anritsu/ MA2411B video bandwidth: 65MHz)

802.11ac (BW=80MHz) Maximum conducted output power using KDB 789033 section E)2)b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep).

When transmitted signals consist of two or more non-contiguous spectrum segments (e.g., 80+80 MHz mode) or when a single spectrum segment of a transmission crosses the boundary between two adjacent U-NII bands, KDB 644545 D03 section D) procedure is used for measurements.

3.4. Test Result of Maximum conducted output power

Product : Peplink Pepwave Wireless Product
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11a)
 Test Date : 2022/12/29

Maximum conducted output power Measurement:

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit (dBm)
36	5180	13.97	13.77	16.88	30
44	5220	13.94	13.82	16.89	30
48	5240	13.99	13.71	16.86	30
149	5745	20.74	20.85	23.81	30
157	5785	20.82	20.93	23.89	30
165	5825	20.83	20.97	23.91	30

Note:

1. Output Power Value (dBm) = 10*LOG (Chain A(mW) + Chain B(mW))

E.I.R.P

Channel No.	Frequency (MHz)	Output Power (dBm)	Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
36	5180	16.88	4.08	20.96	21
44	5220	16.89	4.08	20.97	21
48	5240	16.86	4.08	20.94	21

Product : Peplink Pepwave Wireless Product
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11n-20 MHz)
 Test Date : 2022/12/29

Maximum conducted output power Measurement:

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit (dBm)
36	5180	13.55	13.30	16.44	30
44	5220	13.59	13.29	16.45	30
48	5240	13.61	13.27	16.45	30
149	5745	20.68	20.71	23.71	30
157	5785	20.73	20.77	23.76	30
165	5825	20.74	20.86	23.81	30

Note:

1. Output Power Value (dBm) = 10*LOG (Chain A(mW) + Chain B(mW))

E.I.R.P

Channel No.	Frequency (MHz)	Output Power (dBm)	Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
36	5180	16.44	4.08	20.52	21
44	5220	16.45	4.08	20.53	21
48	5240	16.45	4.08	20.53	21

Product : Peplink Pepwave Wireless Product
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11n-40 MHz)
 Test Date : 2022/12/29

Maximum conducted output power Measurement:

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit (dBm)
38	5190	13.75	13.32	16.55	30
46	5230	14.02	13.43	16.75	30
151	5755	20.73	20.77	23.76	30
159	5795	20.74	20.85	23.81	30

Note:

1. Output Power Value (dBm) = 10*LOG (Chain A(mW) + Chain B(mW))

E.I.R.P

Channel No.	Frequency (MHz)	Output Power (dBm)	Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
38	5190	16.55	4.08	20.63	21
46	5230	16.75	4.08	20.83	21

Product : Peplink Pepwave Wireless Product
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11ac-20 MHz)
 Test Date : 2022/12/29

Maximum conducted output power Measurement:

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit (dBm)
36	5180	13.64	13.38	16.52	30
44	5220	13.65	13.31	16.49	30
48	5240	13.66	13.34	16.51	30
149	5745	20.73	20.79	23.77	30
157	5785	20.80	20.85	23.84	30
165	5825	20.84	20.96	23.91	30

Note:

1. Output Power Value (dBm) = 10*LOG (Chain A(mW) + Chain B(mW))

E.I.R.P

Channel No.	Frequency (MHz)	Output Power (dBm)	Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
36	5180	16.52	4.08	20.60	21
44	5220	16.49	4.08	20.57	21
48	5240	16.51	4.08	20.59	21

Product : Peplink Pepwave Wireless Product
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11ac-40 MHz)
 Test Date : 2022/12/29

Maximum conducted output power Measurement:

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit (dBm)
38	5190	13.88	13.41	16.66	30
46	5230	14.13	13.51	16.84	30
151	5755	20.85	20.88	23.88	30
159	5795	20.88	20.93	23.92	30

Note:

1. Output Power Value (dBm) = 10*LOG (Chain A(mW) + Chain B(mW))

E.I.R.P

Channel No.	Frequency (MHz)	Output Power (dBm)	Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
38	5190	16.66	4.08	20.74	21
46	5230	16.84	4.08	20.92	21

Product : Peplink Pepwave Wireless Product
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11ac-80 MHz)
 Test Date : 2022/12/29

Maximum conducted output power Measurement

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit (dBm)
42	5210	13.61	13.48	16.56	30
155	5775	18.27	18.45	21.37	30

Note:

1. Output Power Value (dBm) = 10*LOG (Chain A(mW) + Chain B(mW))

E.I.R.P

Channel No.	Frequency (MHz)	Output Power (dBm)	Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
42	5210	16.56	4.08	20.64	21

Product : Peplink Pepwave Wireless Product
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11 ax-20 MHz)
 Test Date : 2022/12/29

Maximum conducted output power Measurement:

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit (dBm)
36	5180	13.75	13.42	16.60	30
44	5220	13.82	13.52	16.68	30
48	5240	13.73	13.40	16.58	30
149	5745	20.76	20.82	23.80	30
157	5785	20.87	20.95	23.92	30
165	5825	20.89	20.97	23.94	30

Note:

1. Output Power Value (dBm) = 10*LOG (Chain A(mW) + Chain B(mW))

E.I.R.P

Channel No.	Frequency (MHz)	Output Power (dBm)	Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
36	5180	16.60	4.08	20.68	21
44	5220	16.68	4.08	20.76	21
48	5240	16.58	4.08	20.64	21

Product : Peplink Pepwave Wireless Product
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11ax-40 MHz)
 Test Date : 2022/12/29

Maximum conducted output power Measurement:

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit (dBm)
38	5190	13.99	13.56	16.79	30
46	5230	14.18	13.57	16.90	30
151	5755	20.91	20.96	23.95	30
159	5795	20.96	20.98	23.98	30

Note:

1. Output Power Value (dBm) = 10*LOG (Chain A(mW) + Chain B(mW))

E.I.R.P

Channel No.	Frequency (MHz)	Output Power (dBm)	Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
38	5190	16.79	4.08	20.87	21
46	5230	16.90	4.08	20.98	21

Product : Peplink Pepwave Wireless Product
 Test Item : Maximum conducted output power
 Test Mode : Transmit (802.11ax-80 MHz)
 Test Date : 2022/12/29

Maximum conducted output power Measurement

Channel No.	Frequency (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Output Power (dBm)	Output Power Limit (dBm)
42	5210	13.66	13.52	16.60	30
155	5775	18.33	18.52	21.44	30

Note:


1. Output Power Value (dBm) = 10*LOG (Chain A(mW) + Chain B(mW))

E.I.R.P

Channel No.	Frequency (MHz)	Output Power (dBm)	Antenna gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
42	5210	16.60	4.08	20.68	21

4. Maximum Power Spectral Density

4.1. Test Setup

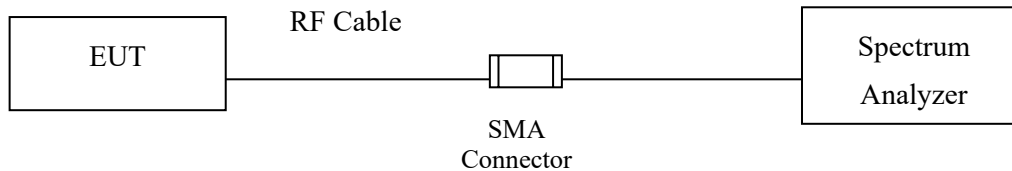

4.2. Limits

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point UNII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.3. Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

The Spectral Density using KDB 789033 section F) procedure, Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer.

SA-1 method is selected to run the test.

4.4. Test Result of Maximun Power Spectral Density

Product : Peplink Pepwave Wireless Product
 Test Item : Maximun Power Spectral Density
 Test Mode : Transmit (802.11a)


Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
36	5180	6	A	1.77	0.48	5.26	17	Pass
			B	1.70		5.19		
44	5220	6	A	1.36	0.48	4.85	17	Pass
			B	1.65		5.14		
48	5240	6	A	1.35	0.48	4.84	17	Pass
			B	1.83		5.32		

Channel No.	Frequency (MHz)	Data Rate (Mbps)	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
149	5745	6	A	5.24	0.48	8.73	30	Pass
			B	5.09		8.58		
157	5785	6	A	5.00	0.48	8.49	30	Pass
			B	5.12		8.61		
165	5825	6	A	4.81	0.48	8.30	30	Pass
			B	5.06		8.55		

Note:

1. Total PPSD/MHz = PPSD/MHz +10*log 2 (two antennas)+ Duty factor.
2. The quantity 10*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 149 (Chain A):

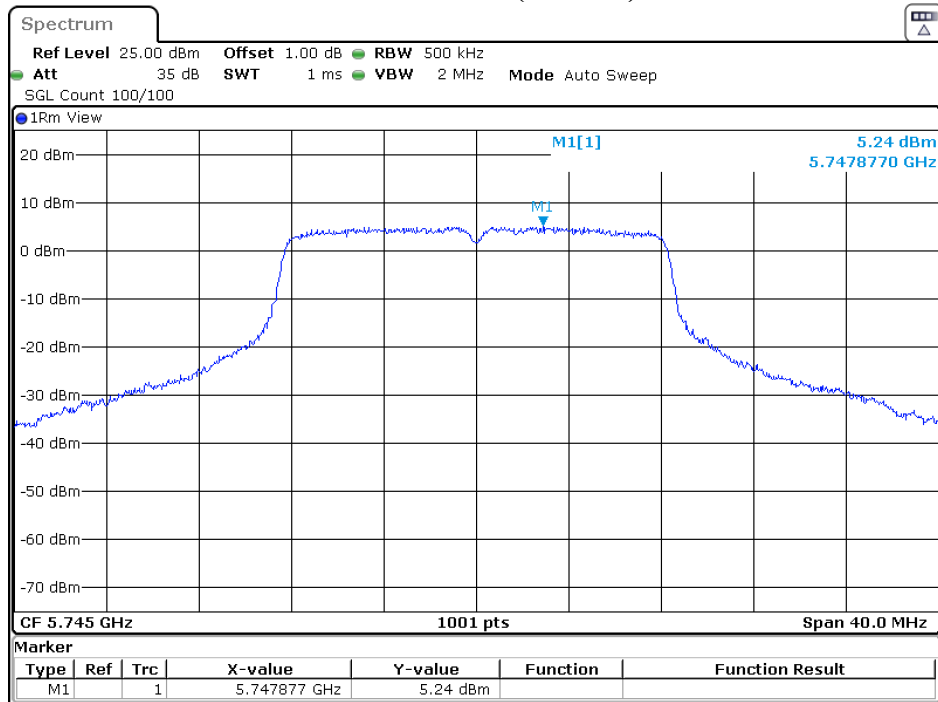

Date: 22.FEB.2023 18:40:43

Product : Peplink Pepwave Wireless Product
 Test Item : Maximun Power Spectral Density
 Test Mode : Transmit (802.11ax-20 MHz)


Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
36	5180	MCS0	A	0.84	0.20	4.05	17	Pass
			B	1.22		4.43		
44	5220	MCS0	A	0.55	0.20	3.76	17	Pass
			B	1.24		4.45		
48	5240	MCS0	A	0.76	0.20	3.97	17	Pass
			B	1.15		4.36		

Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
149	5745	MCS0	A	4.85	0.20	8.06	30	Pass
			B	4.76		7.97		
157	5785	MCS0	A	4.47	0.20	7.68	30	Pass
			B	4.40		7.61		
165	5825	MCS0	A	4.81	0.20	8.02	30	Pass
			B	4.67		7.88		

Note:

1. Total PPSD/MHz = PPSD/MHz + 10*log 2 (two antennas) + Duty factor.
2. The quantity 10*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 149 (Chain A):

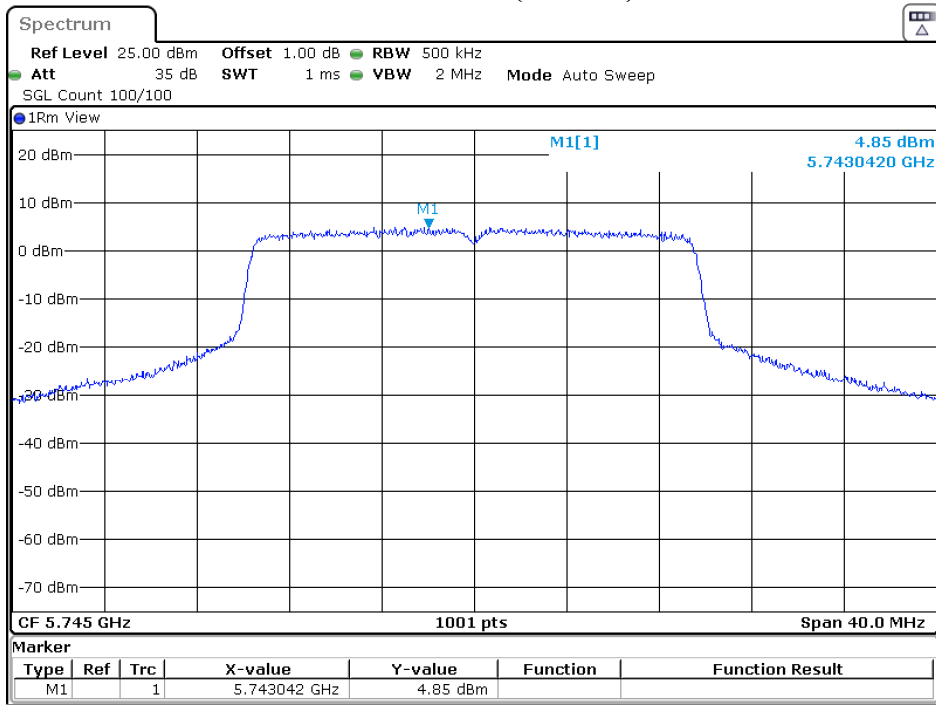

Date: 22.FEB.2023 18:47:25

Product : Peplink Pepwave Wireless Product
 Test Item : Maximun Power Spectral Density
 Test Mode : Transmit (802.11ax-40 MHz)


Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
38	5190	MCS0	A	-1.34	0.29	1.96	17	Pass
			B	-0.91		2.39		
46	5230	MCS0	A	-2.26	0.29	1.04	17	Pass
			B	-1.50		1.80		

Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
151	5755	MCS0	A	1.93	0.29	5.23	30	Pass
			B	2.19		5.49		
159	5795	MCS0	A	1.91	0.29	5.21	30	Pass
			B	1.75		5.05		

Note:

1. Total PPSD/MHz = PPSD/MHz + 10*log 2 (two antennas) + Duty factor.
2. The quantity 10*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 151 (Chain B):

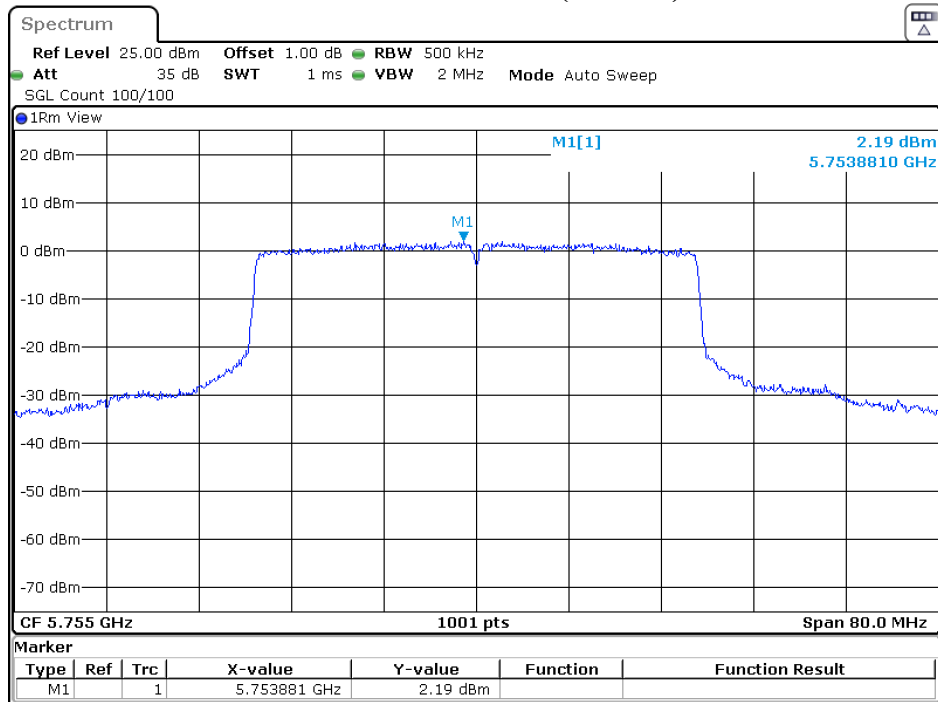

Date: 22.FEB.2023 19:01:16

Product : Peplink Pepwave Wireless Product
 Test Item : Maximun Power Spectral Density
 Test Mode : Transmit (802.11ax-80 MHz)


Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
42	5210	MCS0	A	-5.54	0.27	-2.26	17	Pass
			B	-4.95		-1.67		

Channel No.	Frequency (MHz)	Data Rate	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Limit (dBm)	Result
155	5775	MCS0	A	-3.16	0.27	0.12	30	Pass
			B	-3.13		0.15		

Note:

1. Total PPSD/MHz = PPSD/MHz +10*log 2 (two antennas)+ Duty factor.
2. The quantity 10*log 2 (two antennas) is added to the spectrum peak value according to document 662911 D01.

Channel 155 (Chain B):

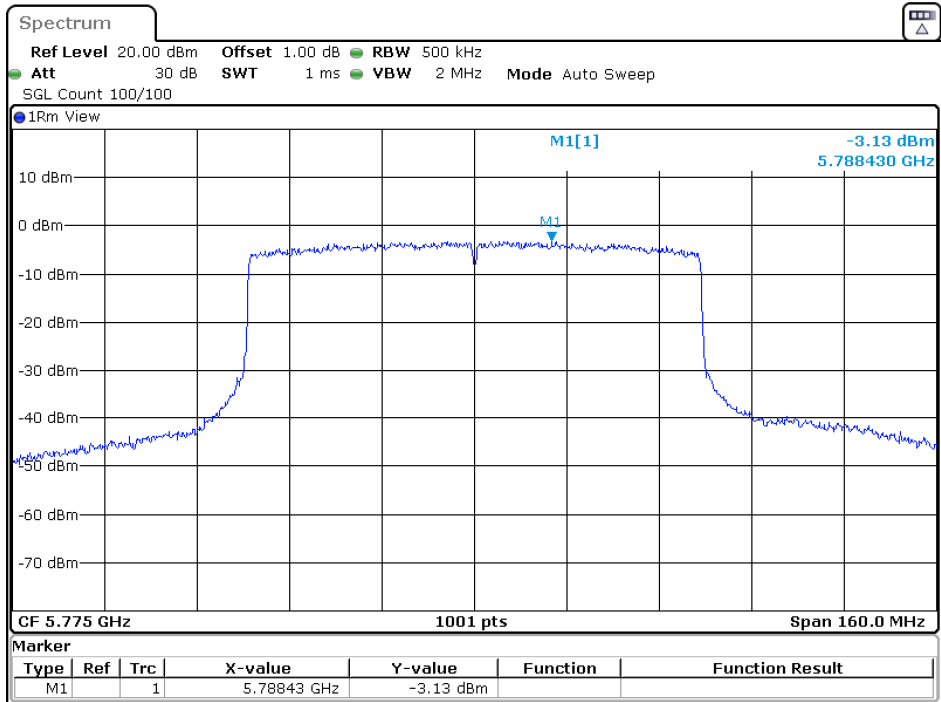


Date: 23.FEB.2023 15:17:08


5. Radiated Emission

5.1. Test Setup


Radiated Emission Under 30MHz

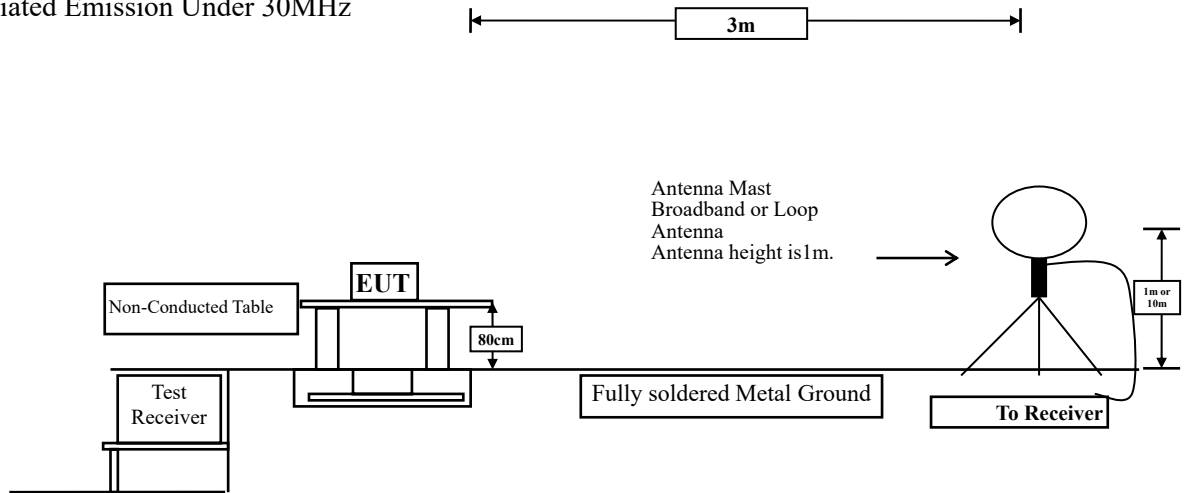

Radiated Emission Below 1GHz

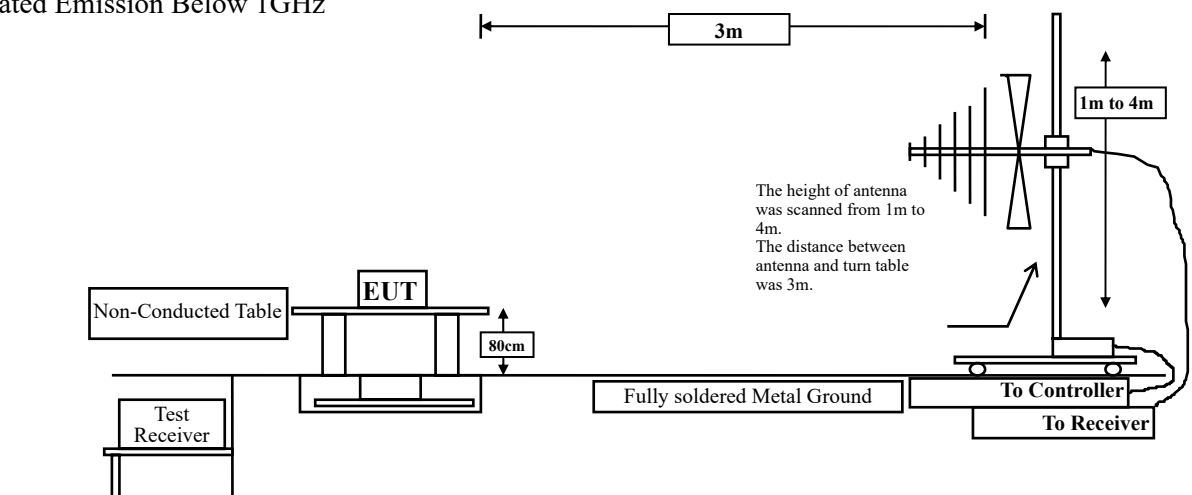

Radiated Emission Above 1GHz

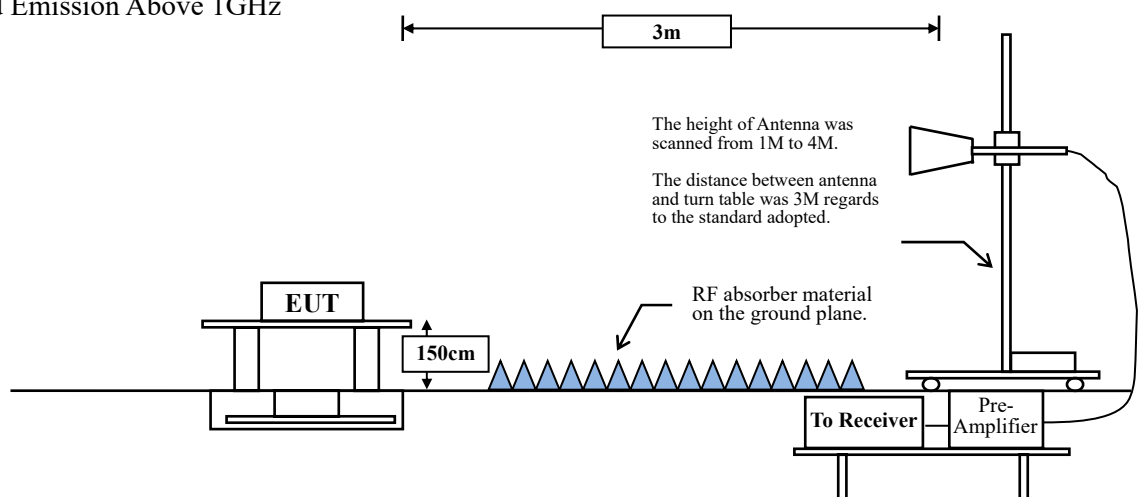

5.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dB μ V/m) = 20 log E field strength (μ V/m).

5.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to FCC KDB-789033 test procedure for compliance to FCC 47CFR 15. 407 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9 kHz and 30 MHz~1 GHz is 120 kHz and above 1 GHz is 1 MHz.

Radiated emission measurements below 30 MHz are made using Loop Antenna and 30 MHz~1 GHz are made using broadband Bilog antenna and above 1 GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9 kHz - 10 th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW \geq 3MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %

VBW \geq 1/T, when duty cycle < 98 %





(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)





5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	89.59	1.4348	697	1000
802.11ax-20 MHz	95.43	5.4420	184	200
802.11ax-40 MHz	93.46	5.3841	186	200
802.11ax-80 MHz	93.96	5.4130	185	200





Note: Duty Cycle Refer to Section 8.





5.4. Test Result of Radiated Emission





<p>Site :HY-CB03 Condition :3m ,HORIZONTAL Mode :TX_a_5180MHz Test BY :Ashton Chiu</p> <p>Date: 2022-12-28</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.000</td> <td>46.55</td> <td>68.22</td> <td>-21.67</td> <td>51.72</td> <td>-5.17</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	10360.000	46.55	68.22	-21.67	51.72	-5.17	Peak	<p>Site :HY-CB03 Condition :3m ,VERTICAL Mode :TX_a_5180MHz Test BY :Ashton Chiu</p> <p>Date: 2022-12-28</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.000</td> <td>45.70</td> <td>68.22</td> <td>-22.52</td> <td>50.87</td> <td>-5.17</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	10360.000	45.70	68.22	-22.52	50.87	-5.17	Peak
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	10360.000	46.55	68.22	-21.67	51.72	-5.17	Peak																										
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	10360.000	45.70	68.22	-22.52	50.87	-5.17	Peak																										
<p>Site :HY-CB03 Condition :3m ,HORIZONTAL Mode :TX_a_5200MHz Test BY :Ashton Chiu</p> <p>Date: 2022-12-28</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.000</td> <td>49.18</td> <td>68.22</td> <td>-19.04</td> <td>54.26</td> <td>-5.08</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	10400.000	49.18	68.22	-19.04	54.26	-5.08	Peak	<p>Site :HY-CB03 Condition :3m ,VERTICAL Mode :TX_a_5200MHz Test BY :Ashton Chiu</p> <p>Date: 2022-12-28</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency MHz</th> <th>Level dBuV/m</th> <th>Limit Line dBuV/m</th> <th>Over Limit dB</th> <th>Read Level dBuV</th> <th>Factor dB</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10400.000</td> <td>46.47</td> <td>68.22</td> <td>-21.75</td> <td>51.55</td> <td>-5.08</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark	1	10400.000	46.47	68.22	-21.75	51.55	-5.08	Peak
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	10400.000	49.18	68.22	-19.04	54.26	-5.08	Peak																										
No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark																										
1	10400.000	46.47	68.22	-21.75	51.55	-5.08	Peak																										

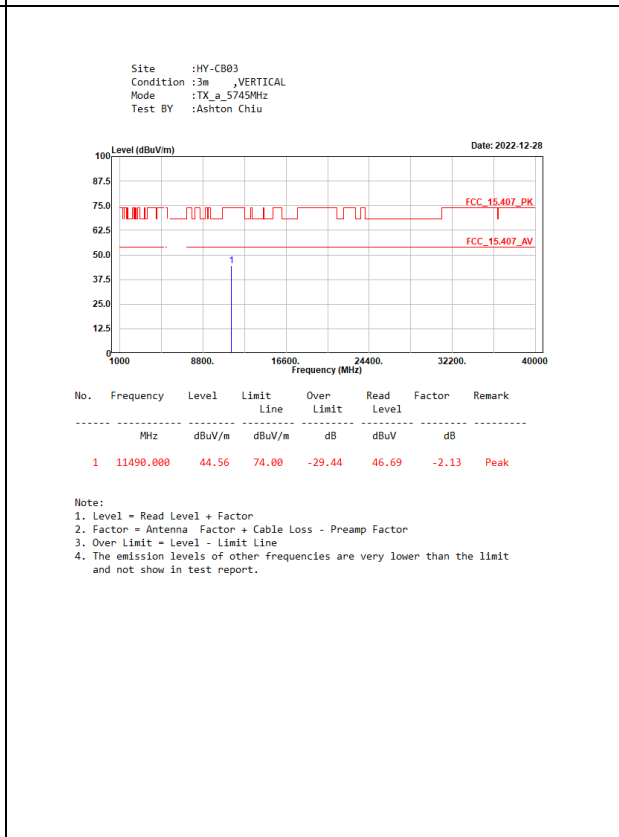
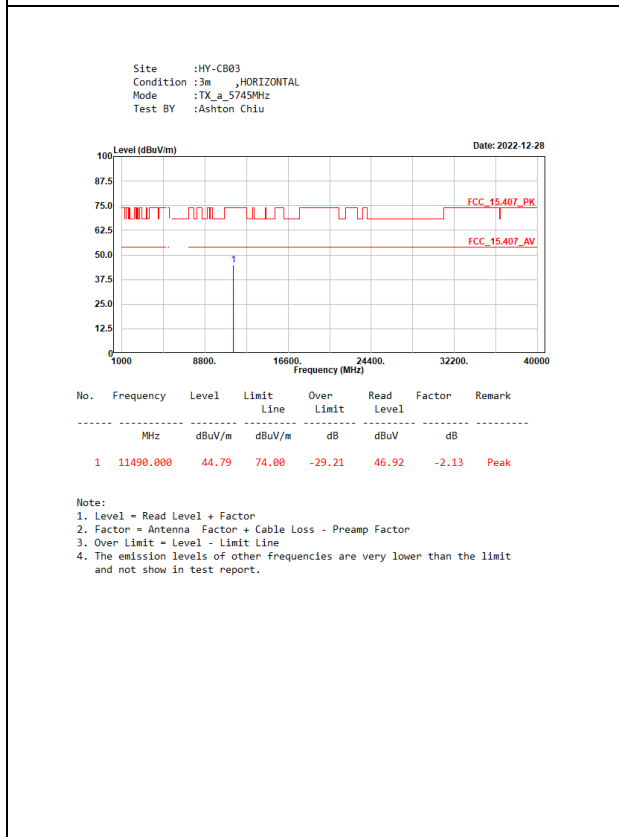
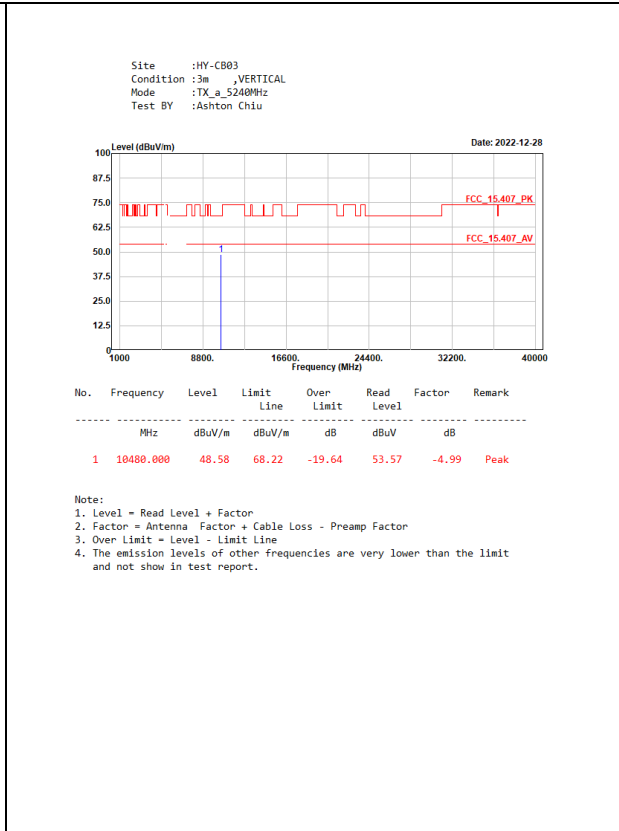
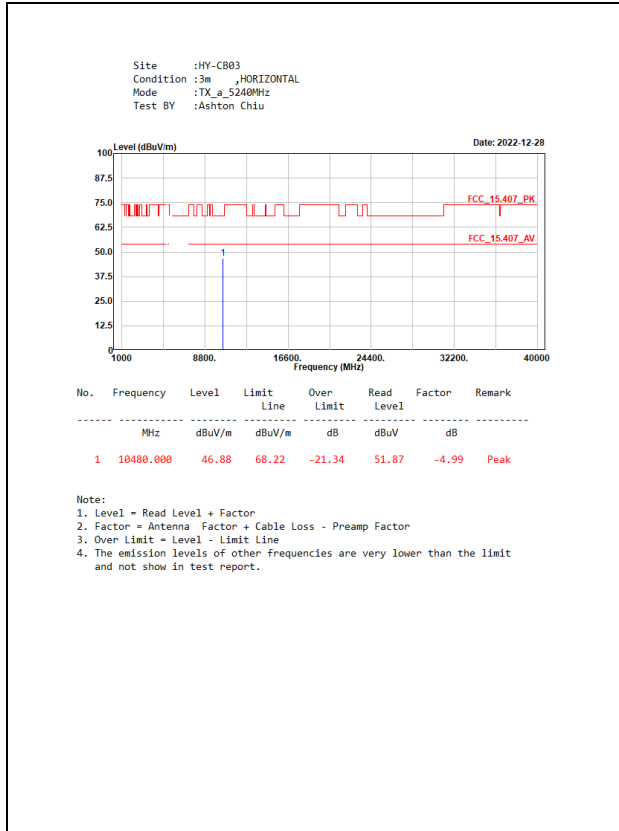


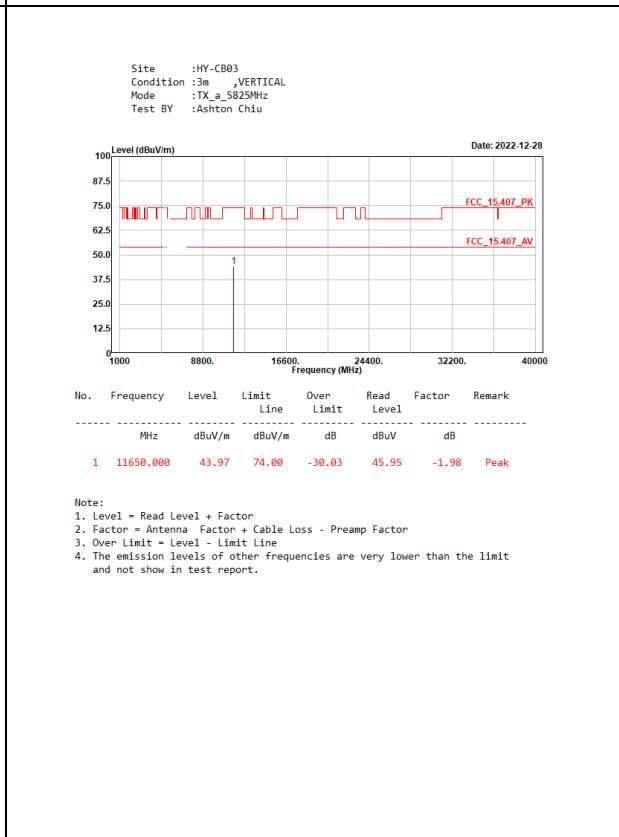
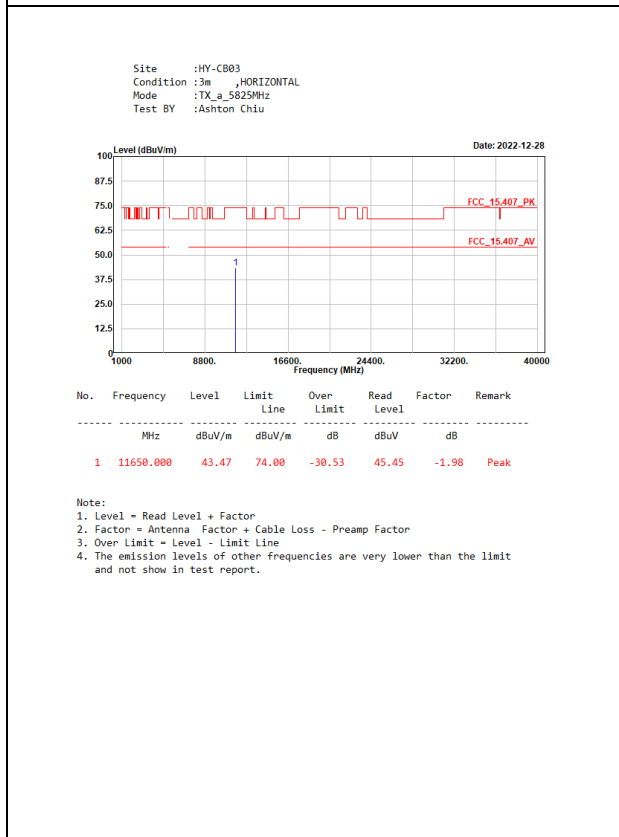
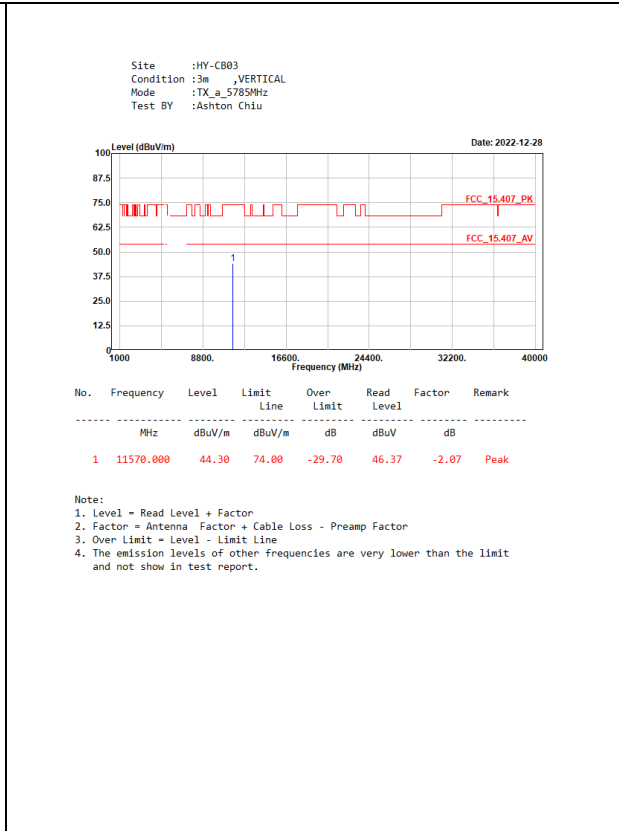
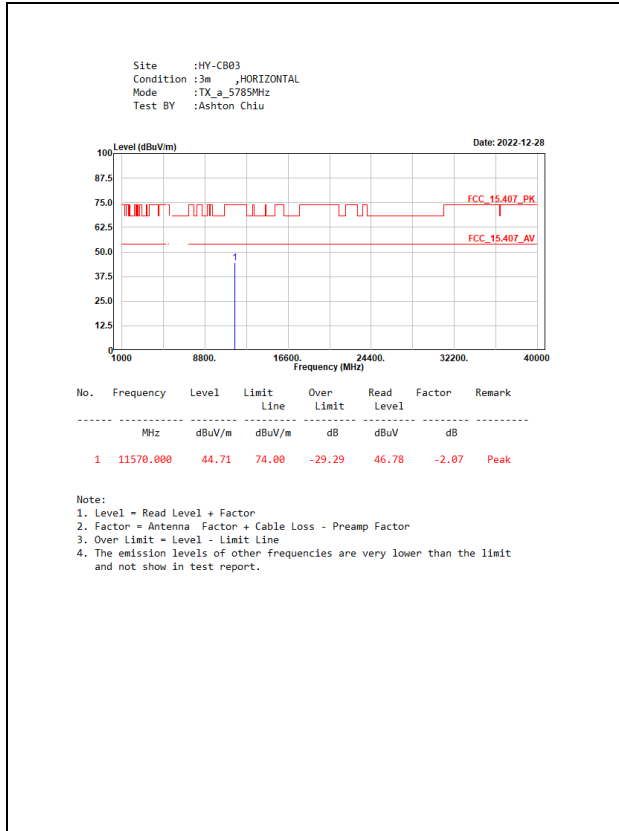


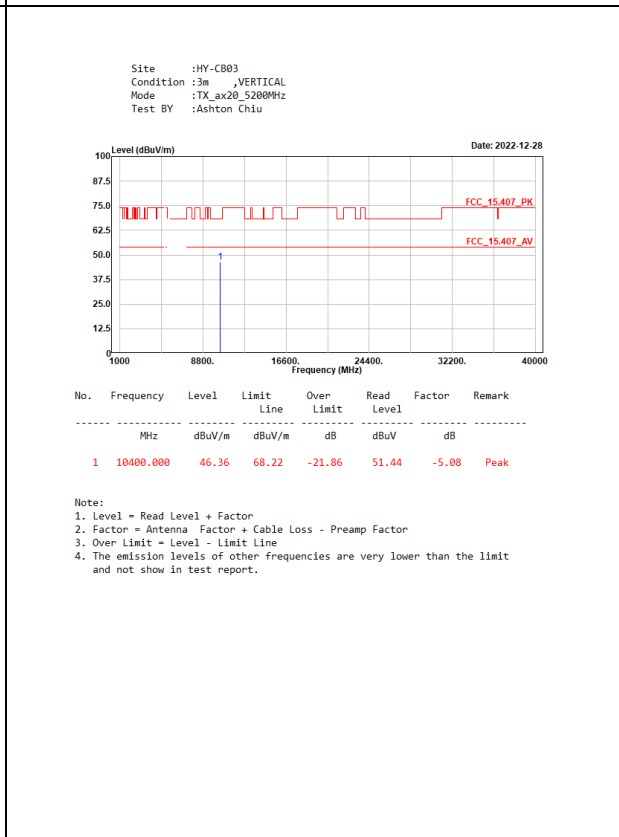
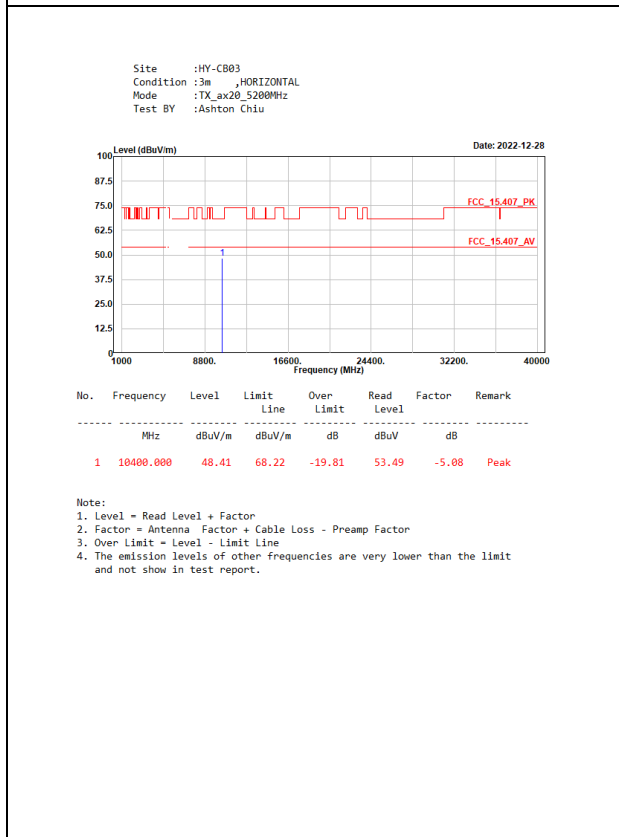
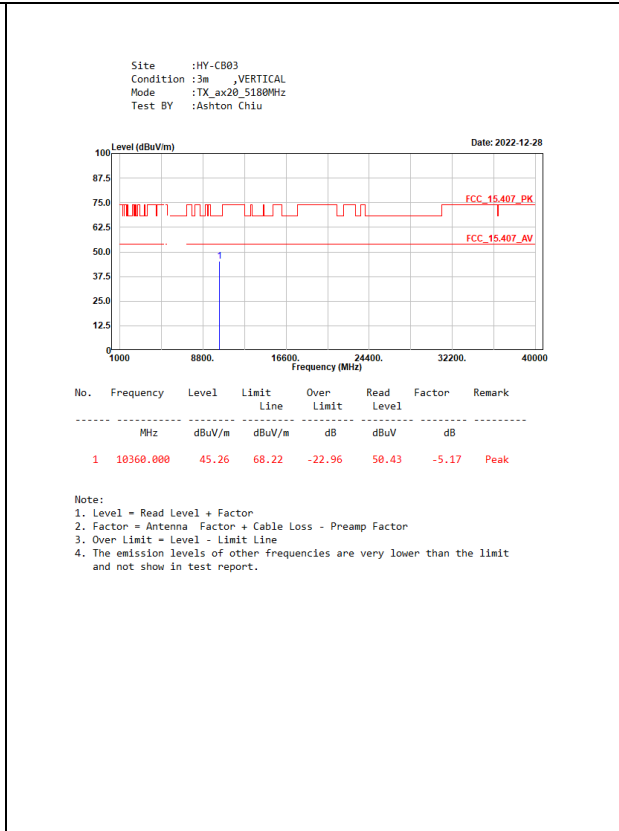
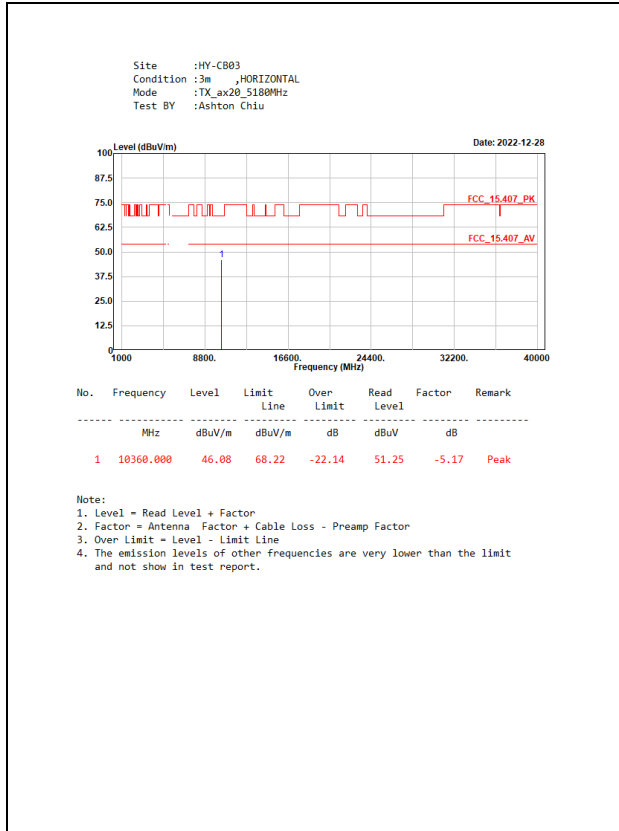


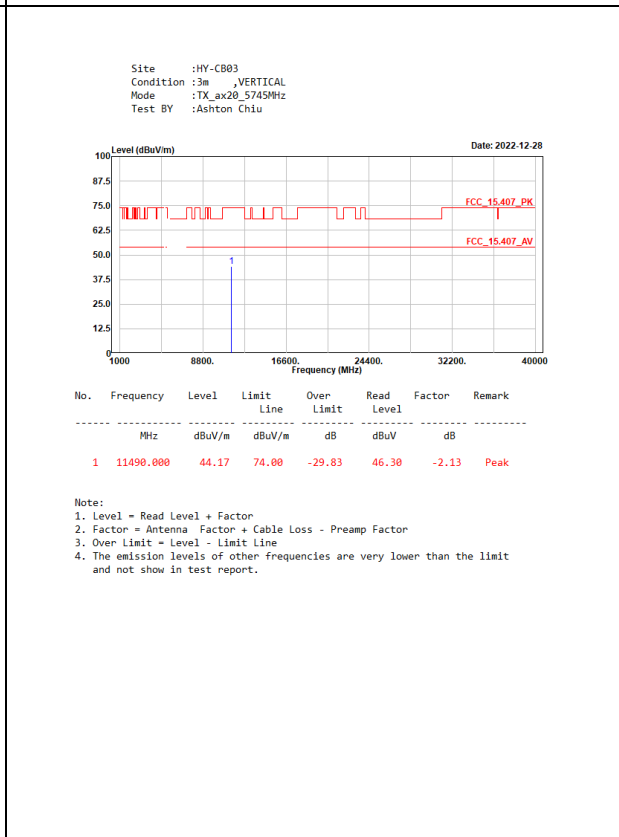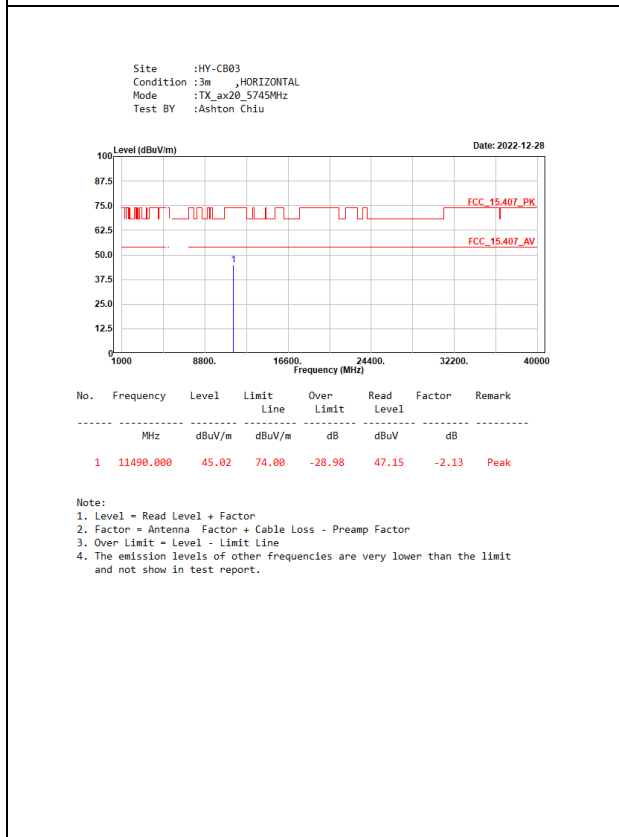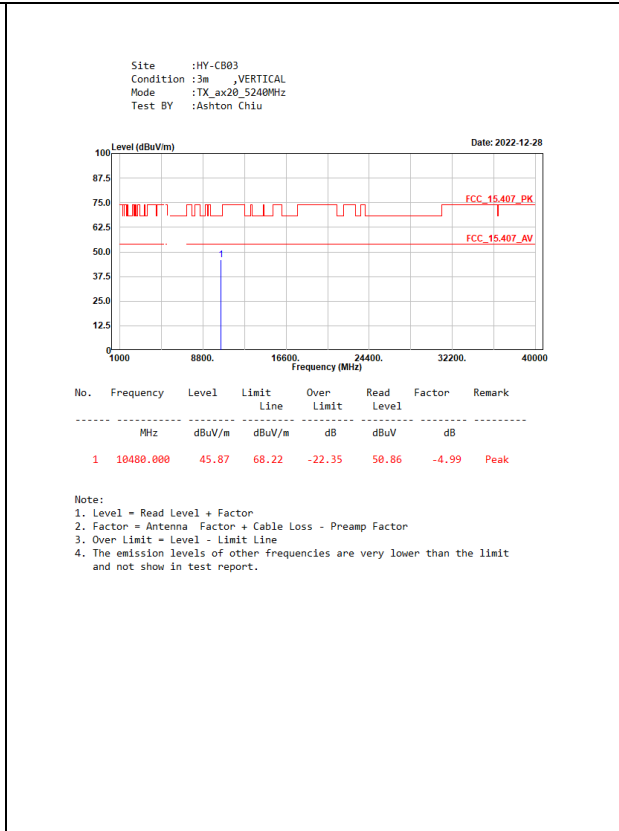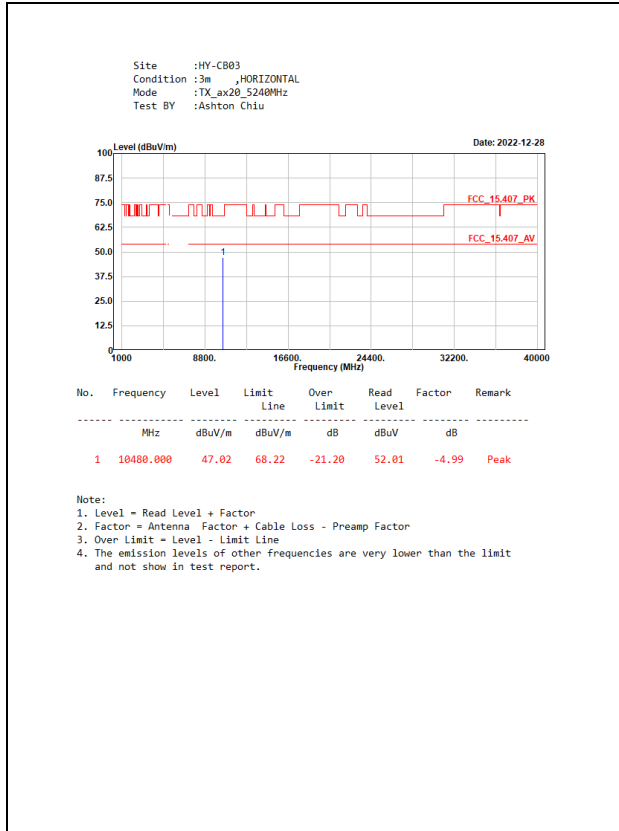

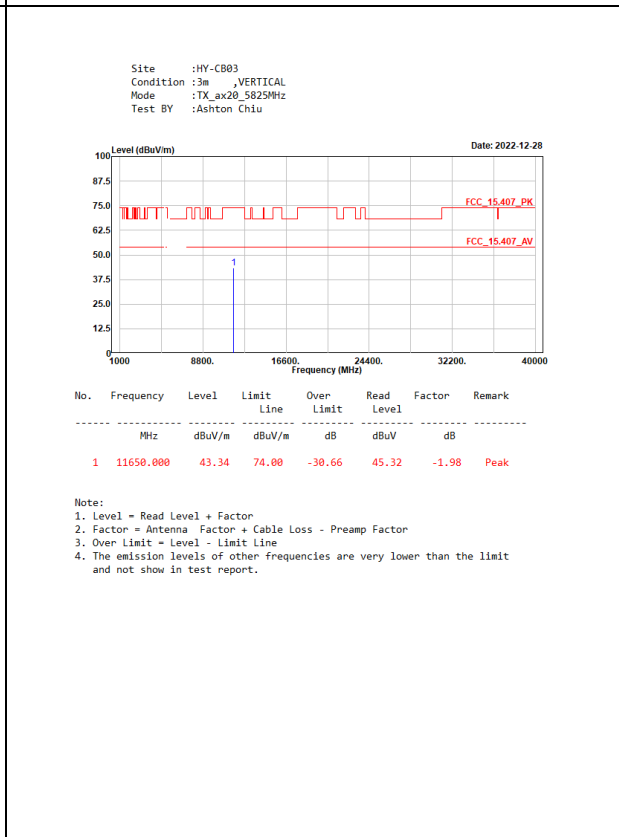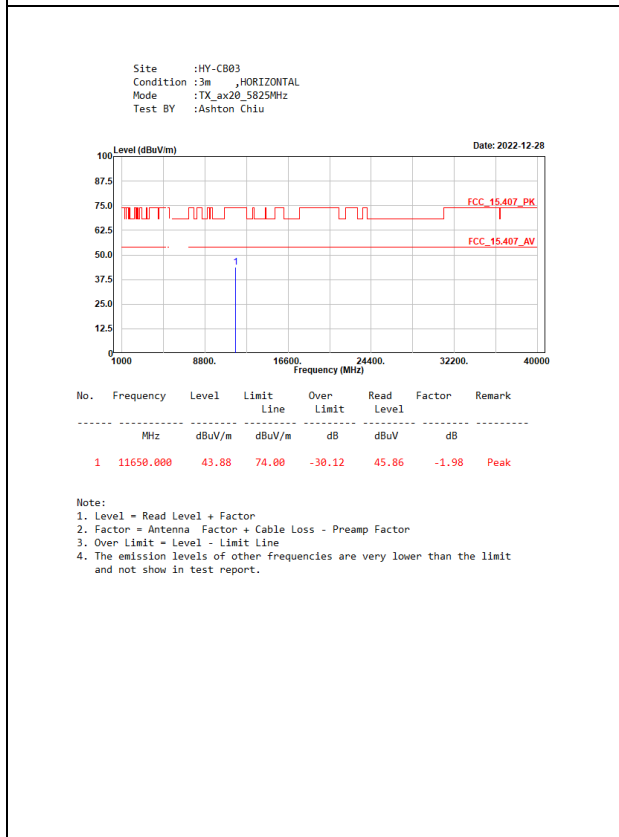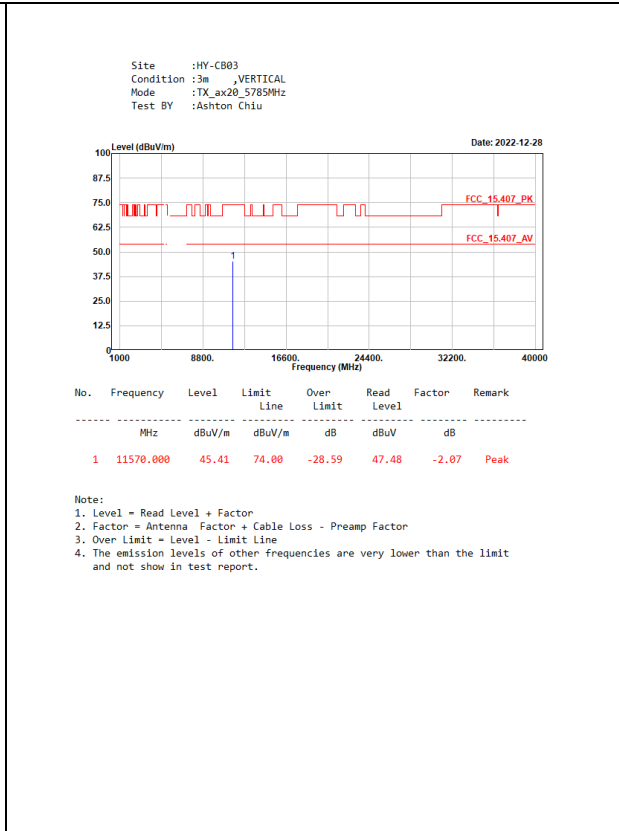
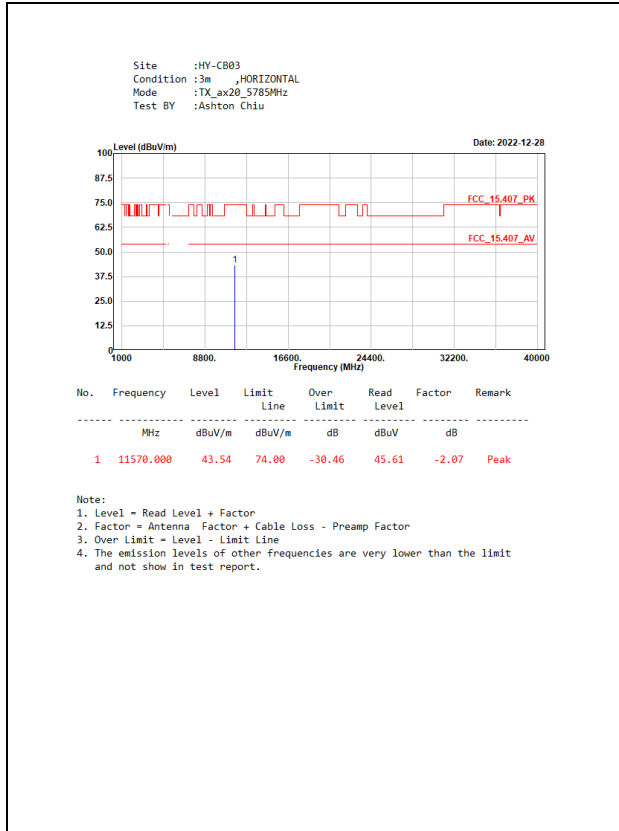


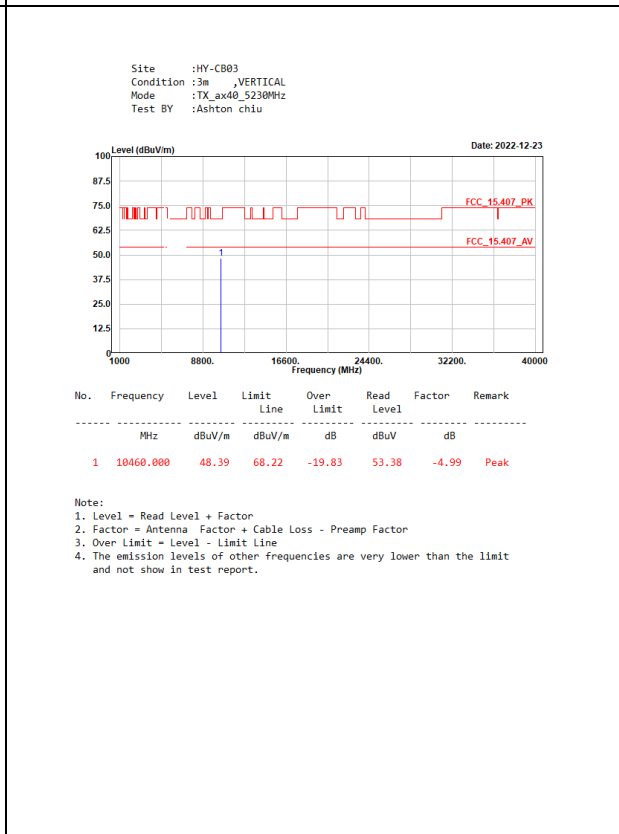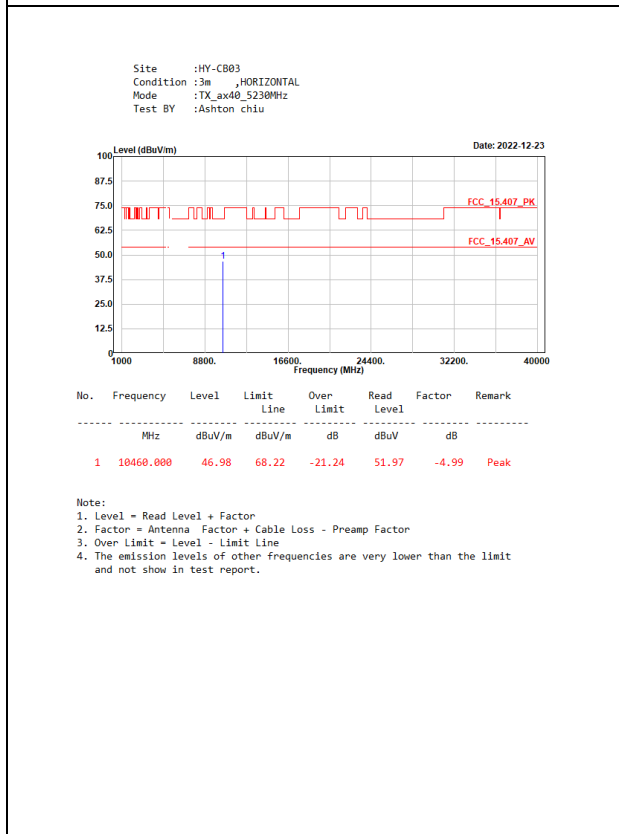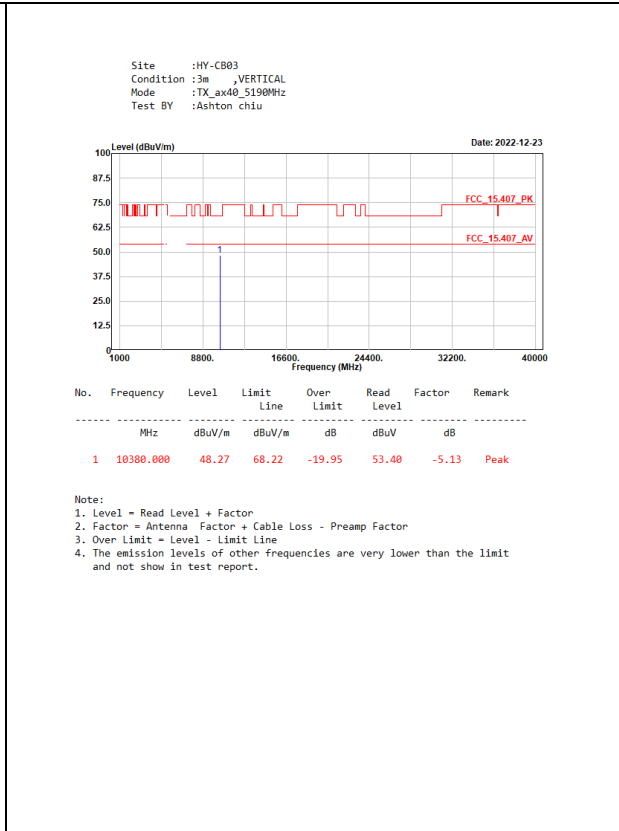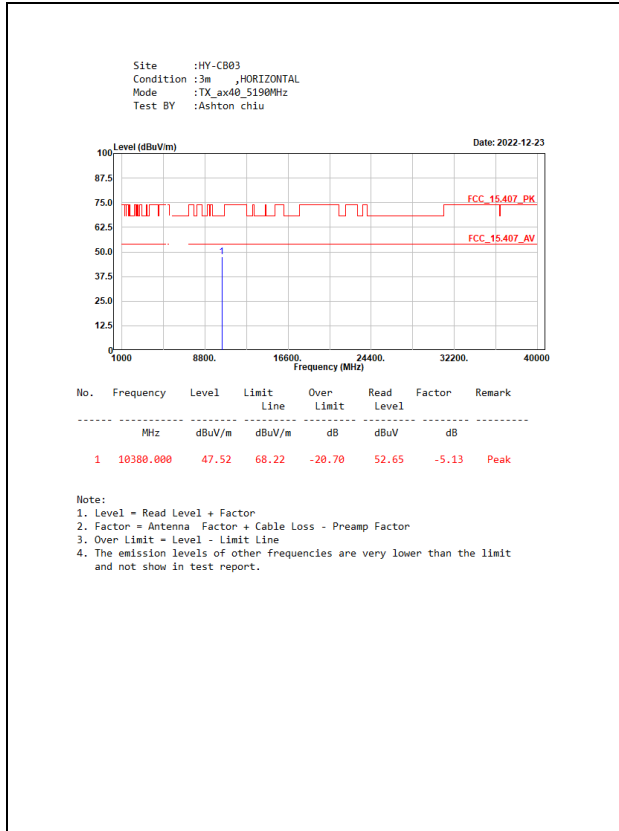

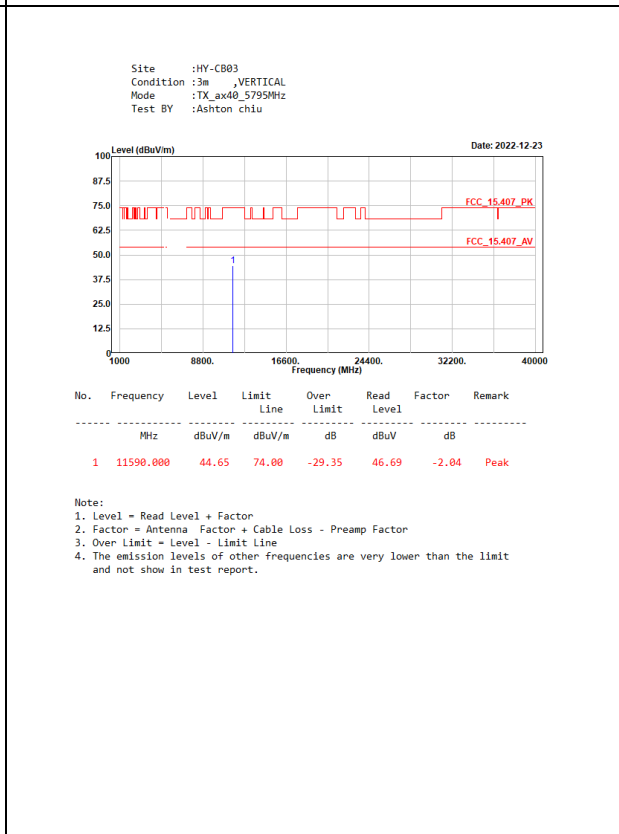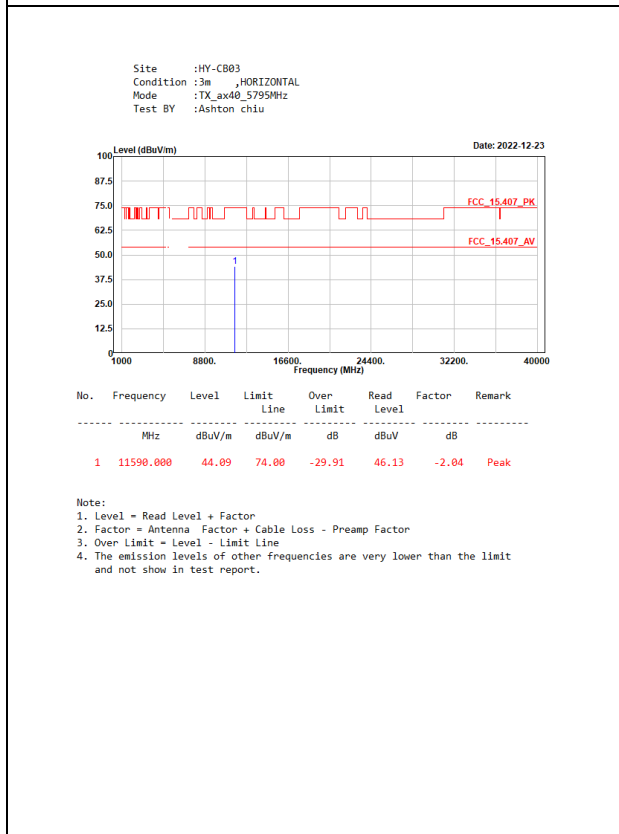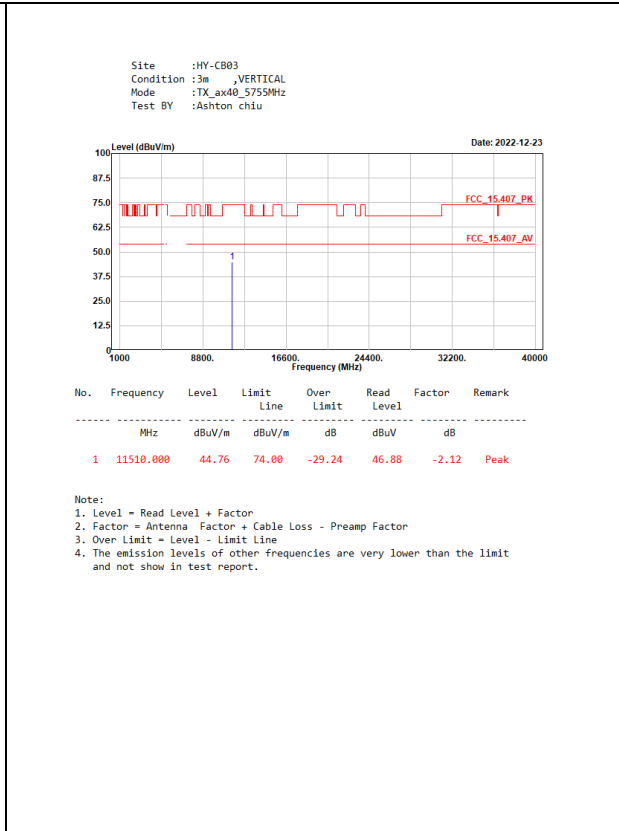
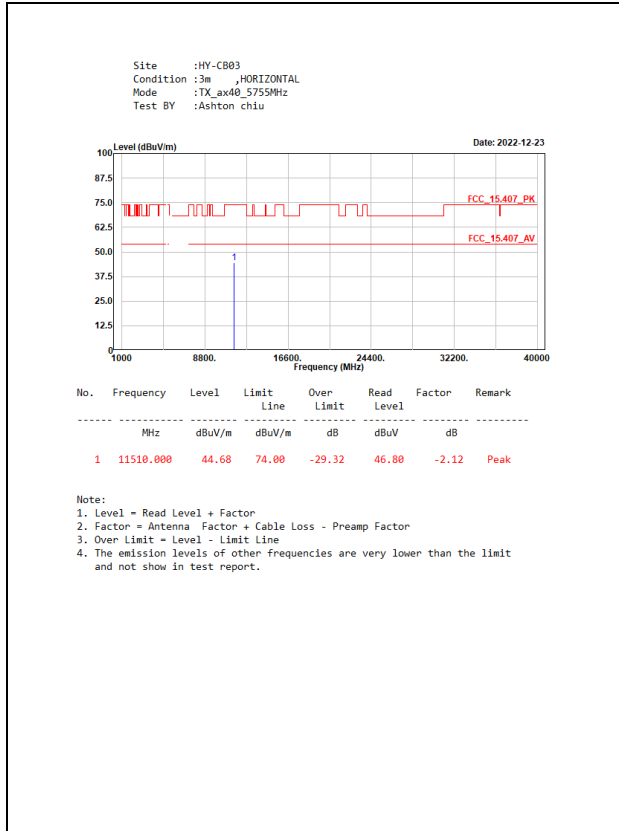


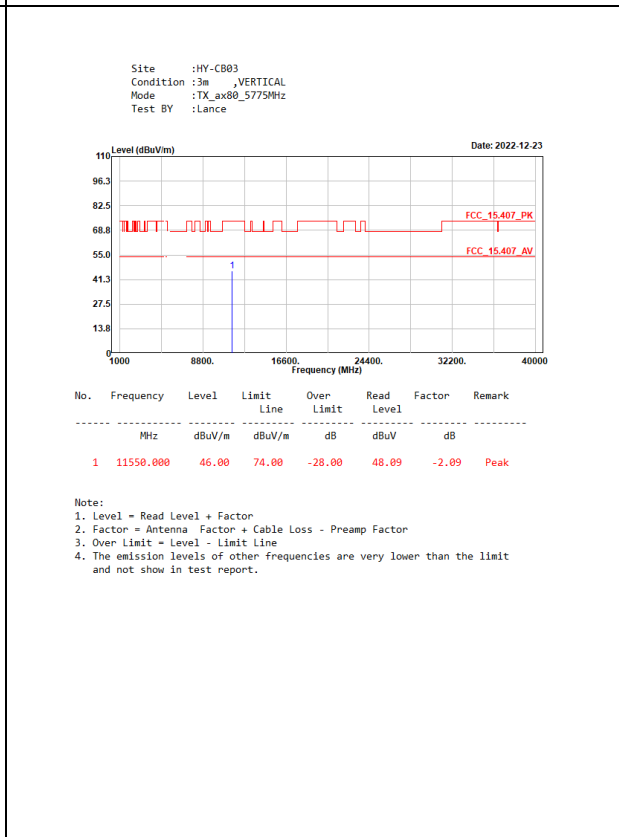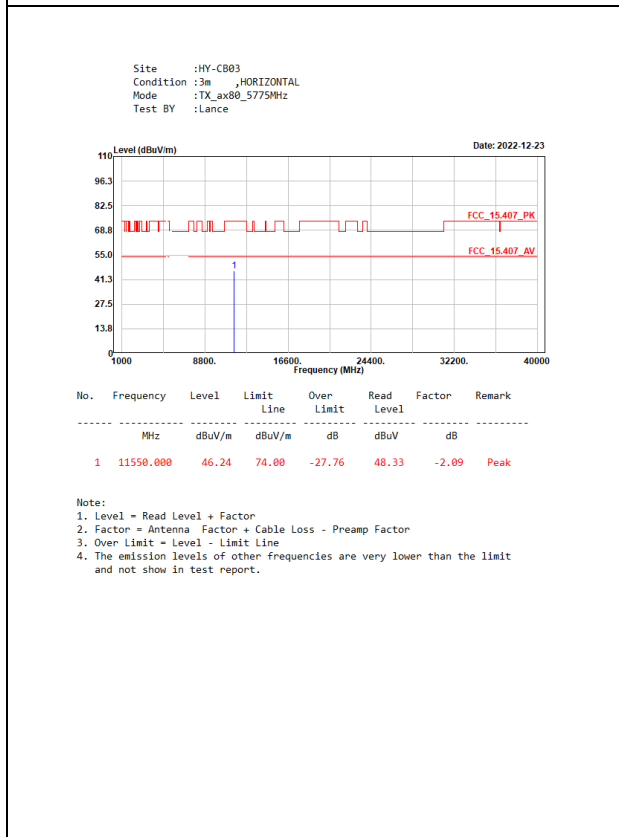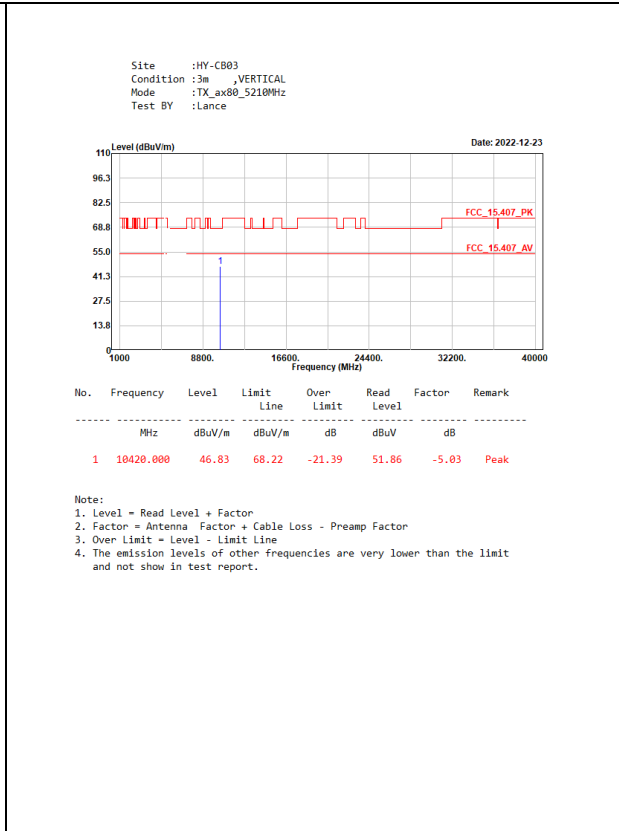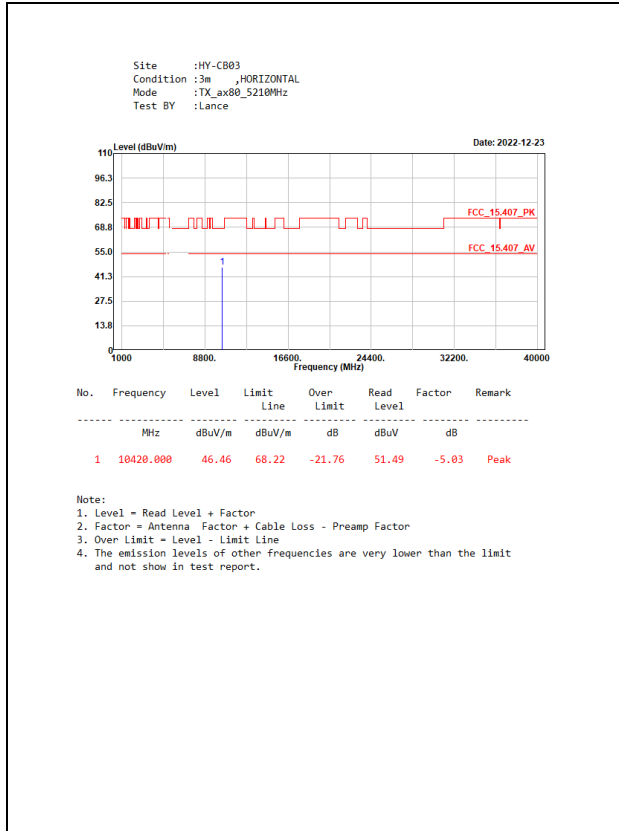



PoE Mode

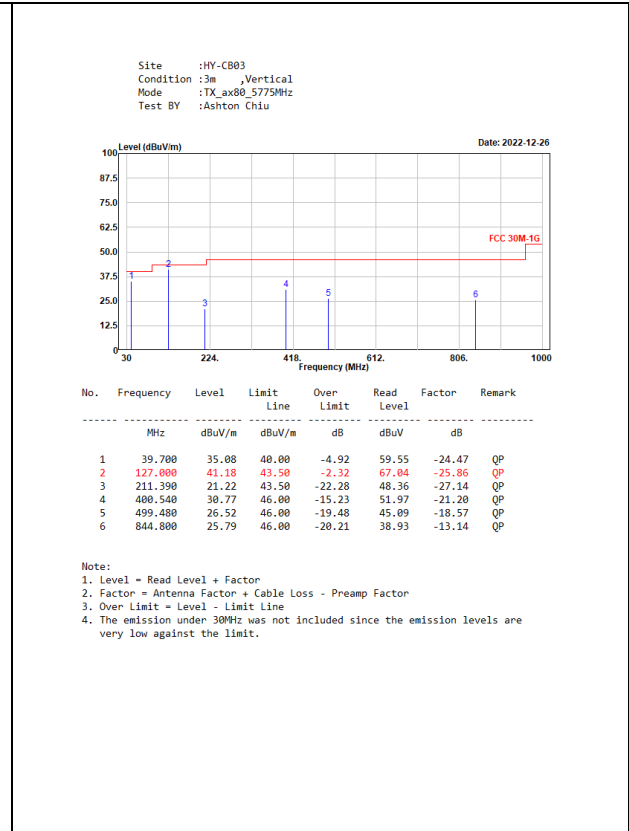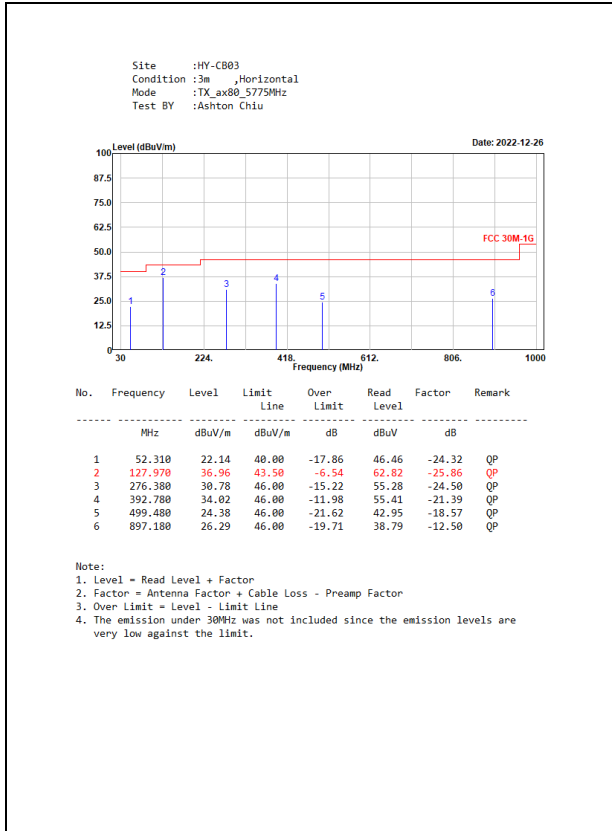



Adapter Mode

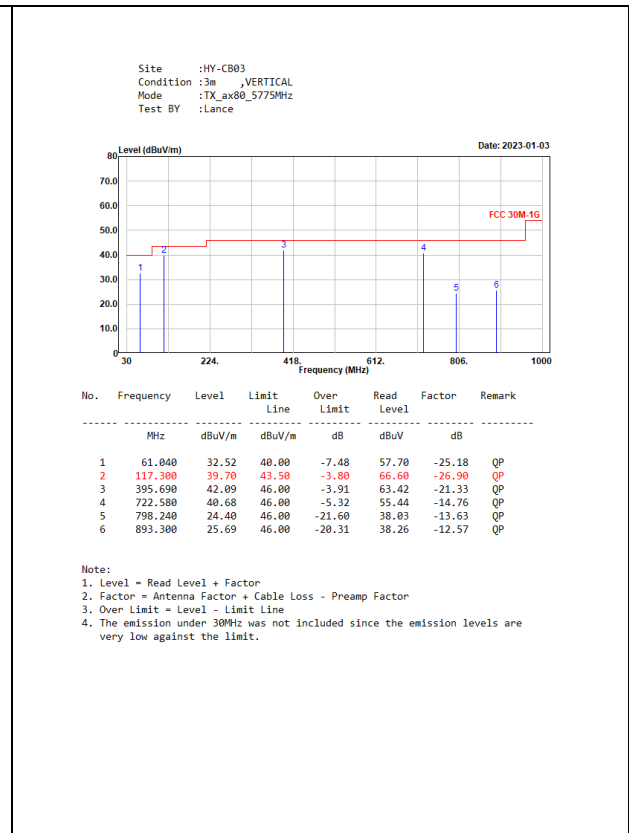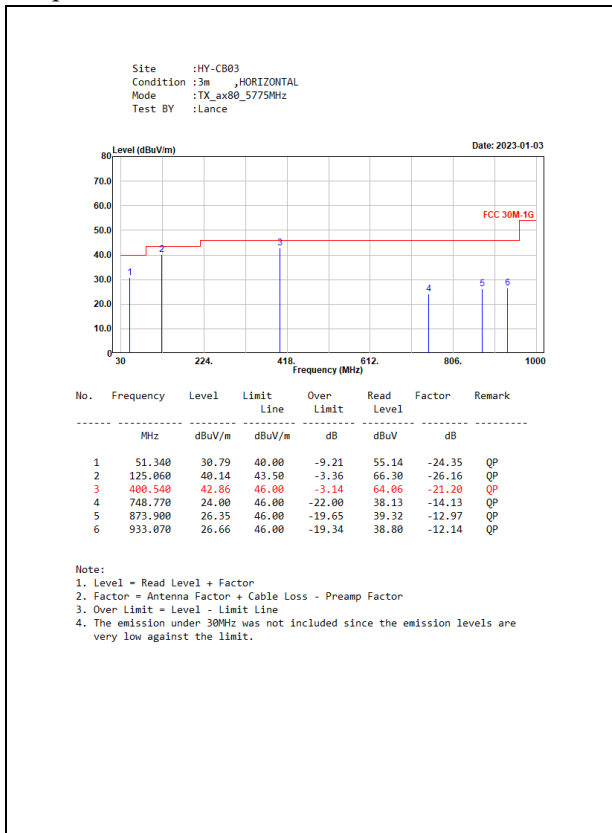



Co-location

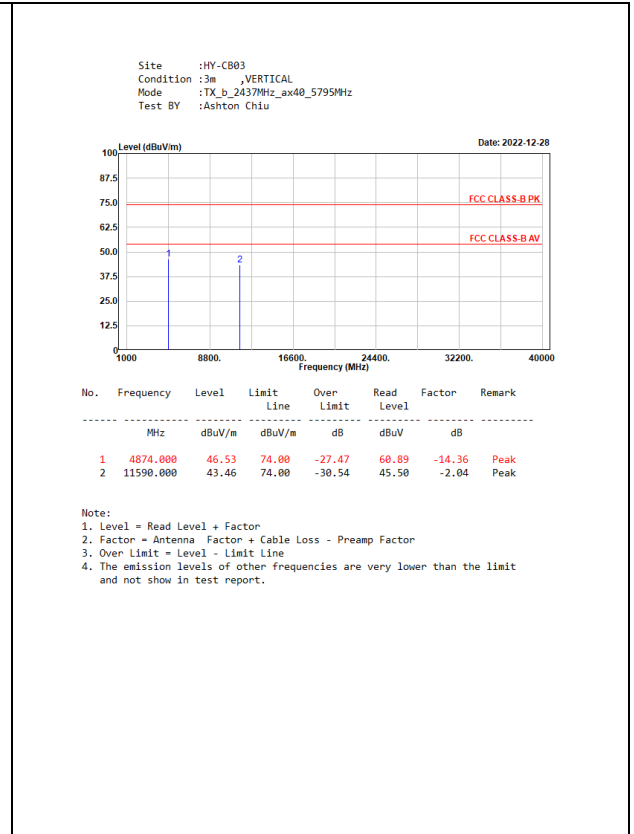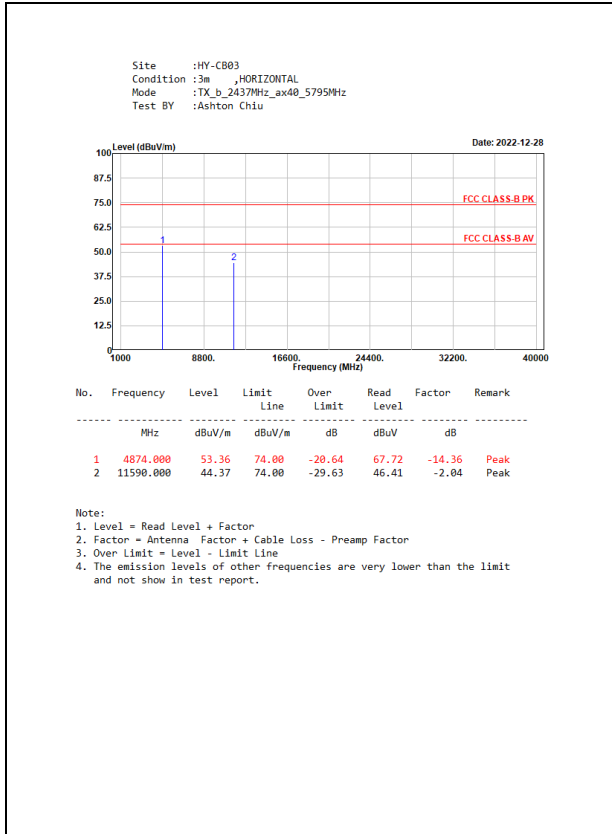

PoE Mode

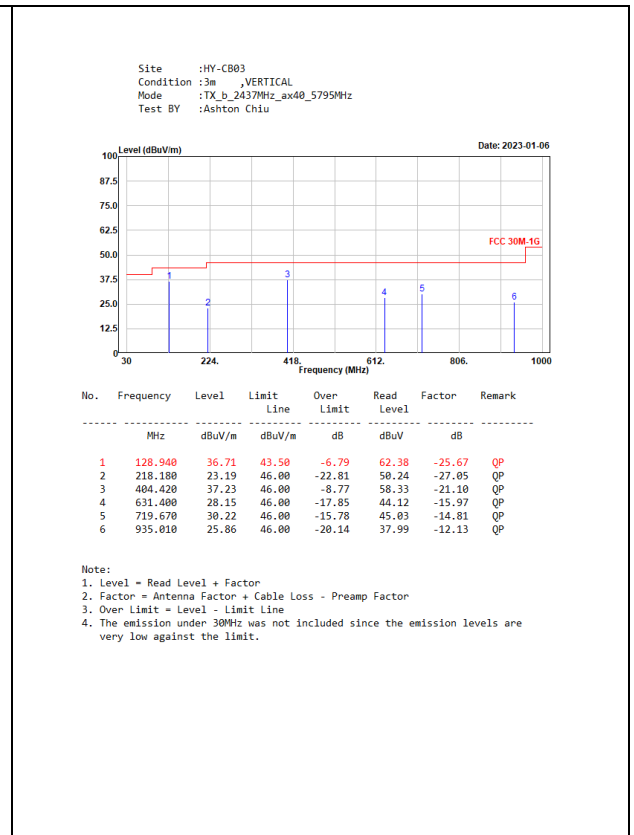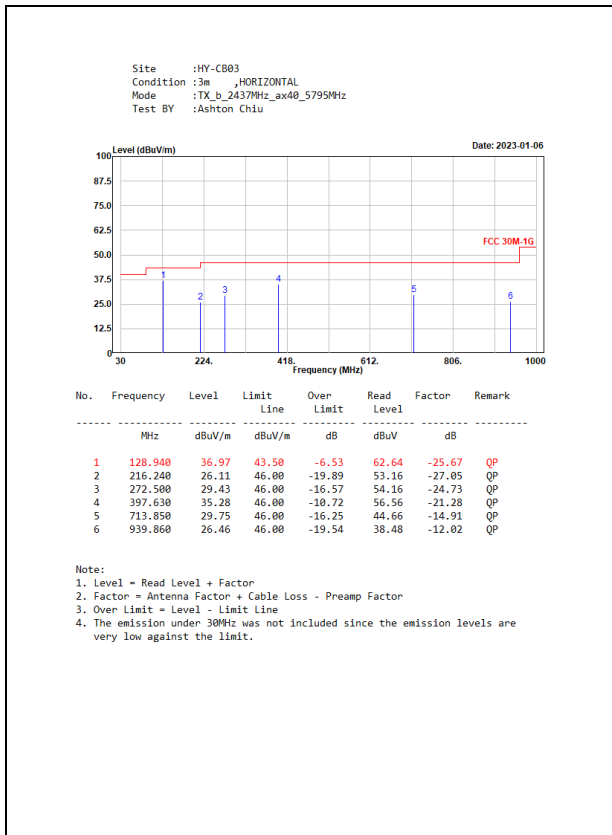


Adapter Mode

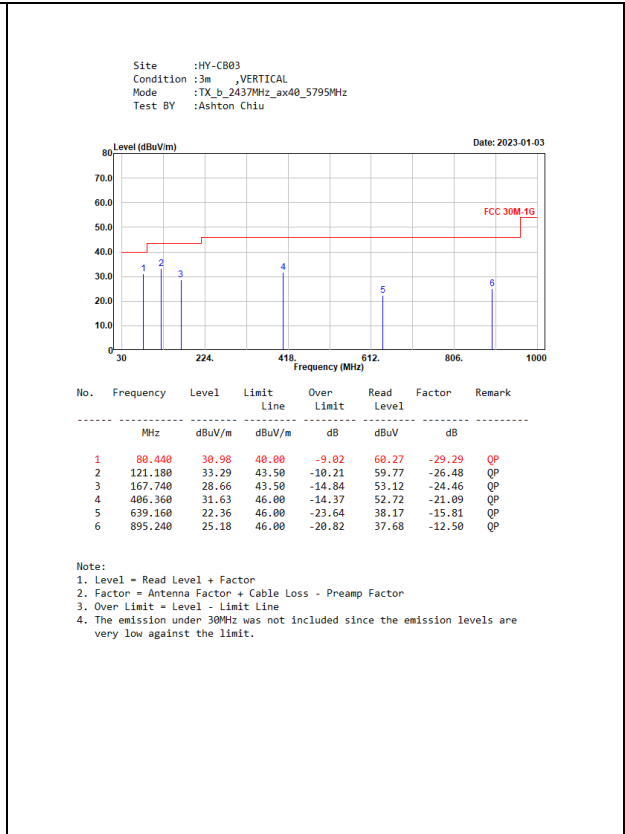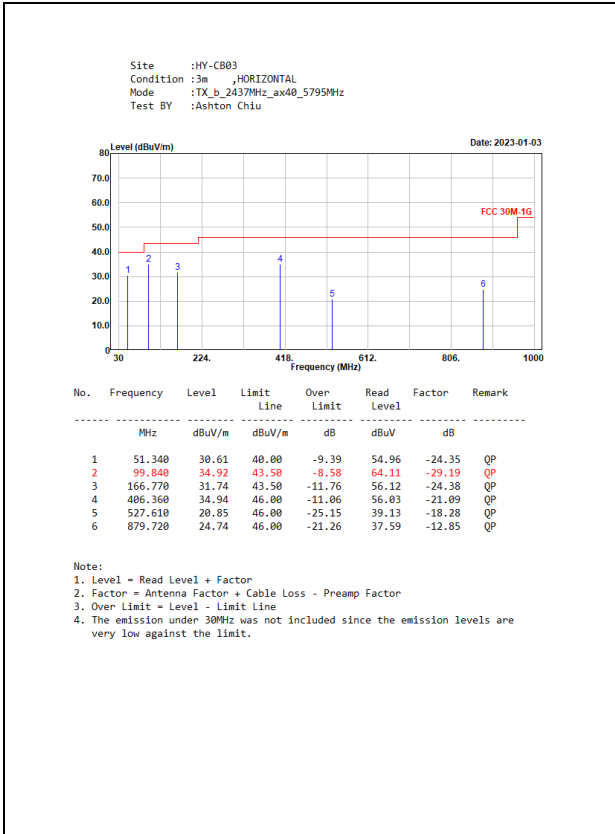

6. Band Edge

6.1. Test Setup

RF Radiated Measurement:

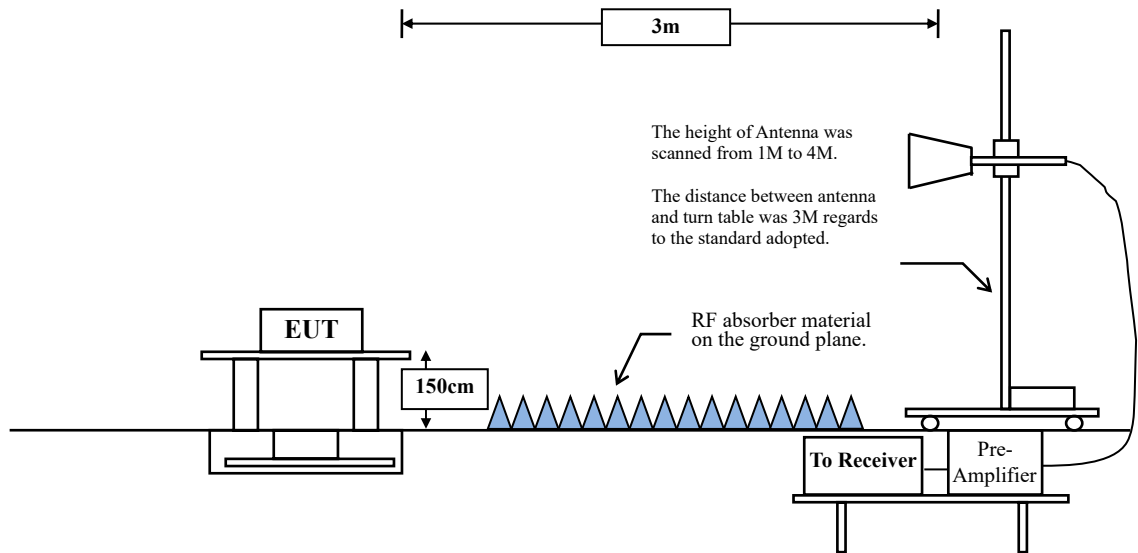

6.2. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	$\mu\text{V/m @3m}$	$\text{dB}\mu\text{V/m@3m}$
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks:

1. RF Voltage ($\text{dB}\mu\text{V}$) = $20 \log$ RF Voltage (μV).
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW \geq 3MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %





VBW \geq 1/T, when duty cycle < 98 %





(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)





5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	89.59	1.4348	697	1000
802.11ax-20 MHz	95.43	5.4420	184	200
802.11ax-40 MHz	93.46	5.3841	186	200
802.11ax-80 MHz	93.96	5.4130	185	200





Note: Duty Cycle Refer to Section 8.





6.4. Test Result of Band Edge

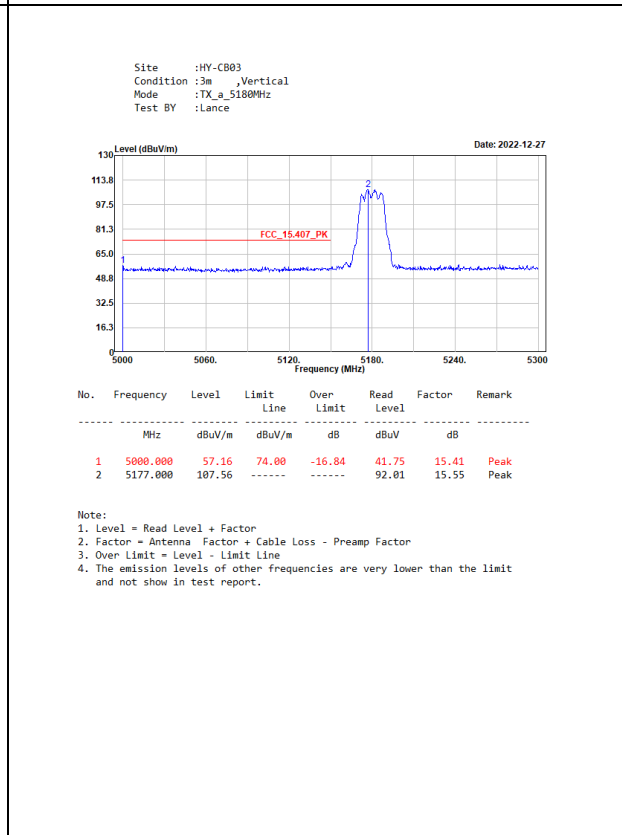
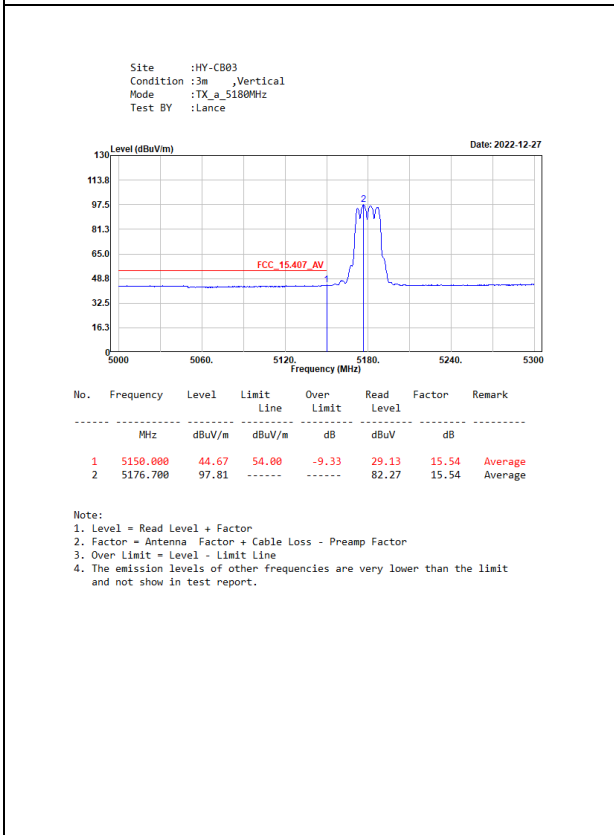
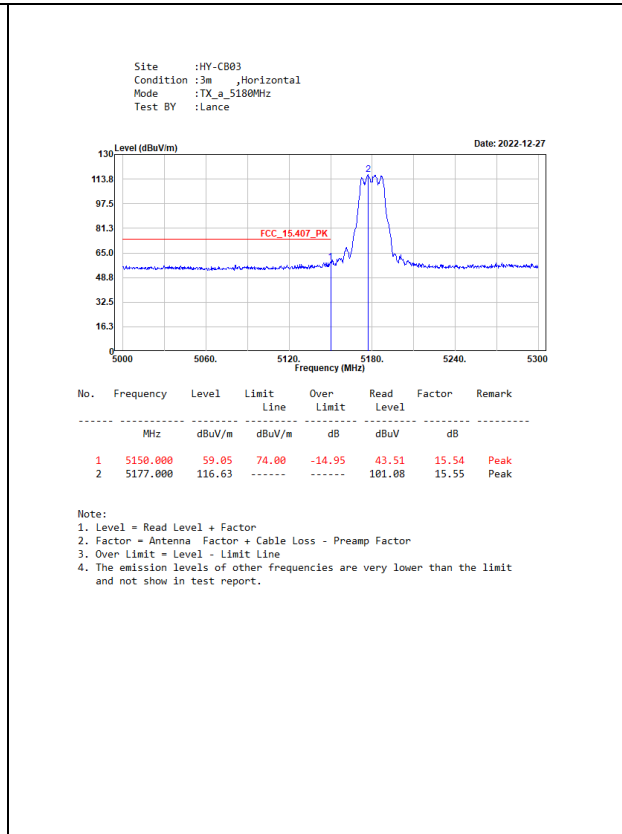
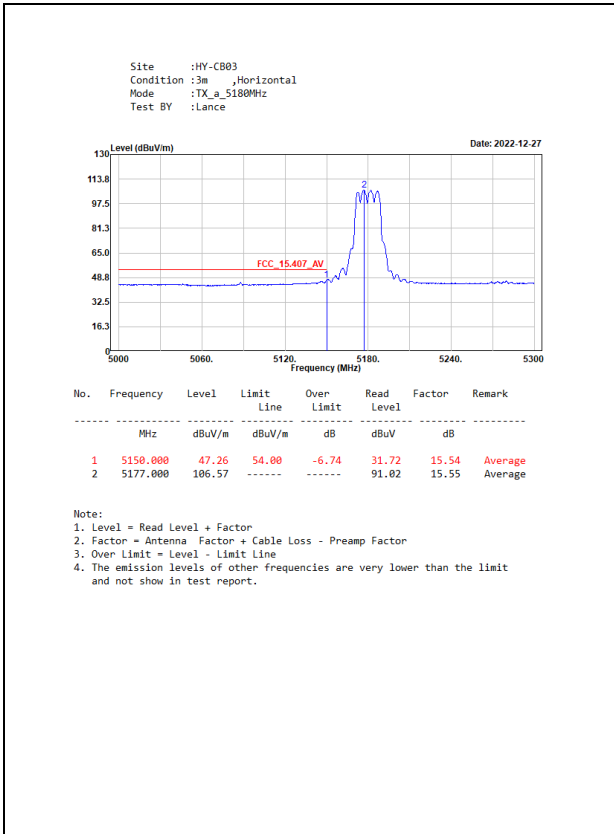


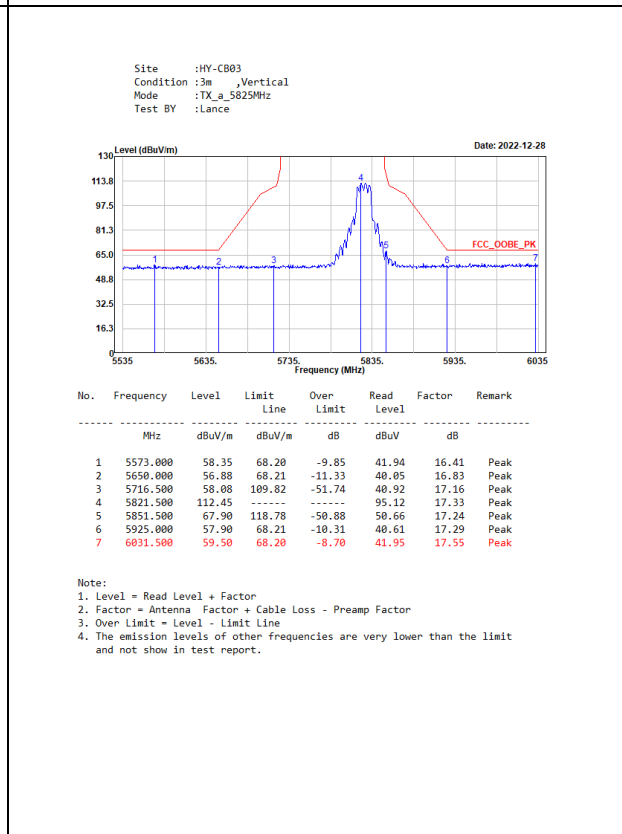
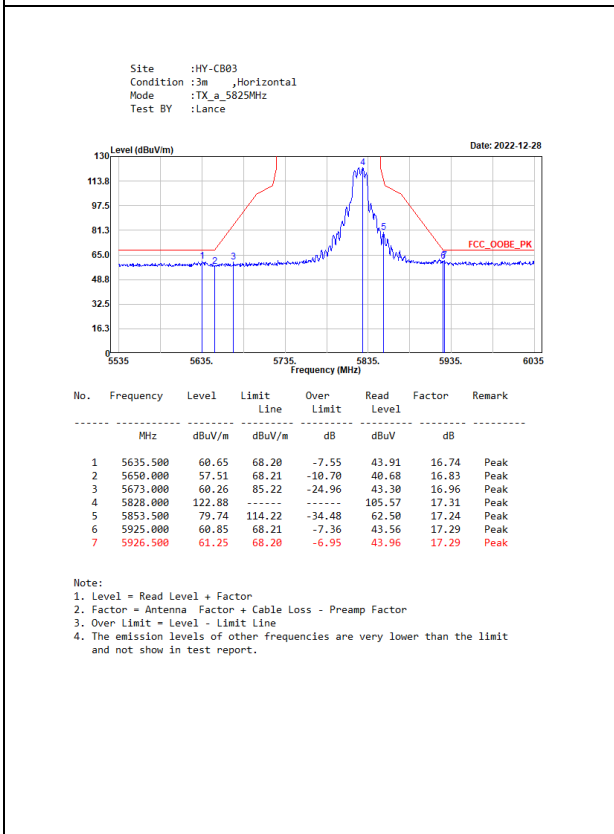
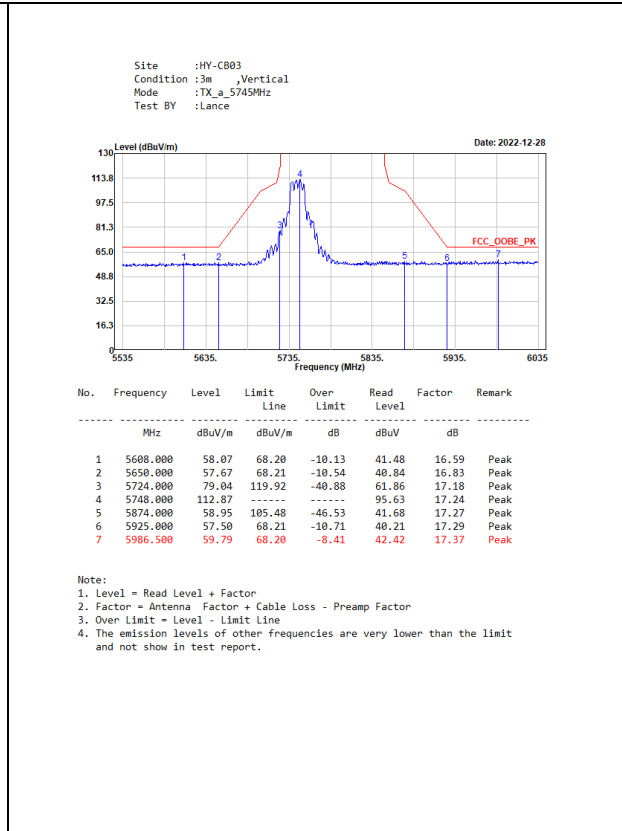
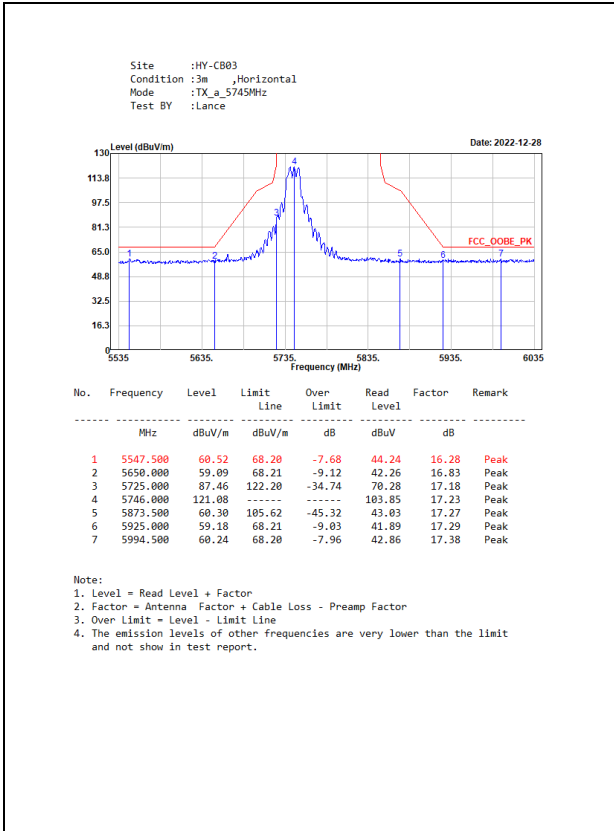


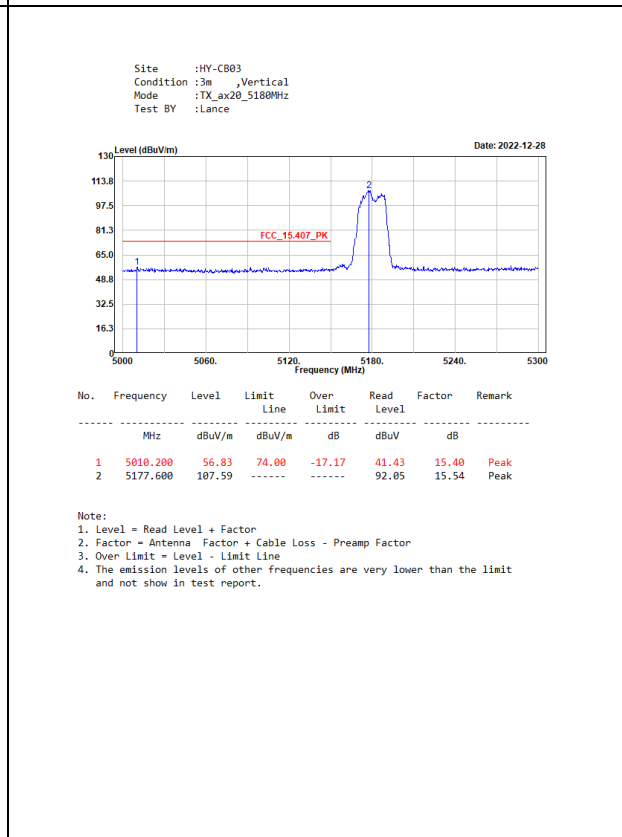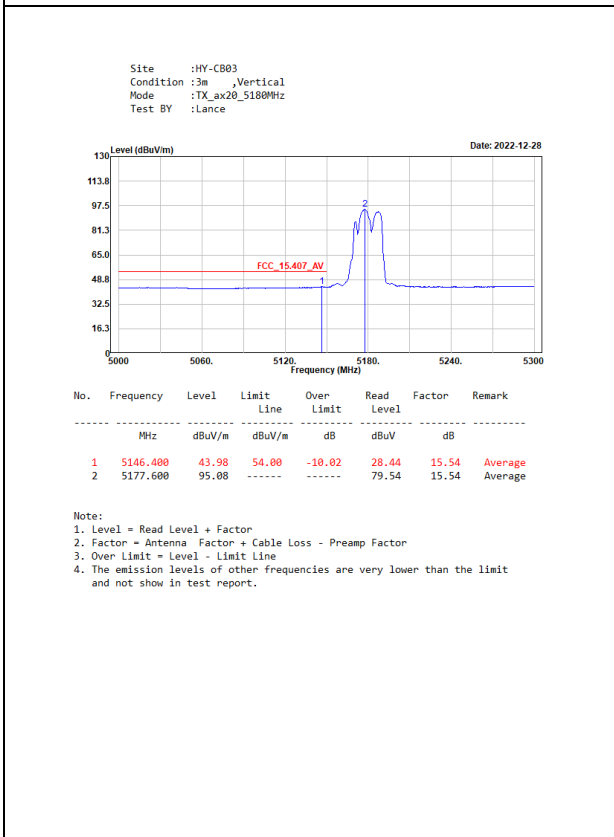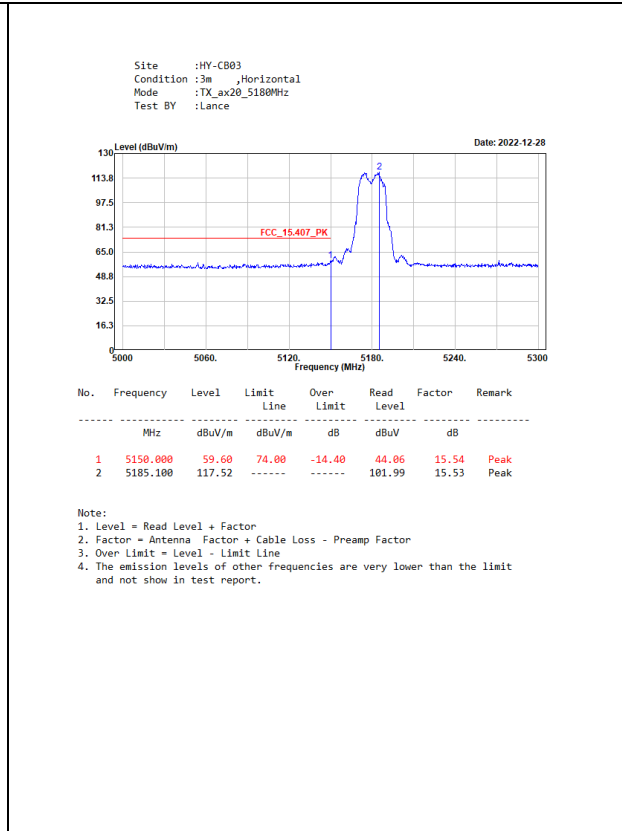
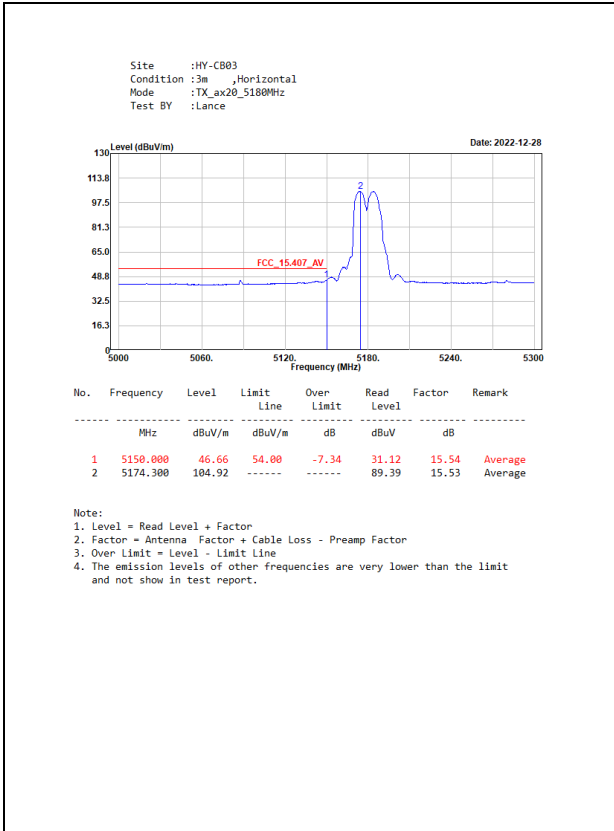


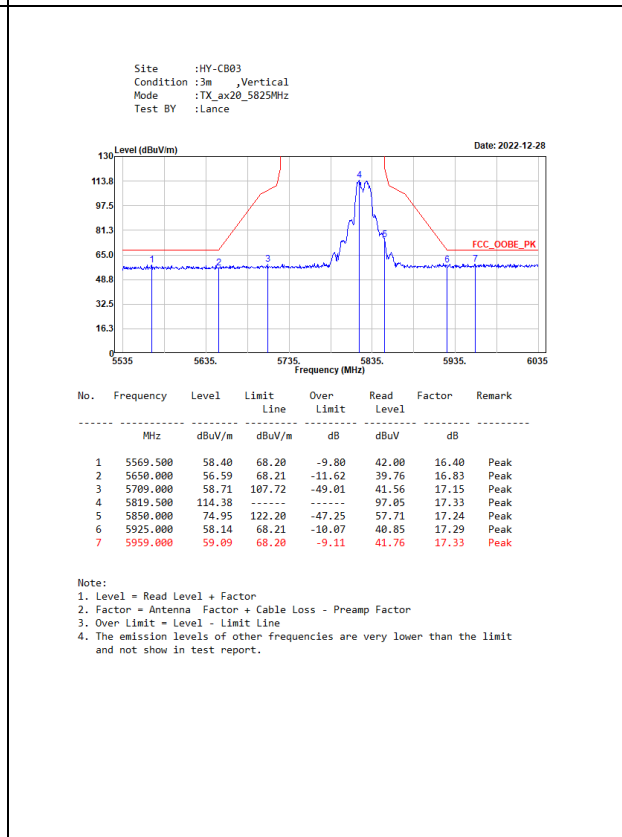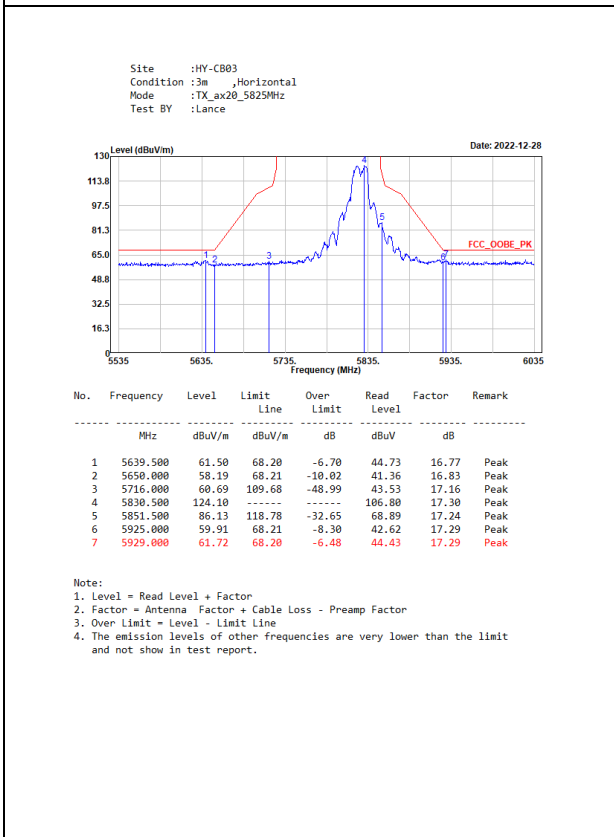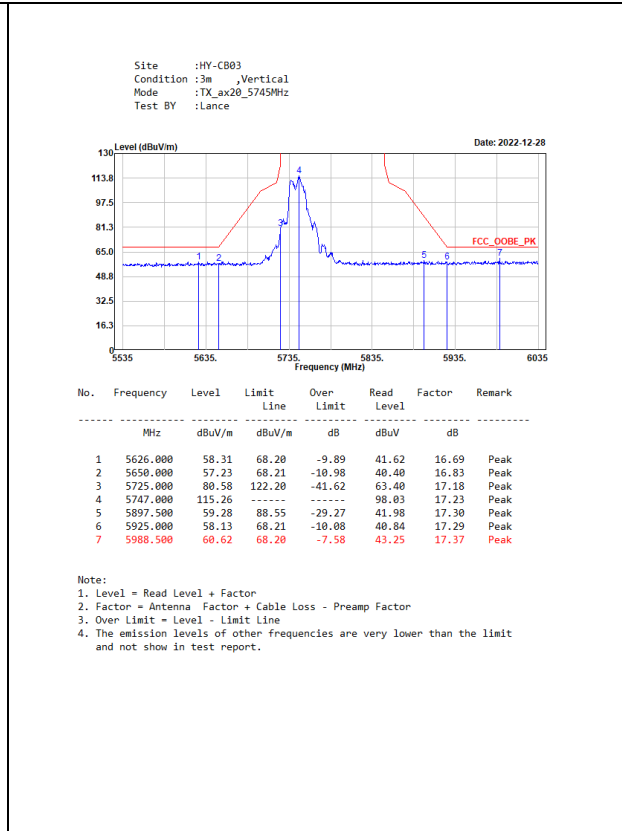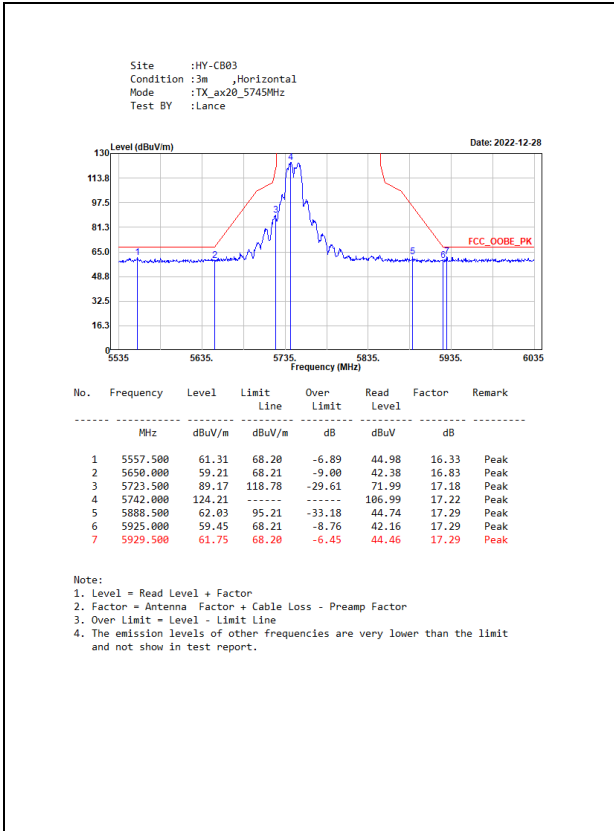

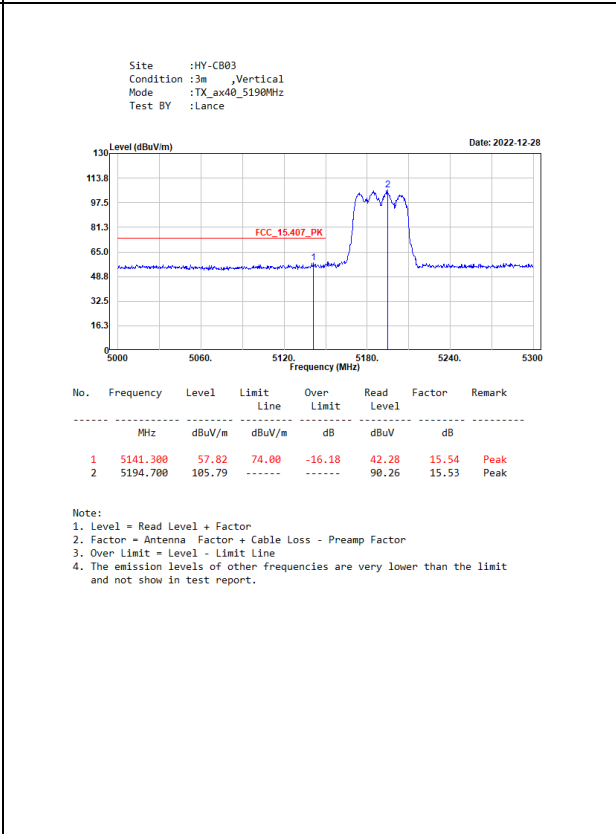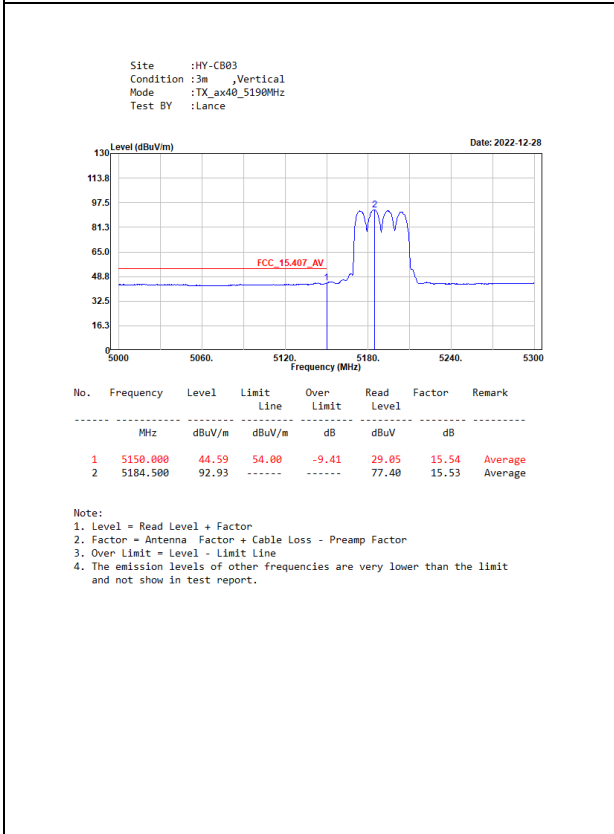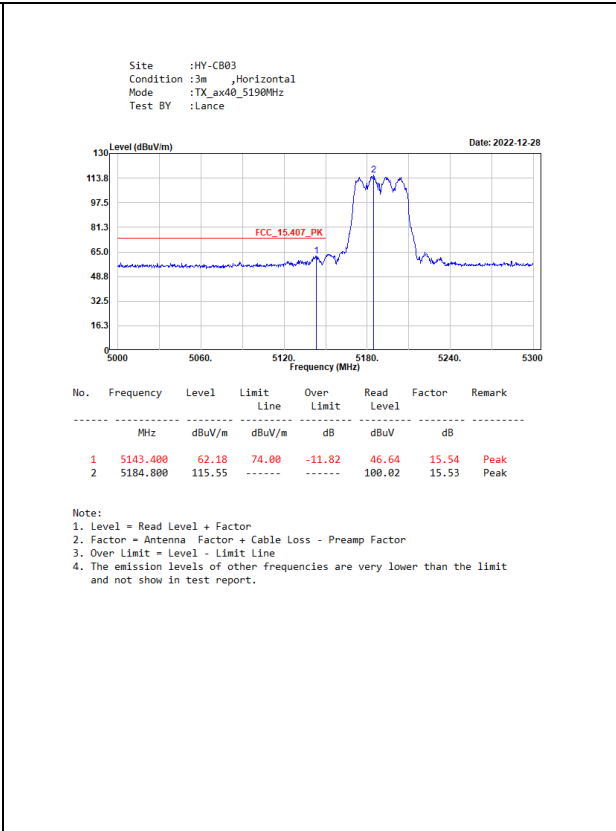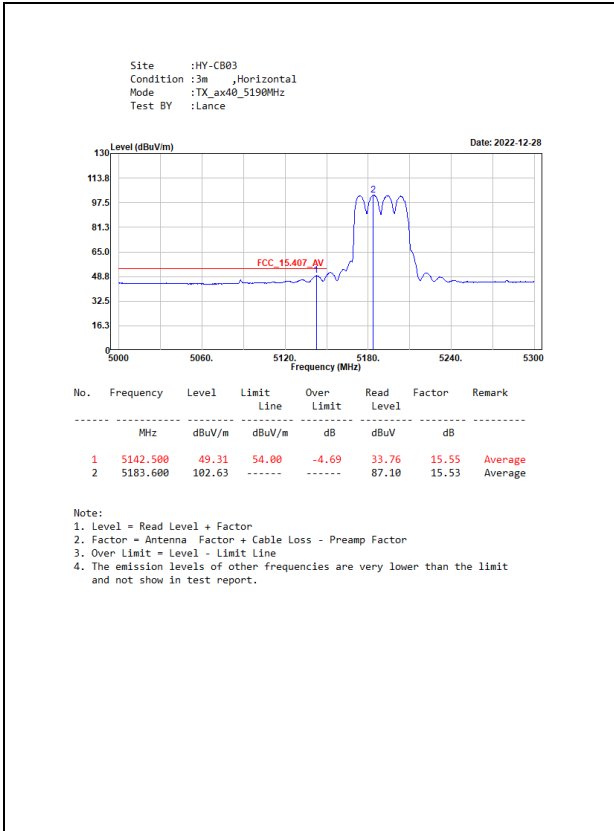

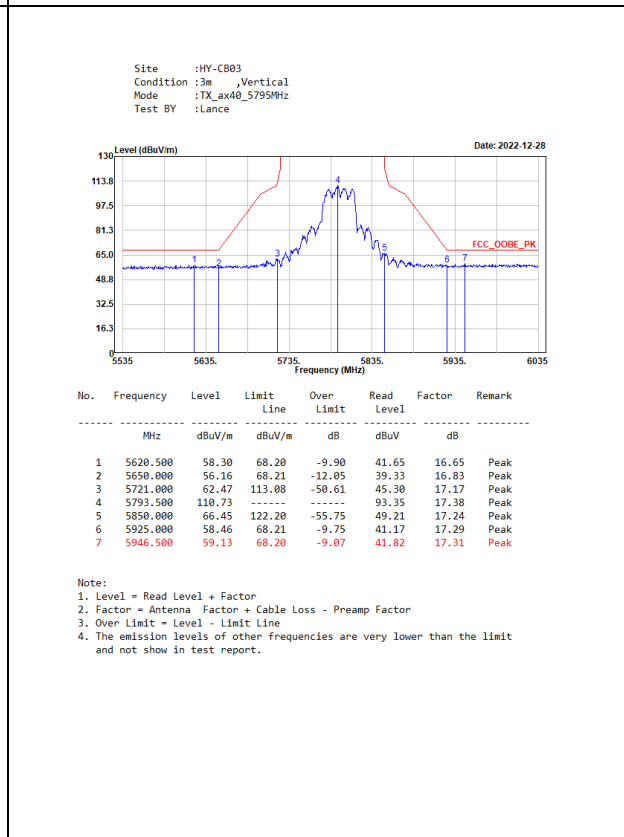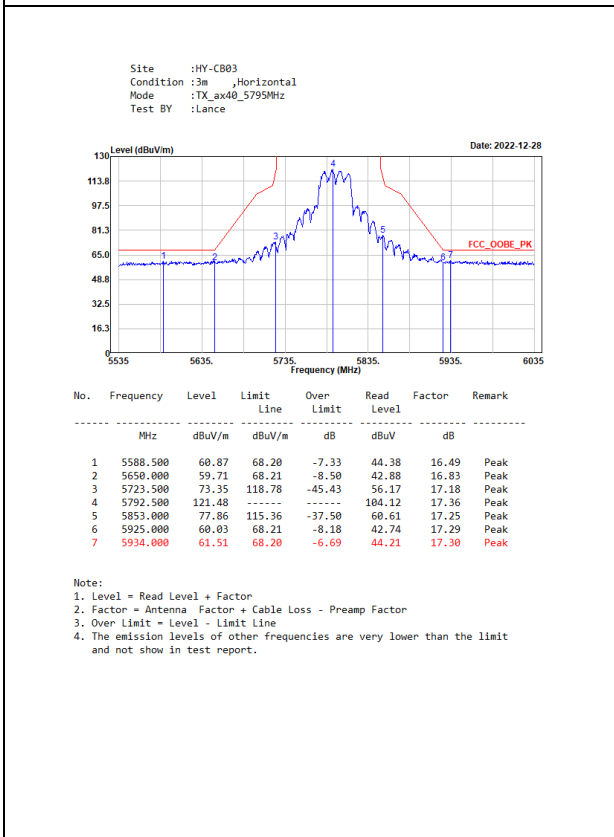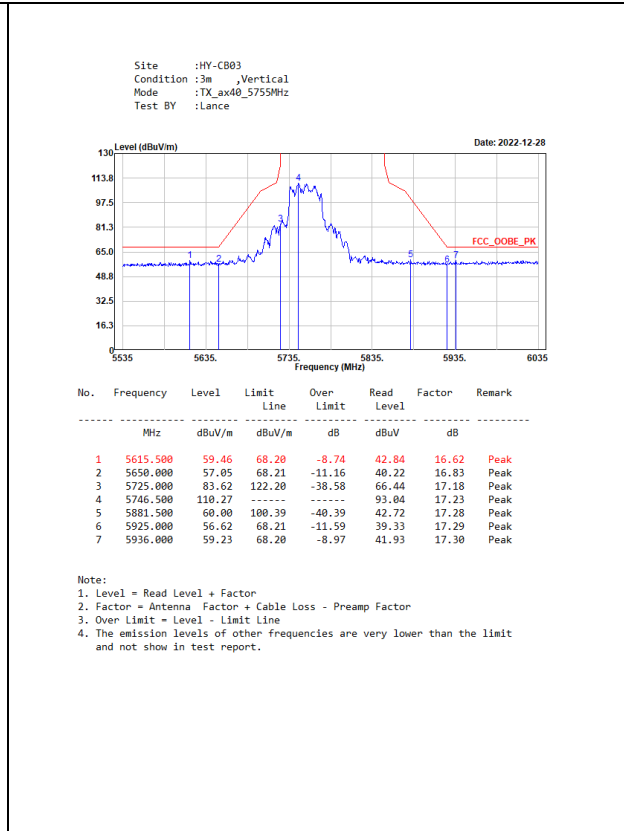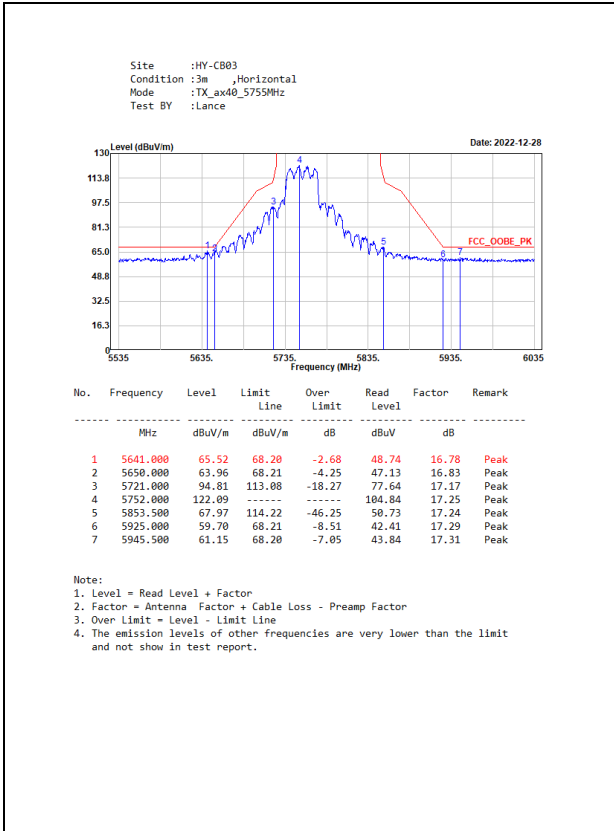

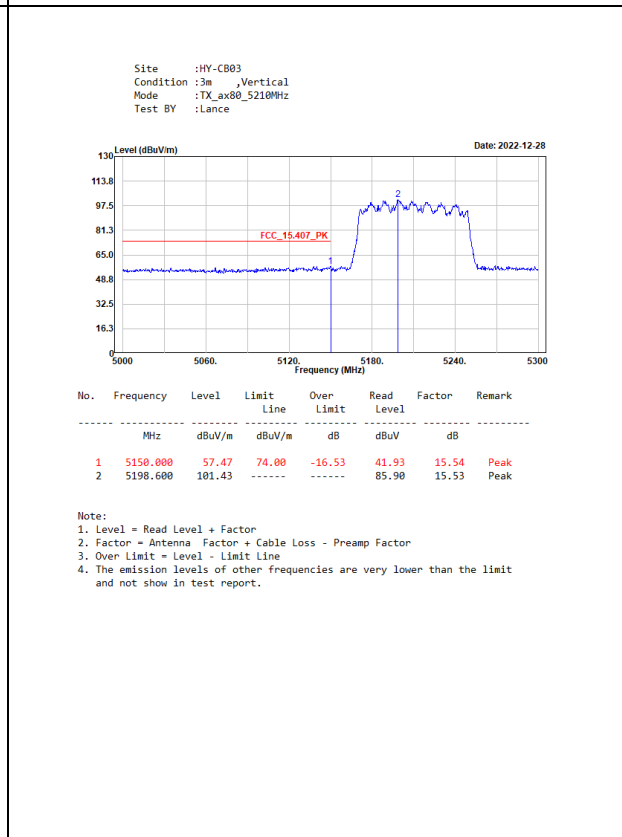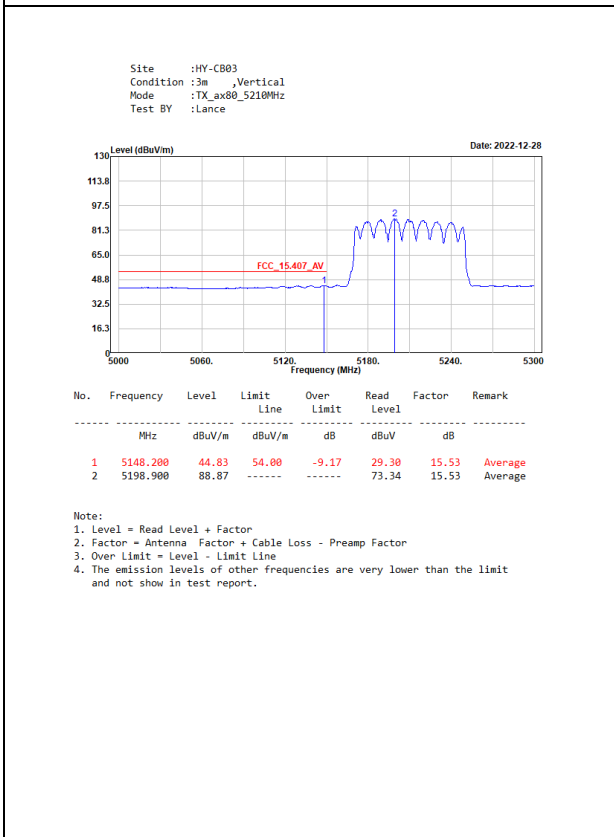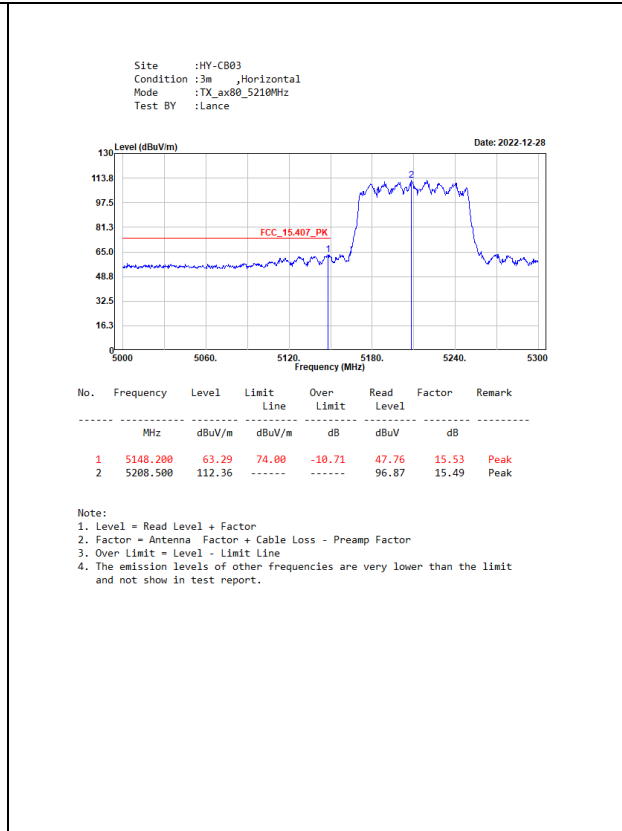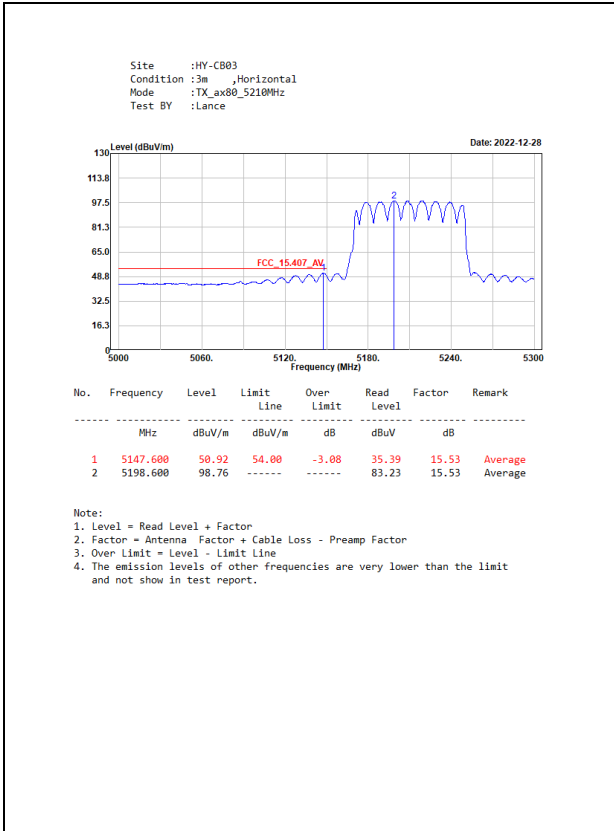

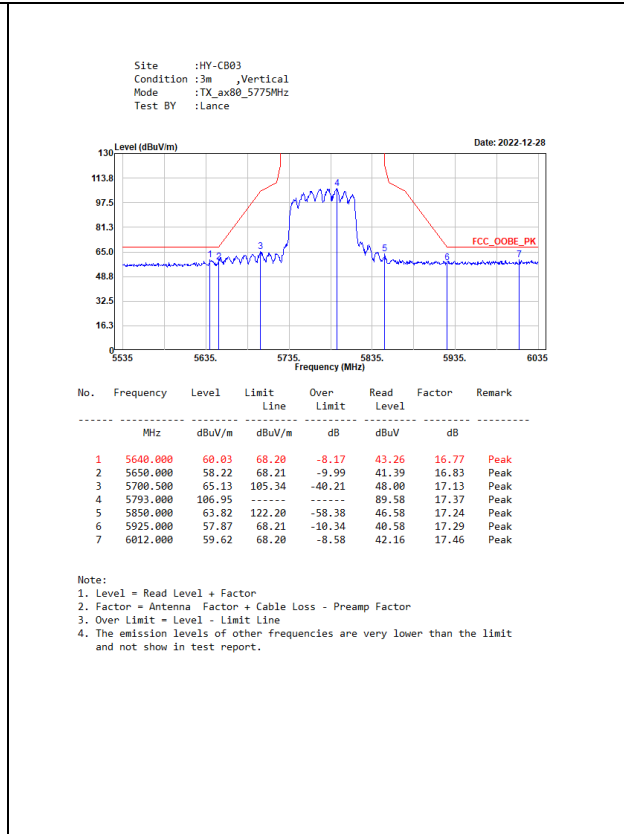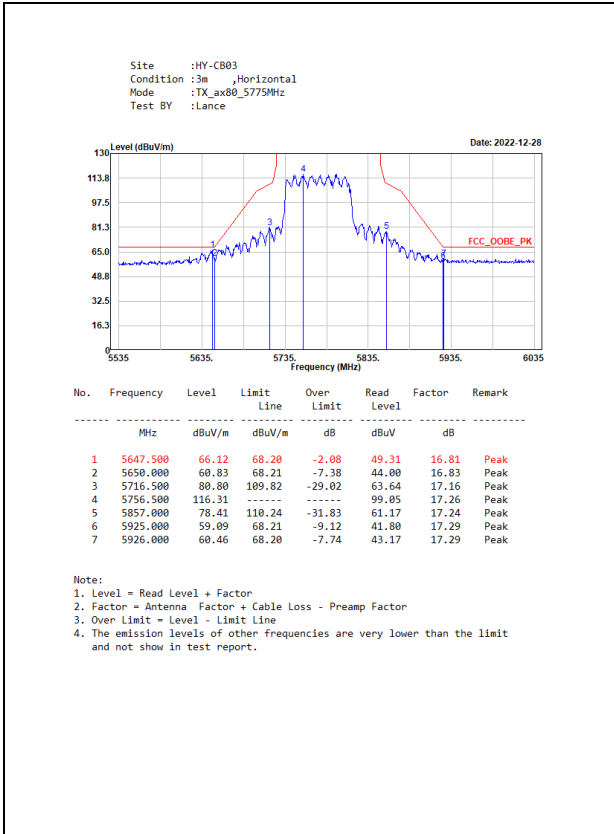

Product : Peplink Pepwave Wireless Product
 Test Item : Band Edge Data
 Test Mode : Transmit (802.11a)


Chain A

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5248.27	<5250	PASS

Chain B


Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5248.31	<5250	PASS

Chain A

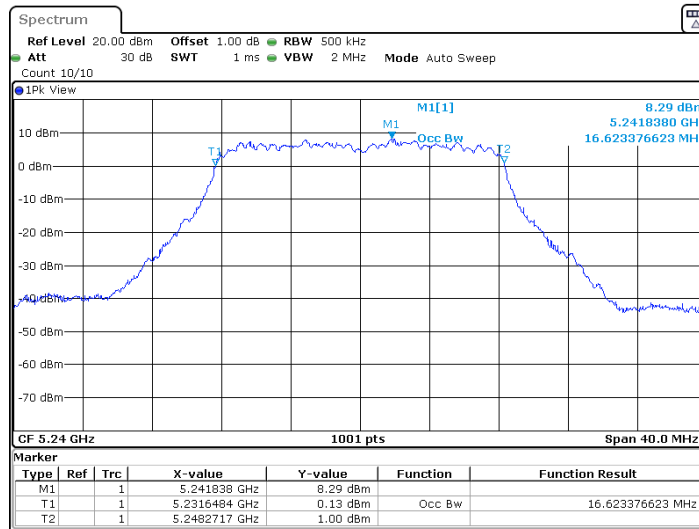

Date: 23.FEB.2023 14:30:39

Chain B

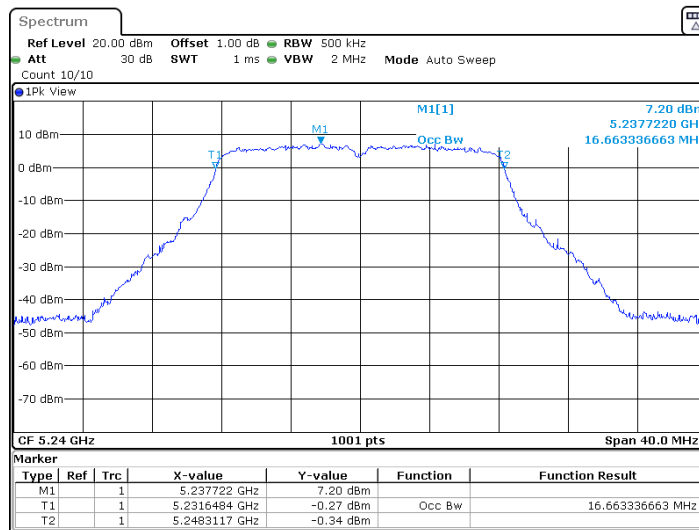

Date: 23.FEB.2023 14:32:31

Product : Peplink Pepwave Wireless Product
 Test Item : Band Edge Data
 Test Mode : Transmit (802.11ax-20 MHz)


Chain A

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5249.47	<5250	PASS

Chain B


Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5240	5249.47	<5250	PASS

Chain A

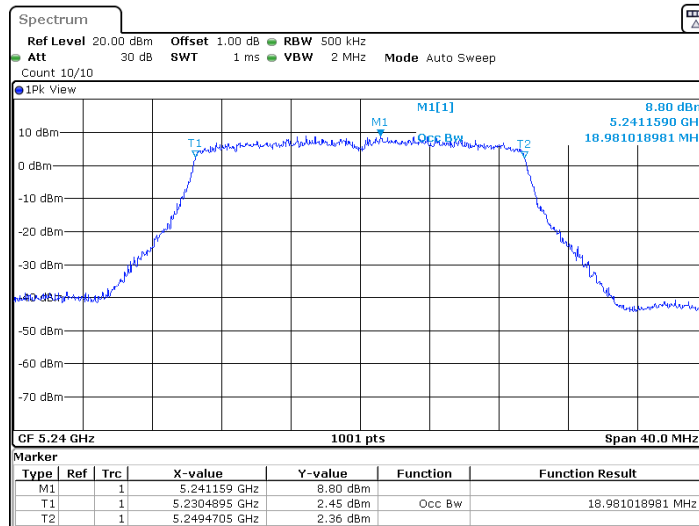

Date: 23.FEB.2023 15:01:55

Chain B

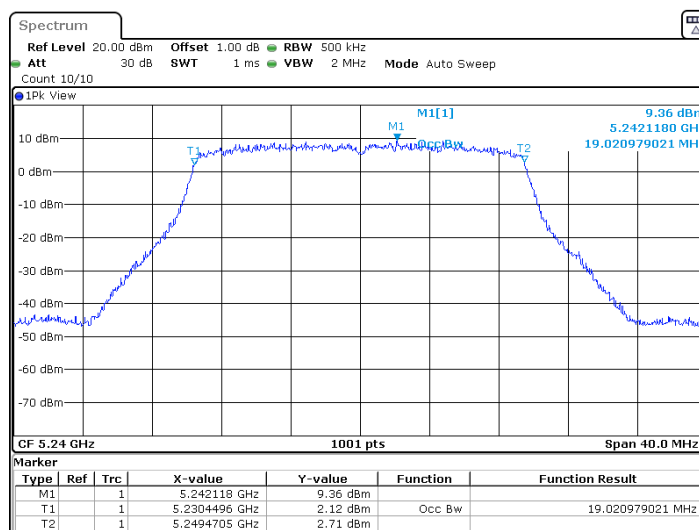

Date: 23.FEB.2023 15:00:48

Product : Peplink Pepwave Wireless Product
 Test Item : Band Edge Data
 Test Mode : Transmit (802.11ax-40 MHz)


Chain A

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5230	5248.94	<5250	PASS

Chain B


Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5230	5248.86	<5250	PASS

Chain A

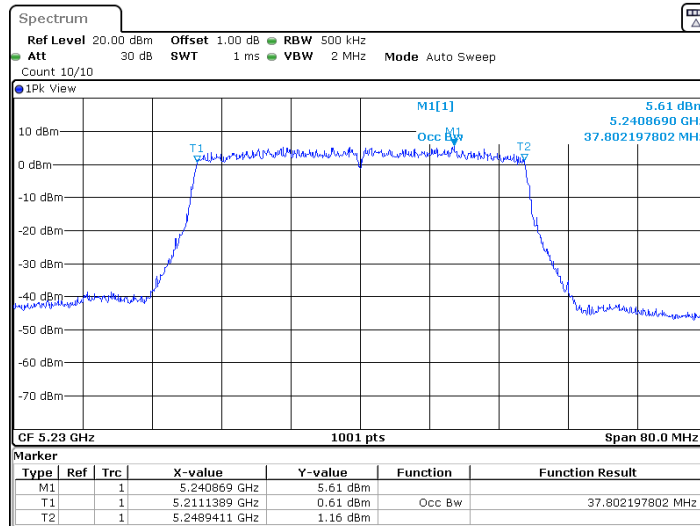

Date: 23.FEB.2023 15:10:33

Chain B

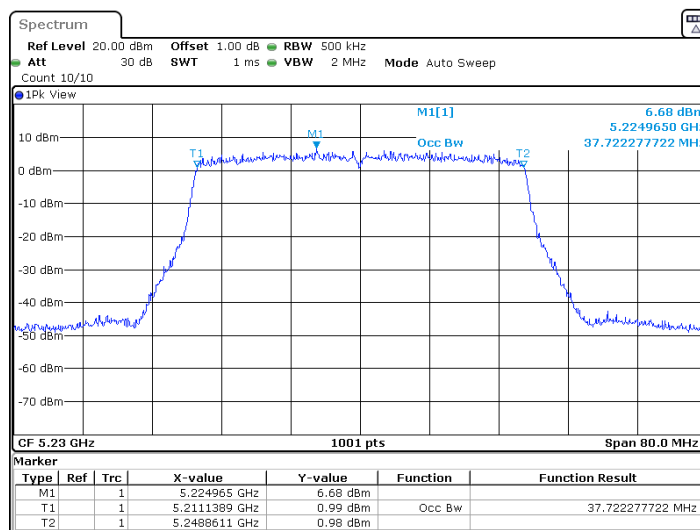

Date: 23.FEB.2023 15:09:32

Product : Peplink Pepwave Wireless Product
 Test Item : Band Edge Data
 Test Mode : Transmit (802.11ax-80 MHz)


Chain A

Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5210	5248.68	<5250	PASS

Chain B


Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
5210	5248.52	<5250	PASS

Chain A

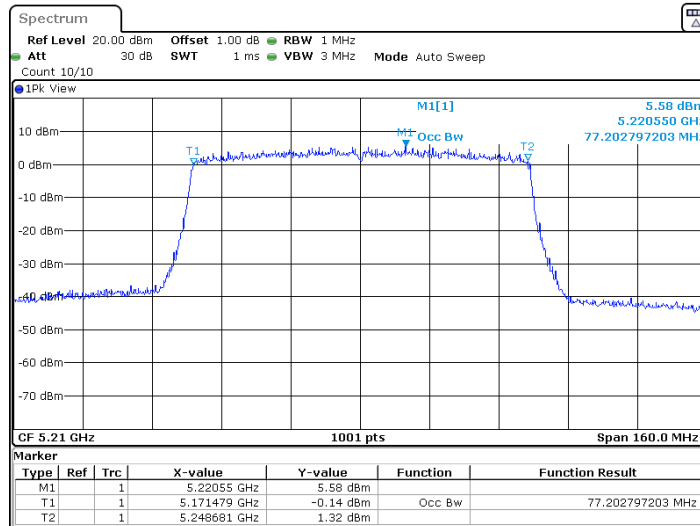

Date: 23.FEB.2023 15:12:45


Chain B

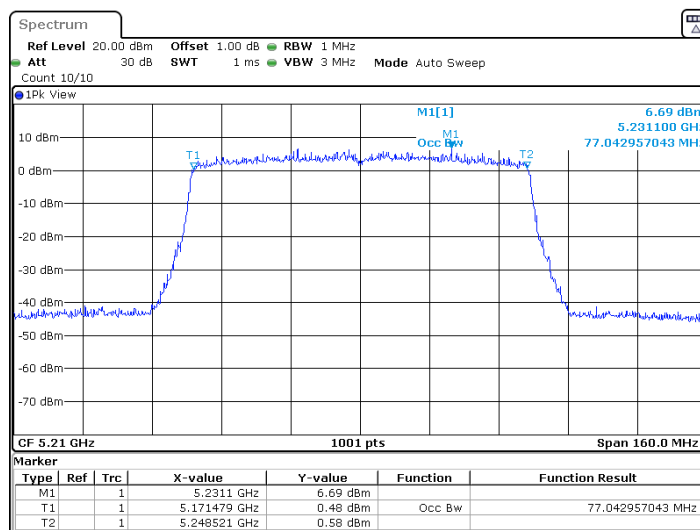

Date: 23.FEB.2023 15:14:00

7. Occupied Bandwidth

7.1. Test Setup

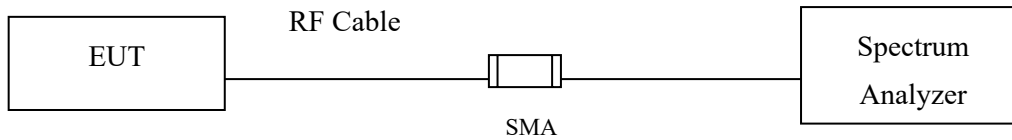

7.2. Limits

For the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

7.3. Test Procedure


The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

7.4. Test Result of Occupied Bandwidth

Product : Peplink Pepwave Wireless Product
 Test Item : Occupied Bandwidth Data
 Test Mode : Transmit (802.11a)
 Test Date : 2023/02/22

Channel No.	Chain	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	A	5745	15505	>500	Pass
157	A	5785	15664	>500	Pass
165	A	5825	15664	>500	Pass
149	B	5745	15145	>500	Pass
157	B	5785	15145	>500	Pass
165	B	5825	15145	>500	Pass

Figure Channel 157 (Chain A):

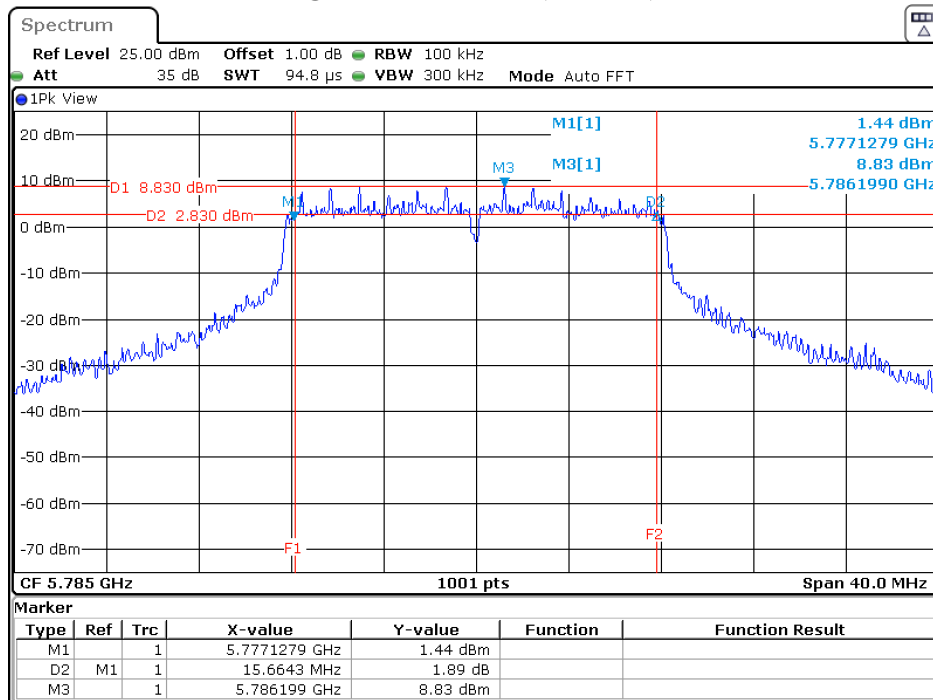


Date: 22.FEB.2023 18:41:39

Product : Peplink Pepwave Wireless Product
 Test Item : Occupied Bandwidth Data
 Test Mode : Transmit (802.11ax-20 MHz)
 Test Date : 2023/02/22

Channel No.	Chain	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	A	5745	15505	>500	Pass
157	A	5785	15664	>500	Pass
165	A	5825	15664	>500	Pass
149	B	5745	15145	>500	Pass
157	B	5785	15145	>500	Pass
165	B	5825	15145	>500	Pass

Figure Channel 157 (Chain A):

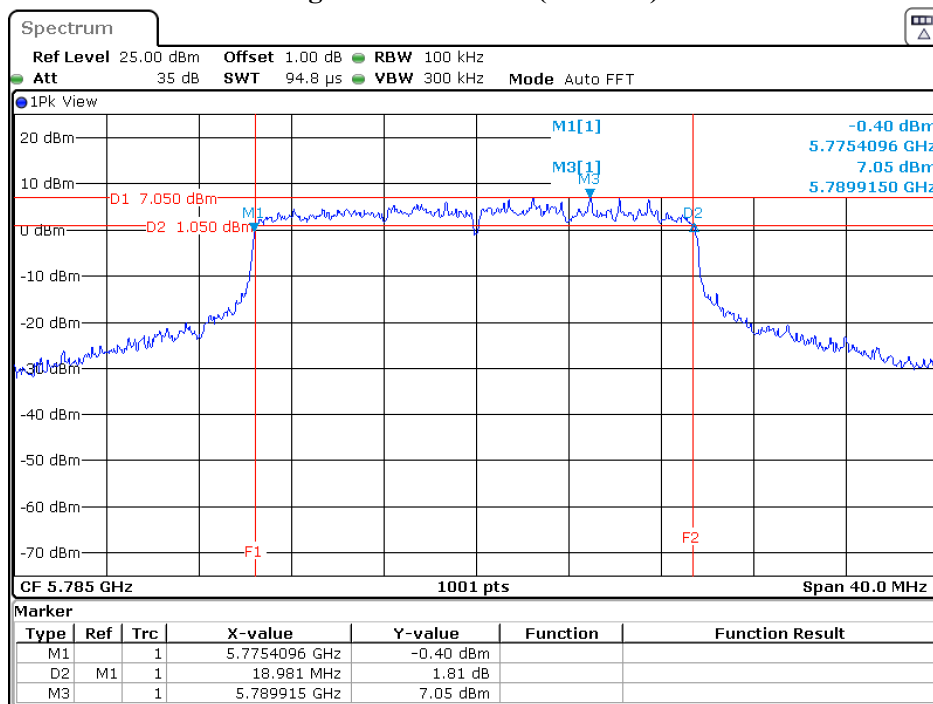


Date: 22.FEB.2023 18:48:00

Product : Peplink Pepwave Wireless Product
 Test Item : Occupied Bandwidth Data
 Test Mode : Transmit (802.11ax-40 MHz)
 Test Date : 2023/02/22

Channel No.	Chain	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	A	5755	17223	>500	Pass
159	A	5795	18981	>500	Pass
151	B	5755	17063	>500	Pass
159	B	5795	17303	>500	Pass

Figure Channel 159 (Chain A):

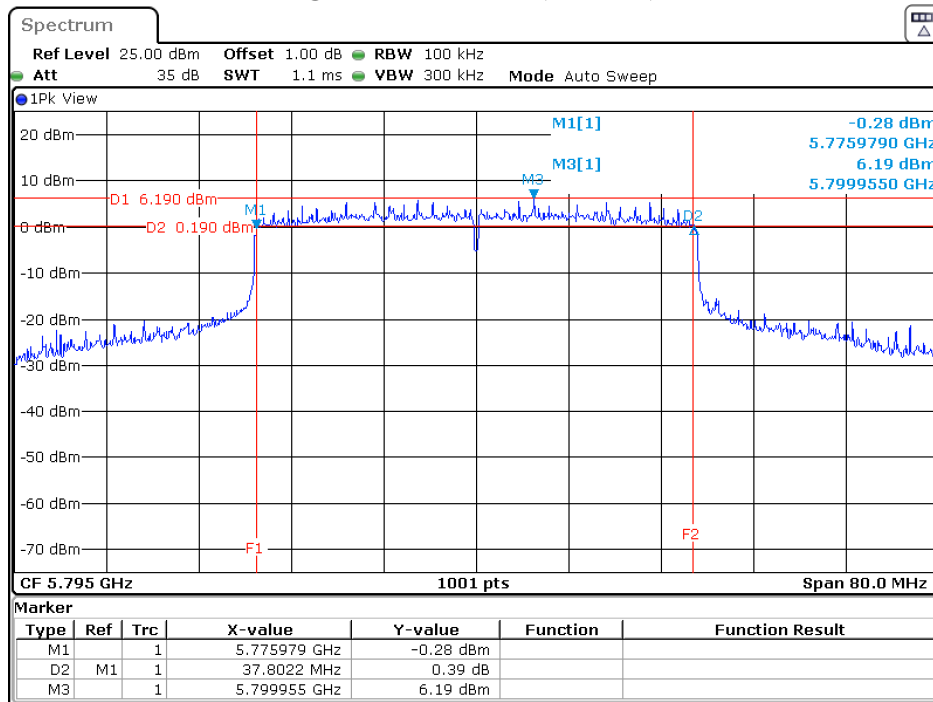


Date: 22.FEB.2023 18:52:28

Product : Peplink Pepwave Wireless Product
 Test Item : Occupied Bandwidth Data
 Test Mode : Transmit (802.11ax-80 MHz)
 Test Date : 2023/02/23

Channel No.	Chain	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
155	A	5775	18502	>500	Pass
155	B	5775	16943	>500	Pass


Figure Channel 155 (Chain B):

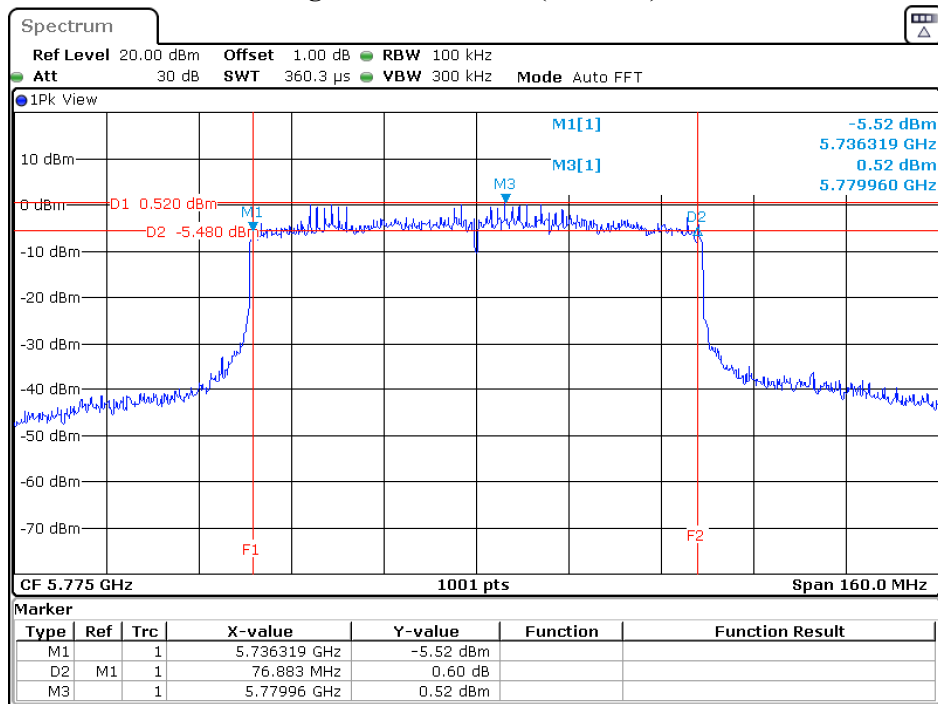

Date: 23.FEB.2023 15:16:51

8. Duty Cycle

8.1. Test Setup

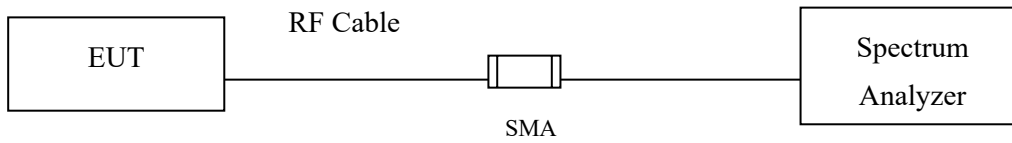

8.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to U-NII test procedure of KDB789033 for compliance to FCC 47CFR 15.407 requirements.

8.3. Test Result of Duty Cycle

Product : Peplink Pepwave Wireless Product
Test Item : Duty Cycle
Test Mode : Transmit

Duty Cycle Formula:


Duty Cycle = Ton / (Ton + Toff)

Duty Factor = 10 Log (1/Duty Cycle)

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	1.4348	1.6015	89.59	0.48
802.11ax-20 MHz	5.4420	5.7029	95.43	0.20
802.11ax-40 MHz	5.3841	5.7609	93.46	0.29
802.11ax-80 MHz	5.4130	5.7609	93.96	0.27

802.11a

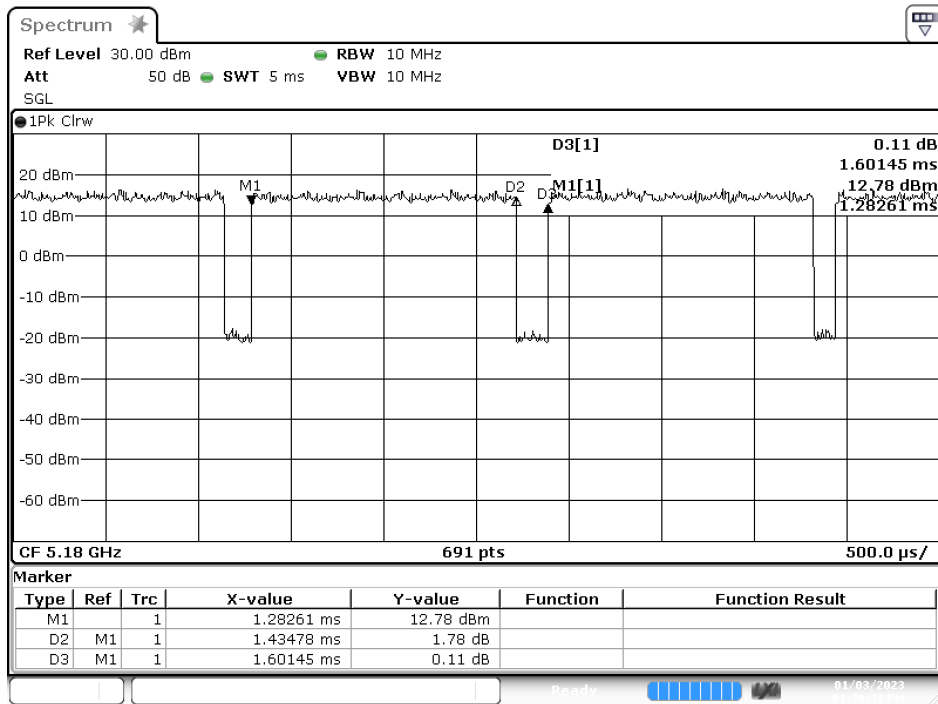


Date: 3.JAN.2023 13:30:44

802.11ax-20 MHz

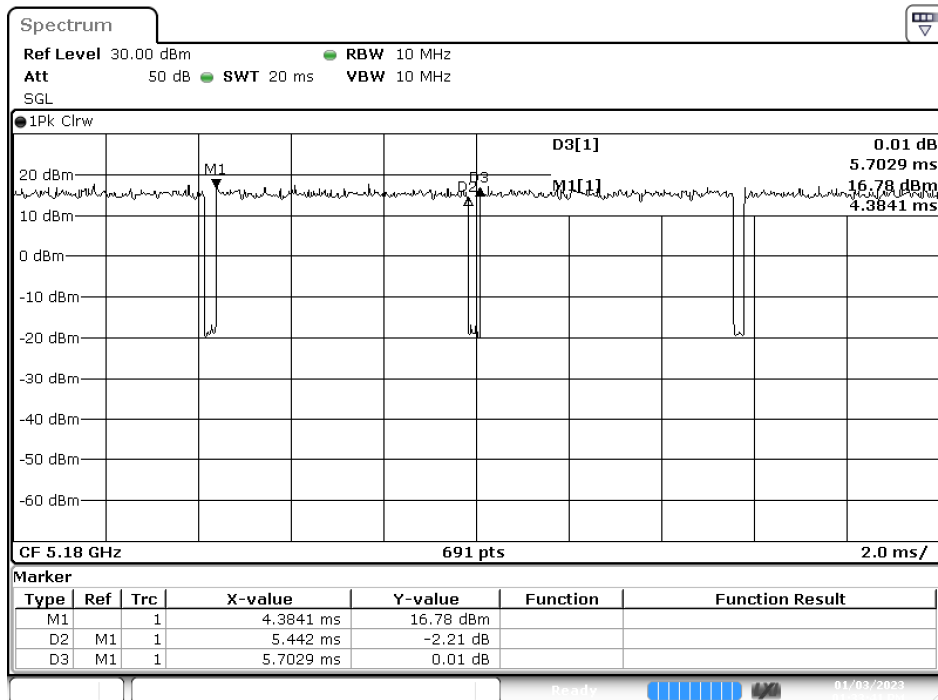


Date: 3.JAN.2023 13:33:41

802.11ax-40 MHz

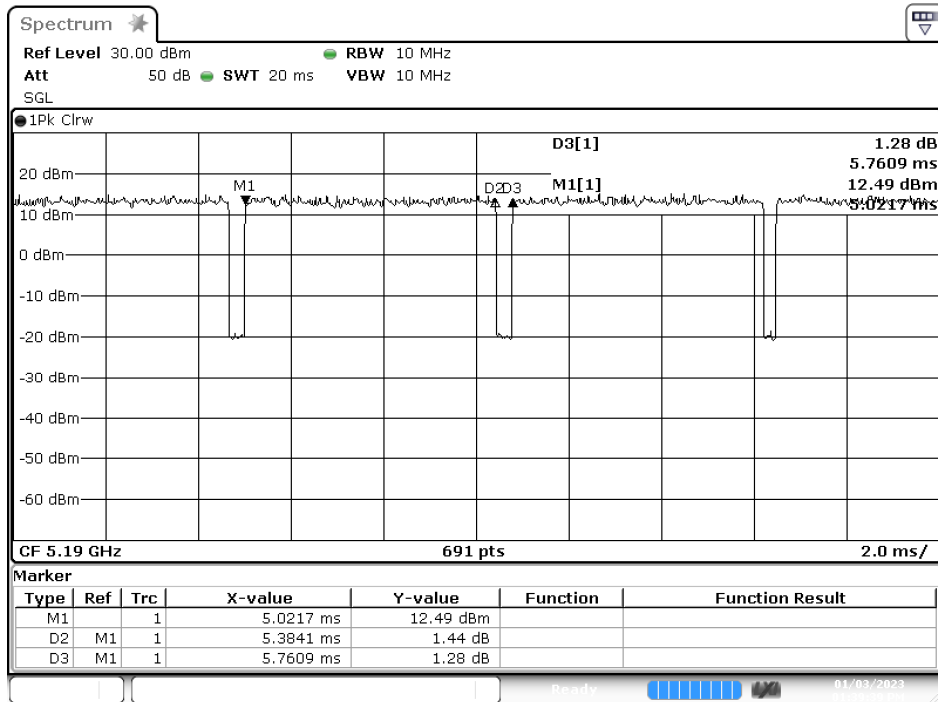

Date: 3.JAN.2023 13:39:39

802.11ax-80 MHz

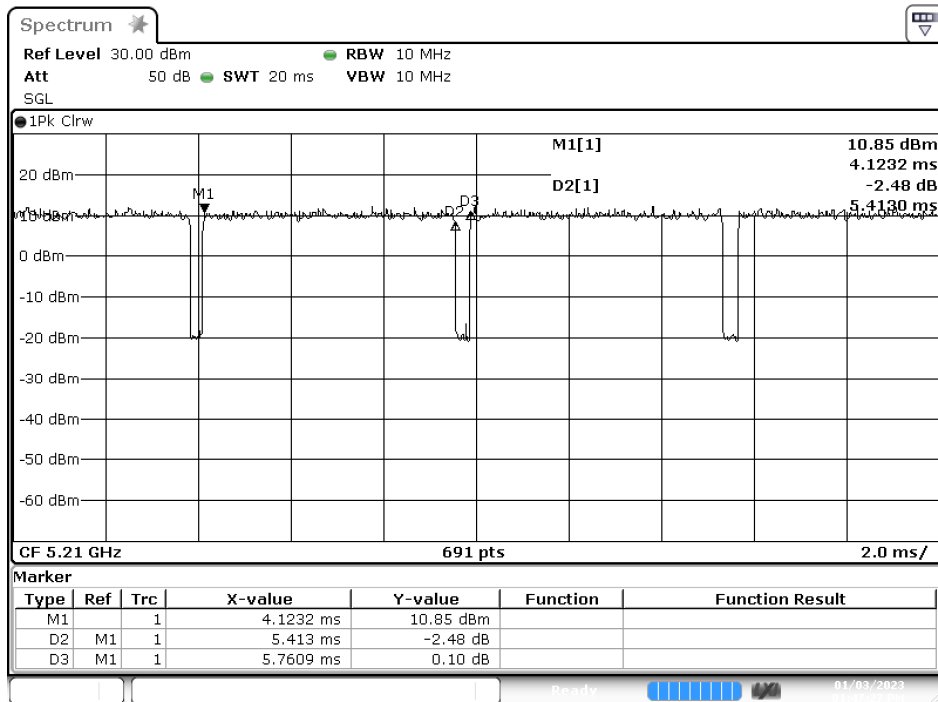

Date: 3.JAN.2023 13:47:27