

FCC TEST REPORT

REPORT NO.: RF960823H01

MODEL NO.: Surf 400-DX

RECEIVED: Aug. 23, 2007

TESTED: Sep. 02 to 04, 2007

ISSUED: Sep. 04, 2007

APPLICANT: Pismo Labs Technology Limited

ADDRESS: Room 1703A, 17/F, Park Building, 476 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien, Taiwan, R.O.C.

This test report consists of 65 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01

Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	8
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.5	DESCRIPTION OF SUPPORT UNITS	11
3.6	CONFIGURATION OF SYSTEM UNDER TEST	12
4	TEST TYPES AND RESULTS	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	13
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES	14
4.1.4	TEST SETUP	14
4.1.5	EUT OPERATING CONDITIONS	15
4.1.6	TEST RESULTS	16
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES	20
4.2.4	TEST SETUP	21
4.2.5	EUT OPERATING CONDITIONS	21
4.2.6	TEST RESULTS	22
4.2.7	TEST RESULTS - DSSS	23
4.2.8	TEST RESULTS - OFDM	30
4.3	6dB BANDWIDTH MEASUREMENT	37
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	37
4.3.2	TEST INSTRUMENTS	37
4.3.3	TEST PROCEDURE	38
4.3.4	TEST SETUP	38
4.3.5	EUT OPERATING CONDITIONS	38
4.3.6	TEST RESULTS –DSSS	39
4.3.7	TEST RESULTS-OFDM	42
4.4	MAXIMUM PEAK OUTPUT POWER	45
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	45
4.4.2	TEST INSTRUMENTS	45
4.4.3	TEST PROCEDURES	46

4.4.4	TEST SETUP	46
4.4.5	EUT OPERATING CONDITIONS	46
4.4.6	TEST RESULTS – DSSS	47
4.4.7	TEST RESULTS –OFDM.....	48
4.5	POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	49
4.5.2	TEST INSTRUMENTS.....	49
4.5.3	TEST PROCEDURE.....	50
4.5.4	TEST SETUP	50
4.5.5	EUT OPERATING CONDITIONS	50
4.5.6	TEST RESULTS –DSSS	51
4.5.7	TEST RESULTS –OFDM.....	54
4.6	CONDUCTED EMISSION AND BAND EDGES MEASUREMENT.....	57
4.6.1	LIMITS OF condcted emission and BAND EDGES MEASUREMENT	57
4.6.2	TEST INSTRUMENTS.....	57
4.6.3	TEST PROCEDURE.....	57
4.6.4	DEVIATION FROM TEST STANDARD.....	57
4.6.5	EUT OPERATING CONDITION.....	57
4.6.6	TEST RESULTS	58
4.7	ANTENNA REQUIREMENT	63
4.7.1	STANDARD APPLICABLE	63
4.7.2	ANTENNA CONNECTED CONSTRUCTION	63
5	INFORMATION ON THE TESTING LABORATORIES	64
6	APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	65

1 CERTIFICATION

PRODUCT : PePWave Surf400-DX
BRAND NAME : PePWave
MODEL NO. : Surf 400-DX
TESTED: Sep. 02 to 04, 2007
APPLICANT : Pismo Labs Technology Limited
TEST ITEM: MASS-PRODUCTION
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (Model: Surf 400-DX) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : 
(Midoli Peng, Specialist) , **DATE:** Sep. 04, 2007

TECHNICAL ACCEPTANCE : 
Responsible for RF (Hank Chung, Deputy Manager) , **DATE:** Sep. 04, 2007

APPROVED BY : 
(May Chen, Deputy Manager) , **DATE:** Sep. 04, 2007

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -6.36 dB at 0.150 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -0.10 dB at 7236.00 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.41 dB
Radiated emissions (30MHz-1GHz)	3.89 dB
Radiated emissions (1GHz -18GHz)	2.21 dB
Radiated emissions (18GHz -40GHz)	1.88 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	PePWave Surf400-DX
MODEL NO.	Surf 400-DX
FCC ID	U8G-SURF400DX
POWER SUPPLY	DC 5V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
OUTPUT POWER	802.11b: 478.630mW 802.11g: 524.807mW
ANTENNA TYPE	Directional Patch Antenna (Antenna gain : 13dBi)
DATA CABLE	NA
I/O PORT	LAN Port x 1

NOTE:

1. The EUT could be supplied with the following power adapters:

Brand:	PePLink
Model No.:	S024EM0500300
Input power :	AC100-240V ~ 50/60Hz 600mA
Output power :	DC5.0V, 3000mA Power cord: 1.8m/ Non shielded/ Without core

2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g standards, and backwards compatible with IEEE 802.11b products.
4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g normal mode: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where PLC: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1	DSSS	CCK	1

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

Bandedge Measurement:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a PePWave Surf400-DX. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)
ANSI C63.4 : 2003

All tests have been performed and recorded as per the above standards.

3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP18L	6976685584	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non-shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

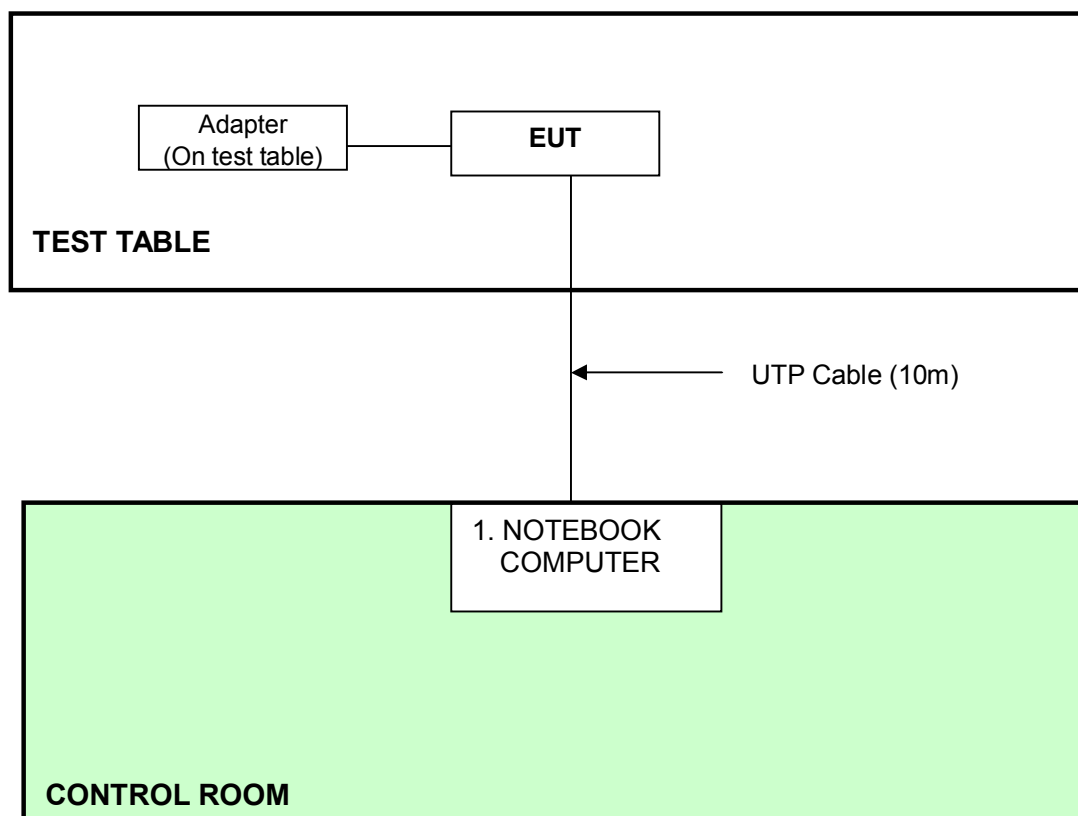

NOTE: 1. Support unit 1 was kept in the control room during the test.

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver	ESCS 30	847124/029	Mar. 28, 2008
Line-Impedance Stabilization Network(for EUT)	ENV-216	100071	Nov. 26, 2007
Line-Impedance Stabilization Network(for Peripheral)	ESH3-Z5	848773/004	Oct. 26, 2007
RF Cable (JETBAO)	RG233/U	Cable_CB_01	Dec. 09, 2007
Terminator	50	2	Oct. 30, 2007
Software	ADT_Cond_V7.3.2	NA	NA

- NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. B.
3. The VCCI Con B Registration No. is C-2193.

4.1.3 TEST PROCEDURES

- The EUT/HOST was placed 0.4 meters from the conducting wall of the shielded room with EUT/HOST being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT/HOST were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

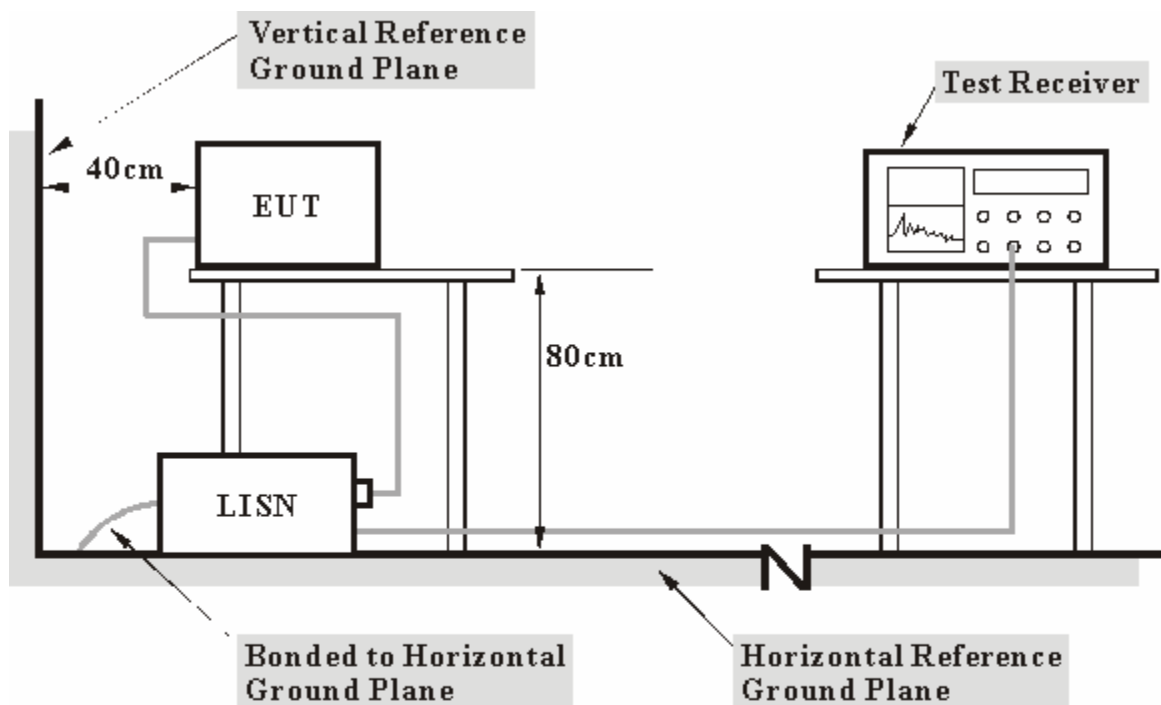

- Note:**
- Support units were connected to second LISN.
 - Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS


- a. Placed the EUT on the testing table.
- b. Prepared other computer systems to act as communication partners and placed them outside of testing area.
- c. The communication partner run test program “ART 58 build5” to enable EUT under transmission condition continuously at specific channel frequency.

4.1.6 TEST RESULTS

INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
PHASE	Line (L)	TRANSFER RATE	1Mbps
ENVIRONMENTAL CONDITIONS	24deg. C, 59%RH, 960hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.40	59.24	48.94	59.64	49.34	66.00	56.00	-6.36	-6.66
2	0.193	0.40	50.84	-	51.24	-	63.91	53.91	-12.67	-
3	0.244	0.40	43.47	-	43.87	-	61.97	51.97	-18.10	-
4	0.353	0.40	42.48	-	42.88	-	58.89	48.89	-16.01	-
5	0.459	0.40	39.43	-	39.83	-	56.72	46.72	-16.89	-
6	0.478	0.40	34.62	-	35.02	-	56.37	46.37	-21.35	-
7	0.814	0.40	36.79	-	37.19	-	56.00	46.00	-18.81	-
8	2.767	0.54	34.12	-	34.66	-	56.00	46.00	-21.34	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

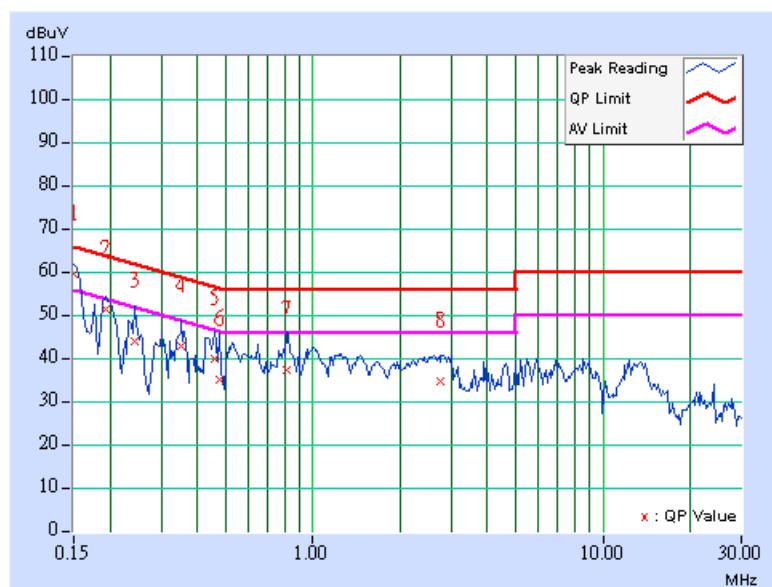

INPUT POWER (SYSTEM)	120Vac, 60 Hz	6dB BANDWIDTH	9 kHz
PHASE	Neutral (N)	TRANSFER RATE	1Mbps
ENVIRONMENTAL CONDITIONS	24deg. C, 59%RH, 960hPa	TESTED BY	Tony Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.20	59.02	47.58	59.22	47.78	66.00	56.00	-6.78	-8.22
2	0.189	0.20	48.68	-	48.88	-	64.08	54.08	-15.20	-
3	0.240	0.20	42.64	-	42.84	-	62.10	52.10	-19.26	-
4	0.349	0.20	40.86	-	41.06	-	58.98	48.98	-17.92	-
5	0.463	0.21	39.65	-	39.86	-	56.65	46.65	-16.79	-
6	0.529	0.22	39.46	-	39.68	-	56.00	46.00	-16.32	-
7	2.849	0.44	35.11	-	35.55	-	56.00	46.00	-20.45	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

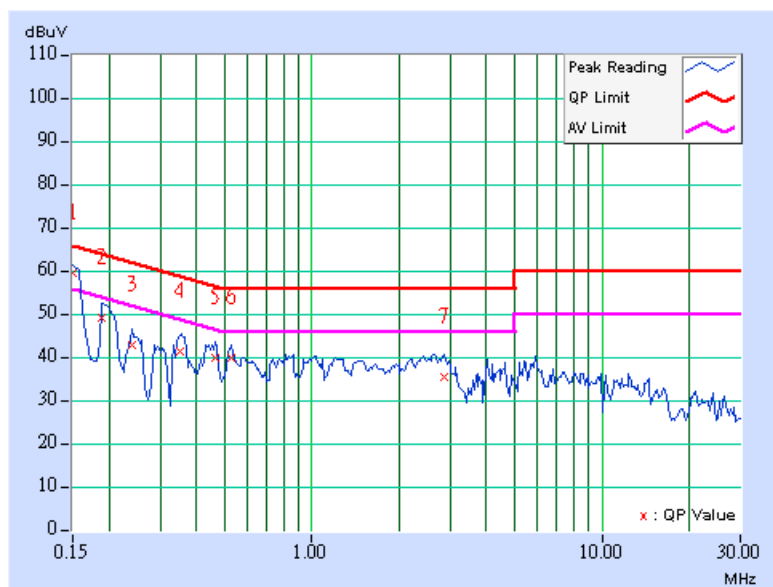

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 15, 2008
HP Pre_Amplifier	8449B	3008A01922	Sep. 18, 2007
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Sep. 20, 2007
CHASE Broadband Antenna	VULB 9168	138	July 26, 2008
Schwarzbeck Horn_Antenna	BBHA9120	D124	Jan. 01, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 25, 2008
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 08, 2009
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 08, 2009
RF Switches (ARNITSU)	CS-201	1565157	Aug. 13, 2008
RF CABLE (Chaintek)	SF102	22054-2	Nov. 14, 2007
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Aug. 13, 2008
Software	ADT_Radiated_V 7.6.15.7	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Biconical and Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824A-3.


4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 TEST SETUP

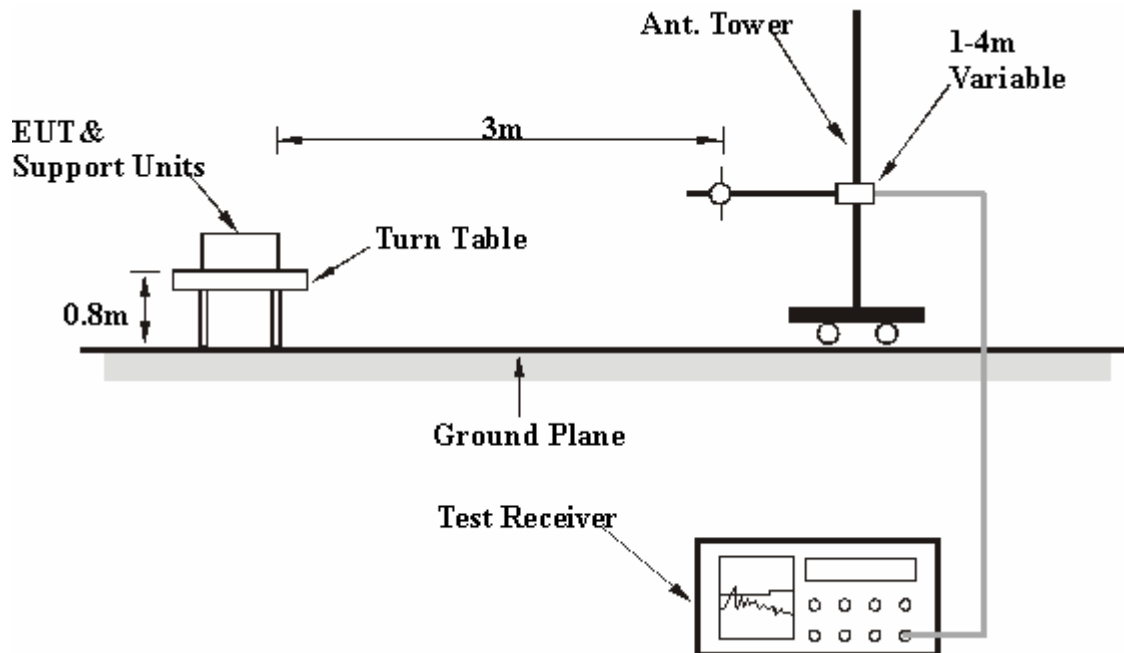

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5 EUT OPERATING CONDITIONS

Same as 4.1.5

4.2.6 TEST RESULTS

Below 1GHz Worst-Case Data

MODULATION TYPE	OFDM	CHANNEL	Channel 11
INPUT POWER (SYSTEM)	120Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 960hPa	TRANSFER RATE	6Mbps
TESTED BY	Phoenix Huang	DETECTOR FUNCTION	Quasi-Peak, 120kHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.97	27.53 QP	40.00	-12.47	1.74 H	268	13.08	14.45
2	54.24	31.30 QP	40.00	-8.70	1.12 H	313	16.78	14.52
3	125.11	32.83 QP	43.50	-10.67	1.19 H	230	20.60	12.23
4	184.00	42.70 QP	43.50	-0.80	1.28 H	55	30.00	12.70
5	368.00	30.77 QP	46.00	-15.23	1.00 H	330	12.80	17.97
6	500.50	32.23 QP	46.00	-13.77	1.28 H	208	10.46	21.77
7	874.90	31.50 QP	46.00	-14.50	1.00 H	50	2.88	28.62

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.97	39.49 QP	40.00	-0.51	1.00 V	349	25.04	14.45
2	43.77	37.50 QP	40.00	-2.50	1.00 V	21	23.01	14.49
3	54.33	36.74 QP	40.00	-3.26	1.00 V	247	22.23	14.51
4	125.11	29.89 QP	43.50	-13.61	1.00 V	60	17.66	12.23
5	184.00	41.14 QP	43.50	-2.36	1.00 V	140	28.44	12.70
6	368.00	31.78 QP	46.00	-14.22	1.26 V	231	13.81	17.97
7	501.10	34.38 QP	46.00	-11.62	1.30 V	36	12.59	21.79
8	874.90	33.38 QP	46.00	-12.62	1.24 V	1	4.76	28.62

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

4.2.7 TEST RESULTS - DSSS

802.11b DSSS modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 66%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2228.00	57.30 PK	74.00	-16.70	1.39 H	347	27.68	29.62
2	2228.00	42.90 AV	54.00	-11.10	1.39 H	347	13.28	29.62
3	2390.00	54.70 PK	74.00	-19.30	1.48 H	170	24.38	30.32
4	2390.00	44.00 AV	54.00	-10.00	1.48 H	170	13.68	30.32
5	*2412.00	104.80 PK			1.52 H	174	74.39	30.41
6	*2412.00	99.70 AV			1.52 H	174	69.29	30.41
7	4824.00	55.00 PK	74.00	-19.00	1.31 H	170	19.21	35.79
8	4824.00	51.80 AV	54.00	-2.20	1.31 H	170	16.01	35.79
9	7236.00	53.00 PK	74.00	-21.00	1.41 H	143	11.40	41.60
10	7236.00	41.90 AV	54.00	-12.10	1.41 H	143	0.30	41.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2228.00	68.90 PK	74.00	-5.10	1.08 V	329	39.28	29.62
2	2228.00	53.50 AV	54.00	-0.50	1.08 V	329	23.88	29.62
3	2386.00	58.53 PK	74.00	-15.47	1.00 V	350	28.23	30.30
4	2386.00	51.11 AV	54.00	-2.89	1.00 V	350	20.81	30.30
5	*2412.00	119.10 PK			1.00 V	348	88.69	30.41
6	*2412.00	114.80 AV			1.00 V	348	84.39	30.41
7	4824.00	52.80 PK	74.00	-21.20	1.08 V	239	17.01	35.79
8	4824.00	48.40 AV	54.00	-5.60	1.08 V	239	12.61	35.79
9	7236.00	52.80 PK	74.00	-21.20	1.38 V	198	11.20	41.60
10	7236.00	40.70 AV	54.00	-13.30	1.38 V	198	-0.90	41.60

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * “ : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 66%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2253.00	60.20 PK	74.00	-13.80	1.39 H	249	30.47	29.73
2	2253.00	45.40 AV	54.00	-8.60	1.39 H	249	15.67	29.73
3	*2437.00	104.20 PK			1.43 H	173	73.68	30.52
4	*2437.00	99.00 AV			1.43 H	173	68.48	30.52
5	4874.00	56.10 PK	74.00	-17.90	1.36 H	198	20.18	35.92
6	4874.00	53.20 AV	54.00	-0.80	1.36 H	198	17.28	35.92
7	7311.00	53.80 PK	74.00	-20.20	1.15 H	121	11.99	41.81
8	7311.00	40.00 AV	54.00	-14.00	1.15 H	121	-1.81	41.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2253.00	67.50 PK	74.00	-6.50	1.27 V	323	37.77	29.73
2	2253.00	53.00 AV	54.00	-1.00	1.27 V	323	23.27	29.73
3	*2437.00	118.80 PK			1.00 V	349	88.28	30.52
4	*2437.00	114.10 AV			1.00 V	349	83.58	30.52
5	4874.00	52.50 PK	74.00	-21.50	1.17 V	86	16.58	35.92
6	4874.00	48.40 AV	54.00	-5.60	1.17 V	86	12.48	35.92
7	7311.00	54.60 PK	74.00	-19.40	1.61 V	205	12.79	41.81
8	7311.00	42.50 AV	54.00	-11.50	1.61 V	205	0.69	41.81

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 66%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2278.00	60.00 PK	74.00	-14.00	1.41 H	283	30.16	29.84
2	2278.00	45.60 AV	54.00	-8.40	1.41 H	283	15.76	29.84
3	*2462.00	99.50 PK			1.37 H	287	68.87	30.63
4	*2462.00	94.00 AV			1.37 H	287	63.37	30.63
5	2483.50	55.20 PK	74.00	-18.80	1.38 H	289	24.48	30.72
6	2483.50	44.30 AV	54.00	-9.70	1.38 H	289	13.58	30.72
7	4924.00	55.00 PK	74.00	-19.00	1.25 H	199	18.94	36.06
8	4924.00	52.60 AV	54.00	-1.40	1.25 H	199	16.54	36.06
9	7386.00	52.20 PK	74.00	-21.80	1.04 H	143	10.19	42.01
10	7386.00	39.20 AV	54.00	-14.80	1.04 H	143	-2.81	42.01



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2278.00	65.30 PK	74.00	-8.70	1.24 V	347	35.46	29.84
2	2278.00	52.30 AV	54.00	-1.70	1.24 V	347	22.46	29.84
3	*2462.00	118.70 PK			1.00 V	350	88.07	30.63
4	*2462.00	114.30 AV			1.00 V	350	83.67	30.63
5	2483.50	56.59 PK	74.00	-17.41	1.00 V	350	25.87	30.72
6	2483.50	44.64 AV	54.00	-9.36	1.00 V	350	13.92	30.72
7	4924.00	51.10 PK	74.00	-22.90	1.02 V	148	15.04	36.06
8	4924.00	46.60 AV	54.00	-7.40	1.02 V	148	10.54	36.06
9	7386.00	52.30 PK	74.00	-21.70	1.02 V	236	10.29	42.01
10	7386.00	39.40 AV	54.00	-14.60	1.02 V	236	-2.61	42.01



REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

RESTRICTED BANDEDGE (802.11b MODE, CH1, HORIZONTAL)

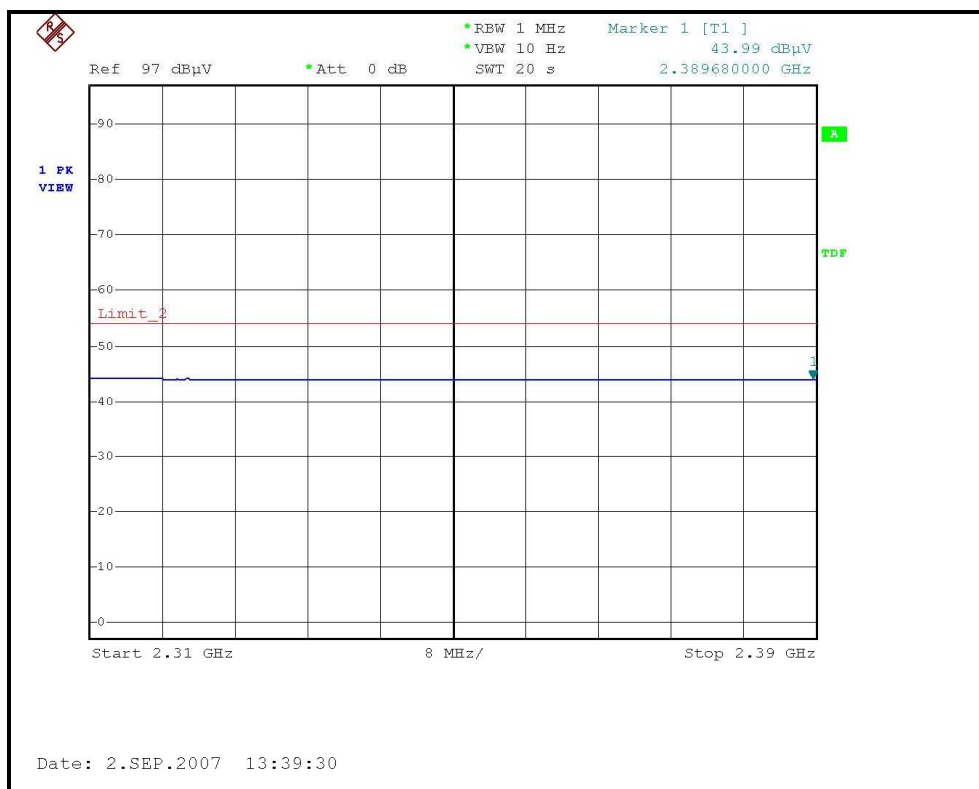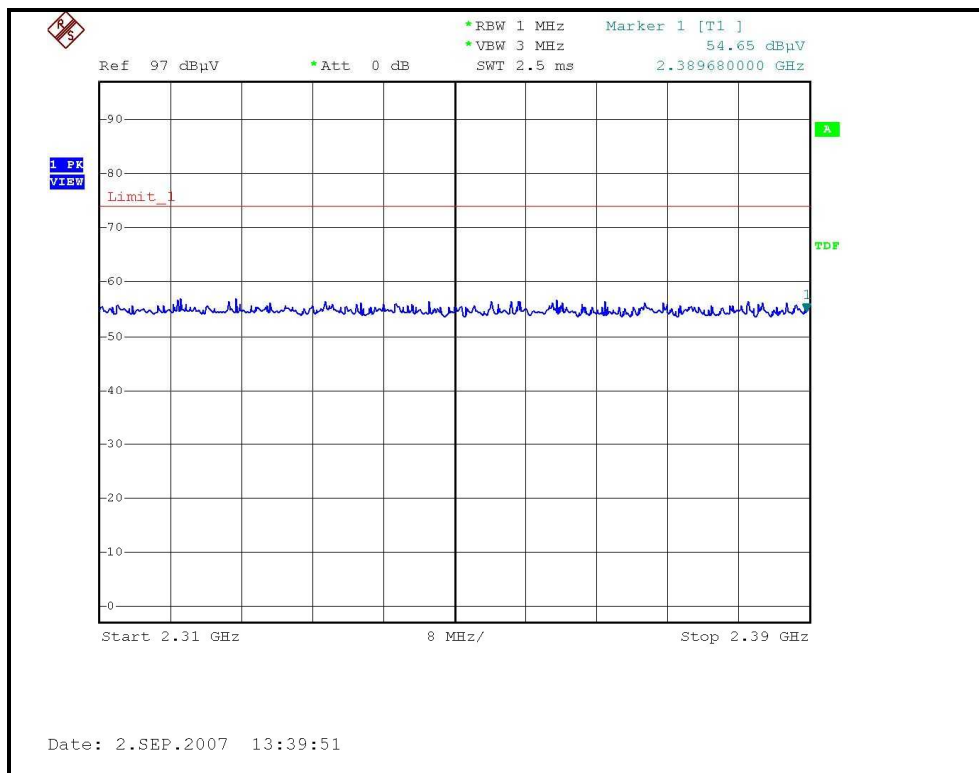

RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

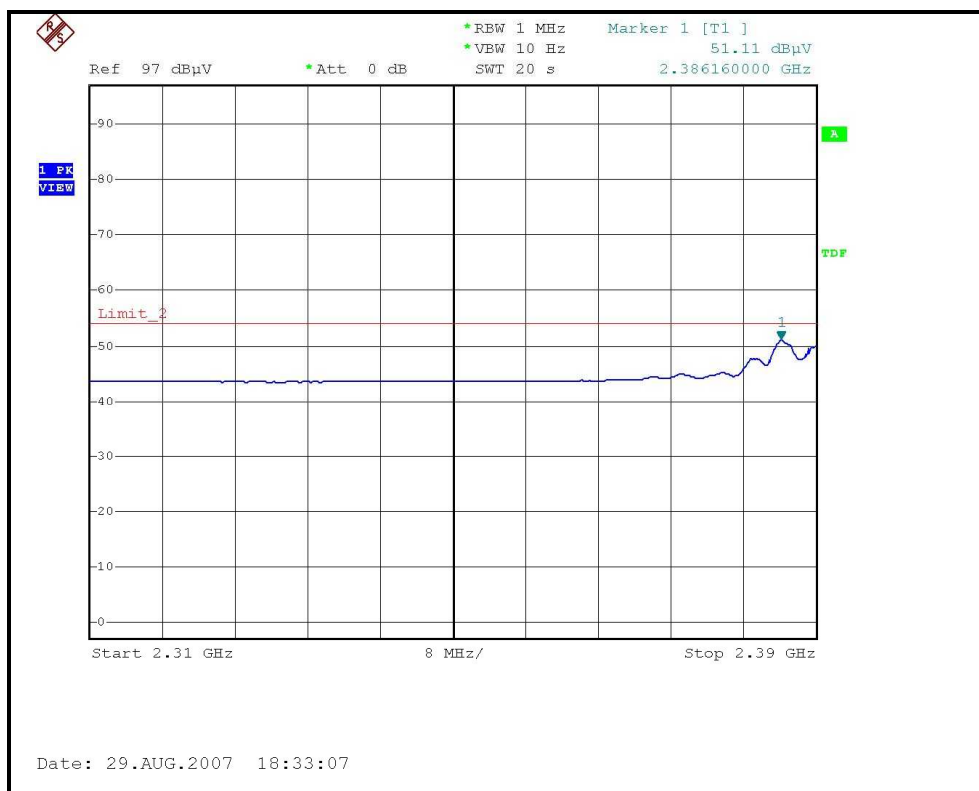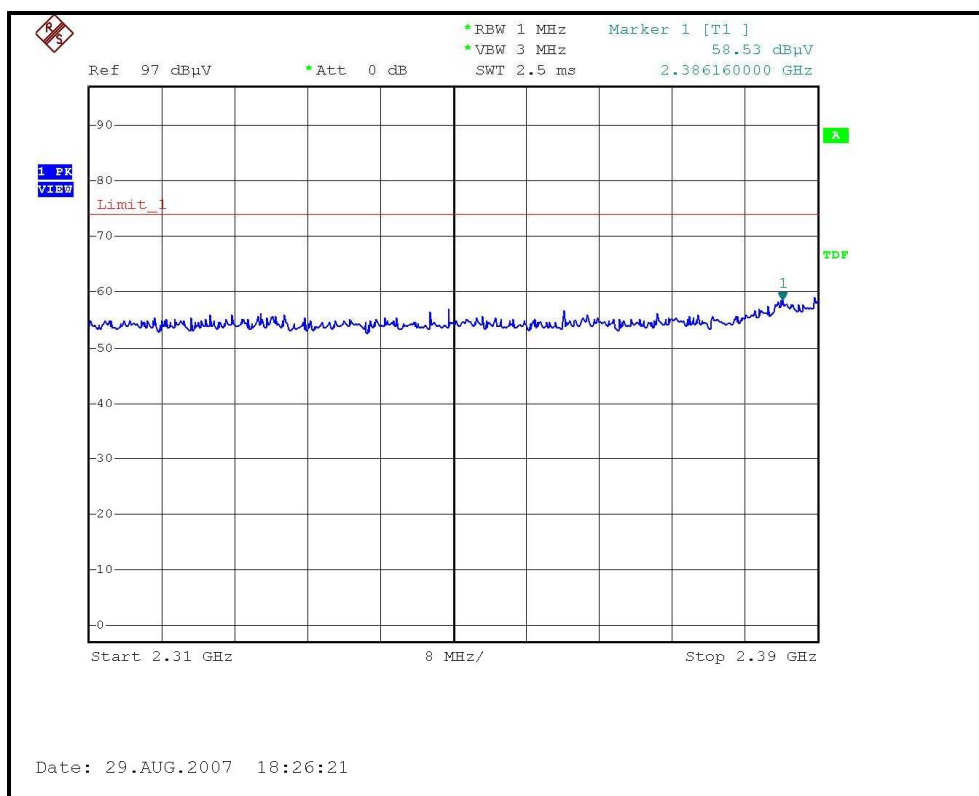

4.2.8 TEST RESULTS - OFDM

802.11g Normal OFDM modulation

MODE	Channel 1	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 66%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2228.00	57.60 PK	74.00	-16.40	1.37 H	321	27.98	29.62
2	2228.00	39.70 AV	54.00	-14.30	1.37 H	321	10.08	29.62
3	2390.00	56.40 PK	74.00	-17.60	1.50 H	175	26.08	30.32
4	2390.00	44.20 AV	54.00	-9.80	1.50 H	175	13.88	30.32
5	*2412.00	109.60 PK			1.05 H	304	79.19	30.41
6	*2412.00	98.80 AV			1.05 H	304	68.39	30.41
7	4824.00	58.80 PK	74.00	-15.20	1.37 H	169	23.01	35.79
8	4824.00	44.50 AV	54.00	-9.50	1.37 H	169	8.71	35.79
9	7236.00	73.90 PK	74.00	-0.10	1.40 H	143	32.30	41.60
10	7236.00	43.60 AV	54.00	-10.40	1.40 H	143	2.00	41.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2228.00	69.60 PK	74.00	-4.40	1.09 V	328	39.98	29.62
2	2228.00	50.30 AV	54.00	-3.70	1.09 V	328	20.68	29.62
3	2390.00	72.10 PK	74.00	-1.90	1.18 V	350	41.78	30.32
4	2390.00	53.00 AV	54.00	-1.00	1.18 V	350	22.68	30.32
5	*2412.00	122.70 PK			1.00 V	350	92.29	30.41
6	*2412.00	111.60 AV			1.00 V	350	81.19	30.41
7	4824.00	55.80 PK	74.00	-18.20	1.01 V	241	20.01	35.79
8	4824.00	40.10 AV	54.00	-13.90	1.01 V	241	4.31	35.79
9	7236.00	73.50 PK	74.00	-0.50	1.00 V	225	31.90	41.60
10	7236.00	42.40 AV	54.00	-11.60	1.00 V	225	0.80	41.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

MODE	Channel 6	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 66%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2253.00	57.90 PK	74.00	-16.10	1.38 H	321	28.17	29.73
2	2253.00	40.80 AV	54.00	-13.20	1.38 H	321	11.07	29.73
3	*2437.00	107.40 PK			1.05 H	305	76.88	30.52
4	*2437.00	96.20 AV			1.05 H	305	65.68	30.52
5	4874.00	56.10 PK	74.00	-17.90	1.27 H	195	20.18	35.92
6	4874.00	43.10 AV	54.00	-10.90	1.27 H	195	7.18	35.92
7	7311.00	69.30 PK	74.00	-4.70	1.03 H	80	27.49	41.81
8	7311.00	42.30 AV	54.00	-11.70	1.03 H	80	0.49	41.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2253.00	66.70 PK	74.00	-7.30	1.06 V	356	36.97	29.73
2	2253.00	49.20 AV	54.00	-4.80	1.06 V	356	19.47	29.73
3	*2437.00	121.40 PK			1.19 V	347	90.88	30.52
4	*2437.00	110.40 AV			1.19 V	347	79.88	30.52
5	4874.00	50.70 PK	74.00	-23.30	1.00 V	230	14.78	35.92
6	4874.00	37.80 AV	54.00	-16.20	1.00 V	230	1.88	35.92
7	7311.00	73.10 PK	74.00	-0.90	1.00 V	172	31.29	41.81
8	7311.00	43.60 AV	54.00	-10.40	1.00 V	172	1.79	41.81

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



MODE	Channel 11	FREQUENCY RANGE	1000~25000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION & BANDWIDTH	Peak (PK) Average (AV) 1 MHz
ENVIRONMENTAL CONDITIONS	27 deg. C, 66%RH, 960hPa	TESTED BY	Wen Yu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2278.00	61.20 PK	74.00	-12.80	1.40 H	284	31.36	29.84
2	2278.00	43.20 AV	54.00	-10.80	1.40 H	284	13.36	29.84
3	*2462.00	107.90 PK			1.07 H	306	77.27	30.63
4	*2462.00	97.50 AV			1.07 H	306	66.87	30.63
5	2483.50	56.40 PK	74.00	-17.60	1.86 H	322	25.68	30.72
6	2483.50	44.30 AV	54.00	-9.70	1.86 H	322	13.58	30.72
7	4924.00	56.40 PK	74.00	-17.60	1.25 H	170	20.34	36.06
8	4924.00	41.90 AV	54.00	-12.10	1.25 H	170	5.84	36.06
9	7386.00	67.80 PK	74.00	-6.20	1.00 H	143	25.79	42.01
10	7386.00	39.40 AV	54.00	-14.60	1.00 H	143	-2.61	42.01



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2278.00	68.20 PK	74.00	-5.80	1.08 V	350	38.36	29.84
2	2278.00	51.50 AV	54.00	-2.50	1.08 V	350	21.66	29.84
3	*2462.00	122.70 PK			1.18 V	352	92.07	30.63
4	*2462.00	111.60 AV			1.18 V	352	80.97	30.63
5	2483.50	60.00 PK	74.00	-14.00	1.19 V	351	29.28	30.72
6	2483.50	45.40 AV	54.00	-8.60	1.19 V	351	14.68	30.72
7	4924.00	48.80 PK	74.00	-25.20	1.07 V	138	12.74	36.06
8	4924.00	36.90 AV	54.00	-17.10	1.07 V	138	0.84	36.06
9	7386.00	72.30 PK	74.00	-1.70	1.00 V	173	30.29	42.01
10	7386.00	40.50 AV	54.00	-13.50	1.00 V	173	-1.51	42.01



REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * ” : Fundamental frequency

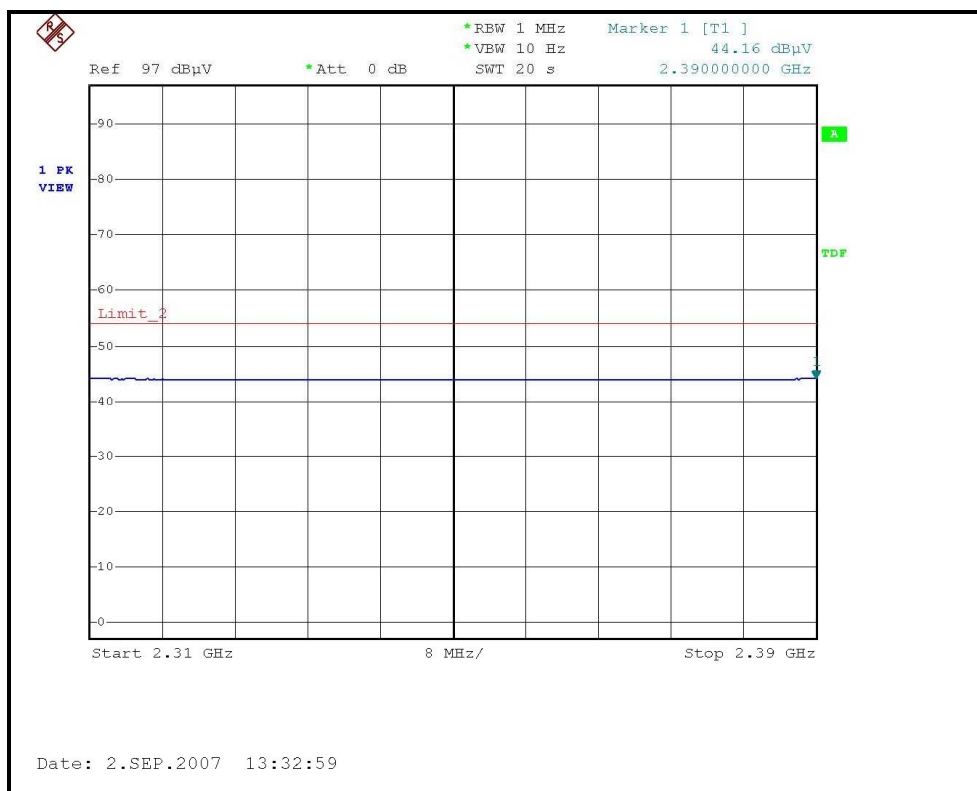



RESTRICTED BANDEDGE (802.11g MODE, CH1, VERTICAL)

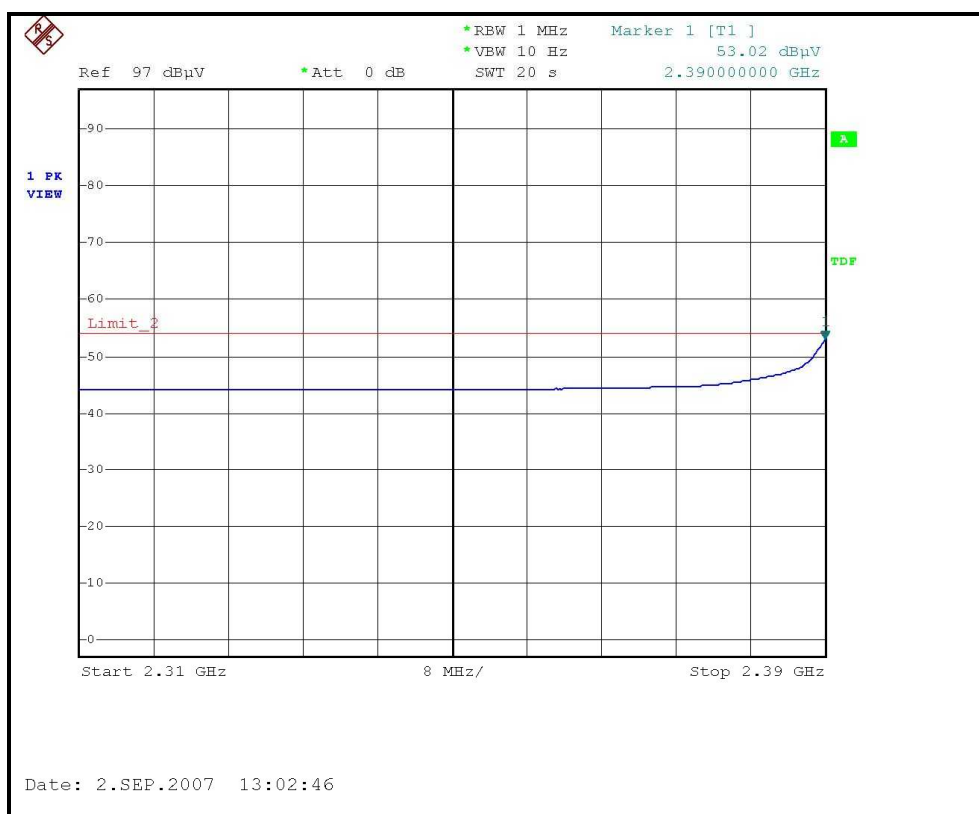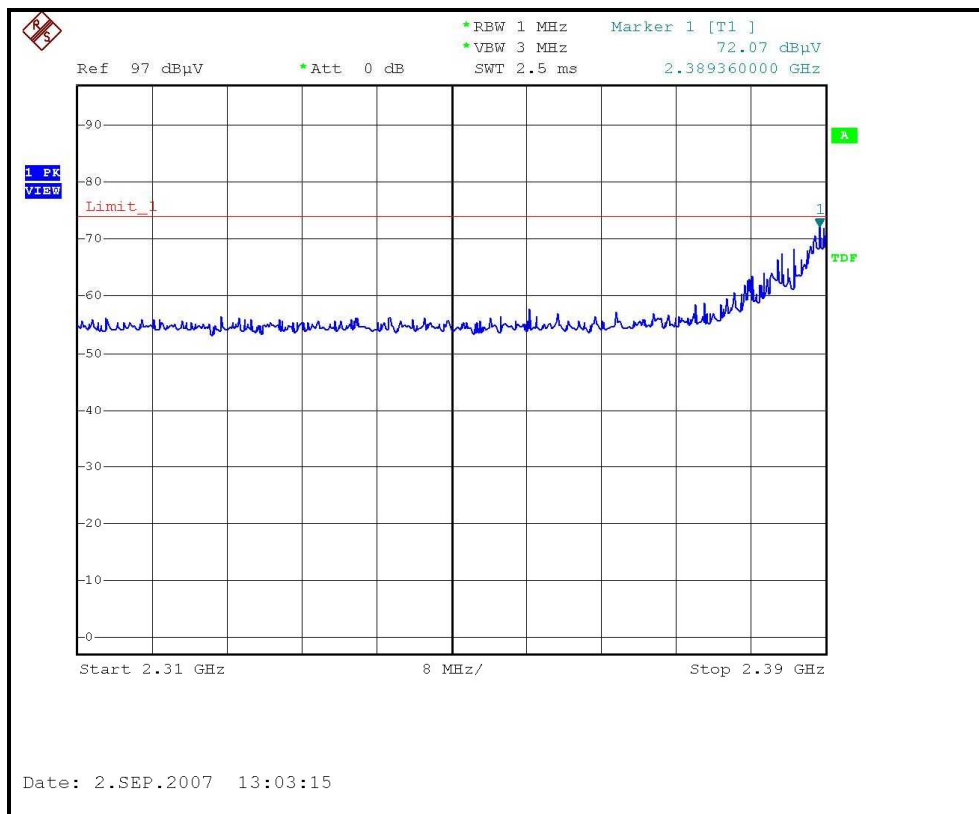

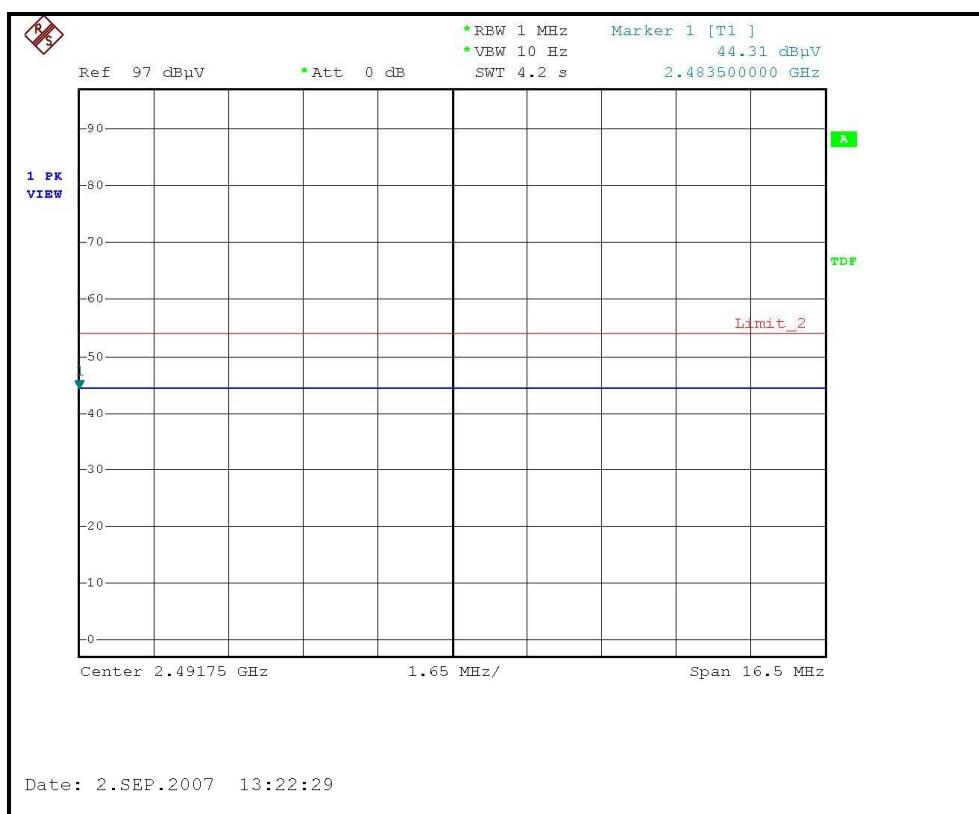

RESTRICTED BANDEDGE (802.11g MODE, CH11, VERTICAL)

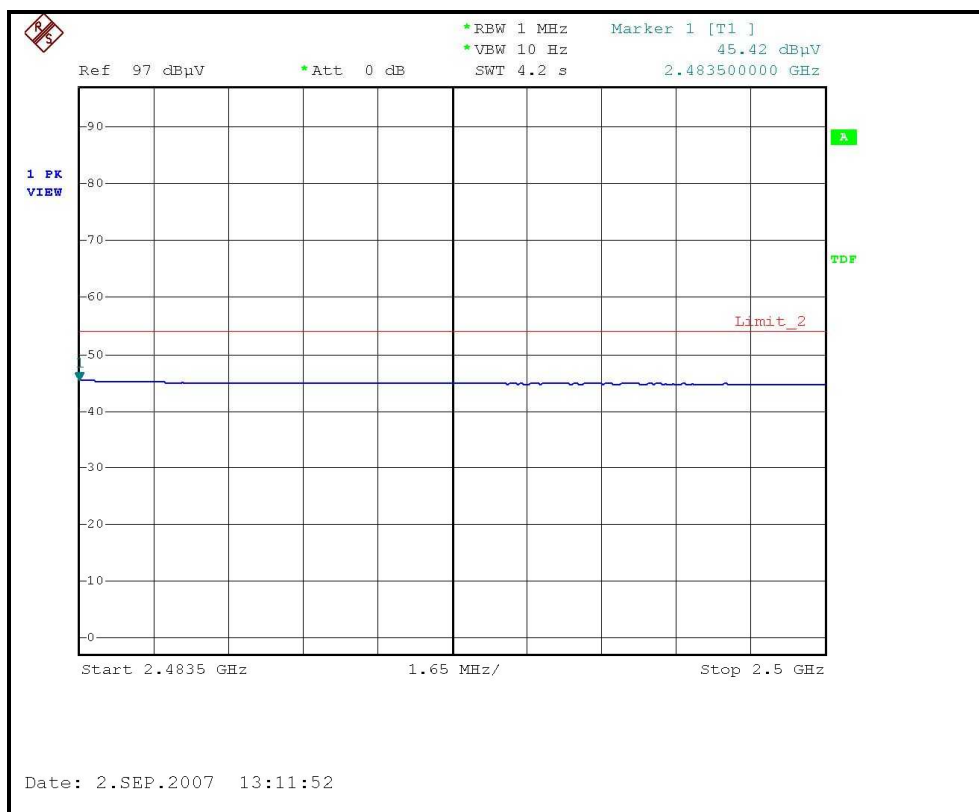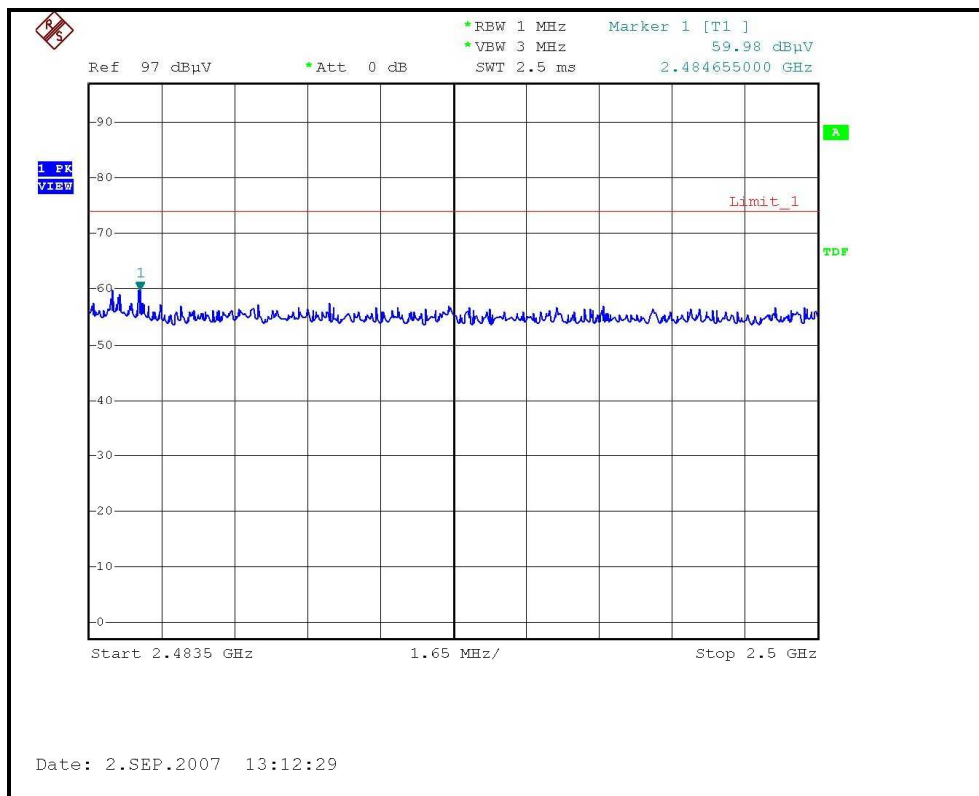

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2007

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.3.5 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.6 TEST RESULTS –DSSS

802.11b DSSS modulation


MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 62%RH, 960hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.65	0.5	PASS
6	2437	13.05	0.5	PASS
11	2462	11.10	0.5	PASS


CH1

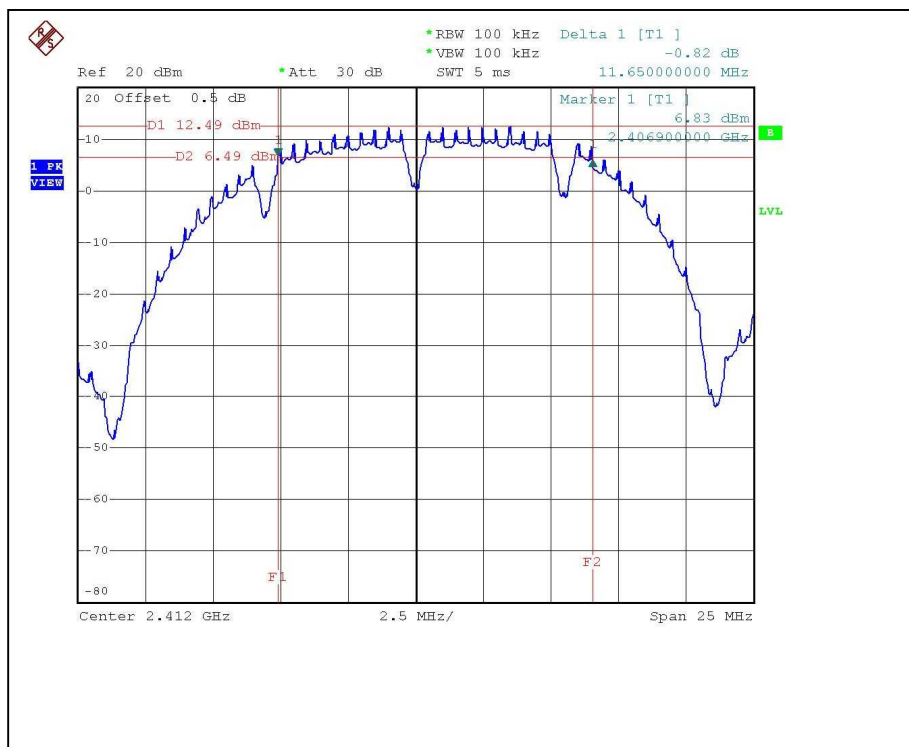

CH6

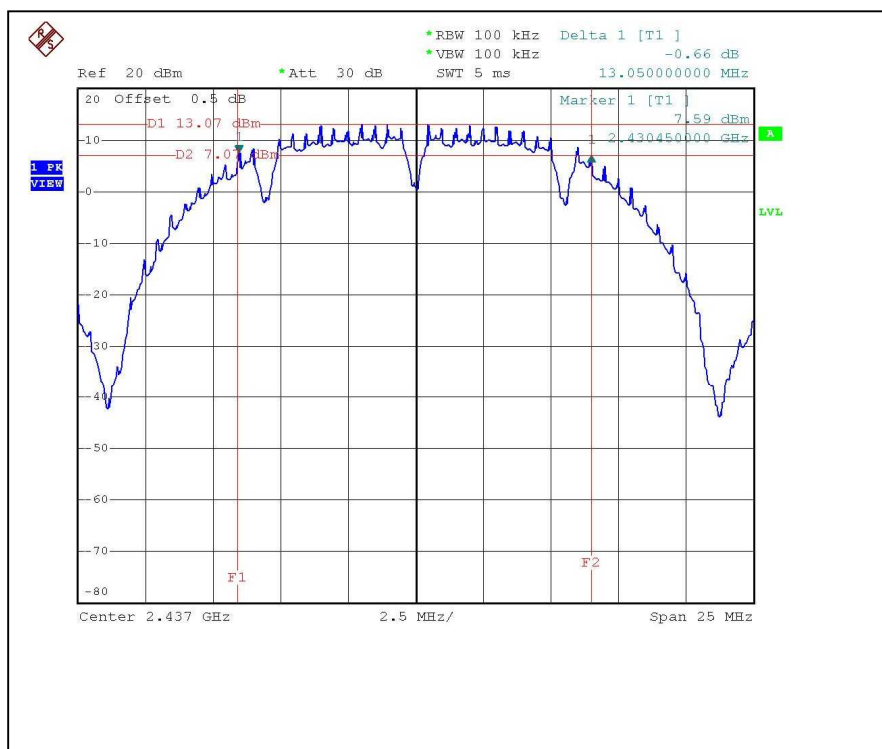

CH11

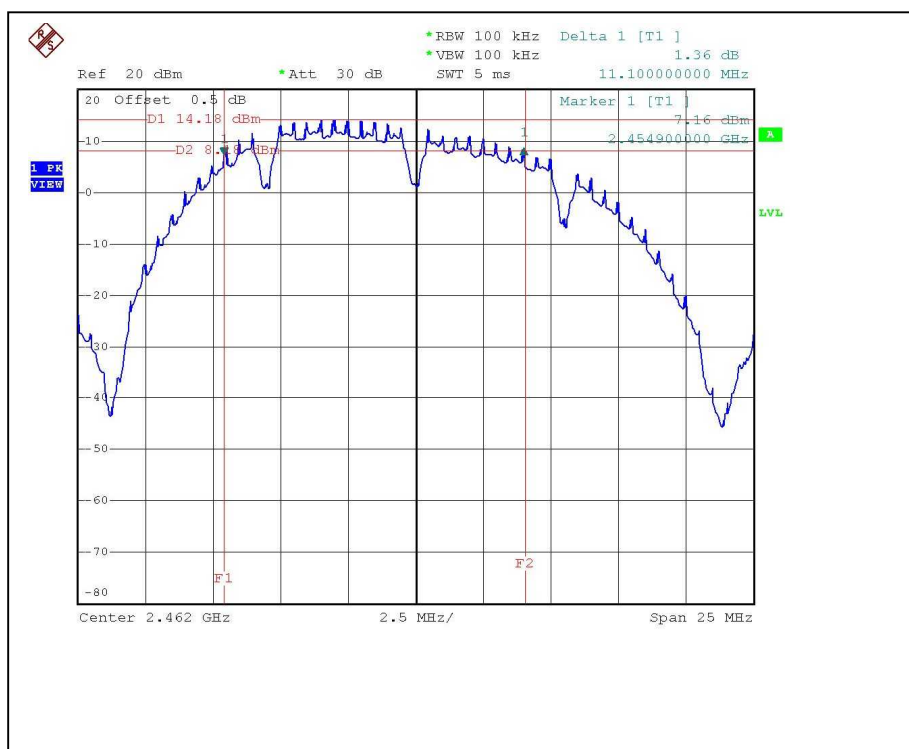


4.3.7 TEST RESULTS-OFDM

802.11g OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 62%RH, 961hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	14.45	0.5	PASS
6	2437	16.45	0.5	PASS
11	2462	11.95	0.5	PASS


CH1

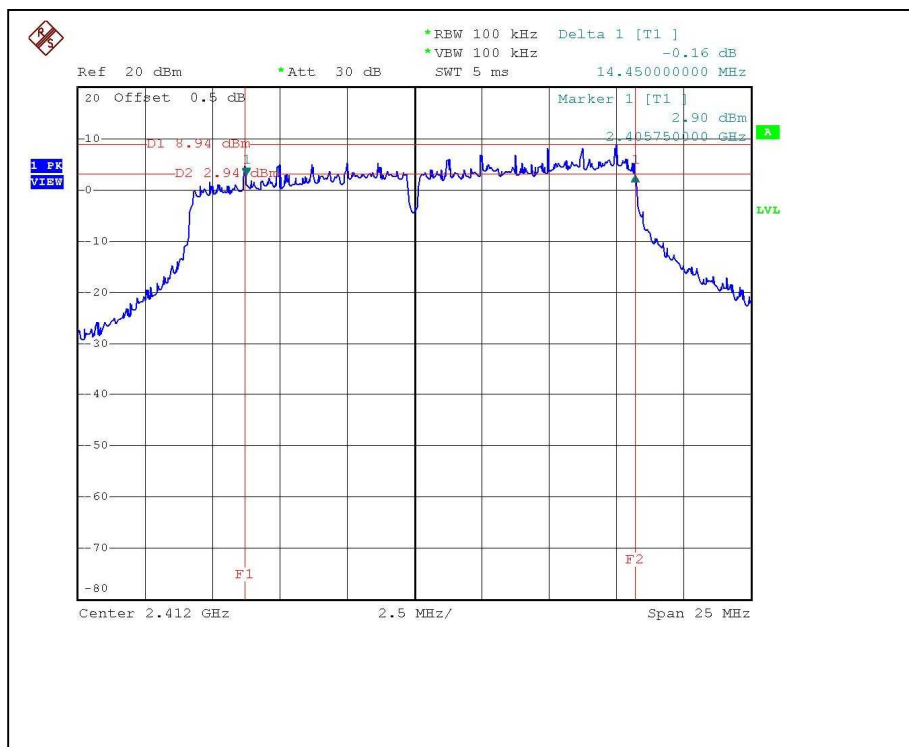

CH6

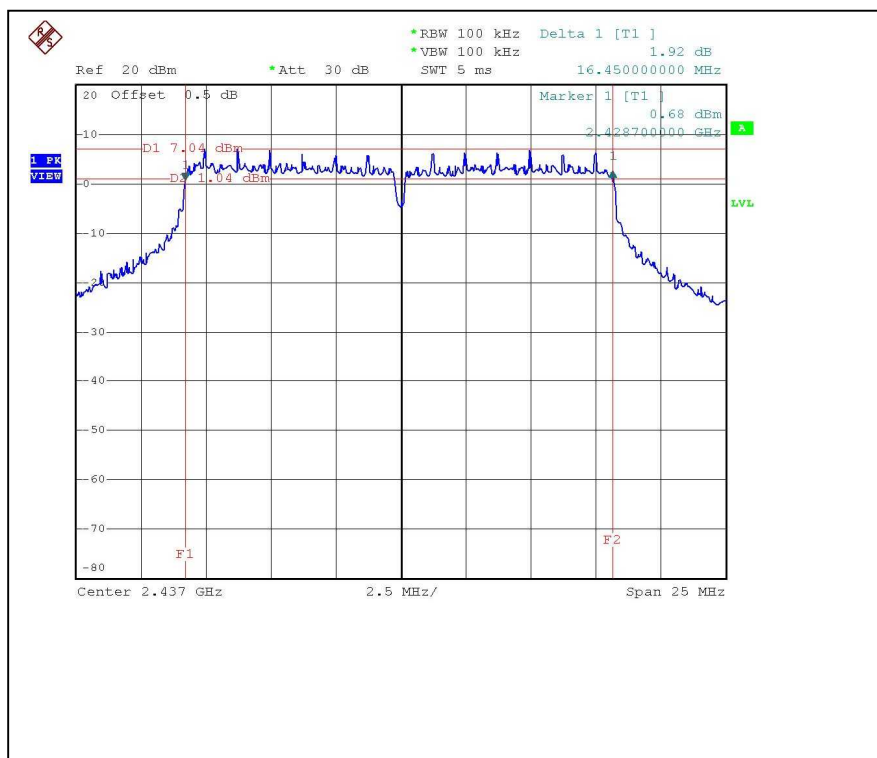

CH11

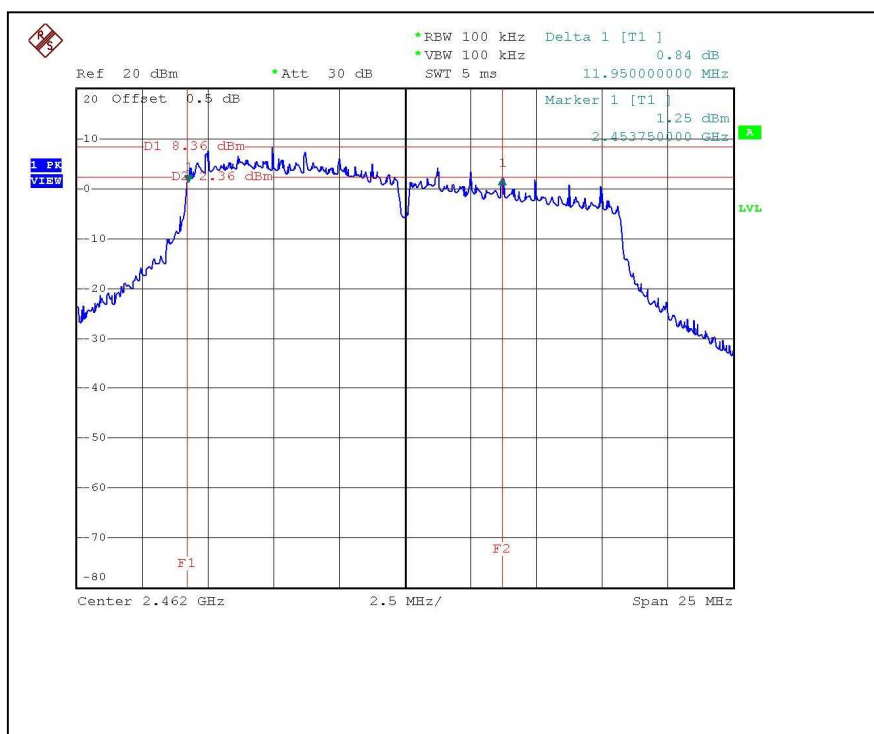

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2007
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 07, 2007
Anritsu MA2491A power sensor	MA2491A	030951	Jun. 18, 2008
Anritsu ML2487A power meter	ML2487A	6K00001472	Jan. 18, 2008


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

A PK sensor was used on the output port of the EUT. A power meter was used to read the peak response of the PK sensor and record the power level.

4.4.4 TEST SETUP



4.4.5 EUT OPERATING CONDITIONS

Same as Item 4.3.5

4.4.6 TEST RESULTS – DSSS

802.11b DSSS modulation

MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 62%RH, 960hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	363.078	25.60	27.7	PASS
6	2437	478.630	26.80	27.7	PASS
11	2462	467.735	26.70	27.7	PASS

4.4.7 TEST RESULTS –OFDM

802.11g OFDM modulation

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 62%RH, 960hPa
TESTED BY	Tony Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	524.807	27.20	27.7	PASS
6	2437	524.807	27.20	27.7	PASS
11	2462	512.861	27.10	27.7	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2007


NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 TEST SETUP



4.5.5 EUT OPERATING CONDITIONS

Same as 4.3.5


4.5.6 TEST RESULTS –DSSS

802.11b DSSS modulation


MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 62%RH, 960hPa
TESTED BY	Tony Chen		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	2.87	8	PASS
6	2437	2.56	8	PASS
11	2462	1.72	8	PASS


CH1

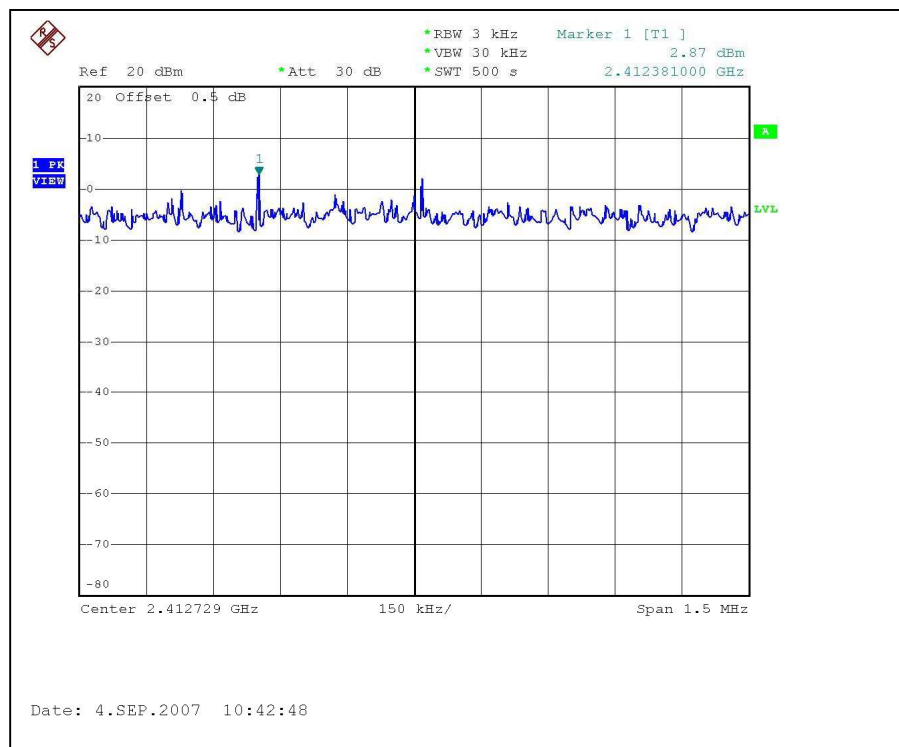

CH6

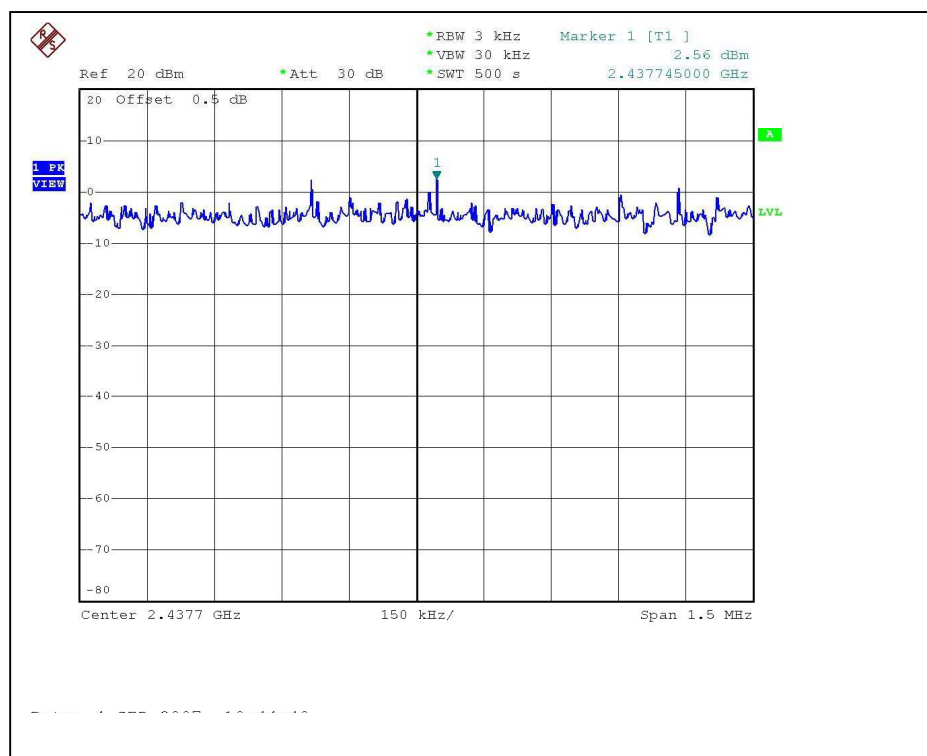

CH11

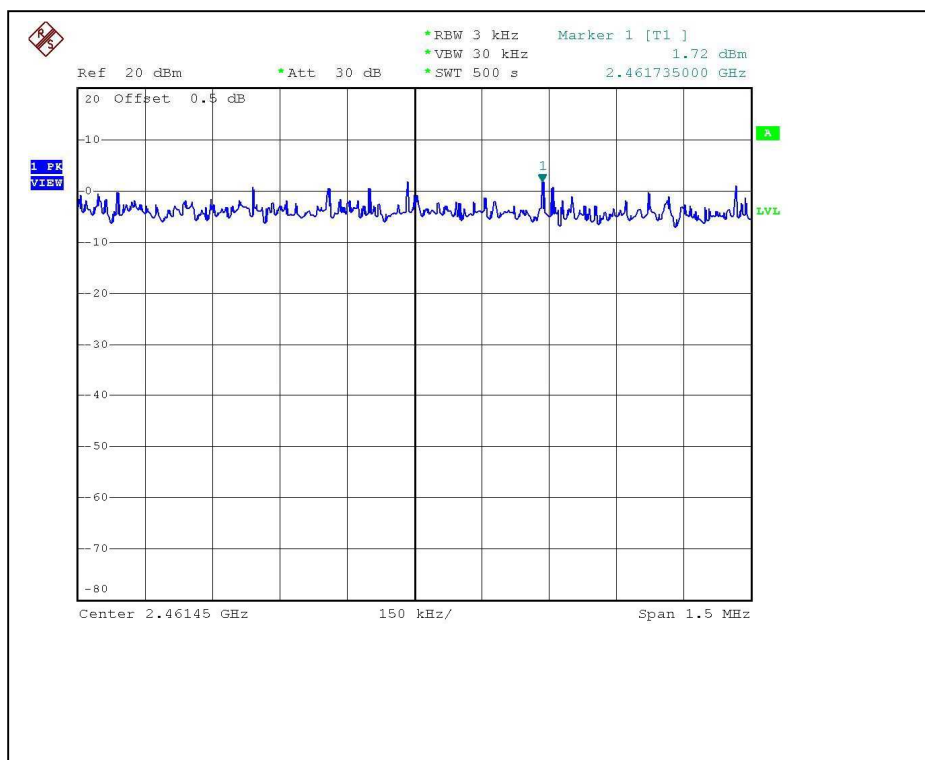


4.5.7 TEST RESULTS –OFDM

802.11g OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	28deg. C, 62%RH, 961hPa
TESTED BY	Tony Chen		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-4.24	8	PASS
6	2437	-5.65	8	PASS
11	2462	-3.90	8	PASS


CH1

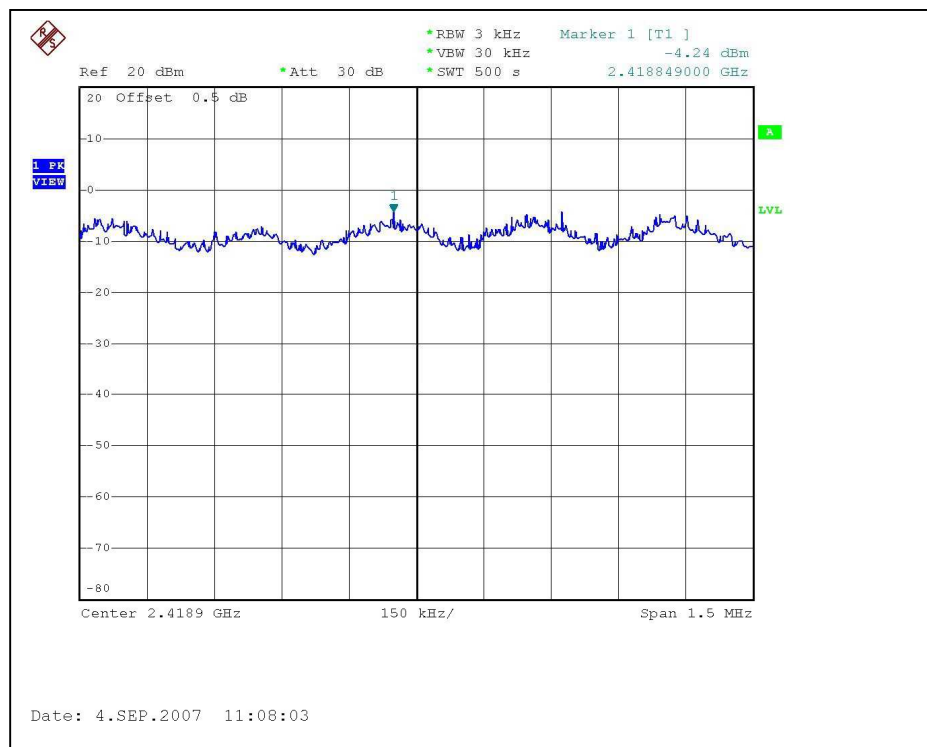

CH6

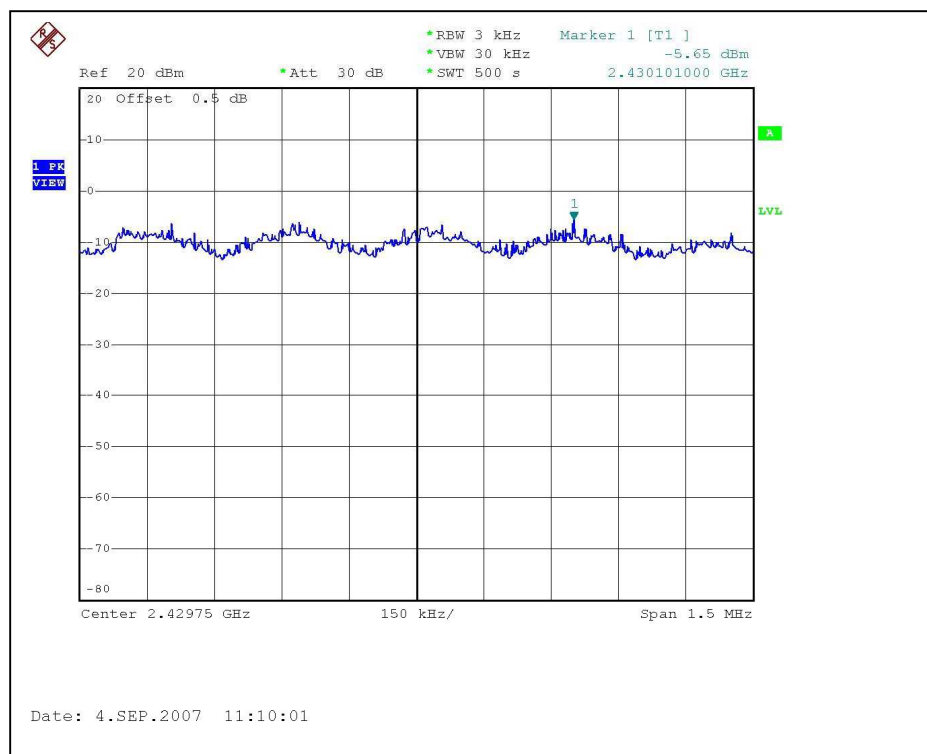

CH11

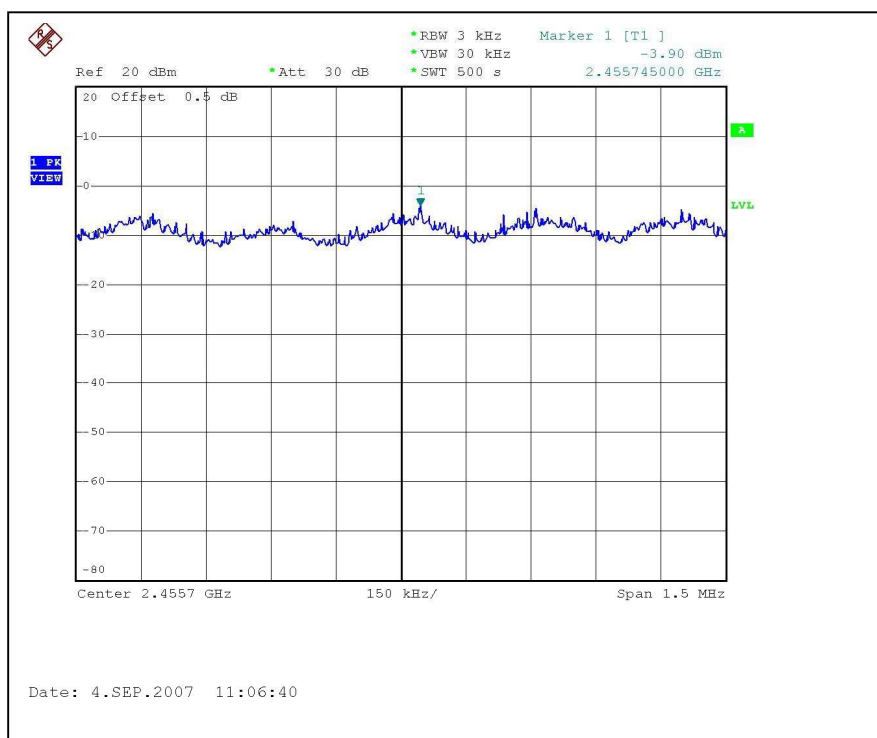

4.6 CONDUCTED EMISSION AND BAND EDGES MEASUREMENT

4.6.1 LIMITS OF CONDUCTED EMISSION AND BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 09, 2007

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges were measured and recorded.

The spectrum plots (RBW = VBW = 100kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.5

4.6.6 TEST RESULTS


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION:


CH1

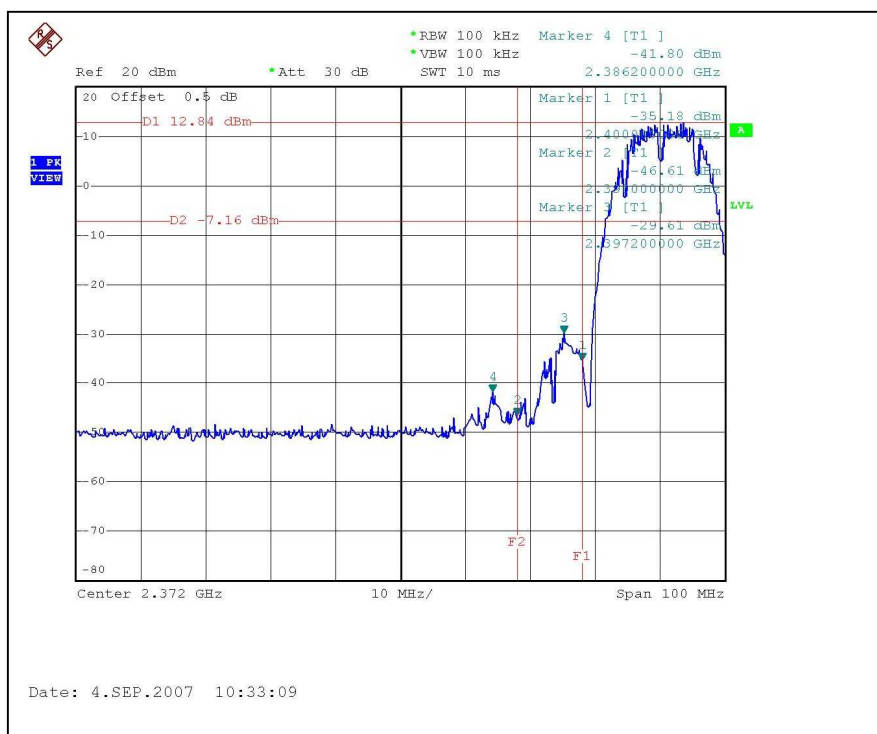


CH11

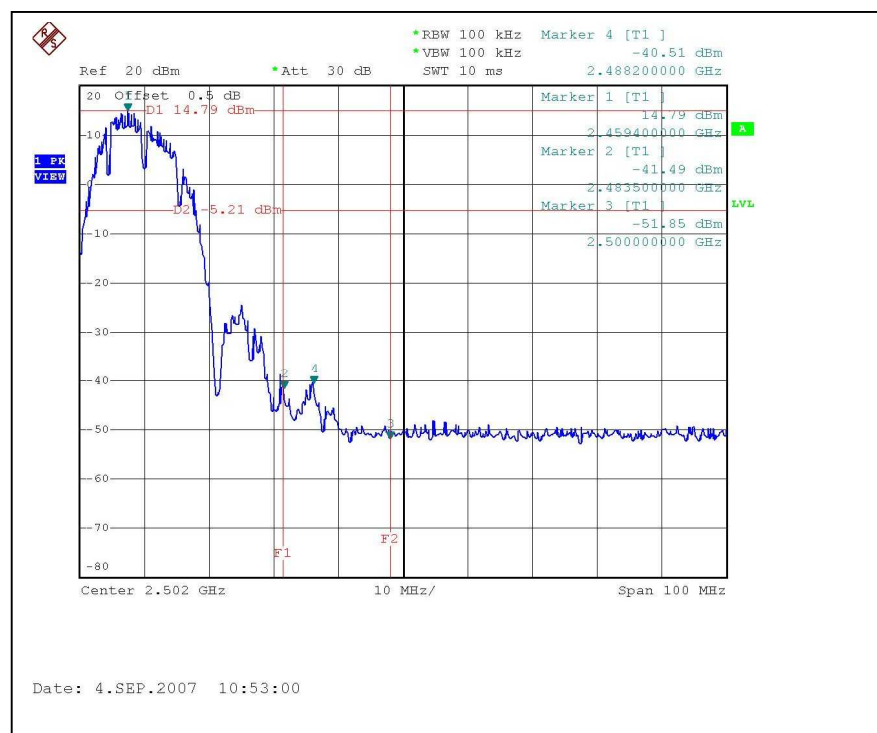


CH1

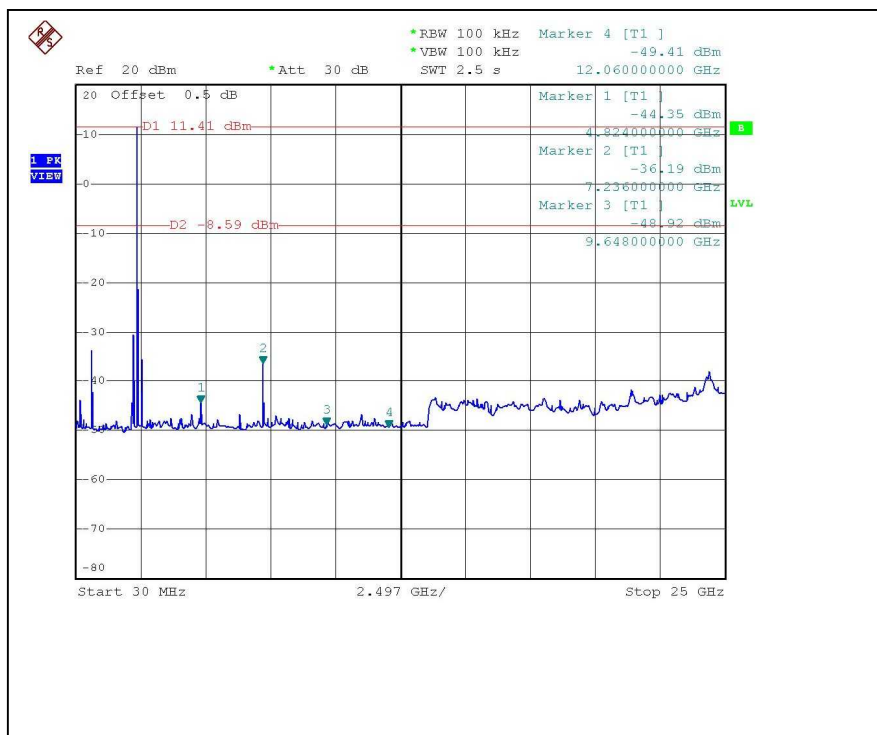


CH11

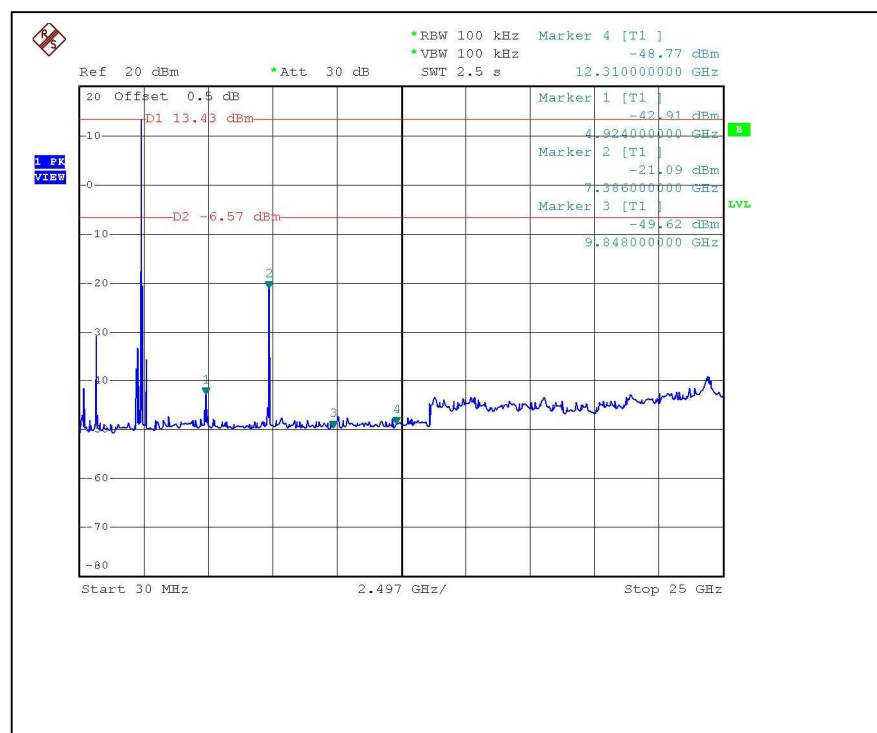


802.11g OFDM MODULATION: CH1

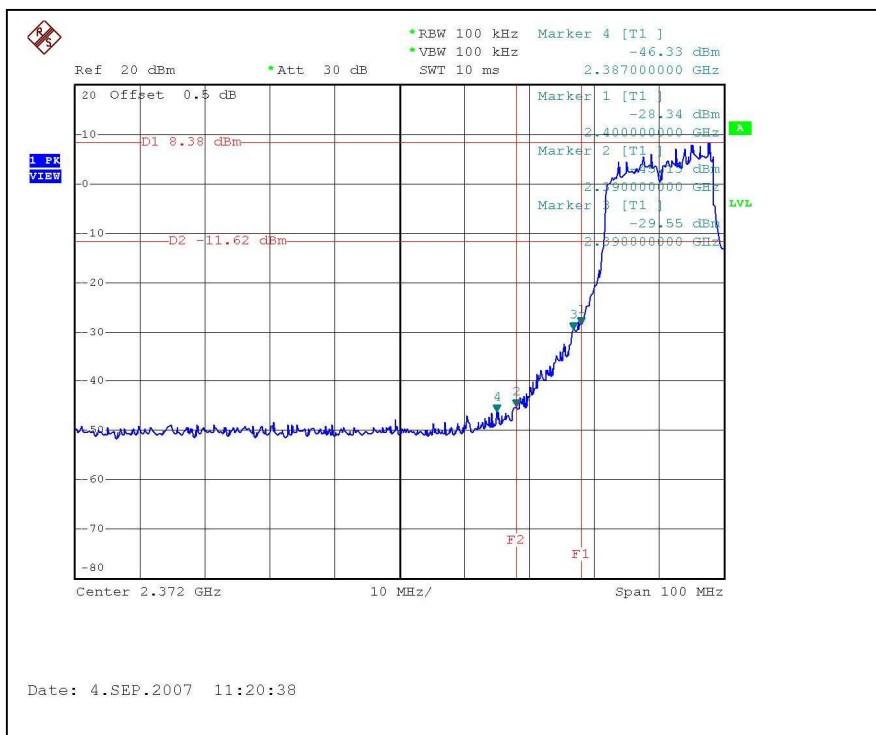


CH11

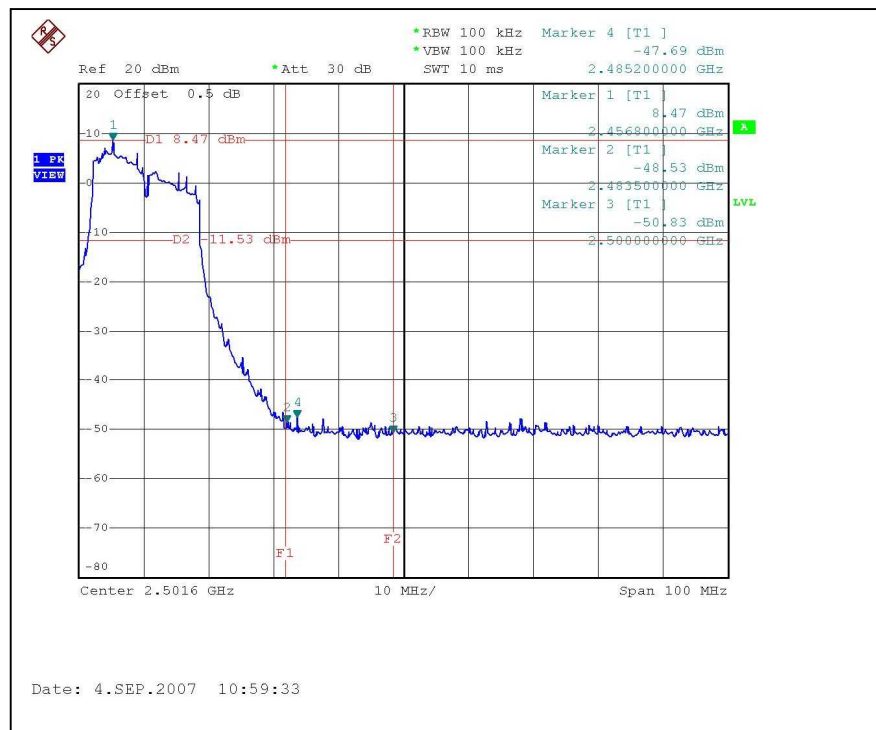

CH1

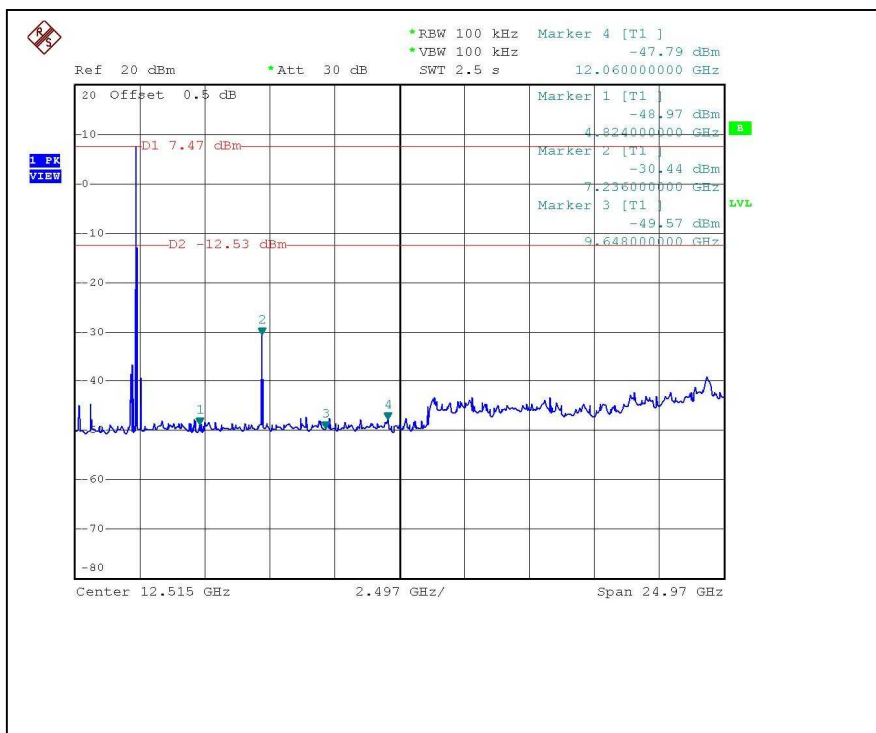

CH11

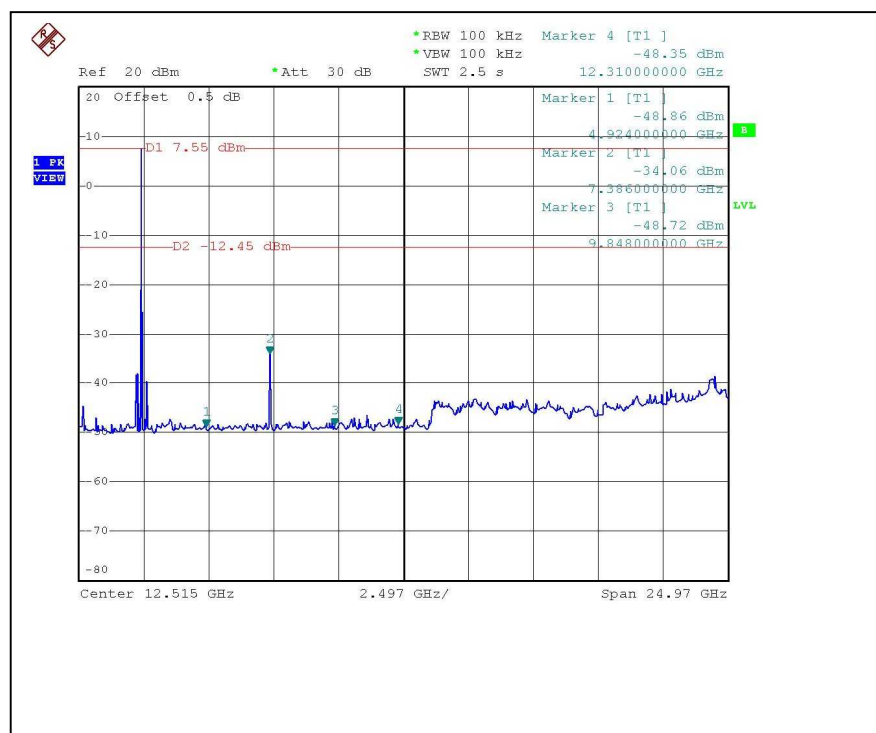

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Directional Patch antenna with Reverse SMA connector. The maximum Gain of the antenna is 13dBi

5 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	PSB, GOST-ASIA (MOU)
Russia	CERTIS (MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.