



TEST REPORT

No. I20D00005-SRD04

For

Client: Micronet

Production: Micronet SmartCam (ENH)

Model Name: Micronet SmartCam

Brand Name: TREQ

FCC ID: U80-A9

IC ID: 12186A-A9

Hardware Version: 1.01

Software Version: OS SW: ver_9.10.x

Issued date: 2020-07-29

NOTE

1. The test results in this test report relate only to the devices specified in this report.
2. This report shall not be reproduced except in full without the written approval of East China Institute of Telecommunications.
3. For the test results, the uncertainty of measurement is not taken into account when judging the compliance with specification, and the results of measurement or the average value of measurement results are taken as the criterion of the compliance with specification directly.

Test Laboratory:

East China Institute of Telecommunications

Add: Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China

Tel: +86 21 63843300

E-Mail: welcome@ecit.org.cn

Revision Version

Report Number	Revision	Date	Memo
I20D00005-SRD04	00	2020-07-29	Initial creation of test report

CONTENTS

1. TEST LABORATORY.....	5
1.1. TESTING LOCATION	5
1.2. TESTING ENVIRONMENT	5
1.3. PROJECT DATA.....	5
1.4. SIGNATURE	5
2. CLIENT INFORMATION.....	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. TEST RESULTS	9
5.1. SUMMARY OF TEST RESULTS.....	9
5.2. STATEMENTS	9
6. TEST EQUIPMENTS UTILIZED	10
6.1. RADIATED EMISSION TEST SYSTEM.....	10
7. MEASUREMENT UNCERTAINTY.....	11
8. TEST ENVIRONMENT.....	12
ANNEX A. DETAILED TEST RESULTS.....	13
ANNEX A.1 EMISSION LIMIT	13
ANNEX A. ACCREDITATION CERTIFICATE	33

1. Test Laboratory

1.1. Testing Location

Company Name	East China Institute of Telecommunications
Address	Block No.4, No.766, Jingang Road, Pudong District, Shanghai, P. R. China
Postal Code	201206
Telephone	+86 21 63843300
FCC registration No	CN1177

1.2. Testing Environment

Normal Temperature	15°C-35°C
Relative Humidity	20%-75%

1.3. Project Data

Project Leader	Zhou Yan
Testing Start Date	2020-04-01
Testing End Date	2020-04-02


1.4. Signature



Liu Yan
(Prepared this test report)



Fan Songyan
(Reviewed this test report)



Zheng Zhongbin
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name	Micronet
Address	1865 West 2100 South, Suite 2Salt Lake City, Utah 84119 United States
Telephone	+1-801-990-8700
Postcode	84119

2.2. Manufacturer Information

Company Name	Micronet
Address	1865 West 2100 South, Suite 2Salt Lake City, Utah 84119 United States
Telephone	+1-801-990-8700
Postcode	84119

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Production	Micronet SmartCam (ENH)
Model name	Micronet SmartCam
GSM Frequency Band	GSM850/GSM900/GSM1800/GSM1900
UMTS Frequency Band	Band I/II/IV/V/VIII
CDMA Frequency Band	NA
LTE Frequency Band	Band 1/2/3/4/5/7/8/12/13/17/20/28
Additional Communication Function	BT/BLE/2.4G WLAN 802.11 b/g/n20/n40/5G WLAN 802.11 a20/n20/n40/ac20/ac40
Extreme Temperature	-20/+70°C
Nominal Voltage	12/24V
Extreme High Voltage	32V
Extreme Low Voltage	8V

Note:

- Photographs of EUT are shown in ANNEX A of this test report.
- The value of the antenna gain is provided by the customer. For specific antenna information, please check the antenna specifications of the customer.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N01	/	1.01	OS SW: ver_9.10.x	2020-01-08

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	Manufacturer
AE1	RF cable	---	AE1

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

All technical documents are supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 2	FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS	2018-10-01
FCC Part 22	PUBLIC MOBILE SERVICES	2018-10-01
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	2018-10-01
ANSI-TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard of Procedures for Compliance Testing of Licensed Transmitters Used in Licensed Radio	2015
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v03r01
RSS-Gen	RSS-Gen —General Requirements for Compliance of Radio Apparatus	2019-03
RSS-132	Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz	2013-10
RSS-133	2 GHz Personal Communications Services	2018-01

5. Test Results

5.1. Summary of Test Results

Measurement Items	Sub-clause of Part15	Sub-clause of IC	Verdict
Emission Limit	2.1051/22.917/24.23 8/22.913/24.232	RSS-132 5.5/ RSS-133 6.5	P

Note: please refer to Annex A in this test report for the detailed test results.

The following terms are used in the above table.

P	Pass, the EUT complies with the essential requirements in the standard.
NP	Not Perform, the test was not performed by ECIT.
NA	Not Applicable, the test was not applicable.
F	Fail, the EUT does not comply with the essential requirements in the standard.

5.2. Statements

The Micronet SmartCam is a new model for testing.

ECIT only performed test cases which identified with Pass/Fail/Inc result in section 5.1.

In this report, we only retest and report the radiation test data. And the conduct test results please refer to report No: I19D00117-SRD04-2G&3G, which was prepared by East China Institute of Telecommunications.

ECIT has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

6. Test Equipments Utilized

6.1. Radiated Emission Test System

The test equipment and ancillaries used are as follows.

No.	Equipment	Model	SN	Manufacturer	Cal.date	Cal.interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2019-05-10	1 year
2	EMI Test Receiver	ESU40	100307	R&S	2019-05-10	1 year
3	TRILOG Broadband Antenna	VULB916 3	VULB916 3-515	Schwarzbeck	2020-02-28	2 years
4	Double- ridged Waveguide Antenna	ETS- 3117	0013589 0	ETS	2020-02-28	2 years
5	2-Line V-Network	ENV216	101380	R&S	2019-05-10	1 year
6	RF Signal Generator	SMF100 A	102314	R&S	2019-05-10	1 year
7	Amplifier	SCU08	10146	R&S	2019-05-10	1 year

Anechoic chamber

Fully anechoic chamber by ETS.

7. Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in ECIT documents .

The detailed measurement uncertainty is defined in ECIT documents.

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Maximum Peak Output Power	30MHz-3600MHz	95%	$\pm 0.544\text{dB}$
EBW and VBW	30MHz-3600MHz	95%	$\pm 62.04\text{Hz}$
Transmitter Spurious Emission-Conducted	30MHz-2GHz	95%	$\pm 0.90\text{dB}$
Transmitter Spurious Emission-Conducted	2GHz-3.6GHz	95%	$\pm 0.88\text{dB}$
Transmitter Spurious Emission-Conducted	3.6GHz-8GHz	95%	$\pm 0.96\text{dB}$
Transmitter Spurious Emission-Conducted	8GHz-20GHz	95%	$\pm 0.94\text{dB}$
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	$\pm 5.66\text{dB}$
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	$\pm 4.98\text{dB}$
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	$\pm 5.06\text{dB}$
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	$\pm 5.20\text{dB}$
Frequency stability	1MHz-16GHz	95%	$\pm 62.04\text{Hz}$

8. Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

ANNEX A. Detailed Test Results

ANNEX A.1 EMISSION LIMIT


A.8.1.1 GSM Measurement Method

The measurement procedures in TIA-603E-2016 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850.


A.8.1.2 The procedure of radiated spurious emissions is as follows:

1. Below 1 GHz ,EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. Above 1 GHz ,EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna.EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10thharmonic were measured with peak detector.

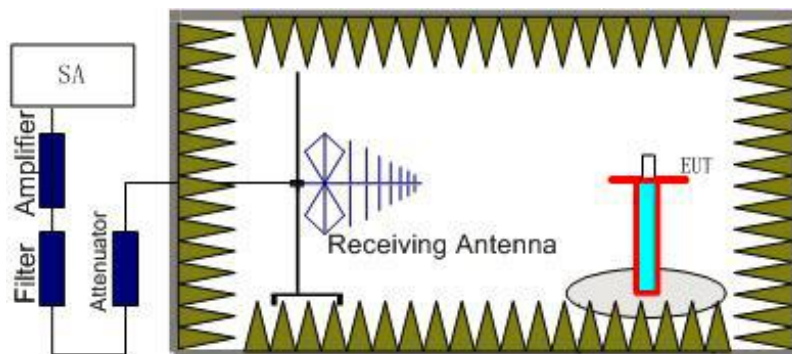

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).

3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

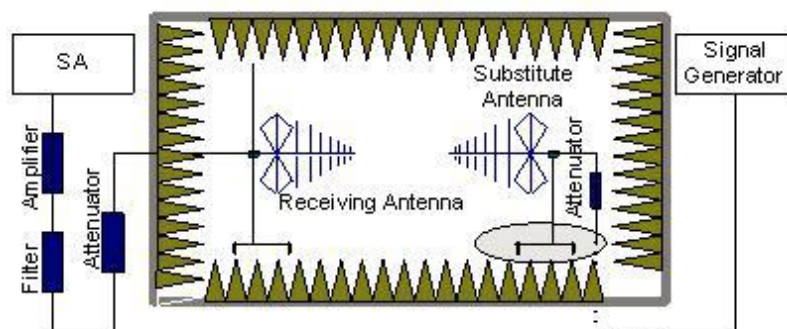

In the chamber, an substitution antenna for the frequency band of interest is placed at the

reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss .

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

1. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$

A.8.1.3 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.1.4 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.8.1.5 Measurement Results

Measurements results:

Frequency	Channel	Frequency Range	Result
GSM850	Low	30MHz~10GHz	P
	Middle	30MHz~10GHz	P
	High	30MHz~10GHz	P
GSM1900	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P

This data is obtained by testing at 12V

GSM850
GSM Mode Channel 128
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1647.9	-27.9	4.3	2.9	-29.3	-13	H
2472.9	-32.62	5.3	3.7	-34.22	-13	H
3296.5	-47.46	6.2	4.7	-48.96	-13	H
4121.5	-42.85	7.0	7.7	-42.15	-13	H
4986.9	-48.13	7.8	9.0	-46.93	-13	V
5769.2	-47.94	8.5	10.5	-45.94	-13	V

GSM Mode Channel 189
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1672.5	-32.25	4.3	2.9	-33.65	-13	H
2510.4	-33.48	5.4	3.7	-35.18	-13	H
3346.2	-47.36	6.2	4.7	-48.86	-13	V
4183.8	-48.5	7.0	7.7	-47.8	-13	V
5173.8	-50.31	7.9	8.7	-49.51	-13	V
6001.5	-49.83	8.6	10.4	-48.03	-13	H

GSM Mode Channel 251
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1698.2	-37.01	4.4	2.9	-38.51	-13	H
2613.2	-35.01	5.5	3.7	-36.81	-13	V
3394.6	-49.22	6.3	4.7	-50.82	-13	H
4453.8	-51.53	7.3	7.3	-51.53	-13	H
5364.2	-49.83	8.1	8.7	-49.23	-13	V
6255.4	-51.05	8.8	10.8	-49.05	-13	H

GPRS Mode Channel 128
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1647.9	-28.17	4.3	2.9	-29.57	-13	H
2471.8	-32.9	5.3	3.7	-34.5	-13	H
3295.4	-45.9	6.2	4.7	-47.4	-13	H
4120.4	-43.32	7.0	7.7	-42.62	-13	H
4998.5	-43.43	7.8	9.0	-42.23	-13	H
5770.4	-47.9	8.5	10.5	-45.9	-13	V

GPRS Mode Channel 189
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1673.6	-31.84	4.3	2.9	-33.24	-13	H
2509.3	-35.29	5.4	3.7	-36.99	-13	H
3346.2	-45.28	6.2	4.7	-46.78	-13	H
4181.5	-49.6	7.0	7.7	-48.9	-13	V
5105.8	-50.48	7.9	9.0	-49.38	-13	V
5991.9	-50.76	8.6	10.4	-48.96	-13	H

GPRS Mode Channel 251
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1697.1	-38.3	4.4	2.9	-39.8	-13	V
2546.8	-35.12	5.4	3.7	-36.82	-13	V
3393.5	-49.29	6.3	4.7	-50.89	-13	V
4217.3	-51.79	7.0	7.7	-51.09	-13	H
4977.7	-47.2	7.8	9.0	-46	-13	H
5708.1	-51.55	8.5	10.5	-49.55	-13	H

EGPRS Mode Channel 128
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1647.9	-28.13	4.3	2.9	-29.53	-13	H
2472.9	-32.63	5.3	3.7	-34.23	-13	V
3296.5	-45.67	6.2	4.7	-47.17	-13	H
4120.4	-40.18	7.0	7.7	-39.48	-13	H
4992.7	-44.46	7.8	9.0	-43.26	-13	H
5770.4	-47.52	8.5	10.5	-45.52	-13	V

EGPRS Mode Channel 189
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1672.5	-36.79	4.3	2.9	-38.19	-13	V
2603.6	-35.2	5.5	3.7	-37	-13	V
3346.2	-47.13	6.2	4.7	-48.63	-13	H
4182.7	-51.33	7.0	7.7	-50.63	-13	H
4985.8	-43.68	7.8	9.0	-42.48	-13	H
5995.4	-49.33	8.6	10.4	-47.53	-13	V

EGPRS Mode Channel 251
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1698.2	-43.26	4.4	2.9	-44.76	-13	V
2482.5	-36.54	5.3	3.7	-38.14	-13	V
3162.7	-53.14	6.0	4.7	-54.44	-13	H
3965.8	-53.08	6.8	7.7	-52.18	-13	H
4986.9	-44.73	7.8	9.0	-43.53	-13	H
5889.2	-51.99	8.5	10.4	-50.09	-13	V

GSM1900
GSM Mode Channel 512
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3700.2	-44.6	6.6	7.7	-43.5	-13	V
5550.0	-52.23	8.2	9.5	-50.93	-13	V
7400.4	-46.05	9.7	14.6	-41.15	-13	V
9250.8	-54.9	10.6	18.5	-47	-13	H
10964.4	-49.23	12.0	18.1	-43.13	-13	H
12789.6	-45.95	12.5	19.2	-39.25	-13	V

GSM Mode Channel 661
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3760.2	-50.8	6.6	7.7	-49.7	-13	V
5641.2	-50.01	8.3	10.5	-47.81	-13	V
7519.2	-46.33	9.7	14.6	-41.43	-13	V
9512.4	-54.16	10.7	18.6	-46.26	-13	V
11518.8	-48.28	12.3	18.1	-42.48	-13	V
13446.0	-48.91	13.7	23.4	-39.21	-13	H

GSM Mode Channel 810
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3819.6	-55.13	6.7	7.7	-54.13	-13	V
5730.0	-43.17	8.5	10.5	-41.17	-13	V
7638.0	-51.47	9.7	15.3	-45.87	-13	V
9472.8	-54.25	10.7	18.6	-46.35	-13	V
11202.0	-49.9	12.1	18.5	-43.5	-13	H
13140.0	-47.28	13.0	21.8	-38.48	-13	V

GPRS Mode Channel 512
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3700.2	-46.83	6.6	7.7	-45.73	-13	V
5551.2	-52.77	8.2	9.5	-51.47	-13	V
7400.4	-49.61	9.7	14.6	-44.71	-13	V
9250.8	-53.4	10.6	18.5	-45.5	-13	V
11198.4	-49.9	12.1	18.5	-43.5	-13	H
12772.8	-46.19	12.7	19.2	-39.69	-13	V

GPRS Mode Channel 661
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3760.2	-52.33	6.6	7.7	-51.23	-13	V
5640.6	-47.11	8.3	10.5	-44.91	-13	V
7520.4	-46.88	9.7	14.6	-41.98	-13	V
9442.8	-54.53	10.7	18.6	-46.63	-13	V
11226.0	-49.09	12.1	18.5	-42.69	-13	H
12778.8	-46.02	12.5	19.2	-39.32	-13	V

GPRS Mode Channel 810
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3819.0	-52.98	6.7	7.7	-51.98	-13	V
5729.4	-43.44	8.5	10.5	-41.44	-13	V
7638.0	-50.79	9.7	15.3	-45.19	-13	V
9514.8	-53.97	10.7	18.6	-46.07	-13	V
11232.0	-49.4	12.1	18.5	-43	-13	H
13765.2	-48.75	13.9	24.8	-37.85	-13	H

EGPRS Mode Channel 512
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3700.2	-56.05	6.6	7.7	-54.95	-13	H
5821.2	-54.65	8.4	10.5	-52.55	-13	H
7710.0	-53.96	9.8	15.3	-48.46	-13	V
9543.6	-53.68	10.7	18.6	-45.78	-13	V
11256.0	-49.55	12.1	18.5	-43.15	-13	H
12868.8	-45.09	13.0	19.2	-38.89	-13	V

EGPRS Mode Channel 661
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3759.6	-55.71	6.6	7.7	-54.61	-13	V
5640.0	-53.48	8.3	10.5	-51.28	-13	H
7678.8	-53.69	9.8	15.3	-48.19	-13	V
9500.4	-54.04	10.7	18.6	-46.14	-13	V
10952.4	-48.72	12.0	18.1	-42.62	-13	H
12468.0	-47.24	12.7	18.7	-41.24	-13	H

EGPRS Mode Channel 810
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3822.0	-56.54	6.7	7.7	-55.54	-13	H
5730.0	-52.35	8.5	10.5	-50.35	-13	V
7543.2	-53.66	9.7	14.6	-48.76	-13	V
9561.6	-54.34	10.8	18.6	-46.54	-13	V
11011.2	-48.63	12.0	18.1	-42.53	-13	H
13012.8	-47.73	13.2	20.2	-40.73	-13	H

This data is obtained by testing at 24V
GSM850
GSM Mode Channel 128
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1697.1	-36.04	4.4	2.9	-37.54	-13	H
2558.6	-36.43	5.4	3.7	-38.13	-13	H
3394.6	-48.45	6.3	4.7	-50.05	-13	V
4243.8	-48.98	7.1	7.7	-48.38	-13	V
5074.6	-49.96	7.8	9.0	-48.76	-13	V
5904.2	-52.04	8.5	10.4	-50.14	-13	V

GSM Mode Channel 189
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1698.2	-35.7	4.4	2.9	-37.2	-13	V
2552.1	-36.5	5.4	3.7	-38.2	-13	V
3394.6	-47.81	6.3	4.7	-49.41	-13	V
4243.8	-50.76	7.1	7.7	-50.16	-13	V
5105.8	-50.7	7.9	9.0	-49.6	-13	H
5982.7	-50.42	8.6	10.4	-48.62	-13	V

GSM Mode Channel 251
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1698.2	-42.27	4.4	2.9	-43.77	-13	H
2546.8	-35.16	5.4	3.7	-36.86	-13	V
3395.8	-50.17	6.3	4.7	-51.77	-13	H
4225.4	-52.66	7.1	7.7	-52.06	-13	V
5093.1	-50.03	7.9	9.0	-48.93	-13	H
5899.6	-51.92	8.5	10.4	-50.02	-13	V

Note: the EUT was displayed in several different direction, the worst cases were shown.

A.8.2 WCDMA Measurement Method

The measurements procedures in TIA-603E-2016 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917.

The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band V.

The procedure of radiated spurious emissions is the same like GSM.

A.8.2.1 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.2.2 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the WCDMA Band V (826.4MHz, 836.6MHz and 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band V into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.8.2.3 Measurement Results Table

Frequency	Channel	Frequency Range	Result
WCDMA Band II	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P
WCDMA Band IV	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P
WCDMA Band V	Low	30MHz~20GHz	P
	Middle	30MHz~20GHz	P
	High	30MHz~20GHz	P

This data is obtained by testing at 12V

WCDMA BAND II Mode Channel 9262

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3755.6	-64.75	6.6	7.7	-63.65	-13	H
4705.6	-61.47	7.5	7.9	-61.07	-13	H
5554.0	-52.95	8.2	9.5	-51.65	-13	V
6590.8	-60.64	9.1	11.5	-58.24	-13	H
7406.8	-56.52	9.7	14.6	-51.62	-13	V
9258.4	-60.61	10.6	18.5	-52.71	-13	H

WCDMA BAND II Mode Channel 9400

Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3762.0	-64.77	6.6	7.7	-63.67	-13	V
4712.8	-60.91	7.5	7.9	-60.51	-13	V
5636.8	-49.77	8.3	10.5	-47.57	-13	V
6583.2	-60.99	9.1	11.5	-58.59	-13	V
7520.8	-52.77	9.7	14.6	-47.87	-13	V
9395.6	-59.21	10.7	18.6	-51.31	-13	H

WCDMA BAND II Mode Channel 9538
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3790.8	-64.12	6.7	7.7	-63.12	-13	V
4724.4	-60.41	7.5	7.9	-60.01	-13	V
5724.8	-49.57	8.5	10.5	-47.57	-13	V
6578.8	-61.58	9.1	11.5	-59.18	-13	V
7633.6	-52.85	9.7	15.3	-47.25	-13	V
9534.4	-57.56	10.7	18.6	-49.66	-13	V
3790.8	-64.12	6.7	7.7	-63.12	-13	V

WCDMA BAND IV Mode Channel 1312
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3423.2	-61.84	6.3	4.7	-63.44	-13	H
5139.6	-54.53	7.9	8.7	-53.73	-13	V
6853.2	-46.71	9.2	12.3	-43.61	-13	V
7691.6	-60.69	9.8	15.3	-55.19	-13	H
8566.0	-56.4	10.3	18.1	-48.6	-13	V
10458.4	-58.9	11.6	17.1	-53.4	-13	H

WCDMA BAND IV Mode Channel 1413
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3621.2	-60.37	6.5	4.7	-62.17	-13	V
5200.4	-57.9	8.0	8.7	-57.2	-13	H
6935.6	-50.87	9.3	12.9	-47.27	-13	V
8661.6	-58.8	10.3	18.5	-50.6	-13	V
10668.8	-58.24	11.7	17.3	-52.64	-13	V
12718.2	-54.68	12.7	19.2	-48.18	-13	H

WCDMA BAND IV Mode Channel 1513
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
4499.2	-60.14	7.3	7.3	-60.14	-13	V
5254.0	-52.37	8.0	8.7	-51.67	-13	H
7014.4	-48.06	9.3	12.9	-44.46	-13	V
8285.2	-63.26	10.1	17.3	-56.06	-13	H
8767.2	-60.03	10.4	18.5	-51.93	-13	V
9905.6	-60.89	11.0	17.6	-54.29	-13	V

WCDMA BAND V Mode Channel 4132
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1654.6	-56.69	4.3	2.9	-58.09	-13	V
3310.0	-60.8	6.2	4.7	-62.3	-13	H
4136.4	-61.54	7.0	7.7	-60.84	-13	H
4965.6	-59.98	7.7	9.0	-58.68	-13	V
6616.4	-61.34	9.1	11.5	-58.94	-13	V
8188.0	-63.84	10.1	17.3	-56.64	-13	H

WCDMA BAND V Mode Channel 4183
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1675.0	-56.96	4.3	2.9	-58.36	-13	V
3343.2	-57.73	6.2	4.7	-59.23	-13	H
4179.2	-60.43	7.0	7.7	-59.73	-13	V
5080.4	-61.38	7.9	9.0	-60.28	-13	V
6956.4	-60.11	9.3	12.9	-56.51	-13	V
8306.2	-64.14	10.1	17.3	-56.94	-13	V

WCDMA BAND V Mode Channel 4233
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
1692.1	-57.26	4.4	2.9	-58.76	-13	V
2477.7	-50.75	5.3	3.7	-52.35	-13	V
3389.2	-53.54	6.3	4.7	-55.14	-13	H
5079.6	-60.66	7.9	9.0	-59.56	-13	V
6738.4	-62.33	9.2	12.3	-59.23	-13	H
8679.4	-64.57	10.4	18.5	-56.47	-13	H

This data is obtained by testing at 24V

WCDMA BAND IV Mode Channel 1312
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3611.2	-61.04	6.5	4.7	-62.84	-13	V
5134.0	-56.16	7.9	8.7	-55.36	-13	V
6853.2	-47.88	9.2	12.3	-44.78	-13	V
8566.4	-57.36	10.3	18.1	-49.56	-13	H
10509.2	-58.81	11.6	17.1	-53.31	-13	V
12212.8	-53.78	12.6	17.5	-48.88	-13	V

WCDMA BAND IV Mode Channel 1413
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3622.8	-60.84	6.5	4.7	-62.64	-13	H
5194.4	-58.54	8.0	8.7	-57.84	-13	V
6930.4	-51.56	9.3	12.9	-47.96	-13	V
8662.4	-61.39	10.3	18.5	-53.19	-13	H
10504.8	-59.39	11.6	17.1	-53.89	-13	H
12183.0	-52.93	12.6	17.5	-48.03	-13	H

WCDMA BAND IV Mode Channel 1513
Final result:

Frequency (MHz)	PMea (dBm)	Pcl (dBm)	Ga (dBi)	Peak EIRP (dBm)	Limit (dBm)	Polarization
3618.0	-61.07	6.5	4.7	-62.87	-13	V
5255.2	-52.8	8.0	8.7	-52.1	-13	V
7007.2	-45.5	9.3	12.9	-41.9	-13	V
8759.2	-54.41	10.4	18.5	-46.31	-13	H
10162.4	-58.74	11.3	17.4	-52.64	-13	V
12241.1	-54.1	12.6	17.5	-49.2	-13	H

Note: the EUT was displayed in several different direction, the worst cases were shown.

ANNEX A. Accreditation Certificate



Accredited Laboratory

A2LA has accredited

EAST CHINA INSTITUTE OF TELECOMMUNICATIONS
Shanghai, People's Republic of China

for technical competence in the field of
Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 6th day of May 2019.



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2021

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****