

FCC EMC Test Report


Report No.: JYTSZ-R01-2400342
Applicant: Colder Products Company
Address of Applicant: 4200 W. Round Lake Road, Arden Hills, MN 55112 USA

Equipment Under Test (EUT)
Product Name: IdentiQuik2
Model No.: IdentiQuik2, 8621403, INS4DR1700400, INSH4473001
Trade Mark: IdentiQuik

FCC ID: U9C-IDENTIQUIK2
Applicable Standards: FCC CFR Title 47 Part 15B
Date of Sample Receipt: 03 Jul., 2024
Date of Test: 04 Jul., to 29 Jul., 2024
Date of report Issued: 30 Jul., 2024
Test Result: PASS

Project by: *Vieta Zhang*

Date: 30 Jul., 2024



Reviewed by: *W. Ding*

Date: 30 Jul., 2024

Approved by: *Janet Wei*

Date: 30 Jul., 2024

Manager

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	30 Jul., 2024	Original

2 Contents

	Page
Cover Page	1
1 Version	2
2 Contents	3
3 General Information	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode	4
3.4 Description of Test Auxiliary Equipment	5
3.5 Description of Cable Used.....	5
3.6 Measurement Uncertainty	5
3.7 Additions to, Deviations, or Exclusions from the Method	5
3.8 Laboratory Facility	5
3.9 Laboratory Location.....	6
3.10 Test Instruments List	6
4 Measurement Setup and Procedure	7
4.1 Test Setup	7
4.2 Test Procedure	8
5 Test Results	9
5.1 Summary	9
5.1.1 Clause and data summary	9
5.1.2 Test Limit.....	9
5.2 Radiated Emission	10

3 General Information

3.1 Client Information

Applicant:	Colder Products Company
Address:	4200 W. Round Lake Road, Arden Hills, MN 55112 USA
Manufacturer/Factory:	Colder Products Company
Address:	4200 W. Round Lake Road, Arden Hills, MN 55112 USA

3.2 General Description of E.U.T.

Product Name:	IdentiQuik2
Model No.:	IdentiQuik2, 8621403, INS4DR1700400, INSH4473001
Power Supply:	DC 8-24V
Test Sample Condition:	The test samples were provided in good working order with no visible defects.
Remark:	IdentiQuik2, 8621403, INS4DR1700400, INSH4473001 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.

3.3 Test Mode

Operating Mode	Detail Description
Working mode	Keep the EUT in Working mode
<p>The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

3.4 Description of Test Auxiliary Equipment

Manufacturer	Description	Model	S/N	FCC ID/DoC
TRJ AD	AC/DC adapter	WSU150-0560	/	DoC

3.5 Description of Cable Used

Cable Type	Description	Length	From	To
/	/	/	/	/

3.6 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m SAC)	4.5 dB
Radiated Emission (6GHz ~ 18GHz) (3m SAC)	4.7 dB

Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

3.7 Additions to, Deviations, or Exclusions from the Method

No

3.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.9 Laboratory Location

<p>JianYan Testing Group Shenzhen Co., Ltd. Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China. Tel: +86-755-23118282, Fax: +86-755-23116366 Email: info-JYTee@lets.com, Website: http://jyt.lets.com</p>
--

3.10 Test Instruments List


Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2026
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	01-09-2024	01-08-2025
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	01-05-2024	01-04-2025
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	12-27-2023	12-26-2024
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	12-27-2023	12-26-2024
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	12-27-2023	12-26-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	12-27-2023	12-26-2024
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-17-2024	01-16-2025
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-17-2024	01-16-2025
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

4 Measurement Setup and Procedure


4.1 Test Setup

1) Radiated emission measurement:

Below 1GHz (3m SAC)

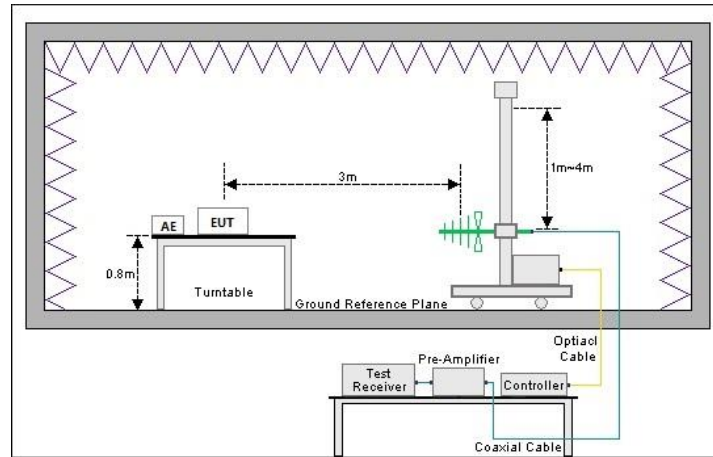

Above 1GHz (3m SAC)

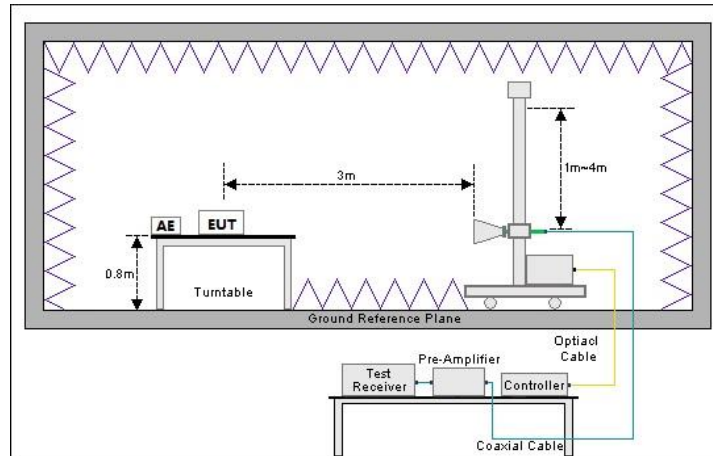

4.2 Test Procedure

Test method	Test step
Radiated emission	<p>For below 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m . 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

5 Test Results

5.1 Summary

5.1.1 Clause and data summary

Test items	Standard clause	Test data	Result
Radiated Emission	Part 15.109	See Section 5.2	Pass
Remark: 1. The EUT is a Class B digital device. 2. Pass: The EUT complies with the essential requirements in the standard. 3. N/A: Not Applicable.			
Test Method:	ANSI C63.4:2014		

5.1.2 Test Limit


Test items	Limit				
	Frequency (MHz)	Class A Limit (dB μ V/m)		Class B Limit (dB μ V/m)	
		Quasi-Peak @ 3m	Quasi-Peak @ 10m	Quasi-Peak @ 3m	Quasi-Peak @ 10m
Radiated Emission	30 – 88	49.0	39.0	40.0	30.0
	88 – 216	53.5	43.5	43.5	33.5
	216 – 960	56.0	46.0	46.0	36.0
	960 – 1000	60.0	50.0	54.0	44.0
	Note: The more stringent limit applies at transition frequencies.				
	Frequency	Class A Limit (dB μ V/m) @ 3m		Class B Limit (dB μ V/m) @ 3m	
		Average	Peake	Average	Peake
	Above 1 GHz	60.0	80.0	54.0	74.0
Note: The measurement bandwidth shall be 1 MHz or greater.					

5.2 Radiated Emission

Below 1GHz:

ANT 1:

Product Name:	IdentiQuik2	Product Model:	IdentiQuik2
Test By:	Kiran	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

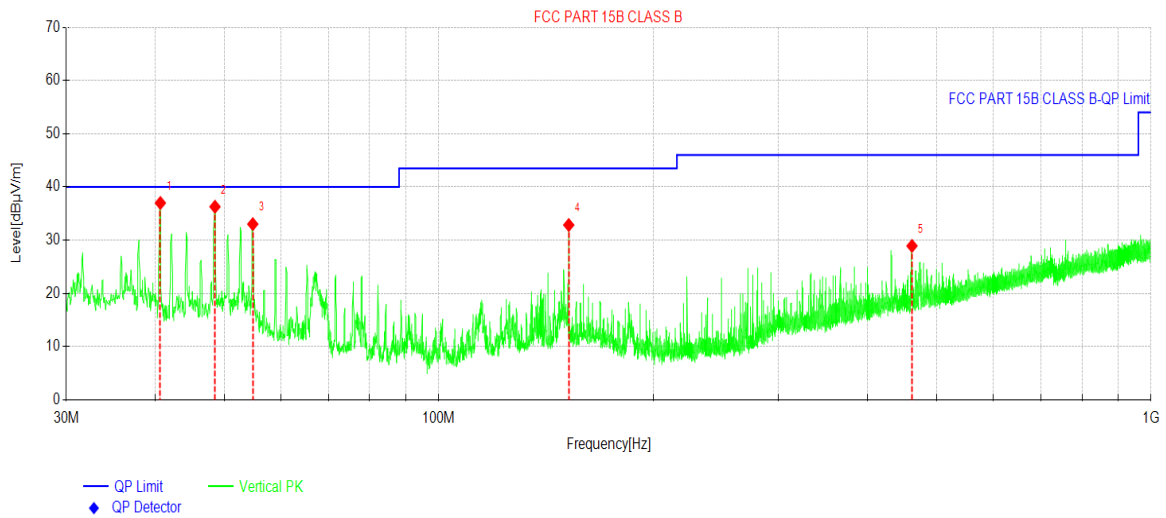


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	40.6705	50.39	-13.40	36.99	40.00	3.01	PK	Vertical
2	48.5279	50.32	-14.04	36.28	40.00	3.72	PK	Vertical
3	54.8332	47.14	-14.12	33.02	40.00	6.98	PK	Vertical
4	152.274	46.56	-13.71	32.85	43.50	10.65	PK	Vertical
5	461.817	37.86	-8.94	28.92	46.00	17.08	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

Product Name:	IdentiQuik2	Product Model:	IdentiQuik2
Test By:	Kiran	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

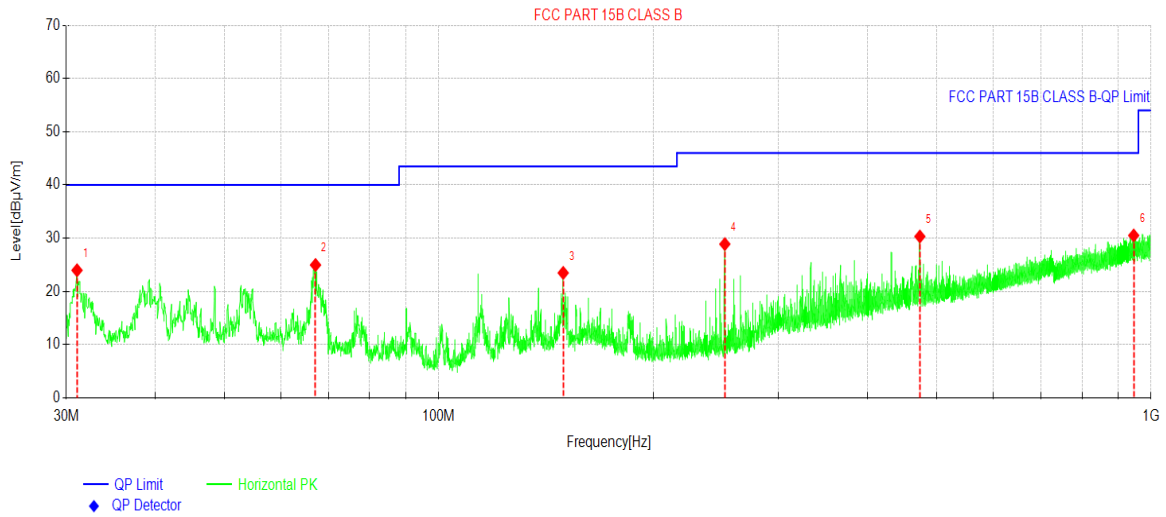


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	31.0671	38.77	-14.80	23.97	40.00	16.03	PK	Horizontal
2	67.1529	41.12	-16.15	24.97	40.00	15.03	PK	Horizontal
3	149.558	37.08	-13.60	23.48	43.50	20.02	PK	Horizontal
4	252.189	44.29	-15.41	28.88	46.00	17.12	PK	Horizontal
5	473.748	38.93	-8.61	30.32	46.00	15.68	PK	Horizontal
6	945.677	29.68	0.83	30.51	46.00	15.49	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

Above 1GHz:

Product Name:	IdentiQuik2	Product Model:	IdentiQuik2
Test By:	Kiran	Test mode:	Working mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

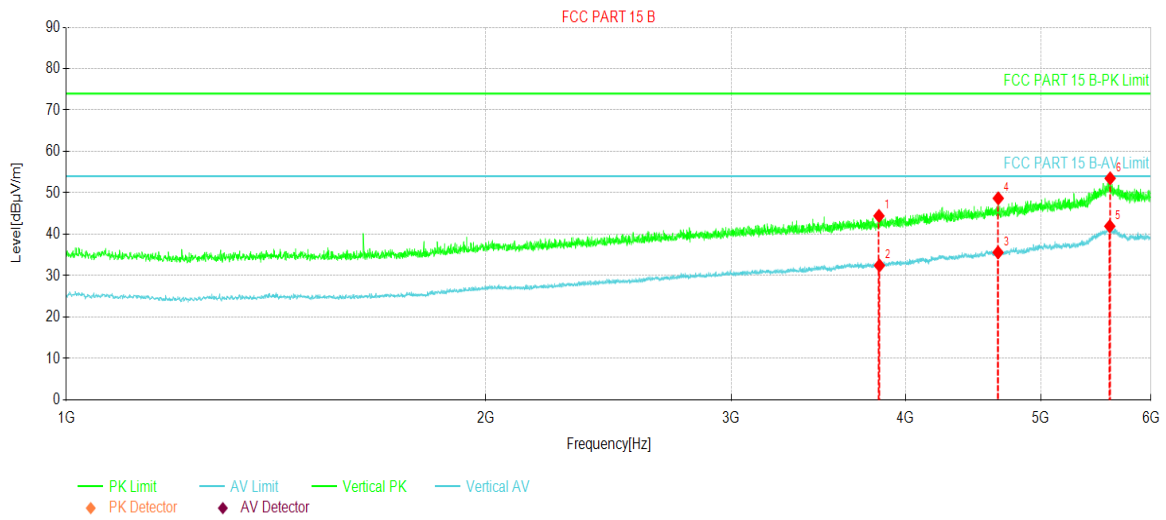


Suspected Data List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	3828.47	59.02	44.43	-14.59	74.00	29.57	PK	Vertical
2	3831.60	47.03	32.46	-14.57	54.00	21.54	AV	Vertical
3	4660.45	46.56	35.61	-10.95	54.00	18.39	AV	Vertical
4	4662.33	59.61	48.67	-10.94	74.00	25.33	PK	Vertical
5	5604.95	46.34	41.94	-4.40	54.00	12.06	AV	Vertical
6	5608.70	57.94	53.51	-4.43	74.00	20.49	PK	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	IdentiQuik2	Product Model:	IdentiQuik2
Test By:	Kiran	Test mode:	Working mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

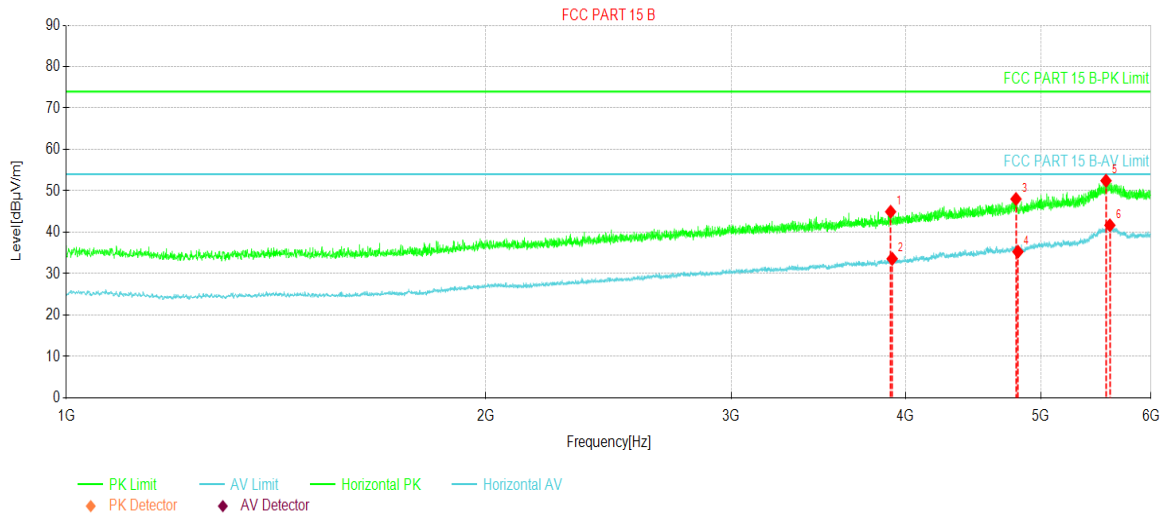


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	3902.86	59.23	44.96	-14.27	74.00	29.04	PK	Horizontal
2	3912.86	47.82	33.60	-14.22	54.00	20.40	AV	Horizontal
3	4800.47	58.74	48.03	-10.71	74.00	25.97	PK	Horizontal
4	4816.10	45.90	35.31	-10.59	54.00	18.69	AV	Horizontal
5	5570.57	57.32	52.45	-4.87	74.00	21.55	PK	Horizontal
6	5606.20	46.10	41.69	-4.41	54.00	12.31	AV	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

ANT2:

Product Name:	IdentiQuik2	Product Model:	IdentiQuik2
Test By:	Kiran	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

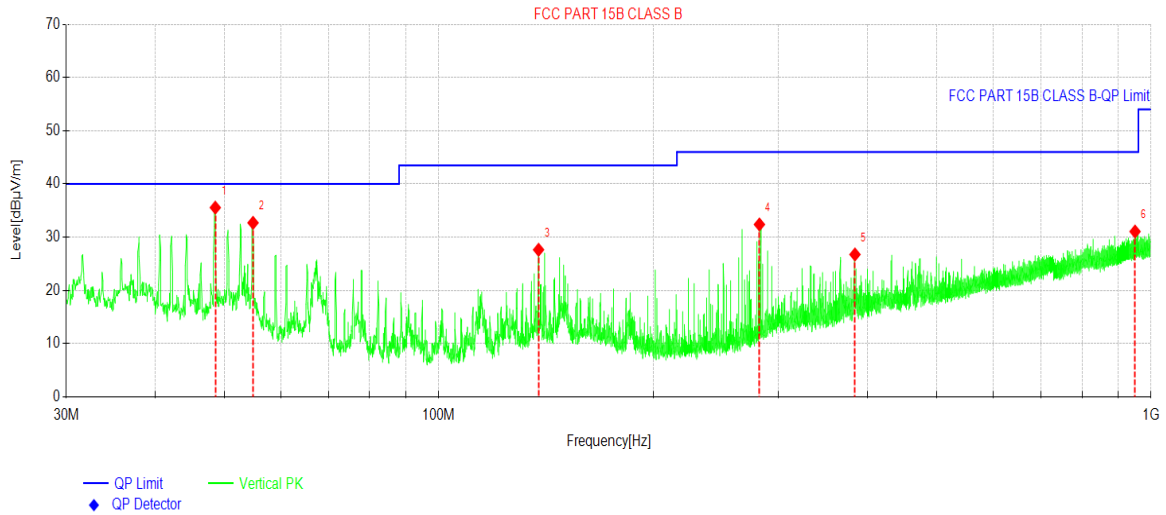


Suspected Data List									
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity	
1	48.5764	49.60	-14.05	35.55	40.00	4.45	PK	Vertical	
2	54.8817	46.82	-14.12	32.70	40.00	7.30	PK	Vertical	
3	138.111	42.19	-14.55	27.64	43.50	15.86	PK	Vertical	
4	282.067	46.57	-14.18	32.39	46.00	13.61	PK	Vertical	
5	384.067	37.95	-11.20	26.75	46.00	19.25	PK	Vertical	
6	949.751	30.05	1.01	31.06	46.00	14.94	PK	Vertical	

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	IdentiQuik2	Product Model:	IdentiQuik2
Test By:	Kiran	Test mode:	Working mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

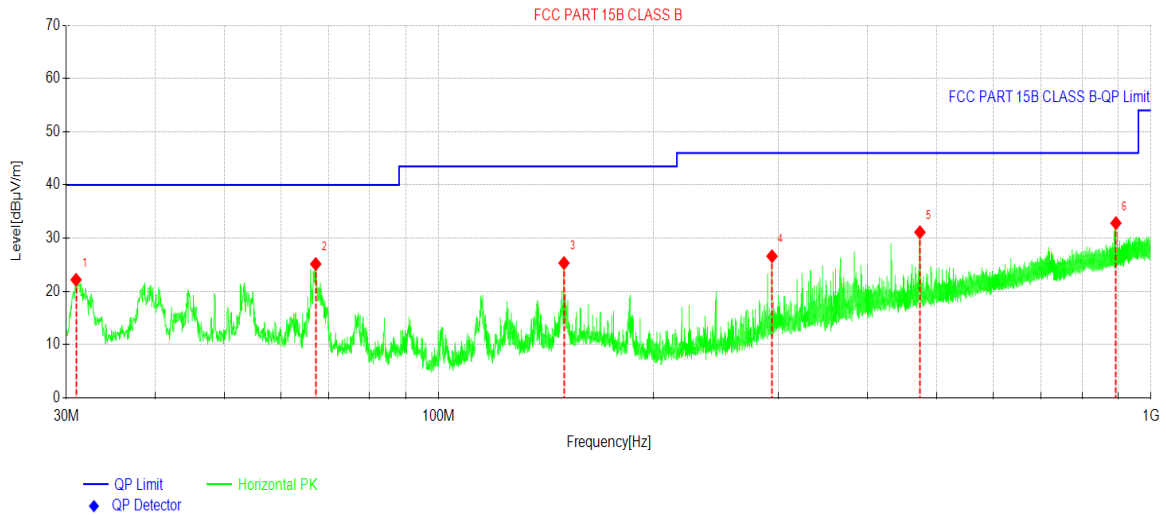


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	30.9700	37.00	-14.81	22.19	40.00	17.81	PK	Horizontal
2	67.2014	41.31	-16.16	25.15	40.00	14.85	PK	Horizontal
3	149.946	38.87	-13.54	25.33	43.50	18.17	PK	Horizontal
4	293.756	40.18	-13.56	26.62	46.00	19.38	PK	Horizontal
5	473.797	39.73	-8.61	31.12	46.00	14.88	PK	Horizontal
6	892.809	33.22	-0.39	32.83	46.00	13.17	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor).

Above 1GHz:

Product Name:	IdentiQuik2	Product Model:	IdentiQuik2
Test By:	Kiran	Test mode:	Working mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

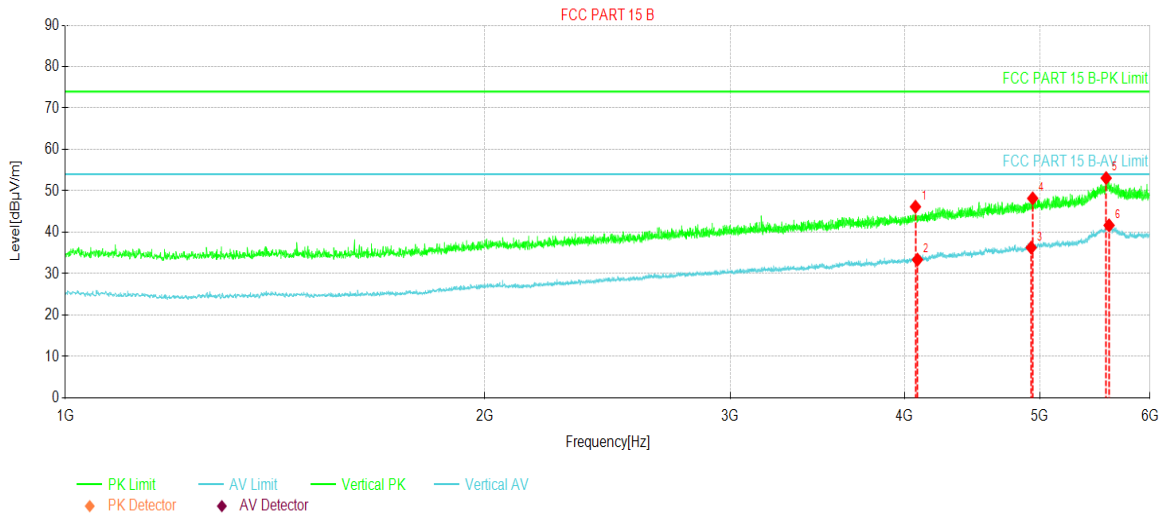


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	4072.88	59.62	46.16	-13.46	74.00	27.84	PK	Vertical
2	4086.63	46.75	33.37	-13.38	54.00	20.63	AV	Vertical
3	4931.11	46.02	36.29	-9.73	54.00	17.71	AV	Vertical
4	4942.99	57.81	48.17	-9.64	74.00	25.83	PK	Vertical
5	5581.19	57.76	53.08	-4.68	74.00	20.92	PK	Vertical
6	5608.07	46.11	41.68	-4.43	54.00	12.32	AV	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	IdentiQuik2	Product Model:	IdentiQuik2
Test By:	Kiran	Test mode:	Working mode
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

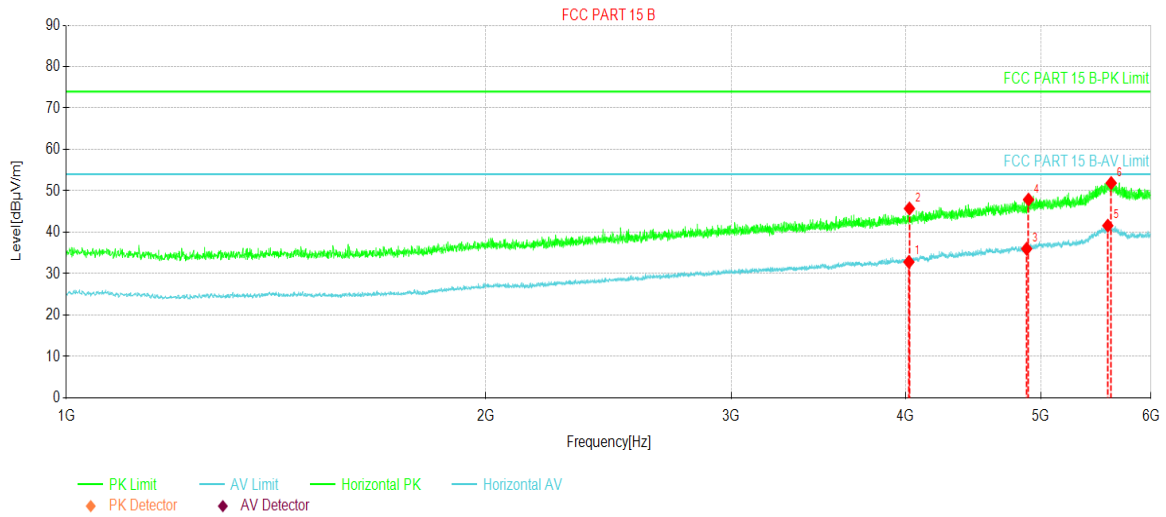

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	4022.25	46.56	32.83	-13.73	54.00	21.17	AV	Horizontal
2	4026.00	59.45	45.74	-13.71	74.00	28.26	PK	Horizontal
3	4886.11	46.07	36.01	-10.06	54.00	17.99	AV	Horizontal
4	4901.11	57.83	47.88	-9.95	74.00	26.12	PK	Horizontal
5	5586.82	46.18	41.60	-4.58	54.00	12.40	AV	Horizontal
6	5618.07	56.40	51.88	-4.52	74.00	22.12	PK	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

-----End of report-----