


REV.	CHANGE DESCRIPTION	DATE	SIGNATURE
A2	New	2023.12.08	Joe

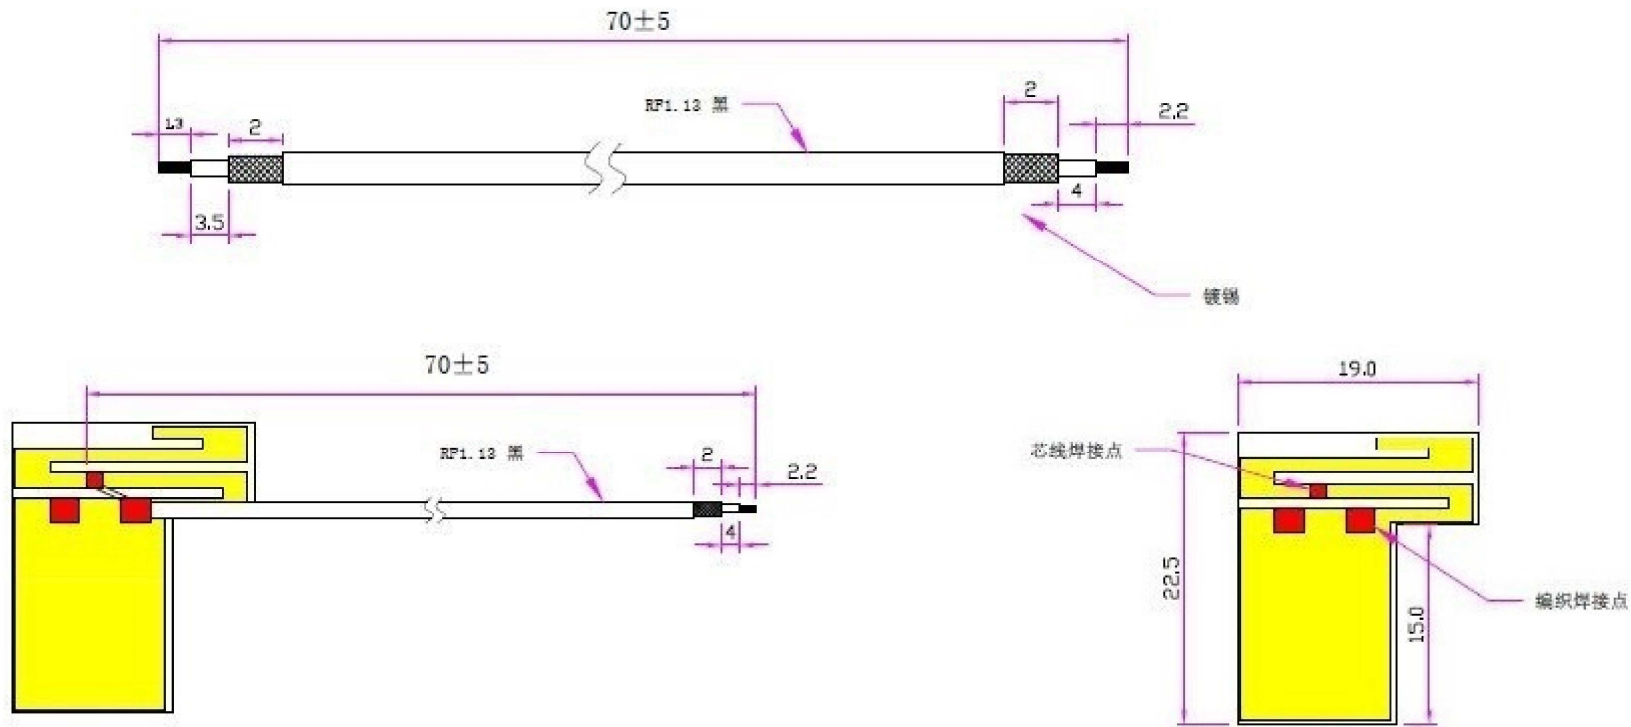


1. FPC thickness= 0.25mm
2. Total height(FPC+wire+solder joint)<2mm

FREQUENCY RANGE	2400~2500MHz
Gain:	2 DBI
SWR:	≤1.5
Polarzation:	Linear
Impedance:	50 OHM

TOLERANCE		JiangSen Electrical Materials Co., Ltd. Address: Tangkou Industrial Zone, Xinxu Town, Huiyang District, Huizhou City, Guangdong			
.XXX	±0.05	DRAWN BY	Joe	PART NO. :	
.XX	±0.1	CHECKED BY	Mike	TITLE: FPC天线 L=70mm	
.X	±0.2	APPROVED BY	Sky		
X.	±0.25	SCALE : 1 : 1		CAD FILE:	DWG TYPE: PRODUCT DRAWING
XX.	±1	AS DIMENSION			
XXX.	±2				


REV.	CHANGE DESCRIPTION	DATE	SIGNATURE
A2	New	2023.12.08	Joe

Azimuth

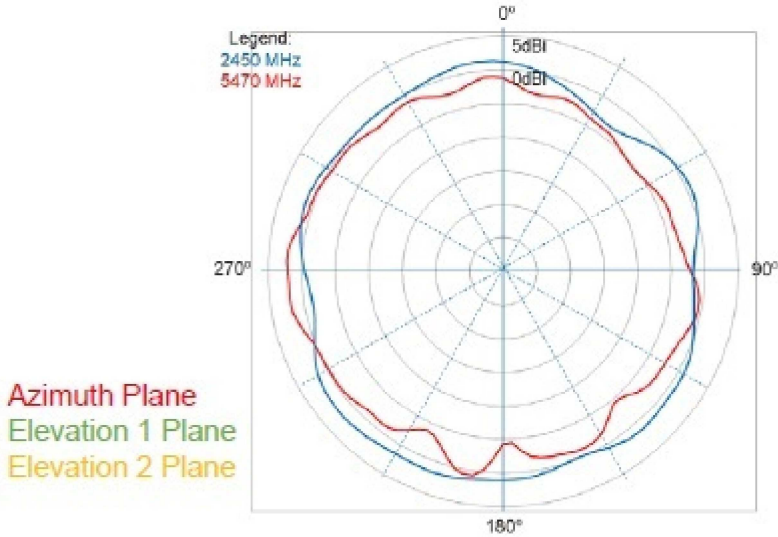


Azimuth Plane
Elevation 1 Plane
Elevation 2 Plane

Elevation 1

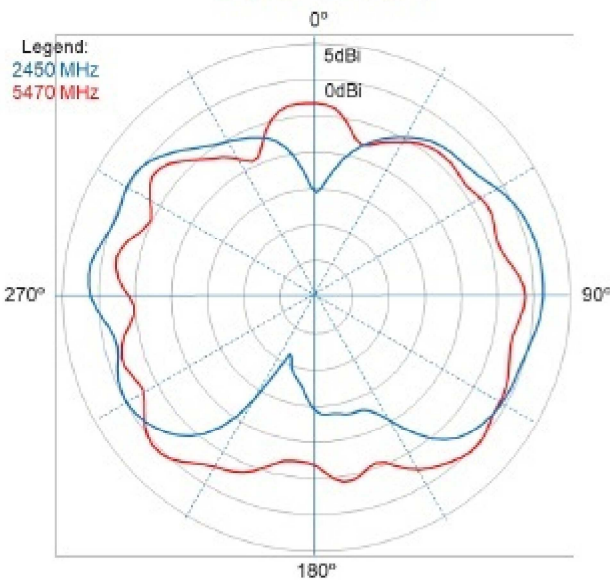

Elevation 2

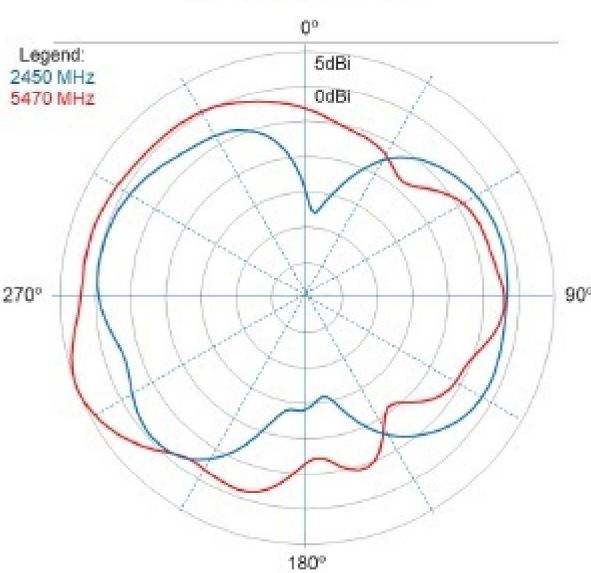

TOLERANCE

.XXX	±0.05
.XX	±0.1
.X	±0.2
X.	±0.25
XX.	±1
XXX.	±2



MATERIAL AS DIMENSION

JiangSen Electrical Materials Co., Ltd.
Address:
Tangkou Industrial Zone, Xinxu Town,
Huiyang District, Huizhou City, Guangdong

DRAWN BY	Joe	PART NO. :	
CHECKED BY	Mike	TITLE:	FPC天线 L=70mm
APPROVED BY	Sky		
SCALE :	1 : 1	CAD FILE:	DWG TYPE: PRODUCT DRAWING