

## FCC Test Report

**Report No.:** RFBGQZ-WTW-P20120253A

**FCC ID:** U9K-CM3000

**Test Model:** CMOB1

**Received Date:** Oct. 31, 2022

**Test Date:** Nov. 07, 2022 ~ Nov. 30, 2022

**Issued Date:** Jun. 07, 2023

**Applicant:** SimpliSafe, Inc

**Address:** 100 Summer Street Suite 300, Boston, MA 02110, United States

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record .....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT.....	6
3.2 Description of Test Modes.....	7
3.2.1 Test Mode Applicability and Tested Channel Detail.....	8
3.3 Duty Cycle of Test Signal.....	10
3.4 Description of Support Units.....	10
3.4.1 Configuration of System under Test .....	10
3.5 General Description of Applied Standards and References .....	11
<b>4 Test Types and Results</b> .....	<b>12</b>
4.1 Radiated Emission and Bandedge Measurement .....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	12
4.1.2 Test Instruments .....	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard .....	15
4.1.5 Test Set Up .....	15
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results .....	17
4.2 Conducted Emission Measurement.....	28
4.2.1 Limits of Conducted Emission Measurement .....	28
4.2.2 Test Instruments .....	28
4.2.3 Test Procedures.....	29
4.2.4 Deviation from Test Standard .....	29
4.2.5 Test Setup.....	29
4.2.6 EUT Operating Conditions.....	29
4.2.7 Test Results .....	30
4.3 Conducted Output Power Measurement .....	32
4.3.1 Limits of Conducted Output Power Measurement.....	32
4.3.2 Test Setup.....	32
4.3.3 Test Instruments .....	32
4.3.4 Test Procedures.....	32
4.3.5 Deviation from Test Standard .....	32
4.3.6 EUT Operating Conditions.....	32
4.3.7 Test Results .....	33
4.4 Power Spectral Density Measurement .....	34
4.4.1 Limits of Power Spectral Density Measurement.....	34
4.4.2 Test Setup.....	34
4.4.3 Test Instruments .....	34
4.4.4 Test Procedure .....	34
4.4.5 Deviation from Test Standard .....	34
4.4.6 EUT Operating Condition .....	34
4.4.7 Test Results .....	35
<b>5 Pictures of Test Arrangements</b> .....	<b>37</b>
<b>Annex A- Band Edge Measurement</b> .....	<b>38</b>
<b>Appendix A – QAtool WIFI TEST setup</b> .....	<b>41</b>
<b>Appendix B – Information of the Testing Laboratories</b> .....	<b>42</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBGQZ-WTW-P20120253A	Original Release	Jun. 07, 2023

## 1 Certificate of Conformity

**Product:** CMOB1  
**Brand:** SimpliSafe  
**Test Model:** CMOB1  
**Sample Status:** Engineering Sample  
**Applicant:** SimpliSafe, Inc  
**Test Date:** Nov. 07, 2022 ~ Nov. 30, 2022  
**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**                     *Vera Huang*                    , **Date:**                     Jun. 07, 2023                      
Vera Huang / Specialist

**Approved by :**                     *Jeremy Lin*                    , **Date:**                     Jun. 07, 2023                      
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -18.72 dB at 0.45800 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.3 dB at 2483.50 MHz.
15.247(d)	Antenna Port Emission	N/A	Refer to Note 1
15.247(a)(2)	6 dB Bandwidth	N/A	Refer to Note 1
---	Occupied Bandwidth Measurement	N/A	Refer to Note 1
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

1. Only AC power conducted emission, radiated emissions, conducted power, and power spectral density tests were performed for this addendum. Refer to original report for other test data.
2. For 2.4G band compliance with rule 15.247(d) of the band-edge items, the test plots were recorded in Annex A. Test Procedures refer to report 4.1.3.
3. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.59 dB
	200MHz ~ 1000MHz	3.60 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	CMOB1
<b>Brand</b>	SimpliSafe
<b>Test Model</b>	CMOB1
<b>Status of EUT</b>	Engineering Sample
<b>Power Supply Rating</b>	5 Vdc (adapter) 3.7 Vdc (Battery)
<b>Modulation Type</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>Modulation Technology</b>	DSSS, OFDM
<b>Transfer Rate</b>	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 72.2 Mbps
<b>Operating Frequency</b>	2412 ~ 2462 MHz
<b>Number of Channel</b>	11 for 802.11b, 802.11g, 802.11n (HT20)
<b>Output Power</b>	558.47 mW
<b>Antenna Type</b>	FPC Antenna with 3.07 dBi gain
<b>Antenna Connector</b>	N/A
<b>Accessory Device</b>	Refer to Note as below
<b>Data Cable Supplied</b>	Refer to Note as below

Note:

1. This report is issued as a supplementary report to BV CPS report no.: RFBGQZ-WTW-P20120253. The difference compared with the original report are listed as below. Therefore, only AC power conducted emission, radiated emissions, conducted power, and power spectral density tests were verified and recorded in this report.

- Add components for PMIC layout
- Add capacitive element for Power board
- Add 3 capacitance for IR board
- Change applicant's address

2. The EUT provides 1 completed transmitter and 1 receiver.

Modulation Mode	Tx Function
802.11b	1TX
802.11g	1TX
802.11n (HT20)	1TX

3. The EUT contains following accessory devices.

Product	Brand	Model	Description
USB Cable	RAPID	MIRCO USB TO TYPE A	--
Battery	SimpliSafe	SSCAM-BAT1	3.7 Vdc, 19.61 Wh

4. Detail antenna specification please refer to antenna datasheet or an antenna gain measurement report.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz      **RE<1G**: Radiated Emission below 1 GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

#### **Radiated Emission Test (Above 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

#### **Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	1	OFDM	BPSK	6.0

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11g	1 to 11	1	OFDM	BPSK	6.0



**Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

**Test Condition:**


Applicable To	Environmental Conditions	Input Power	Tested by
RE≥1G	24.1 deg. C, 76.8 % RH	120 Vac, 60 Hz	Rex Wang
RE<1G	22 deg. C, 73.8 % RH	120 Vac, 60 Hz	Rex Wang
PLC	25 deg. C, 75 % RH	120 Vac, 60 Hz	Rex Wang
APCM	22 deg. C, 67 % RH	120 Vac, 60 Hz	Tim Chen

### 3.3 Duty Cycle of Test Signal

**802.11b:** Duty cycle of test signal is 100 %, duty factor is not required.

**802.11g:** Duty cycle of test signal is 100 %, duty factor is not required.

**802.11n (HT20):** Duty cycle of test signal is 100 %, duty factor is not required.

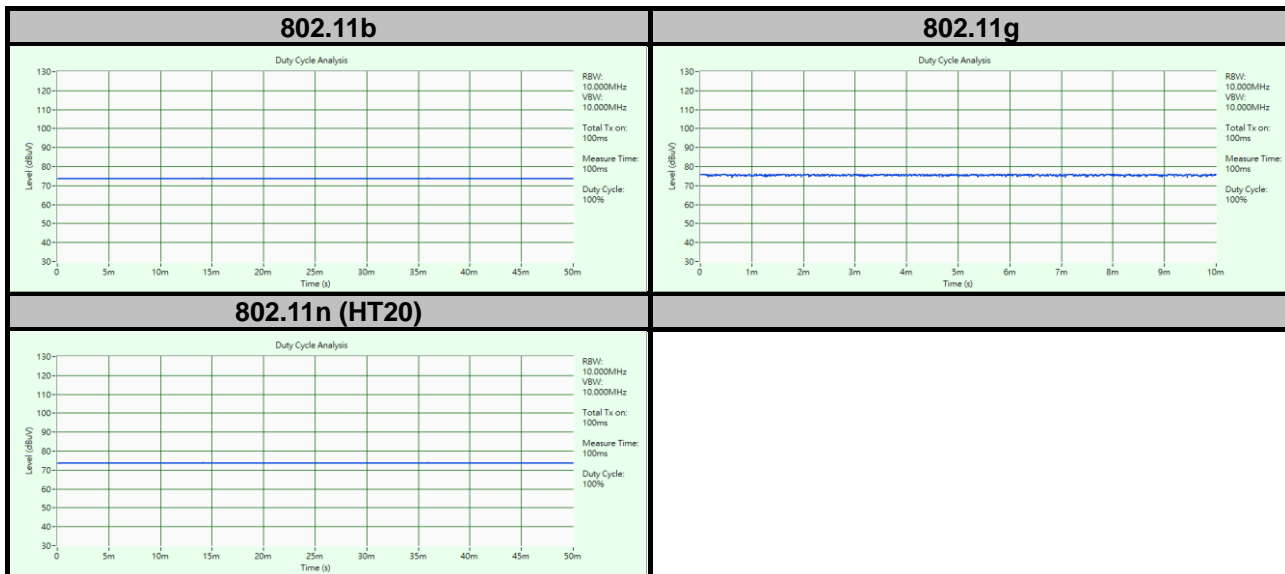


### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	LITEON	PA-1050-39	N/A	N/A	Provided by Lab

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB Cable	1	1	N	0	Accessory of the EUT

#### 3.4.1 Configuration of System under Test

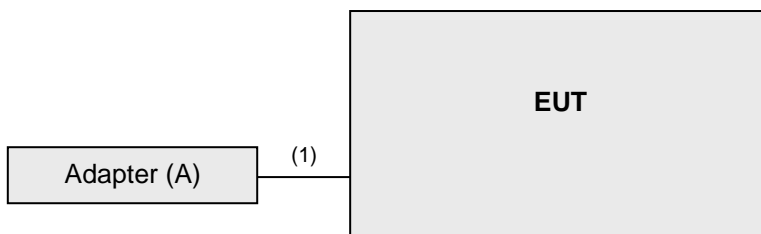

Remote site

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

**Test Standard:**

**FCC Part 15, Subpart C (15.247)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

**References Test Guidance:**

**KDB 558074 D01 Meas Guidance v05r02**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver KEYSIGHT	N9038A	MY55420137	Apr. 27, 2022	Apr. 26, 2023
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 16, 2022	Sep. 15, 2023
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Oct. 20, 2022	Oct. 19, 2023
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-1169	Nov. 14, 2021	Nov. 13, 2022
			Nov. 13, 2022	Nov. 12, 2023
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Oct. 20, 2022	Oct. 19, 2023
Loop Antenna TESEQ	HLA 6121	45745	Jul. 27, 2022	Jul. 26, 2023
Preamplifier Agilent (Below 1GHz)	8447D	2944A10638	May 14, 2022	May 13, 2023
Preamplifier Agilent (Above 1GHz)	8449B	3008A02367	Feb. 16, 2022	Feb. 15, 2023
RF signal cable HUBER+SUHNER&EMCI	SUCOFLEX 104 & EMC104-SM-SM80 00	CABLE-CH9-02 (248780+171006)	Jan. 15, 2022	Jan. 14, 2023
RF signal cable HUBER+SUHNER	SUCOFLEX 104	CABLE-CH9-(2507 95/4)	Jan. 15, 2022	Jan. 14, 2023
RF signal cable Woken	8D-FB	Cable-CH9-01	May 14, 2022	May 13, 2023
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower &Turn BV ADT	AT100	AT93021705	NA	NA
Turn Table BV ADT	TT100	TT93021705	NA	NA
Turn Table Controller BV ADT	SC100	SC93021705	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Sep. 03, 2022	Sep. 02, 2023

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HY - 966 chamber 4.

#### 4.1.3 Test Procedures

##### **For Radiated Emission below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

##### **For Radiated Emission above 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq 98$  %) for Average detection (AV) at frequency above 1 GHz.  
(11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 10 Hz ;  
11n (HT20): RBW = 1 MHz, VBW = 10 Hz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up


<Radiated Emission below 30 MHz>

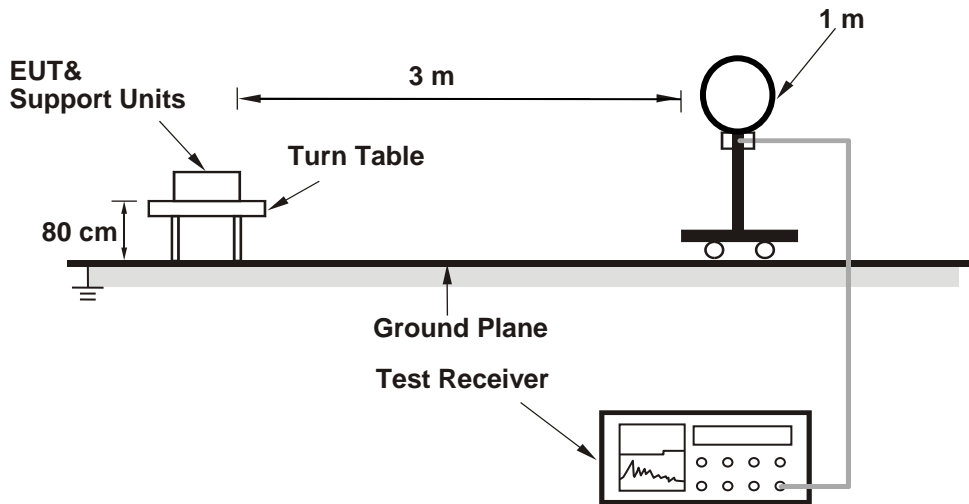

<Radiated Emission 30 MHz to 1 GHz>

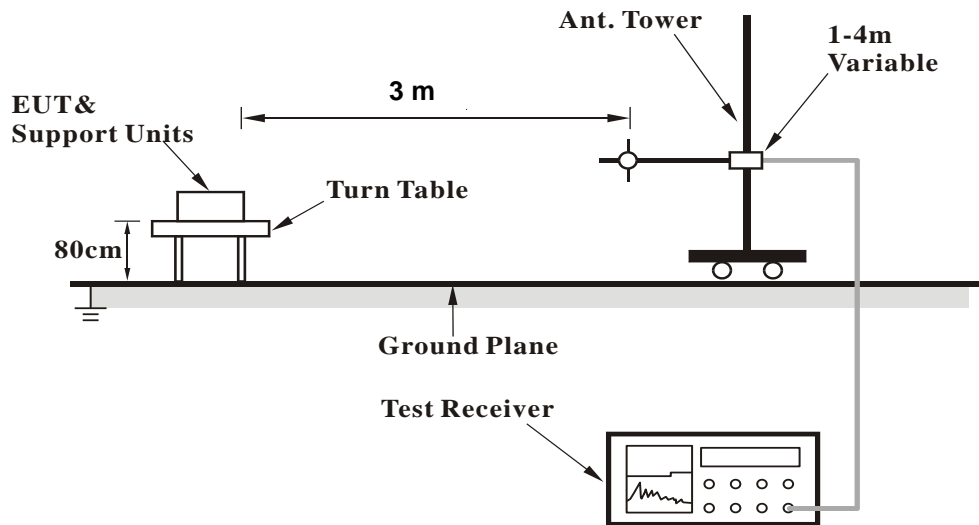

**<Radiated Emission above 1 GHz>**

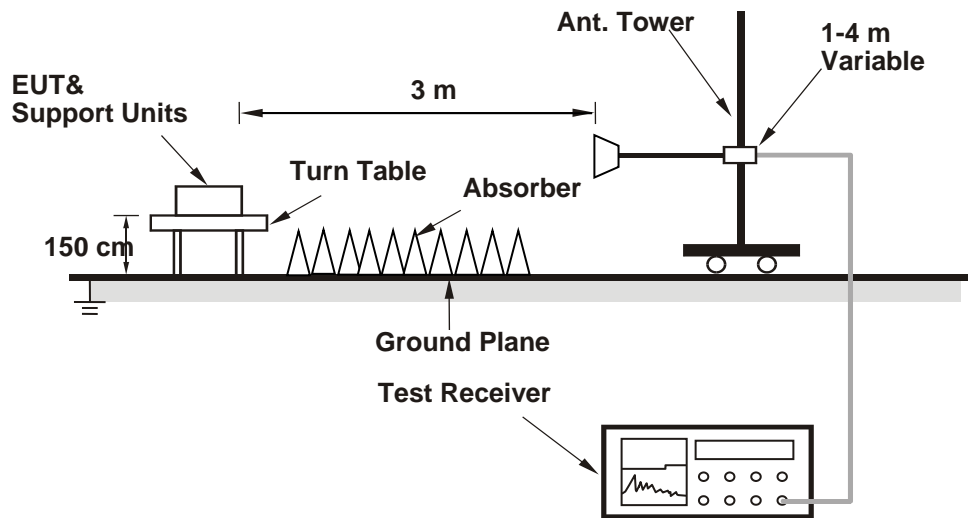

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**4.1.6 EUT Operating Conditions**

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.



#### 4.1.7 Test Results

##### Above 1 GHz Data :

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

##### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2385.00	60.8 PK	74.0	-13.2	1.05 H	6	27.0	33.8
2	2385.00	50.8 AV	54.0	-3.2	1.05 H	6	17.0	33.8
3	*2412.00	107.0 PK			1.05 H	6	73.2	33.8
4	*2412.00	104.7 AV			1.05 H	6	70.9	33.8
5	4824.00	53.4 PK	74.0	-20.6	2.08 H	176	42.7	10.7
6	4824.00	47.4 AV	54.0	-6.6	2.08 H	176	36.7	10.7

##### Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	61.2 PK	74.0	-12.8	1.27 V	119	27.4	33.8
2	2386.00	51.2 AV	54.0	-2.8	1.27 V	119	17.4	33.8
3	*2412.00	107.6 PK			1.27 V	119	73.8	33.8
4	*2412.00	105.2 AV			1.27 V	119	71.4	33.8
5	4824.00	52.7 PK	74.0	-21.3	1.15 V	138	42.0	10.7
6	4824.00	43.4 AV	54.0	-10.6	1.15 V	138	32.7	10.7

##### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.6 PK			1.19 H	32	72.8	33.8
2	*2437.00	104.1 AV			1.19 H	32	70.3	33.8
3	4874.00	53.4 PK	74.0	-20.6	2.06 H	176	42.3	11.1
4	4874.00	47.1 AV	54.0	-6.9	2.06 H	176	36.0	11.1

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.3 PK			1.41 V	239	73.5	33.8
2	*2437.00	104.9 AV			1.41 V	239	71.1	33.8
3	4874.00	52.1 PK	74.0	-21.9	1.91 V	148	41.0	11.1
4	4874.00	43.9 AV	54.0	-10.1	1.91 V	148	32.8	11.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.0 PK			1.40 H	30	73.0	34.0
2	*2462.00	104.6 AV			1.40 H	30	70.6	34.0
3	2488.00	59.7 PK	74.0	-14.3	1.40 H	30	25.8	33.9
4	2488.00	48.6 AV	54.0	-5.4	1.40 H	30	14.7	33.9
5	4924.00	54.3 PK	74.0	-19.7	2.01 H	175	43.3	11.0
6	4924.00	47.8 AV	54.0	-6.2	2.01 H	175	36.8	11.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.4 PK			1.00 V	147	74.4	34.0
2	*2462.00	106.2 AV			1.00 V	147	72.2	34.0
3	2490.00	61.0 PK	74.0	-13.0	1.00 V	147	27.1	33.9
4	2490.00	49.9 AV	54.0	-4.1	1.00 V	147	16.0	33.9
5	4924.00	52.9 PK	74.0	-21.1	1.42 V	147	41.9	11.0
6	4924.00	45.4 AV	54.0	-8.6	1.42 V	147	34.4	11.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.44 H	27	36.8	33.8
2	2390.00	50.9 AV	54.0	-3.1	1.44 H	27	17.1	33.8
3	*2412.00	109.4 PK			1.44 H	27	75.6	33.8
4	*2412.00	99.7 AV			1.44 H	27	65.9	33.8
5	4824.00	52.3 PK	74.0	-21.7	2.00 H	176	41.6	10.7
6	4824.00	38.7 AV	54.0	-15.3	2.00 H	176	28.0	10.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.6 PK	74.0	-2.4	1.04 V	130	37.8	33.8
2	2390.00	51.3 AV	54.0	-2.7	1.04 V	130	17.5	33.8
3	*2412.00	110.4 PK			1.04 V	130	76.6	33.8
4	*2412.00	100.5 AV			1.04 V	130	66.7	33.8
5	4824.00	52.2 PK	74.0	-21.8	1.98 V	156	41.5	10.7
6	4824.00	38.3 AV	54.0	-15.7	1.98 V	156	27.6	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.2 PK			1.40 H	8	75.3	33.9
2	*2437.00	99.7 AV			1.40 H	8	65.8	33.9
3	4874.00	52.0 PK	74.0	-22.0	2.03 H	177	41.0	11.0
4	4874.00	38.9 AV	54.0	-15.1	2.03 H	177	27.9	11.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.7 PK			1.26 V	116	76.8	33.9
2	*2437.00	100.6 AV			1.26 V	116	66.7	33.9
3	4874.00	51.8 PK	74.0	-22.2	1.86 V	159	40.8	11.0
4	4874.00	38.7 AV	54.0	-15.3	1.86 V	159	27.7	11.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.0 PK			1.41 H	30	75.0	34.0
2	*2462.00	98.8 AV			1.41 H	30	64.8	34.0
3	2483.50	66.7 PK	74.0	-7.3	1.41 H	30	32.8	33.9
4	2483.50	50.2 AV	54.0	-3.8	1.41 H	30	16.3	33.9
5	4924.00	52.1 PK	74.0	-21.9	2.01 H	175	41.1	11.0
6	4924.00	38.8 AV	54.0	-15.2	2.01 H	175	27.8	11.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.4 PK			1.19 V	119	76.4	34.0
2	*2462.00	100.6 AV			1.19 V	119	66.6	34.0
3	2483.50	70.5 PK	74.0	-3.5	1.19 V	119	36.6	33.9
4	2483.50	51.5 AV	54.0	-2.5	1.19 V	119	17.6	33.9
5	4924.00	51.9 PK	74.0	-22.1	1.90 V	155	40.9	11.0
6	4924.00	38.6 AV	54.0	-15.4	1.90 V	155	27.6	11.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	1.43 H	6	37.9	33.8
2	2390.00	51.9 AV	54.0	-2.1	1.43 H	6	18.1	33.8
3	*2412.00	108.6 PK			1.43 H	7	74.8	33.8
4	*2412.00	99.1 AV			1.43 H	7	65.3	33.8
5	4824.00	51.7 PK	74.0	-22.3	2.02 H	174	41.0	10.7
6	4824.00	38.6 AV	54.0	-15.4	2.02 H	174	27.9	10.7

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.4 PK	74.0	-4.6	1.00 V	147	35.6	33.8
2	2390.00	51.3 AV	54.0	-2.7	1.00 V	147	17.5	33.8
3	*2412.00	110.1 PK			1.00 V	147	76.3	33.8
4	*2412.00	100.0 AV			1.00 V	147	66.2	33.8
5	4824.00	51.5 PK	74.0	-22.5	1.15 V	138	40.8	10.7
6	4824.00	38.5 AV	54.0	-15.5	1.15 V	138	27.8	10.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.

RF Mode	TX 802.11n (HT20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.1 PK			1.46 H	32	75.2	33.9
2	*2437.00	99.0 AV			1.46 H	32	65.1	33.9
3	4874.00	52.5 PK	74.0	-21.5	2.03 H	176	41.5	11.0
4	4874.00	38.9 AV	54.0	-15.1	2.03 H	176	27.9	11.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	109.7 PK			1.15 V	146	75.8	33.9
2	*2437.00	100.2 AV			1.15 V	146	66.3	33.9
3	4874.00	52.2 PK	74.0	-21.8	1.32 V	189	41.2	11.0
4	4874.00	38.8 AV	54.0	-15.2	1.32 V	189	27.8	11.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.



RF Mode	TX 802.11n (HT20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.3 PK			1.56 H	37	75.3	34.0
2	*2462.00	100.3 AV			1.56 H	37	66.3	34.0
3	2483.50	70.1 PK	74.0	-3.9	1.56 H	37	36.2	33.9
4	2483.50	51.4 AV	54.0	-2.6	1.56 H	37	17.5	33.9
5	4924.00	52.5 PK	74.0	-21.5	2.05 H	175	41.5	11.0
6	4924.00	38.9 AV	54.0	-15.1	2.05 H	175	27.9	11.0

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.4 PK			1.53 V	136	77.4	34.0
2	*2462.00	101.6 AV			1.53 V	136	67.6	34.0
3	2483.50	73.4 PK	74.0	-0.6	1.53 V	136	39.5	33.9
<b>4</b>	<b>2483.50</b>	<b>53.7 AV</b>	<b>54.0</b>	<b>-0.3</b>	<b>1.53 V</b>	<b>136</b>	<b>19.8</b>	<b>33.9</b>
5	4924.00	52.2 PK	74.0	-21.8	1.96 V	155	41.2	11.0
6	4924.00	38.6 AV	54.0	-15.4	1.96 V	155	27.6	11.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.


**Below 1 GHz Worst-Case Data:**

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	95.96	26.9 QP	43.5	-16.6	1.00 H	156	41.0	-14.1
2	231.76	28.6 QP	46.0	-17.4	1.50 H	262	39.1	-10.5
3	298.69	24.6 QP	46.0	-21.4	1.00 H	116	31.4	-6.8
4	335.55	24.9 QP	46.0	-21.1	2.00 H	147	30.8	-5.9
5	431.58	30.5 QP	46.0	-15.5	1.25 H	33	34.1	-3.6
6	497.54	29.6 QP	46.0	-16.4	1.00 H	181	32.2	-2.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

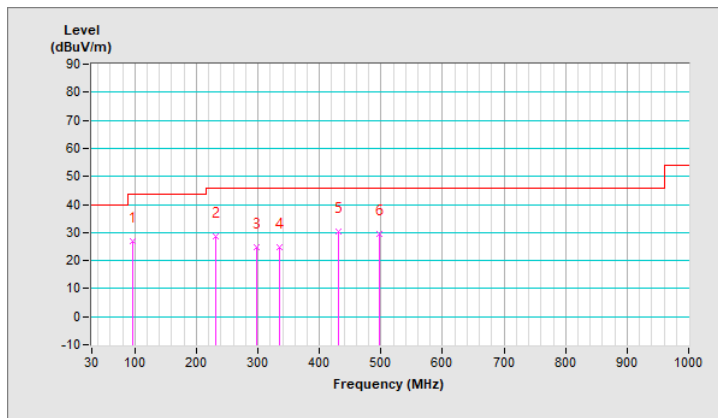


RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	94.99	27.1 QP	43.5	-16.4	1.50 V	189	41.3	-14.2
2	165.80	33.2 QP	43.5	-10.3	1.25 V	177	42.0	-8.8
3	232.73	29.3 QP	46.0	-16.7	1.00 V	257	39.6	-10.3
4	431.58	29.7 QP	46.0	-16.3	1.50 V	22	33.3	-3.6
5	497.54	29.5 QP	46.0	-16.5	1.50 V	177	32.1	-2.6
6	953.44	34.5 QP	46.0	-11.5	1.00 V	219	28.3	6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

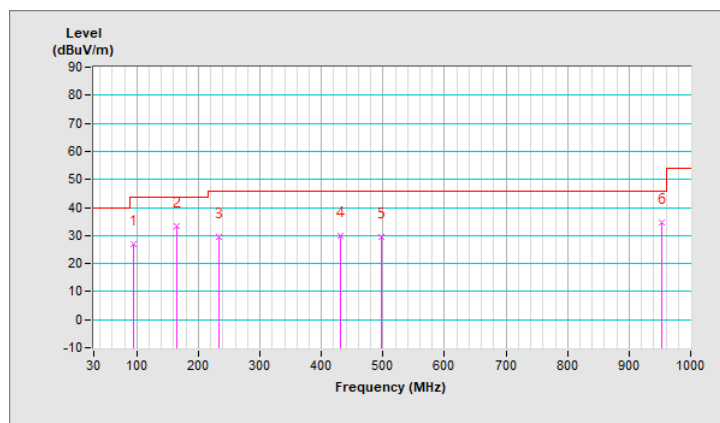

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102783	Dec. 20, 2021	Dec. 19, 2022
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond2-01	Sep. 03, 2022	Sep. 02, 2023
LISN/AMN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Feb. 17, 2022	Feb. 16, 2023
LISN/AMN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Sep. 22, 2022	Sep. 21, 2023
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 2.  
 3. The VCCI Site Registration No. is C-12047.

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

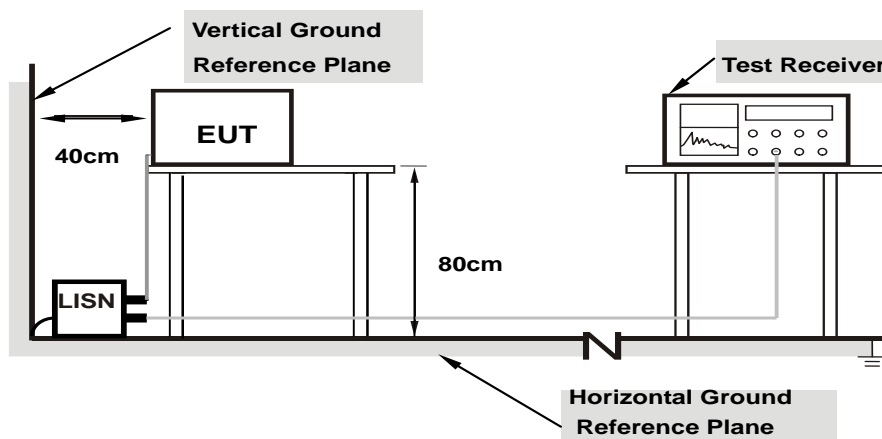

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.


#### 4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25 °C, 75% RH
Tested by	Rex Wang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18085	10.21	29.68	20.38	39.89	30.59	64.45	54.45	-24.56	-23.86
<b>2</b>	<b>0.45800</b>	<b>10.25</b>	<b>23.08</b>	<b>17.76</b>	<b>33.33</b>	<b>28.01</b>	<b>56.73</b>	<b>46.73</b>	<b>-23.40</b>	<b>-18.72</b>
3	1.87600	10.33	20.48	12.19	30.81	22.52	56.00	46.00	-25.19	-23.48
4	2.37200	10.35	20.45	10.87	30.80	21.22	56.00	46.00	-25.20	-24.78
5	4.02400	10.42	18.32	9.62	28.74	20.04	56.00	46.00	-27.26	-25.96
6	20.78000	10.62	18.19	10.42	28.81	21.04	60.00	50.00	-31.19	-28.96

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

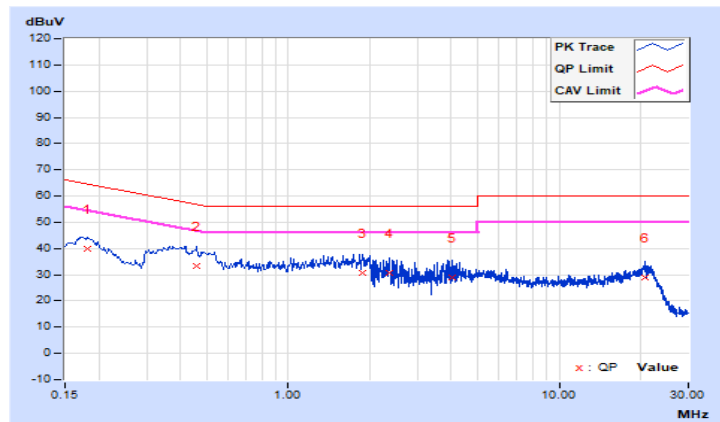


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25 °C, 75% RH
Tested by	Rex Wang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17755	10.20	30.65	19.23	40.85	29.43	64.60	54.60	-23.75	-25.17
2	0.35000	10.24	23.71	14.71	33.95	24.95	58.96	48.96	-25.01	-24.01
3	1.95600	10.36	24.34	12.60	34.70	22.96	56.00	46.00	-21.30	-23.04
4	2.23600	10.37	25.11	12.67	35.48	23.04	56.00	46.00	-20.52	-22.96
5	4.36800	10.45	23.78	12.83	34.23	23.28	56.00	46.00	-21.77	-22.72
6	20.90000	10.76	21.48	13.01	32.24	23.77	60.00	50.00	-27.76	-26.23

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

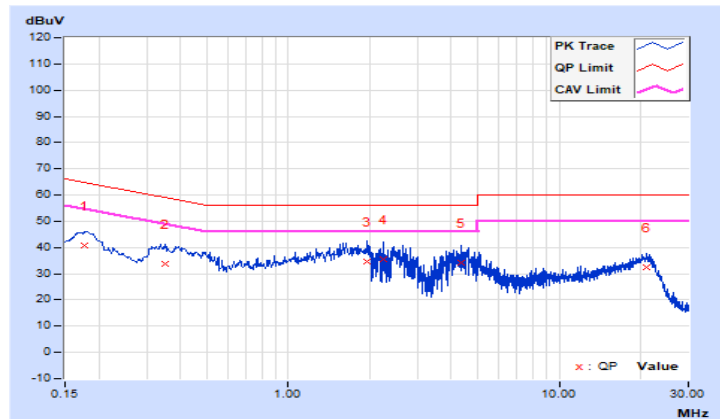


### 4.3 Conducted Output Power Measurement

#### 4.3.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

#### 4.3.2 Test Setup



#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



## 4.3.7 Test Results

## 802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	257.632	24.11	169.044	22.28	30	Pass
6	2437	267.917	24.28	176.604	22.47	30	Pass
11	2462	266.686	24.26	176.198	22.46	30	Pass

## 802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	<b>558.47</b>	<b>27.47</b>	109.144	20.38	30	Pass
6	2437	547.016	27.38	113.24	20.54	30	Pass
11	2462	519.996	27.16	108.143	20.34	30	Pass

## 802.11n (HT20)


Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	530.884	27.25	101.859	20.08	30	Pass
6	2437	526.017	27.21	101.391	20.06	30	Pass
11	2462	519.996	27.16	92.257	19.65	30	Pass

## 4.4 Power Spectral Density Measurement

### 4.4.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.4.2 Test Setup



### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

For Average Power (Duty cycle  $\geq 98\%$ )

- a. Set instrument center frequency to DTS channel center frequency.
- b. Set span to at least 1.5 times the OBW.
- c. Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = power averaging (RMS) or sample detector (when RMS not available).
- f. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- g. Sweep time = auto couple.
- h. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i. Use the peak marker function to determine the maximum amplitude level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.4.7 Test Results

##### 802.11b

Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-0.49	8	Pass
6	2437	-0.92	8	Pass
11	2462	-1.03	8	Pass

##### 802.11g


Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-4.61	8	Pass
6	2437	-4.54	8	Pass
11	2462	-4.55	8	Pass

##### 802.11n (HT20)


Channel	Frequency (MHz)	PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
1	2412	-4.56	8	Pass
6	2437	-4.92	8	Pass
11	2462	-4.59	8	Pass

### Spectrum Plot of Worst Value



#### 802.11b

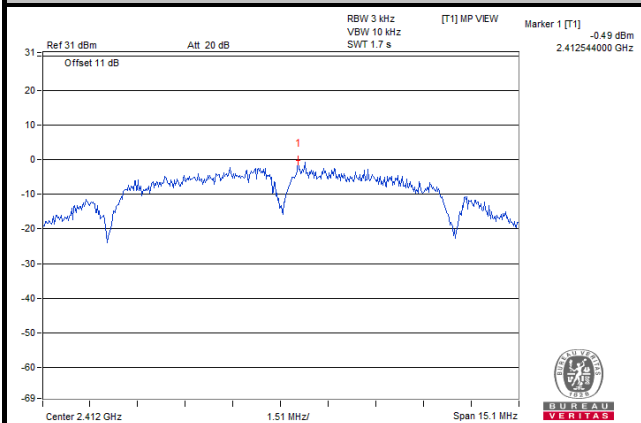

#### 802.11g

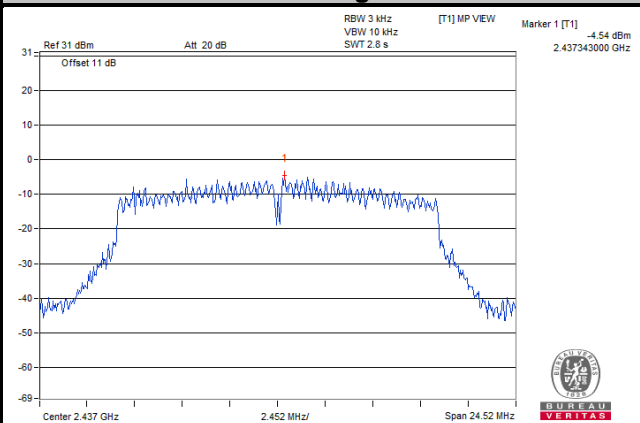

#### 802.11n (HT20)

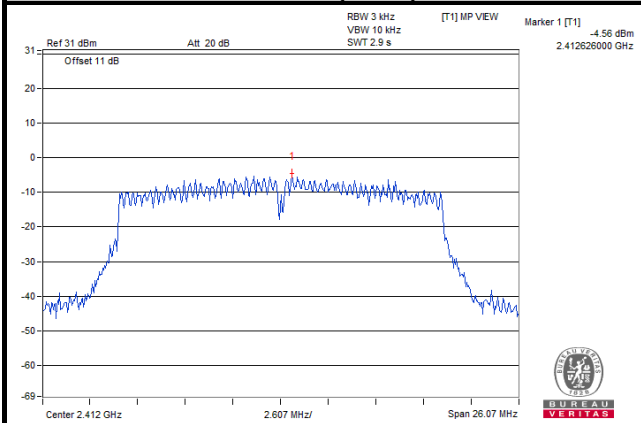


## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).


# Annex A- Band Edge Measurement

## 802.11b Channel 1


Horizontal (Peak)

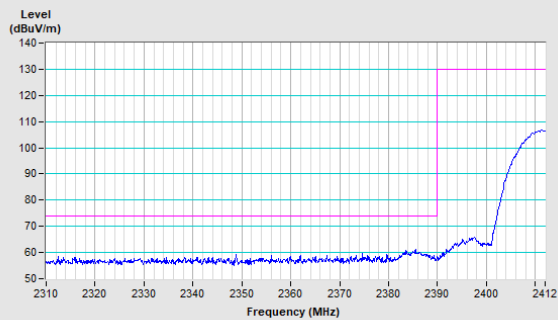


Horizontal (Average)

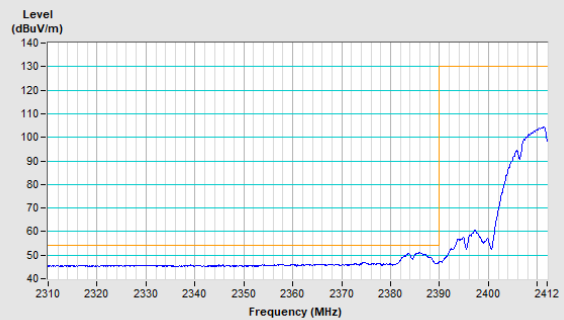

Vertical (Peak)

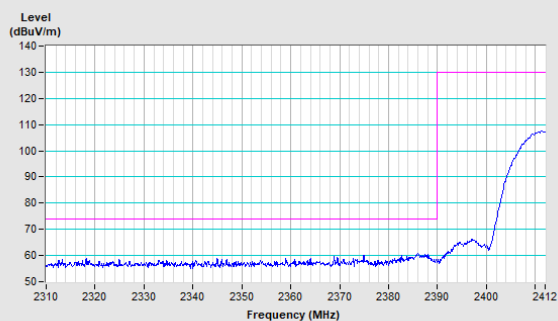


Vertical (Average)

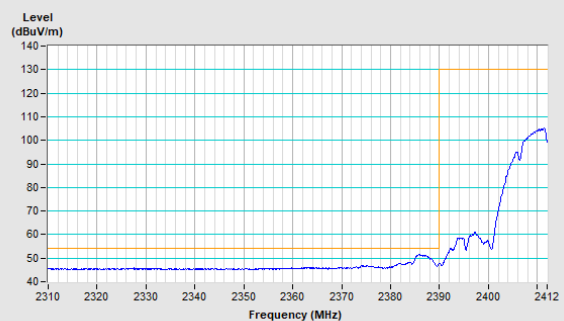


## 802.11b Channel 11


Horizontal (Peak)

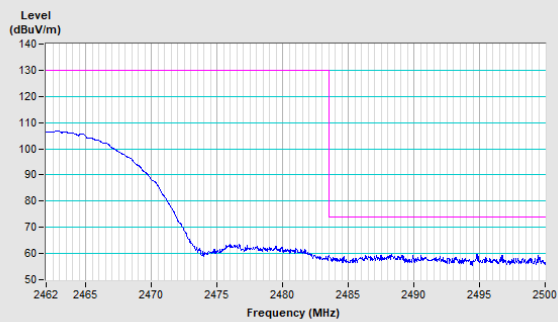


Horizontal (Average)

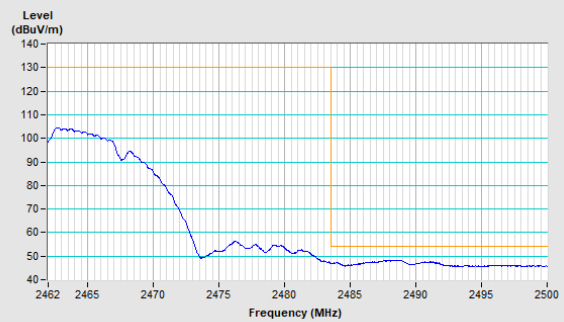

Vertical (Peak)

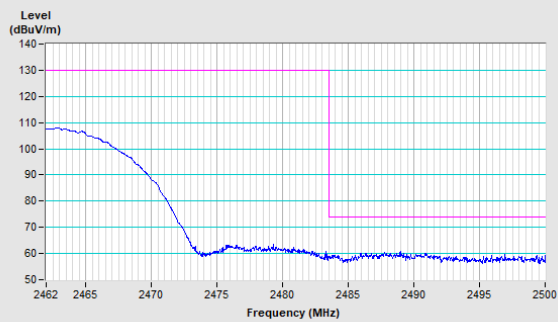


Vertical (Average)

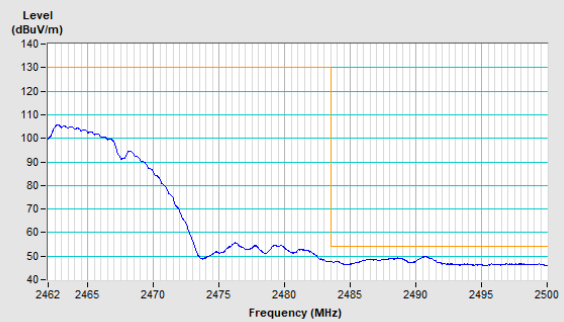


### 802.11g Channel 1


Horizontal (Peak)

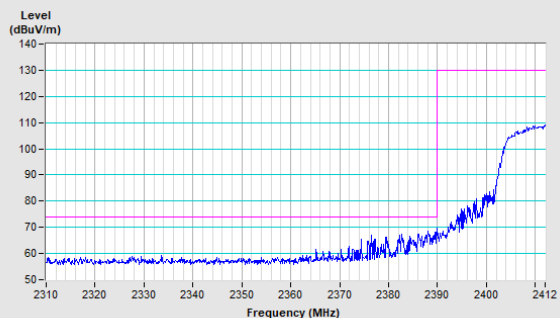


Horizontal (Average)

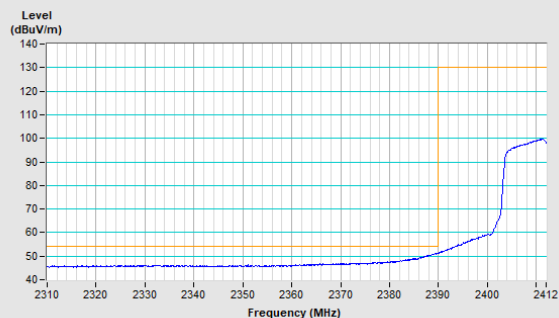

Vertical (Peak)

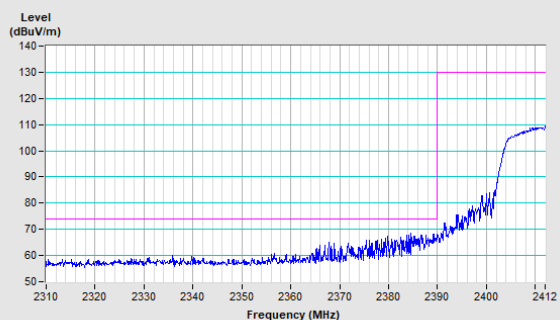


Vertical (Average)

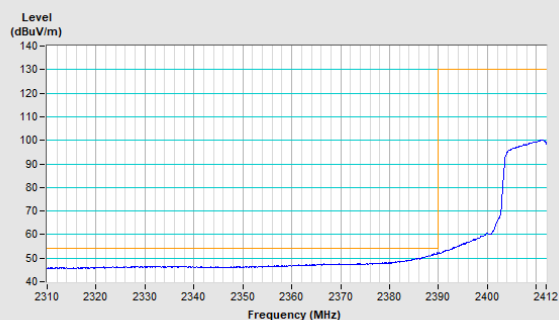


### 802.11g Channel 11


Horizontal (Peak)

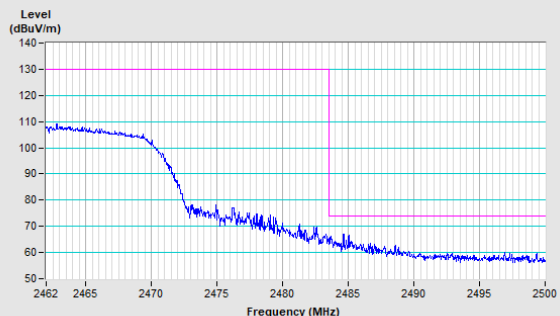


Horizontal (Average)

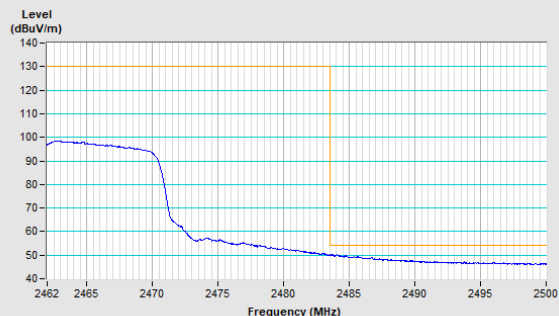

Vertical (Peak)

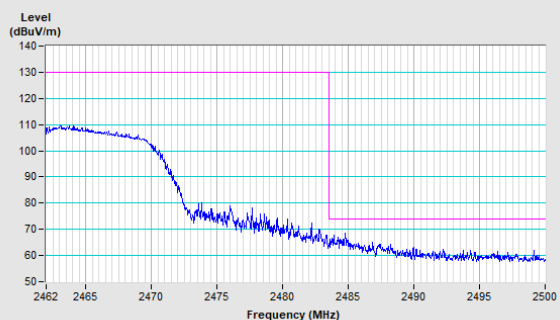


Vertical (Average)

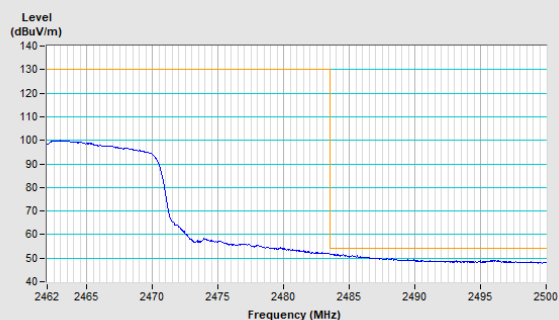


### 802.11n (HT20) Channel 1


Horizontal (Peak)

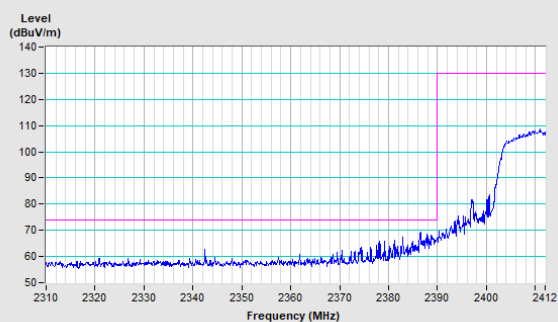


Horizontal (Average)

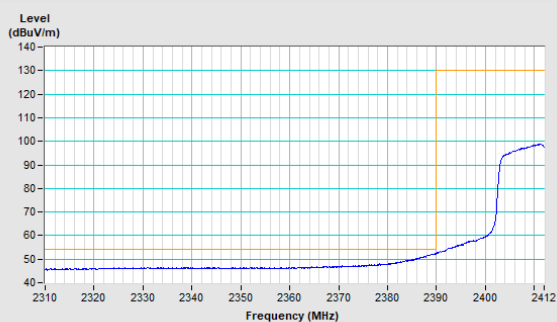

Vertical (Peak)

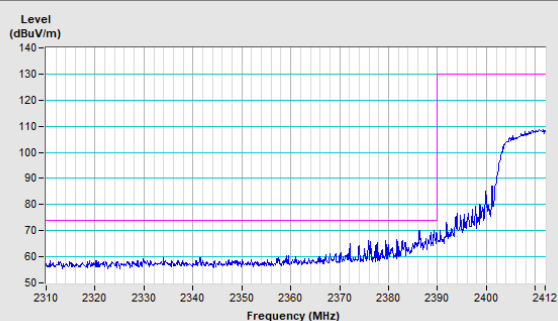


Vertical (Average)

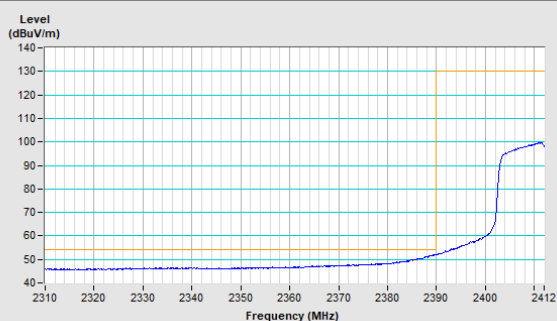


### 802.11n (HT20) Channel 11


Horizontal (Peak)

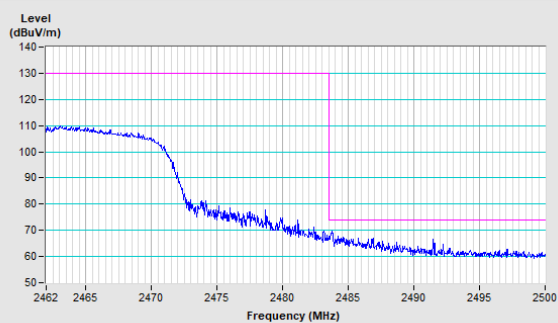


Horizontal (Average)

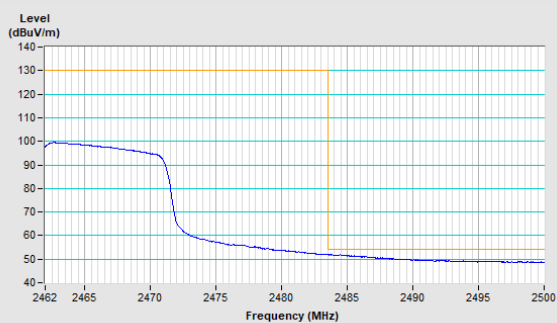

Vertical (Peak)

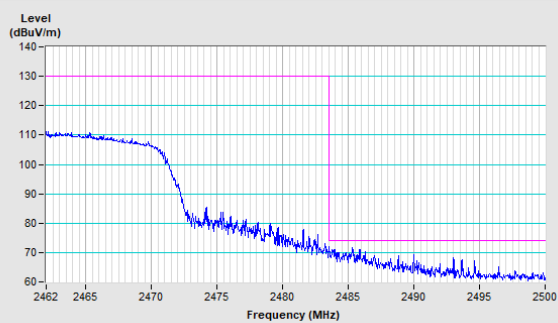

Vertical (Average)

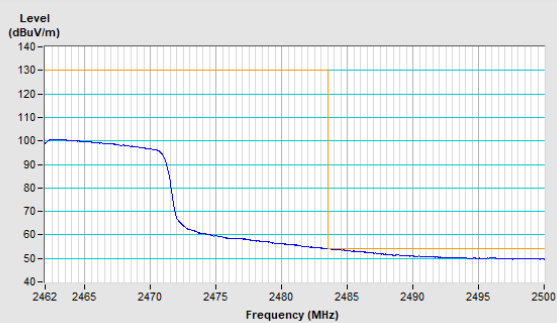




## Appendix A – QAtool WIFI TEST setup

The QAtool WIFI TEST setup are shown as follows.

# QAtool WIFI TEST setup


## 1. Setup

Using console board connect to DUT Tx, Rx, Gnd.

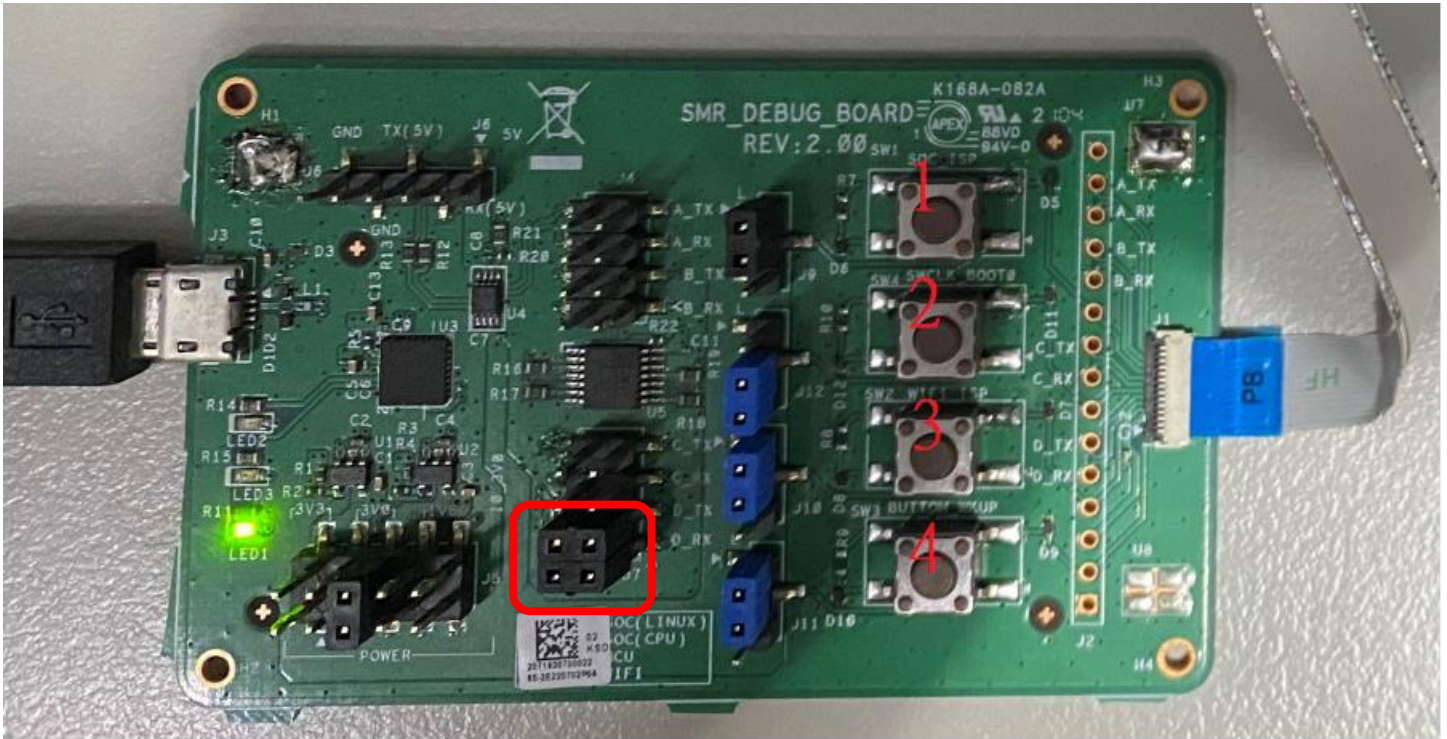


## 2. Open test tool(QATool\_Dbg.exe)

Step1. Open Qatool and make sure the comport setting **PC** and baud rate **921600**.

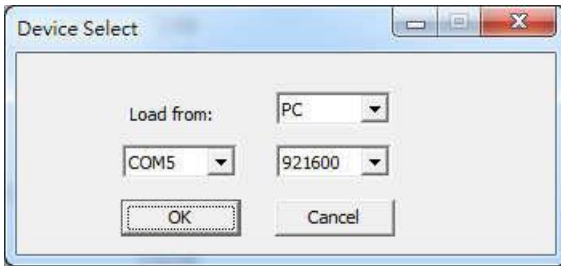

Step2. Click the 'OK' button, Push the button 1,2,3,4 and waiting 15 seconds before power on (MicroUSB or battery).

Step3. If boot success QATool will show as below. Click EPA and ELNA and then click EFEM set and Auto EFEM button.

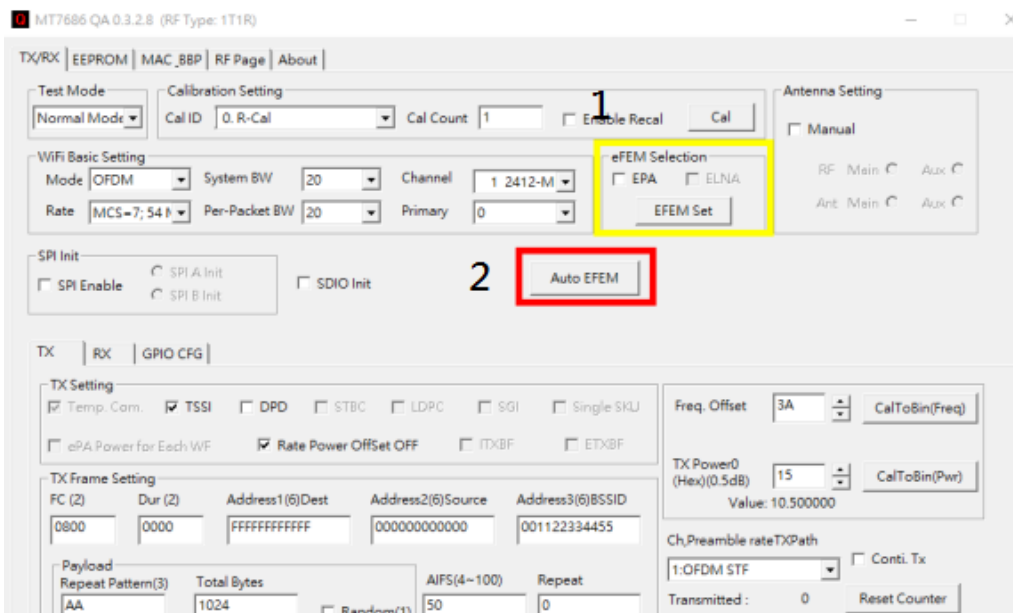

### 3. Start Transmit power

Step1. Setting the Test Mode, click to Test Mode (Blue box).

Step2. Setting (Ch, Preamble rateTXPath) to **3: Payload OFDM CCK** (Green box)

Step3. Click Conti. Tx.

The screenshot shows the MT7682 QA 0.3.2.8 (RF Type: 1T1R) software interface. The 'Test Mode' dropdown is highlighted in blue. The 'Ch, Preamble rateTXPath' dropdown is highlighted in green, with '3: Payload OFDM CCK' selected. The 'Conti. Tx' checkbox is also highlighted in green. The interface includes various configuration sections: Calibration Setting, WiFi Basic Setting, eFEM Selection, Antenna Setting, SPI Init, TX Setting, TX Frame Setting, TX Tone, and TMR Setting. The 'Conti. Tx' checkbox is located in the 'Ch, Preamble rateTXPath' section.

Continuous TX...



Current is running continuous TX...

Stop

## 4. Set GPIO for special test

Step1. Change to GPIO CFG

Step2. Setting GPIO for select Antenna (Please refer schematic)

Simplisafe Example:

Antenna 0

GPIO4/OUTPUT/LOW

Antenna 1

GPIO4/OUTPUT/HIGH

Step3. Click "Set" button

The screenshot shows the MT7682 QA 0.3.2.8 (RF Type: 1T1R) software interface. The window title is "MT7682 QA 0.3.2.8 (RF Type: 1T1R)". The interface is divided into several sections:

- TX/RX**: EEPROM, MAC BBP, RF Page, About
- Test Mode**: Normal Mode (dropdown)
- Calibration Setting**: Cal ID (0. R-Cal), Cal Count (1), Enable Recal (checkbox), Cal (button)
- WiFi Basic Setting**: Mode (OFDM), System BW (20), Channel (1 2412-M), Rate (MCS=7; 54 M), Per-Packet BW (20), Primary (0)
- eFEM Selection**: EPA (checked), ELNA (checked), EFEM Set (button)
- Antenna Setting**: Manual (checkbox), RF Main (radio), Aux (radio), Ant Main (radio), Aux (radio)
- SPI Init**: SPI Enable (checkbox), SPI A Init (radio), SPI B Init (radio), SDIO Init (checkbox), Auto EFEM (button)

The **GPIO CFG** section is highlighted with a red box. It contains the following fields:

- Port**: GPIO4 (dropdown)
- Mode**: HAL\_GPIO\_4\_GPIO4 (dropdown)
- Dir**: HAL\_GPIO\_DIRECTION\_OUTPUT (dropdown)
- Data**: HAL\_GPIO\_DATA\_HIGH, HAL\_GPIO\_DATA\_LOW, HAL\_GPIO\_DATA\_HIGH (dropdown menu)

A **Set** button is located at the bottom of the GPIO CFG section.

## Appendix B – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---