



**SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch**

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological  
Development District, Guangzhou, China 510663  
Telephone: +86 (0) 20 82155555  
Fax: +86 (0) 20 82075059  
Email: ee.guangzhou@sgs.com

Report No.: GZEM170800504301  
Page: 1 of 22  
FCC ID: U9K-CO3000

# TEST REPORT

**Application No.:** GZEM1708005043CR  
**Applicant:** SimpliSafe, Inc.  
**Address of Applicant:** 294 Washington Street, 9th Floor, Boston MA 02108, United States  
**Manufacturer:** SimpliSafe, Inc.  
**Address of Manufacturer:** 294 Washington Street, 9th Floor, Boston MA 02108, United States  
**Factory:** Jetta (China) Industries Co., Ltd.  
**Address of Factory:** 33 Cai Xin Lu, Lan He Zhen, Nan Sha Qu, Guangzhou Shi, Guangdong Province, China  
**FCC ID:** U9K-CO3000  
**Equipment Under Test (EUT):**  
**EUT Name:** CO Detector  
**Model No.:** SSC03  
**Trade Mark:** Simplisafe  
**Standards:** CFR 47 FCC PART 15 SUBPART C:2016 section 231  
**Date of Receipt:** 2017-08-17  
**Date of Test:** 2017-08-21 to 2017-09-02  
**Date of Issue:** 2017-11-13

|                      |              |
|----------------------|--------------|
| <b>Test Result :</b> | <b>Pass*</b> |
|----------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.



**Ricky Liu**  
**Manager**

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



## 2 Version

| Revision Record |         |            |          |                 |
|-----------------|---------|------------|----------|-----------------|
| Version         | Chapter | Date       | Modifier | Remark          |
| 00              |         | 2017-11-13 |          | Original Report |
|                 |         |            |          |                 |
|                 |         |            |          |                 |
|                 |         |            |          |                 |
|                 |         |            |          |                 |

|                          |  |                          |      |
|--------------------------|--|--------------------------|------|
| Authorized for issue by: |  |                          |      |
| Tested By                | <br>(Vico Cui) / Project Engineer | 2017-08-21 to 2017-09-02 | Date |
| Checked By               | <br>(Ricky Liu) / Reviewer        | 2017-09-11               | Date |



### 3 Test Summary

| Test  | Test Requirement                 | Test method                              | Result |
|---|----------------------------------|--|--------|
| Radiated Emission   | FCC PART 15<br>section 15.231(b) | ANSI C 63.10: Clasue<br>6.4, 6.5 and 6.6 | PASS   |
| Occupied Bandwidth  | FCC PART 15<br>section 15.231(c) | ANSI C 63.10:<br>Clasue 6.9              | PASS   |
| Dwell Time  | FCC PART 15<br>section 15.231(a) | FCC PART 15:<br>Section 15.231(a)        | PASS   |
| <b>Remark:</b><br>EUT: In this whole report EUT means Equipment Under Test.<br>N/A: not applicable. Refer to the relative section for the details.<br>Tx: In this whole report Tx (or tx) means Transmitter.<br>Rx: In this whole report Rx (or rx) means Receiver.<br>RF: In this whole report RF means Radio Frequency. |                                  |  |        |



## **4 Contents**

|          |  |          |
|----------|--|----------|
| <b>1</b> | <b>Cover Page</b> .....                          | <b>1</b> |
| <b>2</b> | <b>Version</b> .....                             | <b>2</b> |
| <b>3</b> | <b>Test Summary</b> .....                        | <b>3</b> |
| <b>4</b> | <b>Contents</b> .....                            | <b>4</b> |
| <b>5</b> | <b>General Information</b> .....                 | <b>5</b> |
| 5.1      | Details of E.U.T.....                            | 5        |
| 5.2      | Description of Support Units.....                | 5        |
| 5.3      | Deviation from Standards.....                    | 5        |
| 5.4      | Abnormalities from Standard Conditions.....      | 5        |
| 5.5      | Other Information Requested by the Customer..... | 5        |
| 5.6      | Test Location.....                               | 5        |
| 5.7      | Test Facility.....                               | 6        |
| <b>6</b> | <b>Equipment List</b> .....                      | <b>7</b> |
| <b>7</b> | <b>Test Results</b> .....                        | <b>9</b> |
| 7.1      | E.U.T. test conditions.....                      | 9        |
| 7.2      | Antenna Requirement.....                         | 10       |
| 7.3      | Radiated Emissions.....                          | 11       |
| 7.4      | Occupied Bandwidth.....                          | 19       |
| 7.5      | Dwell Time:.....                                 | 20       |



## **5 General Information**

### **5.1 Details of E.U.T.**

|                            |   |
|----------------------------|---|
| Operation Frequency:       | 433.92MHz   |
| Modulation & Antenna Type: | FSK modulation with integrated PCB antenna                  |
| Power Supply:              | DC 4.5V (1.5V size of "AA" battery x 3)                     |
| Test Voltage:              | DC 4.5V   |
| Cable:                     | NA  |
| EUT Function:              | CO Detector with 433.92MHz as carrier for data transmission |

### **5.2 Description of Support Units**

The EUT has been tested as an independent unit.

### **5.3 Deviation from Standards**

None.

### **5.4 Abnormalities from Standard Conditions**

None.

### **5.5 Other Information Requested by the Customer**

None.

### **5.6 Test Location**

All tests were performed at:  
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,  
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,  
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



## 5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized 2.948 Listed Test Firm(Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co. Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



## 6 Equipment List

| No.       | Test Equipment                             | Manufacturer                      | Model No.                  | Serial No. | Cal. date    | Cal. Due date |
|-----------|--|-----------------------------------|----------------------------|------------|--------------|---------------|
|           |  |                                   |                            |            | (YYYY-MM-DD) | (YYYY-MM-DD)  |
| EMC0525   | Compact Semi-Anechoic Chamber              | ChangZhou ZhongYu                 | N/A                        | N/A        | 2016-12-04   | 2019-12-03    |
| EMC0522   | EMI Test Receiver                          | Rohde & Schwarz                   | ESIB26                     | 100283     | 2017-01-20   | 2018-01-19    |
| EMC0056   | EMI Test Receiver                          | Rohde & Schwarz                   | ESCI                       | 100236     | 2017-01-20   | 2018-01-19    |
| EMC0528   | RI High frequency Cable                    | SGS                               | 20 m                       | N/A        | 2016-04-19   | 2018-04-18    |
| EMC2025   | Trilog Broadband Antenna 30-1000MHz        | SCHWARZBECK MESS-ELEKTRONIK       | VULB 9160                  | 9160-3372  | 2016-09-08   | 2019-09-07    |
| SEM003-18 | Trilog Broadband Antenna 25-2000MHz        | SCHWARZBECK MESS-ELEKTRONIK       | VULB 9168                  | 665        | 2016-06-29   | 2019-06-28    |
| EMC0524   | Bi-log Type Antenna                        | Schaffner -Chase                  | CBL6112B                   | 2966       | 2016-09-08   | 2019-09-07    |
| EMC0519   | Bilog Type Antenna                         | Schaffner -Chase                  | CBL6143                    | 5070       | 2017-05-04   | 2020-05-03    |
| EMC2026   | Horn Antenna 1-18GHz                       | SCHWARZBECK MESS-ELEKTRONIK       | BBHA 9120D                 | 9120D-841  | 2016-09-09   | 2019-09-08    |
| EMC0521   | 1-26.5 GHz Pre-Amplifier                   | Agilent                           | 8449B                      | 3008A01649 | 2017-01-20   | 2018-01-19    |
| EMC2065   | Amplifier                                  | HP                                | 8447F                      | N/A        | 2017-06-19   | 2018-06-18    |
| EMC2086   | PRE AMPLIFIER MH648A                       | ANRITSU CORP                      | MH648A                     | N/A        | 2016-12-02   | 2017-12-01    |
| EMC2063   | Pre-amplifier 1GHz-26GHz                   | Compliance Direction Systems Lnc. | PAP-1G26-48                | 6279.628   | 2016-12-02   | 2017-12-01    |
| EMC0523   | Active Loop Antenna                        | EMCO                              | 6502                       | 42963      | 2016-02-27   | 2018-02-26    |
| EMC2041   | Broad-Band Horn Antenna (14)15-26.5(40)GHz | SCHWARZBECK MESS-ELEKTRONIK       | BBHA 9170                  | 9170-375   | 2017-05-23   | 2020-05-22    |
| EMC2079   | High Pass Filter(915MHz)                   | FSY MICROWAVE                     | HM1465-9SS                 | 009        | 2017-01-20   | 2018-01-19    |
| EMC2069   | 2.4GHz Filter                              | Micro-Tronics                     | BRM 50702                  | 149        | 2017-01-20   | 2018-01-19    |
| EMC0530   | 10m Semi-Anechoic Chamber                  | ETS                               | N/A                        | N/A        | 2016-04-30   | 2018-04-29    |
| EMC0306   | Shielding Room                             | Zhong Yu                          | 8 x 3 x 3.8 m <sup>3</sup> | N/A        | N/A          | N/A           |
| EMC1801   | V-LISN                                     | EM Test/AG                        | NNBM 8125                  | 81251342   | 2016-12-02   | 2017-12-01    |
| EMC1802   | V-LISN                                     | EM Test/AG                        | NNBM 8125                  | 81251345   | 2016-12-02   | 2017-12-01    |
| EMC0506   | EMI Test Receiver                          | Rohde & Schwarz                   | ESCS30                     | 100085     | 2016-12-02   | 2017-12-01    |
| EMC0107   | Coaxial Cable                              | SGS                               | 2m                         | N/A        | 2016-07-24   | 2018-07-23    |
| EMC0106   | Voltage Probe                              | SGS                               | N/A                        | N/A        | 2016-04-05   | 2018-04-04    |
| EMC0069   | Signal Analyzer                            | R&S                               | FSIQ26                     | 100312     | 2016/12/2    | 2017/12/1     |
|           | (20Hz ~ 26.5Ghz)                           |                                   |                            |            |              |               |



| General used equipment |                |              |           |            |              |               |
|------------------------|----------------|--------------|-----------|------------|--------------|---------------|
| No.                    | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. date    | Cal. Due date |
|                        |                |              |           |            | (YYYY-MM-DD) | (YYYY-MM-DD)  |
| EMC0006                | DMM            | Fluke        | 73        | 70681569   | 2017-07-26   | 2018-07-25    |
| EMC0007                | DMM            | Fluke        | 73        | 70671122   | 2017-07-26   | 2018-07-25    |





## 7 Test Results

### 7.1 E.U.T. test conditions

Test Voltage: DC 4.5V (new battery)

Requirements: **15.31(e)**: For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Operating Environment:

Temperature: 22-25.0 °C

Humidity: 48-55% RH

Atmospheric Pressure: 1001-1010 mbar

Test frequencies and frequency range:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

#### Number of fundamental frequencies to be tested in EUT transmit band

| Frequency range in which device operates | Number of frequencies | Location in frequency range of operation    |
|--|-----------------------|---|
| 1 MHz or less                            | 1                     | Middle                                      |
| 1 MHz to 10 MHz                          | 2                     | 1 near top and 1 near bottom                |
| More than 10 MHz                         | 3                     | 1 near top, 1 near middle and 1 near bottom |

#### Frequency range of radiated emission measurements

| Lowest frequency generated in the device | Upper frequency range of measurement  |
|--|---|
| 9 kHz to below 10 GHz                    | 10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower                             |
| At or above 10 GHz to below 30 GHz       | 5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower                             |
| At or above 30 GHz                       | 5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified |

Remark: Test frequency is 433.92MHz.

## 7.2 Antenna Requirement


### Standard requirement

15.203 requirement:

For intentional device. According to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### EUT Antenna

The antenna is a integrated PCB antenna and no consideration of replacement. The maximum gain of the antenna is 0 dBi.

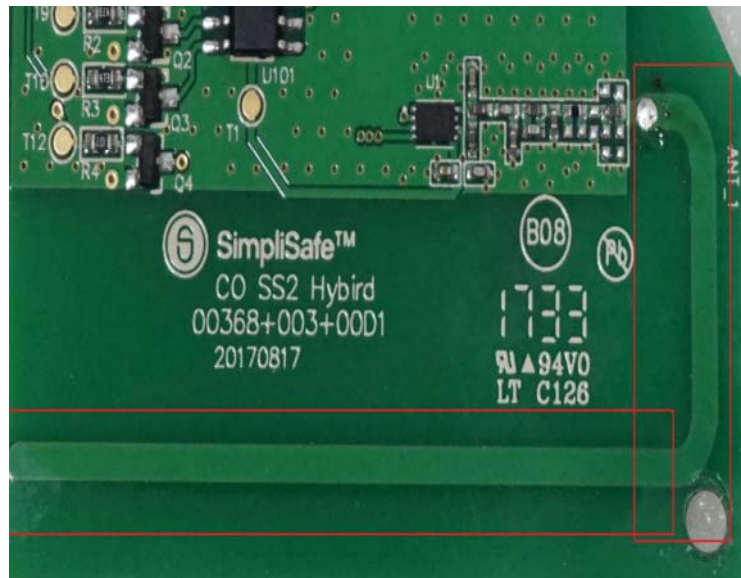

**Test result: The unit does meet the FCC requirements.**



### 7.3 Radiated Emissions

**Test Requirement:** FCC Part15 C section 15.231(b)  
**Test Method:** ANSI C63.10: Clause 6.4, 6.5 and 6.6  
**Measurement Distance:** 3 m (Semi-Anechoic Chamber)  
**Test Status:** Test in transmitting mode.  
**Requirements:** the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

| Fundamental Frequency MHz | Field Strength of Fundamental (dB $\mu$ V/m @ 3 m)  | Field Strength of Harmonics and Spurious Emissions (dB $\mu$ V/m @ 3 m) |
|---------------------------|---|---|
| 40.66 to 40.70            | 67.04   | 47.04   |
| 70 to 130                 | 61.94   | 41.94   |
| 130 to 174                | 61.94 to 71.48  | 41.94 to 51.48  |
| 174 to 260                | 71.48   | 51.48   |
| 260 to 470                | 71.48 to 81.94  | 51.48 to 61.94  |
| Above 470                 | 81.94   | 61.94   |
| <b>Detector:</b>          | Peak for pre-scan<br>QP for 30MHz to1000 MHz:120 kHz resolution bandwidth<br>Peak for Above 1 GHz: 1 MHz resolution bandwidth |   |

\*\* linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz,  $\mu$ V/m at 3 meters =  $56.81818(F) - 6136.3636$ ; for the band 260-470 MHz,  $\mu$ V/m at 3 meters =  $41.6667(F) - 7083.3333$ . The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

The fundamental frequency of the EUT is 433.92 MHz

The limit for average or QP field strength dB $\mu$ V/m for the fundamental emission= 80.8 dB $\mu$ V/m

No fundamental is allowed in the restricted bands.

The limit for average field strength dB $\mu$ V/m for the spurious emission=60.8 dB $\mu$ V/m.Spurious in the restricted bands must be less than 60.8 dB $\mu$ V/m or 15.209, whichever limit permits a higher field strength.



And according 15.35(a)

15.35(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Interference (CISPR) of the International Electrotechnical Commission. As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, as long as the same bandwidths as indicated for CISPR quasi-peak measurements are employed.

Note: For pulse modulated devices with a pulse-repetition frequency of 20 Hz or less and for which CISPR quasi-peak measurements are specified, compliance with the regulations shall be demonstrated using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, using the same measurement bandwidths that are indicated for CISPR quasi-peak measurements.

According to 15.35 (b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.255, and 15.509-15.519 of this part, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.



The average correction factor is computed by analyzing the on time in 100ms over one complete pulse train. Analysis of the remote transmitter on time in one complete pulse train, therefore the average value of fundamental frequency is: Average = Peak value + 20log (Duty cycle), where the duty factor is calculated from following formula:

$$20\log(\text{Duty cycle}) = 20\log(55.5/100) = 20\log(0.555) = -5.11$$

Please refer to below plots for more details.



Test plot

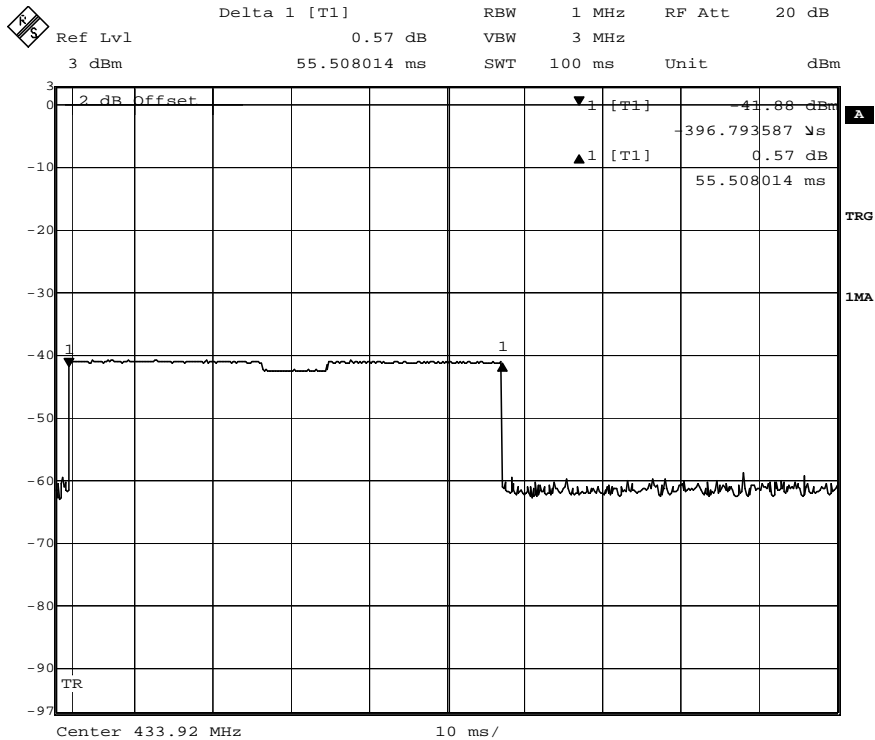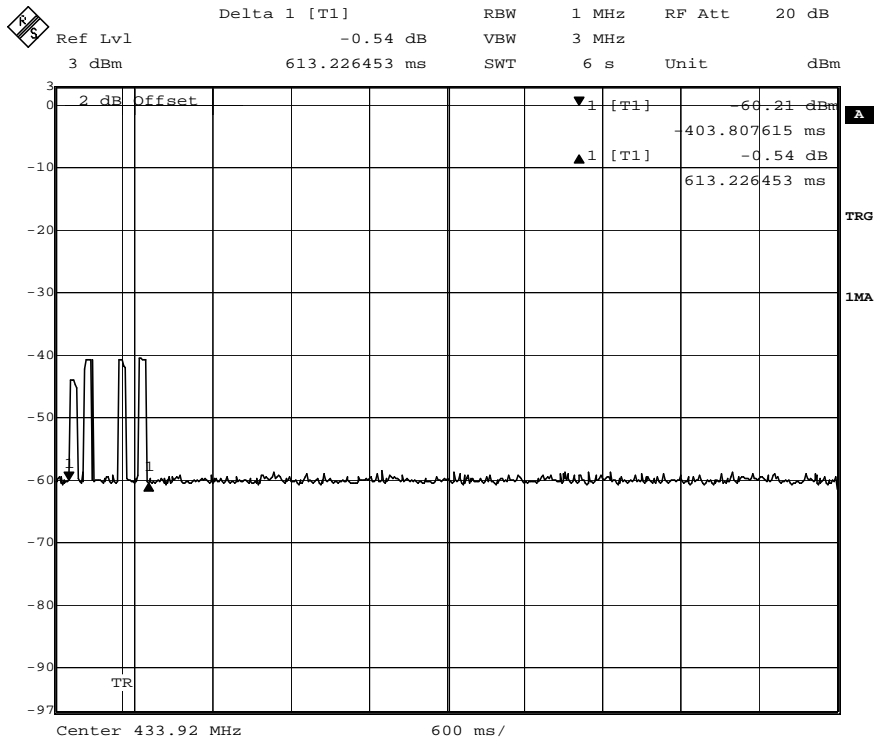



**Test Procedure:**

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 40 GHz emissions:


Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2010 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.


**Detector** For PK value:  
:  
RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz  
VBW  $\geq$  RBW  
Sweep = auto  
Detector function = peak  
Trace = max hold  
For AV value:  
For harmonic emissions:  
Average = Peak value + 20log (Duty cycle),  
For other unwanted emissions:  
RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz  
VBW = 10Hz  
Sweep = auto  
Detector function = peak  
Trace = max hold

**Test Configuration:**

- 1) 9 kHz to 30 MHz emissions:

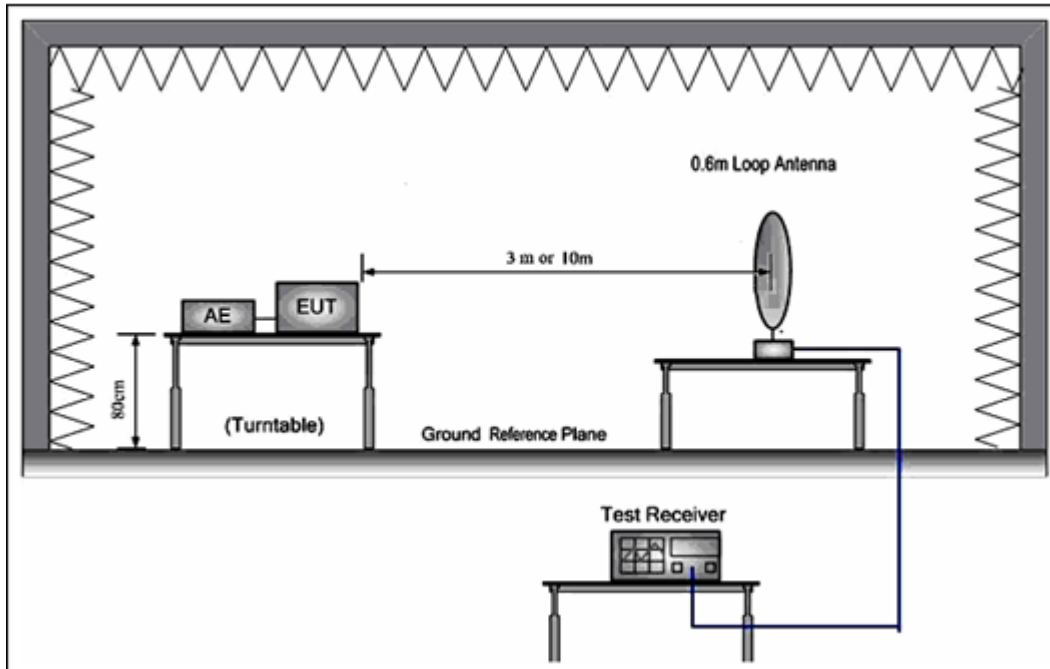


- 2) 30 MHz to 1 GHz emissions:

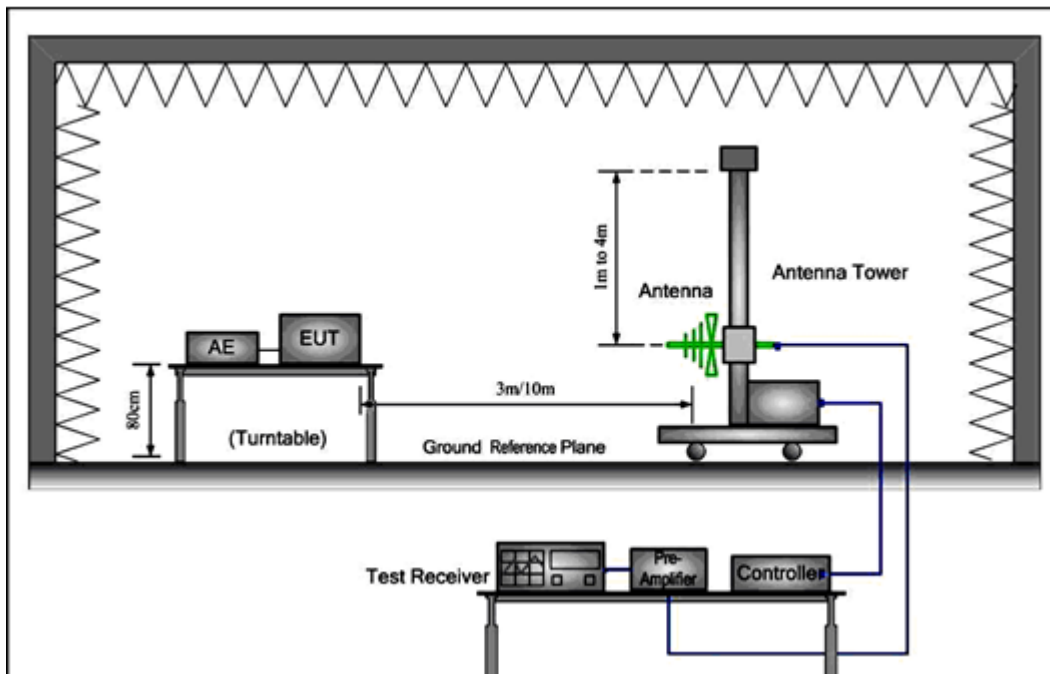



3) 1 GHz to 40 GHz emissions:

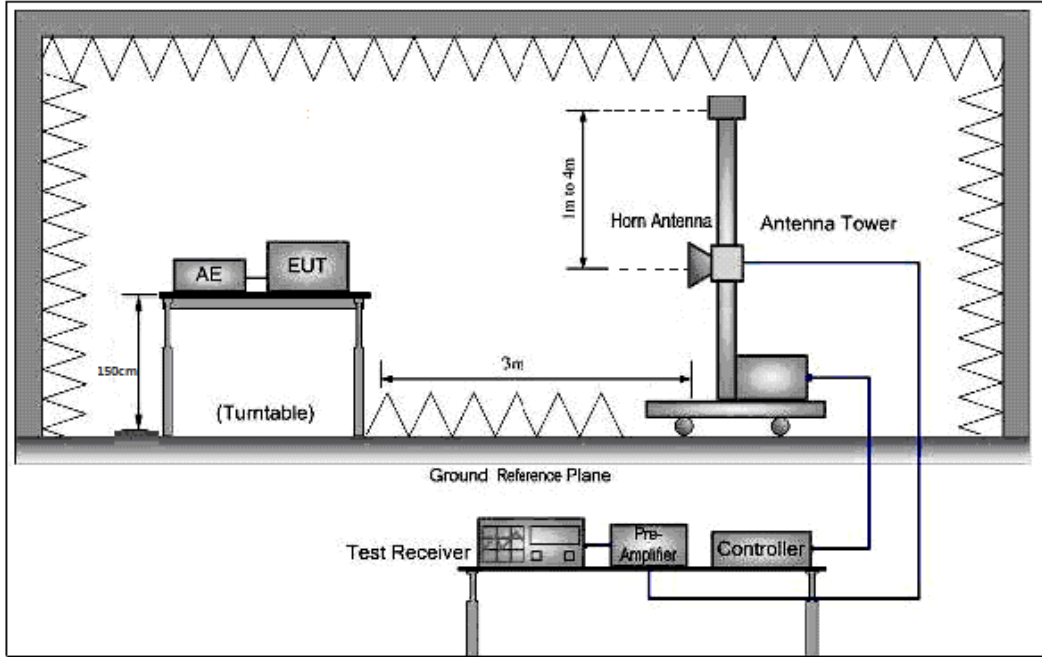

**1) Fundamental emission:**

**Antenna polarization: Horizontal:**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark  |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|---------|
| 433.843         | 83.23             | 16.83                 | 2.30            | 27.42              | 74.94          | 80.80               | -5.86           | Average |
| 433.843         | 88.34             | 16.83                 | 2.30            | 27.42              | 80.05          | 100.80              | -20.75          | Peak    |

**Antenna polarization: Vertical**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark  |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|---------|
| 433.904         | 83.24             | 16.83                 | 2.30            | 27.42              | 74.95          | 80.80               | -5.85           | Average |
| 433.904         | 88.35             | 16.83                 | 2.30            | 27.42              | 80.06          | 100.80              | -20.74          | Peak    |





**2) Other Emissions:**

The receive was scanned from the lowest frequency generated within the EUT to 5 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. The worst case emissions were reported.

An initial pre-scan was performed in the 3 m chamber using the spectrum analyzer in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bilog antenna with 2 orthogonal polarities.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Peramplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Peramplifier Factor.

The following test results were performed on the EUT.

Since the peak emission level is lower than the average limit, the average emission level does not need to show.

Test the EUT in transmitting mode.:

**9 kHz to 30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement**

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

**Radiated emission 30 MHz to 1GHz**

**Horizontal**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------|
| 37.285          | 27.36             | 13.76                 | 0.70            | 27.00              | 14.82          | 40                  | -25.18          | QP     |
| 50.409          | 27.44             | 14.49                 | 0.71            | 27.00              | 15.64          | 40                  | -24.36          | QP     |
| 64.659          | 26.03             | 13.46                 | 0.80            | 27.00              | 13.29          | 40                  | -26.71          | QP     |
| 159.784         | 27.31             | 13.70                 | 1.33            | 26.74              | 15.60          | 43.5                | -27.9           | QP     |
| 285.978         | 31.64             | 13.68                 | 1.75            | 26.40              | 20.67          | 46                  | -25.33          | QP     |
| 869.130         | 59.11             | 23.17                 | 3.10            | 27.70              | 57.68          | 80.8                | -23.12          | Peak   |
| 869.130         | 54.00             | 23.17                 | 3.10            | 27.70              | 52.57          | 60.8                | -8.23           | AV     |

**Vertical**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------|
| 36.001          | 26.15             | 13.81                 | 0.60            | 27.00              | 13.56          | 40.0                | -26.44          | QP     |
| 44.743          | 27.01             | 14.10                 | 0.70            | 27.00              | 14.81          | 40.0                | -25.19          | QP     |
| 70.090          | 28.44             | 12.70                 | 0.90            | 27.00              | 15.04          | 40.0                | -24.96          | QP     |
| 166.651         | 27.31             | 13.40                 | 1.37            | 26.72              | 15.36          | 43.5                | -28.14          | QP     |
| 292.058         | 28.19             | 13.79                 | 1.78            | 26.40              | 17.36          | 46.0                | -28.64          | QP     |
| 869.130         | 46.69             | 23.17                 | 3.10            | 27.70              | 45.26          | 80.8                | -35.54          | Peak   |
| 869.130         | 41.58             | 23.17                 | 3.10            | 27.70              | 40.15          | 60.8                | -20.65          | AV     |



**Radiated Emission above 1GHz**

**Horizontal**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark  |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|---------|
| 2172.398        | 52.50             | 25.59                 | 6.50            | 39.03              | 45.56          | 80.80               | -35.24          | Peak    |
| 2608.020        | 57.00             | 26.81                 | 7.20            | 39.18              | 51.83          | 80.80               | -28.97          | Peak    |
| 3031.626        | 56.41             | 27.90                 | 7.76            | 39.44              | 52.63          | 80.80               | -28.17          | Peak    |
| 3473.883        | 62.26             | 27.90                 | 8.36            | 39.88              | 58.64          | 80.80               | -22.16          | Peak    |
| 3916.979        | 66.19             | 29.32                 | 8.91            | 40.05              | 57.37          | 74.00               | -16.63          | Peak    |
| 4345.943        | 65.16             | 29.96                 | 9.46            | 40.14              | 57.44          | 74.00               | -16.56          | Peak    |
| 2172.398        | 47.39             | 25.59                 | 6.50            | 39.03              | 40.45          | 60.80               | -20.35          | Average |
| 2608.020        | 51.89             | 26.81                 | 7.20            | 39.18              | 46.72          | 60.80               | -14.08          | Average |
| 3031.626        | 51.30             | 27.90                 | 7.76            | 39.44              | 47.52          | 60.80               | -13.28          | Average |
| 3473.883        | 57.15             | 27.90                 | 8.36            | 39.88              | 53.53          | 60.80               | -7.27           | Average |
| 3916.979        | 54.08             | 29.32                 | 8.91            | 40.05              | 52.26          | 54.00               | -1.74           | Average |
| 4345.943        | 53.05             | 29.96                 | 9.46            | 40.14              | 52.33          | 54.00               | -1.67           | Average |

**Vertical**

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark  |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|---------|
| 2172.398        | 47.41             | 25.59                 | 6.50            | 39.03              | 40.47          | 80.80               | -40.33          | Peak    |
| 2608.020        | 55.56             | 26.81                 | 7.20            | 39.18              | 50.39          | 80.80               | -30.41          | Peak    |
| 3031.626        | 55.26             | 27.90                 | 7.76            | 39.44              | 51.48          | 80.80               | -29.32          | Peak    |
| 3473.883        | 58.84             | 27.90                 | 8.36            | 39.88              | 55.22          | 80.80               | -25.58          | Peak    |
| 3916.979        | 59.59             | 29.32                 | 8.91            | 40.05              | 57.77          | 74.00               | -16.23          | Peak    |
| 4345.943        | 55.97             | 29.96                 | 9.46            | 40.14              | 55.25          | 74.00               | -18.75          | Peak    |
| 2172.398        | 42.30             | 25.59                 | 6.50            | 39.03              | 35.36          | 60.80               | -25.44          | Average |
| 2608.020        | 50.45             | 26.81                 | 7.20            | 39.18              | 45.28          | 60.80               | -15.52          | Average |
| 3031.626        | 50.15             | 27.90                 | 7.76            | 39.44              | 46.37          | 60.80               | -14.43          | Average |
| 3473.883        | 53.73             | 27.90                 | 8.36            | 39.88              | 50.11          | 60.80               | -10.69          | Average |
| 3916.979        | 54.48             | 29.32                 | 8.91            | 40.05              | 52.66          | 54.00               | -1.34           | Average |
| 4345.943        | 50.86             | 29.96                 | 9.46            | 40.14              | 50.14          | 54.00               | -3.86           | Average |

**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



### 7.4 Occupied Bandwidth


Test Requirement: FCC Part 15 C section 15.231 (c)  
 Test Method: ANSI C63.10: Clause 6.9  
 Test Status: Test in transmitting mode at lowest and highest channel.  
 Requirements: 15.231 (c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Method of measurement: The useful radiated emission from the EUT was detected by the spectrum analyzer with peak detector. Record the 20 dB bandwidth of the carrier.

Test result:


| Test Channel | bandwidth | Limit    |
|--------------|-----------|----------|
| 433.91MHz    | 32.87 kHz | 1.08 MHz |

Test plot:

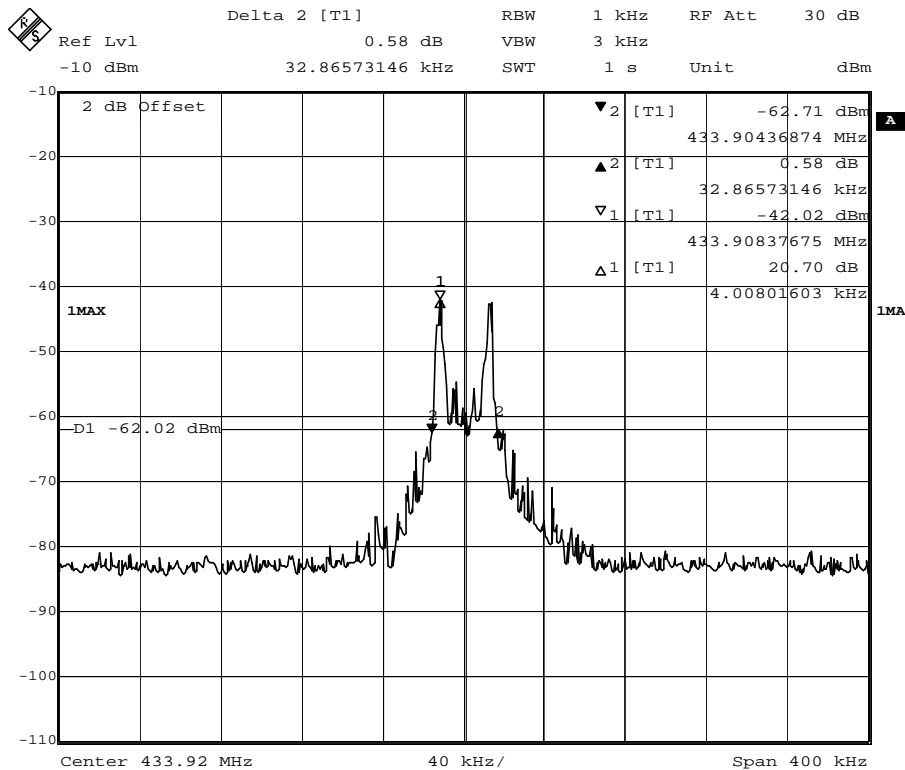

**7.5 Dwell Time:**

Test Requirement: FCC Part 15 C section 15.231(a)  
 Test Method: FCC Part 15 C section 15.231(a)  
 Test Setup:

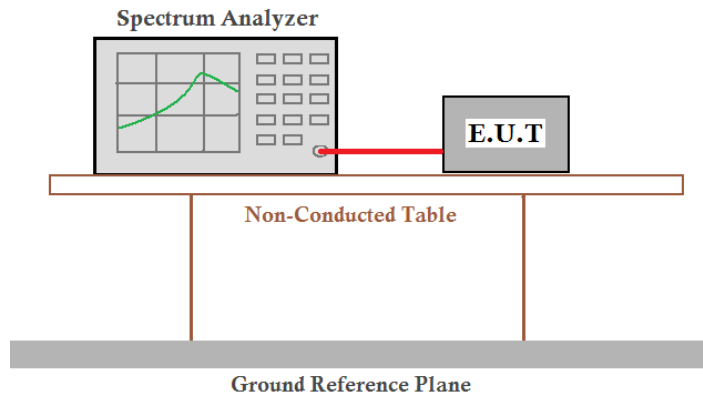

Test Status: Test in transmitting mode.

**Requirements:**

**1. Regulation 15.231 (a)** The provisions of this Section are restricted to periodic operation within the band 40.66 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.

**Result:**

The EUT is a remote switch without audio or video transmitted.

The EUT meets the requirements of this section.



**2. Regulation 15.231 (a1)** A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

**Result:**

| Carrier Frequency | Shutdown Time | Limit |
|-------------------|---------------|-------|
| 433.92MHz         | 222.0ms       | ≤5s   |



Result plot as follows:

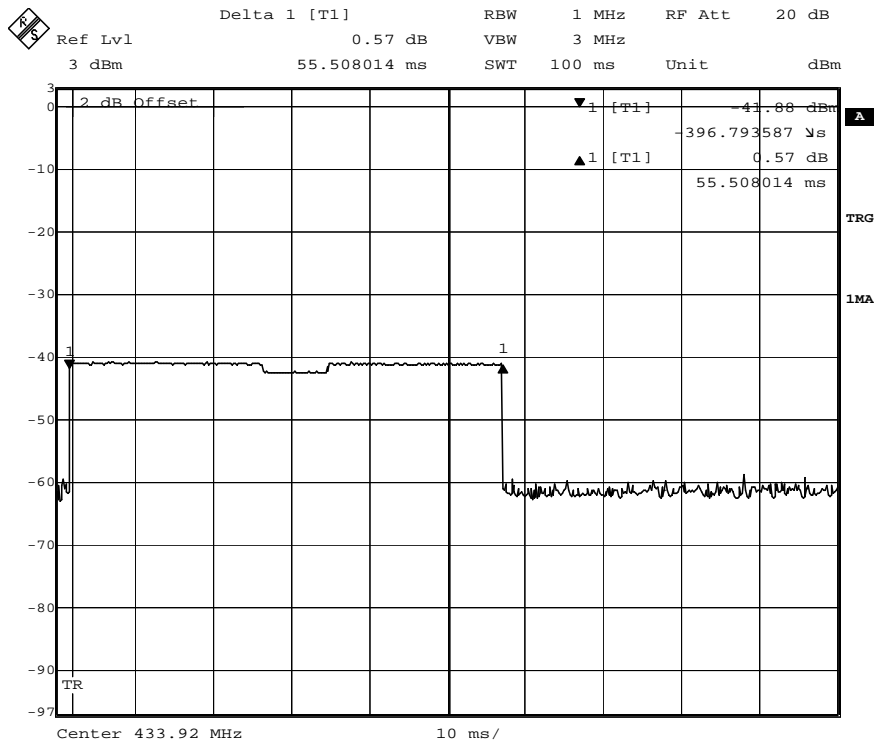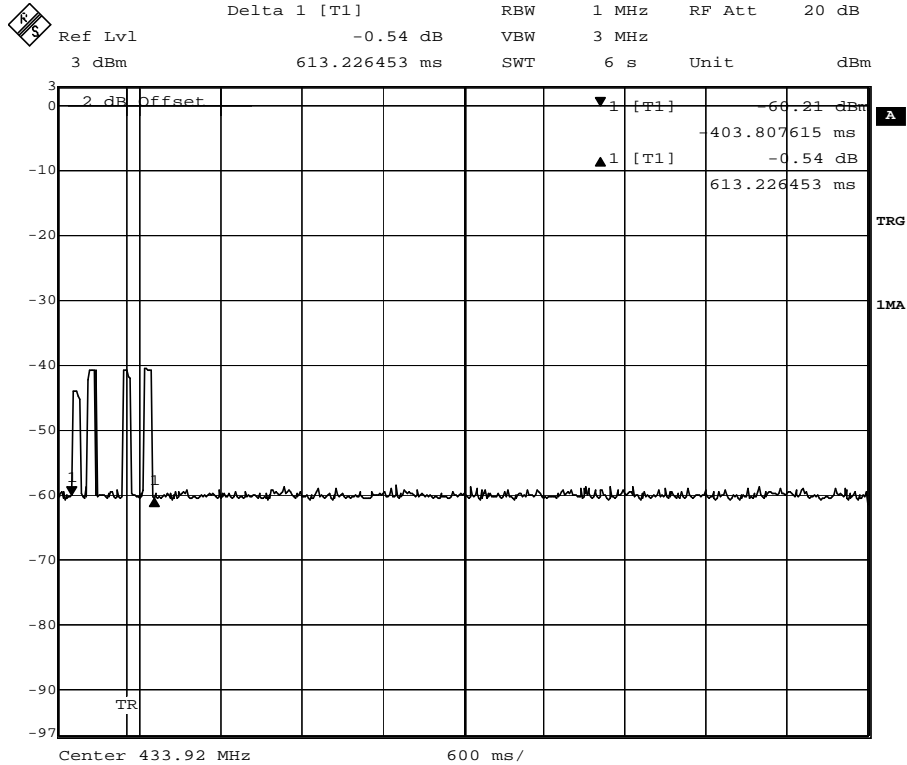



**3. Regulation 15.231 (a2)** A transmitter activated automatically shall cease transmission within 5 seconds after activation.

**Result:**

The EUT does not have automatic transmission.

**4. Regulation 15.231 (a3)** Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

**Result:**

The EUT does not employ periodic transmission.

**5. Regulation 15.231 (a4)** Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

**Result:**

This section is not applicable to the EUT.

**--The End of Report--**