

**FCC Part 15.247  
Transmitter Certification**

**Test Report**

**FCC ID: U90-RFET**

**FCC Rule Part: 15.247**

**ACS Report Number: 07-0157-15C-RFET**

Manufacturer: Wireless Control Network Solutions, LLC.; dba Synapse  
Brand Name: RF Engine  
Model: RFET

Test Begin Date: April 23, 2007


Test End Date: May 1, 2007


Report Issue Date: May 3, 2007



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report is not be used to claim certification, approval, or endorsement by NVLAP, NIST or any government agency.

Prepared by:   
**J. Kirby Munroe**  
Manager Wireless Certifications  
ACS, Inc.

Reviewed by:   
**R. Sam Wismer**  
Engineering Manager  
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

**This report contains 22 pages**

# Table of Contents

---

<b>1.0 General</b>	3
1.1 Purpose	3
1.2 Product Description	3
1.2.1 General	3
1.2.2 Intended Use	3
1.3 Test Methodology and Considerations	3
1.4 Antenna Information	3
1.5 Test Sample Identification	3
<b>2.0 Test Facilities</b>	4
2.1 Location	4
2.2 Laboratory Accreditations/Recognitions/Certifications	4
2.3 Radiated Emissions Test Site Description	5
2.3.1 Semi-Anechoic Chamber Test Site	5
2.3.2 Open Area Tests Site (OATS)	6
2.4 Conducted Emissions Test Site Description	7
<b>3.0 Applicable Standards and References</b>	8
<b>4.0 List of Test Equipment</b>	8
<b>5.0 Support Equipment</b>	9
<b>6.0 EUT Setup Block Diagram</b>	9
<b>7.0 Summary of Tests</b>	10
7.1 Section 15.203 - Antenna Requirement	10
7.2 Section 15.207 - Power Line Conducted Emissions	10
7.2.1 Test Methodology	10
7.2.2 Test Results	10
7.3 Section 15.109 - Radiated Emissions (Unintentional Radiation)	11
7.3.1 Test Methodology	11
7.3.2 Test Results	11
7.4 Section 15.247(a)(2) – 6 dB Bandwidth	12
7.4.1 Test Methodology	12
7.4.1 Test Results	12
7.5 Section 15.247(b) – Peak Output Power	14
7.5.1 Test Methodology	14
7.5.2 Test Results	14
7.6 Section 15.247(c) – Band-Edge Compliance and Spurious Emissions	16
7.6.1 Section 15.247 (c) – Band-Edge Compliance	16
7.6.1.1 Test Methodology	16
7.6.1.2 Test Results	16
7.6.2 Section 15.247(c) – Conducted Spurious Emissions	18
7.6.2.1 Test Methodology	18
7.6.2.2 Test Results	18
7.6.3 Section 15.247(c) – Radiated Spurious Emissions	19
7.6.3.1 Test Methodology	19
7.6.3.2 Duty Cycle Correction	19
7.6.3.3 Test Results	19
7.6.3.4 Sample Calculation	20
7.7 Section 15.247(d) – Power Spectral Density	21
7.7.1 Test Methodology	21
7.7.2 Test Results	21
<b>8.0 CONCLUSION</b>	22

## Additional Exhibits Included In Filing

<b>Internal Photographs</b>	<b>Installation/Users Guide</b>
<b>Test Setup Photographs</b>	<b>Theory of Operation</b>
<b>Product Labeling</b>	<b>BOM (Parts List)</b>
<b>RF Exposure – MPE Calculations</b>	<b>System Block Diagram</b>
<b>Schematics</b>	

---

## 1.0 GENERAL

### 1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15, Subpart C of the FCC's Code of Federal Regulations.

### 1.2 Product Description

#### 1.2.1 General

The Synapse RF Engine is an IEEE 802.15.4 compliant RF module. There are 16 total channels of operation in this band. The first channel is centered at 2.405GHz and the last channel is centered at 2.480GHz. These RF modules use a direct sequence spread spectrum transmission with O-QPSK modulation.

#### Manufacturer Information:

Wireless Control Network Solutions, LLC. ; dba Synapse  
132 Export Circle  
Huntsville, Alabama 35806

#### 1.2.2 Intended Use

These RF modules are intended to be used by Original Equipment Manufacturers (OEM) and Integrators in order to add RF wireless communication to their products. These RF modules would be plugged in to their host board which would contain the OEM product offering.

### 1.3 Test Methodology and Considerations

For the purpose of providing a suitable test configuration, the RF Engine module was tested using a support board. The support board was provided by the manufacturer as the host board for powering the RF Engine for FCC certification. With the RF Engine plugged in to the support board, the board provided two functions for the RF Engine. First, it provided the operating power for the RF Engine thru the user accessible pins on the RF Engine which provide power to the module. Secondly, the support board provided a user button function that drives a user input pin on the RF Engine.

There are two versions of the RF Engine, one without an external power amplifier on the transmitter (FCC ID: U90-RFE) and one with an external power amplifier on the transmitter (FCC ID: U90-RFET). The information in this report only references the RF Engine model RFET with external amplifier under FCC ID: U90-RFET. RF Engine model RFE without external amplifier is covered under a separate equipment authorization and report.

RF Engine model RFET with external amplifier is available in two configurations. The first configuration of the module is with an integrated F antenna and the second configuration of the module is with a reverse polarity SMA connector for use with an external antenna. Both configurations are electrically identical in design and construction with the exception of the antenna. This report covers both antenna configurations with data provided for each antenna type of the highest gain.

### 1.4 Antenna Information

Integrated F antenna (PCB): 0 dBi (Test Data Provided)

Omni-directional Dipole - Manufacturer: Nearson, Part # S151AH-2450S, Gain: 5 dBi (Test Data Provided)

Omni-directional Dipole - Manufacturer: Pulse, Part # W1038, Gain: 4.9 dBi

### 1.5 Test Sample Identification

Synapse 200101.01 Rev C, WO# 98690006 (F Antenna)

Synapse 200101.01 Rev C, WO# 98690007 (F Antenna)

Synapse 200100.01 Rev C, WO# 98680124 (RSMA Connector)

## 2.0 TEST FACILITIES

### 2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions  
5015 B.U. Bowman Drive  
Buford, GA 30518  
Phone: (770) 831-8048  
Fax: (770) 831-8598

### 2.2 Laboratory Accreditations/Recognitions/Certifications

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment. In addition, ACS is compliant to ISO 17025 as certified by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program. The following certification numbers have been issued in recognition of these accreditations and certifications:

FCC Registration Number: 89450  
Industry Canada Lab Code: IC 4175  
VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

NVLAP Lab Code: 200612-0

**2.3 Radiated Emissions Test Site Description**

**2.3.1 Semi-Anechoic Chamber Test Site**


The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

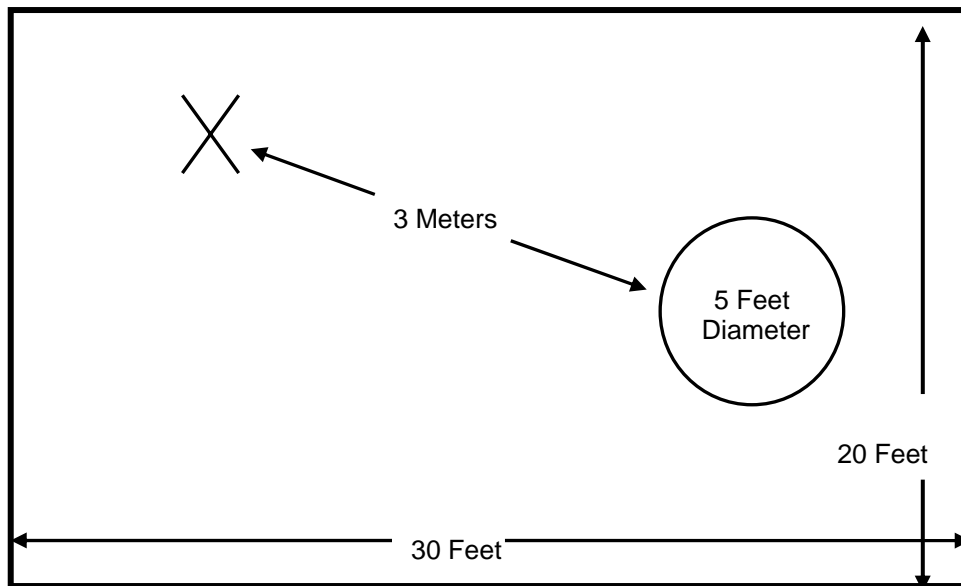

**Figure 2.3-1: Semi-Anechoic Chamber Test Site**

**2.3.2 Open Area Tests Site (OATS)**


The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

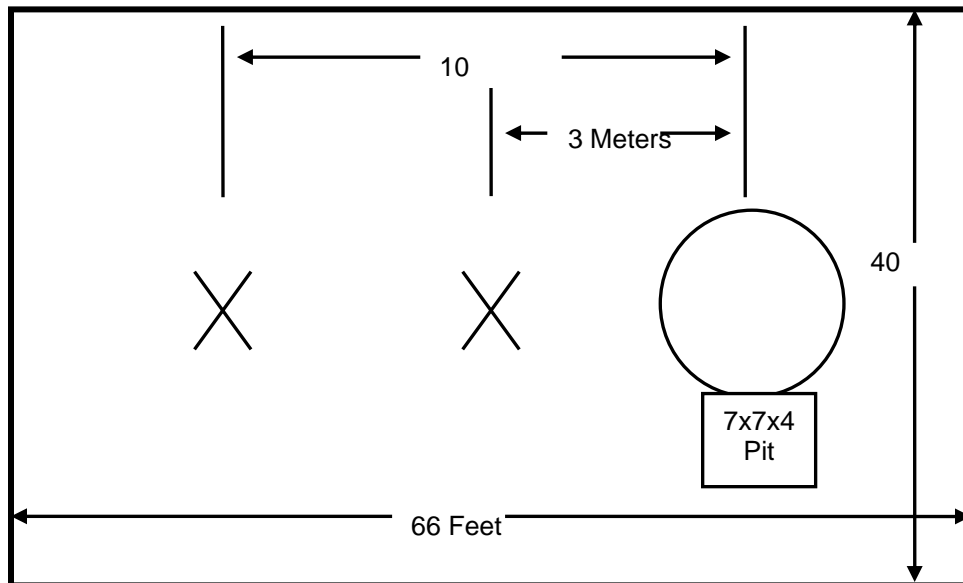

**Figure 2.3-2: Open Area Test Site**

## 2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal group reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

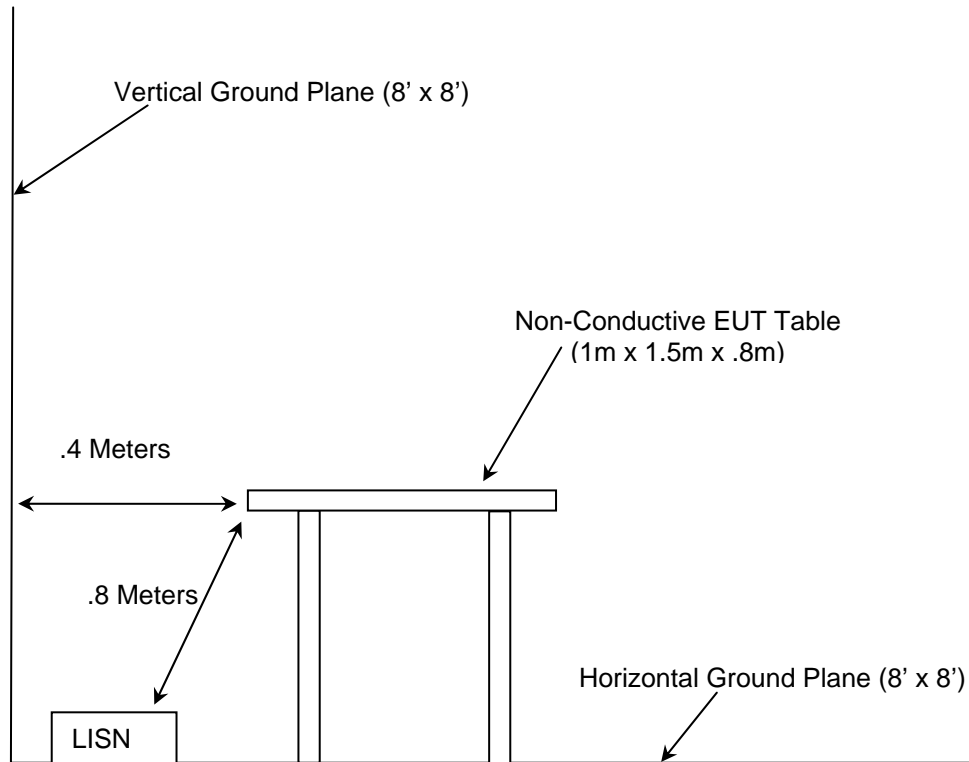


Figure 2.4-1: AC Mains Conducted EMI Site

## 3.0 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2006
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2006
- ❖ FCC OET Bulletin 65 Appendix C - Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, 2001
- ❖ FCC KDB Publication No. 558074 - Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247), March 2006

**4.0 LIST OF TEST EQUIPMENT**

All test equipment used for regulatory testing is calibrated yearly or according to manufacturer's specifications.

**Table 4-1: Test Equipment**

AssetID	Manufacturer	Model Number	Serial Number	Equipment Type	Cal Due
1	Rohde & Schwarz	ESMI - Display	833771/007	Spectrum Analyzers	03/05/08
2	Rohde & Schwarz	ESMI-Receiver	839587/003	Spectrum Analyzers	03/05/08
16	ACS	Cable	16	Cables	05/10/07
25	Chase	CBL6111	1043	Antennas	05/30/07
30	Spectrum Technologies	DRH-0118	970102	Antennas	05/09/07
70	Rohde & Schwarz	ESH-3	879676/050	Spectrum Analyzers	08/09/07
73	Agilent	8447D	2727A05624	Amplifiers	05/10/07
152	EMCO	3825/2	9111-1905	LISN	02/20/08
167	ACS	Chamber EMI Cable Set	167	Cables	01/05/08
168	Hewlett Packard	11947A	44829	Attenuators	03/13/08
253	Florida RF Labs	Lab-Flex 290	253	Cables	08/01/07
282	Microwave Circuits	H2G020G4	74541	Filters	03/12/08
283	Rohde & Schwarz	FSP40	1000033	Spectrum Analyzers	11/09/08
290	Florida RF Cables	SMSE-200-72.0-SMRE	None	Cables	05/03/07
291	Florida RF Cables	SMRE-200W-12.0-SMRE	None	Cables	05/03/07
292	Florida RF Cables	SMR-290AW-480.0-SMR	None	Cables	05/24/07
329	A.H.Systems	SAS-571	721	Antennas	08/24/07
338	Hewlett Packard	8449B	3008A01111	Amplifiers	09/26/07
340	Aeroflex/Weinschel	AS-20	7136	Attenuators	08/29/07



5.0 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Manufacturer	Equipment Type	Model Number	Serial Number	FCC ID
1	Synapse	Host PCB	ED111F5-85	NA	NA
2	Triad	Power Supply	WDU6-300	NA	NA

6.0 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

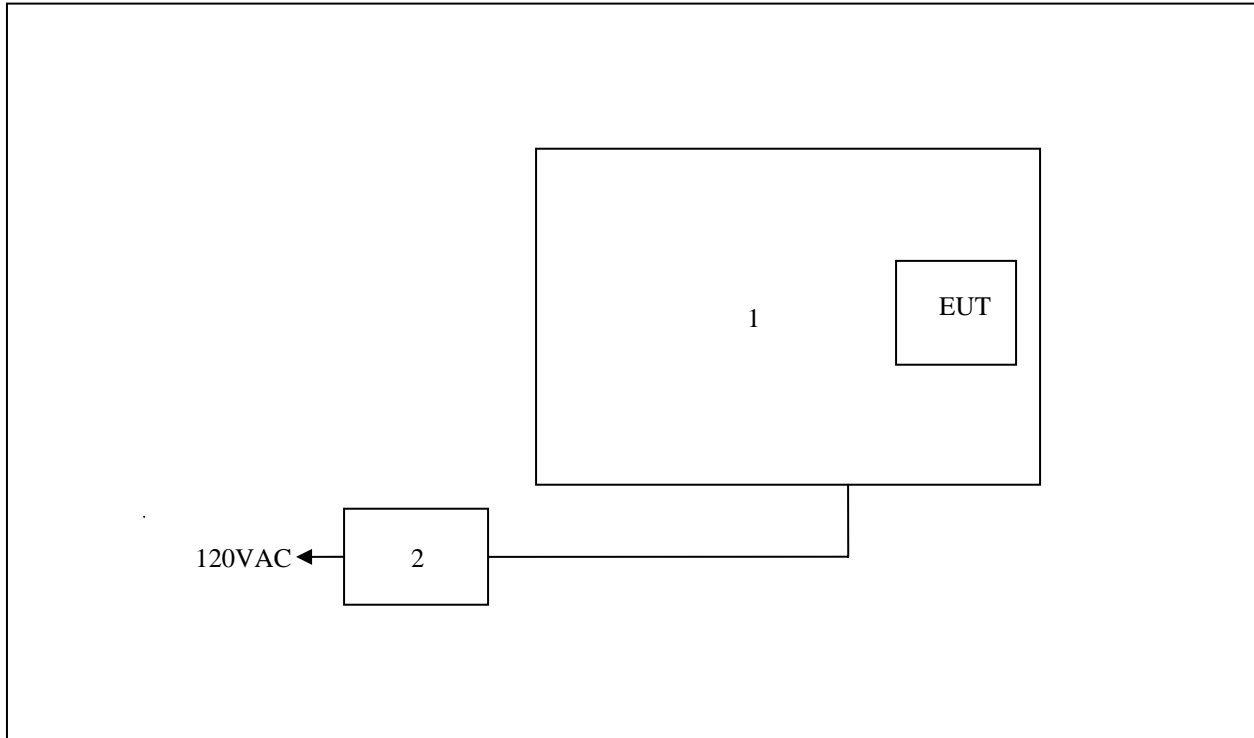


Figure 6-1: EUT Test Setup

\*See Test Setup photographs for additional detail.

**7.0 SUMMARY OF TESTS**

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

**7.1 Antenna Requirement - FCC Section 15.203**

The RFET utilizes either an integrated PCB F antenna or a reverse polarity SMA jack. See section 1.4.

**7.2 Power Line Conducted Emissions - FCC Section 15.207**

**7.2.1 Test Methodology**

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer’s resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

**Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss**  
**Margin = Applicable Limit - Corrected Reading**

**7.2.2 Test Results**

Results of the test are shown below in and Tables 7.2-1 to Table 7.2.2.

**Table 7.2-1: Conducted EMI Results – Integrated F Antenna**

Frequency (MHz)	Uncorrected Reading (dBuV)		Total Correction Factor (dB)	Corrected Level (dBuV)		Limit (dBuV)		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
<b>Line 1</b>									
0.15	24.5	3	9.80	34.30	12.80	66.00	56.00	31.7	43.2
0.18	23.5	9.8	9.80	33.30	19.60	64.49	54.49	31.2	34.9
0.31	21.4	1.6	9.80	31.20	11.40	59.97	49.97	28.8	38.6
0.66	18.7	0.6	9.80	28.50	10.40	56.00	46.00	27.5	35.6
5.53	7.4	-1.9	9.81	17.21	7.91	60.00	50.00	42.8	42.1
24.29	2.4	-1.9	10.20	12.60	8.30	60.00	50.00	47.4	41.7
<b>Line 2</b>									
0.15	23.9	2.9	9.80	33.70	12.70	66.00	56.00	32.3	43.3
0.18	23	9.5	9.80	32.80	19.30	64.49	54.49	31.7	35.2
0.23	20.9	1.6	9.80	30.70	11.40	62.45	52.45	31.7	41.0
0.56	14.8	0.2	9.80	24.60	10.00	56.00	46.00	31.4	36.0
0.63	13	0.1	9.80	22.80	9.90	56.00	46.00	33.2	36.1
0.69	10.8	-0.7	9.80	20.60	9.10	56.00	46.00	35.4	36.9

**Table 7.2-2: Conducted EMI Results – Nearson Dipole**

Frequency (MHz)	Uncorrected Reading (dBuV)		Total Correction Factor (dB)	Corrected Level (dBuV)		Limit (dBuV)		Margin (dB)	
	Quasi-Peak	Average		Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
<b>Line 1</b>									
0.15	24	2.2	9.80	33.80	12.00	66.00	56.00	32.2	44.0
0.21	21.6	1.6	9.80	31.40	11.40	63.21	53.21	31.8	41.8
0.3	20.6	3	9.80	30.40	12.80	60.24	50.24	29.8	37.4
0.37	18.1	0.6	9.80	27.90	10.40	58.50	48.50	30.6	38.1
0.56	18.9	0.6	9.80	28.70	10.40	56.00	46.00	27.3	35.6
0.66	18.3	0.6	9.80	28.10	10.40	56.00	46.00	27.9	35.6
<b>Line 2</b>									
0.15	29.7	2.7	9.80	39.50	12.50	66.00	56.00	26.5	43.5
0.23	20.2	1.4	9.80	30.00	11.20	62.45	52.45	32.4	41.2
0.3	18.7	0.8	9.80	28.50	10.60	60.24	50.24	31.7	39.6
0.35	16.9	0.4	9.80	26.70	10.20	58.96	48.96	32.3	38.8
0.47	12.4	-0.4	9.80	22.20	9.40	56.51	46.51	34.3	37.1
0.59	13.7	-0.4	9.80	23.50	9.40	56.00	46.00	32.5	36.6

### 7.3 Radiated Emissions - FCC Section 15.109(Unintentional Radiation)

#### 7.3.1 Test Methodology

Radiated emissions tests were performed over the frequency range of 30MHz to 12.5 GHz. Measurements of the radiated field strength were made at a distance of 3m from the boundary of the equipment under test (EUT) and the receiving antenna. The antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. Radiated measurements were made with the Spectrum Analyzer's resolution bandwidth set to 120 KHz for measurements above 30MHz. Average measurements are taken with the RBW and VBW were set to 1MHz and 10 Hz respectively for measurements above 1000MHz.

#### 7.3.2 Test Results

Results of the test are given in Table 7.3-1 and Table 7.3-2 below:

**Table 7.3-1: Radiated Emissions Tabulated Data – Integrated F Antenna**

Frequency MHz	Level dB $\mu$ V/m	Transducer dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg
37.94	9.96	-10.99	40.0	30.04	123	254
118.38	7.31	-13.33	43.5	36.19	160	294
346.80	12.27	-8.96	46.0	33.73	137	118
494.11	16.88	-5.82	46.0	29.12	156	269
648.37	19.82	-2.55	46.0	26.18	146	63
951.49	24.93	3.04	46.0	21.07	160	360

\* Note: All emissions above 951.49 MHz were attenuated below the permissible limit.

**Table 7.3-2: Radiated Emissions Tabulated Data – Nearson Dipole**

Frequency MHz	Level dB $\mu$ V/m	Transducer dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg
326.47	11.43	-10.07	46.0	34.57	155	114
382.28	25.36	-8.01	46.0	20.64	100	360
406.16	22.33	-7.13	46.0	23.67	100	10
535.74	17.49	-4.99	46.0	28.51	145	145
696.96	20.13	-1.99	46.0	25.87	164	45
941.46	24.61	2.57	46.0	21.39	169	97

\* Note: All emissions above 941.46 MHz were attenuated below the permissible limit.

**7.4 6dB Bandwidth – FCC Section 15.247(a)**

**7.4.1 Test Methodology**


The 6dB bandwidth was measured in accordance with the FCC KDB Publication No. 558074 “Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)”. The RBW of the spectrum analyzer was set to 100 kHz and VBW 300 kHz. Span was set large enough to capture the entire emissions and >> RBW.

**7.4.2 Test Results**

The minimum 6dB bandwidth is at least 500 kHz. Results are shown below in table 7.4.2-1 and figure 7.4.2-1 to 7.4.2-3:

**Table 7.4.2-1: 6dB Bandwidth**

Frequency [MHz]	Bandwidth [MHz]
2405	1.61
2440	1.60
2480	1.60

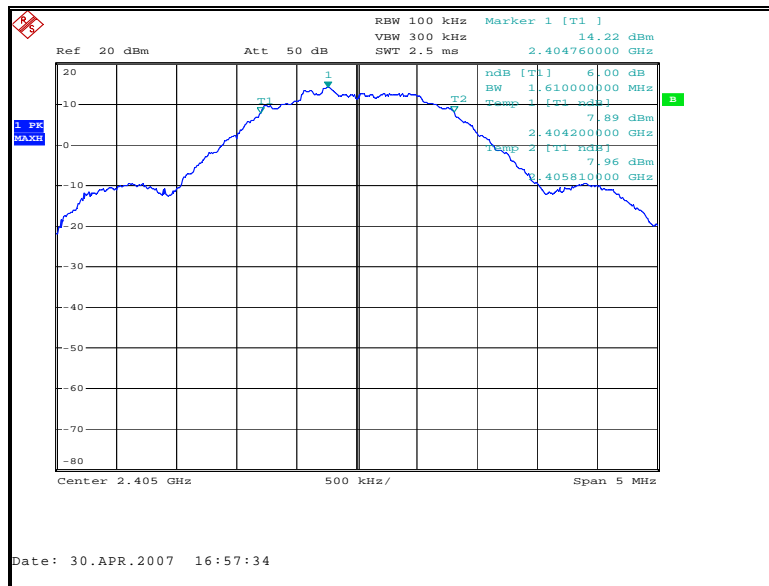

**Figure 7.4.2-1: 6dB Bandwidth Plot – Low Channel**

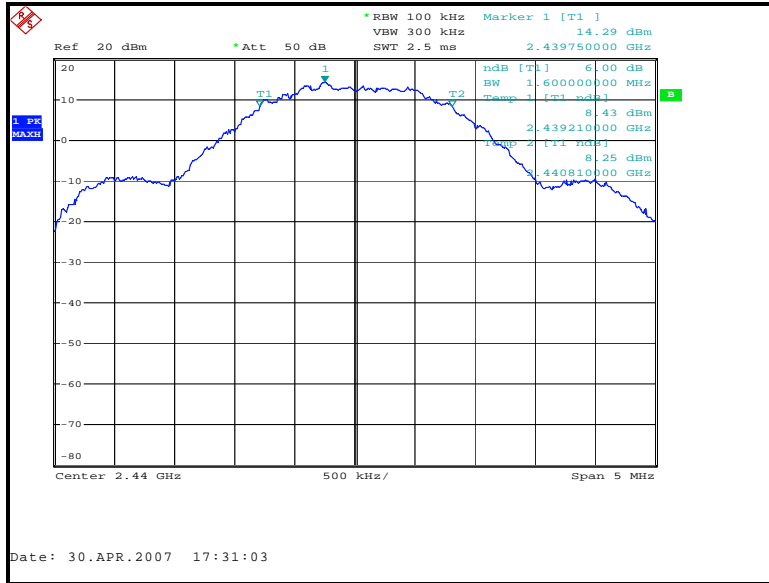


Figure 7.4.2-2: 6dB Bandwidth Plot – Mid Channel

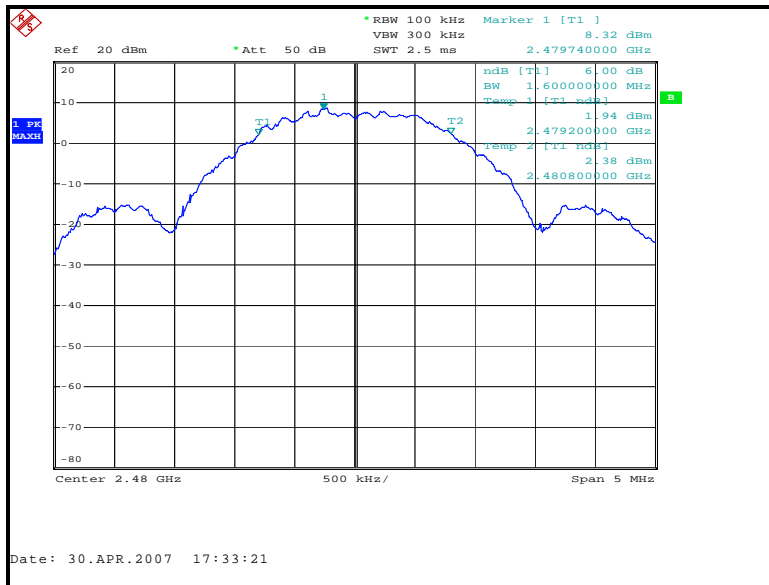


Figure 7.4.2-3: 6dB Bandwidth Plot – High Channel

**7.5 Peak Output Power Requirement - FCC Section 15.247(b)**

**7.5.1 Test Methodology**

The Peak Output Power was measured in accordance with the FCC KDB Publication No. 558074 "Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)" Power Option 1. The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer.


Data was collected with the EUT operating at maximum power.

**7.5.2 Test Results**

The maximum peak conducted output power is less than 1W. Results are shown below in Table 7.5.2-1 and Figures 7.5.2-1 to 7.5.2-3.

**Table 7.5.2-1: Peak Output Power**

Frequency (MHz)	Output Power (dBm)
2405	16.80
2440	17.19
2480	11.48

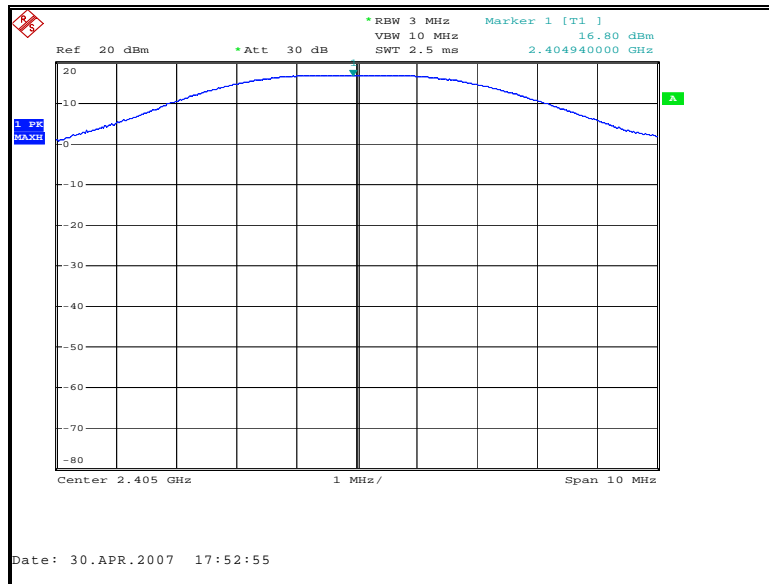

**Figure 7.5.2-1: Output power – Low Channel**

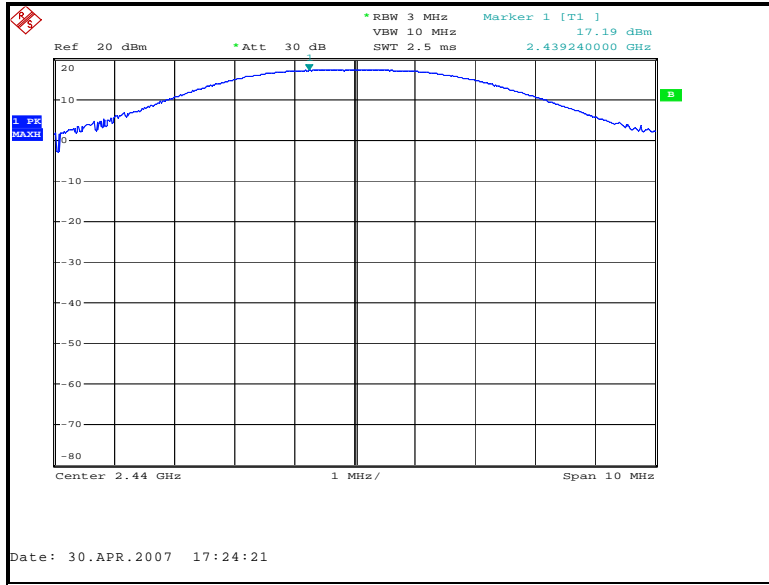


Figure 7.5.2-2: Output power – Mid Channel

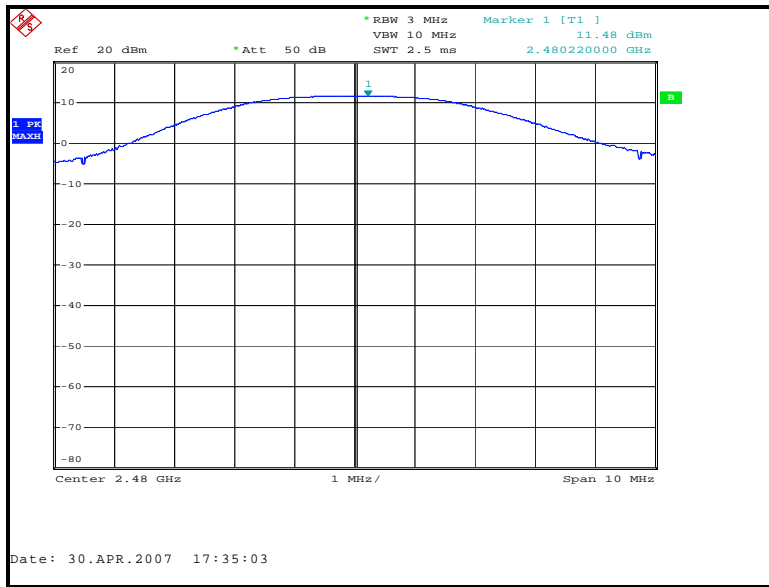


Figure 7.5.2-3: Output power – High Channel

7.6 Band-Edge Compliance and Spurious Emissions - FCC Section 15.205, 15.209, 15.247(d)

7.6.1 Band-Edge Compliance of RF Emissions

7.6.1.1 Test Methodology

The EUT was investigated at the low and high channels of operation to determine band-edge compliance. All antenna types were evaluated. Because the upper band-edge coincides with a restricted band, band-edge compliance for the upper band-edge was determined using the radiated mark-delta method as outlined in FCC DA 00-705. The radiated field strength of the fundamental emission was first determined and then the mark-delta method was used to determine the field strength of the band-edge emissions.

The lower band-edge compliance was determined using the marker-delta method in which the radio frequency power that is produced by the EUT is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

7.6.1.2 Test Results

Band-edge compliance is displayed in Table 7.6.1.2-1 and 7.6.1.2-2 as well as Figures 7.6.1.2-1 – 7.6.1.2-3.

Table 7.6.1.2-1: Upper Band-edge Marker Delta Method – F Antenna

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Fundamental Field Strength (dBuV/m)		Delta-Marker (dB)	Band-edge Field Strength (dBuV/m)		Margin to Limit (dBuV/m)	
	pk	avg			pk	avg		pk	avg	pk	avg
Fundamental Frequency											
2480	116.25	116.25	V	-6.28	109.97	83.93	39.29	70.68	44.64	3.32	9.36

Table 7.6.1.2-2: Upper Band-edge Marker Delta Method – Nearson Dipole 5dBi

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Fundamental Field Strength (dBuV/m)		Delta-Marker (dB)	Band-edge Field Strength (dBuV/m)		Margin to Limit (dBuV/m)	
	pk	avg			pk	avg		pk	avg	pk	avg
Fundamental Frequency											
2480	116.82	116.82	V	-6.28	110.54	84.50	36.82	73.72	47.68	0.28	6.32

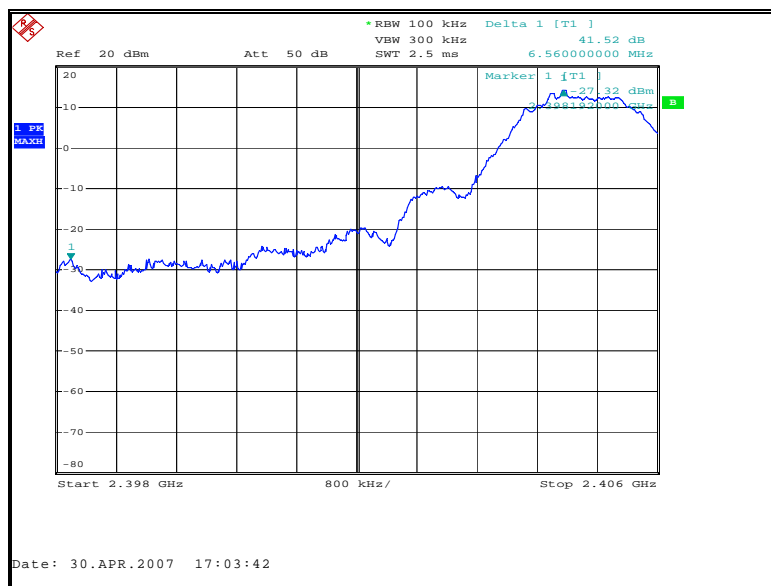


Figure 7.6.1.2-1: Lower Band-edge (Conducted)



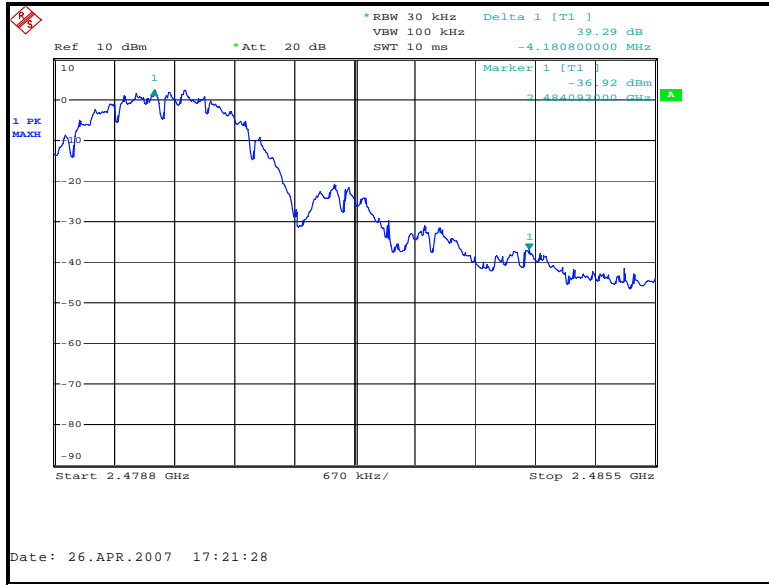


Figure 7.6.1.2-2: Upper Band-edge (Radiated) - F Antenna

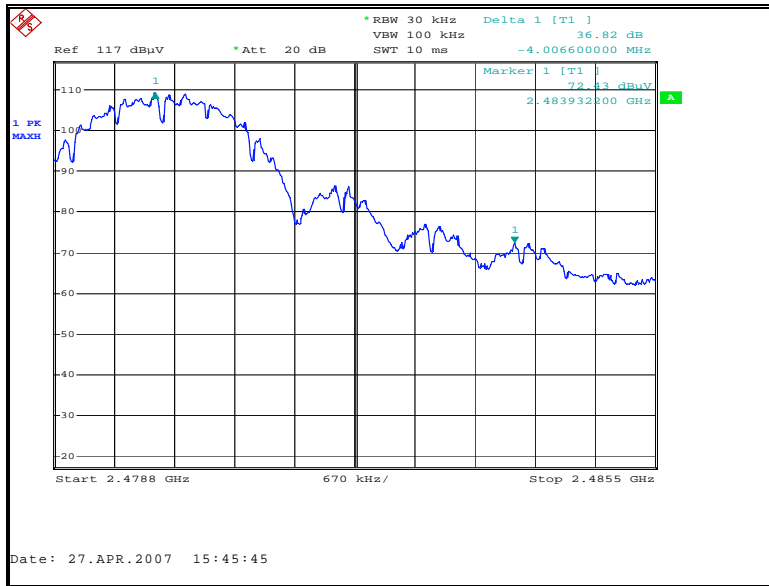


Figure 7.6.1.2-3: Upper Band-edge (Radiated) - Nearson Dipole

### 7.6.2 RF Conducted Spurious Emissions

The RF Conducted Spurious Emissions were measured in accordance with the FCC KDB Publication No. 558074 "Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)". The RF output of the equipment under test was directly connected to the input of the Spectrum Analyzer. The EUT was investigated for conducted spurious emissions from 30MHz to 25GHz, 10 times the highest fundamental frequency. For each measurement, the spectrum analyzer's RBW was set to 100 kHz and the VBW was set to 300 kHz. The peak detector and Max Hold function of the analyzer were utilized.

#### 7.6.2.2 Test Results

In a 100 kHz bandwidth, the radio frequency power that was produced by the EUT emissions is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power. RF Conducted Emissions are displayed in Figures 7.6.2.2-1 through 7.6.2.2-6.

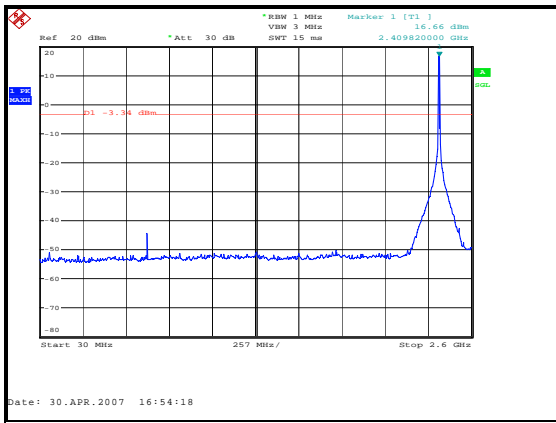


Figure 7.6.2.2-1: 30 MHz – 2.6 GHz – Low Channel

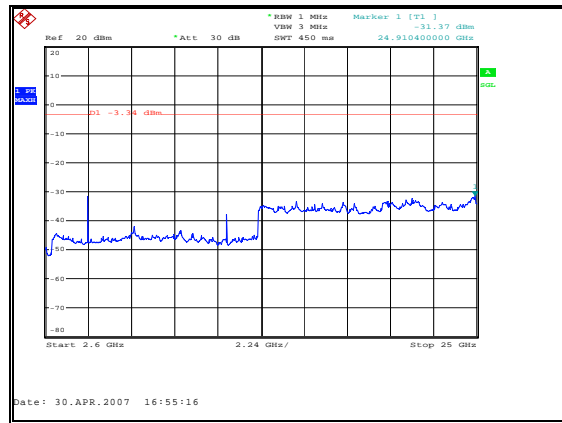


Figure 7.6.2.2-2: 2.6 GHz – 25 GHz – Low Channel

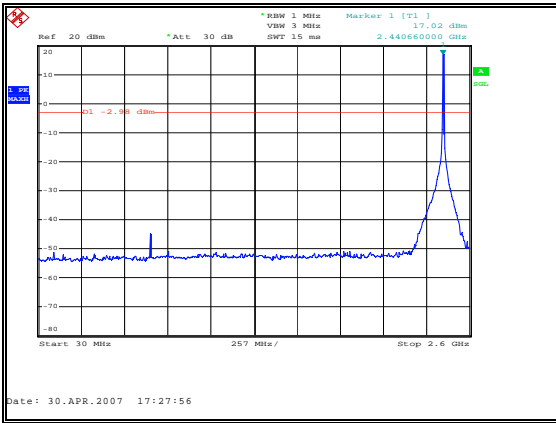


Figure 7.6.2.2-3: 30 MHz – 2.6 GHz –Mid Channel

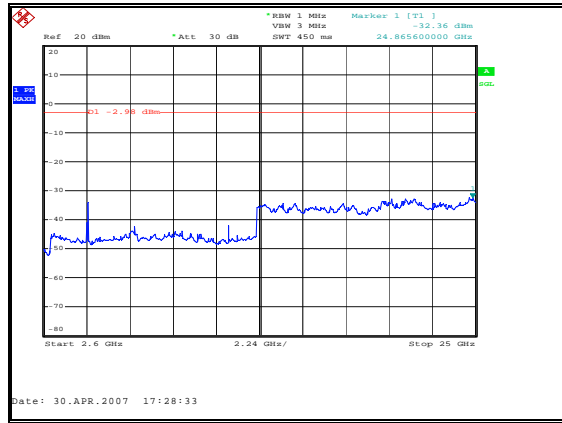


Figure 7.6.2.2-4: 2.6 GHz – 25 GHz – Mid Channel

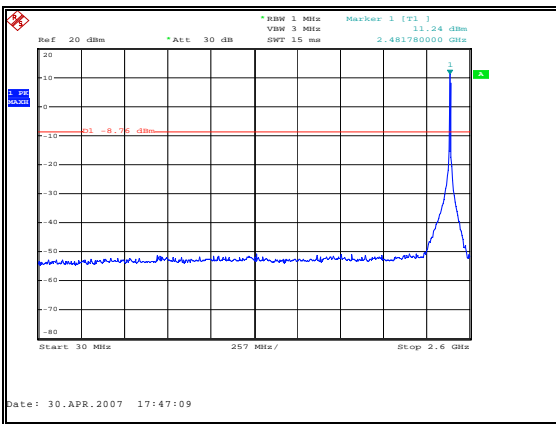


Figure 7.6.2.2-5: 30 MHz – 2.6 GHz – High Channel

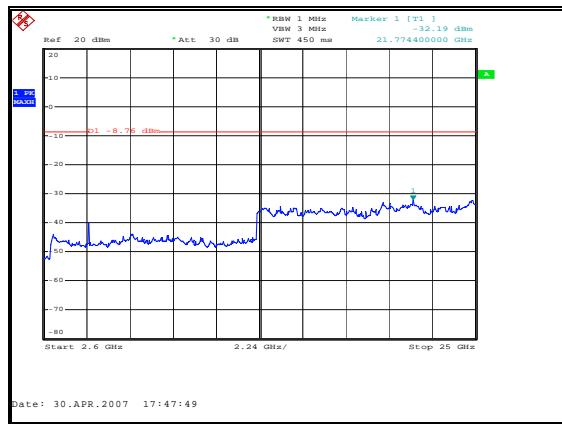


Figure 7.6.2.2-6: 2.6 GHz – 25 GHz –High Channel

### 7.6.3 Radiated Spurious Emissions (Restricted Bands)

#### 7.6.3.1 Test Methodology

Radiated emissions tests were made over the frequency range of 30MHz to 25GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak measurements made with RBW and VBW of 1 MHz. Average measurements were made with RBW of 1MHz and a VBW of 10Hz. The average emissions were further corrected by applying the duty cycle correction of the EUT to the average measurements for comparison to the average limit.

#### 7.6.3.2 Duty Cycle Correction

For average radiated measurements, the measured peak level was reduced by a factor 26.04dB to account for the duty cycle of the EUT. The transmission duration within a 100ms period is 4.99ms. The duty cycle correction factor is determined using the formula:  $20\log(4.99/100) = -26.04\text{dB}$ .

A detailed analysis of the duty cycle timing is provided in the Theory of Operation contained in the supporting documentation for this equipment authorization.

#### 7.6.3.3 Test Results

Using the procedures set forth in the FCC KDB Publication No. 558074 “Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)”, radiated spurious emissions found in the band of 30MHz to 25GHz are reported in Table 7.6.3.3-1 to 7.6.3.3-2.

**Table 7.6.3.3-1: Radiated Spurious Emissions – F Antenna**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Spurious Emissions - 2405MHz</b>										
4810	60.85	60.85	H	1.48	62.33	36.29	74.0	54.0	11.67	17.71
4810	61.08	61.08	V	1.64	62.72	36.68	74.0	54.0	11.28	17.32
12025	66.46	66.46	H	12.61	79.07	53.03	83.5	63.5	4.47	10.51
12025	62.35	62.35	V	12.51	74.86	48.82	83.5	63.5	8.68	14.72
<b>Spurious Emissions - 2440MHz</b>										
4880	61.86	61.86	H	1.71	63.57	37.54	74.0	54.0	10.43	16.46
4880	63.65	63.65	V	1.89	65.54	39.50	74.0	54.0	8.46	14.50
7320	61.87	61.87	H	6.89	68.76	42.72	74.0	54.0	5.24	11.28
7320	65.66	65.66	V	6.83	72.49	46.45	74.0	54.0	1.51	7.55
12200	63.55	63.55	H	13.88	77.43	51.39	83.5	63.5	6.11	12.15
12200	60.49	60.49	V	13.78	74.27	48.23	83.5	63.5	9.27	15.31
19520	54.18	54.18	H	13.02	67.20	41.16	83.5	63.5	16.34	22.38
19520	55.50	55.50	V	13.02	68.52	42.48	83.5	63.5	15.02	21.06
<b>Spurious Emissions - 2480MHz</b>										
4960	58.31	58.31	H	1.98	60.29	34.25	74.0	54.0	13.71	19.75
4960	58.77	58.77	V	2.17	60.94	34.90	74.0	54.0	13.06	19.10
12400	52.6	52.6	H	15.33	67.93	41.89	83.5	63.5	15.62	21.66
12400	51.16	51.16	V	15.23	66.39	40.35	83.5	63.5	17.16	23.20

**Table 7.6.3.3-2: Radiated Spurious Emissions – Nearson Dipole 5dBi**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
<b>Spurious Emissions - 2405MHz</b>										
4810	55.02	55.02	H	1.48	56.50	30.46	74.0	54.0	17.50	23.54
4810	56.26	56.26	V	1.64	57.90	31.86	74.0	54.0	16.10	22.14
12025	56.23	56.23	H	12.61	68.84	42.80	83.5	63.5	14.70	20.74
12025	60.48	60.48	V	12.51	72.99	46.95	83.5	63.5	10.55	16.59
<b>Spurious Emissions - 2440MHz</b>										
4880	56.34	56.34	H	1.71	58.05	32.02	74.0	54.0	15.95	21.98
4880	58.26	58.26	V	1.89	60.15	34.11	74.0	54.0	13.85	19.89
7320	62.20	62.20	H	6.89	69.09	43.05	74.0	54.0	4.91	10.95
7320	65.81	65.81	V	6.83	72.64	46.60	74.0	54.0	1.36	7.40
12200	56.10	56.10	H	13.88	69.98	43.94	83.5	63.5	13.56	19.60
12200	56.55	56.55	V	13.78	70.33	44.29	83.5	63.5	13.21	19.25
<b>Spurious Emissions - 2480MHz</b>										
4960	54.25	54.25	H	1.98	56.23	30.19	74.0	54.0	17.77	23.81
4960	55.22	55.22	V	2.17	57.39	31.35	74.0	54.0	16.61	22.65
12400	51.6	51.6	H	15.33	66.93	40.89	83.5	63.5	16.62	22.66
12400	52.34	52.34	V	15.23	67.57	41.53	83.5	63.5	15.98	22.02

**7.6.3.4 Sample Calculation:**

$$R_C = R_U + CF_T$$

Where:

- CF<sub>T</sub> = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
- R<sub>U</sub> = Uncorrected Reading
- R<sub>C</sub> = Corrected Level
- AF = Antenna Factor
- CA = Cable Attenuation
- AG = Amplifier Gain
- DC = Duty Cycle Correction Factor

**Example Calculation: Peak**

Corrected Level: 55.02+ 1.48 = 56.50dBuV/m  
 Margin: 74dBuV/m – 56.50dBuV/m = 17.50dB

**Example Calculation: Average**

Corrected Level: 55.02+ 1.48 - 26.04= 30.46dBuV  
 Margin: 54dBuV – 30.46dBuV = 23.54dB

**7.7 Peak Power Spectral Density- FCC Section 15.247(e)**

**7.7.1 Test Methodology**


The power spectral density was measured in accordance with the FCC KDB Publication No. 558074 "Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)". The emission peaks within the pass band were located and zoomed in on. The spectrum analyzer RBW was set to 3 kHz and VBW 10 kHz. Span was adjusted to 500 kHz and the sweep time was calculated to be 170s (Span/3 kHz).

**7.7.2 Test Results**

The conducted peak power spectral density is less than 8dBm. Results are shown below in table 7.7.2-1 and figures 7.7.2-1 – 7.7.2-3:

**Table 7.7.2-1: Peak Power Spectral Density**

Frequency [MHz]	Level [dBm]
2405	3.78
2440	3.59
2480	-2.81

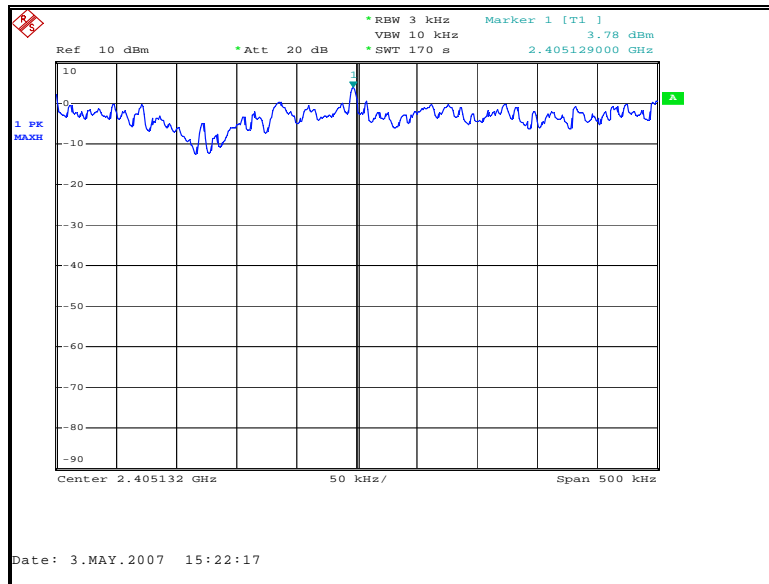

**Figure 7.7.2-1: Power Spectral Density Plot – Low Channel**

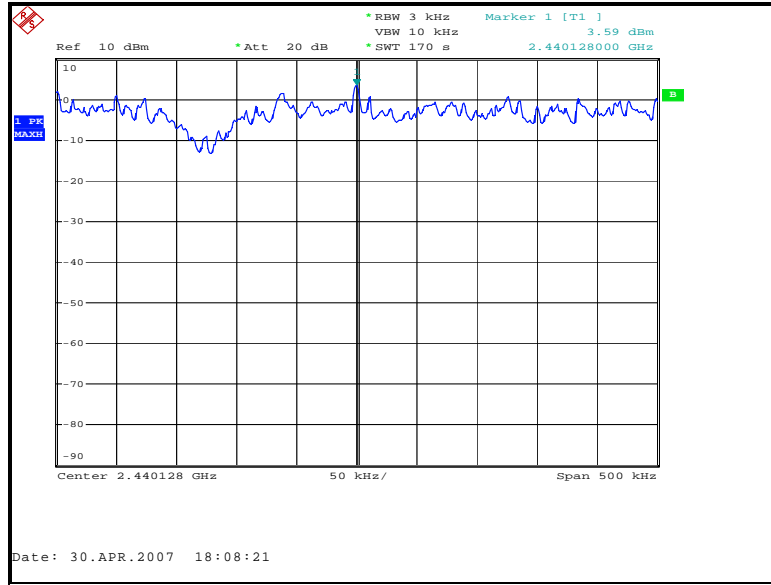


Figure 7.7.2-2: Power Spectral Density Plot – Mid Channel

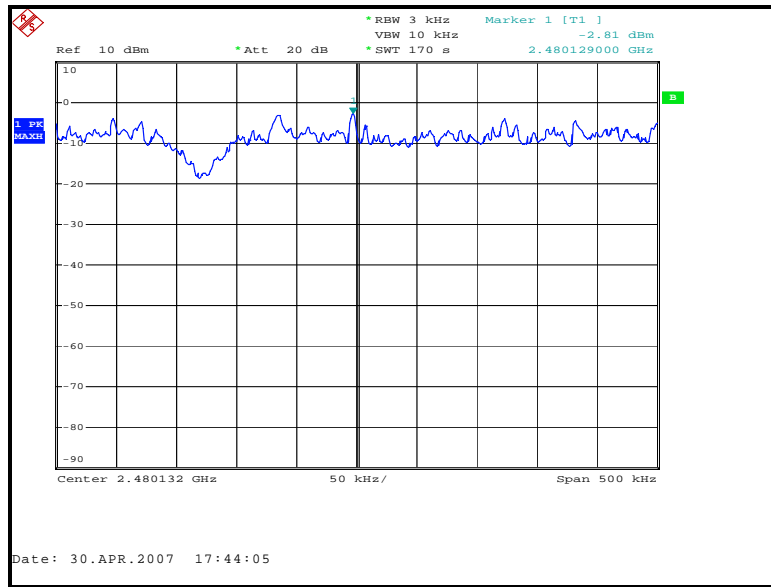


Figure 7.7.2-3: Power Spectral Density Plot – High Channel

### 8.0 CONCLUSION

In the opinion of ACS, Inc. the RFET, manufactured by Wireless Control Network Solutions, LLC.; dba Synapse meets the requirements of FCC Part 15.

## END REPORT