



SUMMIT SEMICONDUCTOR LLC

AUDIO WIRELESS CLIENT DEVICE

**SUMMIT SEMICONDUCTOR LLC**  
**Model No.: 444-2250**  
**FCC ID: UA9601**

## USER MANUAL

Issue Date: 10 July, 2014

Revision: 1.0

### Revision History

Rev. No.	History	Issue Date	Remarks
1.0	Draft Release	10 July, 2014	Pending FCC Grant

Model No. 444-2250  
www.summitsemi.com

22867 NW Bennett St., Suite 200  
Hillsboro, OR 97124  
TEL (503) 615 7734  
FAX: (503) 615 4432



**COPYRIGHT 2014 SUMMIT SEMICONDUCTOR LLC  
ALL RIGHTS RESERVED**

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROTECTED BY COPYRIGHT LAWS OF THE UNITED STATES OF AMERICA AND OTHER COUNTRIES. IT MAY NOT BE REPRODUCED OR DISTRIBUTED IN ANY FORM BY ANY MEANS, ALTERED IN ANY FASHION, OR STORED IN A DATA BASE OR RETRIEVAL SYSTEM, WITHOUT EXPRESS WRITTEN PERMISSION OF SUMMIT SEMICONDUCTOR LLC.

SUMMIT SEMICONDUCTOR CANNOT BE RESPONSIBLE FOR UNAUTHORIZED USE OF EQUIPMENT AND WILL NOT MAKE ALLOWANCE OR CREDIT FOR UNAUTHORIZED USE OR ACCESS



## **Table of contents**

1.1	User Manual Regulatory Statements.....	8
1.2	FCC / IC Identification Numbers .....	8
1.3	FCC/ IC Compliance Statement.....	8
1.4	FCC Changes Warning.....	8
1.5	FCC Information to the user.....	8
1.6	IC Information to the User: .....	9
1.7	FCC Labeling .....	9
1.8	FCC / IC Antenna usage.....	9
1.9	Mobile Exposure .....	10
1.10	FCC Modular approval configuration control .....	10
1.11	FCC / IC Indoor Usage .....	10
1.12	EM Installation Instructions .....	10
1.13	Mounting hardware.....	10
1.14	Antennas .....	10
1.15	OEM Operating Environment .....	11
1.16	OEM Operating Instructions .....	11



## **1.0 Regulatory Statement**

The United States Federal Communication Commission has established certain rules governing the use of electronic equipment.

### **1.1 FCC Certification**

***This device complies with Part 15 of the FCC Rules.***

***Operation is subject to the following two conditions:***

- (1) This device may not cause harmful interference, and***
- (2) This device must accept any interference received, including interference that may cause undesired operation.***

This device has been tested and found to comply with the limits for a CLASS B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, and radiates radio frequency energy and if not installed and used in accordance with the instruction guide, may cause harmful interference to radio communications.

***CAUTION: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.***

***This radio is compliant with FCC RF Exposure requirements for mobile devices. Users are cautioned to maintain 20 cm from the transmitter to ensure compliance.***



***CAUTION: The operation of this radio in the 5.15-5.25 GHz frequency band is restricted to indoor use only.***

## **2.0 Introduction:**

The 444-2250 Wireless Audio Client device is a production ready module designed for active speakers in Summit Semiconductor's wireless audio technology. The module mounts to the top interior wall of a typical speaker. The module includes a patented, low cost, high gain quad diversity PCB antenna integrated in the module to provide superior wireless performance without external antennas. A 24 pin interface provides, I2S digital audio outputs, power, I2C and GPIO signals for control of the amplifier and power supply.



SUMMIT SEMICONDUCTOR LLC

AUDIO WIRELESS CLIENT DEVICE




FRONT SIDE

Model No. 444-2250  
[www.summitsemi.com](http://www.summitsemi.com)

6 of 11

22867 NW Bennett St., Suite 200  
Hillsboro, OR 97124  
TEL (503) 615 7734  
FAX: (503) 615 4432

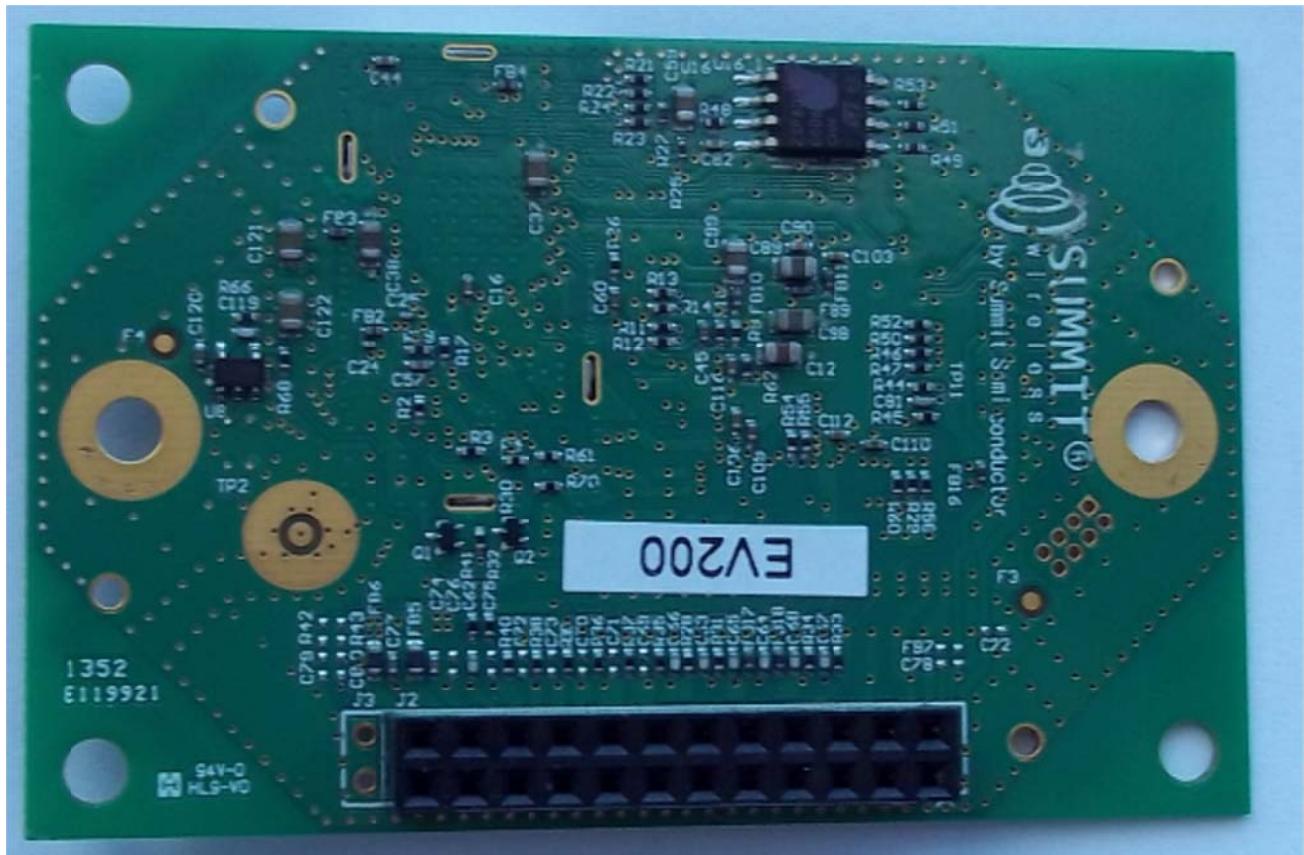

BACK SIDE

**CAUTION: DO NOT TRY TO REPLACE THE ANTENNAS**



### **1.1 User Manual Regulatory Statements**

The United States Federal Communication Commission has established certain rules governing the use of electronic equipment, including the following required guidelines.

### **1.2 FCC / IC Identification Numbers**

United States	FCC ID UA9601
Industry Canada	IC: 9129A-601

### **1.3 FCC/ IC Compliance Statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**CAUTION: ANY CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.**

**ATTENTION: LES CHANGEMENTS OU MODIFICATIONS NON EXPRESSEMENT APPROUVES PAR LA PARTIE RESPONSABLE DE LA CONFORMITE POURRAIEMENT ANNULER L'AUTORITE DE L'UTILISATEUR DE L'APPAREIL**

### **1.4 FCC Changes Warning**

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### **1.5 FCC Information to the user**

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or



television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Users should also be cautioned to take note that high-power radars are allocated as primary users (meaning they have priority) of the bands 5250-5350 MHz, 5600-5650 MHz, and 5650-5850 MHz and these radars could cause interference and/or damage to WLAN devices.

### **1.6 IC Information to the User:**

Per RSS-Gen, Section 7.1.3 This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

RSS-GEN, Section 7.1.3 Cet appareil est conforme aux normes Industry Canada exemptes de licence RSS standard(s). Son fonctionnement est soumis aux deux conditions suivantes : (1) cet appareil ne doit pas provoquer d'interférences et (2) cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable.

### **1.7 FCC Labeling**

While the FCC user ID is placed on the master device circuit board, compliant labeling shall also be placed on the end product housing exterior.

### **1.8 FCC / IC Antenna usage**

Antennas are required to be permanently attached or of non-standard connection method to prevent the end user from altering the installation's performance. The installer shall be responsible for this.

**CAUTION: DO NOT TRY TO REPLACE THE ANTENNAS**

**ATTENTION : N'ESSAYEZ PAS DE REMPLACER LES ANTENNES**



### **1.9 Mobile Exposure**

The user is cautioned to maintain 20cm (8 inch) spacing from the product to ensure compliance with FCC requirements.

### **1.10 FCC Modular approval configuration control**

Control of the end product into which the module will be installed must be maintained such that full compliance of the end product is always ensured. The modular transmitter must comply with any specific rule or operating requirements applicable to the transmitter and the manufacturer must provide adequate instructions along with the module to explain any such requirements.

It is the responsibility of the OEM or module level customer to install the master device in accordance with the guidelines of this manual. In order to maintain compliance with FCC regulations, the module installer must adhere to the guidelines listed in the installation section of this manual.

### **1.11 FCC / IC Indoor Usage**

The device (for the band 5150-5250 MHz, and per interim weather radar interference per below) is only for indoor usage to reduce potential for harmful interference to co-channel mobile satellite systems.

### **1.12 EM Installation Instructions**

In order to maintain compliance with FCC, Industry Canada, and any other applicable regulations, it is required of the OEM or module level customer to adhere to the guidelines listed in this manual.

### **1.13 Mounting hardware**

The client device PC board provides two 3.5mm diameter holes intended to house up to 3mm diameter mounting hardware. The installation does not require metal mounting standoff hardware for grounding purposes but that is recommended. There are three guide pin holes adjacent to antennas 1, 2 and 3. Non-metallic pins should be used in these holes.

### **1.14 Antennas**

The antennae are built-in. No change is provided for or allowed by FCC regulations.



### **1.15 OEM Operating Environment**

Operating Temperature: 0 to 70C at printed circuit board (pcb) ambient

Storage Temperature: -40 to 85C pcb ambient

Humidity: 85%, 85degC pcb ambient

### **1.16 OEM Operating Instructions**

The client module accepts one channel of 24-bit uncompressed digital audio at sample rates up to 96 KHz.

Operating instructions at the electrical I/O and software interface level are not relevant to the end user and are proprietary in nature. The end user should not have understanding of how to manipulate the transmitter at this level.