

MEASUREMENT AND TECHNICAL REPORT

AWAREPOINT CORPORATION
4275 Executive Square
La Jolla, CA 92037

DATE: 08 June 2006

This Report Concerns:	Original Grant: X	Class II Change:
Equipment Type: Awarepoint Receiver, Model R1		
Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?	Yes: Defer until:	No: X
Company Name agrees to notify the Commission by: of the intended date of announcement of the product so that the grant can be issued on that date.	N/A	
Transition Rules Request per 15.37?	Yes:	No: X*
(*) FCC Part 15, Paragraph(s) 15.109(a), 15.209(a), 15.247(a), 15.247(b), 15.247(c), and 15.247(d) (*) Canadian Specification(s) RSS-210 A8.1(1), RSS-210 A8.4(2), and RSS-210 A8.5		
Report Prepared by:	TÜV AMERICA, INC 10040 Mesa Rim Road San Diego, CA 92121-2912 Phone: 858 678 1400 Fax: 858 546 0364	

TABLE OF CONTENTS

	Pages
1.0 GENERAL INFORMATION	<u>3 - 7</u>
1.1 Product Description	<u>3 - 4</u>
1.2 Related Submittal Grant	<u>5</u>
1.3 Tested System Details	<u>5</u>
1.4 Test Methodology	<u>6</u>
1.5 Test Facility	<u>7</u>
2.0 SYSTEM TEST CONFIGURATION	<u>8</u>
2.1 Justification	<u>8</u>
2.2 EUT Exercise Software	<u>8</u>
2.3 Special Accessories	<u>8</u>
2.4 Equipment Modifications	<u>8</u>
2.5 Configuration of Test System	<u>8</u>
3.0 BANDWIDTH EQUIPMENT/DATA	
BAND EDGE EQUIPMENT/DATA	
RF OUTPUT POWER EQUIPMENT/DATA	
RADIATED SPURIOUS EMISSIONS EQUIPMENT/DATA	
PEAK POWER SPECTRAL DENSITY EQUIPMENT/DATA	
RADIATED EMISSIONS EQUIPMENT/DATA	
RECEIVER SPURIOUS EMISSIONS EQUIPMENT/DATA	<u>9 - 17</u>
4.0 ATTESTATION STATEMENT	<u>18</u>

1.0 GENERAL INFORMATION

1.1 Product Description

General Equipment Description:

EUT Description:	Plug-In wireless networking transceiver.		
EUT Name:	"Awarepoint Receiver"		
Model No.:	R1	Serial No.:	(varies)
Product Options:	--		
Configurations and modes to be tested:	Normal Operation		

EUT Specifications

Length:	3.5	Width:	2	Height:	.5	Weight:	2 oz.
---------	-----	--------	---	---------	----	---------	-------

Power Requirements (Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively))

Voltage:	120	(If battery powered, make sure battery life is sufficient to complete testing.)	
# of Phases:	1		
Current (Amps/phase(max)):	0.375	Current (Amps/phase(nominal)):	0.125

EUT Power Cable

Permanent	OR	Removable
Shielded	OR	Unshielded
X Not Applicable		Length (in meters):

EUT Operating Modes to be Tested -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing.

Normal Operation (default when unit is plugged into an outlet)

EUT System Components -- List and describe all EUT components. For FCC testing a minimum configuration is required. (i.e. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc.)

Description	Model #	Serial #	FCC ID #
Receiver is self-contained	--	--	--

Oscillator Frequencies			
<i>Frequency</i>	<i>Derived Frequency</i>	<i>Component # / Location</i>	<i>Description of Use</i>
8Mhz	--	Y1 / front, above center slot	Atmel Microcontroller xtal
16MHz	2.4GHz	Y2 / front, Right of center slot	Chipcon xtal

Power Supply					
<i>Manufacturer</i>	<i>Model #</i>	<i>Serial #</i>	<i>Type</i>		
(self-contained) Supertex	SR036 & GN2470 IC's	--	Switched-mode:		(Frequency) --
			Linear:	Other: X	(see attached)

Critical EMI Components (Capacitors, ferrites, etc.)				
<i>Description</i>	<i>Manufacturer</i>	<i>Part # or Value</i>	<i>Qty</i>	<i>Component # / Location</i>
Ferrite Inductor	Steward	LI0805H151R	1	L1 / rear, near U1

EMC Critical Detail -- Describe other EMC Design details used to reduce high frequency noise.
The gate of the IGBT has a low pass filter to 'curve' the IGBT's response, reducing harmonics.

1.2 Related Submittal Grant

None

1.3 Tested System Details

The FCC ID's for all equipment, plus descriptions of all cables used in the tested system are:

None

1.4 Test Methodology

Purpose of Test: To demonstrate compliance with the following tests.

Test Summary					
Frequency range tested: 30 MHz to 25 GHz.					
Test Description	Paragraph Number	Summary of Results			Pass/Fail
		Low Channel	Mid Channel	High Channel	
Bandwidth	15.247(a)(2) RSS-210 A8.1(1)	--	1440 kHz	--	Pass
Band Edge	15.247(a)(1)(i) RSS-210 A8.1(1)	Meets requirements	N/A	Meets requirements	Pass
RF Output Power	15.247(b) RSS-210 A8.4 (2)	N/A	N/A	0.001 W	Pass
Radiated Spurious Emissions – Restricted Bands (1GHz to 25GHz)	15.247(c)/ 15.209(a) RSS-210 A8.5	N/A	60.7 dBuV/m (pk) @ 4960 MHz	N/A	Pass
Peak Power Spectral Density	15.247(d)	--	>20 dB below	--	Pass
Radiated Emissions (30 to 1000 MHz)	15.209(a) RSS-210 A8.5	N/A	No Detectable Emissions	N/A	Pass
Receiver Spurious Emissions	15.109(a)	N/A	18.6 dBuV/m (pk) @ 112 MHz	N/A	Pass

Testing was performed according to the procedures in FCC/ANSI C63.4 and CSA 108.8-M1983.

1.5 Test Facility

The open area test site and conducted measurement data were tested by:

TÜV AMERICA, INC
10040 Mesa Rim Road
San Diego, CA 92121-2912
Phone: 858 678 1400
Fax: 858 546 0364

The Test Site Data and performance comply with ANSI C63.4 and are registered with the FCC, 7435 Oakland Mills Road, Columbia Maryland 21046. All Measurement Data is acquired according to the content of FCC Measurement Procedure and ANSI C63.4, unless supplemented with additional requirements as noted in the test report.

2.0 SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was initially tested for FCC emissions in the following configuration:

See Test Setup Photos Exhibit

2.2 EUT Exercise Software

None

2.3 Special Accessories

None

2.4 Equipment Modifications

None

2.5 Configuration of Test System

See Test Setup Photos Exhibit

**3.0 BANDWIDTH EQUIPMENT/DATA
BAND EDGE EQUIPMENT/DATA
RF OUTPUT POWER EQUIPMENT/DATA
RADIATED SPURIOUS EMISSIONS EQUIPMENT/DATA
PEAK POWER SPECTRAL DENSITY EQUIPMENT/DATA
RADIATED EMISSIONS EQUIPMENT/DATA
RECEIVER SPURIOUS EMISSIONS EQUIPMENT/DATA**

Test Conditions: BANDWIDTH: FCC Part 15.247(a)(2) and RSS-210 A8.1(1)
BAND EDGE: FCC Part 15.247(a)(1)(i) and RSS-210 A8.1(1)
RF OUTPUT POWER: FCC Part 15.247(b) and RSS-210 A8.4(2)
RADIATED SPURIOUS EMISSIONS: FCC Part 15.209(a), 15.247(c), and RSS-210 A8.5
PEAK POWER SPECTRAL DENSITY: FCC Part 15.247(d)
RADIATED EMISSIONS: FCC Part 15.209(a) and RSS-210 A8.5
RECEIVER SPURIOUS EMISSIONS: FCC Part 15.109(a)

The following measurements were performed at the San Diego Testing Facility:

☐ - Test not applicable


- - Roof (Small Open Area Test Site)
- - Canyon #1 (10- and 30-Meter Open Area Test Site), Carroll Canyon, San Diego

Test Equipment Used:


Model No.	Prop. No.	Description	Manufacturer	Serial No.	Date Cal'ed
3115	453	Double Ridge Antenna	EMCO	9412-4364	08/05
FF6549-2	781	2000 MHz High Pass Filter	Sage	006	Verified
AMF-5D-010180-35-10P	6786	Preamplifier	Miteq	549460	Verified
Micropore 190	6787	10' Coaxial Cable	United Microwave	AA-190-03.00.0	N/A
Micropore 190	6789	30' Coaxial Cable	United Microwave	AA-190-030.00.0	N/A
E4440A	7500	Spectrum Analyzer	Hewlett Packard	MY43362168	12/05

Remarks: One year calibration cycle for all test equipment and sites.


BANDWIDTH: FCC Part 15.247(a)(2) and RSS-210 A8.1(1)

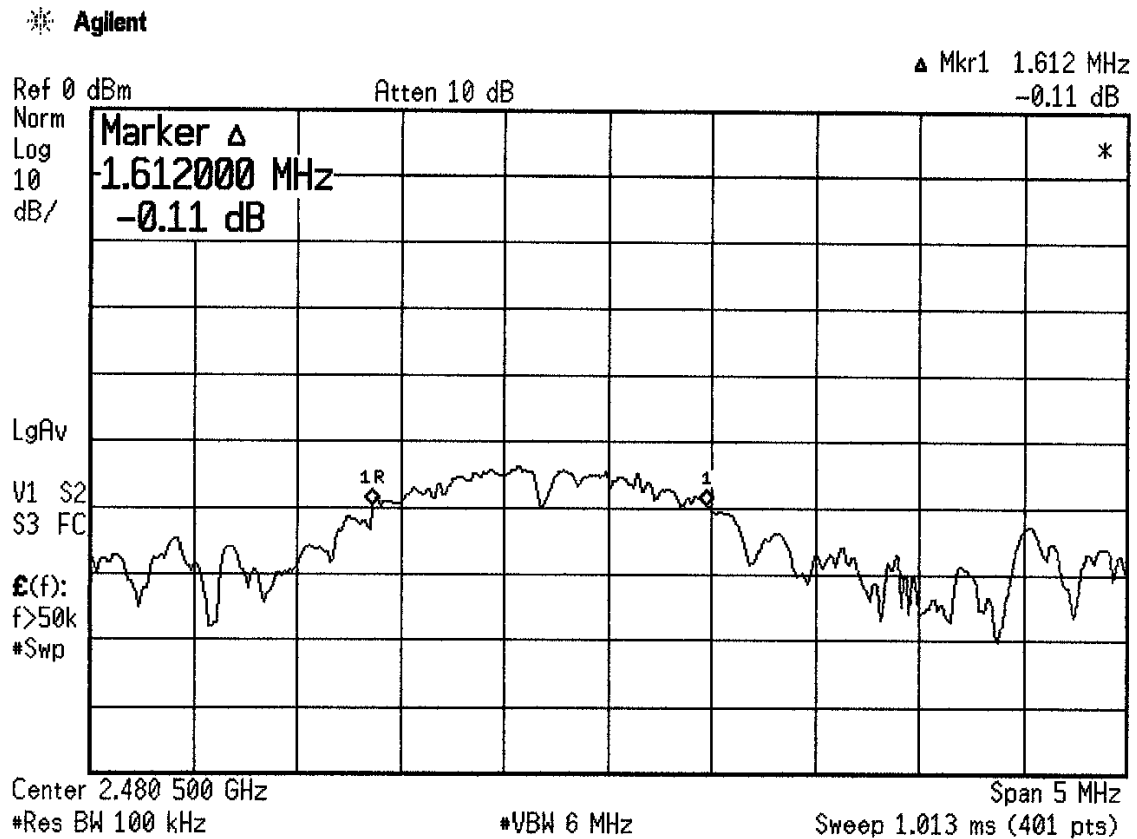


BAND EDGE: FCC Part 15.247(a)(1)(i) and RSS-210 A8.1(1)

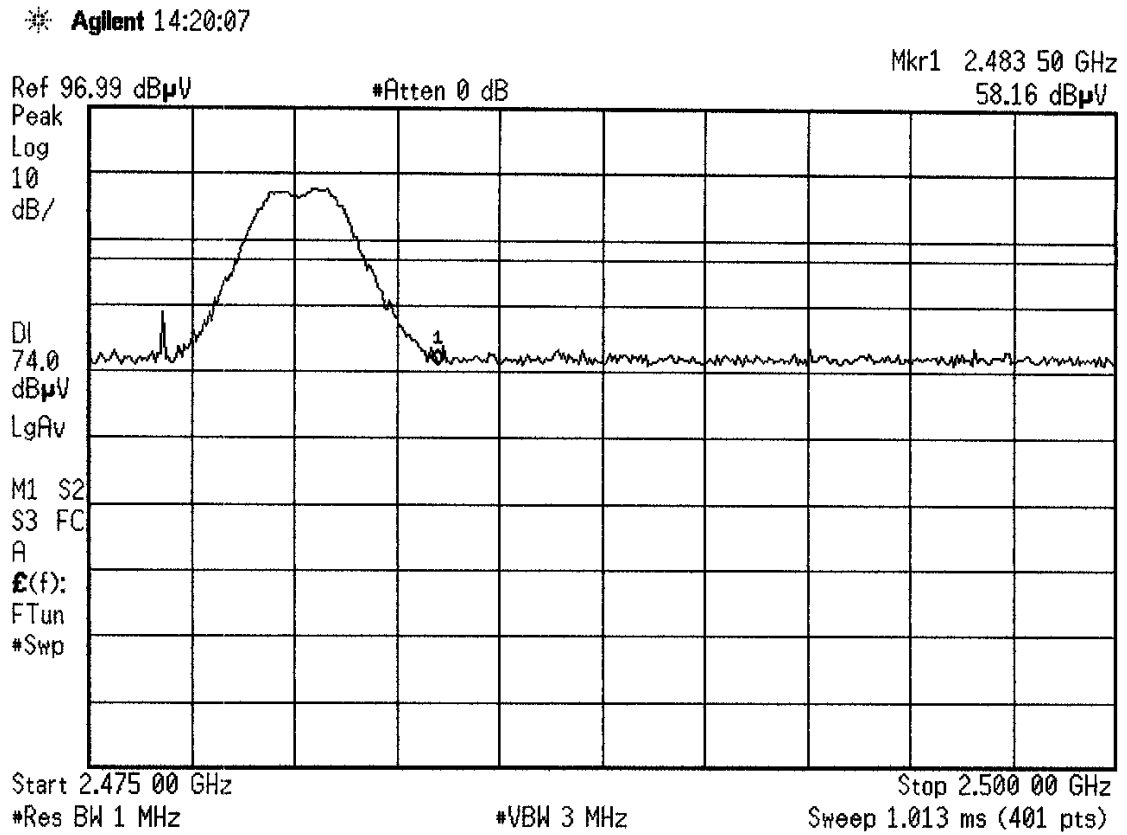

BAND EDGE: FCC Part 15.247(a)(1)(i) and RSS-210 A8.1(1)

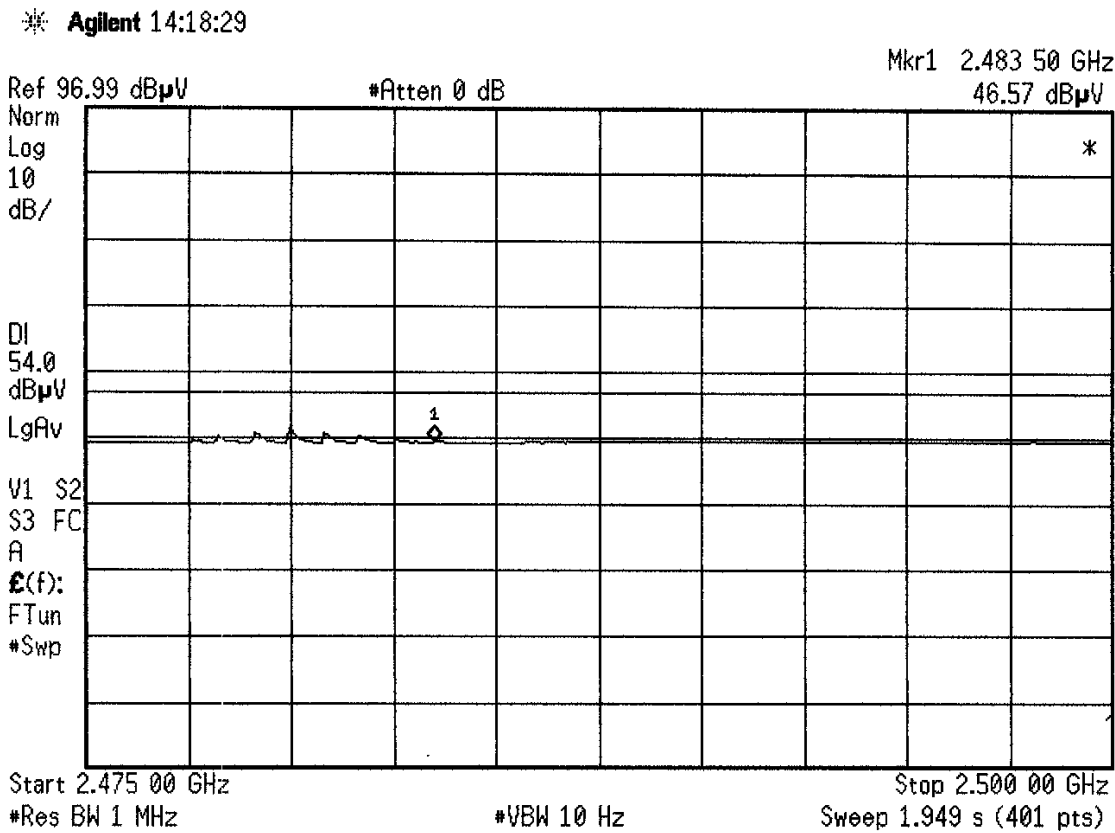

RF OUTPUT POWER: FCC Part 15.247(b) and RSS-210 A8.4(2)

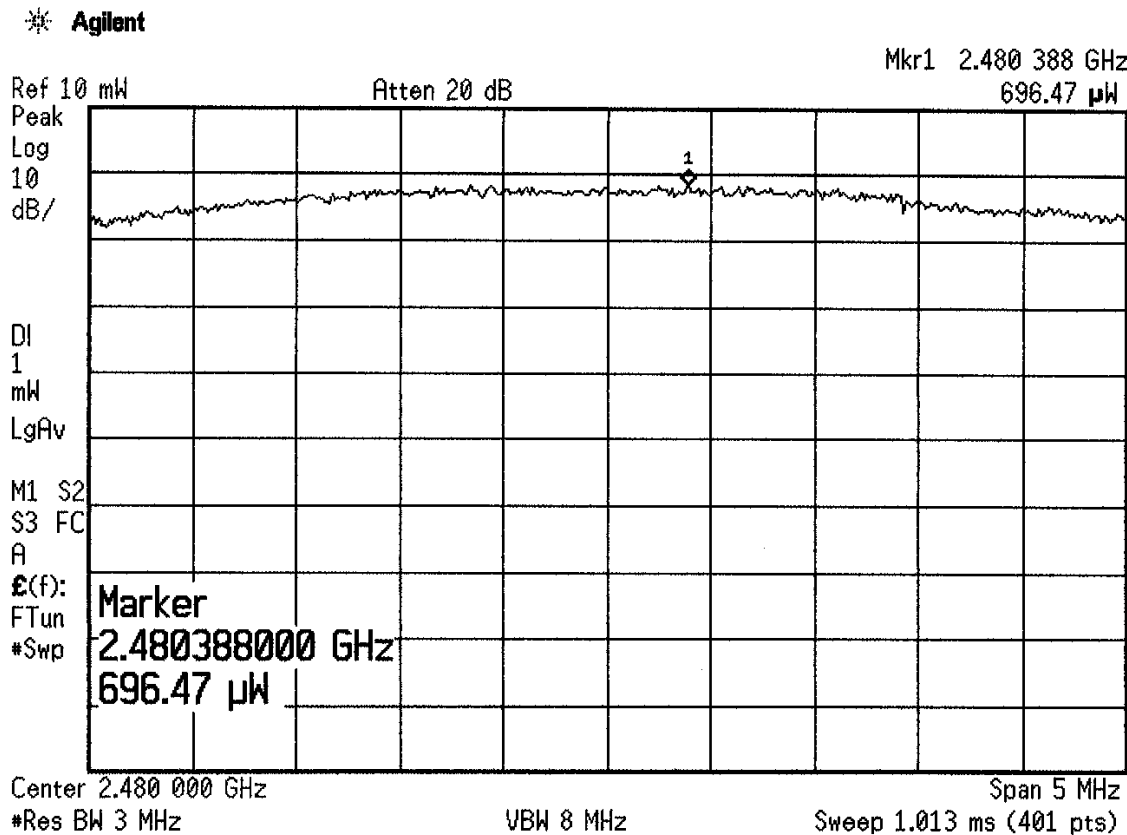

REPORT No: SC602695 TESTER: William Dey SPEC:FCC Part 15 para 15.247/15.209(a)

E U T: Awarepoint Transceiver Model No. R1 TEST SITE: Roof


DATE: May 30, 2006 LOG: N/A

above 1GHz: RBW & VBW 1 MHz for Pk; RBW 1MHz and VBW 10Hz for AVG


below 1GHz: RBW & VBW 100 kHz for PK; RBW 100kHz and VBW 10Hz for AVG

$$CF = \text{Antenna Factor} + \text{Cable Loss} - \text{Preamplifier Gain} + \text{Preselector Loss}$$
Page 14 of 18

PEAK POWER SPECTRAL DENSITY: FCC Part 15.247(d)

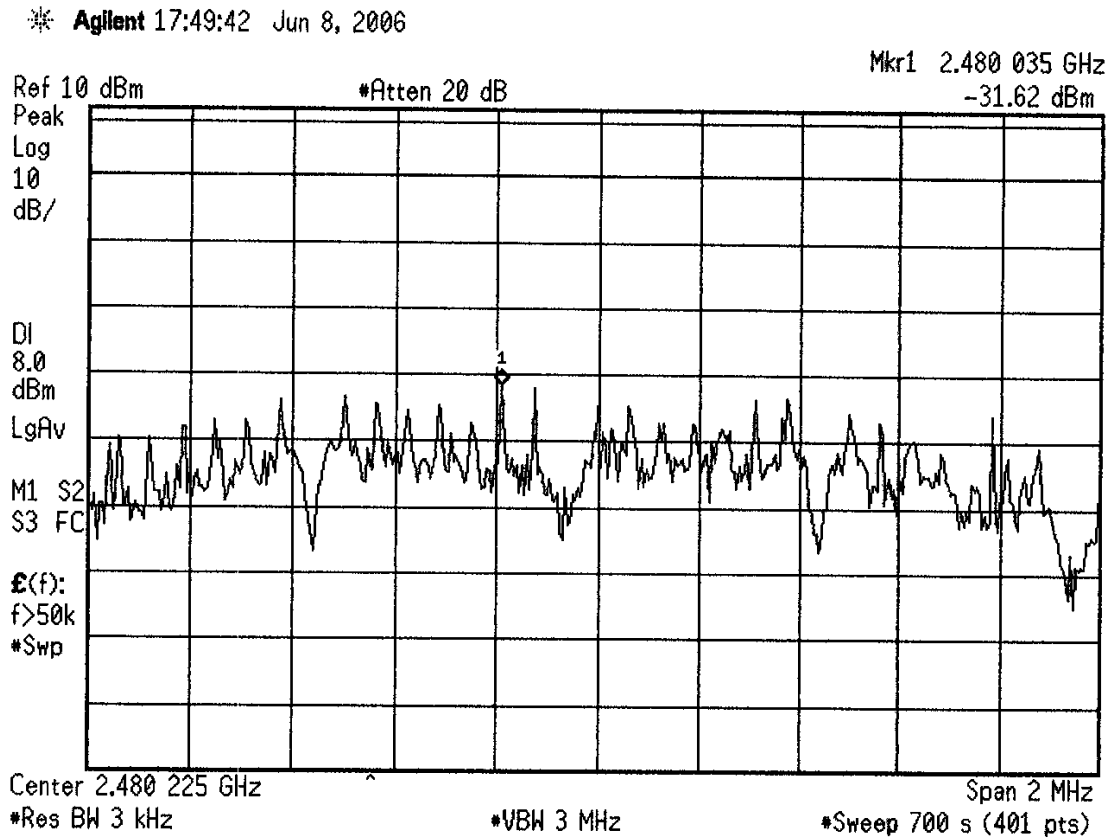

RECEIVER SPURIOUS EMISSIONS: FCC Part 15.109(a)

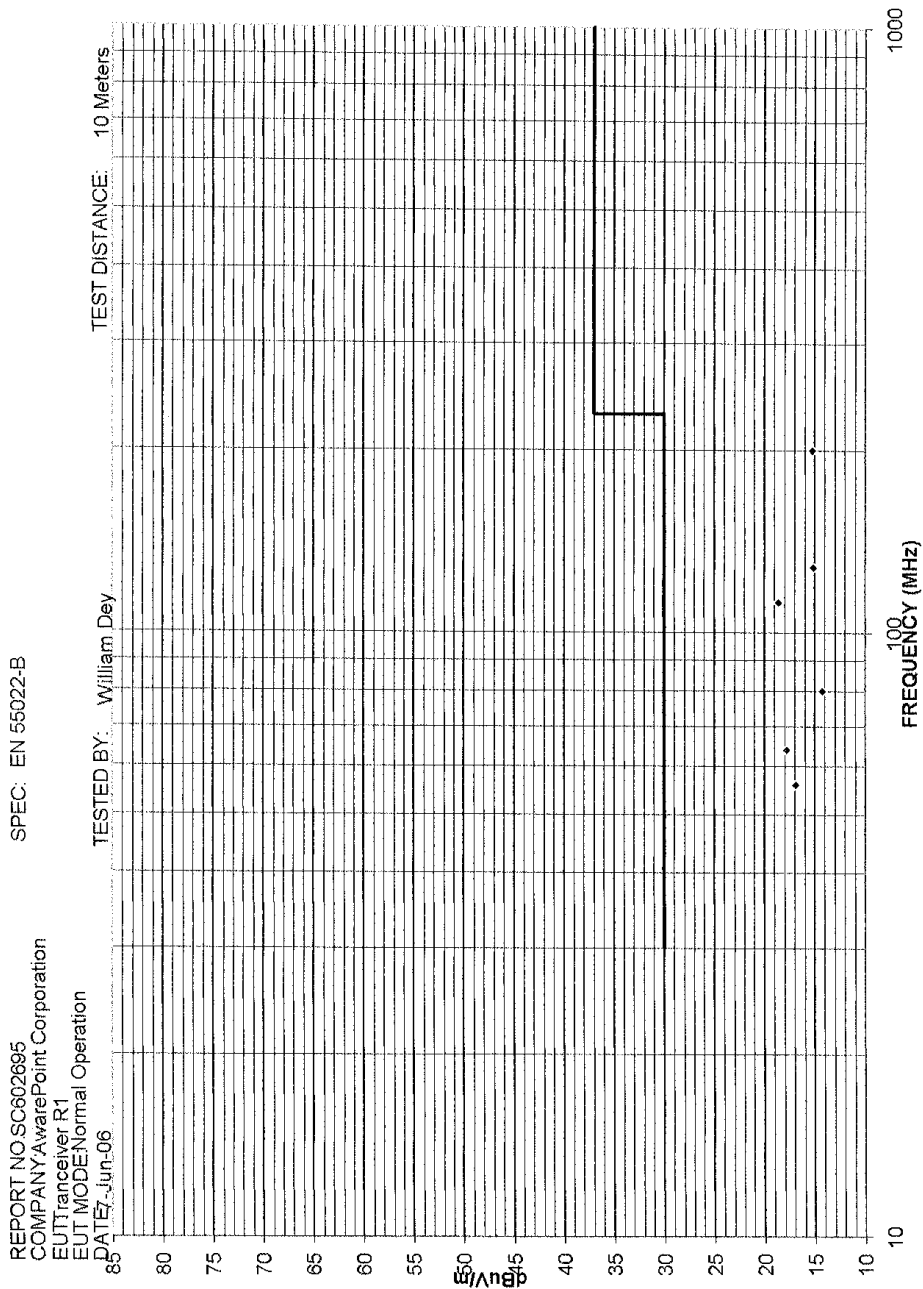

REPORT No: SC602695

SPEC: EN 55022-B

TEST DIST: 10 Meters

TEST SITE: 1

BICONICAL: 739

LOG PERIODIC: 739

RCVR: 6732

EUT MARGIN

ver 1.8b

Page 17 of 18

4.0 ATTESTATION STATEMENT

GENERAL REMARKS:

SUMMARY:

All tests were performed per: CFR 47, Part(s) 15.109(a), 15.209(a), 15.247(a), 15.247(b), 15.247(c), and 15.247(d)
Canadian Specification(s) RSS-210 A8.1(1), RSS-210 A8.4(2), and RSS-210 A8.5

■ - Performed

The Equipment Under Test

■ - Fulfills the requirements of: CFR 47, Part(s) 15.109(a), 15.209(a), 15.247(a), 15.247(b), 15.247(c),
and 15.247(d)
Canadian Specification(s) RSS-210 A8.1(1), RSS-210 A8.4(2), and RSS-210 A8.5

Testing Start Date: 30 May 2006

Testing End Date: 08 June 2006

- TÜV AMERICA, INC. -

Reviewing Engineer:



David Gray
(EMC Engineer In Charge)

Test Engineer:



William Dey
(EMC Technician)