



**FCC CFR47 PART 15 SUBPART E
CLASS II PERMISSIVE CHANGE
TEST REPORT**

FOR

MC85 MINI CARD 802.11a/b/g/n RADIO CARD

MODEL NUMBER: MC85

FCC ID: UAY-MMC85M

REPORT NUMBER: 07U11286-1

ISSUE DATE: SEPTEMBER 21, 2007

Prepared for
**MARVELL SEMICONDUCTOR, INC.
5488 MARVELL LANE
SANTA CLARA, CA 95054, USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-------------------|------------------|-------------------|
| -- | 09/21/07 | Initial Issue | Frank Ibrahim |

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. ATTESTATION OF TEST RESULTS..... | 4 |
| 2. TEST METHODOLOGY | 5 |
| 3. FACILITIES AND ACCREDITATION | 5 |
| 4. CALIBRATION AND UNCERTAINTY..... | 5 |
| 4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> | 5 |
| 4.2. <i>MEASUREMENT UNCERTAINTY</i> | 5 |
| 5. EQUIPMENT UNDER TEST..... | 6 |
| 5.1. <i>DESCRIPTION OF EUT</i> | 6 |
| 5.2. <i>DESCRIPTION OF CLASS II PERMISSIVE CHANGE</i> | 6 |
| 5.3. <i>MAXIMUM OUTPUT POWER</i> | 6 |
| 5.4. <i>DESCRIPTION OF ADDITIONAL ANTENNAS</i> | 7 |
| 5.5. <i>SOFTWARE AND FIRMWARE</i> | 8 |
| 5.6. <i>WORST-CASE CONFIGURATION AND MODE</i> | 8 |
| 5.7. <i>MODIFICATIONS</i> | 8 |
| 5.8. <i>DESCRIPTION OF TEST SETUP</i> | 9 |
| 6. TEST AND MEASUREMENT EQUIPMENT | 11 |
| 7. LIMITS AND RESULTS | 12 |
| 7.1. <i>RF CONDUCTED TESTS</i> | 12 |
| 7.1.1. <i>AVERAGE POWER</i> | 12 |
| 7.1.2. <i>MAXIMUM PERMISSIBLE EXPOSURE</i> | 15 |
| 7.2. <i>RADIATED EMISSIONS</i> | 18 |
| 7.2.1. <i>TRANSMITTER RADIATED SPURIOUS EMISSIONS</i> | 18 |
| 7.2.2. <i>TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND</i> | 20 |
| 7.2.3. <i>TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND</i> | 65 |
| 7.2.4. <i>WORST-CASE RADIATED EMISSIONS BELOW 1 GHz</i> | 69 |
| 8. SETUP PHOTOS..... | 71 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: MARVELL SEMICONDUCTOR, INC.
5488 MARVELL LANE
SANTA CLARA, CA 95054, U.S.A.

EUT DESCRIPTION: MC85 MINI CARD 802.11a/b/g/n RADIO CARD

MODEL: MC85

SERIAL NUMBER: MC85-V18_032

DATE TESTED: SEPTEMBER 5 - 13, 2007

| APPLICABLE STANDARDS | |
|-----------------------|-------------------------|
| STANDARD | TEST RESULTS |
| FCC PART 15 SUBPART C | NO NON-COMPLIANCE NOTED |

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



FRANK IBRAHIM
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:



THANH NGUYEN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|-------------------------------------|----------------|
| Radiated Emission, 30 to 200 MHz | +/- 3.3 dB |
| Radiated Emission, 200 to 1000 MHz | +4.5 / -2.9 dB |
| Radiated Emission, 1000 to 2000 MHz | +4.5 / -2.9 dB |
| Power Line Conducted Emission | +/- 2.9 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g/n transceiver.

The radio module is manufactured by Marvell Semiconductor.

5.2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

The purpose of this Class II Permissive Change is to add various kinds of antennas.

For RF conducted testing results refer to Compliance Certification Service report 06U10359-1D issued on JULY 18, 2006.

5.3. MAXIMUM OUTPUT POWER

As measured and covered in report number 06U10359-1D, the transmitter has a maximum peak conducted output power as follows:

| Frequency Range (MHz) | Mode | Output Power (dBm) | Output Power (mW) |
|------------------------------------|---------------|--------------------|-------------------|
| 2400 to 2483.5 MHz Authorized Band | | | |
| 2412 - 2462 | 802.11b | 25.50 | 354.81 |
| 2412 - 2462 | 802.11g 20M | 27.29 | 535.80 |
| 2412 - 2462 | 802.11g 40M | 23.65 | 231.74 |
| 2412 - 2462 | 802.11n HT20 | 26.55 | 451.86 |
| 2422 - 2452 | 802.11n HT40 | 24.92 | 310.46 |
| 5725 to 5850 MHz Authorized Band | | | |
| 5745 - 5825 | 802.11a 20MHz | 27.21 | 526.02 |
| 5755 - 5795 | 802.11a 40MHz | 24.58 | 287.08 |
| 5745 - 5825 | 802.11n HT20 | 27.12 | 515.23 |
| 5755 - 5795 | 802.11n HT40 | 26.60 | 457.09 |

5.4. DESCRIPTION OF ADDITIONAL ANTENNAS

This is a list of the additional antennas covered in this class II permissive change report:

| Antennas Part number | Manufacture MODEL | Band | Ant Main (Tx1) | Ant Aux (Tx2) | Ant MIMO Tx3/Rx3) |
|---|------------------------------|--|----------------------------------|----------------------------------|---------------------------------|
| Tx1:AR350WIPI01+C Tx2:AR350WIPI02+C Tx3:AR350WIPI03+D (Rx3) | ARIMA W350 Triton | 2.4 - 2.5 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.725 - 5.85 GHz | 2.57 -0.16 0.51 0.86 | 0.44 -0.95 -0.47 0.2 | 0.18 0.64 0.63 1.17 |
| Tx1:AR650WIPI01+B Tx2:AR650WIPI02+B Tx3:AR650WIPI03+C (Rx3) | ARIMA 650 Tempest | 2.4 - 2.5 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.725 - 5.85 GHz | 2.25 1.52 0.74 1.17 | 1.43 1.15 -0.36 -0.36 | 1.25 0.49 1.36 1.36 |
| Main:021020168NC3586 AUX:021020168NC3586-1 MIMO:021020168NC3586-2 | GATEWAY Triton | 2.4 - 2.5 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.725 - 5.85 GHz | -0.04 -1.13 -0.35 -0.45 | 3.25 1.48 1.27 0.83 | 0.84 1.13 1.26 2.26 |
| Main:021020168NC3587 AUX:021020168NC3587-1 MIMO:021020168NC3587-2 | GATEWAY Tempest | 2.4 - 2.5 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.725 - 5.85 GHz | -0.25 0 0.58 1.03 | 3.64 0.5 1.26 0.73 | 1.77 -0.01 -0.31 -0.52 |
| WLAN:021020168NC3709 WLAN MIMO: 021020168NC3709-1 | GATEWAY MA8 | 2.4 - 2.5 GHz 5.25 - 5.35 GHz 5.47 - 5.725 GHz 5.725 - 5.85 GHz | 0.91 0.57 0.98 0.99 | 2.04 -0.33 -0.83 -0.047 | 1.77 -0.01 -0.31 -0.52 |

5.5. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was PCI rev. 1.0.0.0.2, MFG 2.1.0.36

The EUT driver software installed in the Laptop during testing was Marvell Semiconductor, Inc. Labtools rev. 1.0.5.0.0

The board revision of the EUT tested is 1.8.

The test utility software used during testing was DutApiClient_PCI.exe. ver 1.0.5.01

5.6. WORST-CASE CONFIGURATION AND MODE

The 2x3 configuration was used for all testing in this report.

The worst- case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations.

The worst-case data rates for the 2.4GHz band are: 11 Mbps for 802.11b; 54Mbps for 802.11g; MCS11 for 802.11n HT20; MCS15 for 802.11n HT40. These are based on baseline testing with this chipset.

The worst-case data rates for the 5GHz bands are: 9 Mbps for 802.11a 20MHz and 802.11a 40MHz; MCS0 for 802.11n HT20 and 802.11n HT40. These are based on baseline testing with this chipset.

All emissions tests were made with the worst-case data rates. The worst case spurious emissions from 30MHz to 1GHz is 802.11a 40MHz

5.7. MODIFICATIONS

There were no modifications made to the EUT during the testing.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| PERIPHERAL SUPPORT EQUIPMENT LIST | | | | |
|-----------------------------------|--------------|----------------|---------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Laptop PC | IBM | ThinkPad T60 | L3-M5679 | DoC |
| Extension PCB | Marvell | EC-MC-Extender | N/A | N/A |
| AC/DC Adapter | Lenovo | 92P1109 | BTZ63G167 | DoC |


I/O CABLES

| I/O CABLE LIST | | | | | | |
|----------------|------|----------------------|----------------|-------------|--------------|---------------------|
| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length | Remarks |
| 1 | AC | 1 | US 115V | Un-shielded | 1m | N/A |
| 2 | DC | 1 | DC Plug | Un-shielded | 2m | Permits bead Laptop |

TEST SETUP

The EUT is installed in a host laptop computer via an extension board during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

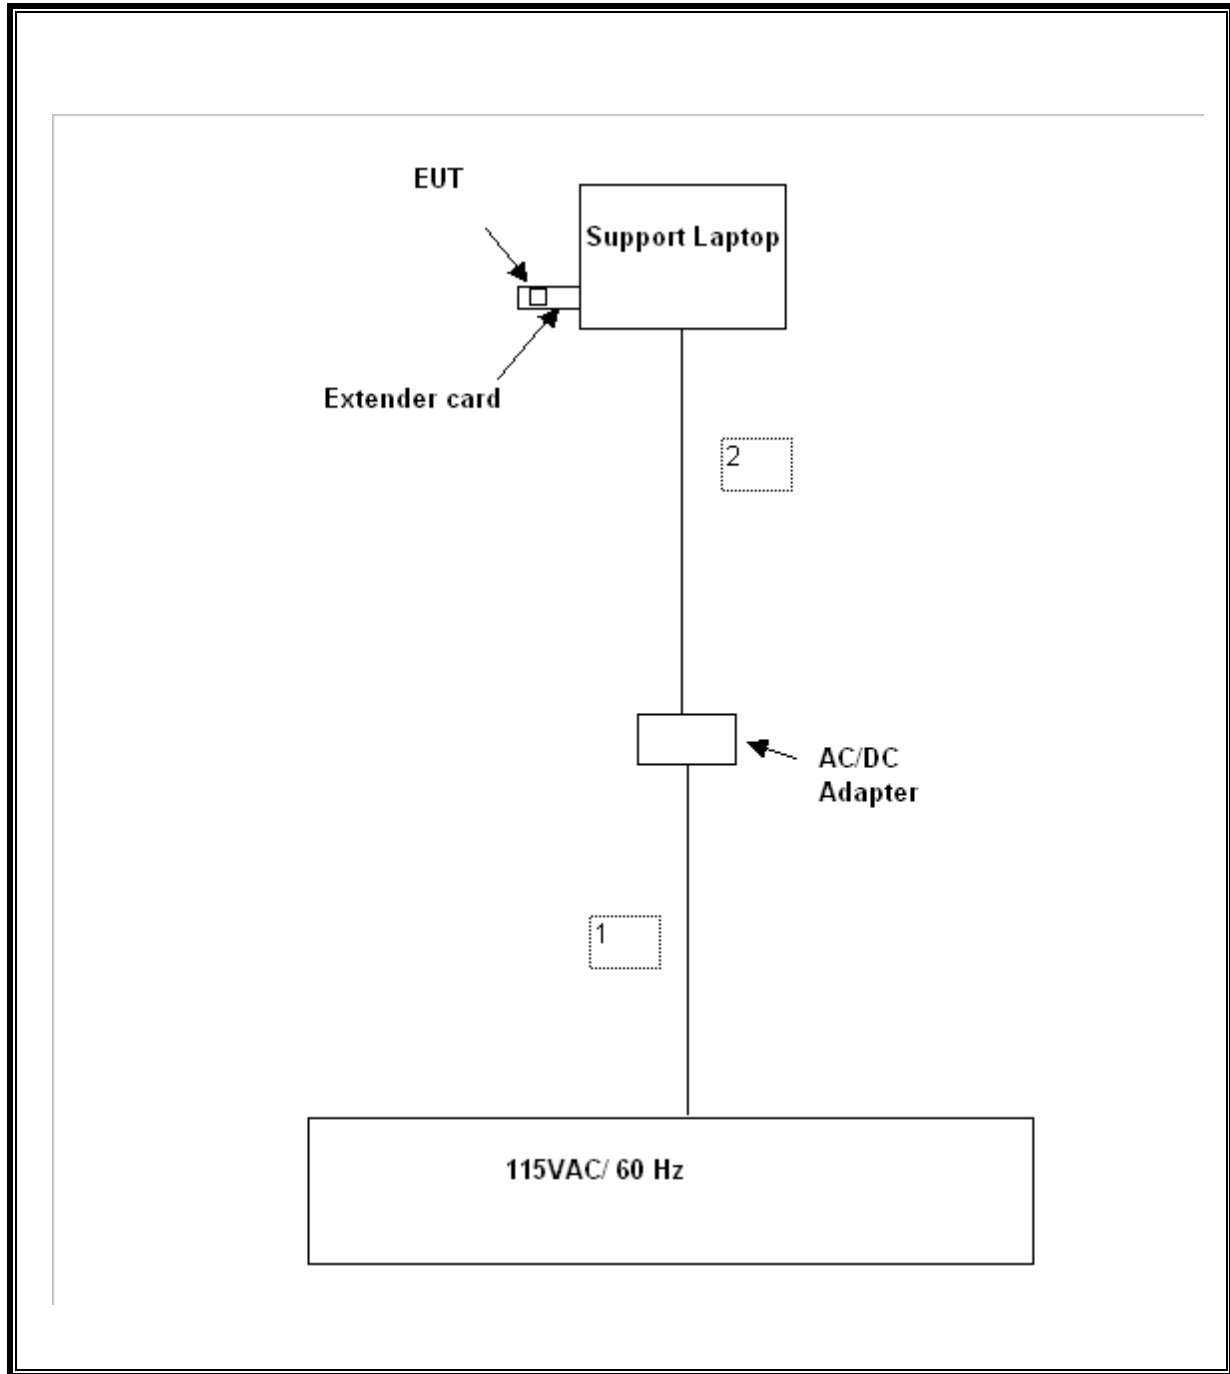

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| TEST EQUIPMENT LIST | | | | |
|---------------------------------|----------------|--------|---------------|----------|
| Description | Manufacturer | Model | Serial Number | Cal Due |
| EMI Receiver, 9 kHz ~ 2.9 GHz | Agilent / HP | 8542E | 3942A00286 | 06/12/08 |
| RF Filter Section | Agilent / HP | 85420E | 3705A00256 | 06/12/08 |
| Antenna, Bilog 30 MHz ~ 2 GHz | Sunol Sciences | JB1 | A121003 | 08/13/08 |
| Antenna, Horn 1 ~ 18 GHz | ETS | 3117 | 29310 | 04/15/08 |
| Preamplifier, 1300 MHz | Agilent / HP | 8447D | 1937A02062 | 05/09/08 |
| Preamplifier, 1 ~ 26.5 GHz | Agilent / HP | 8449B | 3008A00561 | 10/03/07 |
| Peak Power Meter | Agilent / HP | E4416A | GB41291160 | 12/02/07 |
| Power Meter | Agilent / HP | 438B | 3125U09516 | 06/02/08 |
| Power Sensor 10MHz - 18GHz | Agilent / HP | 8481A | 2237A31744 | 04/30/08 |
| Spectrum Analyzer 3 Hz ~ 44 GHz | Agilent / HP | E4446A | US42070220 | 11/26/07 |

7. LIMITS AND RESULTS

7.1. RF CONDUCTED TESTS

7.1.1. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

Each chain is measured separately and the total power is calculated using:

Total Power = $10 \log (10^{\text{Chain 0 Power} / 10} + 10^{\text{Chain 2 Power} / 10})$

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

| Mode Channel | Frequency (MHz) | Average Power Chain A (dBm) | Average Power Chain B (dBm) | Average Power Total (dBm) |
|---------------------------|-----------------|-----------------------------|-----------------------------|---------------------------|
| 802.11b Mode | | | | |
| Low | 2412 | 17.9 | 18.0 | 20.9 |
| Middle | 2437 | 18.1 | 18.1 | 21.1 |
| High | 2462 | 18.4 | 17.8 | 21.1 |
| 802.11g 20MHz Mode | | | | |
| Low | 2412 | 15.7 | 15.5 | 18.6 |
| Middle | 2437 | 17.3 | 17.5 | 20.4 |
| High | 2462 | 16.5 | 15.4 | 19.0 |
| 802.11g 40MHz Mode | | | | |
| Low | 2422 | 12.4 | 12.5 | 15.5 |
| Middle | 2437 | 12.3 | 12.0 | 15.1 |
| High | 2452 | 12.0 | 10.3 | 14.2 |
| 802.11n HT20 Mode | | | | |
| Low | 2412 | 14.6 | 14.5 | 17.6 |
| Middle | 2437 | 16.4 | 17.0 | 19.7 |
| High | 2462 | 14.1 | 14.0 | 17.1 |
| 802.11n HT40 Mode | | | | |
| Low | 2422 | 13.7 | 14.4 | 17.0 |
| Middle | 2437 | 12.0 | 12.3 | 15.2 |
| High | 2452 | 12.2 | 11.8 | 15.0 |

| Mode Channel | Frequency (MHz) | Average Power Chain A (dBm) | Average Power Chain B (dBm) | Average Power Total (dBm) |
|--------------------------|-----------------|-----------------------------|-----------------------------|---------------------------|
| 802.11a 20M Mode | | | | |
| Low | 5745 | 16.9 | 16.7 | 19.8 |
| Middle | 5785 | 16.7 | 16.7 | 19.7 |
| High | 5825 | 16.6 | 16.9 | 19.7 |
| 802.11a 40M Mode | | | | |
| Low | 5755 | 12.4 | 12.2 | 15.3 |
| High | 5795 | 15.3 | 14.5 | 18.0 |
| 802.11n HT20 Mode | | | | |
| Low | 5745 | 17.2 | 16.8 | 20.0 |
| Middle | 5785 | 16.8 | 16.9 | 19.8 |
| High | 5825 | 16.6 | 16.5 | 19.6 |
| 802.11n HT40 Mode | | | | |
| Low | 5755 | 14.4 | 14.2 | 17.3 |
| High | 5795 | 16.9 | 16.6 | 19.8 |

7.1.2. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3–3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0–30 | 1842/f | 4.89/f | *(900/f ²) | 6 |
| 30–300 | 61.4 | 0.163 | 1.0 | 6 |
| 300–1500 | | | f/300 | 6 |
| 1500–100,000 | | | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3–1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34–30 | 824/f | 2.19/f | *(180/f ²) | 30 |

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|-----------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| 30–300 | 27.5 | 0.073 | 0.2 | 30 |
| 300–1500 | | | f/1500 | 30 |
| 1500–100,000 | | | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations yields:

$$S = (30 * P * G) / (3770 * (d^2))$$

Changing to units of Power to mW and Distance to cm, using:

$$P (W) = P (mW) / 1000 \text{ and}$$

$$d (m) = d (cm) / 100$$

and substituting the logarithmic form of power and gain using:

$$P (mW) = 10^{(P (dBm) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (dBi) / 10)}$$

yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted:

| Band (MHz) | Power Density Limit (mW/cm²) | Total Power (dBm) | Antenna Gain (dBi) | MPE Distance (cm) |
|-----------------------|--|----------------------------------|-----------------------------------|----------------------------------|
| 2400 to 2483.5 | 1.0 | 25.50 | 5.127 | 9.59 |

| Band (MHz) | Power Density Limit (mW/cm²) | Total Power (dBm) | Antenna Gain (dBi) | MPE Distance (cm) |
|-----------------------|--|----------------------------------|-----------------------------------|----------------------------------|
| 5725 to 5850 | 1.0 | 25.76 | 3.944 | 8.62 |

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 30 - 88 | 100 ** | 3 |
| 88 - 216 | 150 ** | 3 |
| 216 - 960 | 200 ** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND

RESTRICTED BANDEDGE (802.11b MODE, LOW CHANNEL) GALTRONICS TEMPEST ANTENNA

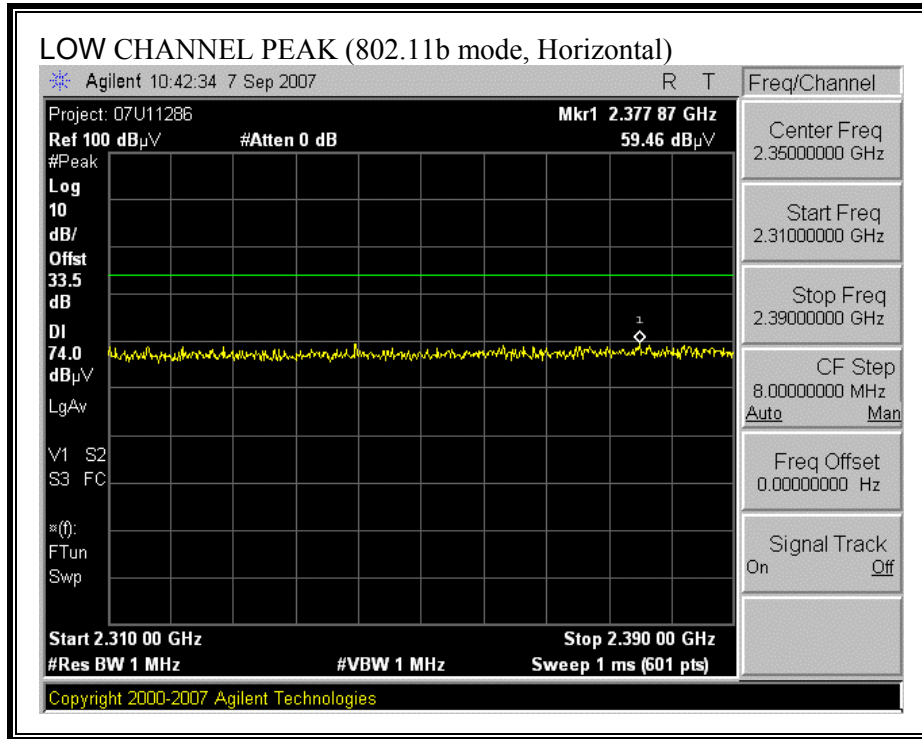


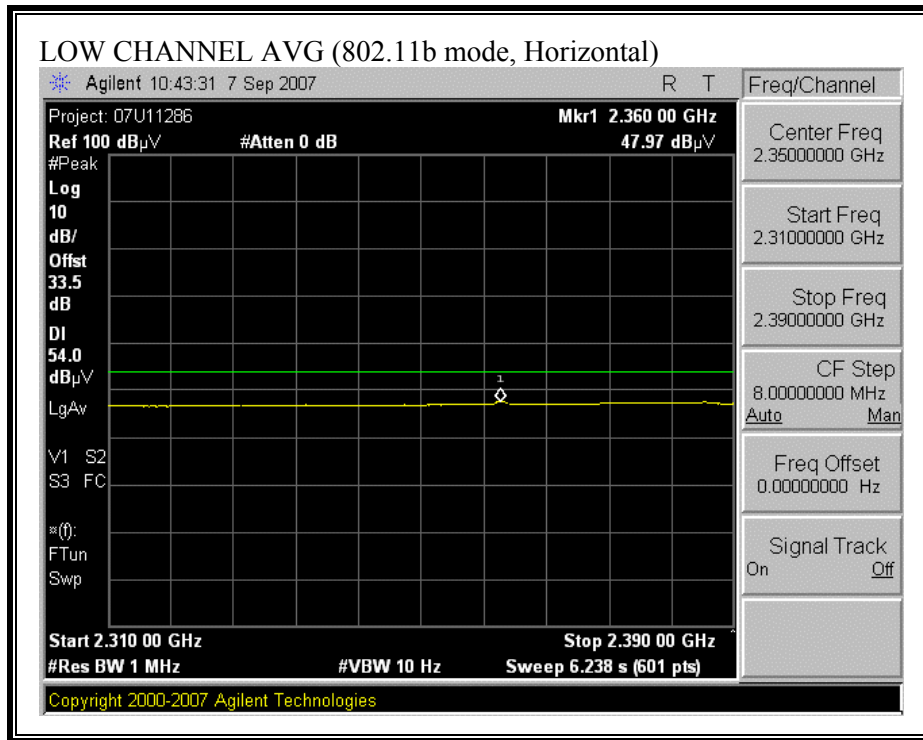


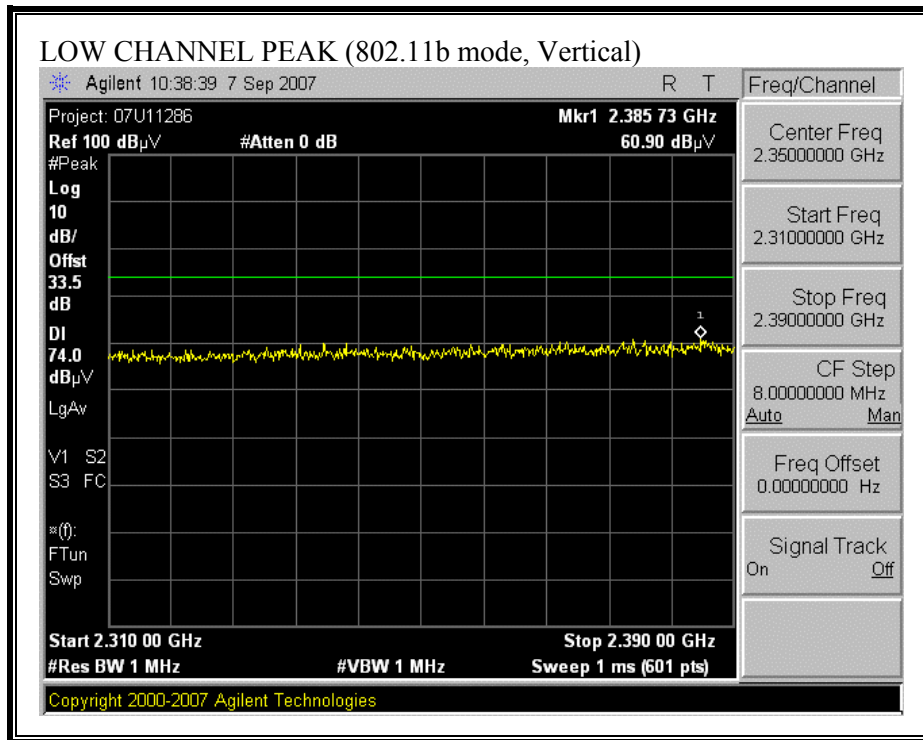


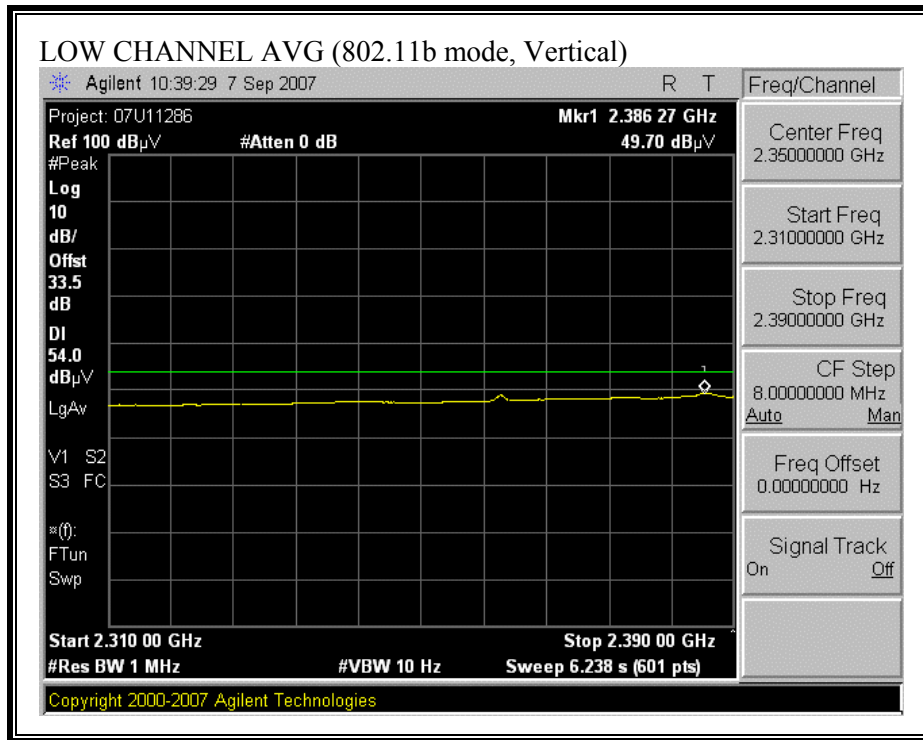


RESTRICTED BANDEDGE (802.11b MODE, HIGH CHANNEL)

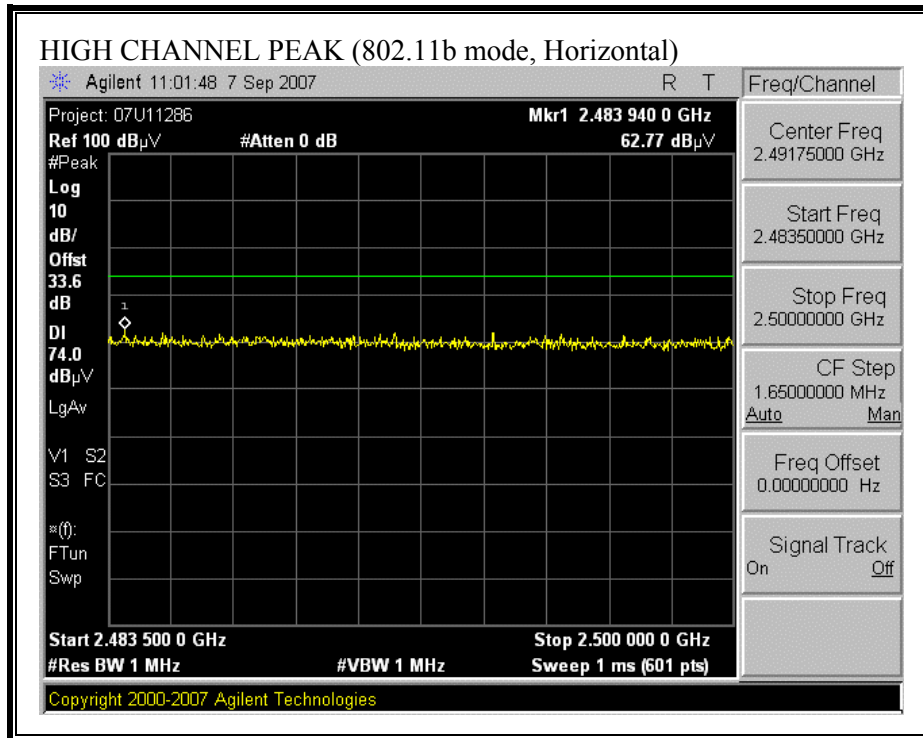

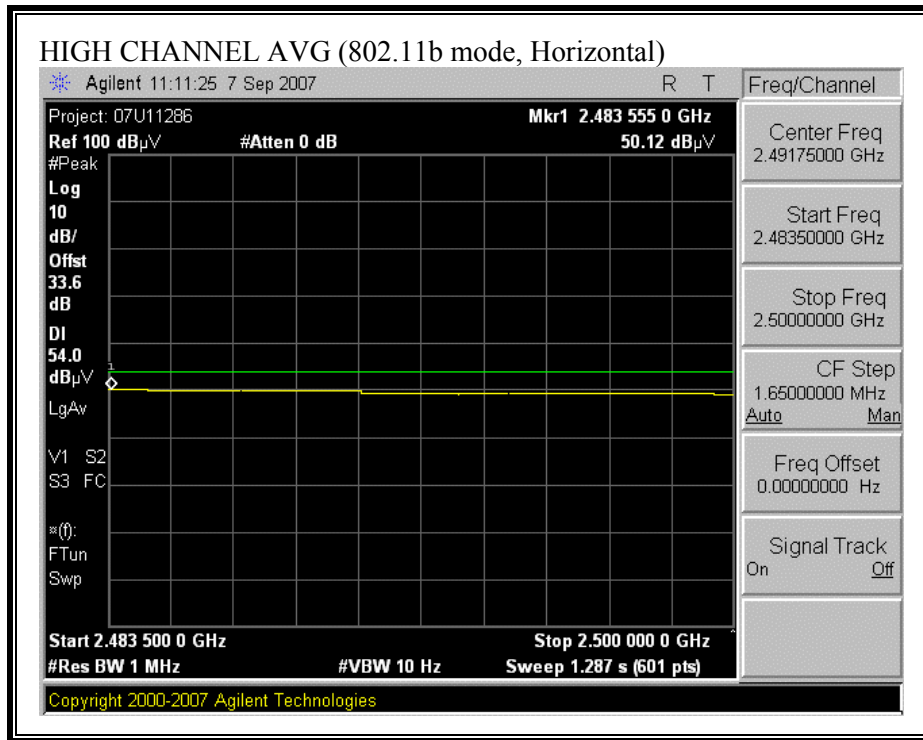

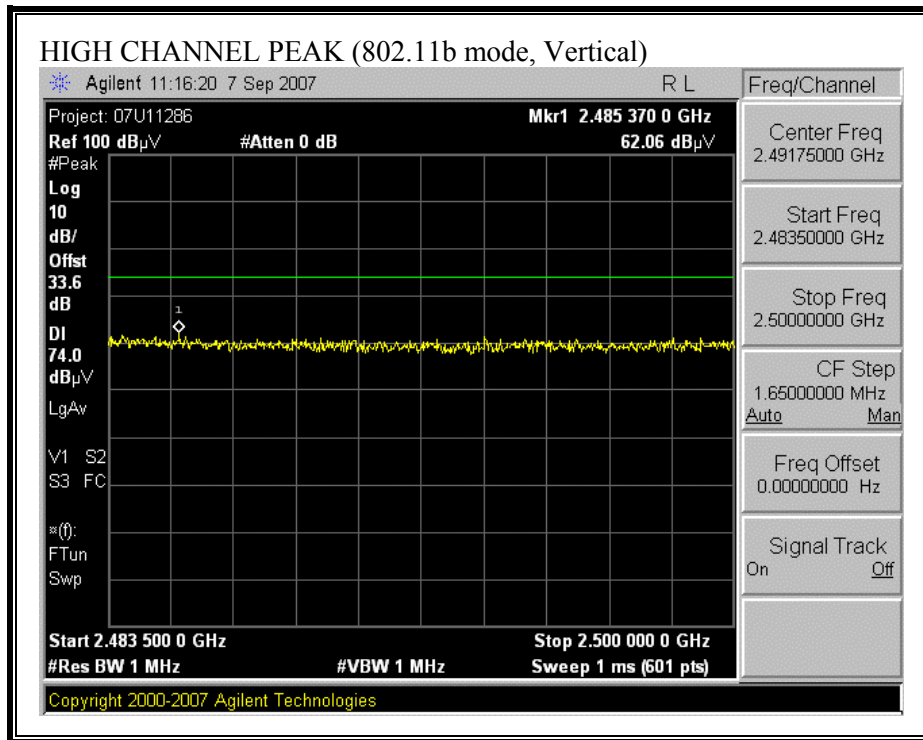

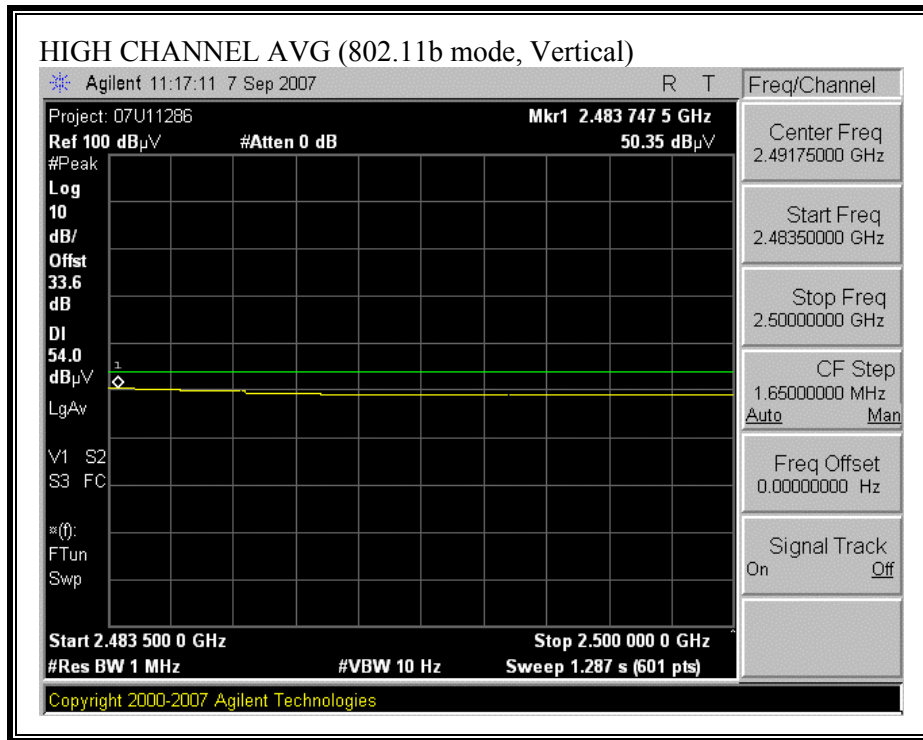

HARMONICS AND SPURIOUS EMISSIONS (802.11b MODE)

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: Marvell Semiconductor, Inc.
 Project #: 07U11286
 Date: 09/10/2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Extender card, Support laptop, with Galtronics Tempest MIMO Antenna.
 Mode: Transmitt b mode

Test Equipment:

| | | | | |
|----------------------|-----------------------|------------------------|--------------|------------|
| Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit |
| T120; S/N: 29310 @3m | T145 Agilent 3008A005 | | | FCC 15.209 |

Hi Frequency Cables


| | | | | | |
|-------------------|--------------|---------------|-----|---------------|---|
| 2 foot cable | 3 foot cable | 12 foot cable | HPF | Reject Filter | Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz |
| William 177079009 | | 3m Chamber | | | |


| f GHz | Dist (m) | Read Pk dBuV | Read Avg dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filt dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|------------------------|----------|--------------|---------------|---------|-------|--------|-----------|---------|-------------|------------|---------------|----------------|-----------|------------|-------------|
| Low Ch 2412MHz | | | | | | | | | | | | | | | |
| 4.824 | 3.0 | 49.9 | 38.4 | 33.7 | 4.4 | -34.8 | 0.0 | 0.0 | 53.2 | 41.6 | 74 | 54 | -20.8 | -12.4 | H |
| 7.236 | 3.0 | 43.5 | 31.0 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 49.3 | 36.8 | 74 | 54 | -24.7 | -17.2 | H |
| 9.648 | 3.0 | 42.4 | 31.4 | 36.9 | 6.1 | -35.0 | 0.0 | 0.0 | 50.4 | 39.4 | 74 | 54 | -23.6 | -14.6 | Noise Floor |
| 4.824 | 3.0 | 46.6 | 33.5 | 33.7 | 4.4 | -34.8 | 0.0 | 0.0 | 49.9 | 36.8 | 74 | 54 | -24.1 | -17.2 | V |
| 7.236 | 3.0 | 42.9 | 31.9 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 48.7 | 37.7 | 74 | 54 | -25.3 | -16.3 | V |
| 9.648 | 3.0 | 42.6 | 31.4 | 36.9 | 6.1 | -35.0 | 0.0 | 0.0 | 50.6 | 39.4 | 74 | 54 | -23.4 | -14.6 | Noise Floor |
| Mid Ch 2437MHz | | | | | | | | | | | | | | | |
| 4.874 | 3.0 | 48.2 | 35.9 | 33.7 | 4.4 | -34.9 | 0.0 | 0.0 | 51.5 | 39.2 | 74 | 54 | -22.5 | -14.8 | V |
| 7.311 | 3.0 | 50.0 | 39.0 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 55.8 | 44.8 | 74 | 54 | -18.2 | -9.2 | V |
| 9.748 | 3.0 | 42.3 | 31.0 | 37.1 | 6.0 | -35.0 | 0.0 | 0.0 | 50.2 | 38.9 | 74 | 54 | -23.8 | -15.1 | Noise Floor |
| 4.874 | 3.0 | 49.3 | 37.2 | 33.7 | 4.4 | -34.9 | 0.0 | 0.0 | 52.7 | 40.5 | 74 | 54 | -21.3 | -13.5 | H |
| 7.311 | 3.0 | 44.9 | 35.2 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 50.8 | 41.1 | 74 | 54 | -23.2 | -12.9 | H |
| 9.748 | 3.0 | 42.5 | 30.8 | 37.1 | 6.0 | -35.0 | 0.0 | 0.0 | 50.4 | 38.7 | 74 | 54 | -23.6 | -15.3 | Noise Floor |
| High Ch 2462MHz | | | | | | | | | | | | | | | |
| 4.924 | 3.0 | 54.1 | 41.6 | 33.8 | 4.3 | -34.9 | 0.0 | 0.0 | 57.3 | 44.8 | 74 | 54 | -16.7 | -9.2 | H |
| 7.386 | 3.0 | 47.5 | 37.0 | 35.2 | 5.1 | -34.6 | 0.0 | 0.0 | 53.1 | 42.7 | 74 | 54 | -20.9 | -11.3 | H |
| 9.848 | 3.0 | 42.1 | 32.5 | 37.2 | 5.9 | -35.1 | 0.0 | 0.0 | 50.2 | 40.5 | 74 | 54 | -23.8 | -13.5 | Noise Floor |
| 4.924 | 3.0 | 48.5 | 36.6 | 33.8 | 4.3 | -34.9 | 0.0 | 0.0 | 51.7 | 39.8 | 74 | 54 | -22.3 | -14.2 | V |
| 7.386 | 3.0 | 51.1 | 40.7 | 35.2 | 5.1 | -34.6 | 0.0 | 0.0 | 56.8 | 46.3 | 74 | 54 | -17.2 | -7.7 | V |
| 9.848 | 3.0 | 40.6 | 32.2 | 37.2 | 5.9 | -35.1 | 0.0 | 0.0 | 48.6 | 40.2 | 74 | 54 | -25.4 | -13.8 | Noise Floor |


Rev. 412.7


| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

RESTRICTED BANDEDGE (802.11g 20M MODE, LOW CHANNEL)

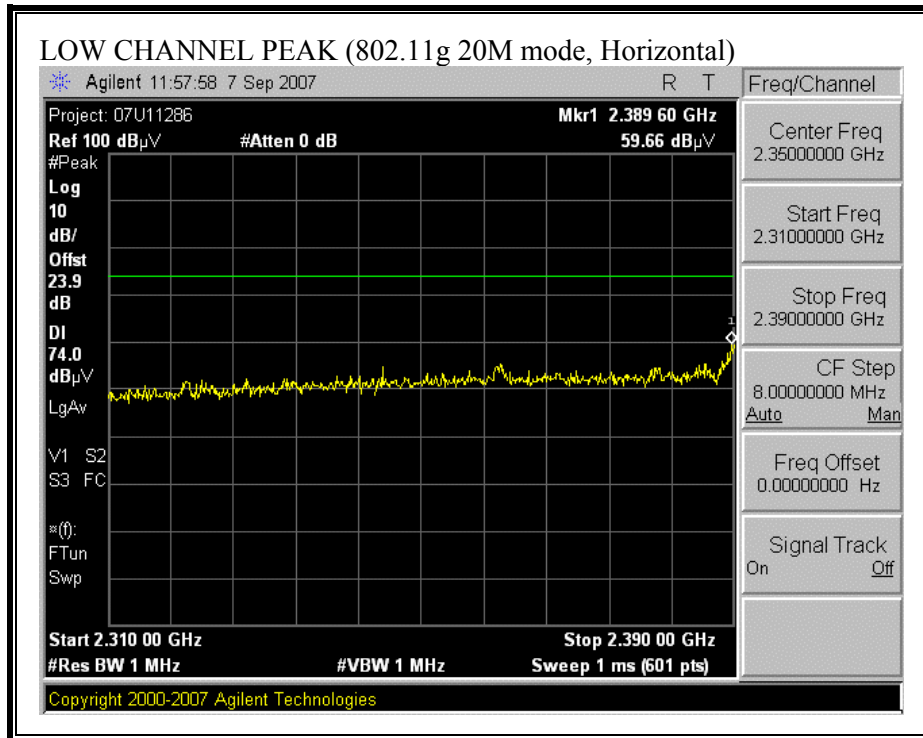


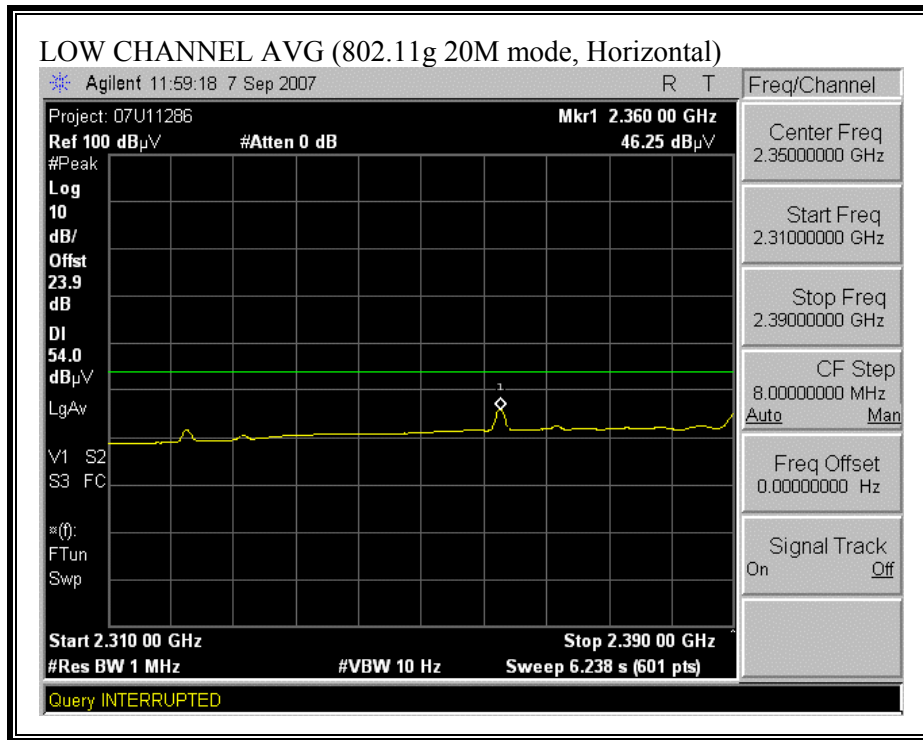


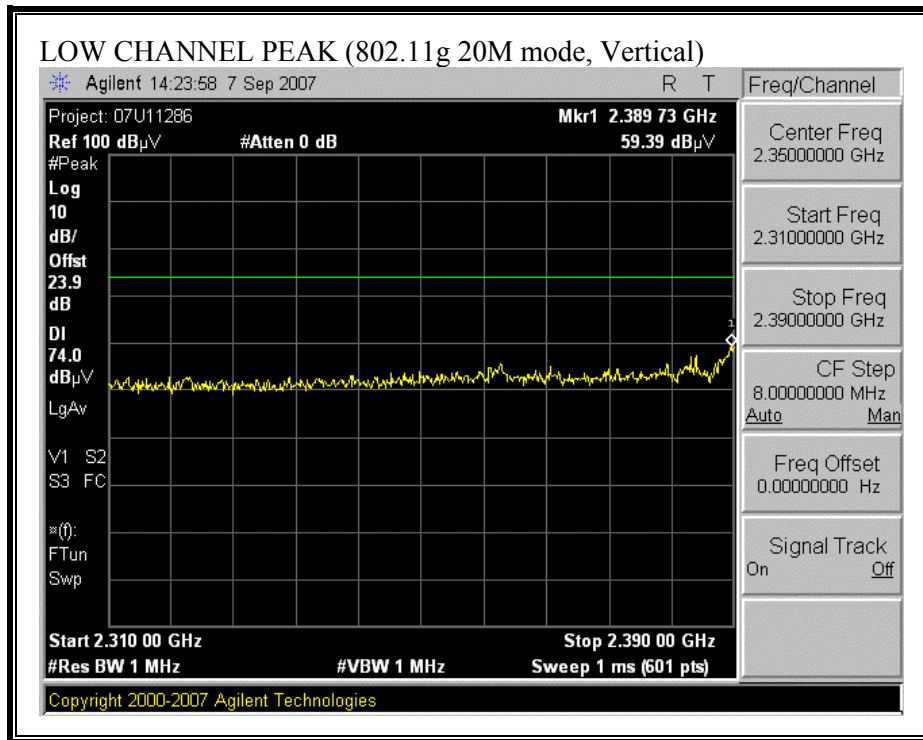


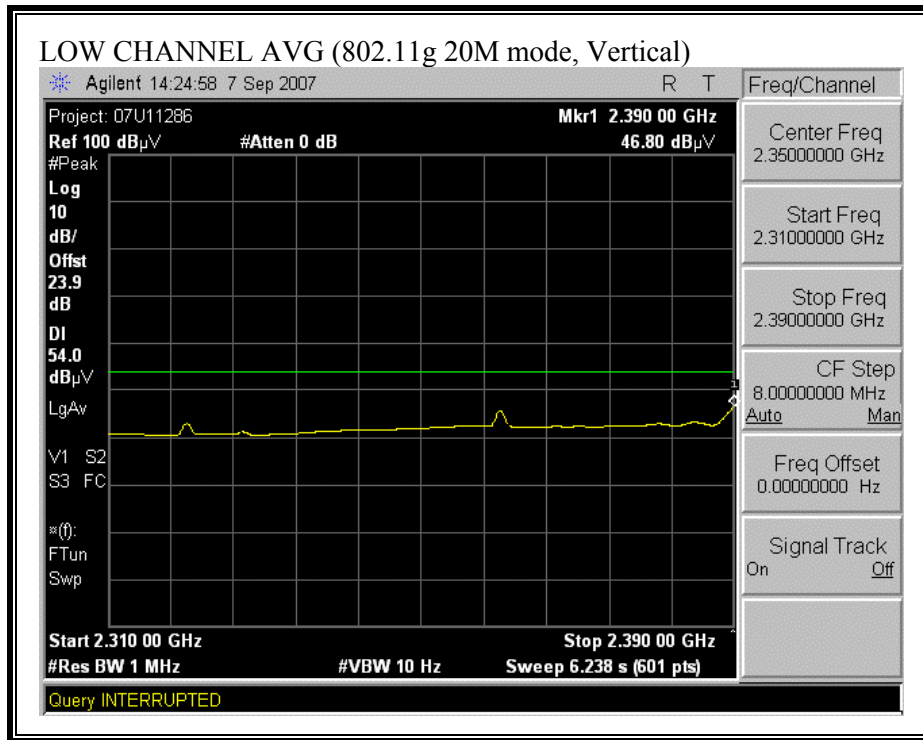


RESTRICTED BANDEDGE (802.11g 20M MODE, HIGH CHANNEL)

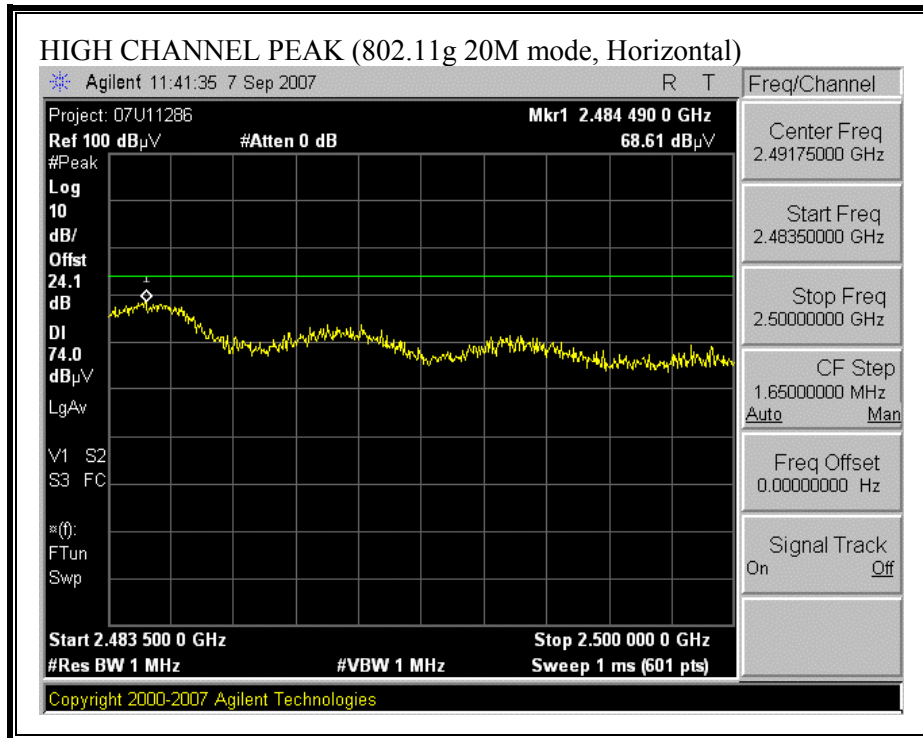

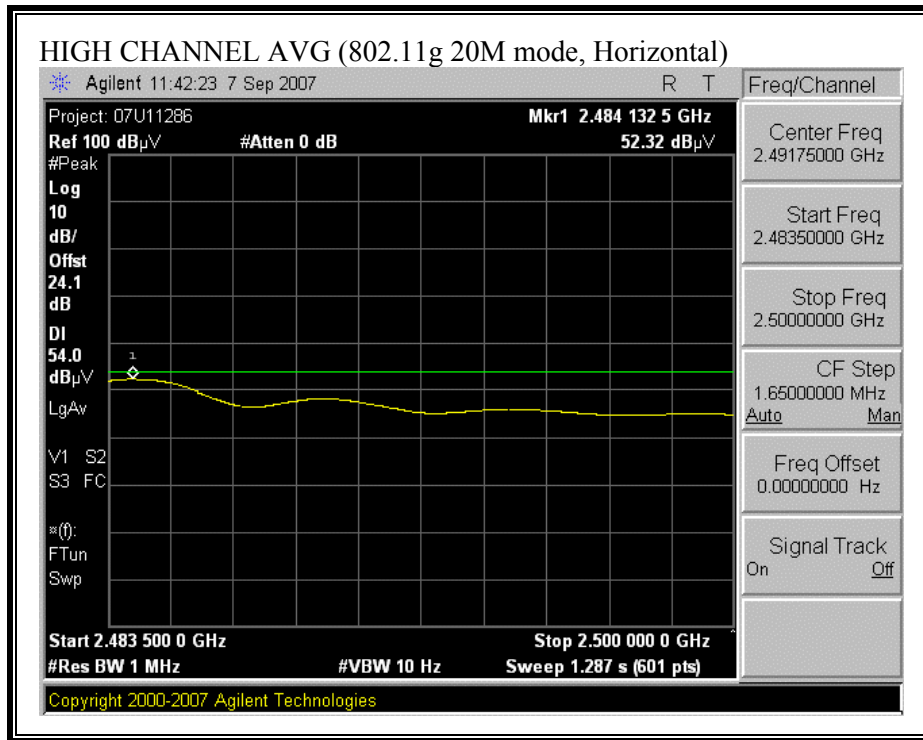

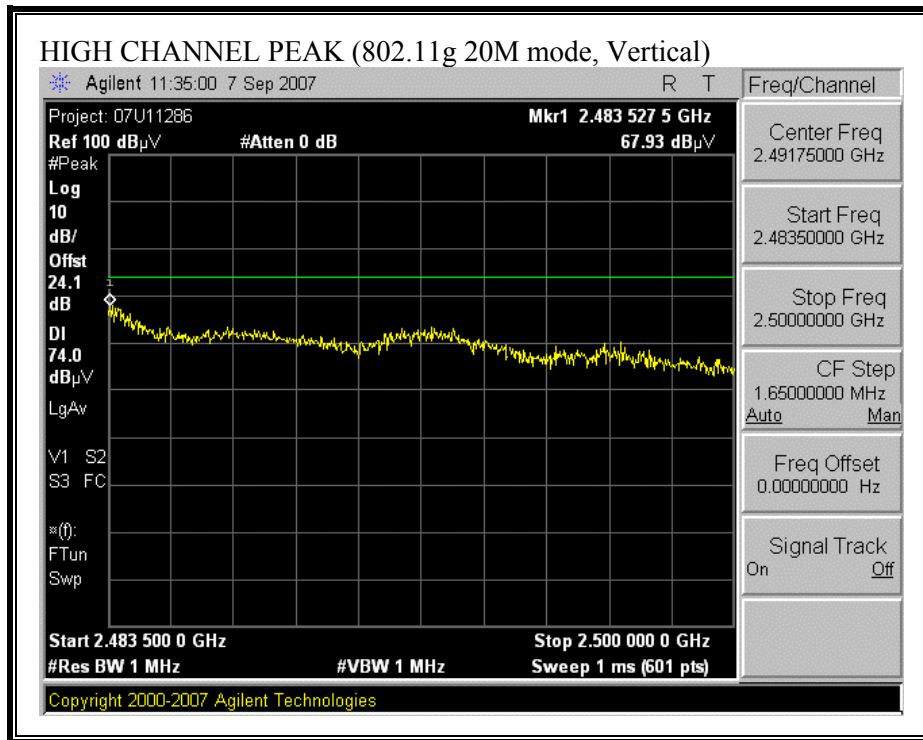

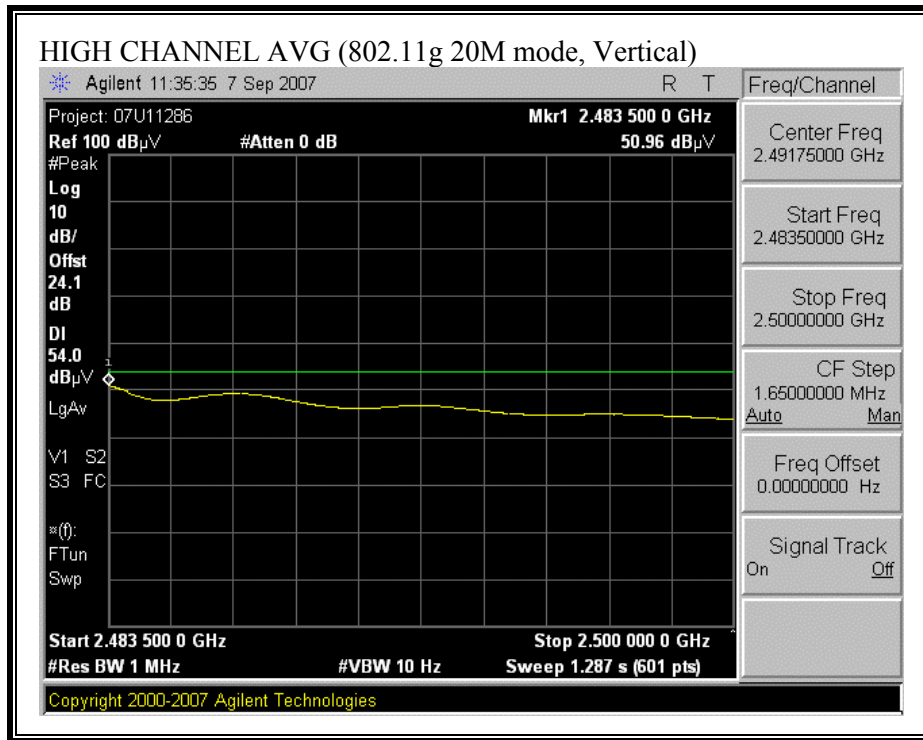

HARMONICS AND SPURIOUS EMISSIONS (802.11g MODE)

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: Marvell Semiconductor, Inc.
 Project #: 07U11286
 Date: 09/10/2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Extender card, Support laptop, with Galtronics Tempest Mimo Antenna.
 Mode: Transmitt g mode

Test Equipment:

| | | | | |
|----------------------|------------------------|-----------------------|--------------|------------|
| Horn 1-18GHz | Pre-amplifer 1-26GHz | Pre-amplifer 26-40GHz | Horn > 18GHz | Limit |
| T120: S/N: 29310 @3m | T145 Agilent 3008A005t | | | FCC 15.209 |

Hi Frequency Cables


| | | | | | |
|-------------------|--------------|---------------|-----|---------------|---|
| 2 foot cable | 3 foot cable | 12 foot cable | HPF | Reject Filter | Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz |
| William 177079009 | | 3m Chamber | | | |


| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Flnr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|------------------------|-------------|-----------------|-------------------|------------|----------|-----------|--------------|------------|----------------|---------------|------------------|-------------------|--------------|---------------|----------------|
| Low Ch 2412MHz | | | | | | | | | | | | | | | |
| 4.824 | 3.0 | 46.7 | 34.9 | 33.7 | 4.4 | -34.8 | 0.0 | 0.0 | 49.9 | 38.2 | 74 | 54 | -24.1 | -15.8 | H |
| 7.236 | 3.0 | 43.0 | 31.0 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 48.8 | 36.8 | 74 | 54 | -25.2 | -17.2 | Noise Floor |
| 4.824 | 3.0 | 45.0 | 32.8 | 33.7 | 4.4 | -34.8 | 0.0 | 0.0 | 48.2 | 36.0 | 74 | 54 | -25.8 | -18.0 | V |
| 7.236 | 3.0 | 43.3 | 31.6 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 49.1 | 37.4 | 74 | 54 | -24.9 | -16.6 | V |
| 9.648 | 3.0 | 42.8 | 31.0 | 36.9 | 6.1 | -35.0 | 0.0 | 0.0 | 50.7 | 38.9 | 74 | 54 | -23.3 | -15.1 | Noise Floor |
| Mid Ch 2437MHz | | | | | | | | | | | | | | | |
| 4.874 | 3.0 | 46.6 | 33.8 | 33.7 | 4.4 | -34.9 | 0.0 | 0.0 | 49.9 | 37.1 | 74 | 54 | -24.1 | -16.9 | V |
| 7.311 | 3.0 | 47.8 | 34.9 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 53.6 | 40.7 | 74 | 54 | -20.4 | -13.3 | V |
| 9.748 | 3.0 | 42.9 | 30.9 | 37.1 | 6.0 | -35.0 | 0.0 | 0.0 | 50.9 | 38.9 | 74 | 54 | -23.1 | -15.1 | Noise Floor |
| 4.874 | 3.0 | 43.6 | 31.9 | 33.7 | 4.4 | -34.9 | 0.0 | 0.0 | 46.9 | 35.2 | 74 | 54 | -27.1 | -18.8 | H |
| 7.311 | 3.0 | 43.2 | 30.6 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 49.1 | 36.4 | 74 | 54 | -24.9 | -17.6 | Noise Floor |
| High Ch 2462MHz | | | | | | | | | | | | | | | |
| 4.924 | 3.0 | 43.2 | 30.4 | 33.8 | 4.3 | -34.9 | 0.0 | 0.0 | 46.5 | 33.6 | 74 | 54 | -27.5 | -20.4 | Noise Floor |
| 4.924 | 3.0 | 50.5 | 36.7 | 33.8 | 4.3 | -34.9 | 0.0 | 0.0 | 53.7 | 39.9 | 74 | 54 | -20.3 | -14.1 | V |
| 7.386 | 3.0 | 52.7 | 38.4 | 35.2 | 5.1 | -34.6 | 0.0 | 0.0 | 58.3 | 44.1 | 74 | 54 | -15.7 | -9.9 | V |
| 9.848 | 3.0 | 42.7 | 30.7 | 37.2 | 5.9 | -35.1 | 0.0 | 0.0 | 50.7 | 38.8 | 74 | 54 | -23.3 | -15.2 | Noise Floor |


Rev. 412.7


| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

RESTRICTED BANDEDGE (802.11g, 40MHz MODE, LOW CHANNEL)

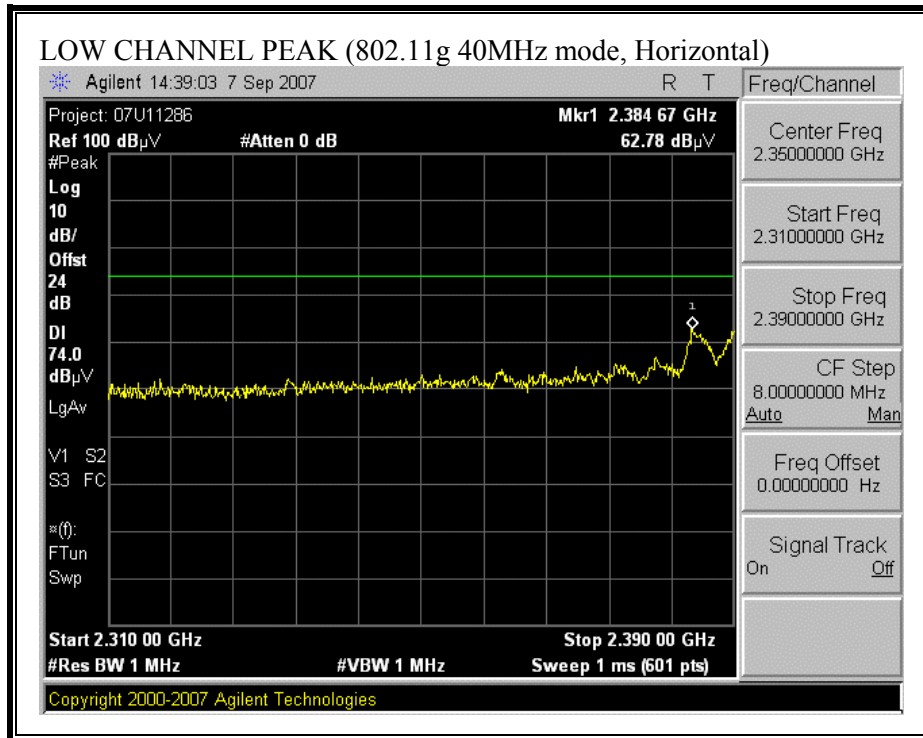


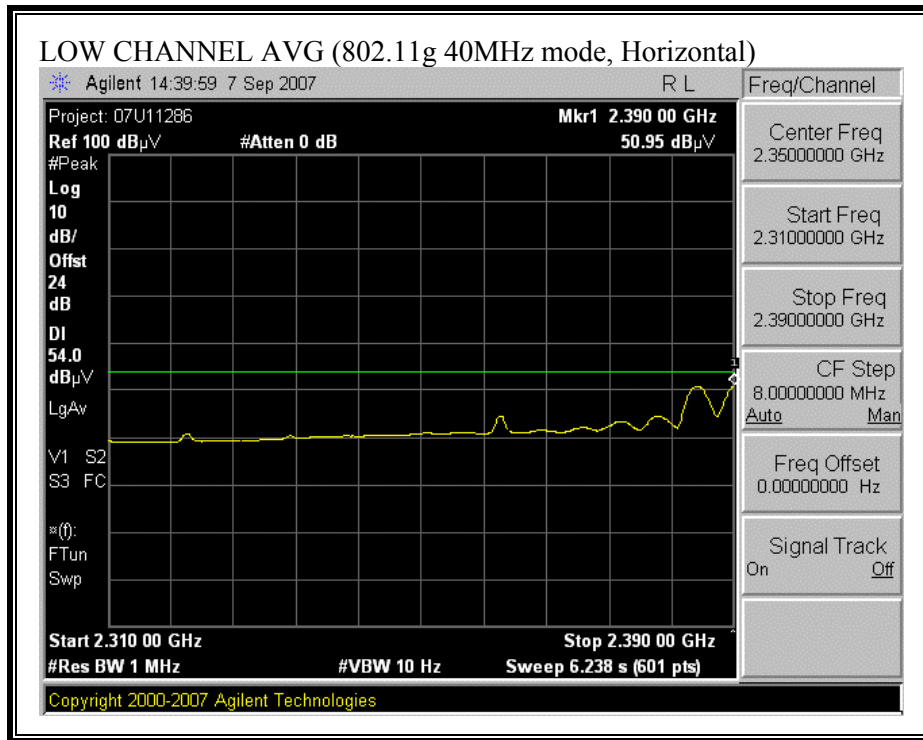


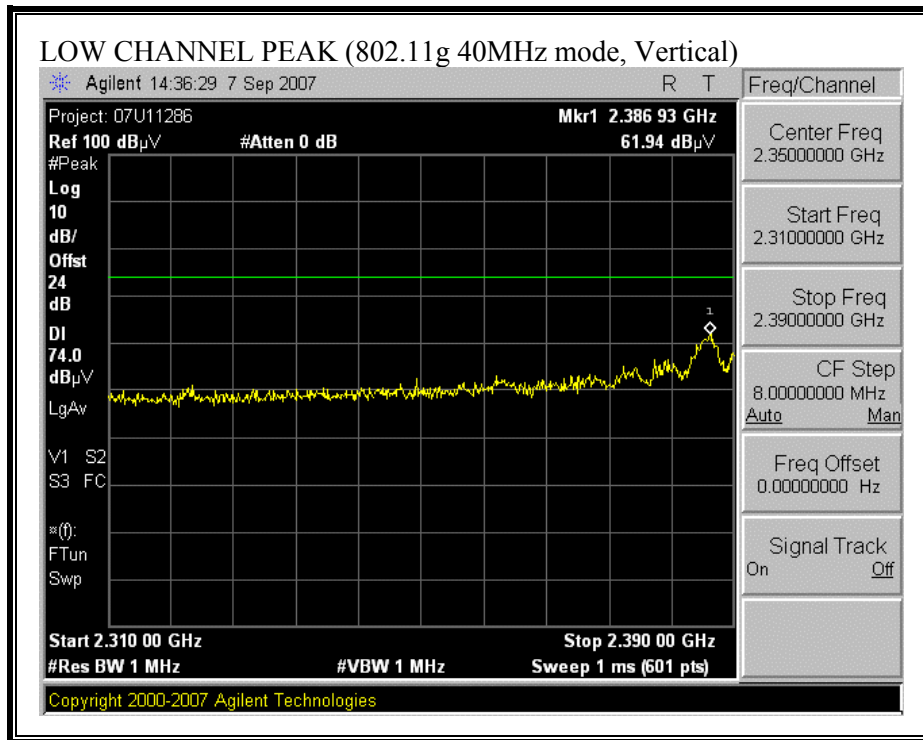


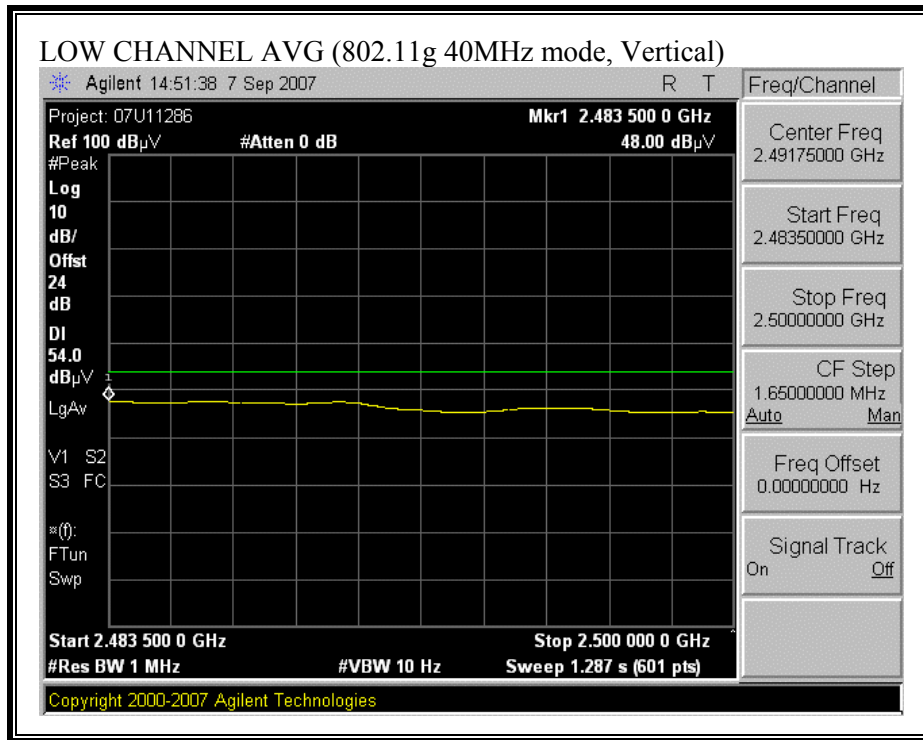


RESTRICTED BANDEDGE (802.11g, 40MGHz MODE, HIGH CHANNEL)

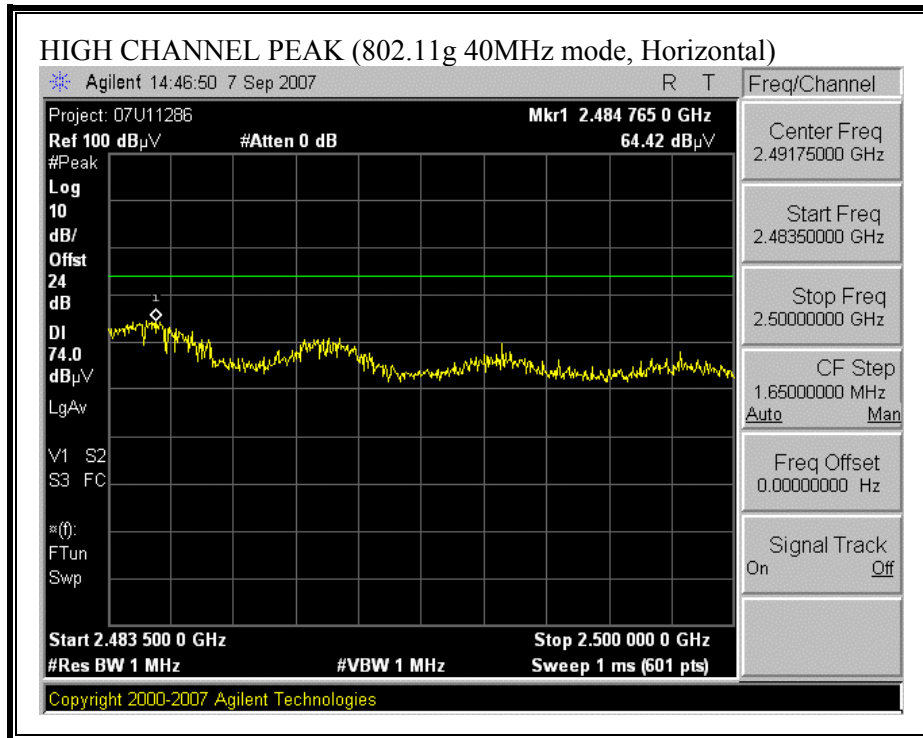

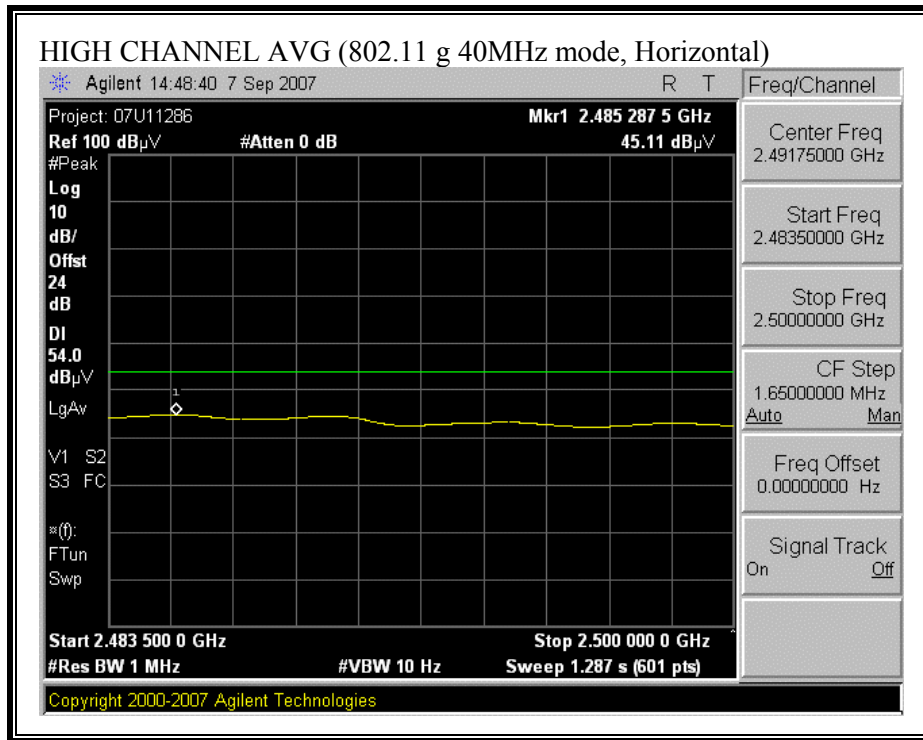

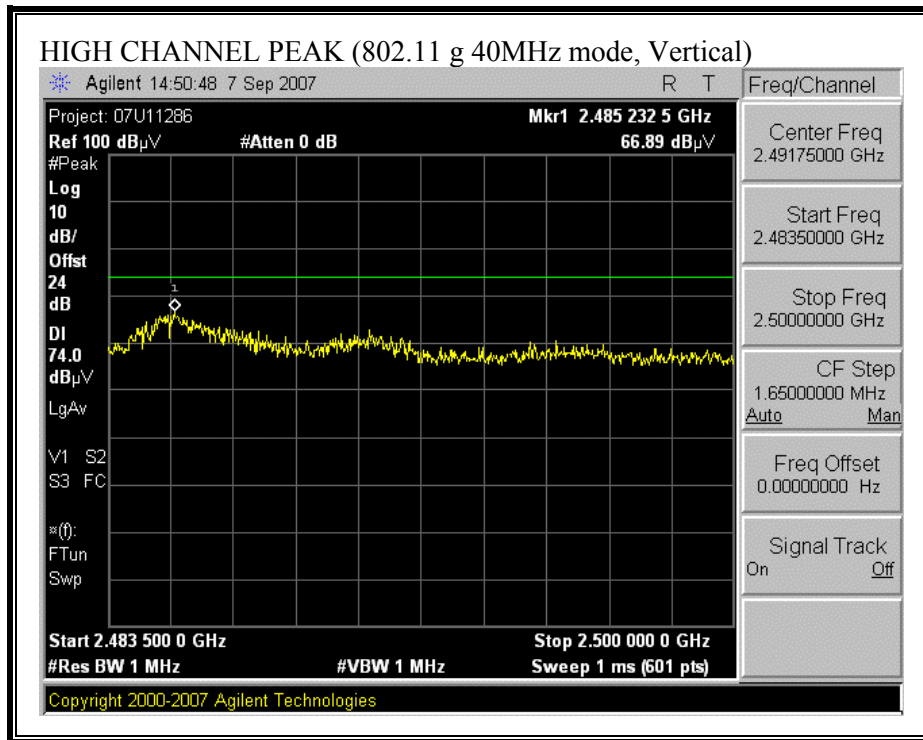

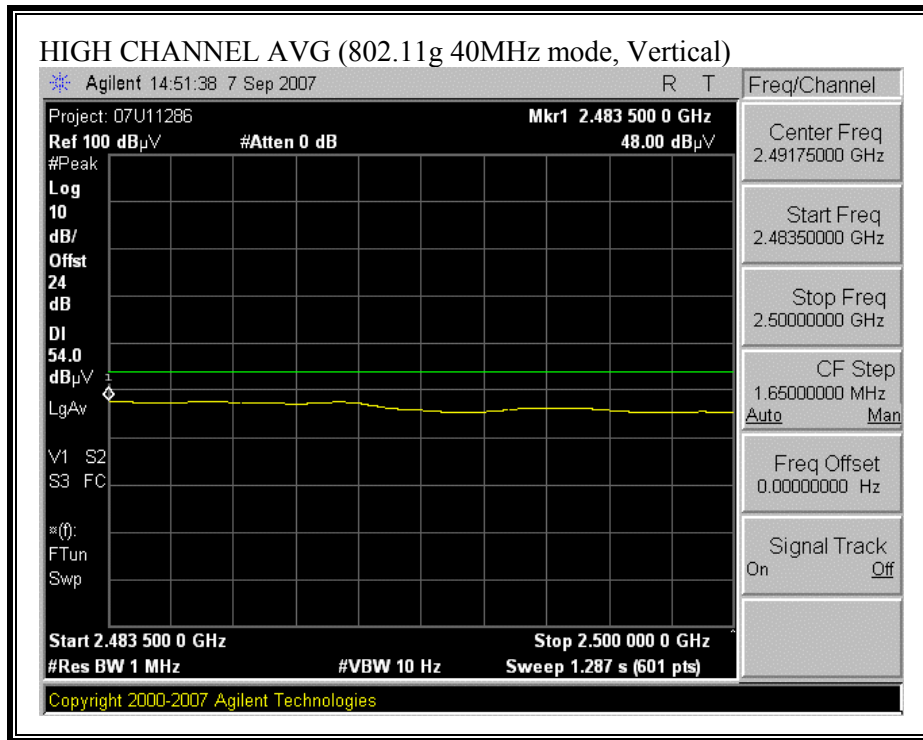

HARMONICS AND SPURIOUS EMISSIONS (802.11g 40MHz mode)

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: Marvell Semiconductor, Inc.
 Project #: 07U11286
 Date: 09/10/2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Extender card, Support laptop, with Galtronics Tempest MIMO Antenna.
 Mode: Transmitt g 40 MHz mode

Test Equipment:

| | | | | |
|----------------------|-----------------------|------------------------|--------------|------------|
| Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit |
| T120; S/N: 29310 @3m | T145 Agilent 3008A005 | | | FCC 15.209 |

Hi Frequency Cables


| | | | | | |
|-------------------|--------------|---------------|-----|---------------|---|
| 2 foot cable | 3 foot cable | 12 foot cable | HPF | Reject Filter | Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz |
| William 177079009 | | 3m Chamber | | | |


| f GHz | Dist (m) | Read Pk dBuV | Read Avg dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filtr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|------------------------|----------|--------------|---------------|---------|-------|--------|-----------|----------|-------------|------------|---------------|----------------|-----------|------------|-------------|
| Low Ch 2422MHz | | | | | | | | | | | | | | | |
| 4.844 | 3.0 | 43.6 | 31.3 | 33.7 | 4.4 | -34.8 | 0.0 | 0.0 | 46.9 | 34.5 | 74 | 54 | -27.1 | -19.5 | H |
| 7.236 | 3.0 | 42.5 | 31.1 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 48.3 | 36.9 | 74 | 54 | -25.7 | -17.1 | Noise Floor |
| 4.824 | 3.0 | 44.0 | 30.5 | 33.7 | 4.4 | -34.8 | 0.0 | 0.0 | 47.2 | 33.8 | 74 | 54 | -26.8 | -20.2 | V |
| 7.236 | 3.0 | 44.6 | 31.6 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 50.4 | 37.4 | 74 | 54 | -23.6 | -16.6 | V |
| 9.648 | 3.0 | 42.2 | 30.9 | 36.9 | 6.1 | -35.0 | 0.0 | 0.0 | 50.2 | 38.9 | 74 | 54 | -23.8 | -15.1 | Noise Floor |
| Mid Ch 2437MHz | | | | | | | | | | | | | | | |
| 4.874 | 3.0 | 43.7 | 30.5 | 33.7 | 4.4 | -34.9 | 0.0 | 0.0 | 47.0 | 33.9 | 74 | 54 | -27.0 | -20.1 | V |
| 7.311 | 3.0 | 43.2 | 33.7 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 49.1 | 39.5 | 74 | 54 | -24.9 | -14.5 | V |
| 9.748 | 3.0 | 42.0 | 30.5 | 37.1 | 6.0 | -35.0 | 0.0 | 0.0 | 50.0 | 38.5 | 74 | 54 | -24.0 | -15.5 | Noise Floor |
| 4.874 | 3.0 | 43.3 | 30.9 | 33.7 | 4.4 | -34.9 | 0.0 | 0.0 | 46.6 | 34.2 | 74 | 54 | -27.4 | -19.8 | H |
| 7.311 | 3.0 | 43.0 | 30.7 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 48.8 | 36.5 | 74 | 54 | -25.2 | -17.5 | Noise Floor |
| High Ch 2452MHz | | | | | | | | | | | | | | | |
| 4.904 | 3.0 | 43.4 | 30.6 | 33.8 | 4.3 | -34.9 | 0.0 | 0.0 | 46.6 | 33.8 | 74 | 54 | -27.4 | -20.2 | Noise Floor |
| 4.904 | 3.0 | 43.8 | 30.5 | 33.8 | 4.3 | -34.9 | 0.0 | 0.0 | 47.0 | 33.7 | 74 | 54 | -27.0 | -20.3 | V |
| 7.386 | 3.0 | 43.4 | 31.3 | 35.2 | 5.1 | -34.6 | 0.0 | 0.0 | 49.1 | 36.9 | 74 | 54 | -24.9 | -17.1 | V |
| 9.808 | 3.0 | 42.7 | 30.7 | 37.2 | 5.9 | -35.0 | 0.0 | 0.0 | 50.7 | 38.7 | 74 | 54 | -23.3 | -15.3 | Noise Floor |


Rev. 4.12.7


| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

RESTRICTED BANDEDGE (802.11n MODE HT20, LOW CHANNEL)

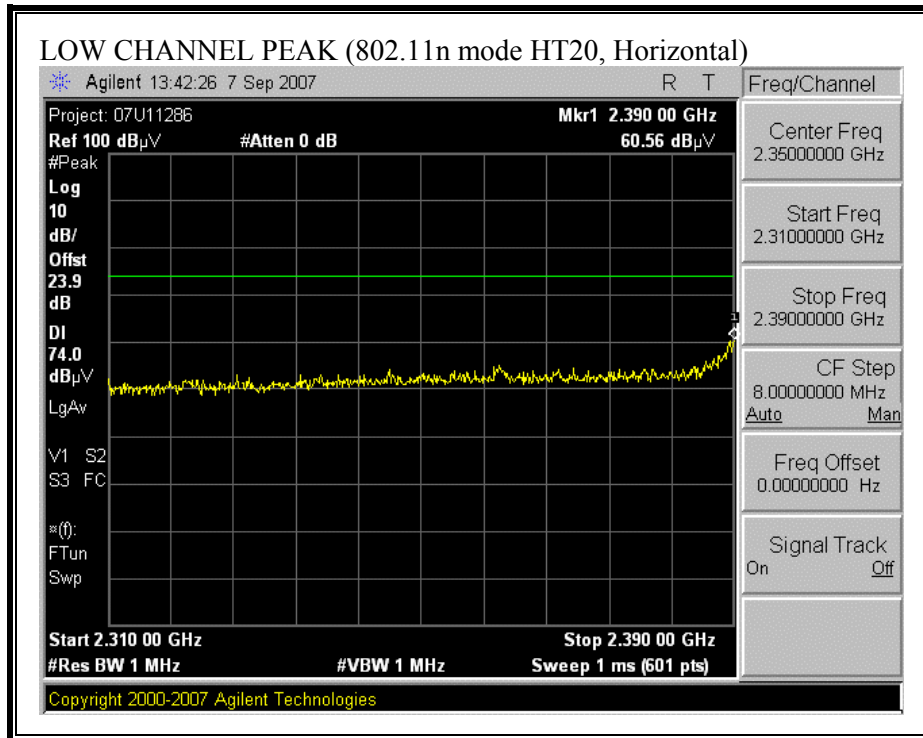


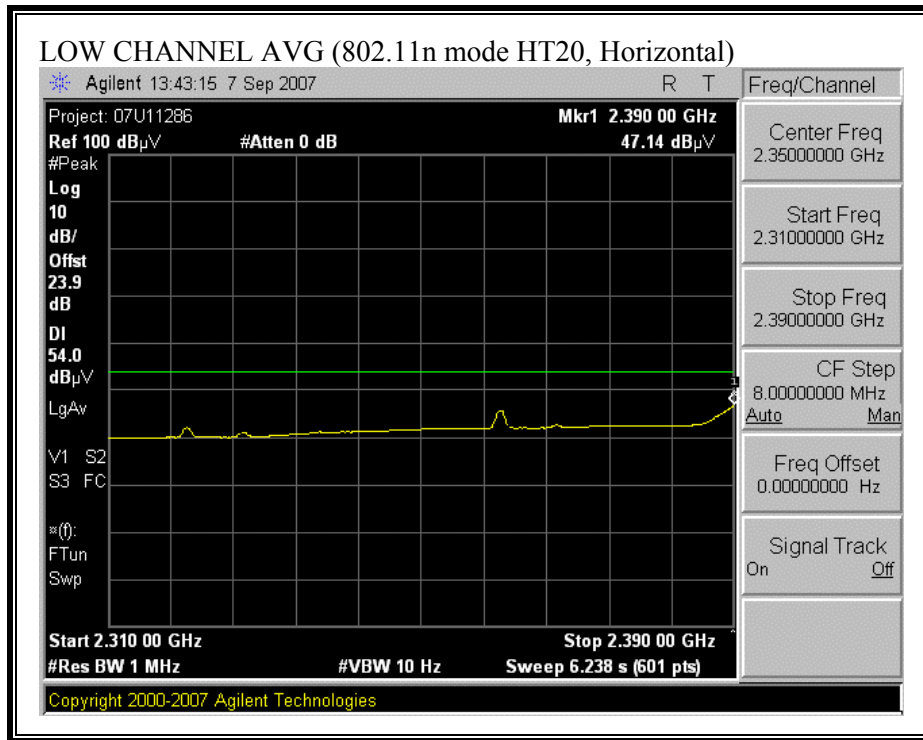


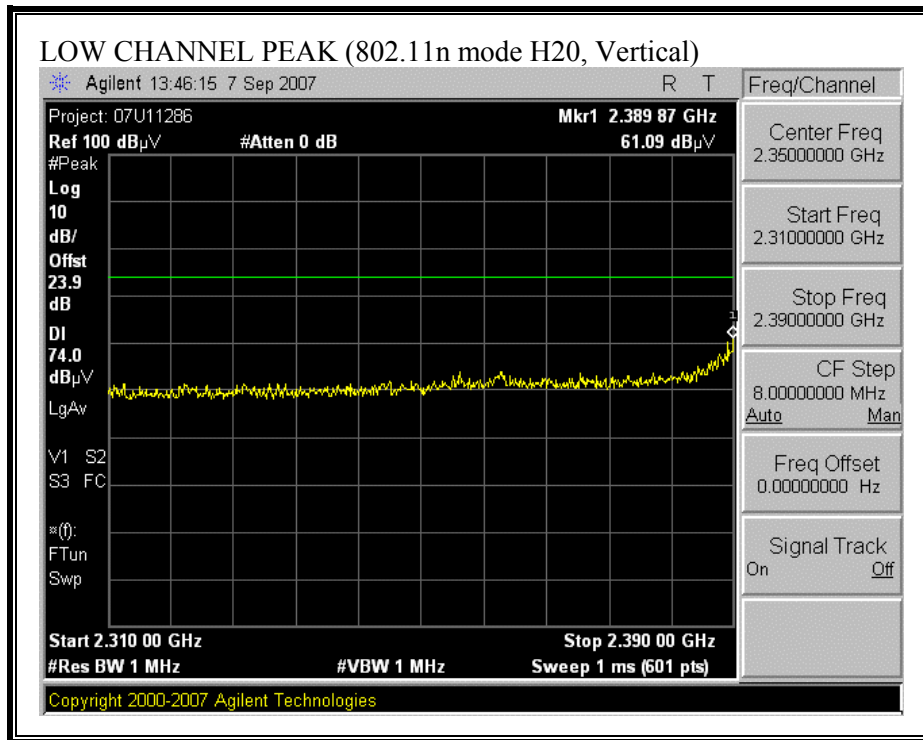


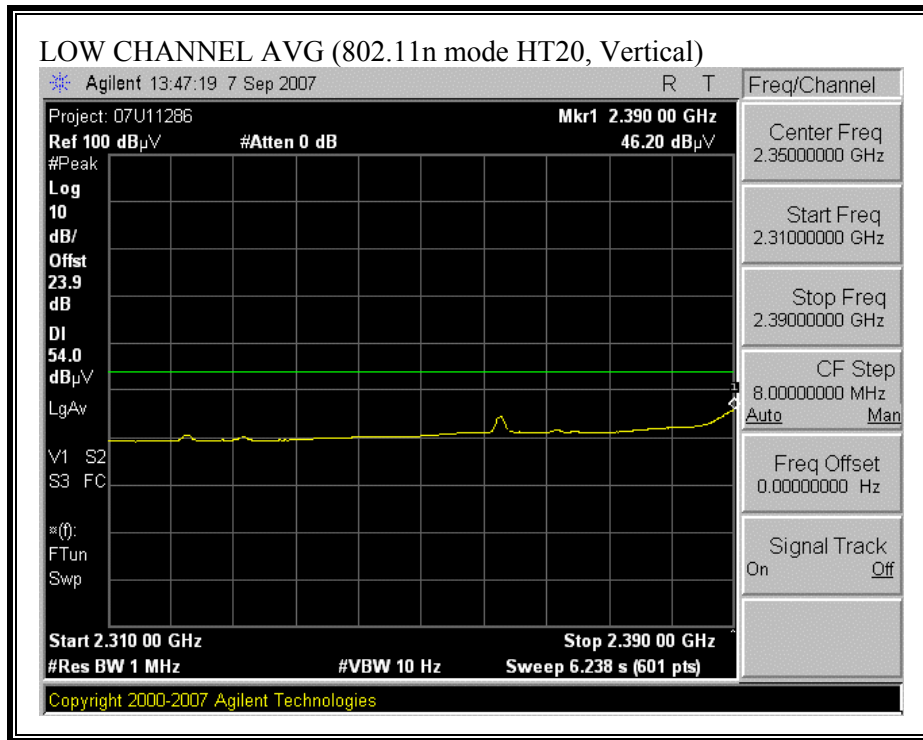


RESTRICTED BANDEDGE (802.11n MODE HT20, HIGH CHANNEL)

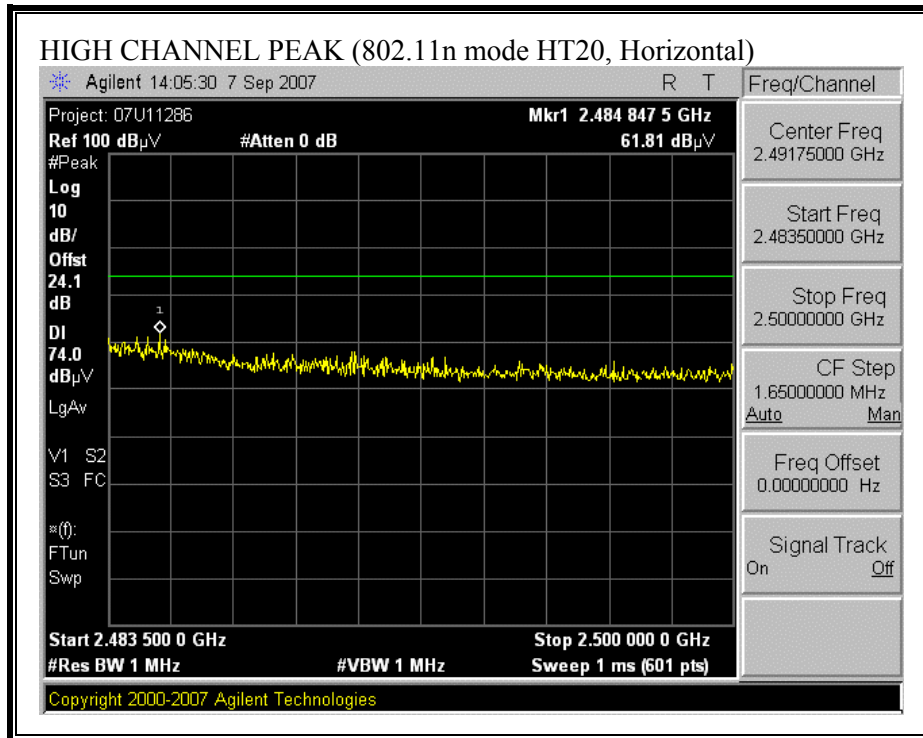

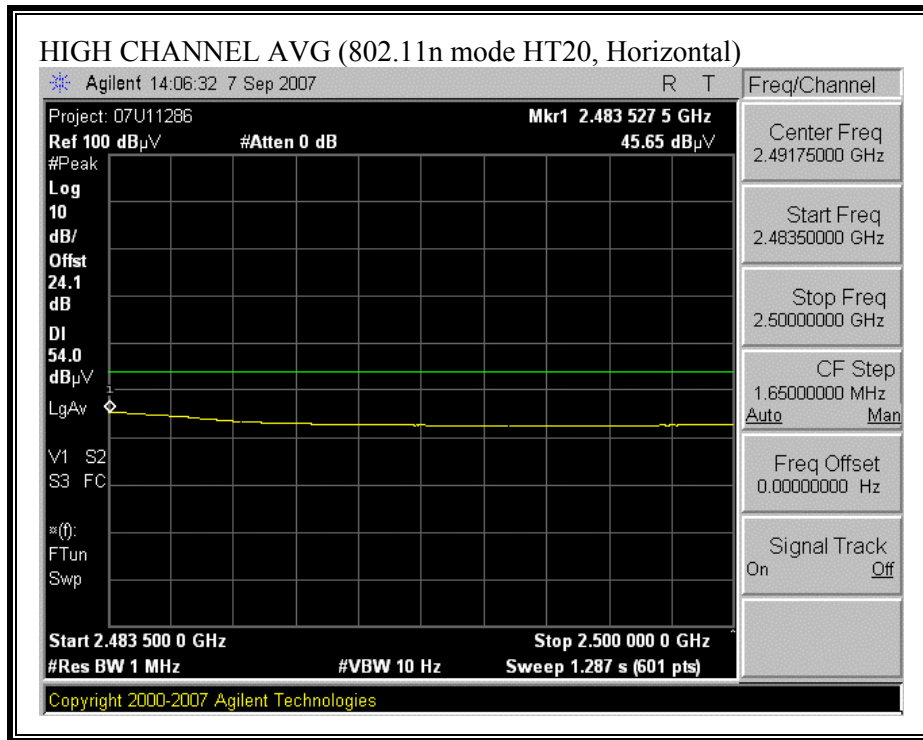

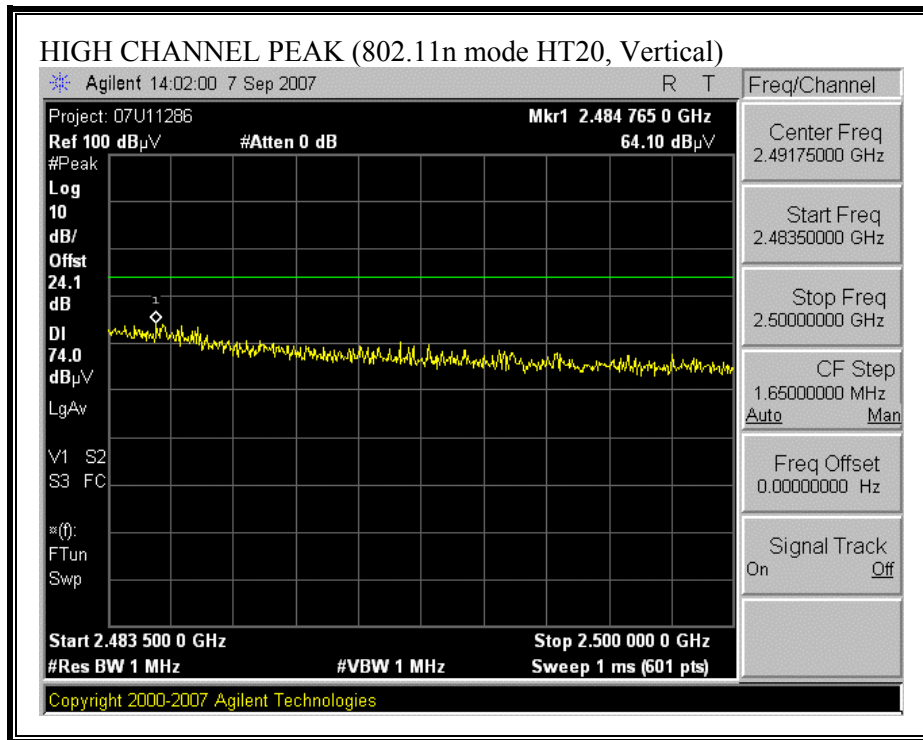

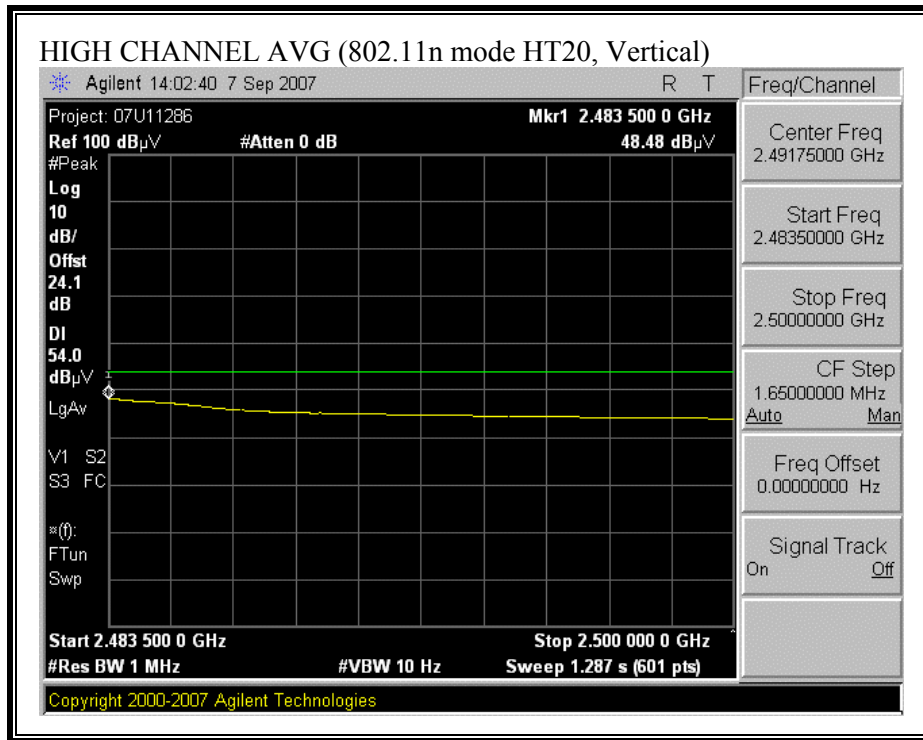

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: Marvell Semiconductor, Inc.
 Project #: 07U11286
 Date: 09/10/2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Extender card, Support laptop, with Galtronics Tempest Mimo Antenna.
 Mode: Transmit HT20 mode

Test Equipment:

| | | | | |
|----------------------|------------------------|-----------------------|--------------|------------|
| Horn 1-18GHz | Pre-amplifer 1-26GHz | Pre-amplifer 26-40GHz | Horn > 18GHz | Limit |
| T120; S/N: 29310 @3m | T145 Agilent 3008A0050 | | | FCC 15.209 |

Hi Frequency Cables


| | | | | | |
|-------------------|--------------|---------------|-----|---------------|--|
| 2 foot cable | 3 foot cable | 12 foot cable | HPF | Reject Filter | Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz |
| William 177079009 | | 3m Chamber | | | |


| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|------------------------|-------------|-----------------|-------------------|------------|----------|-----------|--------------|------------|----------------|---------------|------------------|-------------------|--------------|---------------|----------------|
| Low Ch 2412MHz | | | | | | | | | | | | | | | |
| 4.824 | 3.0 | 46.3 | 34.1 | 33.7 | 4.4 | -34.8 | 0.0 | 0.0 | 49.5 | 37.4 | 74 | 54 | -24.5 | -16.6 | H |
| 7.236 | 3.0 | 43.2 | 31.5 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 49.0 | 37.3 | 74 | 54 | -25.0 | -16.7 | Noise Floor |
| 4.824 | 3.0 | 45.3 | 32.7 | 33.7 | 4.4 | -34.8 | 0.0 | 0.0 | 48.6 | 35.9 | 74 | 54 | -25.4 | -18.1 | V |
| 7.236 | 3.0 | 42.9 | 30.4 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 48.7 | 36.2 | 74 | 54 | -25.3 | -17.8 | V |
| 9.648 | 3.0 | 42.8 | 31.0 | 36.9 | 6.1 | -35.0 | 0.0 | 0.0 | 50.7 | 38.9 | 74 | 54 | -23.3 | -15.1 | Noise Floor |
| Mid Ch 2437MHz | | | | | | | | | | | | | | | |
| 4.874 | 3.0 | 46.4 | 34.2 | 33.7 | 4.4 | -34.9 | 0.0 | 0.0 | 49.7 | 37.5 | 74 | 54 | -24.3 | -16.5 | V |
| 7.311 | 3.0 | 47.3 | 34.4 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 53.2 | 40.2 | 74 | 54 | -20.8 | -13.8 | V |
| 9.748 | 3.0 | 42.4 | 30.7 | 37.1 | 6.0 | -35.0 | 0.0 | 0.0 | 50.3 | 38.7 | 74 | 54 | -23.7 | -15.3 | Noise Floor |
| 4.874 | 3.0 | 43.8 | 32.3 | 33.7 | 4.4 | -34.9 | 0.0 | 0.0 | 47.1 | 35.6 | 74 | 54 | -26.9 | -18.4 | H |
| 7.311 | 3.0 | 43.6 | 30.8 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 49.4 | 36.6 | 74 | 54 | -24.6 | -17.4 | Noise Floor |
| High Ch 2462MHz | | | | | | | | | | | | | | | |
| 4.924 | 3.0 | 44.1 | 30.6 | 33.8 | 4.3 | -34.9 | 0.0 | 0.0 | 47.3 | 33.8 | 74 | 54 | -26.7 | -20.2 | Noise Floor |
| 4.924 | 3.0 | 50.3 | 36.4 | 33.8 | 4.3 | -34.9 | 0.0 | 0.0 | 53.6 | 39.7 | 74 | 54 | -20.4 | -14.3 | V |
| 7.386 | 3.0 | 52.3 | 38.3 | 35.2 | 5.1 | -34.6 | 0.0 | 0.0 | 58.0 | 44.0 | 74 | 54 | -16.0 | -10.0 | V |
| 9.848 | 3.0 | 42.7 | 31.2 | 37.2 | 5.9 | -35.1 | 0.0 | 0.0 | 50.7 | 39.3 | 74 | 54 | -23.3 | -14.7 | Noise Floor |


Rev. 4.12.7


| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

RESTRICTED BANDEDGE (802.11n MODE HT40, LOW CHANNEL)

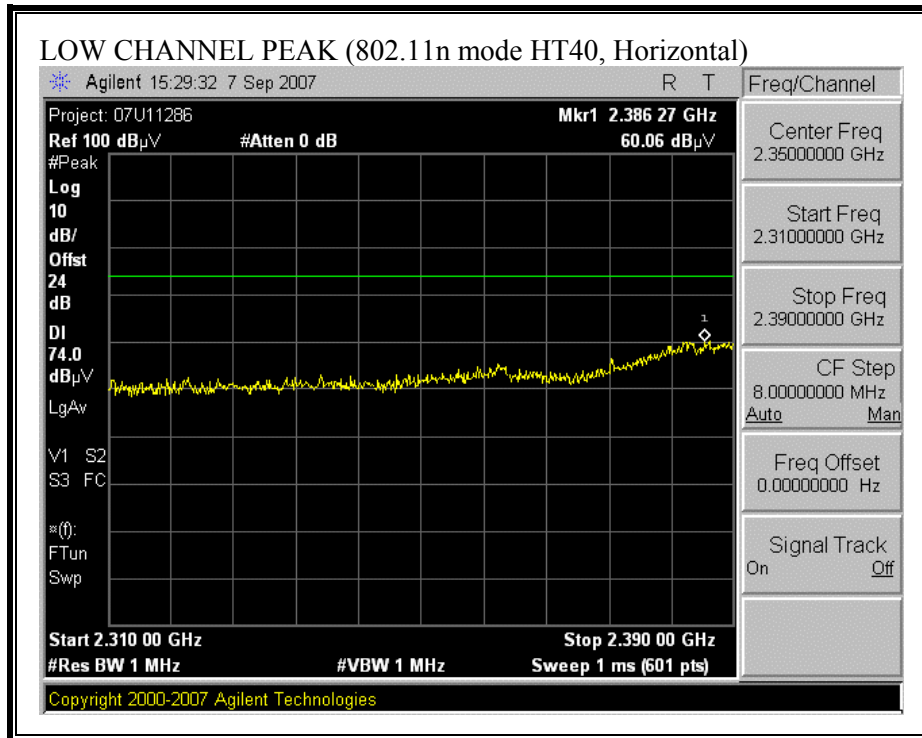


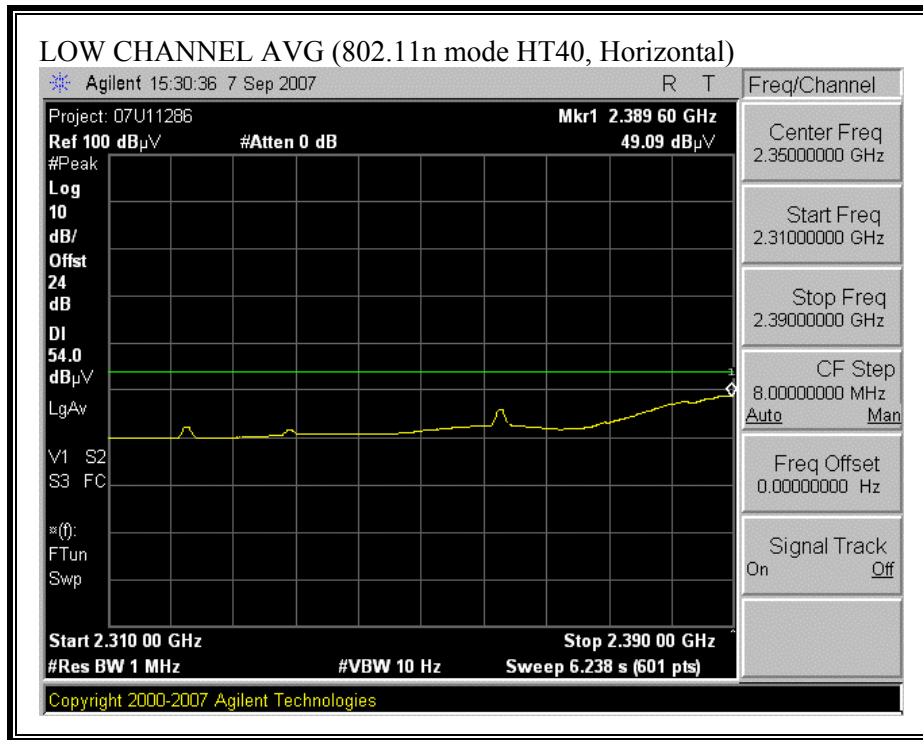


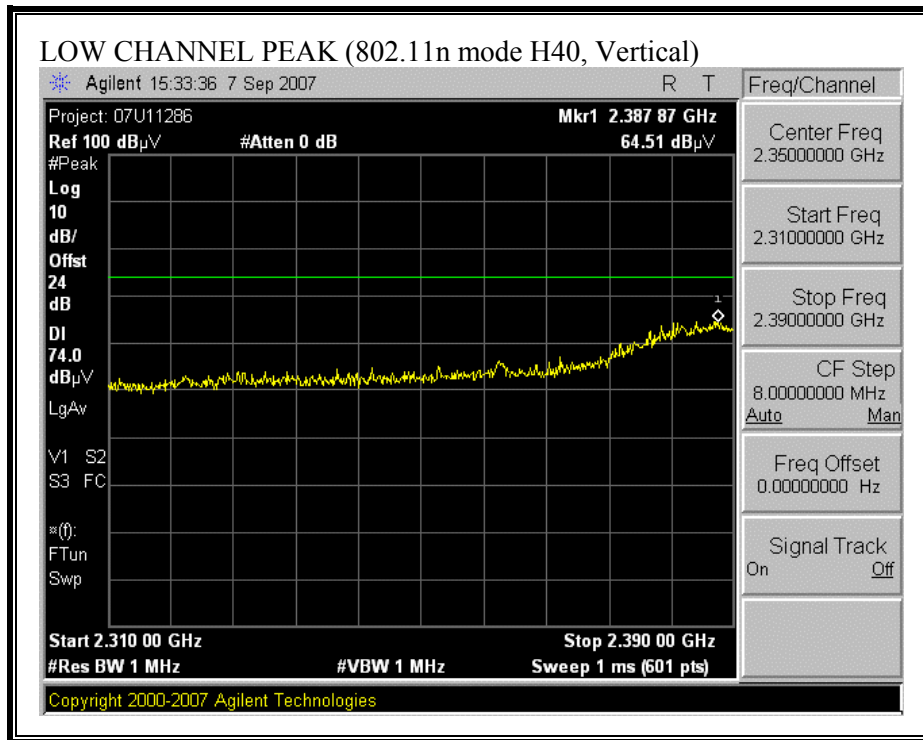


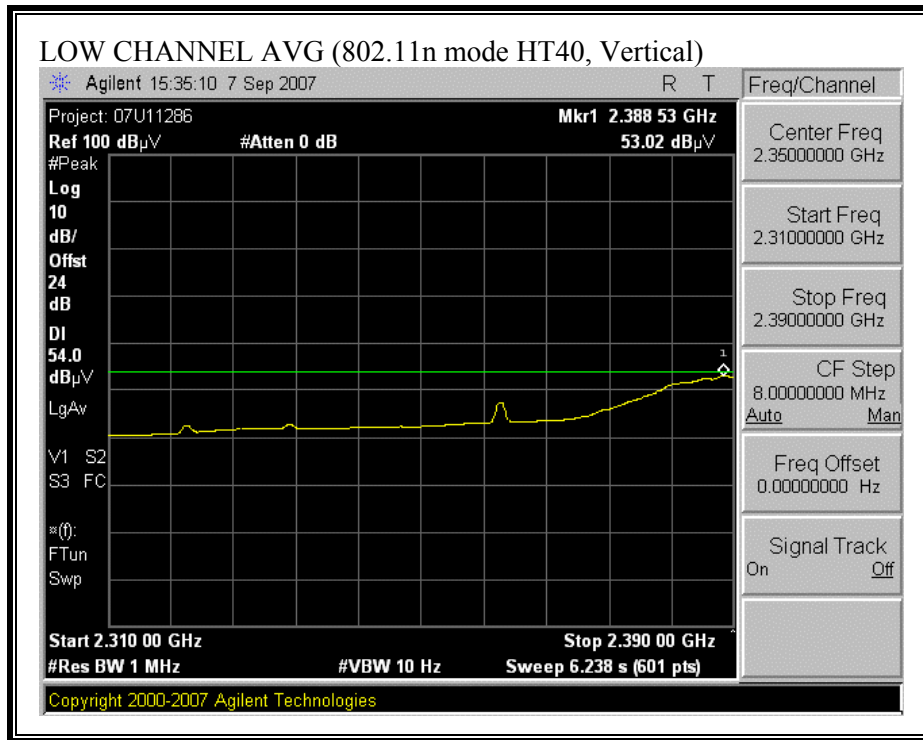


RESTRICTED BANDEDGE (802.11n MODE HT40, HIGH CHANNEL)

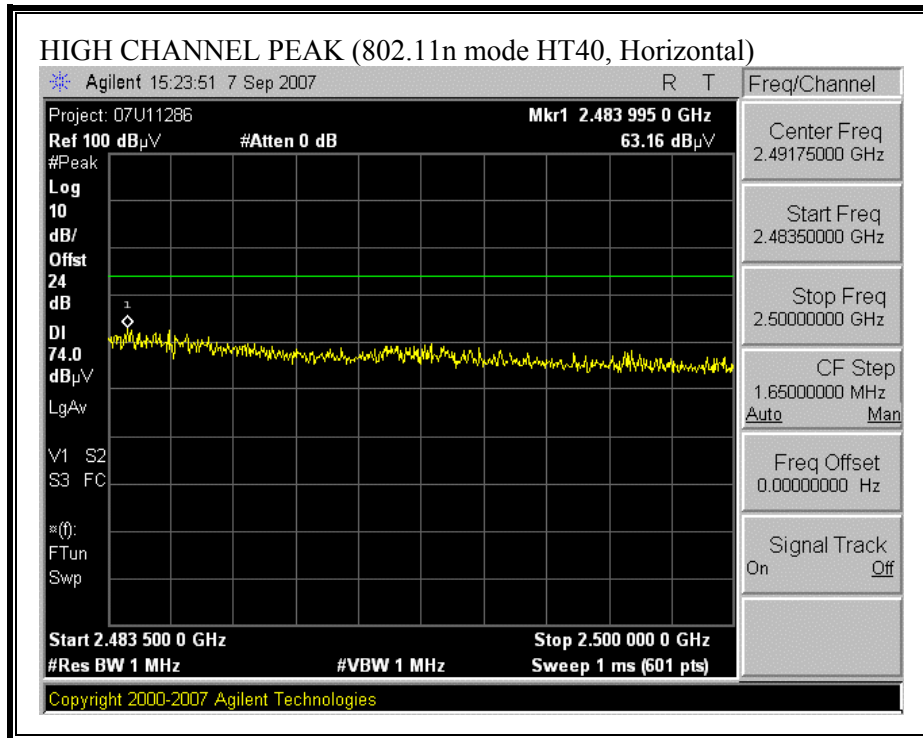

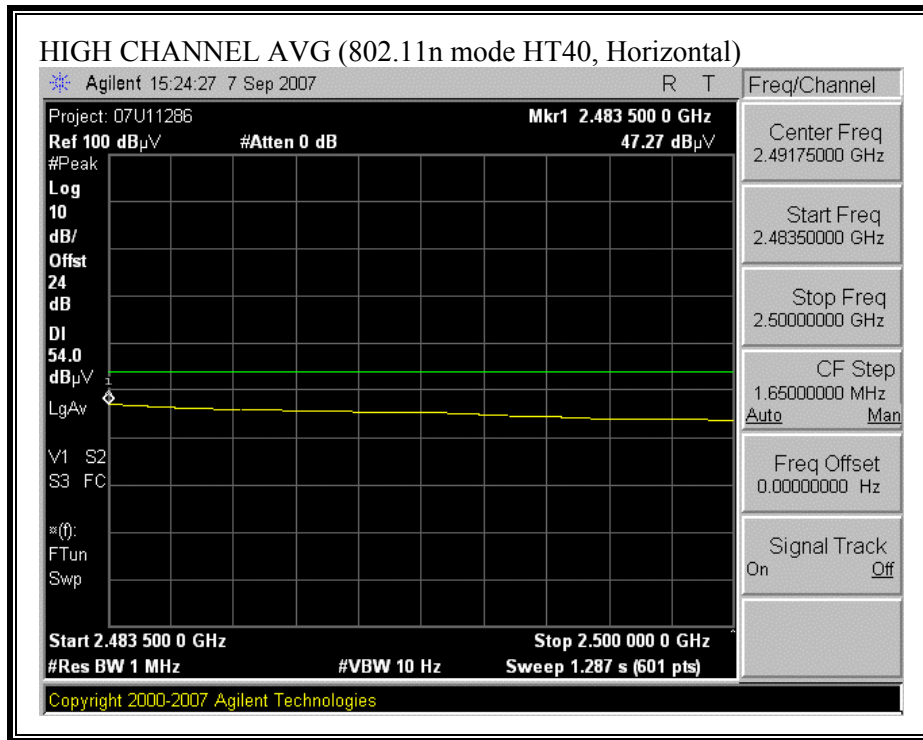

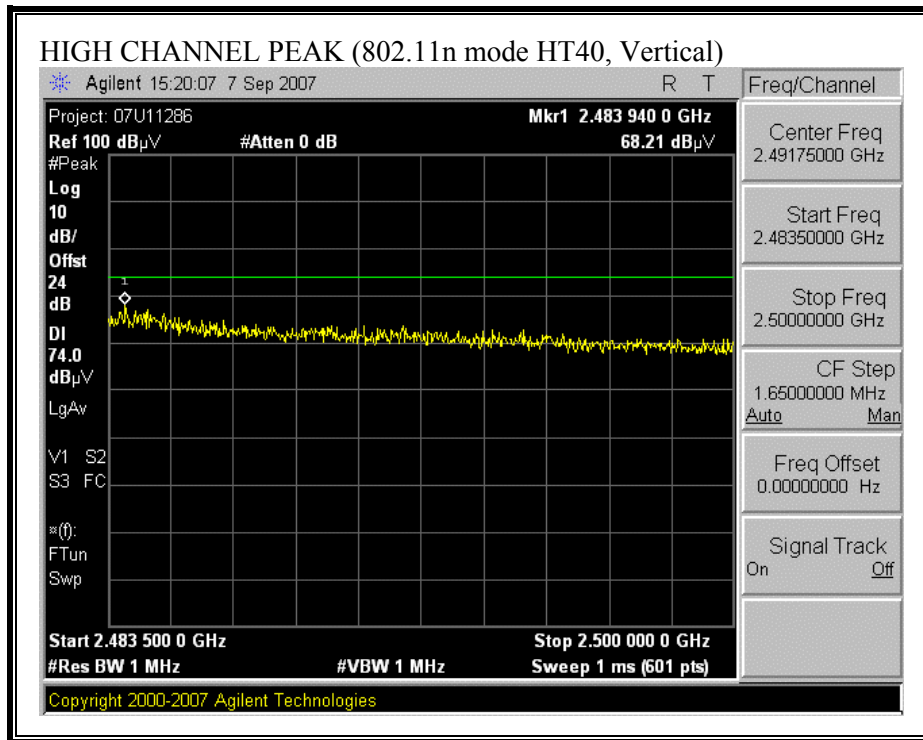

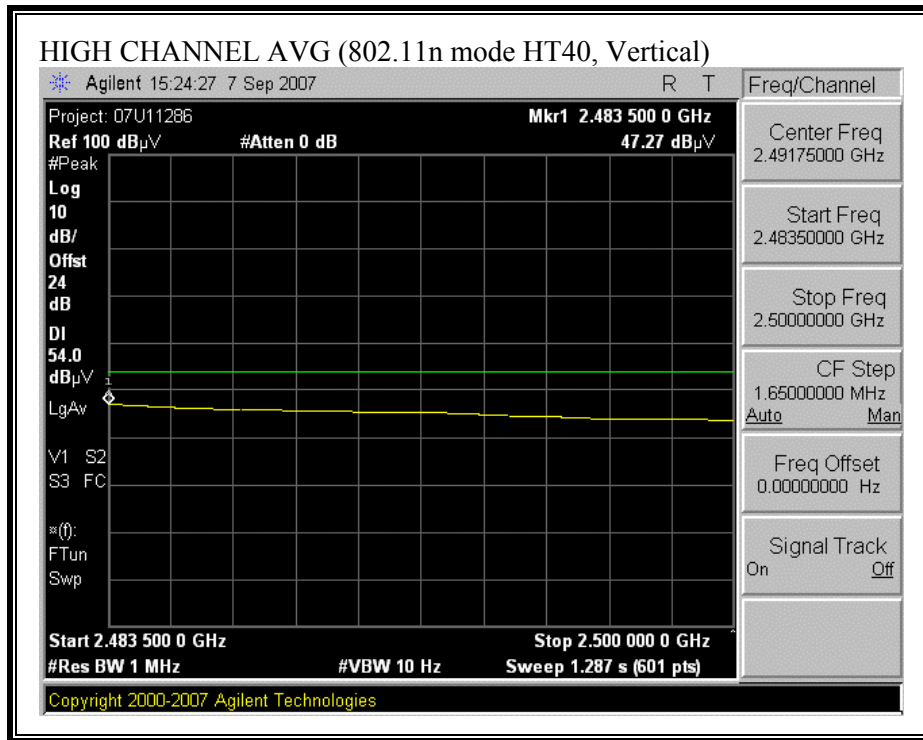

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: Marvell Semiconductor, Inc.
 Project #: 07U11286
 Date: 09/10/2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Extender card, Support laptop, with Galtronics Tempest MIMO Antenna.
 Mode: Transmitt HT 40 (MCS 15) mode

Test Equipment:

| | | | | |
|----------------------|-----------------------|------------------------|--------------|------------|
| Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit |
| T120; S/N: 29310 @3m | T145 Agilent 3008A005 | | | FCC 15.209 |

Hi Frequency Cables

| | | | | | |
|-------------------|--------------|---------------|-----|---------------|---|
| 2 foot cable | 3 foot cable | 12 foot cable | HPF | Reject Filter | Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz |
| William 177079009 | | 3m Chamber | | | |

| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filtr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|------------------------|-------------|-----------------|-------------------|------------|----------|-----------|--------------|-------------|----------------|---------------|------------------|-------------------|--------------|---------------|----------------|
| Low Ch 2422MHz | | | | | | | | | | | | | | | |
| 4.844 | 3.0 | 43.6 | 31.3 | 33.7 | 4.4 | -34.8 | 0.0 | 0.0 | 46.9 | 34.5 | 74 | 54 | -27.1 | -19.5 | H |
| 7.236 | 3.0 | 42.5 | 31.1 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 48.3 | 36.9 | 74 | 54 | -25.7 | -17.1 | Noise Floor |
| 4.824 | 3.0 | 44.0 | 30.5 | 33.7 | 4.4 | -34.8 | 0.0 | 0.0 | 47.2 | 33.8 | 74 | 54 | -26.8 | -20.2 | V |
| 7.236 | 3.0 | 44.6 | 31.6 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 50.4 | 37.4 | 74 | 54 | -23.6 | -16.6 | V |
| 9.648 | 3.0 | 42.2 | 30.9 | 36.9 | 6.1 | -35.0 | 0.0 | 0.0 | 50.2 | 38.9 | 74 | 54 | -23.8 | -15.1 | Noise Floor |
| Mid Ch 2437MHz | | | | | | | | | | | | | | | |
| 4.874 | 3.0 | 43.7 | 30.5 | 33.7 | 4.4 | -34.9 | 0.0 | 0.0 | 47.0 | 33.9 | 74 | 54 | -27.0 | -20.1 | V |
| 7.311 | 3.0 | 43.2 | 33.7 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 49.1 | 39.5 | 74 | 54 | -24.9 | -14.5 | V |
| 9.748 | 3.0 | 42.0 | 30.5 | 37.1 | 6.0 | -35.0 | 0.0 | 0.0 | 50.0 | 38.5 | 74 | 54 | -24.0 | -15.5 | Noise Floor |
| 4.874 | 3.0 | 43.3 | 30.9 | 33.7 | 4.4 | -34.9 | 0.0 | 0.0 | 46.6 | 34.2 | 74 | 54 | -27.4 | -19.8 | H |
| 7.311 | 3.0 | 43.0 | 30.7 | 35.2 | 5.3 | -34.7 | 0.0 | 0.0 | 48.8 | 36.5 | 74 | 54 | -25.2 | -17.5 | Noise Floor |
| High Ch 2452MHz | | | | | | | | | | | | | | | |
| 4.904 | 3.0 | 43.4 | 30.6 | 33.8 | 4.3 | -34.9 | 0.0 | 0.0 | 46.6 | 33.8 | 74 | 54 | -27.4 | -20.2 | H/Noise Floor |
| 4.904 | 3.0 | 43.7 | 30.3 | 33.8 | 4.3 | -34.9 | 0.0 | 0.0 | 46.9 | 33.5 | 74 | 54 | -27.1 | -20.5 | V |
| 7.386 | 3.0 | 43.4 | 31.3 | 35.2 | 5.1 | -34.6 | 0.0 | 0.0 | 49.1 | 36.9 | 74 | 54 | -24.9 | -17.1 | V |
| 9.808 | 3.0 | 42.7 | 30.7 | 37.2 | 5.9 | -35.0 | 0.0 | 0.0 | 50.7 | 38.7 | 74 | 54 | -23.3 | -15.3 | Noise Floor |

Rev. 4.12.7

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

7.2.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: Marvell Semiconductor, Inc.
 Project #: 07U11286
 Date: 09/11/2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Extender card, Support laptop, with Galtronics Tempest Mino Antenna.
 Mode: Transmitt a 20 MHz mode

Test Equipment:

| | | | | |
|----------------------|-----------------------|------------------------|--------------|------------|
| Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit |
| T120; S/N: 29310 @3m | T145 Agilent 3008A005 | | | FCC 15.209 |

Hi Frequency Cables

| | | | | | |
|-------------------|--------------|---------------|-----|---------------|--|
| 2 foot cable | 3 foot cable | 12 foot cable | HPF | Reject Filter | Peak Measurements RBW=VBW=1MHz |
| William 177079009 | | 3m Chamber | | | Average Measurements RBW=1MHz ; VBW=10Hz |

| f GHz | Dist (m) | Read Pk dBuV | Read Avg dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fitr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|------------------------|----------|--------------|---------------|---------|-------|--------|-----------|---------|-------------|------------|---------------|----------------|-----------|------------|-------------|
| Low Ch 5745MHz | | | | | | | | | | | | | | | |
| 11.490 | 3.0 | 47.5 | 33.8 | 37.6 | 4.4 | -33.1 | 0.0 | 0.0 | 56.5 | 42.7 | 74 | 54 | -17.5 | -11.3 | H |
| 17.235 | 3.0 | 45.5 | 33.1 | 40.2 | 5.3 | -32.0 | 0.0 | 0.0 | 59.0 | 46.6 | 74 | 54 | -15.0 | -7.4 | Noise Floor |
| 11.490 | 3.0 | 44.0 | 30.5 | 37.6 | 4.4 | -33.1 | 0.0 | 0.0 | 52.9 | 39.5 | 74 | 54 | -21.1 | -14.5 | V |
| 17.235 | 3.0 | 44.6 | 31.6 | 40.2 | 5.3 | -32.0 | 0.0 | 0.0 | 58.1 | 45.2 | 74 | 54 | -15.9 | -8.8 | Noise Floor |
| Mid Ch 5785MHz | | | | | | | | | | | | | | | |
| 11.570 | 3.0 | 47.3 | 36.0 | 37.6 | 4.4 | -33.0 | 0.0 | 0.0 | 56.4 | 45.1 | 74 | 54 | -17.6 | -8.9 | V |
| 17.355 | 3.0 | 43.4 | 32.8 | 40.3 | 5.3 | -32.0 | 0.0 | 0.0 | 57.0 | 46.4 | 74 | 54 | -17.0 | -7.6 | Noise Floor |
| 11.570 | 3.0 | 45.1 | 32.2 | 37.6 | 4.4 | -33.0 | 0.0 | 0.0 | 54.2 | 41.3 | 74 | 54 | -19.8 | -12.7 | H |
| 17.355 | 3.0 | 45.4 | 32.8 | 40.3 | 5.3 | -32.0 | 0.0 | 0.0 | 59.0 | 46.4 | 74 | 54 | -15.0 | -7.6 | Noise Floor |
| High Ch 5825MHz | | | | | | | | | | | | | | | |
| 11.650 | 3.0 | 46.5 | 33.5 | 37.7 | 4.3 | -32.9 | 0.0 | 0.0 | 55.6 | 42.5 | 74 | 54 | -18.4 | -11.5 | V |
| 17.475 | 3.0 | 45.1 | 32.5 | 40.5 | 4.3 | -32.0 | 0.0 | 0.0 | 57.8 | 45.3 | 74 | 54 | -16.2 | -8.7 | Noise Floor |
| 11.650 | 3.0 | 45.9 | 32.3 | 37.7 | 5.1 | -32.9 | 0.0 | 0.0 | 55.7 | 42.2 | 74 | 54 | -18.3 | -11.8 | H |
| 17.475 | 3.0 | 45.1 | 31.8 | 40.5 | 5.9 | -32.0 | 0.0 | 0.0 | 59.4 | 46.2 | 74 | 54 | -14.6 | -7.8 | Noise Floor |

Rev. 412.7

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

HARMONICS AND SPURIOUS EMISSIONS (802.11a 40MHz MODE)

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: Marvell Semiconductor, Inc.
 Project #: 07U11286
 Date: 09/11/2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Extender card, Support laptop, with Galtronics Tempest MIMO Antenna.
 Mode: Transmitt a 40 MHz mode

Test Equipment:

| | | | | |
|----------------------|-----------------------|-----------------------|--------------|------------|
| Horn 1-18GHz | Pre-amplifer 1-26GHz | Pre-amplifer 26-40GHz | Horn > 18GHz | Limit |
| T120; S/N: 29310 @3m | T145 Agilent 3008A005 | | | FCC 15.209 |

Hi Frequency Cables

| | | | | | |
|-------------------|--------------|---------------|-----|---------------|---|
| 2 foot cable | 3 foot cable | 12 foot cable | HPF | Reject Filter | Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz |
| William 177079009 | | 3m Chamber | | | |

| f GHz | Dist (m) | Read Pk dBuV | Read Avg dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filtr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|------------------------|----------|--------------|---------------|---------|-------|--------|-----------|----------|-------------|------------|---------------|----------------|-----------|------------|-------------|
| Low Ch 5755MHz | | | | | | | | | | | | | | | |
| 11.510 | 3.0 | 44.8 | 31.3 | 37.6 | 4.4 | -33.1 | 0.0 | 0.0 | 53.7 | 40.3 | 74 | 54 | -20.3 | -13.7 | H |
| 17.265 | 3.0 | 45.3 | 32.9 | 40.3 | 5.3 | -32.0 | 0.0 | 0.0 | 58.8 | 46.4 | 74 | 54 | -15.2 | -7.6 | Noise Floor |
| 11.510 | 3.0 | 45.0 | 32.4 | 37.6 | 4.4 | -33.1 | 0.0 | 0.0 | 54.0 | 41.4 | 74 | 54 | -20.0 | -12.6 | V |
| 17.265 | 3.0 | 45.9 | 33.0 | 40.3 | 5.3 | -32.0 | 0.0 | 0.0 | 59.4 | 46.5 | 74 | 54 | -14.6 | -7.5 | Noise Floor |
| High Ch 5795MHz | | | | | | | | | | | | | | | |
| 11.590 | 3.0 | 45.0 | 31.5 | 37.6 | 4.3 | -33.0 | 0.0 | 0.0 | 54.0 | 40.5 | 74 | 54 | -20.0 | -13.5 | V |
| 17.385 | 3.0 | 44.6 | 32.5 | 40.4 | 4.3 | -32.0 | 0.0 | 0.0 | 57.2 | 45.1 | 74 | 54 | -16.8 | -8.9 | Noise Floor |
| 11.590 | 3.0 | 43.7 | 31.5 | 37.6 | 5.1 | -33.0 | 0.0 | 0.0 | 53.4 | 41.3 | 74 | 54 | -20.6 | -12.7 | H |
| 17.385 | 3.0 | 45.2 | 32.5 | 40.4 | 5.9 | -32.0 | 0.0 | 0.0 | 59.5 | 46.7 | 74 | 54 | -14.5 | -7.3 | Noise Floor |

4.0

Rev. 4.12.7

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: Marvell Semiconductor, Inc.
 Project #: 07U11286
 Date: 09/11/2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Extender card, Support laptop, with Galtronics Tempest Mino Antenna.
 Mode: Transmitt HT 20 MHz mode

Test Equipment:

| | | | | |
|----------------------|-----------------------|------------------------|--------------|------------|
| Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit |
| T120; S/N: 29310 @3m | T145 Agilent 3008A005 | | | FCC 15.209 |

Hi Frequency Cables

| | | | | | |
|-------------------|--------------|---------------|-----|---------------|---|
| 2 foot cable | 3 foot cable | 12 foot cable | HPF | Reject Filter | Peak Measurements RBW=VBW=1MHz |
| William 177079009 | | 3m Chamber | | | Average Measurements RBW=1MHz ; VBW=10Hz |

| f GHz | Dist (m) | Read Pk dBuV | Read Avg dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|------------------------|----------|--------------|---------------|---------|-------|--------|-----------|---------|-------------|------------|---------------|----------------|-----------|------------|-------------|
| Low Ch 5745MHz | | | | | | | | | | | | | | | |
| 11.490 | 3.0 | 43.4 | 31.2 | 37.6 | 4.4 | -33.1 | 0.0 | 0.0 | 52.4 | 40.1 | 74 | 54 | -21.6 | -13.9 | H |
| 17.235 | 3.0 | 46.1 | 32.9 | 40.2 | 5.3 | -32.0 | 0.0 | 0.0 | 59.7 | 46.4 | 74 | 54 | -14.3 | -7.6 | Noise Floor |
| 11.490 | 3.0 | 43.5 | 31.2 | 37.6 | 4.4 | -33.1 | 0.0 | 0.0 | 52.4 | 40.1 | 74 | 54 | -21.6 | -13.9 | V |
| 17.235 | 3.0 | 46.1 | 32.9 | 40.2 | 5.3 | -32.0 | 0.0 | 0.0 | 59.7 | 46.4 | 74 | 54 | -14.3 | -7.6 | Noise Floor |
| Mid Ch 5785MHz | | | | | | | | | | | | | | | |
| 11.570 | 3.0 | 46.4 | 31.4 | 37.6 | 4.4 | -33.0 | 0.0 | 0.0 | 55.4 | 40.4 | 74 | 54 | -18.6 | -13.6 | V |
| 17.355 | 3.0 | 45.4 | 32.8 | 40.3 | 5.3 | -32.0 | 0.0 | 0.0 | 59.1 | 46.4 | 74 | 54 | -14.9 | -7.6 | Noise Floor |
| 11.570 | 3.0 | 43.8 | 31.3 | 37.6 | 4.4 | -33.0 | 0.0 | 0.0 | 52.8 | 40.4 | 74 | 54 | -21.2 | -13.6 | H |
| 17.355 | 3.0 | 45.8 | 32.8 | 40.3 | 5.3 | -32.0 | 0.0 | 0.0 | 59.4 | 46.4 | 74 | 54 | -14.6 | -7.6 | H |
| High Ch 5825MHz | | | | | | | | | | | | | | | |
| 11.650 | 3.0 | 45.3 | 31.5 | 37.7 | 4.3 | -32.9 | 0.0 | 0.0 | 54.3 | 40.6 | 74 | 54 | -19.7 | -13.4 | V |
| 17.475 | 3.0 | 45.0 | 31.9 | 40.5 | 4.3 | -32.0 | 0.0 | 0.0 | 57.7 | 44.6 | 74 | 54 | -16.3 | -9.4 | Noise Floor |
| 11.650 | 3.0 | 44.7 | 31.6 | 37.7 | 5.1 | -32.9 | 0.0 | 0.0 | 54.5 | 41.4 | 74 | 54 | -19.5 | -12.6 | H |
| 17.475 | 3.0 | 45.2 | 31.9 | 40.5 | 5.9 | -32.0 | 0.0 | 0.0 | 59.5 | 46.2 | 74 | 54 | -14.5 | -7.8 | Noise Floor |

Rev. 4.12.7

| | | |
|--------------------------|-------------------------------------|--------------------------------------|
| f Measurement Frequency | Amp Preamp Gain | Avg Lim Average Field Strength Limit |
| Dist Distance to Antenna | D Corr Distance Correct to 3 meters | Pk Lim Peak Field Strength Limit |
| Read Analyzer Reading | Avg Average Field Strength @ 3 m | Avg Mar Margin vs. Average Limit |
| AF Antenna Factor | Peak Calculated Peak Field Strength | Pk Mar Margin vs. Peak Limit |
| CL Cable Loss | HPF High Pass Filter | |

HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: Marvell Semiconductor, Inc.
 Project #: 07U11286
 Date: 09/11/2007
 Test Engineer: Thanh Nguyen
 Configuration: EUT, Extender card, Support laptop, with Galtronics Tempest Mimo Antenna.
 Mode: Transmitt HT 40 MHz mode

Test Equipment:

| | | | | |
|----------------------|------------------------|-----------------------|--------------|------------|
| Horn 1-18GHz | Pre-amplifer 1-26GHz | Pre-amplifer 26-40GHz | Horn > 18GHz | Limit |
| T120: S/N: 29310 @3m | T145 Agilent 3008A005t | | | FCC 15.209 |

Hi Frequency Cables

| | | | | | |
|-------------------|--------------|---------------|-----|---------------|---|
| 2 foot cable | 3 foot cable | 12 foot cable | HPF | Reject Filter | Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz |
| William 177079009 | | 3m Chamber | | | |

| f GHz | Dist (m) | Read Pk dBuV | Read Avg. dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Filt dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
|------------------------|-------------|-----------------|-------------------|------------|----------|-----------|--------------|------------|----------------|---------------|------------------|-------------------|--------------|---------------|----------------|
| Low Ch 5755MHz | | | | | | | | | | | | | | | |
| 11.510 | 3.0 | 43.6 | 31.3 | 37.6 | 4.4 | -33.1 | 0.0 | 0.0 | 52.5 | 40.2 | 74 | 54 | -21.5 | -13.8 | H |
| 17.265 | 3.0 | 45.9 | 32.9 | 40.3 | 5.3 | -32.0 | 0.0 | 0.0 | 59.5 | 46.4 | 74 | 54 | -14.5 | -7.6 | Noise Floor |
| 11.510 | 3.0 | 43.9 | 31.2 | 37.6 | 4.4 | -33.1 | 0.0 | 0.0 | 52.8 | 40.2 | 74 | 54 | -21.2 | -13.8 | V |
| 17.265 | 3.0 | 45.9 | 32.9 | 40.3 | 5.3 | -32.0 | 0.0 | 0.0 | 59.5 | 46.4 | 74 | 54 | -14.5 | -7.6 | Noise Floor |
| High Ch 5795MHz | | | | | | | | | | | | | | | |
| 11.590 | 3.0 | 45.3 | 31.6 | 37.6 | 4.3 | -33.0 | 0.0 | 0.0 | 54.2 | 40.6 | 74 | 54 | -19.8 | -13.4 | V |
| 17.385 | 3.0 | 45.2 | 32.5 | 40.4 | 4.3 | -32.0 | 0.0 | 0.0 | 57.9 | 45.1 | 74 | 54 | -16.1 | -8.9 | Noise Floor |
| 11.590 | 3.0 | 44.0 | 31.5 | 37.6 | 5.1 | -33.0 | 0.0 | 0.0 | 53.7 | 41.3 | 74 | 54 | -20.3 | -12.7 | H |
| 17.385 | 3.0 | 44.6 | 32.5 | 40.4 | 5.9 | -32.0 | 0.0 | 0.0 | 58.9 | 46.7 | 74 | 54 | -15.1 | -7.3 | Noise Floor |

Rev. 412.7

| | | | | | |
|------|-----------------------|--------|--------------------------------|---------|------------------------------|
| f | Measurement Frequency | Amp | Preamp Gain | Avg Lim | Average Field Strength Limit |
| Dist | Distance to Antenna | D Corr | Distance Correct to 3 meters | Pk Lim | Peak Field Strength Limit |
| Read | Analyzer Reading | Avg | Average Field Strength @ 3 m | Avg Mar | Margin vs. Average Limit |
| AF | Antenna Factor | Peak | Calculated Peak Field Strength | Pk Mar | Margin vs. Peak Limit |
| CL | Cable Loss | HPF | High Pass Filter | | |

7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 7 File#: 07U11286.EMI Date: 09-13-2007 Time: 11:17:28

Condition: FCC CLASS-B HORIZONTAL
Test Operator:: Thanh Nguyen
Project #: : 07U11286
Company: : Marvell Semiconductor, Inc.
Configuration:: BUT, Ext. card, Support Laptop, AC/DC
Mode : : Transmit Worst Case
Target: : FCC Class B

Page: 1

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|------------|--------|--------|------------|------------|--------|
| | MHZ | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 124.090 | 50.79 | -13.05 | 37.74 | 43.50 | -5.76 | Peak |
| 2 | 235.640 | 53.02 | -14.67 | 38.35 | 46.00 | -7.65 | Peak |
| 3 | 367.560 | 43.44 | -10.62 | 32.82 | 46.00 | -13.18 | Peak |
| 4 | 402.480 | 48.82 | -9.86 | 38.96 | 46.00 | -7.04 | Peak |
| 5 | 775.930 | 39.32 | -2.39 | 36.93 | 46.00 | -9.07 | Peak |
| 6 | 899.120 | 40.50 | -1.04 | 39.46 | 46.00 | -6.54 | Peak |

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 6 File#: 07U11286.EMI Date: 09-13-2007 Time: 11:11:43

Condition: FCC CLASS-B VERTICAL
Test Operator:: Thanh Nguyen
Project #: : 07U11286
Company: : Marvell Semiconductor, Inc.
Configuration: EUT, Ext. card, Support Laptop, AC/DC
Mode : : Transmit Worst Case
Target: : FCC Class B


Page: 1

| | Freq | Read Level | Read Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|------------|-------------|--------|------------|------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 58.130 | 54.89 | -19.59 | 35.30 | 40.00 | -4.70 | Peak |
| 2 | 167.740 | 51.81 | -14.52 | 37.29 | 43.50 | -6.21 | Peak |
| 3 | 236.610 | 49.37 | -14.63 | 34.74 | 46.00 | -11.26 | Peak |
| 4 | 401.510 | 44.27 | -9.87 | 34.39 | 46.00 | -11.61 | Peak |
| 5 | 872.930 | 36.23 | -1.35 | 34.88 | 46.00 | -11.12 | Peak |

8. SETUP PHOTOS

RADIATED RF MEASUREMENT SETUP



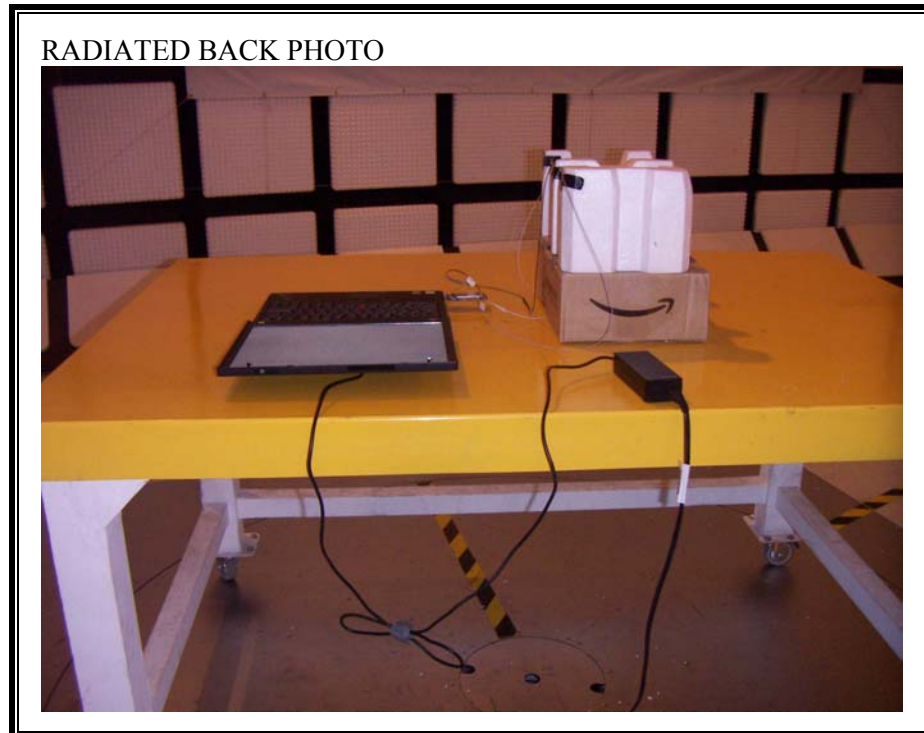

END OF REPORT