



**FCC CFR47 PART 15 SUBPART C  
CLASS II PERMISSIVE CHANGE  
TEST REPORT**

**FOR**

**MC85 MINI CARD 11b/g/a/n RADIO CARD**

**MODEL NUMBER: MC85P**

**FCC ID: UAY-MMC85PA**

**REPORT NUMBER: 06U10412-1**

**ISSUE DATE: JULY 24, 2006**

*Prepared for*  
**MARVELL SEMICONDUCTOR, INC.  
5488 MARVELL LANE  
SANTA CLARA  
CALIFORNIA, 95054, USA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

**NVLAP<sup>®</sup>**  
**LAB CODE:200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
<u>--</u>	<u>7/24/2006</u>	<u>Initial Issue</u>	<u>A. Ilarina</u>

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>4</b>
<b>2. TEST METHODOLOGY</b> .....	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	5
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	5
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>6</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	6
5.2. <i>CLASS II PERMISSIVE CHANGE DESCRIPTION</i> .....	6
5.3. <i>MAXIMUM OUTPUT POWER</i> .....	6
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	7
5.5. <i>SOFTWARE AND FIRMWARE</i> .....	7
5.6. <i>WORST-CASE CONFIGURATION AND MODE</i> .....	7
5.7. <i>MODIFICATIONS</i> .....	7
5.8. <i>DESCRIPTION OF TEST SETUP</i> .....	8
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>10</b>
<b>7. LIMITS AND RESULTS</b> .....	<b>11</b>
7.1.1. <i>AVERAGE POWER</i> .....	11
7.1.2. <i>MAXIMUM PERMISSIBLE EXPOSURE</i> .....	13
7.1.3. <i>AVERAGE POWER</i> .....	16
7.1.4. <i>MAXIMUM PERMISSIBLE EXPOSURE</i> .....	18
7.2. <i>RADIATED EMISSIONS</i> .....	21
7.2.1. <i>TRANSMITTER RADIATED SPURIOUS EMISSIONS</i> .....	21
7.2.2. <i>TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND</i> .....	24
7.2.3. <i>TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND</i> .....	69
7.2.4. <i>WORST-CASE RADIATED EMISSIONS BELOW 1 GHz</i> .....	73
7.3. <i>POWERLINE CONDUCTED EMISSIONS</i> .....	77
<b>8. SETUP PHOTOS</b> .....	<b>80</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** MARVELL SEMICONDUCTOR, INC.  
5488 MARVELL LANE  
SANTA CLARA, CA, 95054, USA

**EUT DESCRIPTION:** MC85 MINI CARD 11b/g/a/n RADIO CARD

**MODEL:** MC85P

**SERIAL NUMBER:** 010

**DATE TESTED:** JULY 3 – JULY 18, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



---

ALVIN ILARINA  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES



---

FRANK IBRAHIM  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g/n transceiver.

The radio module is manufactured by Marvell Semiconductor.

### 5.2. CLASS II PERMISSIVE CHANGE DESCRIPTION

Change #1 Adding Laptop PIFA Antenna

### 5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2400 to 2483.5 MHz Authorized Band			
2412 - 2462	802.11b	25.50	354.81
2412 - 2462	802.11g 20M	27.29	535.80
2412 - 2462	802.11g 40M	23.65	231.74
2412 - 2462	802.11n HT20	26.55	451.86
2422 - 2452	802.11n HT40	24.92	310.46
5725 to 5850 MHz Authorized Band			
5745 - 5825	802.11a 20MHz	27.21	526.02
5755 - 5795	802.11a 40MHz	24.58	287.08
5745 - 5825	802.11n HT20	27.12	515.23
5755 - 5795	802.11n HT40	26.60	457.09

## 5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes the following antenna:

1) PIFA manufactured by Apple, maximum gain of -1.6 dBi in the 2.4 GHz band, and 4.06 dBi in the 5.0 GHz band.

## 5.5. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was PCI rev. 1.0.0.0.2, MFG 2.1.0.36

The EUT driver software installed in the Laptop during testing was Marvell Semiconductor, Inc. Labtools rev. 1.0.3.p3.

The board revision of the EUT tested is 1.8.

The test utility software used during testing was PCI.exe.

## 5.6. WORST-CASE CONFIGURATION AND MODE

The 2x3 configuration was used for all testing in this report.

The worst- case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations.

The worst-case data rates for the 2GHz bands are: 11 Mbps for 802.11b; 54Mbps for 802.11g; MCS11 for 802.11n HT20; MCS15 for 802.11n HT40. These are based on baseline testing with this chipset.

The worst-case data rates for the 5GHz bands are: 9 Mbps for 802.11a 20MHz and 802.11a 40MHz; MCS0 for 802.11n HT20 and 802.11n HT40. These are based on baseline testing with this chipset.

All emissions tests were made with the worst-case data rates.

## 5.7. MODIFICATIONS

There were no modifications made to the revision EUT during the testing.

## 5.8. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Apple	A1151	CS01768	DoC
Power Adapter	Apple	A1172	052765-11	N/A

### I/O CABLES


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	1.8m	N/A
2	DC	A	DC	Unshielded	1.8m	N/A

### TEST SETUP

The EUT is installed inside a host laptop computer. Test software exercised the radio card.



**SETUP DIAGRAM FOR TESTS**

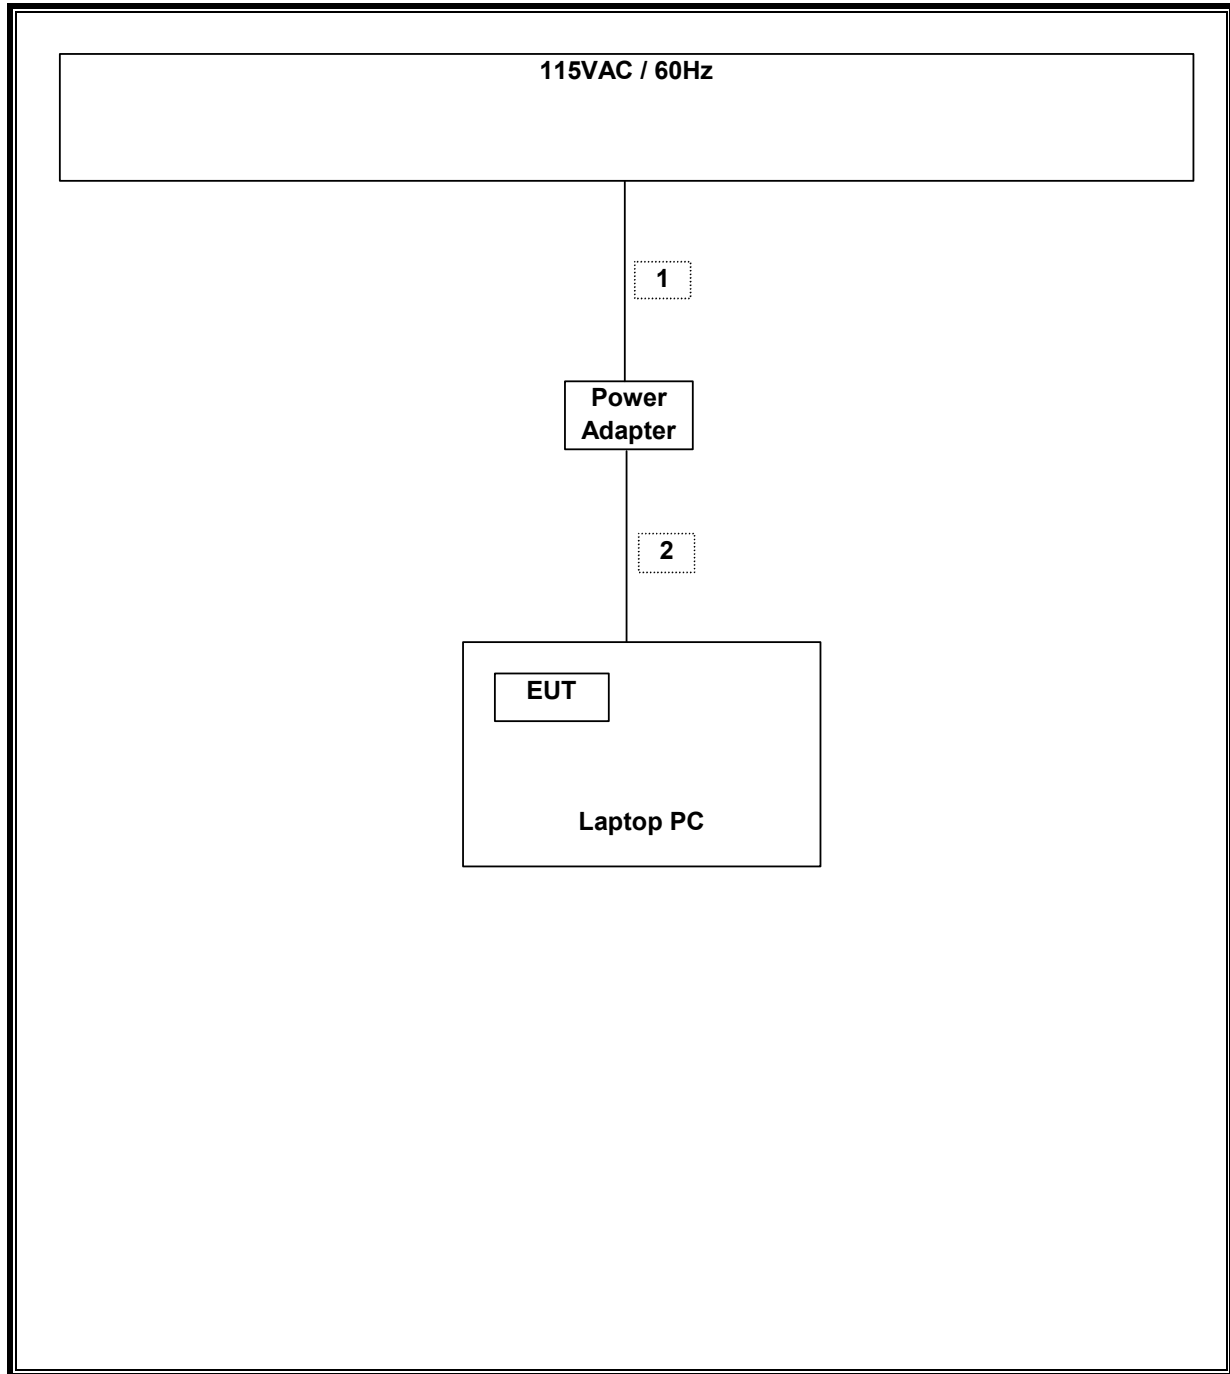

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/2007
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2006
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	2/4/2007
RF Filter Section	Agilent / HP	85420E	3705A00256	2/4/2007
Antenna, Bilog 30 MHz ~ 2 GHz	Sunol Sciences	JB1	A121003	9/3/2006
Peak Power Meter	Agilent / HP	E4416A	GB41291160	12/2/2007
Peak / Average Power Sensor	Agilent	E9327A	US40440755	12/2/2007
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	4/22/2007
Antenna, Horn 18 ~ 26 GHz	ARA	MWH-1826/B	1049	9/12/2006
Preamplifier, 1 ~ 26 GHz	Miteq	NSP2600-SP	924342	9/2/2006
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	4/13/2007
Preamplifier, 26 ~ 40 GHz	Miteq	NSP4000-SP2	924343	8/18/2006
5.15-5.35 GHz Reject Filter	Micro-Tronics	BRC13190	1	CNR
5.725-5.825 GHz Reject Filter	Micro-Tronics	BRC13192	1	CNR
4.0 High Pass Filter	Micro Tronics	HPM13351	3	CNR
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	MY45300064	12/19/2006

## 7. LIMITS AND RESULTS

### 7.1.1. AVERAGE POWER

#### AVERAGE POWER LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

Each chain is measured separately and the total power is calculated using:

Total Power =  $10 \log (10^{\text{(Chain 0 Power / 10)}} + 10^{\text{(Chain 2 Power / 10)}})$

**RESULTS**

No non-compliance noted:

The cable assembly insertion loss of 11.5 dB (including 10 dB pad and 1.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Mode Channel	Frequency (MHz)	Average Power Chain A (dBm)	Average Power Chain B (dBm)	Average Power Total (dBm)
--------------	-----------------	-----------------------------	-----------------------------	---------------------------

802.11b Mode

Low	2412	18.2	17.6	20.9
Middle	2437	18.4	18.0	21.2
High	2462	18.5	18.0	21.3

802.11g 20MHz Mode

Low	2412	15.3	15.4	18.4
Middle	2437	17.5	17.4	20.5
High	2462	16.4	15.2	18.9

802.11g 40MHz Mode

Low	2422	12.5	12.6	15.6
Middle	2437	12.4	11.7	15.1
High	2452	11.6	10.5	14.1

802.11n HT20 Mode

Low	2412	14.8	14.9	17.9
Middle	2437	16.9	16.9	19.9
High	2462	14.1	13.7	16.9

802.11n HT40 Mode

Low	2422	13.9	14.0	17.0
Middle	2437	12.1	12.6	15.3
High	2452	12.4	12.1	15.3

### 7.1.2. MAXIMUM PERMISSIBLE EXPOSURE

#### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations yields:

$$S = (30 * P * G) / (3770 * (d^2))$$

Changing to units of Power to mW and Distance to cm, using:

$$P (W) = P (mW) / 1000 \text{ and}$$

$$d (m) = d (cm) / 100$$

and substituting the logarithmic form of power and gain using:

$$P (mW) = 10^{(P (dBm) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (dBi) / 10)}$$

yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

**LIMITS**

From §1.1310 Table 1 (B), the maximum value of  $S = 1.0 \text{ mW/cm}^2$

**RESULTS**

<b>Band (MHz)</b>	<b>Power Density Limit (mW/cm<sup>2</sup>)</b>	<b>Total Power (dBm)</b>	<b>Antenna Gain (dBi)</b>	<b>MPE Distance (cm)</b>
2400 to 2483.5	1.0	27.29	-1.60	5.43

### **7.1.3. AVERAGE POWER**

#### **AVERAGE POWER LIMIT**

None; for reporting purposes only.

#### **TEST PROCEDURE**

The transmitter output is connected to a power meter.

Each chain is measured separately and the total power is calculated using:

Total Power =  $10 \log (10^{\text{Chain 0 Power} / 10} + 10^{\text{Chain 2 Power} / 10})$



**RESULTS**

No non-compliance noted:

The cable assembly insertion loss of 11.8 dB (including 10 dB pad and 1.8 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Mode Channel	Frequency (MHz)	Average Power Chain A (dBm)	Average Power Chain B (dBm)	Average Power Total (dBm)
--------------	-----------------	-----------------------------	-----------------------------	---------------------------

802.11a 20M Mode

Low	5745	16.9	17.1	20.0
Middle	5785	16.8	17.0	19.9
High	5825	16.9	17.0	20.0

802.11a 40M Mode

Low	5755	12.5	12.6	15.6
High	5795	15.0	15.0	18.0

802.11n HT20 Mode

Low	5745	16.9	17.0	20.0
Middle	5785	16.9	16.9	19.9
High	5825	16.8	16.9	19.8

802.11n HT40 Mode

Low	5755	14.3	14.4	17.4
High	5795	17.0	16.9	19.9

### 7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

#### LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## **CALCULATIONS**

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations yields:

$$S = (30 * P * G) / (3770 * (d^2))$$

Changing to units of Power to mW and Distance to cm, using:

$$P (W) = P (mW) / 1000 \text{ and}$$

$$d (m) = d (cm) / 100$$

and substituting the logarithmic form of power and gain using:

$$P (mW) = 10^{(P (dBm) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (dBi) / 10)}$$

yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

**LIMITS**

From §1.1310 Table 1 (B), the maximum value of  $S = 1.0 \text{ mW/cm}^2$

**RESULTS**

<b>Band (MHz)</b>	<b>Power Density Limit (mW/cm<sup>2</sup>)</b>	<b>Total Power (dBm)</b>	<b>Antenna Gain (dBi)</b>	<b>MPE Distance (cm)</b>
5725 to 5850	1.0	27.21	4.40	10.73

## 7.2. RADIATED EMISSIONS

### 7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


### 7.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


#### RESTRICTED BANDEDGE (802.11b MODE, LOW CHANNEL)

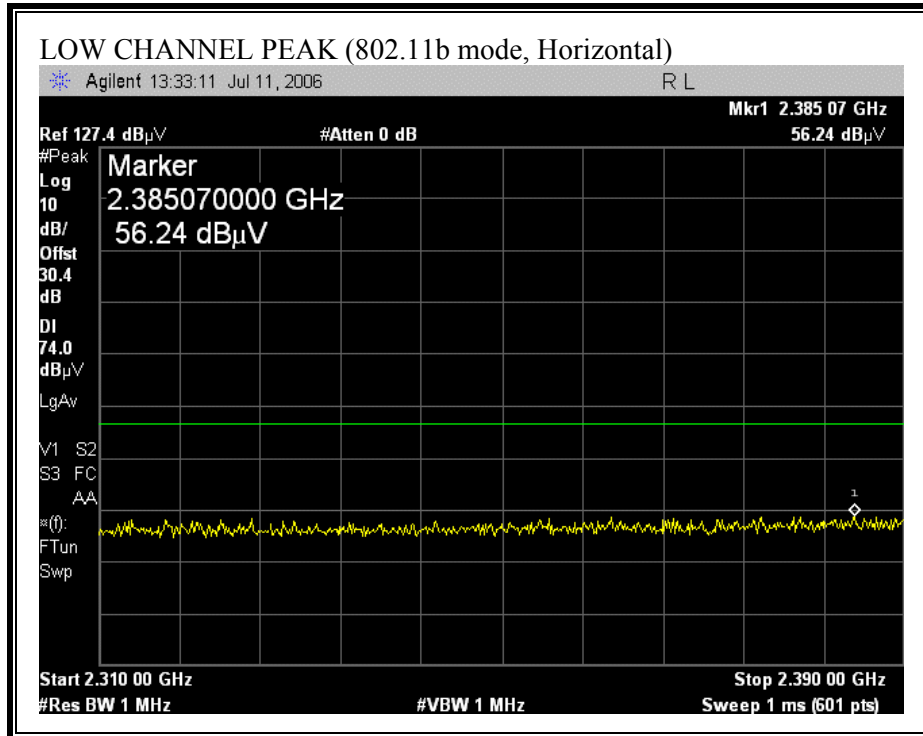




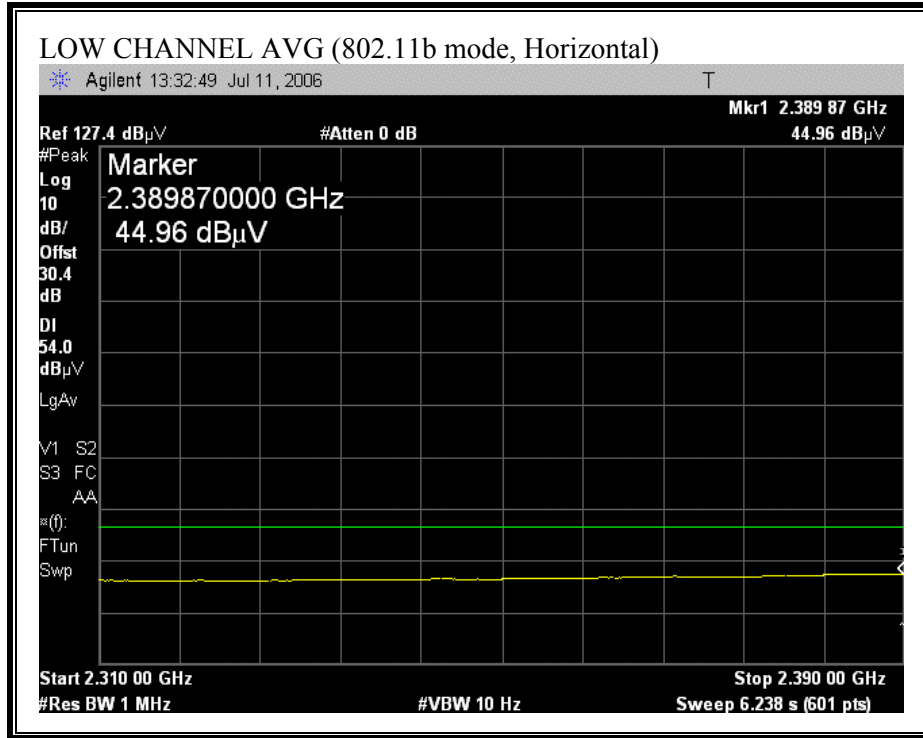


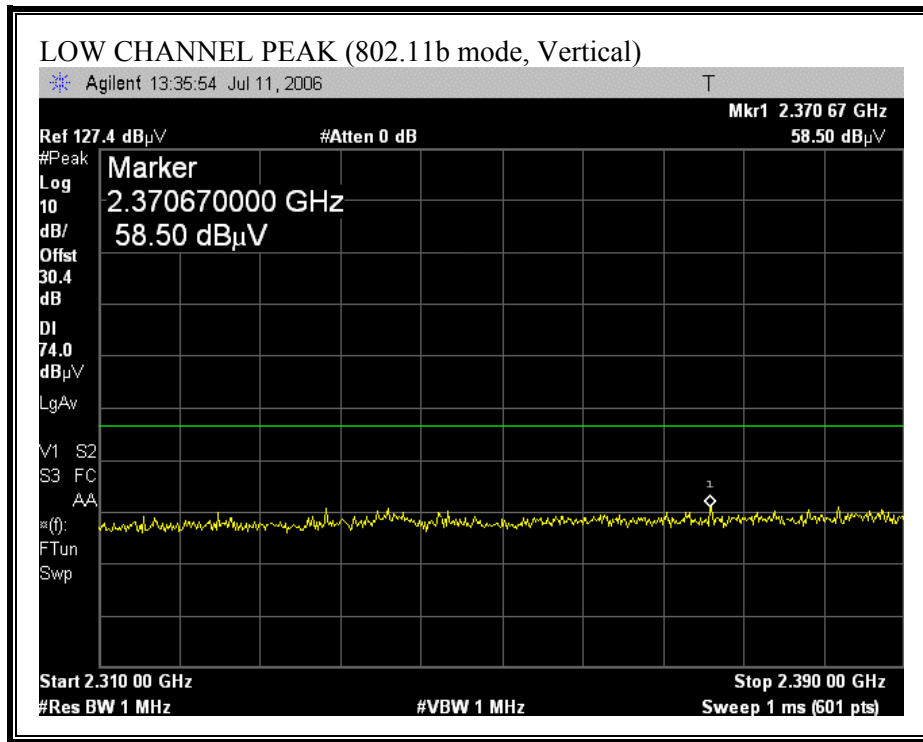


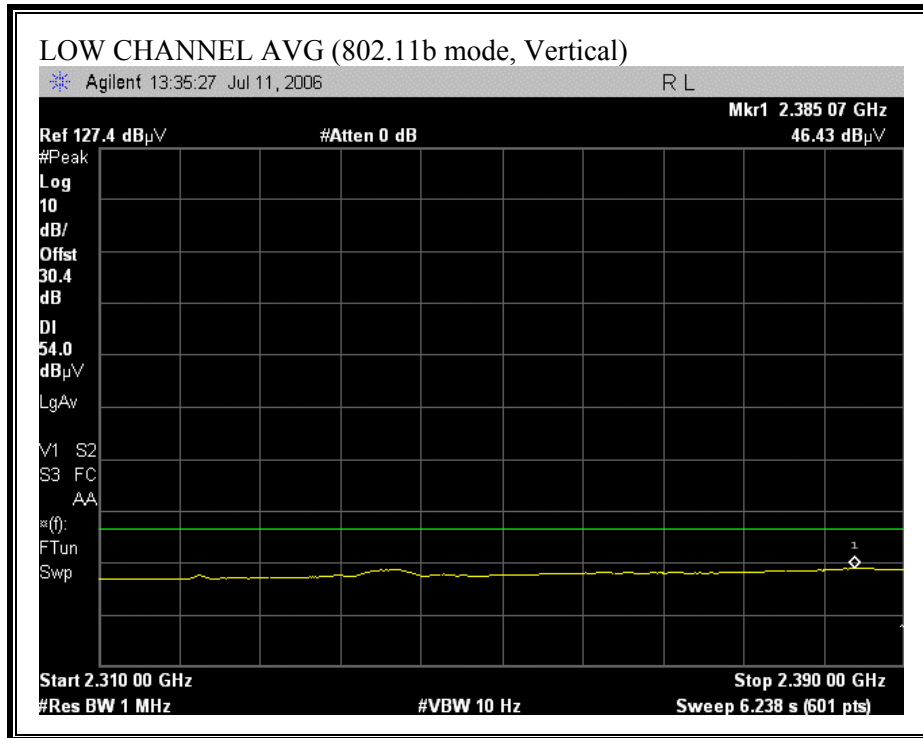


**RESTRICTED BANDEDGE (802.11b MODE, HIGH CHANNEL)**

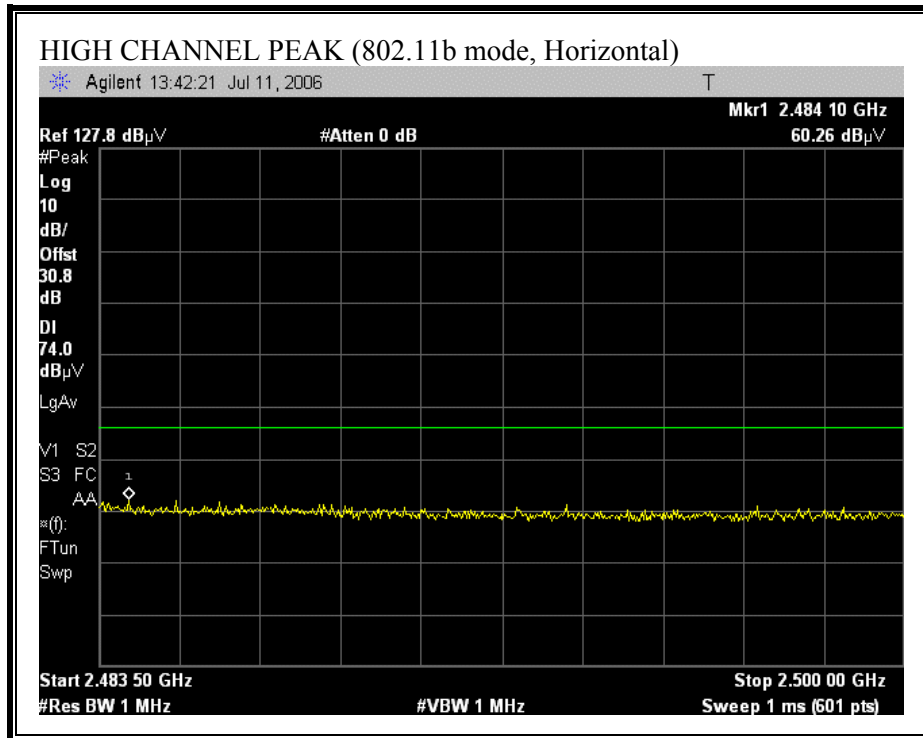

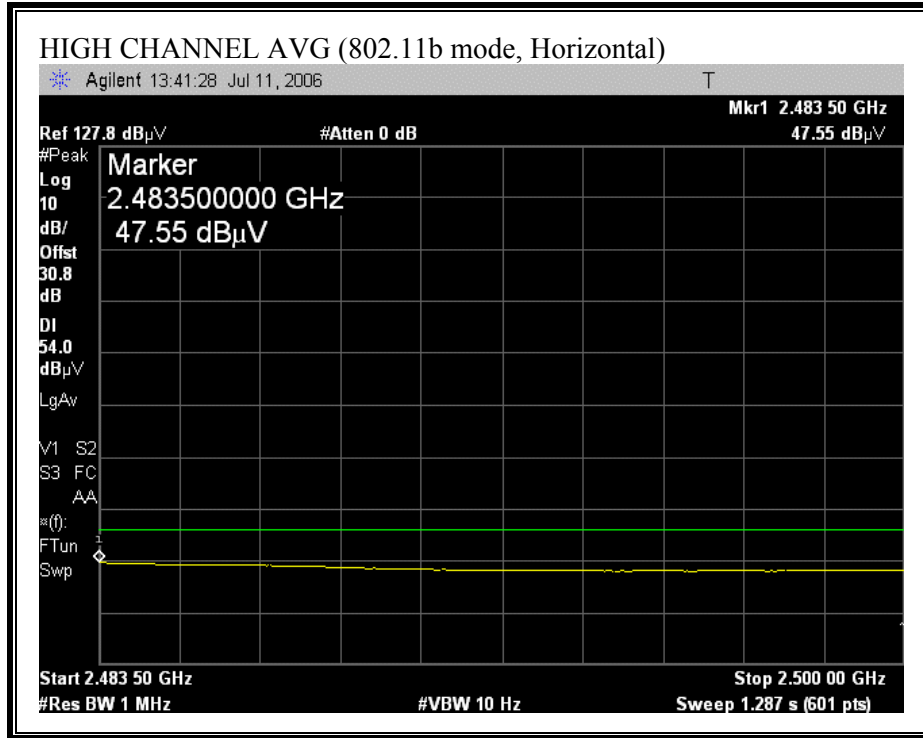

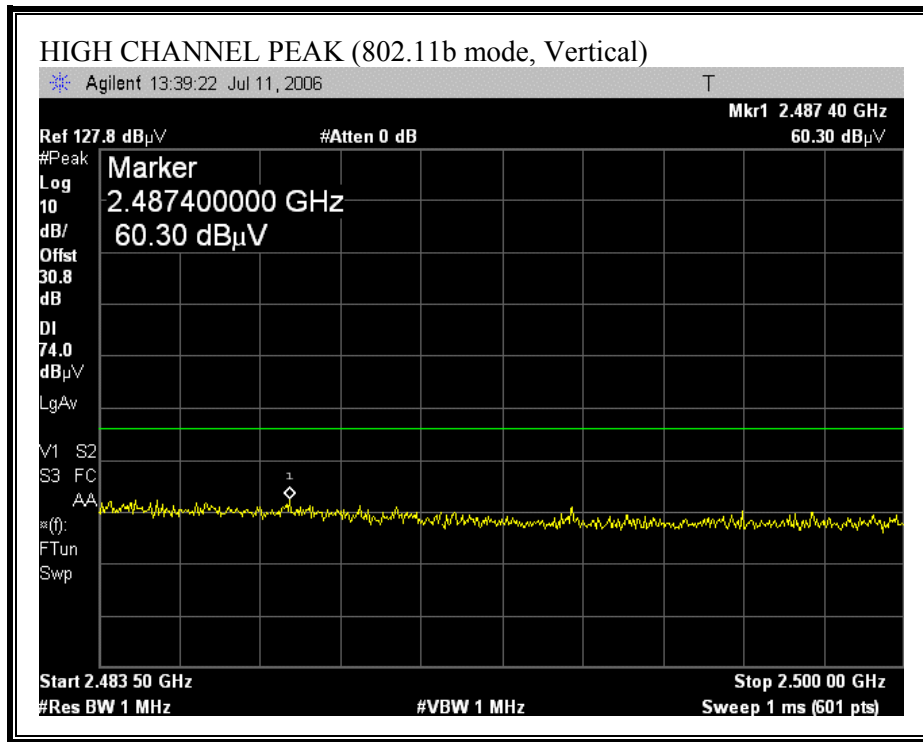

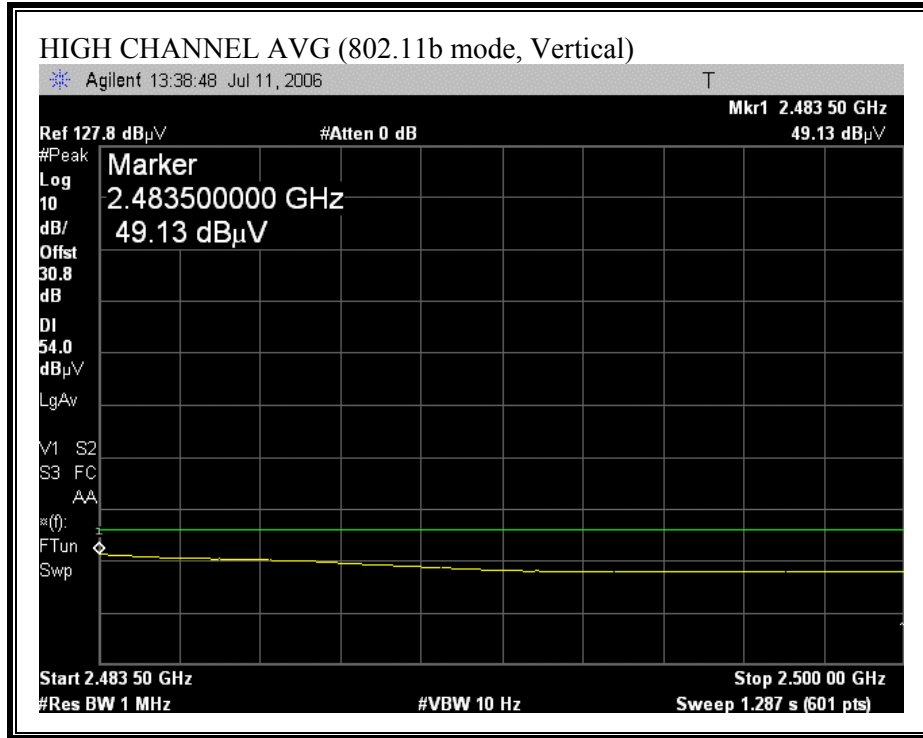

**HARMONICS AND SPURIOUS EMISSIONS (802.11b MODE)**

**High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Company:** MARVELL SEMICONDUCTOR INC.  
**Project #:** 06U10412  
**Date:** 07/14/06  
**Test Engineer:** Frank Ibrahim  
**Configuration:** EUT with PIFA Antenna inside Apple Laptop PC  
**Mode:** Continuously Transmitting in 11b 20M mode, 11Mbps  
**EUT S/N:** 010

**Test Equipment:**

<b>Horn 1-18GHz</b>	<b>Pre-amplifer 1-26GHz</b>	<b>Pre-amplifer 26-40GHz</b>	<b>Horn &gt; 18GHz</b>
T60; S/N: 2238 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

Hi Frequency Cables

<b>2 foot cable</b>	<b>3 foot cable</b>	<b>12 foot cable</b>	<b>HPF</b>	<b>Reject Filter</b>
	Frank 177080001	Frank 187209001		R_001

**Peak Measurements**  
 RBW=VBW=1MHz  
**Average Measurements**  
 RBW=1MHz; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (2412 MHz)</b>															
4.824	3.0	52.88	39.20	33.0	4.0	-45.3	0.0	0.0	44.6	30.9	74	54	-29.4	-23.1	V, PowerSetting 5F 5F
4.824	3.0	52.76	39.60	33.0	4.0	-45.3	0.0	0.0	44.4	31.3	74	54	-29.6	-22.7	H, PowerSetting 5F 5F
<b>Mid Channel (2437 MHz)</b>															
4.874	3.0	60.18	48.47	33.1	4.0	-45.3	0.0	0.0	51.9	40.2	74	54	-22.1	-13.8	V, PowerSetting 5F 5F
7.311	3.0	57.06	43.37	35.5	4.6	-43.2	0.0	0.0	53.9	40.2	74	54	-20.1	-13.8	V, PowerSetting 5F 5F
4.874	3.0	55.60	42.80	33.1	4.0	-45.3	0.0	0.0	47.3	34.5	74	54	-26.7	-19.5	H, PowerSetting 5F 5F
7.311	3.0	51.20	39.10	35.5	4.6	-43.2	0.0	0.0	48.1	36.0	74	54	-25.9	-18.0	H, PowerSetting 5F 5F
<b>High Channel (2462 MHz)</b>															
4.924	3.0	58.50	45.57	33.1	4.0	-45.4	0.0	0.0	50.3	37.3	74	54	-23.7	-16.7	V, PowerSetting 5F 5D
7.386	3.0	52.18	41.50	35.6	4.6	-43.1	0.0	0.0	49.3	38.6	74	54	-24.7	-15.4	V, PowerSetting 5F 5D
4.924	3.0	52.65	40.10	33.1	4.0	-45.4	0.0	0.0	44.4	31.9	74	54	-29.6	-22.1	H, PowerSetting 5F 5D
7.386	3.0	51.62	39.50	35.6	4.6	-43.1	0.0	0.0	48.7	36.6	74	54	-25.3	-17.4	H, PowerSetting 5F 5D


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.




**RESTRICTED BANDEDGE (802.11g 20M MODE, LOW CHANNEL)**

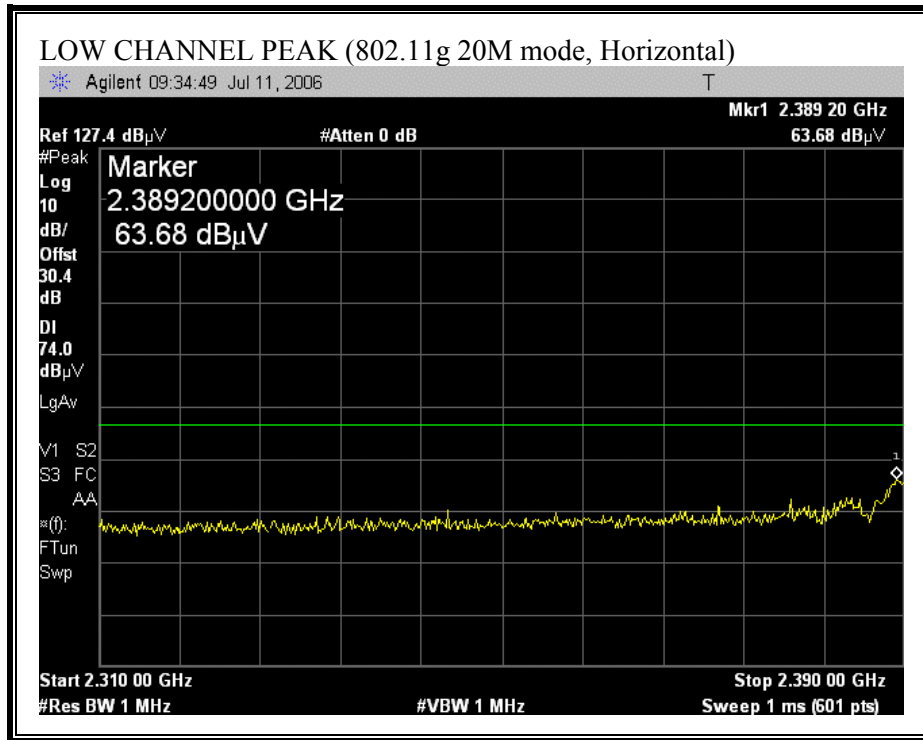


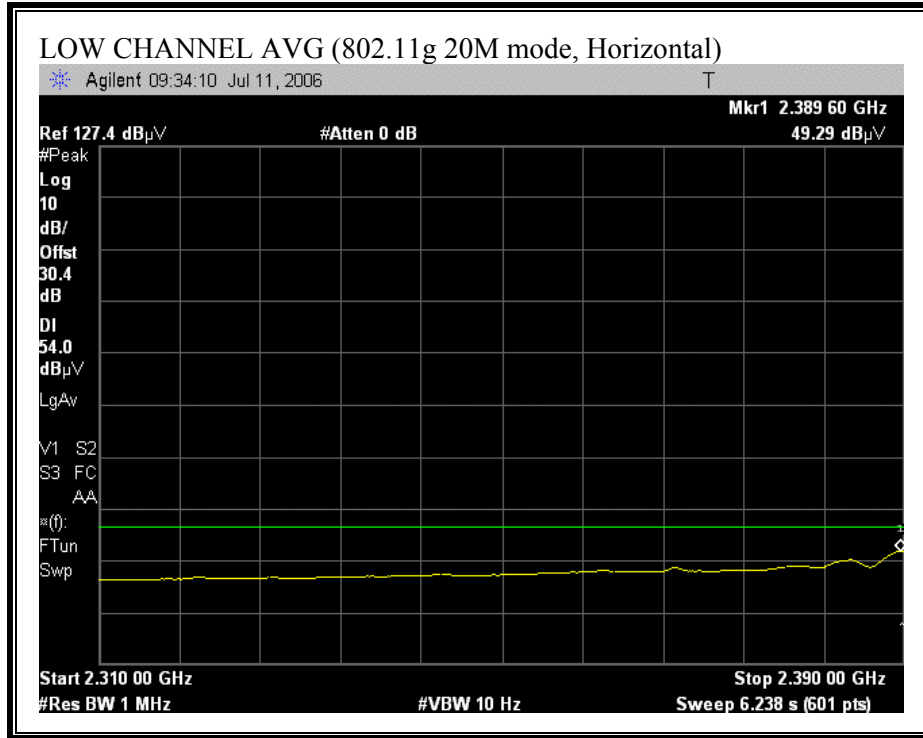


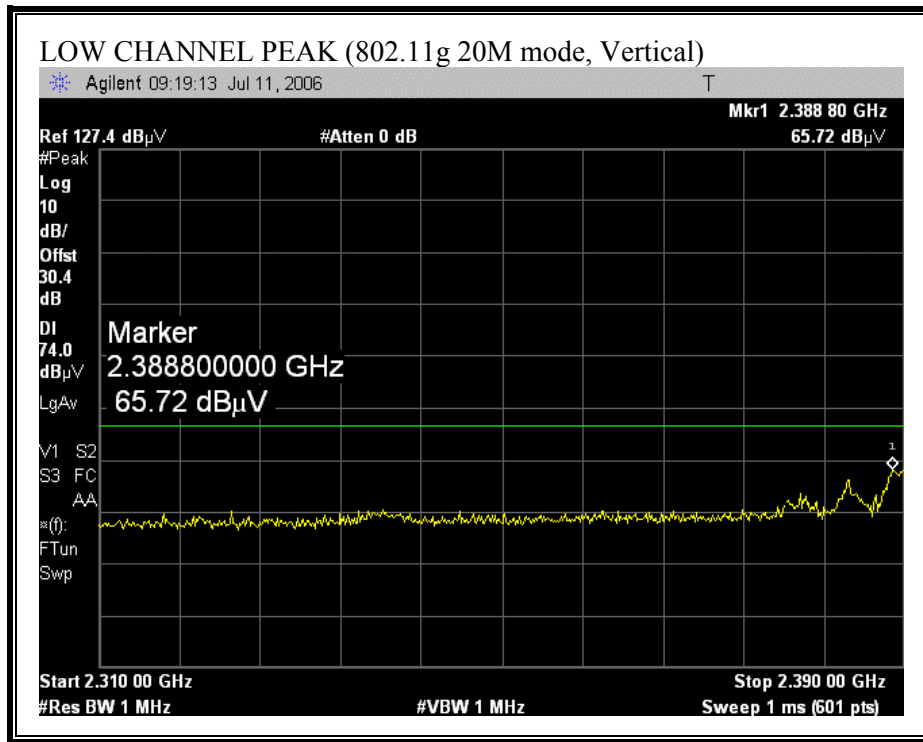


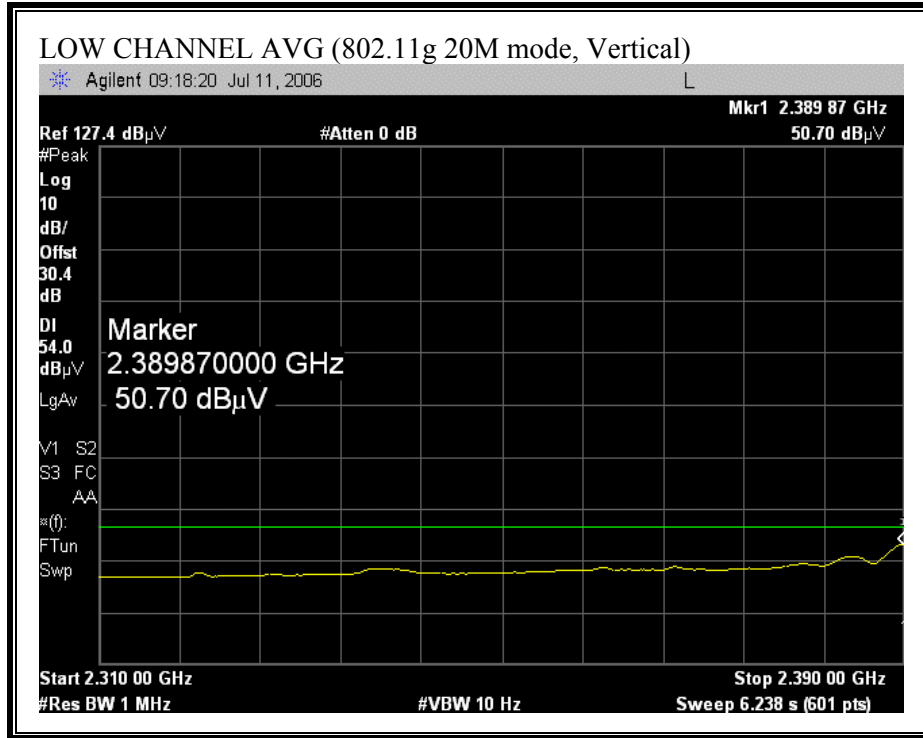


**RESTRICTED BANDEDGE (802.11g 20M MODE, HIGH CHANNEL)**

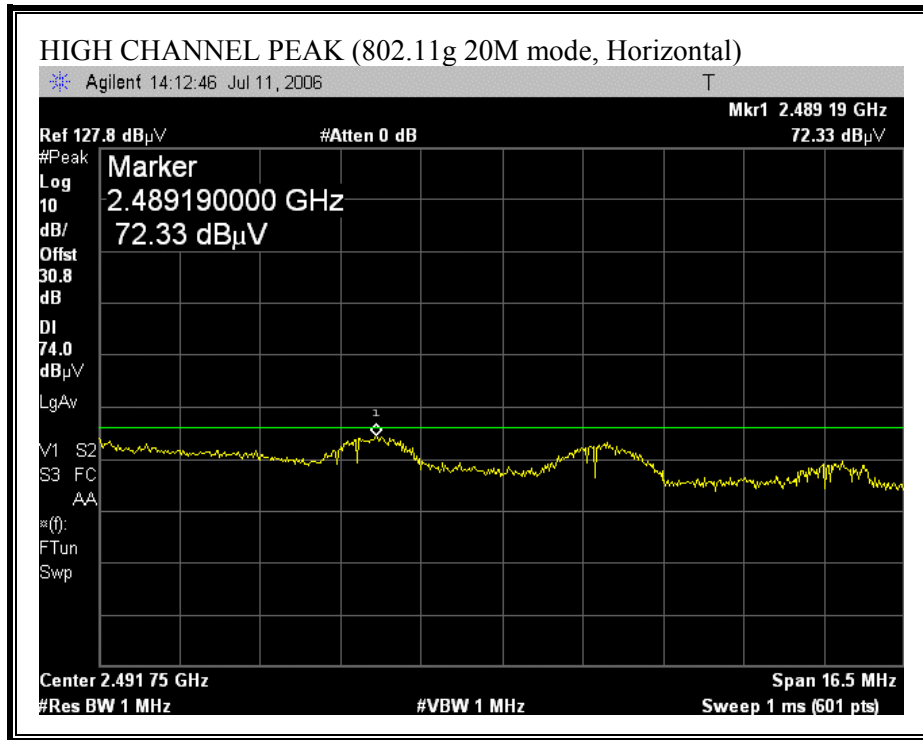

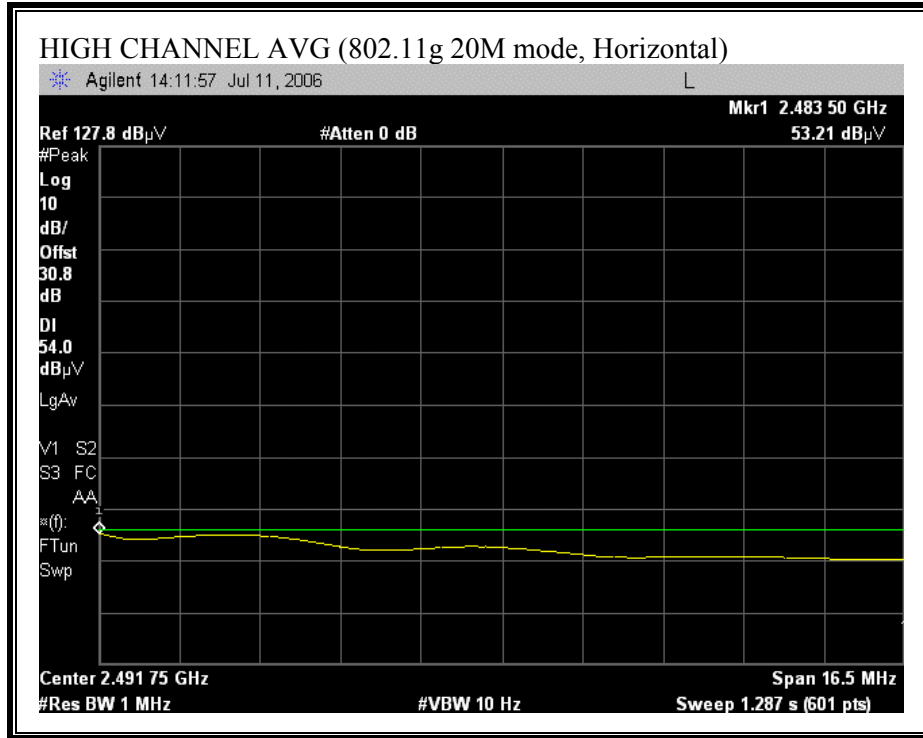

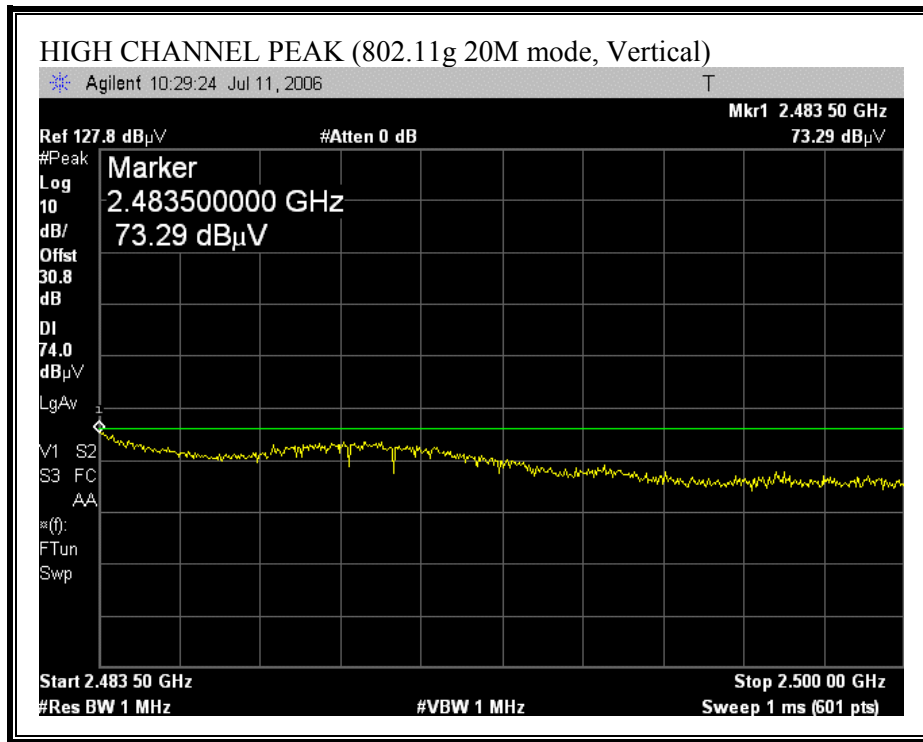

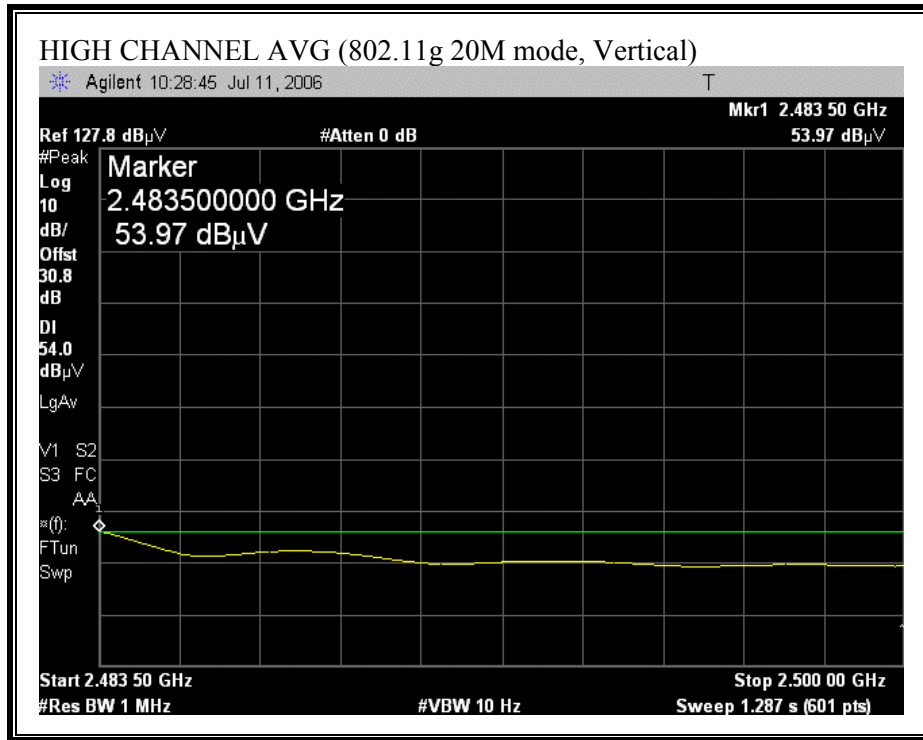



**HARMONICS AND SPURIOUS EMISSIONS (802.11g 20M MODE)**

**High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Company:** MARVELL SEMICONDUCTOR INC.  
**Project #:** 06U10412  
**Date:** 07/13/06  
**Test Engineer:** Frank Ibrahim  
**Configuration:** EUT with PIFA Antenna inside Apple Laptop PC  
**Mode:** Continuously Transmitting in 11g 20M mode, 54Mbps  
**EUT S/N:** 010

**Test Equipment:**

<b>Horn 1-18GHz</b>	<b>Pre-amplifier 1-26GHz</b>	<b>Pre-amplifier 26-40GHz</b>	<b>Horn &gt; 18GHz</b>
T60; S/N: 2238 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

Hi Frequency Cables

<b>2 foot cable</b>	<b>3 foot cable</b>	<b>12 foot cable</b>	<b>HPF</b>	<b>Reject Filter</b>
	Frank 177080001	Frank 187209001		R_001


**Peak Measurements**  
 RBW=VBW=1MHz  
**Average Measurements**  
 RBW=1MHz; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (2412 MHz)</b>															
4.824	3.0	53.48	40.10	33.0	4.0	-45.3	0.0	0.0	45.2	31.8	74	54	-28.8	-22.2	V, PowerSetting 61 62
4.824	3.0	53.52	40.20	33.0	4.0	-45.3	0.0	0.0	45.2	31.9	74	54	-28.8	-22.1	H, PowerSetting 61 62
<b>Mid Channel (2437 MHz)</b>															
1.340	3.0	67.06	52.07	26.3	2.3	-44.9	0.0	0.0	50.7	35.8	74	54	-23.3	-18.2	V, PowerSetting 66 66
4.874	3.0	54.52	41.10	33.1	4.0	-45.3	0.0	0.0	46.2	32.8	74	54	-27.8	-21.2	V, PowerSetting 66 66
7.311	3.0	52.70	40.00	35.5	4.6	-43.2	0.0	0.0	49.6	36.9	74	54	-24.4	-17.1	V, PowerSetting 66 66
1.340	3.0	64.03	50.90	26.3	2.3	-44.9	0.0	0.0	47.7	34.6	74	54	-26.3	-19.4	H, PowerSetting 66 66
4.874	3.0	52.05	40.10	33.1	4.0	-45.3	0.0	0.0	43.8	31.8	74	54	-30.2	-22.2	H, PowerSetting 66 66
7.311	3.0	51.05	39.30	35.5	4.6	-43.2	0.0	0.0	47.9	36.2	74	54	-26.1	-17.8	H, PowerSetting 66 66
<b>High Channel (2462 MHz)</b>															
4.924	3.0	54.12	41.99	33.1	4.0	-45.4	0.0	0.0	45.9	33.7	74	54	-28.1	-20.3	V, PowerSetting 61 5F
7.386	3.0	55.18	42.13	35.6	4.6	-43.1	0.0	0.0	52.3	39.2	74	54	-21.7	-14.8	V, PowerSetting 61 5F
4.924	3.0	52.22	39.80	33.1	4.0	-45.4	0.0	0.0	44.0	31.6	74	54	-30.0	-22.4	H, PowerSetting 61 5F
7.386	3.0	51.91	39.50	35.6	4.6	-43.1	0.0	0.0	49.0	36.6	74	54	-25.0	-17.4	H, PowerSetting 61 5F


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

**RESTRICTED BANDEDGE (802.11g 40M MODE, LOW CHANNEL)**

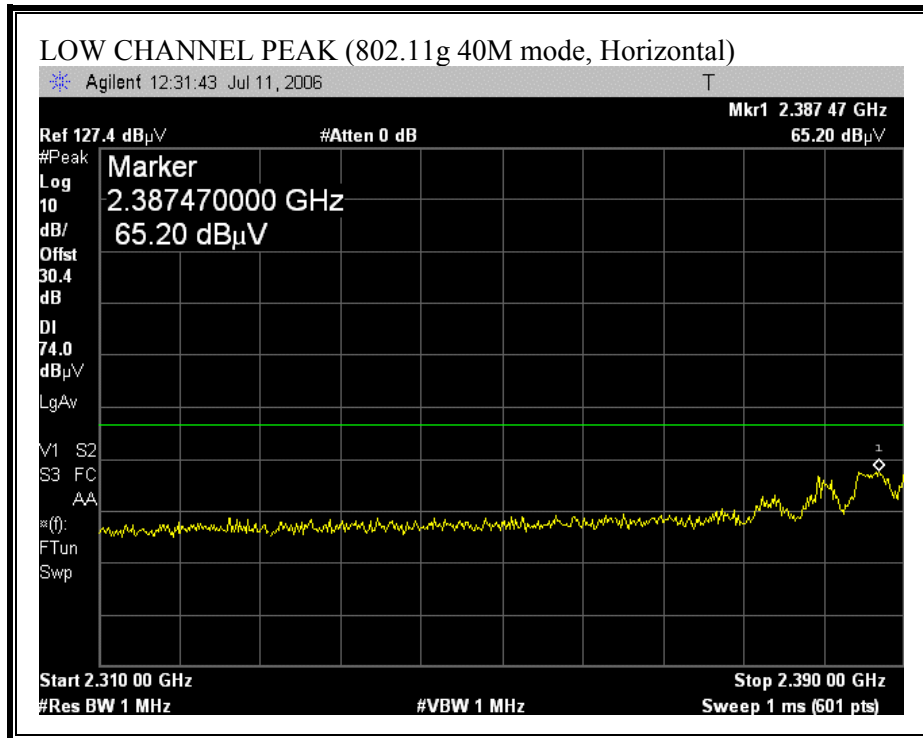


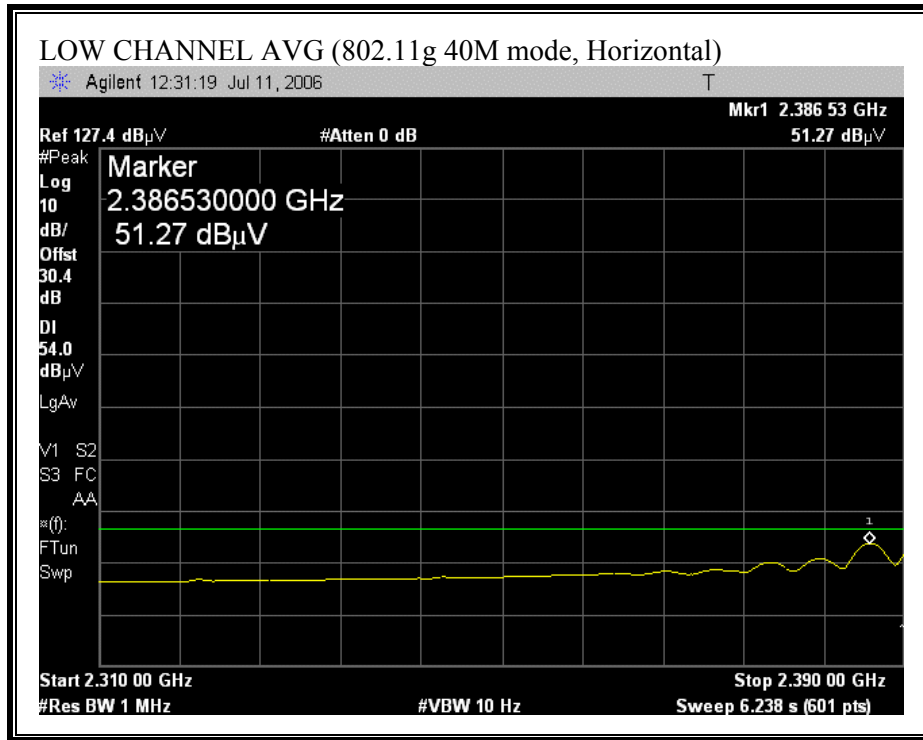


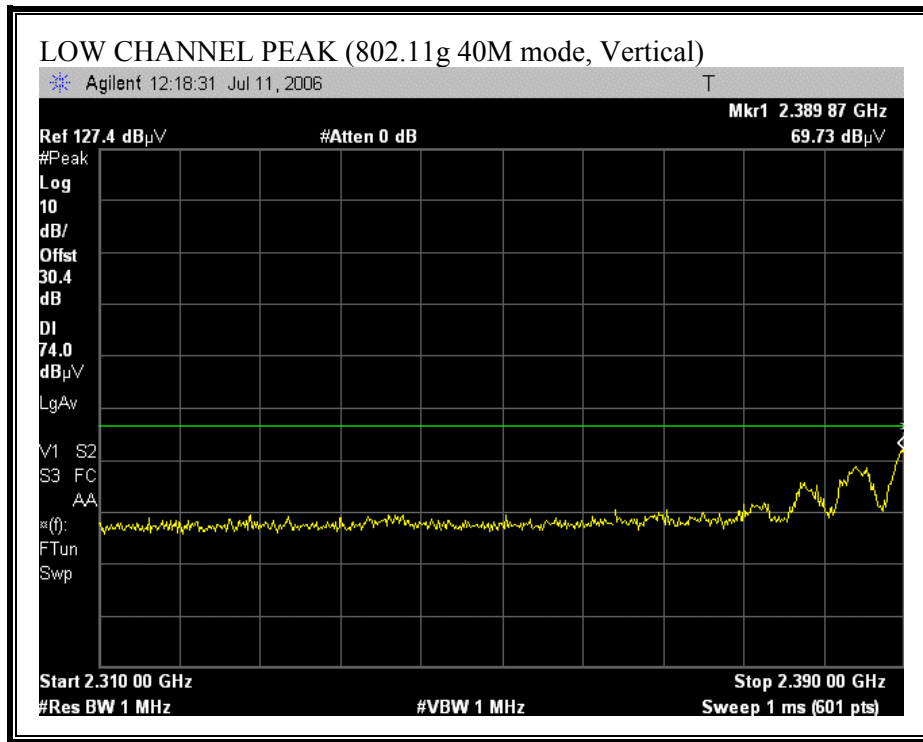


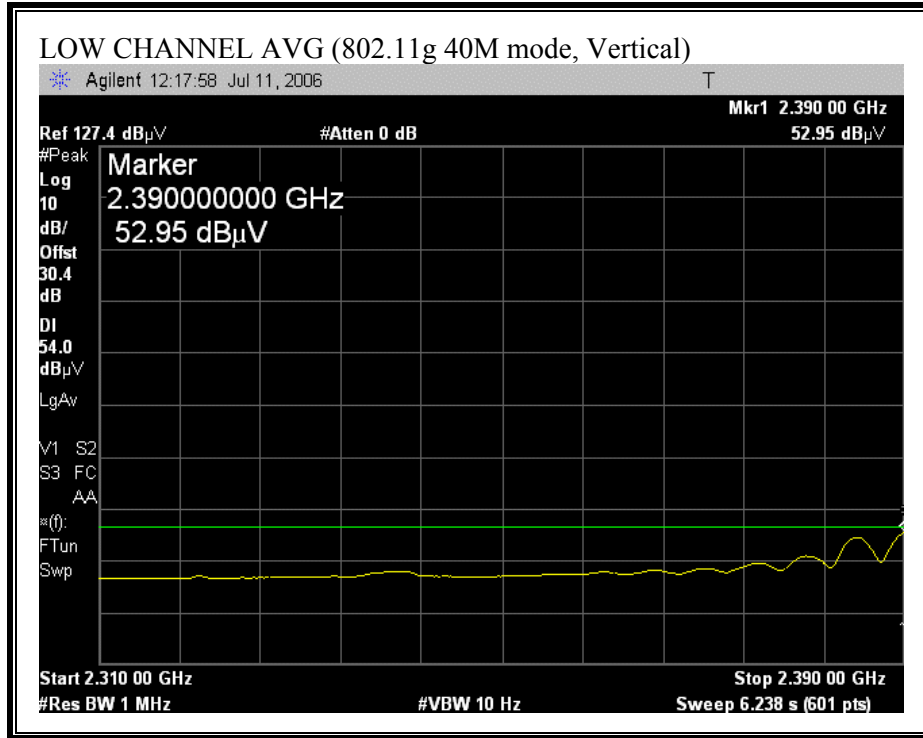


**RESTRICTED BANDEDGE (802.11g 40M MODE, HIGH CHANNEL)**

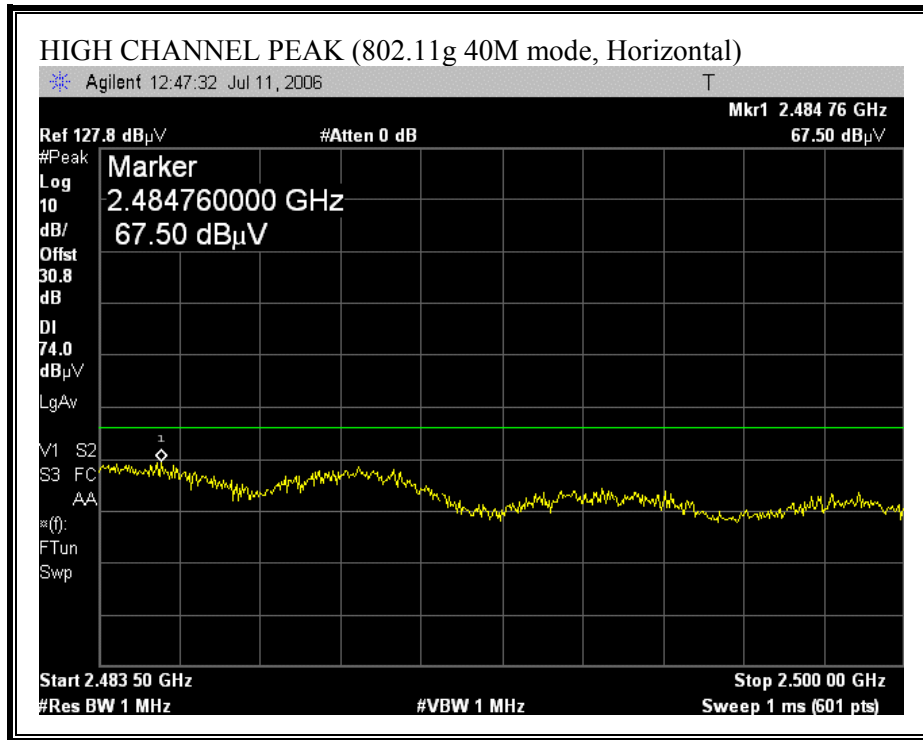

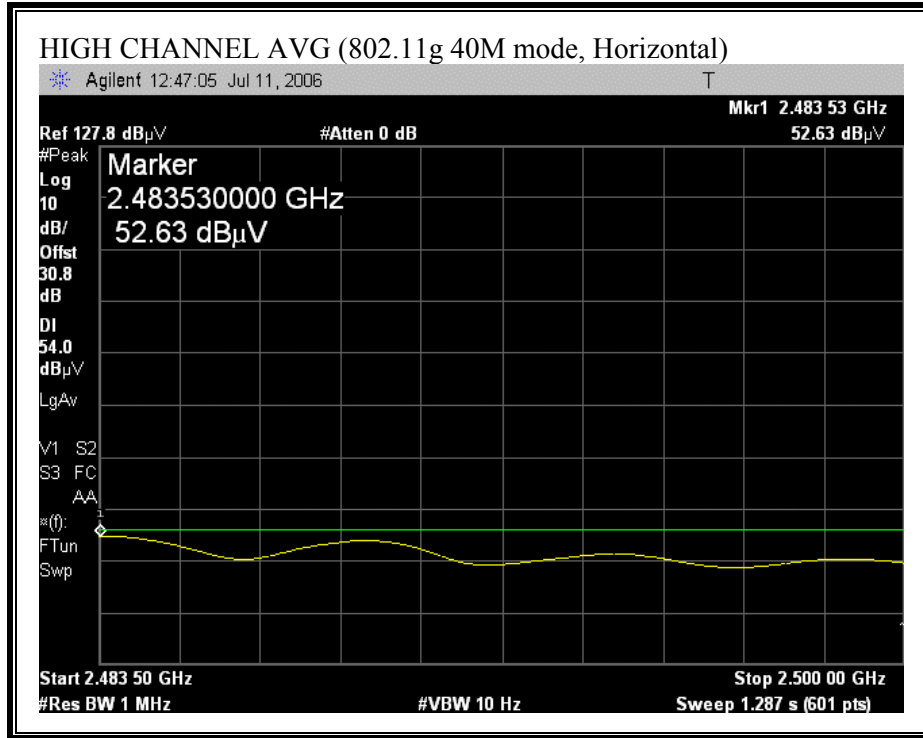

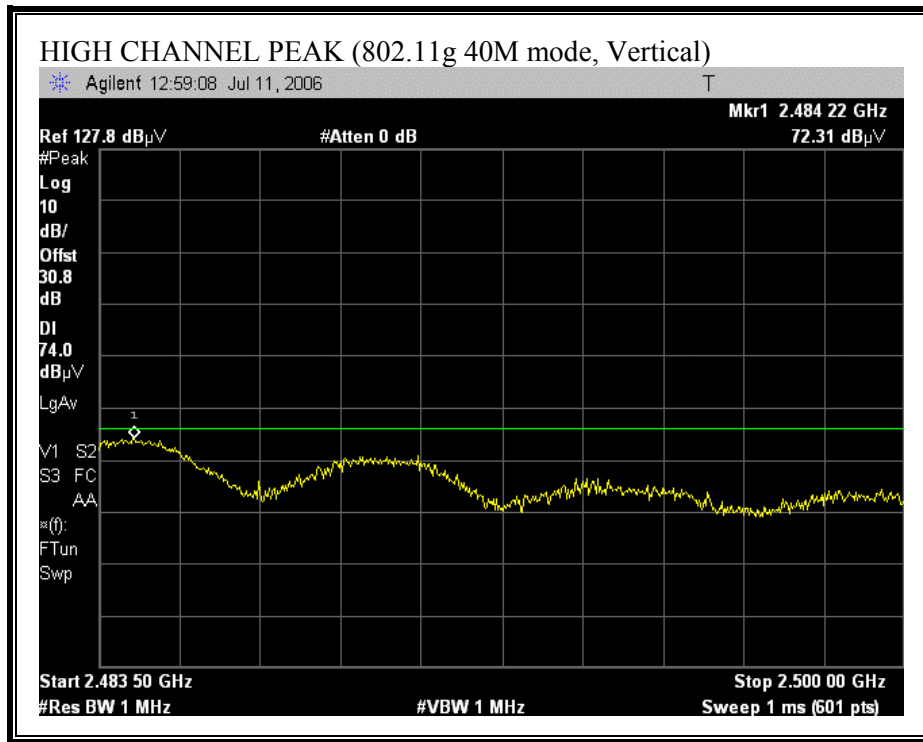



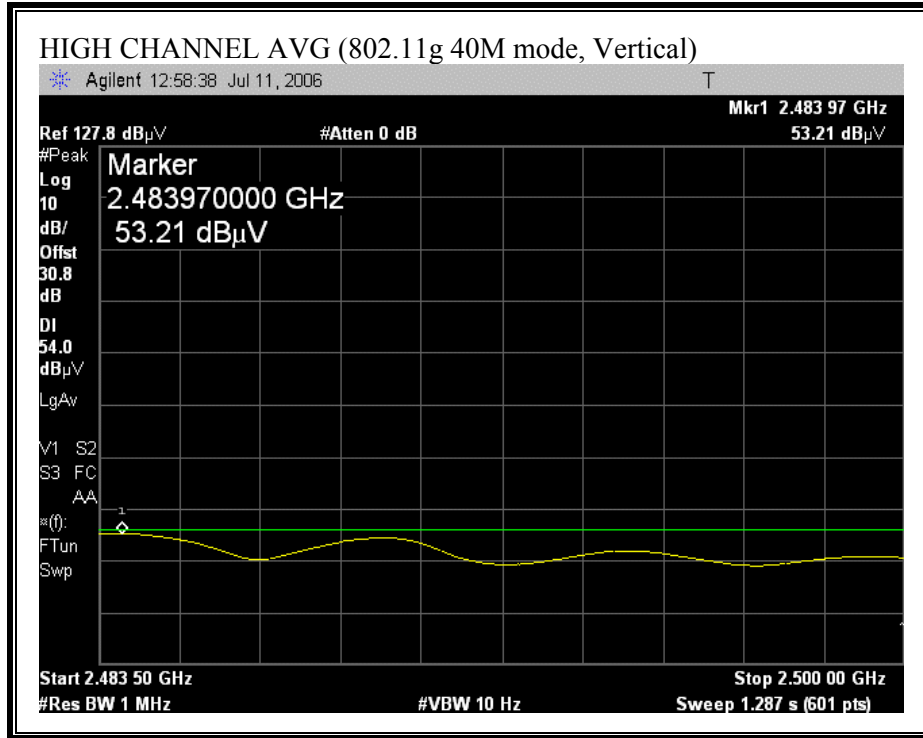

**HARMONICS AND SPURIOUS EMISSIONS (802.11g 40M MODE)**

**High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Company:** MARVELL SEMICONDUCTOR INC.  
**Project #:** 06U10412  
**Date:** 07/13/06  
**Test Engineer:** Frank Ibrahim  
**Configuration:** EUT with PIFA Antenna inside Apple Laptop PC  
**Mode:** Continuously Transmitting in 11g 40M mode, 54Mbps  
**EUT S/N:** 010

**Test Equipment:**

<b>Horn 1-18GHz</b>	<b>Pre-amplifier 1-26GHz</b>	<b>Pre-amplifier 26-40GHz</b>	<b>Horn &gt; 18GHz</b>
T60; S/N: 2238 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

Hi Frequency Cables

<b>2 foot cable</b>	<b>3 foot cable</b>	<b>12 foot cable</b>	<b>HPF</b>	<b>Reject Filter</b>
	Frank 177080001	Frank 187209001		R_001


**Peak Measurements**  
 RBW=VBW=1MHz  
**Average Measurements**  
 RBW=1MHz; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (2422 MHz)</b>															
4.844	3.0	51.99	40.10	33.0	4.0	-45.3	0.0	0.0	43.7	31.8	74	54	-30.3	-22.2	V, PowerSetting 5D 5E
7.266	3.0	52.41	39.80	35.4	4.6	-43.3	0.0	0.0	49.1	36.5	74	54	-24.9	-17.5	V, PowerSetting 5D 5E
4.844	3.0	52.08	39.50	33.0	4.0	-45.3	0.0	0.0	43.8	31.2	74	54	-30.2	-22.8	H, PowerSetting 5D 5E
<b>Mid Channel (2437 MHz)</b>															
4.874	3.0	51.86	39.90	33.1	4.0	-45.3	0.0	0.0	43.6	31.6	74	54	-30.4	-22.4	V, PowerSetting 5E 5E
7.311	3.0	51.63	39.10	35.5	4.6	-43.2	0.0	0.0	48.5	36.0	74	54	-25.5	-18.0	V, PowerSetting 5E 5E
4.874	3.0	51.90	39.50	33.1	4.0	-45.3	0.0	0.0	43.6	31.2	74	54	-30.4	-22.8	H, PowerSetting 5E 5E
7.311	3.0	51.38	39.20	35.5	4.6	-43.2	0.0	0.0	48.2	36.1	74	54	-25.8	-17.9	H, PowerSetting 5E 5E
<b>High Channel (2452 MHz)</b>															
4.904	3.0	51.99	39.00	33.1	4.0	-45.3	0.0	0.0	43.7	30.7	74	54	-30.3	-23.3	V, PowerSetting 5B 59
7.356	3.0	51.75	39.20	35.5	4.6	-43.1	0.0	0.0	48.8	36.2	74	54	-25.2	-17.8	V, PowerSetting 5B 59
4.904	3.0	51.86	39.10	33.1	4.0	-45.3	0.0	0.0	43.6	30.8	74	54	-30.4	-23.2	H, PowerSetting 5B 59
7.356	3.0	51.94	39.40	35.5	4.6	-43.1	0.0	0.0	48.9	36.4	74	54	-25.1	-17.6	H, PowerSetting 5B 59


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

**RESTRICTED BANDEDGE (802.11n MODE HT20, LOW CHANNEL)**

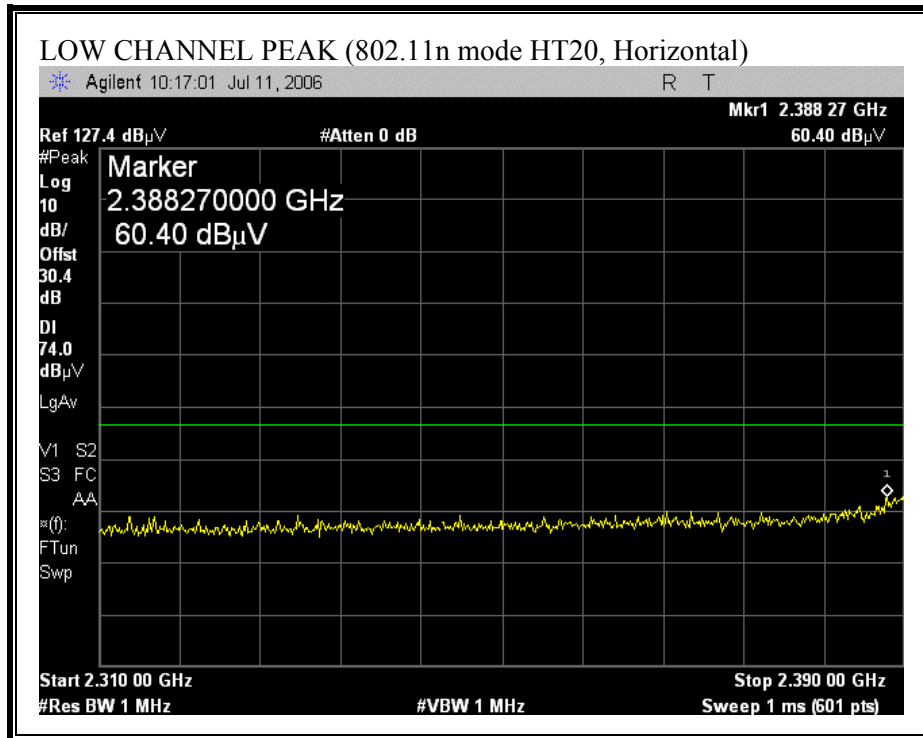


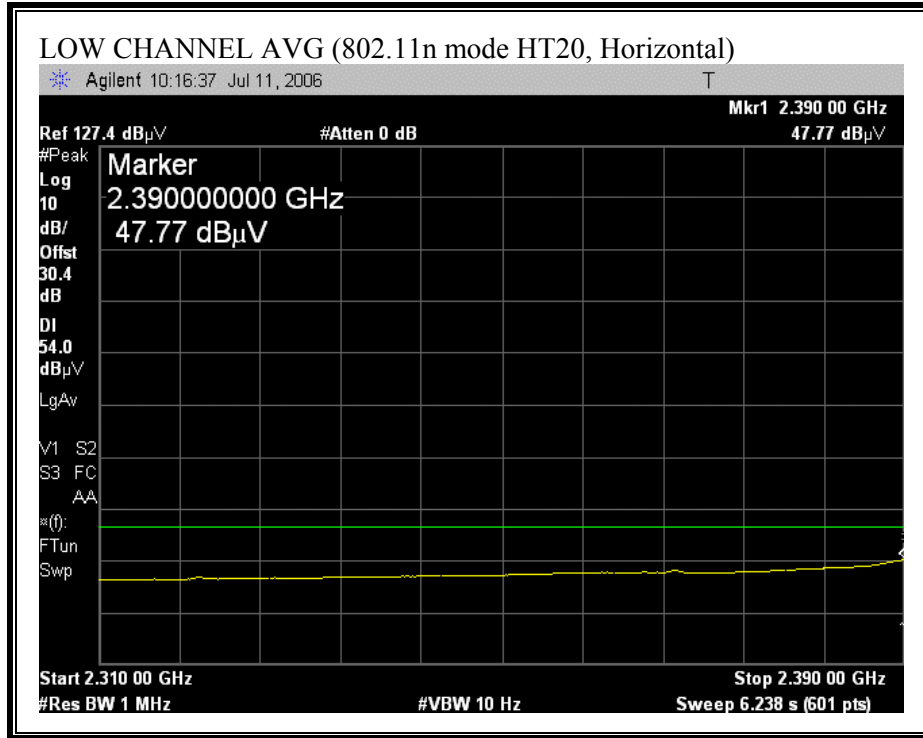


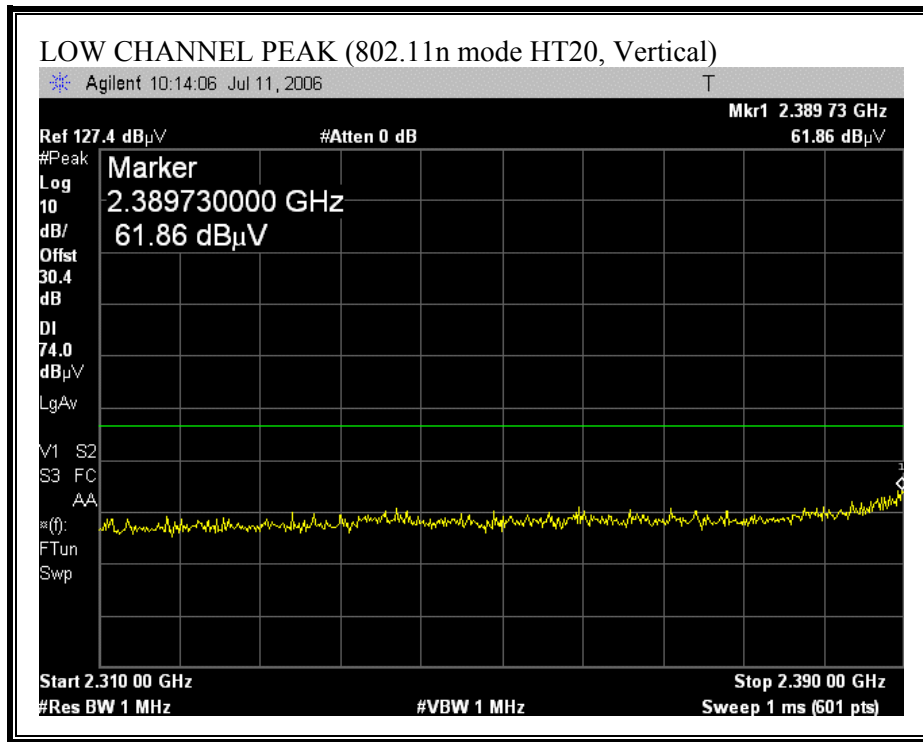

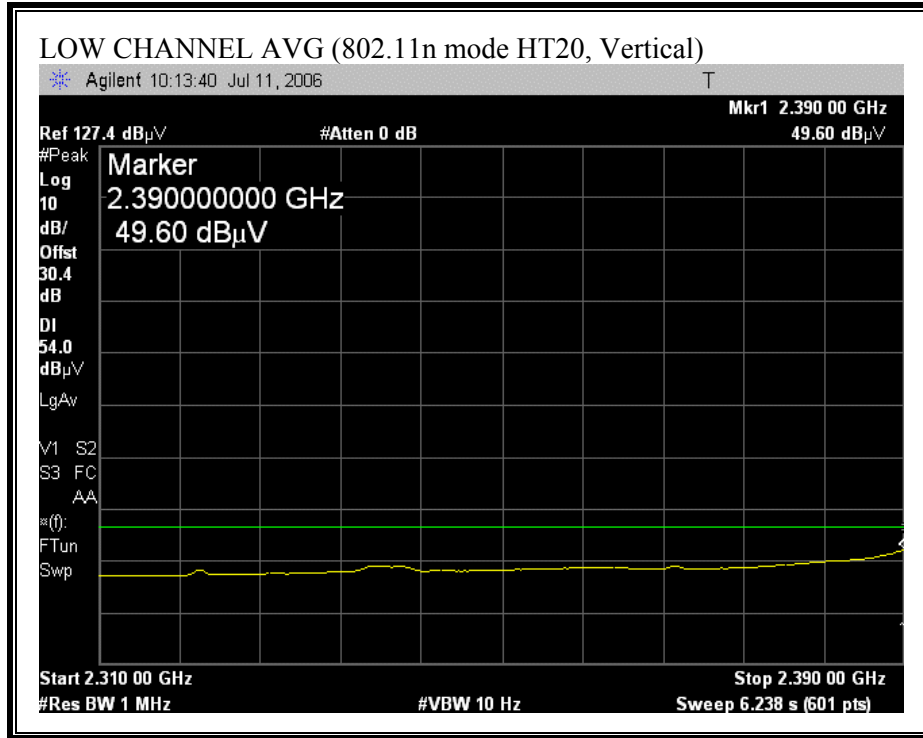



**RESTRICTED BANDEDGE (802.11n MODE HT20, HIGH CHANNEL)**

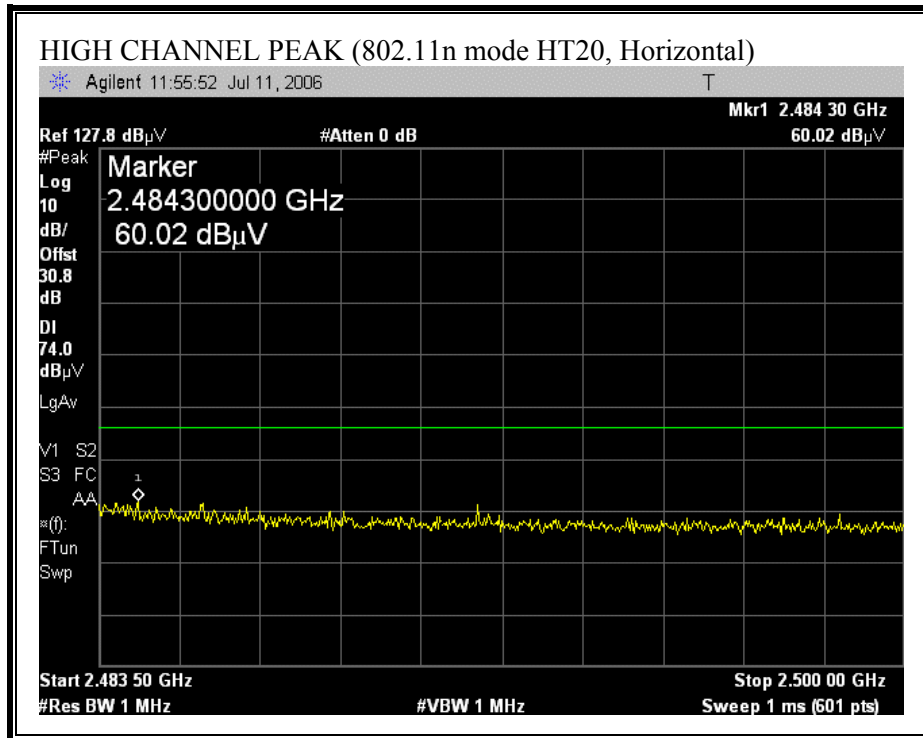

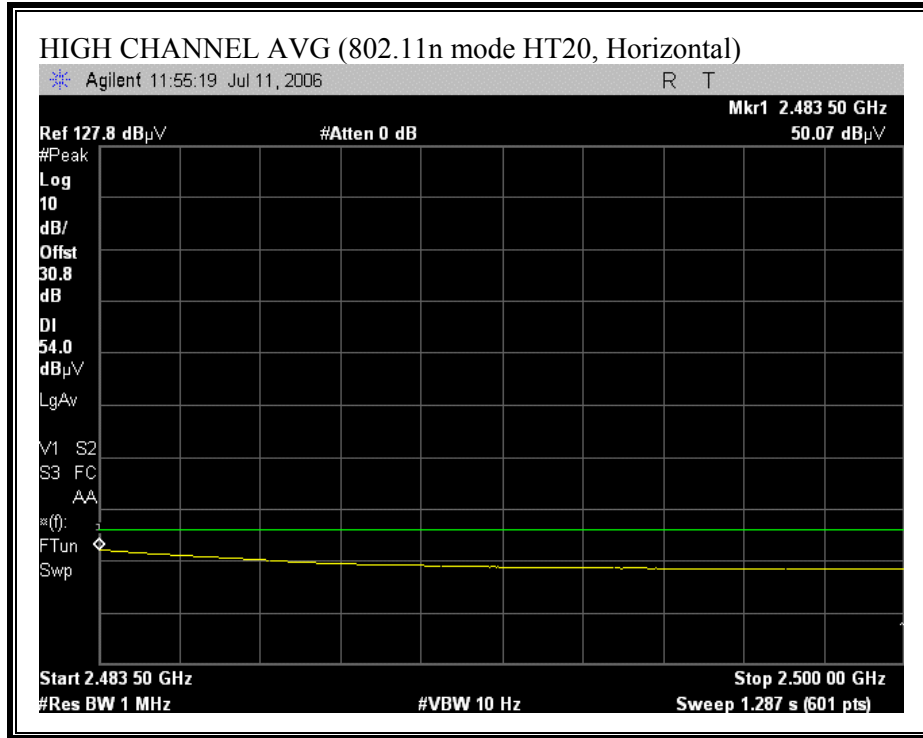



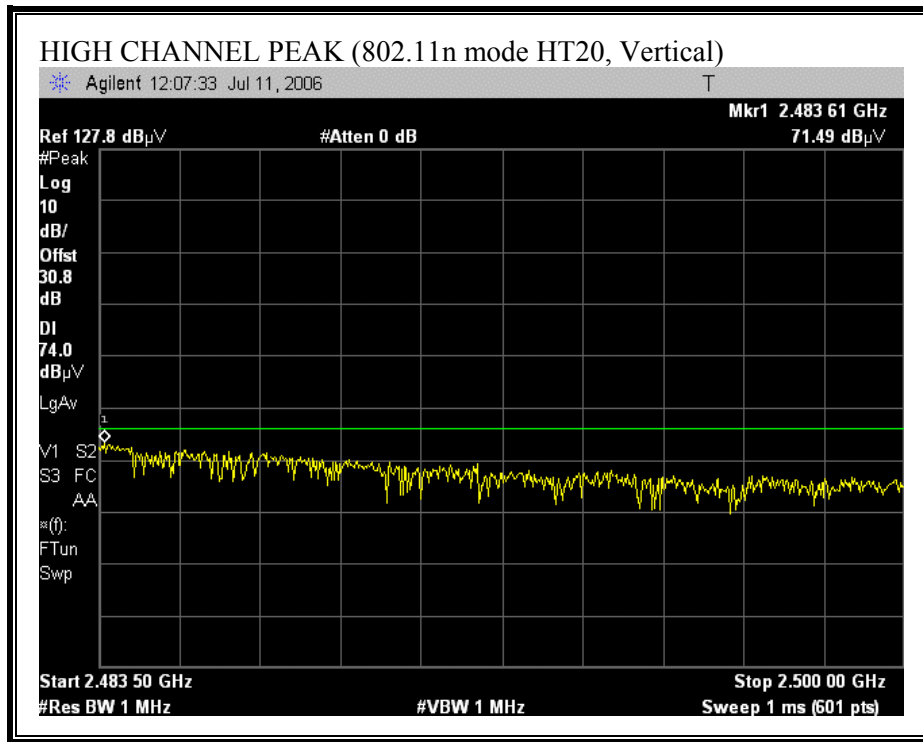

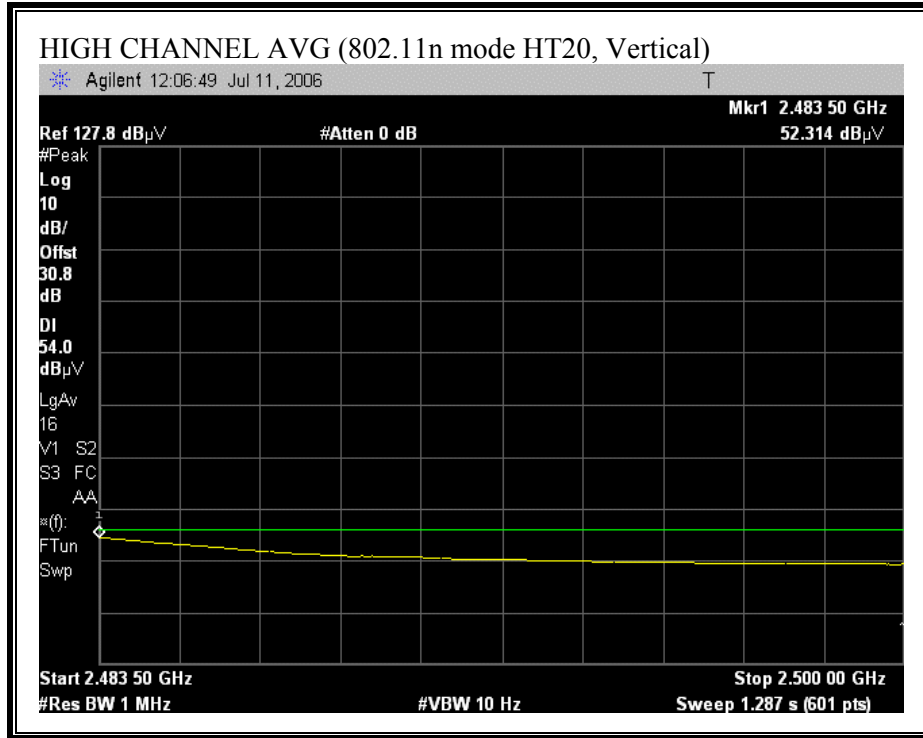

**HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)**

**High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Company:** MARVELL SEMICONDUCTOR INC.  
**Project #:** 06U10412  
**Date:** 07/13/06  
**Test Engineer:** Frank Ibrahim  
**Configuration:** EUT with PIFA Antenna inside Apple Laptop PC  
**Mode:** Continuously Transmitting in HT 20M mode, MCS11  
**EUT S/N:** 010

**Test Equipment:**

<b>Horn 1-18GHz</b>	<b>Pre-amplifer 1-26GHz</b>	<b>Pre-amplifer 26-40GHz</b>	<b>Horn &gt; 18GHz</b>
T60; S/N: 2238 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

Hi Frequency Cables


<b>2 foot cable</b>	<b>3 foot cable</b>	<b>12 foot cable</b>	<b>HPF</b>	<b>Reject Filter</b>	<b>Peak Measurements</b> RBW=VBW=1MHz <b>Average Measurements</b> RBW=1MHz; VBW=10Hz
	Frank 177080001	Frank 187209001		R_001	


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (2412 MHz)</b>															
4.824	3.0	52.14	39.50	33.0	4.0	-45.3	0.0	0.0	43.8	31.2	74	54	-30.2	-22.8	V, PowerSetting 60 60
4.824	3.0	52.09	39.30	33.0	4.0	-45.3	0.0	0.0	43.8	31.0	74	54	-30.2	-23.0	H, PowerSetting 60 60
<b>Mid Channel (2437 MHz)</b>															
4.874	3.0	51.30	39.40	33.1	4.0	-45.3	0.0	0.0	43.0	31.1	74	54	-31.0	-22.9	V, PowerSetting 64 65
7.311	3.0	53.57	41.42	35.5	4.6	-43.2	0.0	0.0	50.4	38.3	74	54	-23.6	-15.7	V, PowerSetting 64 65
4.874	3.0	51.28	39.30	33.1	4.0	-45.3	0.0	0.0	43.0	31.0	74	54	-31.0	-23.0	H, PowerSetting 64 65
7.311	3.0	51.07	39.10	35.5	4.6	-43.2	0.0	0.0	47.9	36.0	74	54	-26.1	-18.0	H, PowerSetting 64 65
<b>High Channel (2462 MHz)</b>															
4.924	3.0	51.99	39.40	33.1	4.0	-45.4	0.0	0.0	43.7	31.2	74	54	-30.3	-22.8	V, PowerSetting 5D 5C
7.386	3.0	51.66	39.30	35.6	4.6	-43.1	0.0	0.0	48.8	36.4	74	54	-25.2	-17.6	V, PowerSetting 5D 5C
4.924	3.0	52.14	39.20	33.1	4.0	-45.4	0.0	0.0	43.9	31.0	74	54	-30.1	-23.0	H, PowerSetting 5D 5C
7.386	3.0	51.62	39.50	35.6	4.6	-43.1	0.0	0.0	48.7	36.6	74	54	-25.3	-17.4	H, PowerSetting 5D 5C


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

**RESTRICTED BANDEDGE (802.11n MODE HT40, LOW CHANNEL)**

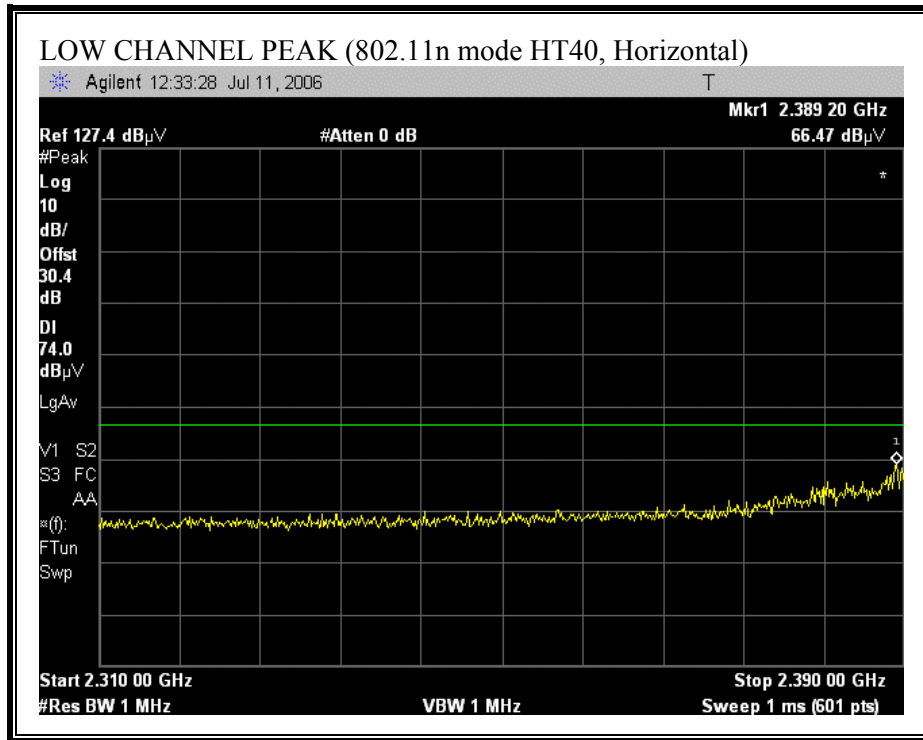


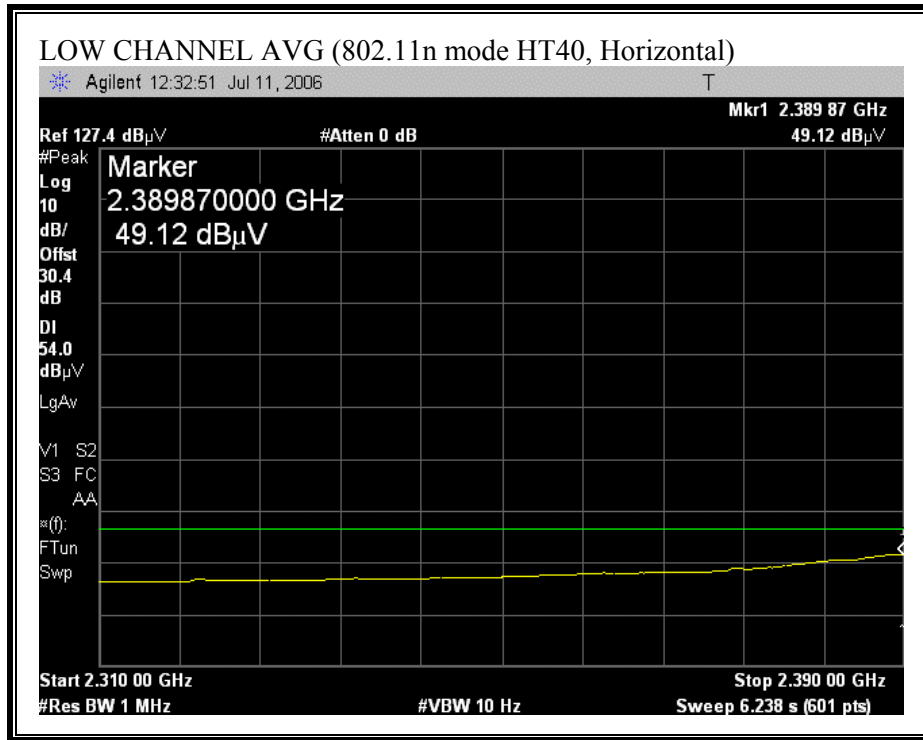

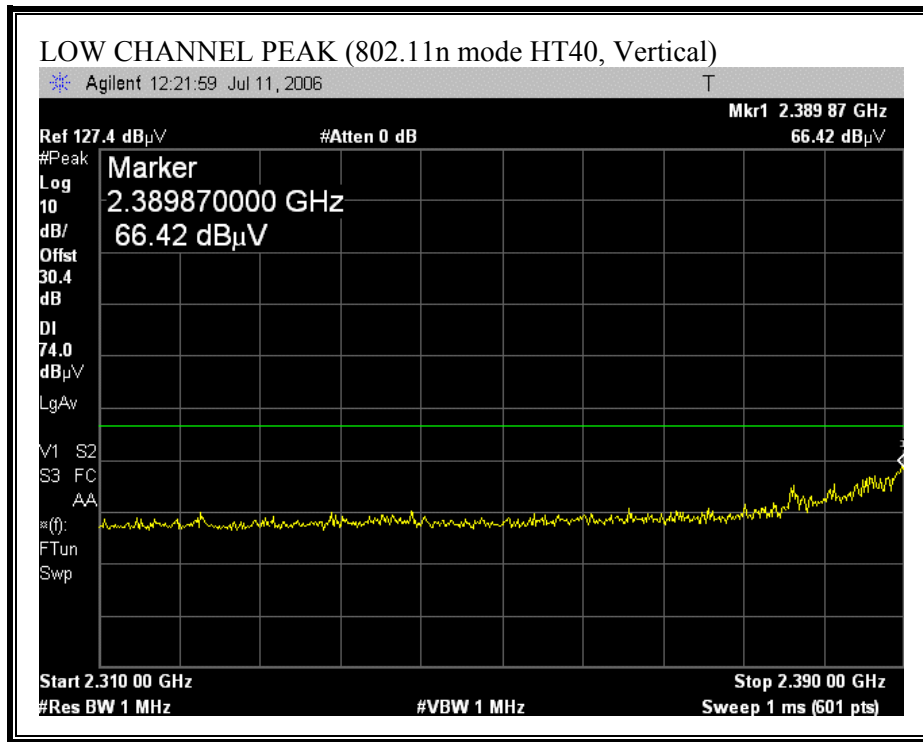


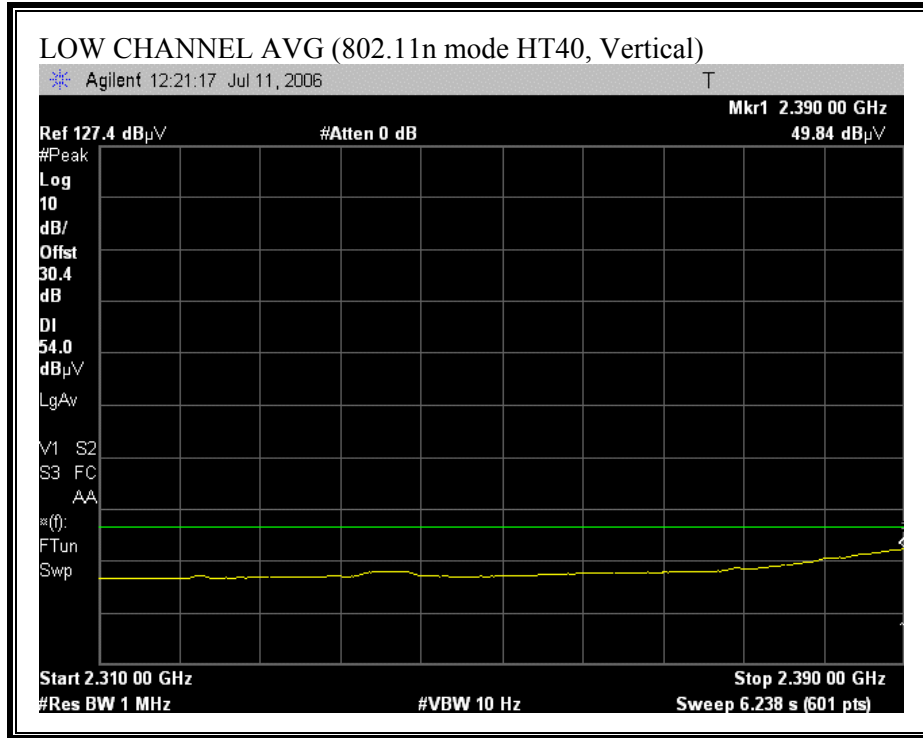



**RESTRICTED BANDEDGE (802.11n MODE HT40, HIGH CHANNEL)**

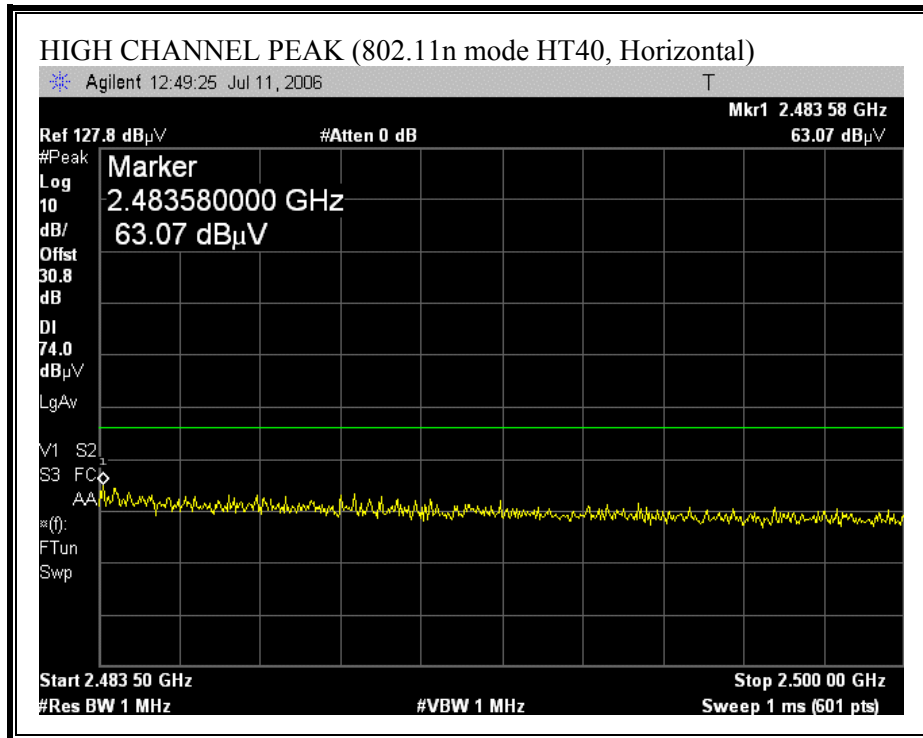



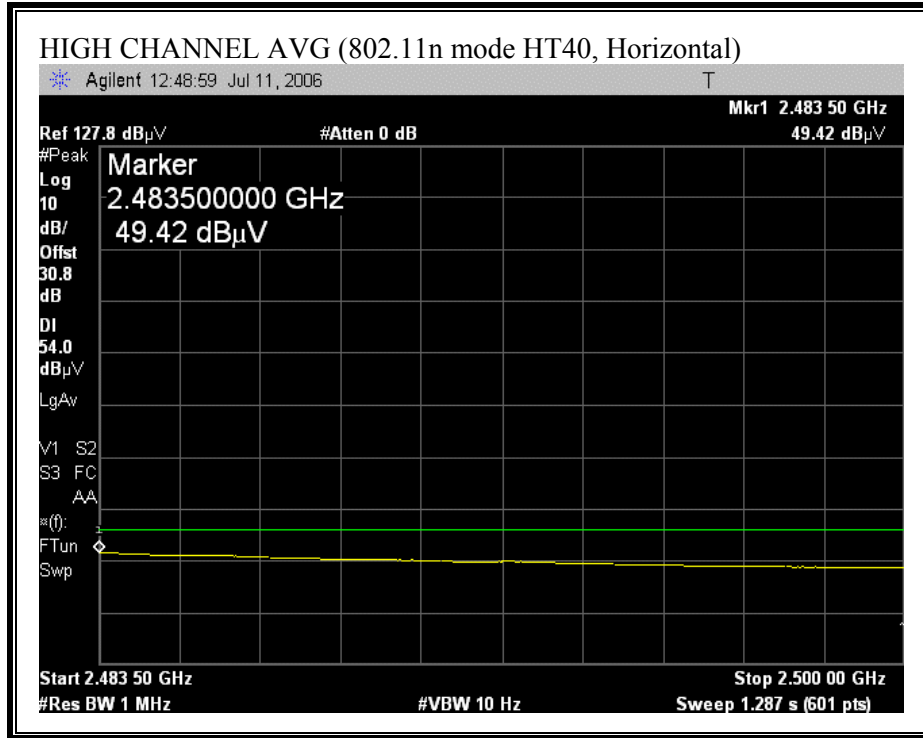

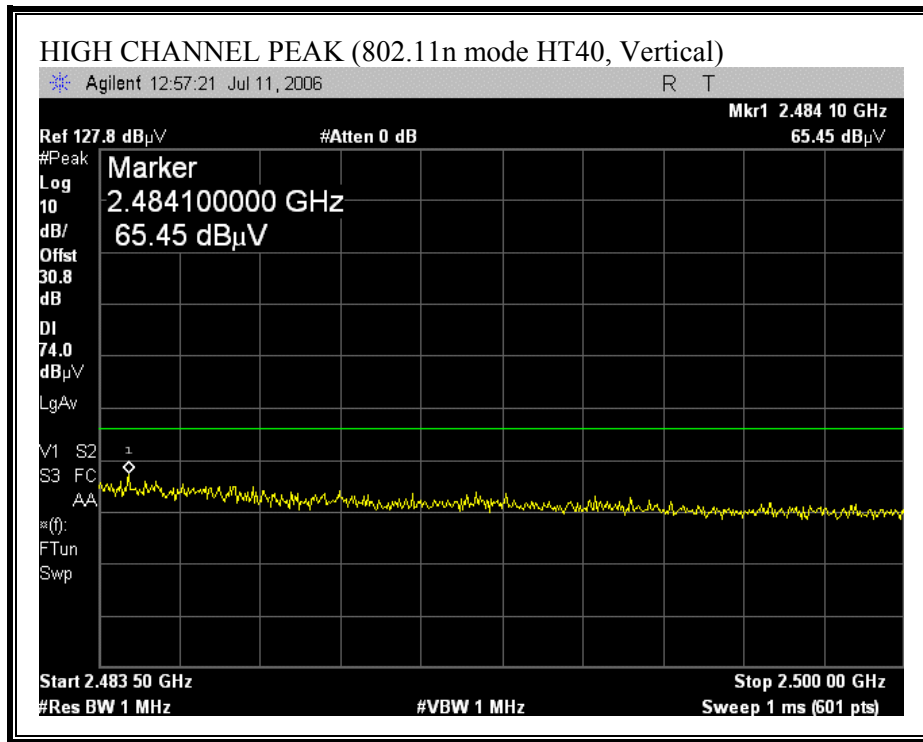

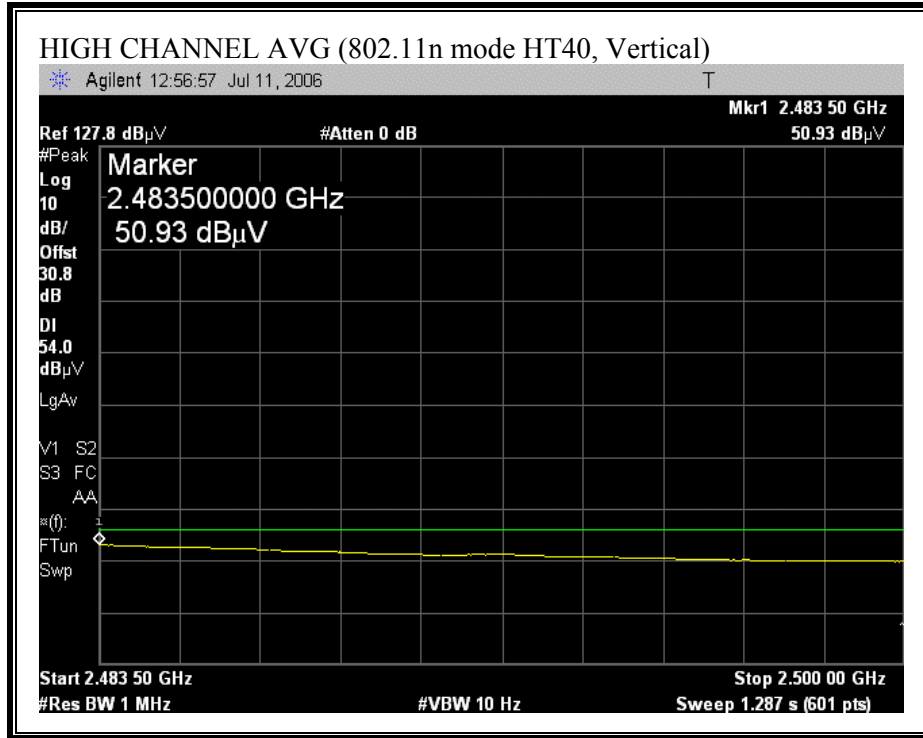

**HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)**

**High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Company:** MARVELL SEMICONDUCTOR INC.  
**Project #:** 06U10412  
**Date:** 07/14/06  
**Test Engineer:** Frank Ibrahim  
**Configuration:** EUT with PIFA Antenna inside Apple Laptop PC  
**Mode:** Continuously Transmitting in HT 40M mode, MCS15  
**EUT S/N:** 010

**Test Equipment:**

<b>Horn 1-18GHz</b>	<b>Pre-amplifier 1-26GHz</b>	<b>Pre-amplifier 26-40GHz</b>	<b>Horn &gt; 18GHz</b>
T60; S/N: 2238 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

Hi Frequency Cables

<b>2 foot cable</b>	<b>3 foot cable</b>	<b>12 foot cable</b>	<b>HPF</b>	<b>Reject Filter</b>
	Frank 177080001	Frank 187209001		R_001

**Peak Measurements**  
 RBW=VBW=1MHz  
**Average Measurements**  
 RBW=1MHz; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (2422 MHz)</b>															
4.844	3.0	51.05	39.20	33.0	4.0	-45.3	0.0	0.0	42.8	30.9	74	54	-31.2	-23.1	V, PowerSetting 5F 60
7.266	3.0	51.40	39.20	35.4	4.6	-43.3	0.0	0.0	48.1	35.9	74	54	-25.9	-18.1	V, PowerSetting 5F 60
4.844	3.0	51.00	39.00	33.0	4.0	-45.3	0.0	0.0	42.7	30.7	74	54	-31.3	-23.3	H, PowerSetting 5F 60
<b>Mid Channel (2437 MHz)</b>															
4.874	3.0	51.59	39.70	33.1	4.0	-45.3	0.0	0.0	43.3	31.4	74	54	-30.7	-22.6	V, PowerSetting 5C 5B
7.311	3.0	50.74	39.30	35.5	4.6	-43.2	0.0	0.0	47.6	36.2	74	54	-26.4	-17.8	V, PowerSetting 5C 5B
4.874	3.0	52.16	40.20	33.1	4.0	-45.3	0.0	0.0	43.9	31.9	74	54	-30.1	-22.1	H, PowerSetting 5C 5B
7.311	3.0	50.98	39.10	35.5	4.6	-43.2	0.0	0.0	47.8	36.0	74	54	-26.2	-18.0	H, PowerSetting 5C 5B
<b>High Channel (2452 MHz)</b>															
4.904	3.0	51.60	39.40	33.1	4.0	-45.3	0.0	0.0	43.3	31.1	74	54	-30.7	-22.9	V, PowerSetting 5C 5B
7.356	3.0	50.97	39.10	35.5	4.6	-43.1	0.0	0.0	48.0	36.1	74	54	-26.0	-17.9	V, PowerSetting 5C 5B
4.904	3.0	51.90	39.50	33.1	4.0	-45.3	0.0	0.0	43.6	31.2	74	54	-30.4	-22.8	H, PowerSetting 5C 5B
7.356	3.0	51.03	39.40	35.5	4.6	-43.1	0.0	0.0	48.0	36.4	74	54	-26.0	-17.6	H, PowerSetting 5C 5B

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 26 GHz, no other emissions above noise floor were detected.

### 7.2.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

#### HARMONICS AND SPURIOUS EMISSIONS (802.11a 20M MODE)

**High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

Company: Marvell  
 Project #: 06U10412  
 Date: 07/19/06  
 Test Engineer: Frank Ibrahim  
 Configuration: EUT with PIFA Antenna inside Apple Laptop PC  
 S/N: 010  
 Mode: Continuously Transmitting in 11a 20M mode, 9Mbps

**Test Equipment:**

<b>Horn 1-18GHz</b> T60; S/N: 2238 @3m	<b>Pre-amplifier 1-26GHz</b> T87 Miteq 924342	<b>Pre-amplifier 26-40GHz</b>	<b>Horn &gt; 18GHz</b> T89; ARA 18-26GHz; S/N:1049
<b>Hi Frequency Cables</b>			
<b>2 foot cable</b>	<b>3 foot cable</b> Frank 177080001	<b>12 foot cable</b> Frank 187209001	
		<b>HPF</b>	<b>Reject Filter</b> R_001

**Peak Measurements**  
 RBW=VBW=1MHz  
**Average Measurements**  
 RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (5745 MHz)</b>															
11.490	3.0	51.1	39.1	37.4	5.2	-39.8	0.0	0.0	53.9	41.9	74	54	-20.1	-12.1	V, Settings 6B 6E
11.490	3.0	49.9	38.3	37.4	5.2	-39.8	0.0	0.0	52.8	41.1	74	54	-21.2	-12.9	H, Settings 6B 6E
<b>Middle Channel (5785 MHz)</b>															
11.570	3.0	50.4	38.0	37.4	5.2	-39.8	0.0	0.0	53.3	40.8	74	54	-20.7	-13.2	V, Settings 6C 6F
11.570	3.0	50.4	38.1	37.4	5.2	-39.8	0.0	0.0	53.3	40.9	74	54	-20.7	-13.1	H, Settings 6C 6F
<b>High Channel (5825 MHz)</b>															
11.650	3.0	50.9	37.5	37.4	5.3	-39.8	0.0	0.0	53.7	40.3	74	54	-20.3	-13.7	V, Settings 6E 7I
11.650	3.0	50.5	37.2	37.4	5.3	-39.8	0.0	0.0	53.3	40.0	74	54	-20.7	-14.0	H, Settings 6E 7I

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

**HARMONICS AND SPURIOUS EMISSIONS (802.11a 40M MODE)**

High Frequency Measurement																	
Compliance Certification Services, Morgan Hill Open Field Site																	
Company:		Marvell															
Project #:		06U10412															
Date:		07/19/06															
Test Engineer:		Frank Ibrahim															
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC															
S/N:		010															
Mode:		Continuously Transmitting in 11a 40M mode, 9Mbps															
<b>Test Equipment:</b>																	
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz					
T60; S/N: 2238 @3m				T87 Miteq 924342								T89; ARA 18-26GHz; S/N:1049					
Hi Frequency Cables																	
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			Peak Measurements		
			Frank 177080001			Frank 187209001						R_001			RBW=VBW=1MHz		
Average Measurements																	
RBW=1MHz; VBW=10Hz																	
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
Low Channel (5755 MHz)																	
11.510	3.0	51.0	38.1	37.4	5.2	-39.8	0.0	0.0	53.8	40.9	74	54	-20.2	-13.1	V, Settings 63 65		
11.510	3.0	50.7	7.7	37.4	5.2	-39.8	0.0	0.0	53.5	10.5	74	54	-20.5	-43.5	H, Settings 63 65		
High Channel (5795 MHz)																	
11.590	3.0	50.3	38.6	37.4	5.2	-39.8	0.0	0.0	53.1	41.4	74	54	-20.9	-12.6	V, Settings 6E 71		
11.590	3.0	50.8	38.0	37.4	5.2	-39.8	0.0	0.0	53.6	40.8	74	54	-20.4	-13.2	H, Settings 6E 71		
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

**HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT20)**

**High Frequency Measurement**  
 Compliance Certification Services, Morgan Hill Open Field Site

**Company:** Marvell  
**Project #:** 06U10412  
**Date:** 07/19/06  
**Test Engineer:** Frank Ibrahim  
**Configuration:** EUT with PIFA Antenna inside Apple Laptop PC  
**S/N:** 010  
**Mode:** Continuously Transmitting in HT 20M mode, MCS0

**Test Equipment:**

<b>Horn 1-18GHz</b>	<b>Pre-amplifier 1-26GHz</b>	<b>Pre-amplifier 26-40GHz</b>	<b>Horn &gt; 18GHz</b>
T60; S/N: 2238 @3m	T87 Miteq 924342		T89; ARA 18-26GHz; S/N:1049

Hi Frequency Cables

<b>2 foot cable</b>	<b>3 foot cable</b>	<b>12 foot cable</b>	<b>HPF</b>	<b>Reject Filter</b>
	Frank 177080001	Frank 187209001		R_001

**Peak Measurements**  
 RBW=VBW=1MHz  
**Average Measurements**  
 RBW=1MHz; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
<b>Low Channel (5745 MHz)</b>															
11.490	3.0	51.6	38.5	37.4	5.2	-39.8	0.0	0.0	54.4	41.3	74	54	-19.6	-12.7	V, Settings 6B 6E
11.490	3.0	50.7	37.5	37.4	5.2	-39.8	0.0	0.0	53.5	40.3	74	54	-20.5	-13.7	H, Settings 6B 6E
<b>Middle Channel (5785 MHz)</b>															
11.570	3.0	50.9	37.8	37.4	5.2	-39.8	0.0	0.0	53.7	40.6	74	54	-20.3	-13.4	V, Settings 6C 6F
11.570	3.0	50.1	37.5	37.4	5.2	-39.8	0.0	0.0	52.9	40.3	74	54	-21.1	-13.7	H, Settings 6C 6F
<b>High Channel (5825 MHz)</b>															
11.650	3.0	51.0	37.2	37.4	5.3	-39.8	0.0	0.0	53.8	40.0	74	54	-20.2	-14.0	V, Settings 6D 70
11.650	3.0	50.8	37.5	37.4	5.3	-39.8	0.0	0.0	53.6	40.3	74	54	-20.4	-13.7	H, Settings 6D 70

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.

**HARMONICS AND SPURIOUS EMISSIONS (802.11n MODE HT40)**


High Frequency Measurement																																															
Compliance Certification Services, Morgan Hill Open Field Site																																															
Company:		Marvell																																													
Project #:		06U10412																																													
Date:		07/19/06																																													
Test Engineer:		Frank Ibrahim																																													
Configuration:		EUT with PIFA Antenna inside Apple Laptop PC																																													
S/N:		010																																													
Mode:		Continuously Transmitting in HT 40M mode, MCS0																																													
<b>Test Equipment:</b>																																															
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz																																			
T60; S/N: 2238 @3m				T87 Miteq 924342								T89; ARA 18-26GHz; S/N:1049																																			
Hi Frequency Cables																																															
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter																															
				Frank 177080001				Frank 187209001								R_001																															
<table border="0"> <tr> <td colspan="12"><b>Peak Measurements</b></td> <td colspan="4">RBW=VBW=1MHz</td> </tr> <tr> <td colspan="12"><b>Average Measurements</b></td> <td colspan="4">RBW=1MHz; VBW=10Hz</td> </tr> </table>																<b>Peak Measurements</b>												RBW=VBW=1MHz				<b>Average Measurements</b>												RBW=1MHz; VBW=10Hz			
<b>Peak Measurements</b>												RBW=VBW=1MHz																																			
<b>Average Measurements</b>												RBW=1MHz; VBW=10Hz																																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																
<b>Low Channel (5755 MHz)</b>																																															
11.510	3.0	50.5	38.6	37.4	5.2	-39.8	0.0	0.0	53.3	41.4	74	54	-20.7	-12.6	V, Settings 66 68																																
11.510	3.0	51.0	38.9	37.4	5.2	-39.8	0.0	0.0	53.8	41.7	74	54	-20.2	-12.3	H, Settings 66 68																																
<b>High Channel (5795 MHz)</b>																																															
11.590	3.0	50.0	37.4	37.4	5.2	-39.8	0.0	0.0	52.8	40.2	74	54	-21.2	-13.8	V, Settings 6E 70																																
11.590	3.0	50.5	37.9	37.4	5.2	-39.8	0.0	0.0	53.3	40.7	74	54	-20.7	-13.3	H, Settings 6E 70																																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit																																		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit																																		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit																																		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit																																		
CL	Cable Loss					HPF	High Pass Filter																																								

EUT was scanned from 1 GHz to 40 GHz, no other signals from EUT were detected above the noise floor.



## 7.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

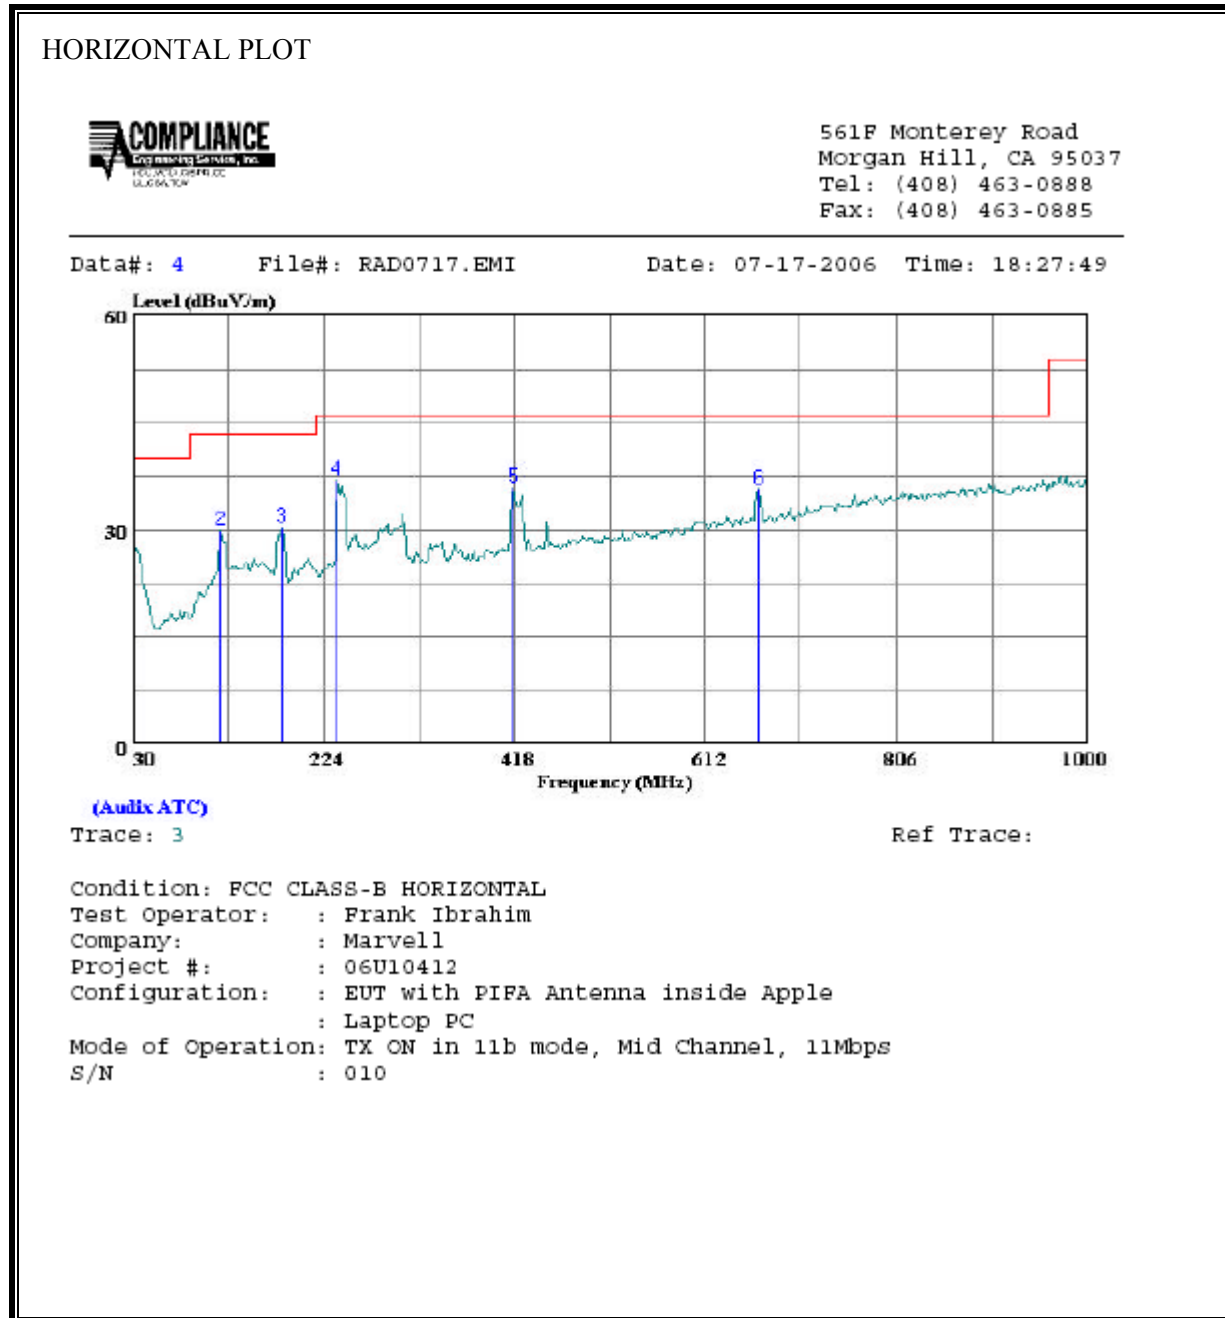

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.000	7.28	20.45	27.73	40.00	-12.27	Peak
2	119.240	14.79	15.05	29.84	43.50	-13.66	Peak
3	182.290	17.29	12.95	30.24	43.50	-13.26	Peak
4	237.580	23.62	13.39	37.01	46.00	-8.99	Peak
5	417.030	17.50	18.47	35.97	46.00	-10.03	Peak
6	667.290	12.99	22.66	35.65	46.00	-10.35	Peak

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

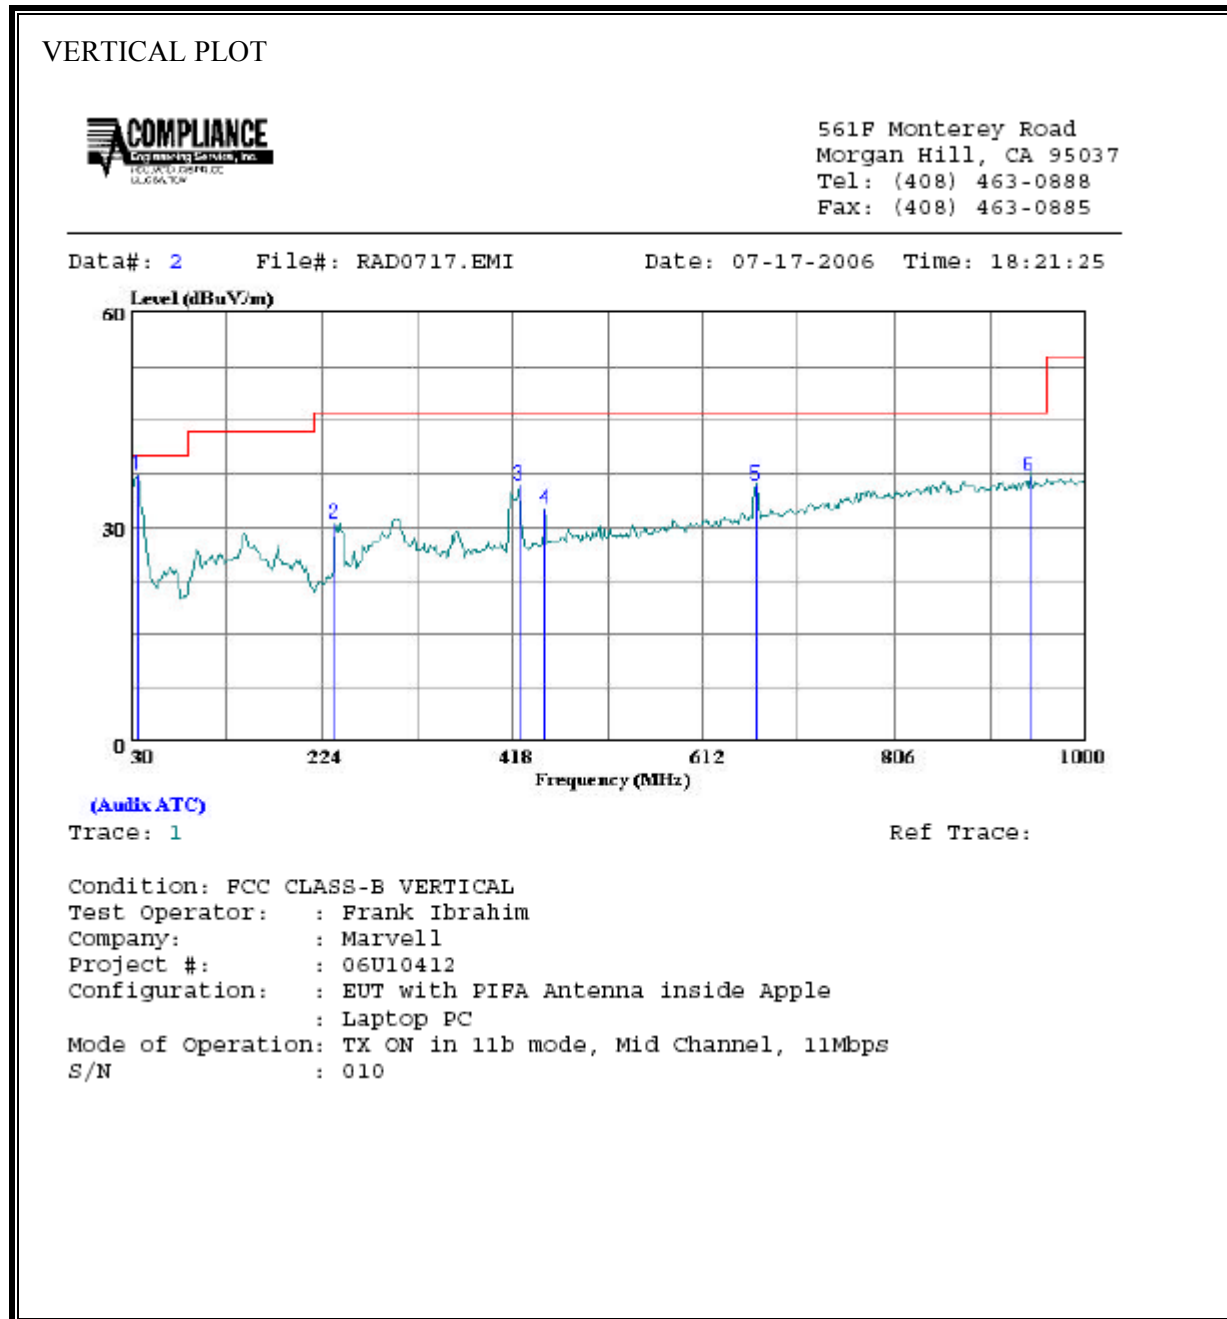

VERTICAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	35.820	18.71	18.58	37.29	40.00	-2.71	Peak
2	237.580	17.17	13.39	30.56	46.00	-15.44	Peak
3	424.790	17.21	18.64	35.85	46.00	-10.15	Peak
4	450.980	13.31	19.20	32.51	46.00	-13.49	Peak
5	666.320	13.26	22.64	35.91	46.00	-10.09	Peak
6	942.770	10.70	26.43	37.13	46.00	-8.87	Peak

### 7.3. POWERLINE CONDUCTED EMISSIONS

#### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


#### RESULTS

No non-compliance noted:

**6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Class (dB)	Limit QP	EN B AV	Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.47	40.28	--	--	0.00	56.58	46.58	-16.30	-6.30	L1
1.38	39.58	--	--	0.00	56.00	46.00	-16.42	-6.42	L1
19.22	40.40	--	--	0.00	60.00	50.00	-19.60	-9.60	L1
0.47	37.38	--	--	0.00	56.58	46.58	-19.20	-9.20	L2
0.76	34.62	--	--	0.00	56.00	46.00	-21.38	-11.38	L2
13.34	43.78	--	--	0.00	60.00	50.00	-16.22	-6.22	L2
6 Worst Data									

**LINE 1 AND LINE 2 RESULTS**

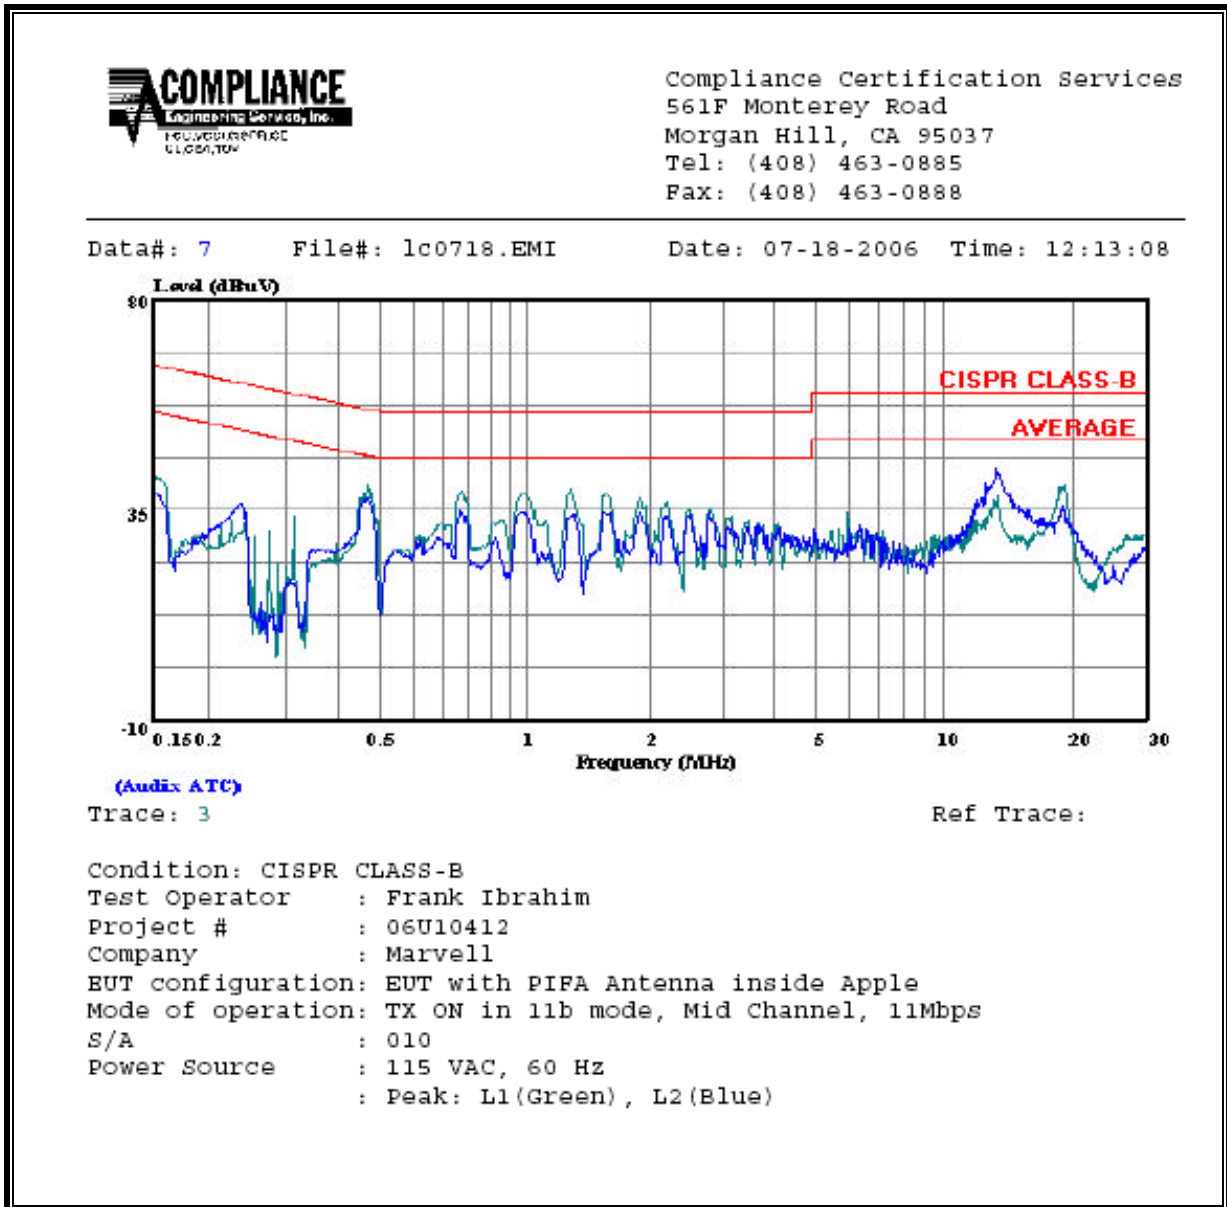

## 8. SETUP PHOTOS

### RADIATED RF MEASUREMENT SETUP





RADIATED BACK PHOTO



**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**





**END OF REPORT**