



# TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: NTT docomo P-04C  
FCC ID: UCE111037A  
To: FCC Part 15.225: 2010 Subpart C

**Test Report Serial No:**  
RFI-RPT-RP80807JD05A

<b>This Test Report Is Issued Under The Authority Of Chris Guy, Head of Global Approvals:</b>		
<b>Checked By:</b>	A. Henriques	
<b>Signature:</b>		
<b>Date of Issue:</b>	04 March 2011	

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

**RFI Global Services Ltd**

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG  
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001  
Email: [info@rfi-global.com](mailto:info@rfi-global.com) Website: [www.rfi-global.com](http://www.rfi-global.com)

This page has been left intentionally blank.

## **Table of Contents**

<b>1. Customer Information .....</b>	<b>4</b>
<b>2. Summary of Testing .....</b>	<b>5</b>
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
<b>3. Equipment Under Test (EUT) .....</b>	<b>6</b>
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	7
3.5. Support Equipment	8
<b>4. Operation and Monitoring of the EUT during Testing .....</b>	<b>9</b>
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
<b>5. Measurements, Examinations and Derived Results .....</b>	<b>10</b>
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions	11
5.2.2. Receiver/Idle Mode Radiated Spurious Emissions	13
5.2.3. Transmitter Fundamental Field Strength	15
5.2.4. Transmitter Radiated Spurious Emissions	16
5.2.4. Transmitter Radiated Spurious Emissions	16
5.2.5. Transmitter Band Edge Radiated Emissions	18
5.2.6. Transmitter 20 dB Bandwidth	19
5.2.7. Transmitter Frequency Stability (Temperature & Voltage Variation)	20
<b>6. Measurement Uncertainty .....</b>	<b>21</b>
<b>Appendix 1. Test Equipment Used .....</b>	<b>22</b>

**1. Customer Information**










<b>Company Name:</b>	Panasonic Mobile Communications Development of Europe Ltd.
<b>Address:</b>	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom

## **2. Summary of Testing**

### **2.1. General Information**

<b>Specification Reference:</b>	47CFR15.225
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2010: Part 15 Subpart C (Radio Frequency Devices) - Section 15.225
<b>Specification Reference:</b>	47CFR15.107 and 47CFR15.109
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2010: Part 15 Subpart B (Radio Frequency Devices) - Sections 15.107 and 15.109
<b>Specification Reference:</b>	47CFR15.209
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2010: Part 15 Subpart C (Intentional Radiators) - Section 15.209
<b>Site Registration:</b>	209735
<b>Location of Testing:</b>	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
<b>Test Dates:</b>	16 February 2011 to 25 February 2011

### **2.2. Summary of Test Results**

<b>FCC Reference (47CFR)</b>	<b>Measurement</b>	<b>Result</b>
Part 15.107(a)	Receiver/Idle Mode AC Conducted Spurious Emissions	
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
Part 15.225(a)(b)(c)(d)	Transmitter Fundamental Field Strength	
Part 15.209(a), 15.225(d)	Transmitter Radiated Spurious Emissions	
Part 15.209(a), 15.225(c)(d)	Transmitter Band Edge Radiated Emissions	
Part 2.1049	Transmitter 20 dB Bandwidth	
Part 15.225(e)	Transmitter Frequency Stability (Temperature & Voltage Variation)	
<b>Key to Results</b>		
 = Complied  = Did not comply		

### **2.3. Methods and Procedures**

<b>Reference:</b>	ANSI C63.4 (2009)
<b>Title:</b>	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>Reference:</b>	ANSI C63.10 (2009)
<b>Title:</b>	American National Standard for Testing Unlicensed Wireless Devices

### **2.4. Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	NTT docomo
<b>Model Name or Number:</b>	P-04C
<b>IMEI:</b>	355098040018090
<b>Hardware Version Number:</b>	Rev C
<b>Software Version Number:</b>	B-D11SW1-01.01.004 D11SW1_Cv48091406
<b>FCC ID:</b>	UCE111037A

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	Battery
<b>Model Name or Number:</b>	P23

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	AC Charger
<b>Model Name or Number:</b>	FOMA AC Adapter 01 for Global use / MAS-BH0008-A 002

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	DC Charger
<b>Model Name or Number:</b>	FOMA DC Adapter 02

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	Charge/USB Data cable
<b>Model Name or Number:</b>	FOMA USB Cable with Charge Function 02

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	Personal Hands-Free
<b>Model Name or Number:</b>	Stereo Earphone Set 01

**3.2. Description of EUT**

The equipment under test was a UMTS cellular handset with RFID.

**3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

**3.4. Additional Information Related to Testing**

<b>Tested Technology:</b>	RFID	
<b>Category of Equipment:</b>	Transceiver	
<b>Channel Spacing:</b>	Single channel device	
<b>Transmit Frequency Range:</b>	13.56 MHz	
<b>Receive Frequency Range:</b>	13.56 MHz	
<b>Power Supply Requirement:</b>	Nominal	3.7 V
	Minimum	3.4 V
	Maximum	4.2 V
<b>Tested Temperature Range:</b>	Minimum	-20°C
	Maximum	50°C

### **3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

<b>Brand Name:</b>	Generic
<b>Description:</b>	Micro SD Memory Card
<b>Model Name or Number:</b>	Not marked or stated

<b>Brand Name:</b>	Not marked or stated
<b>Description:</b>	Dummy Battery
<b>Model Name or Number:</b>	P-04C Dummy battery #02

<b>Brand Name:</b>	Buffalo
<b>Description:</b>	USB Hub
<b>Model Name or Number:</b>	BSH3U01



## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode
- Constantly transmitting at full power with a modulated carrier in RFID test mode.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- The RFID transmitter test mode was enabled using a USIM card supplied by the customer.
- Receiver Idle/standby mode radiated spurious emission tests were performed with the Charge/USB Data cable connected to the EUT as this was found to be the worst case during pre-scans. All accessories were individually connected and measurements made during pre-scans to determine the worst case combination.
- Transmitter radiated spurious emission tests were performed with the Personal Hands Free connected to the EUT as this was found to be the worst case during pre-scans. All appropriate accessories were individually connected and measurements made during pre-scans to determine the worst case combination.
- The TV antenna was fully extended during emissions testing as this caused the EUT to radiate higher level spurious emissions than with the antenna retracted.
- As the EUT is not capable of transmitting while charging, no AC Mains conducted emissions (150 kHz to 30 MHz) test were performed in transmit mode.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6: Measurement Uncertainties* for details.

## 5.2. Test Results

### 5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions

#### Test Summary:

Test Engineer:	Ian Watch	Test Date:	17 February 2011
Test Sample IMEI:	355098040018090		

FCC Part:	15.107(a)
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

#### Environmental Conditions:

Temperature (°C):	20
Relative Humidity (%):	31


#### Results: Quasi Peak

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.150000	Live	36.6	66.0	29.4	Complied
1.270500	Neutral	26.5	56.0	29.5	Complied
1.401000	Live	31.2	56.0	24.8	Complied
1.441500	Live	31.4	56.0	24.6	Complied
1.482000	Live	33.5	56.0	22.5	Complied
1.563000	Live	34.2	56.0	21.8	Complied
1.572000	Live	31.8	56.0	24.2	Complied
1.585500	Live	30.6	56.0	25.4	Complied
1.621500	Live	28.0	56.0	28.0	Complied
1.626000	Live	27.6	56.0	28.4	Complied
1.671000	Live	25.3	56.0	30.7	Complied

#### Results: Average

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
1.459500	Live	21.3	46.0	24.7	Complied
1.473000	Live	26.6	46.0	19.4	Complied
1.477500	Live	27.4	46.0	18.6	Complied
1.500000	Live	28.0	46.0	18.0	Complied
1.518000	Live	25.2	46.0	20.8	Complied
1.617000	Live	18.8	46.0	27.2	Complied
1.621500	Live	18.3	46.0	27.7	Complied
1.635000	Live	18.4	46.0	27.6	Complied

**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)**

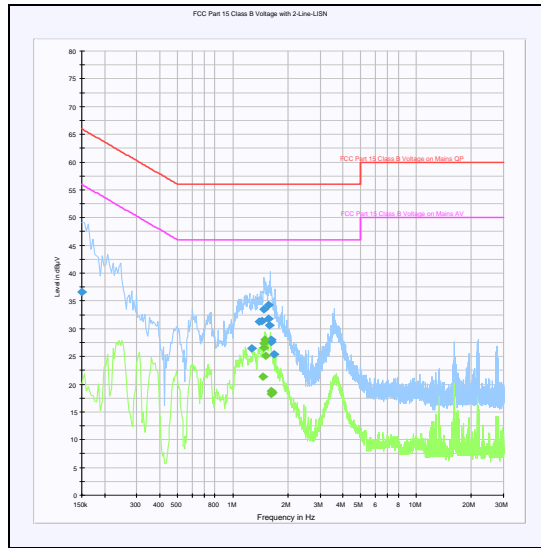

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.*

**5.2.2. Receiver/Idle Mode Radiated Spurious Emissions****Test Summary:**

<b>Test Engineer:</b>	Ian Watch & Nick Steele	<b>Test Date:</b>	18 February 2011 & 25 February 2011
<b>Test Sample IMEI:</b>	355098040018090		

<b>FCC Part:</b>	15.109
<b>Test Method Used:</b>	As detailed in ANSI C63.10 Sections 6.3, 6.4 and 6.5 referencing ANSI C63.4
<b>Frequency Range:</b>	9 kHz to 1000 MHz

**Environmental Conditions:**

<b>Temperature (°C):</b>	22 to 23
<b>Relative Humidity (%):</b>	23 to 25




**Results: Quasi Peak**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
107.603	Horizontal	25.6	43.5	17.9	Complied

**Note(s):**

- Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).
- A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required. A distance extrapolation factor of 40 dB was used.
- Final measurement values include corrections for antenna factor and cable losses.
- All emissions on the 9 kHz to 150 kHz plot were investigated and found to be radiating from the test site turntable.
- Measurements in the range 30 MHz to 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres

### Receiver/Idle Mode Radiated Spurious Emissions (continued)

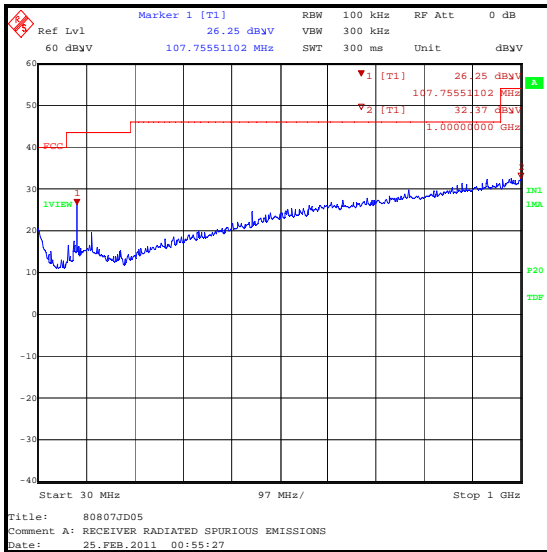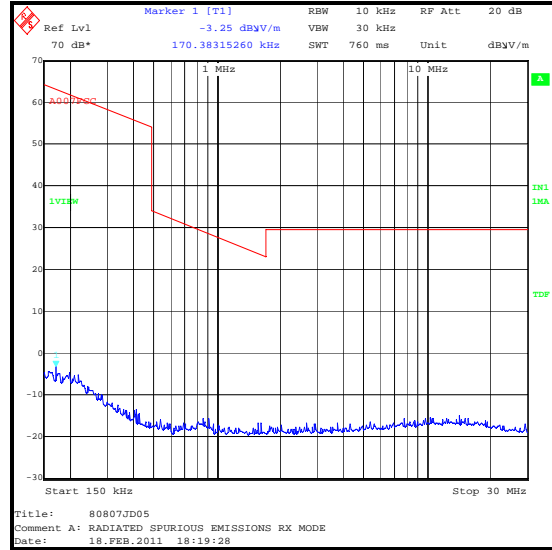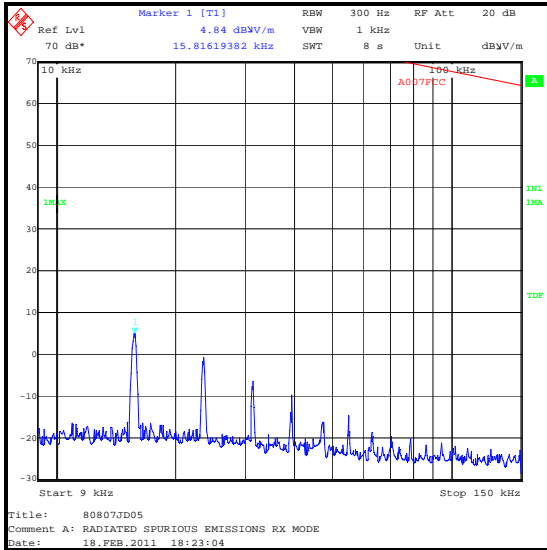

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

**5.2.3. Transmitter Fundamental Field Strength**

**Test Summary:**

<b>Test Engineer:</b>	Ian Watch	<b>Test Date:</b>	18 February 2011
<b>Test Sample IMEI:</b>	355098040018090		

<b>FCC Part:</b>	15.225(a)(b)(c)(d)
<b>Test Method Used:</b>	ANSI C63.10 Section 6.4

**Environmental Conditions:**


<b>Temperature (°C):</b>	22
<b>Relative Humidity (%):</b>	23

**Results: Quasi Peak**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit at 30 m (dB $\mu$ V/m)	Margin (dB)	Result
13.56	90° to EUT	-0.7	84.0	84.7	Complied

**Note(s):**

1. The limit is specified at a test distance of 30 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres. A distance extrapolation factor of 40 dB was used.

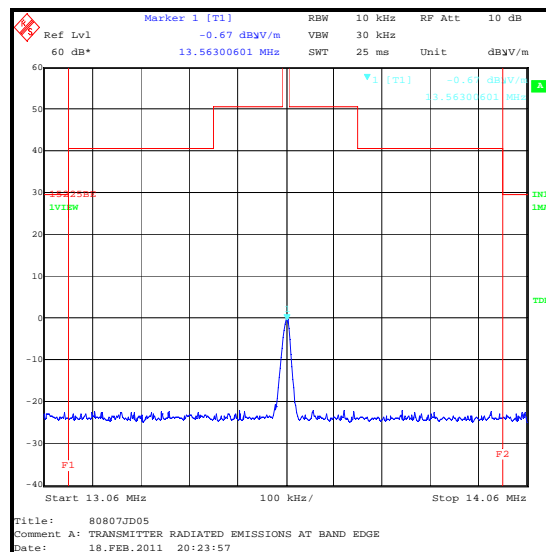

**5.2.4. Transmitter Radiated Spurious Emissions****Test Summary:**

<b>Test Engineer:</b>	Ian Watch & Nick Steele	<b>Test Date:</b>	18 February 2011 & 25 February 2011
<b>Test Sample IMEI:</b>	355098040018090		

<b>FCC Part:</b>	15.225(d) & 15.209(a)
<b>Test Method Used:</b>	As detailed in ANSI C63.10 Sections 6.3, 6.4 and 6.5 referencing ANSI C63.4
<b>Frequency Range:</b>	9 kHz to 1000 MHz

**Environmental Conditions:**

<b>Temperature (°C):</b>	22 to 23
<b>Relative Humidity (%):</b>	23 to 25

**Results: Quasi Peak**




Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
40.679	Vertical	24.8	40.0	15.2	Complied
67.796	Vertical	27.2	40.0	12.8	Complied
107.609	Horizontal	26.7	43.5	16.8	Complied
138.067	Vertical	24.6	43.5	18.9	Complied
447.478	Vertical	34.3	46.0	11.7	Complied
732.208	Vertical	35.5	54.0	18.5	Complied

**Note(s):**

- Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).
- A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required. A distance extrapolation factor of 40 dB was used.
- Final measurement values include corrections for antenna factor and cable losses.
- The emission shown at approximately 13.56 MHz is the fundamental.
- All emissions on the 9 kHz to 150 kHz plot were investigated and found to be radiating from the test site turntable.
- All other emissions shown on the pre-scan plots were investigated and found to be >20 dB below the applicable limit or below the measurement system noise floor.
- Measurements in the range 30 MHz to 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.



**Transmitter Radiated Spurious Emissions (continued)**

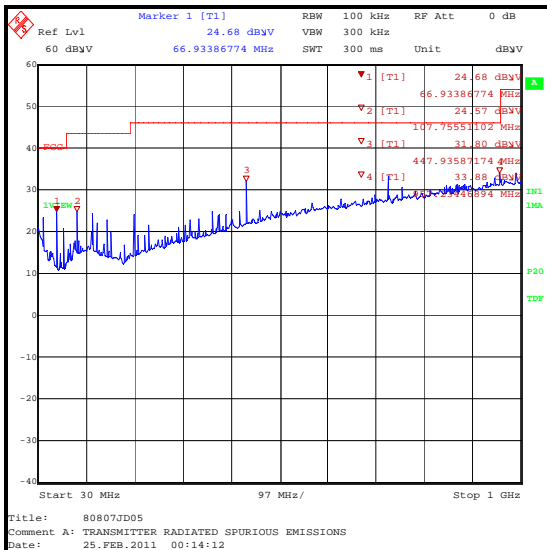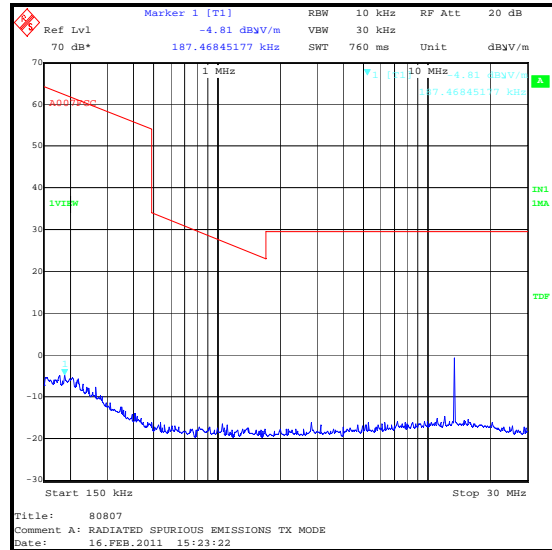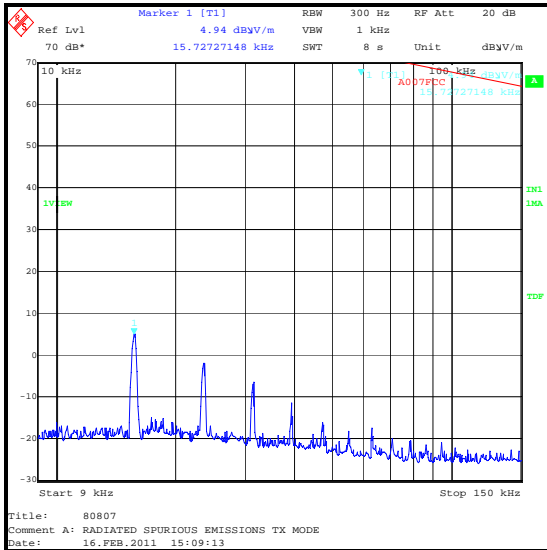

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

**5.2.5. Transmitter Band Edge Radiated Emissions**

**Test Summary:**

<b>Test Engineer:</b>	Ian Watch	<b>Test Date:</b>	18 February 2011
<b>Test Sample IMEI:</b>	355098040018090		

<b>FCC Part:</b>	15.225(c)(d) & 15.209(a)
<b>Test Method Used:</b>	As detailed in ANSI C63.10 Section 6.9.2

**Environmental Conditions:**

<b>Temperature (°C):</b>	22
<b>Relative Humidity (%):</b>	23

**Results: Quasi Peak Lower Band Edge**


Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result
13.11	-23.9	29.5	53.4	Complied

**Results: Quasi Peak Upper Band Edge**

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result
14.01	-24.1	29.5	53.6	Complied

**Note(s):**

1. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required. A distance extrapolation factor of 40 dB was used.

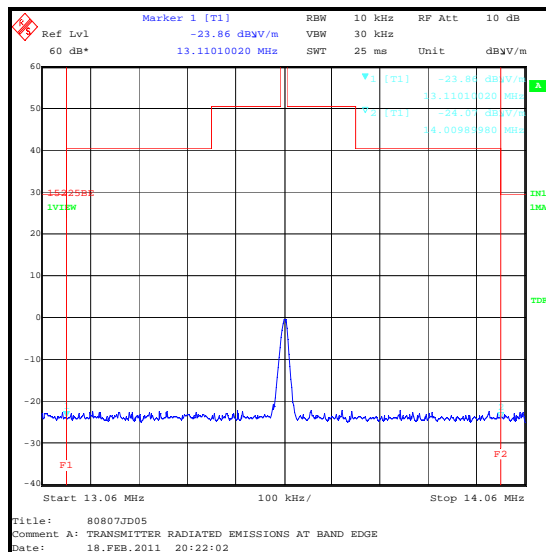

**5.2.6. Transmitter 20 dB Bandwidth**

**Test Summary:**

<b>Test Engineer:</b>	Ian Watch	<b>Test Date:</b>	18 February 2011
<b>Test Sample IMEI:</b>	355098040018090		


<b>FCC Part:</b>	2.1049
<b>Test Method Used:</b>	As detailed in ANSI C63.10 Section 6.9.1

**Environmental Conditions:**

<b>Temperature (°C):</b>	22
<b>Relative Humidity (%):</b>	28

**Results:**

<b>20 dB Bandwidth (kHz)</b>
36.473

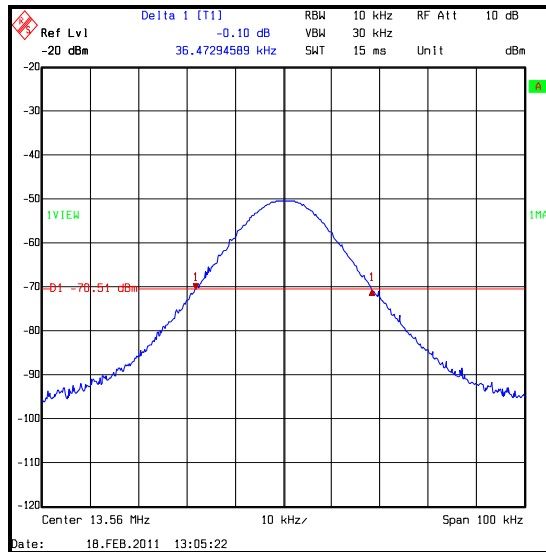

**5.2.7. Transmitter Frequency Stability (Temperature & Voltage Variation)****Test Summary:**

<b>Test Engineer:</b>	Ian Watch	<b>Test Date:</b>	18 February 2011
<b>Test Sample IMEI:</b>	355098040018090		

<b>FCC Part:</b>	15.225(e)
<b>Test Method Used:</b>	As detailed in ANSI C63.10 Section 6.8.1 and 6.8.2

**Environmental Conditions:**

<b>Temperature (°C):</b>	20
<b>Relative Humidity (%):</b>	30

**Results: Maximum frequency error of the EUT with variations in ambient temperature**

Temperature (°C)	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
-20	13.560044 MHz	13.560042 MHz	13.560036 MHz	13.560029 MHz
20	13.559995 MHz	13.560000 MHz	13.560000 MHz	13.559997 MHz
50	13.559905 MHz	13.559900 MHz	13.559890 MHz	13.559884 MHz

Frequency with Worst Case Deviation (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
13.559884	116	0.00086	0.01	0.0091	Complied

**Results: Maximum frequency error of the EUT with variations in nominal operating voltage at an ambient temperature of 20°C**

Supply Voltage (V)	Nominal Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
3.4	13.56	13.559996	4	0.00003	0.01	0.00997	Complied
3.7	13.56	13.559995	5	0.00004	0.01	0.00996	Complied
4.2	13.56	13.559996	4	0.00003	0.01	0.00997	Complied

## **6. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

<b>Measurement Type</b>	<b>Range</b>	<b>Confidence Level (%)</b>	<b>Calculated Uncertainty</b>
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
20 dB Bandwidth	13 MHz to 14 MHz	95%	±0.92 ppm
Frequency Stability	13 MHz to 14 MHz	95%	±0.92 ppm
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	±3.53 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±2.94 dB
Transmitter Fundamental Field Strength	13 MHz to 14 MHz	95%	±3.53 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval Months
A007	Antenna	Rohde & Schwarz	HFH2-Z2	880 458/020	29 Mar 2011	12
A1069	LISN	Rohde & Schwarz	ESH3-Z5	837469/012	13 Apr 2011	12
A1830	Pulse Limiter	Rhode & Schwarz	ESH3-Z2	100668	01 Mar 2011	12
A288	Antenna	Chase	CBL6111A	1589	05 Sep 2011	12
E013	Environmental Chamber	Sanyo	ATMOS chamber	None	Calibrated before use	-
K0001	5m Semi-Anechoic Chamber	Rainford EMC	N/A	N/A	25 Apr 2011	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	05 Sep 2011	12
M1068	Thermometer	Iso-Tech	RS55	93102884	10 Nov 2011	12
M1124	Test Receiver	Rohde & Schwarz	ESI26	100046K	22 Apr 2011	12
M1242	Spectrum Analyser	Rohde & Schwarz.	FSEM30	845986/022	06 Dec 2011	12
M1263	Test Receiver	Rohde & Schwarz	ESIB7	100265	28 Jun 2011	12
M1269	Multimeter	Fluke	179	90250210	15 Jul 2011	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	04 Feb 2012	12
S0537	Power Supply	TTI	EL302D	249928	Calibrated before use	-

**NB** In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.