

## TEST REPORT FROM RFI GLOBAL SERVICES LTD



Test of: NTT docomo EB-4055

FCC ID: UCE111050A

To: FCC Part 22: 2011 Subpart H

**Test Report Serial No.:**  
RFI-RPT-RP87983JD08A V3.0

**Version 3.0 Supersedes All Previous Versions**

<b>This Test Report Is Issued Under The Authority Of John Newell, Group Quality Manager:</b>		
<b>Checked By:</b>	Steven White	
<b>Signature:</b>		
<b>Date of Issue:</b>	28 June 2012	

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, selecting text and graphics, adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

**RFI Global Services Ltd**

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG  
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001  
Email: [info@rfi-global.com](mailto:info@rfi-global.com) Website: [www.rfi-global.com](http://www.rfi-global.com)

Registered in England and Wales. Company number: 2117901

This page has been left intentionally blank.

**Table of Contents**

<b>1. Customer Information .....</b>	<b>4</b>
<b>2. Summary of Testing .....</b>	<b>5</b>
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
<b>3. Equipment Under Test (EUT) .....</b>	<b>6</b>
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	7
3.5. Support Equipment	8
<b>4. Operation and Monitoring of the EUT during Testing .....</b>	<b>9</b>
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
<b>5. Measurements, Examinations and Derived Results .....</b>	<b>10</b>
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions	11
5.2.2. Receiver/Idle Mode Radiated Spurious Emissions	14
5.2.3. Transmitter Effective Radiated Power (ERP)	18
5.2.4. Transmitter Frequency Stability (Temperature Variation)	20
5.2.5. Transmitter Frequency Stability (Voltage Variation)	21
5.2.6. Transmitter Occupied Bandwidth	22
5.2.7. Transmitter Out of Band Radiated Emissions	32
5.2.8. Transmitter Radiated Emissions at Band Edges	36
<b>6. Measurement Uncertainty .....</b>	<b>46</b>
<b>Appendix 1. Test Equipment Used .....</b>	<b>47</b>

**1. Customer Information**










<b>Company Name:</b>	Panasonic Mobile Communications Development of Europe Ltd.
<b>Address:</b>	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom

## **2. Summary of Testing**

### **2.1. General Information**

<b>Specification Reference:</b>	47CFR22
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 22 Subpart H (Public Mobile Services)
<b>Specification Reference:</b>	47CFR15.107 and 47CFR15.109
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 15 Subpart B (Unintentional Radiators) - Sections 15.107 and 15.109
<b>Site Registration:</b>	209735
<b>Location of Testing:</b>	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
<b>Test Dates:</b>	30 May 2012 to 18 June 2012

### **2.2. Summary of Test Results**

<b>FCC Reference (47CFR)</b>	<b>Measurement</b>	<b>Result</b>
Part 15.107(a)	Receiver/Idle Mode AC Conducted Spurious Emissions	
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
Part 22.913(a)	Transmitter Effective Radiated Power (ERP)	
Part 2.1055/22.355	Transmitter Frequency Stability (Temperature and Voltage Variation)	
Part 2.1049	Transmitter Occupied Bandwidth	
Part 2.1053/22.917	Transmitter Out of Band Radiated Emissions	
Part 2.1053/22.917	Transmitter Band Edge Radiated Emissions	
<b>Key to Results</b>  = Complied  = Did not comply		

### **2.3. Methods and Procedures**

<b>Reference:</b>	ANSI/TIA-603-C-2004
<b>Title:</b>	Land Mobile Communications Equipment, Measurements and performance Standards
<b>Reference:</b>	ANSI C63.4 (2009)
<b>Title:</b>	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
<b>Reference:</b>	ANSI C63.10 (2009)
<b>Title:</b>	American National Standard for Testing Unlicensed Wireless Devices

### **2.4. Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	NTT docomo
<b>Model Name or Number:</b>	EB-4055
<b>IMEI:</b>	359952040036328 ( <i>Radiated sample</i> )
<b>Hardware Version Number:</b>	Rev C
<b>Software Version Number:</b>	ACPU: arrietty-ics-09-0417 CCPU: R1B_0_EC12_02_D00
<b>FCC ID:</b>	UCE111050A

<b>Brand Name:</b>	NTT docomo
<b>Model Name or Number:</b>	EB-4055
<b>IMEI:</b>	359952040036344 ( <i>Conducted RF port sample</i> )
<b>Hardware Version Number:</b>	Rev C
<b>Software Version Number:</b>	ACPU: arrietty-ics-09-0417 CCPU: R1B_0_EC12_02_D00
<b>FCC ID:</b>	UCE111050A

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	AC Charger
<b>Model Name or Number:</b>	Type P01

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	USB Data cable
<b>Model Name or Number:</b>	Type 01

<b>Brand Name:</b>	Panasonic
<b>Description:</b>	Personal Hands-Free
<b>Model Name or Number:</b>	Panasonic Part # L0ZZ00000036

<b>Brand Name:</b>	Not stated
<b>Description:</b>	Cradle
<b>Model Name or Number:</b>	P50

### **3.2. Description of EUT**

The equipment under test was a signal mode UMTS Tablet Device with WLAN and *Bluetooth*.

### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

### **3.4. Additional Information Related to Testing**

Technology Tested:	UMTS850		
Type of Radio Device:	Transceiver		
Mode:	HSDPA / HSUPA		
Modulation Type:	QPSK / 8PSK		
Channel Spacing:	5 MHz		
Power Supply Requirement(s):	Nominal	3.7 V	
	Minimum	3.5 V	
	Maximum	4.2 V	
Maximum Output Power (ERP):	RMC (12.2 kbps)	21.2 dBm	
	HSDPA Sub-Test 4	21.9 dBm	
	HSUPA Sub-Test 1	21.9 dBm	
Transmit Frequency Range:	824 to 849 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	4132	826.4
	Middle	4183	836.6
	Top	4233	846.6
Receive Frequency Range:	869 to 894 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	4357	871.4
	Middle	4407	881.6
	Top	4458	891.6

**3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

<b>Brand Name:</b>	Panasonic
<b>Description:</b>	Laptop PC
<b>Model Name or Number:</b>	Tough book

<b>Brand Name:</b>	Generic
<b>Description:</b>	Micro SD Memory Card
<b>Model Name or Number:</b>	Not stated



## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.
- Constantly transmitting at full power on bottom, middle and top channels as required.
- Occupied bandwidth, ERP and band edge tests were performed with the EUT in RMC (12.2 kbps), HSDPA (Sub-tests 1 to 4) or HSUPA (Sub-tests 1 to 5) modes.
- Transmitter radiated spurious emissions were checked in all modes during pre-scans. RMC (12.2 kbps) was found to be the worst case and all final measurements were performed with the EUT in this mode.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- Connected to a Rohde & Schwarz CMU 200 Universal Radio Communications Tester, operating in UMTS Band V mode.
- The conducted sample with IMEI 359952040036344 was used for frequency stability. This unit had a built in dummy battery.
- The radiated sample with IMEI 359952040036328 was used for all other measurements.
- Idle mode and transmit mode radiated spurious emissions tests were performed with the AC charger and Personal Hands-Free connected to the EUT.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

## 5.2. Test Results

### 5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions

#### Test Summary:

Test Engineer:	Mark Percival	Test Date:	18 June 2012
Test Sample IMEI:	359952040036328		

FCC Part:	15.107
Test Method Used:	As detailed in ANSI C63.10 section 6.2 referencing ANSI C63.4

#### Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	38

#### Results: Live / Quasi Peak

Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
2.881	Live	41.8	56.0	14.2	Complied
3.471	Live	43.8	56.0	12.2	Complied
4.285	Live	45.2	56.0	10.8	Complied
4.857	Live	47.4	56.0	8.6	Complied
5.338	Live	43.7	60.0	16.3	Complied
5.644	Live	48.8	60.0	11.2	Complied
6.175	Live	44.0	60.0	16.0	Complied
6.288	Live	45.1	60.0	14.9	Complied
6.540	Live	44.4	60.0	15.6	Complied

#### Results: Live / Average



Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.442	Live	34.5	47.0	12.5	Complied
0.969	Live	31.4	46.0	14.6	Complied
1.054	Live	33.0	46.0	13.0	Complied
2.872	Live	32.2	46.0	13.8	Complied
3.484	Live	35.3	46.0	10.7	Complied
4.177	Live	37.0	46.0	9.0	Complied
4.933	Live	39.1	46.0	6.9	Complied
5.698	Live	38.9	50.0	11.1	Complied
6.423	Live	34.5	50.0	15.5	Complied
15.931	Live	33.3	50.0	16.7	Complied

**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)****Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.442	Neutral	47.0	57.0	10.0	Complied
1.135	Neutral	43.6	56.0	12.4	Complied
3.412	Neutral	42.4	56.0	13.6	Complied
4.344	Neutral	42.9	56.0	13.1	Complied
4.830	Neutral	43.9	56.0	12.1	Complied
5.622	Neutral	44.2	60.0	15.8	Complied
6.391	Neutral	41.6	60.0	18.4	Complied
7.044	Neutral	41.9	60.0	18.1	Complied
7.116	Neutral	42.5	60.0	17.5	Complied
7.809	Neutral	44.3	60.0	15.7	Complied

**Results: Neutral / Average**

Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.352	Neutral	42.0	48.9	6.9	Complied
0.438	Neutral	43.7	47.1	3.4	Complied
0.523	Neutral	41.9	46.0	4.1	Complied
0.609	Neutral	36.0	46.0	10.0	Complied
0.964	Neutral	38.3	46.0	7.7	Complied
1.050	Neutral	40.3	46.0	5.7	Complied
1.135	Neutral	38.6	46.0	7.4	Complied
3.471	Neutral	36.8	46.0	9.2	Complied
4.159	Neutral	37.8	46.0	8.2	Complied
4.920	Neutral	38.6	46.0	7.4	Complied

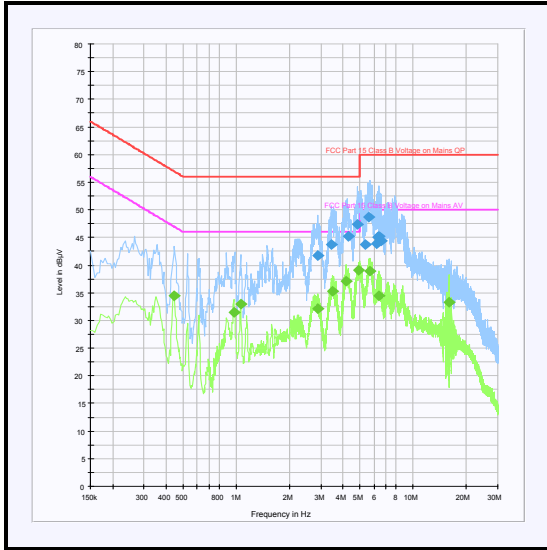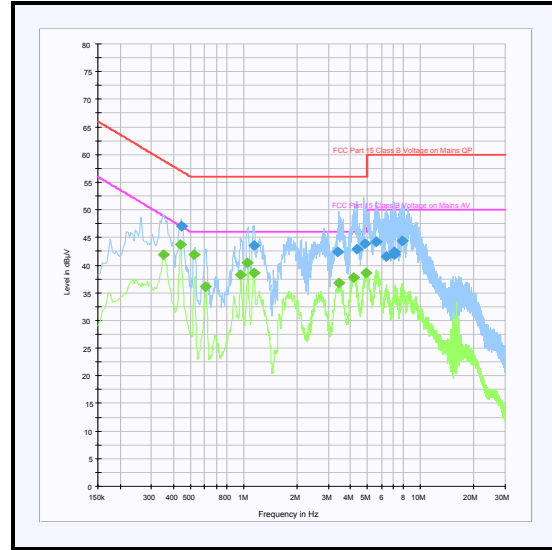**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)****Live****Neutral**

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**5.2.2. Receiver/Idle Mode Radiated Spurious Emissions****Test Summary:**

Test Engineer:	Nick Steele	Test Date:	01 June 2012
Test Sample IMEI:	359952040036328		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8
Frequency Range:	30 MHz to 1000 MHz

**Environmental Conditions:**


Temperature (°C):	27
Relative Humidity (%):	39

**Results: Quasi Peak**

Frequency (MHz)	Antenna Polarity	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result
30.770	Vertical	13.0	40.0	27.0	Complied
334.079	Horizontal	18.9	46.0	27.1	Complied
458.796	Vertical	32.3	46.0	13.7	Complied
501.023	Vertical	31.8	46.0	14.2	Complied
701.349	Vertical	36.0	46.0	10.0	Complied
950.176	Vertical	25.2	46.0	20.8	Complied

**Note(s):**

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

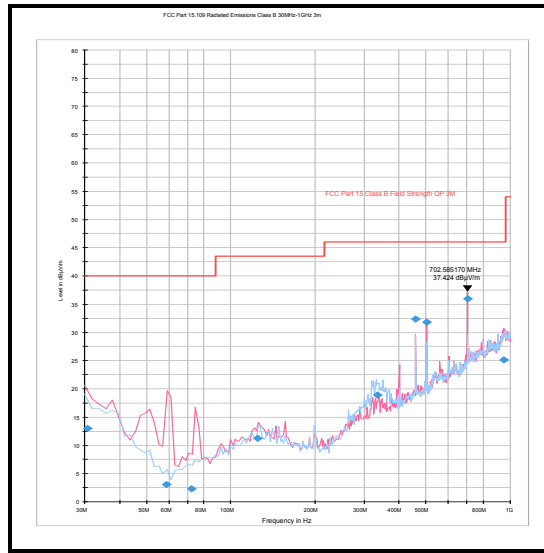**Receiver/Idle Mode Radiated Spurious Emissions (continued)**

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.*

**Receiver/Idle Mode Radiated Spurious Emissions (continued)****Test Summary:**

Test Engineer:	David Doyle	Test Date:	30 May 2012
Test Sample IMEI:	359952040036328		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8
Frequency Range:	1 GHz to 5 GHz

**Environmental Conditions:**

Temperature (°C):	24
Relative Humidity (%):	44



**Results:**

Frequency (MHz)	Antenna Polarity	Peak Level (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)	Result
3675.351	Vertical	45.8	54.0	8.2	Complied

**Note(s):**

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.
3. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

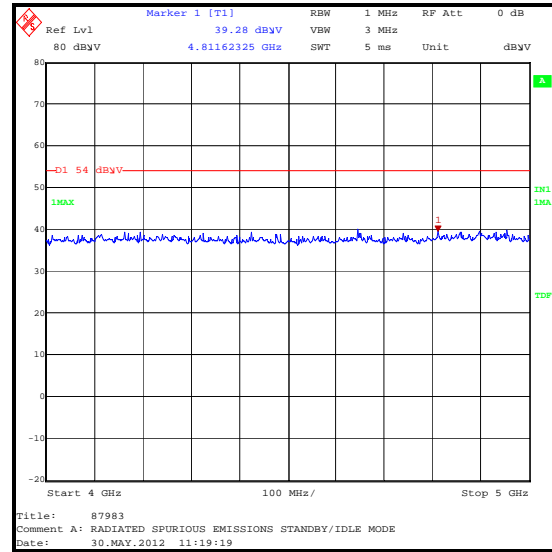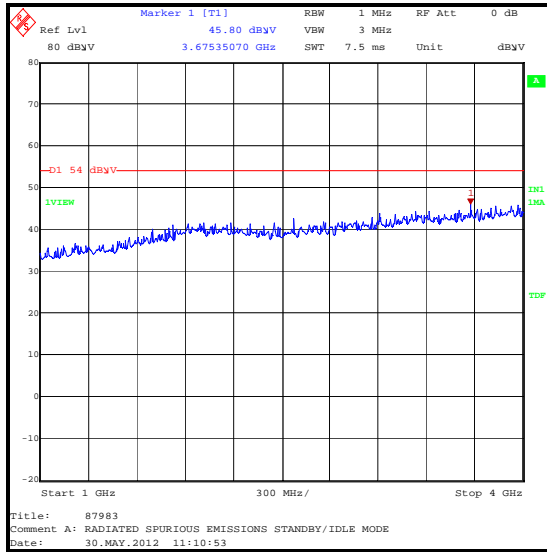

**Receiver/Idle Mode Radiated Spurious Emissions (continued)**

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**5.2.3. Transmitter Effective Radiated Power (ERP)****Test Summary:**

Test Engineer:	David Doyle	Test Date:	11 June 2012
Test Sample IMEI:	359952040036328		

FCC Part:	22.913(a)
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.17.2

**Environmental Conditions:**

Temperature (°C):	23
Relative Humidity (%):	45

**Results: Peak ERP**

Modes		HSDPA				RMC			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	19.6	19.7	20.7	20.3	19.8	38.5	17.8	Complied
	4183	21.3	21.2	21.8	21.9	21.2	38.5	16.6	Complied
	4233	21.0	21.7	21.4	21.9	20.8	38.5	16.6	Complied
$\beta_c$		2	12	15	15				
$\beta_d$		15	15	8	4				
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8				

**Results: RMS ERP**

Modes		HSDPA				RMC			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	16.6	17.3	16.5	17.6	17.0	38.5	20.9	Complied
	4183	18.0	18.1	17.9	17.7	18.1	38.5	20.4	Complied
	4233	18.3	17.8	18.7	17.7	18.2	38.5	19.8	Complied
$\beta_c$		2	12	15	15				
$\beta_d$		15	15	8	4				
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8				

**Transmitter Effective Radiated Power (ERP) (Continued)****Results: Peak ERP**

Modes		HSUPA							
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	20.6	20.4	20.6	18.7	20.8	38.5	17.7	Complied
	4183	21.6	21.5	21.5	20.0	21.6	38.5	16.9	Complied
	4233	21.9	21.6	21.8	19.9	21.8	38.5	16.6	Complied
$\beta_c$		11	6	15	2	15			
$\beta_d$		15	15	9	15	15			
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8	8			

**Results: RMS ERP**

Modes		HSUPA							
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	16.9	17.4	16.2	15.3	16.6	38.5	21.1	Complied
	4183	18.2	18.3	17.2	16.1	17.7	38.5	20.2	Complied
	4233	17.9	18.4	17.3	16.5	17.8	38.5	20.1	Complied
$\beta_c$		11	6	15	2	15			
$\beta_d$		15	15	9	15	15			
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8	8			

**Note(s):**

1. All modes were compared on each channel and the highest power recorded was subtracted from the limit to show the margin.

**5.2.4. Transmitter Frequency Stability (Temperature Variation)****Test Summary:**

<b>Test Engineer:</b>	Mark Percival	<b>Test Date:</b>	06 May 2012
<b>Test Sample IMEI:</b>	359952040036344		

<b>FCC Part:</b>	2.1055 & 22.355
<b>Test Method Used:</b>	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

**Environmental Conditions:**

<b>Ambient Temperature (°C):</b>	24
<b>Ambient Relative Humidity (%):</b>	45

**Results: Middle Channel (836.6 MHz)**

Temperature (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	836.599990	10	0.0120	2.5	2.4900	Complied
-20	836.600011	11	0.0131	2.5	2.4869	Complied
-10	836.599989	11	0.0131	2.5	2.4869	Complied
0	836.599987	13	0.0155	2.5	2.4845	Complied
10	836.599988	12	0.0143	2.5	2.4857	Complied
20	836.599989	11	0.0131	2.5	2.4869	Complied
30	836.600015	15	0.0179	2.5	2.4800	Complied
40	836.599990	10	0.0120	2.5	2.4900	Complied
50	836.600011	11	0.0131	2.5	2.4869	Complied

**Note(s):**

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using the UMTS Band V modulation test on a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was placed in a temperature chamber and connected by suitable RF cables to the CMU 200 outside the chamber. A bidirectional communications link was established on the centre channel between the EUT and the CMU 200. The frequency meter value was recorded.
3. Temperature was monitored throughout the test with a calibrated digital thermometer.

**5.2.5. Transmitter Frequency Stability (Voltage Variation)****Test Summary:**

<b>Test Engineer:</b>	Mark Percival	<b>Test Date:</b>	06 May 2012
<b>Test Sample IMEI:</b>	359952040036344		

<b>FCC Part:</b>	2.1055 & 22.355
<b>Test Method Used:</b>	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

**Environmental Conditions:**

<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	45

**Results: Middle Channel (836.6 MHz)**

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
3.5	836.599989	11	0.0131	2.5	2.4869	Complied
4.2	836.599985	15	0.0179	2.5	2.4800	Complied

**Note(s):**

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using the UMTS Band V modulation test on a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMU 200. A bidirectional communications link was established on the centre channel between the EUT and the CMU 200. The frequency meter value was recorded.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

**5.2.6. Transmitter Occupied Bandwidth****Test Summary:**

Test Engineer:	David Doyle	Test Date:	11 June 2012
Test Sample IMEI:	359952040036328		


FCC Part:	2.1049
Test Method Used:	The 99% occupied bandwidth was measured using the Occupied Bandwidth function of a spectrum analyser

**Environmental Conditions:**

Temperature (°C):	22
Relative Humidity (%):	47


**Results: RMC / 12.2 kbps**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

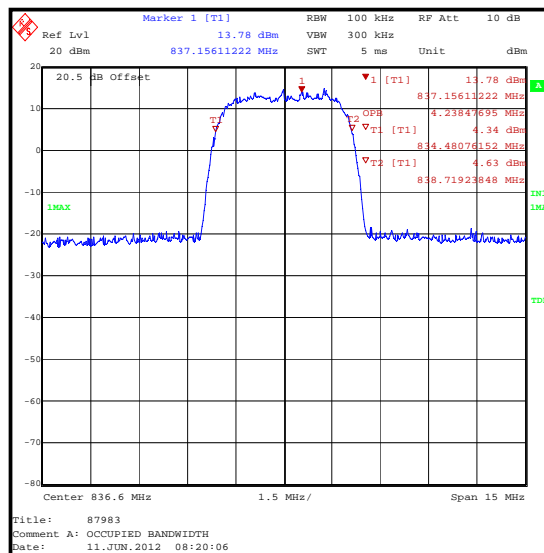


**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 1**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4208.417

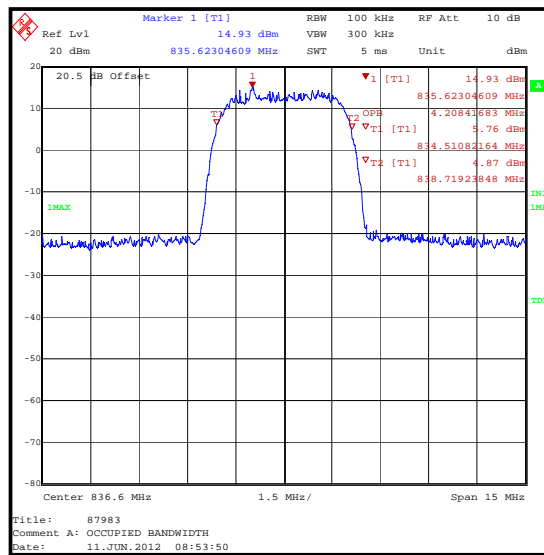

**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 2**


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

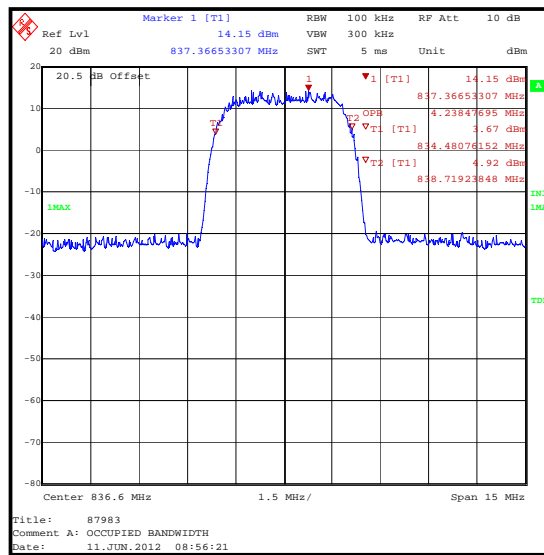




**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 3**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

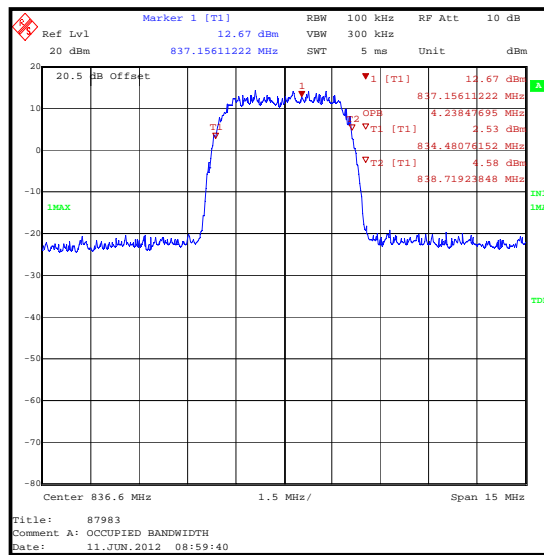


**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 4**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

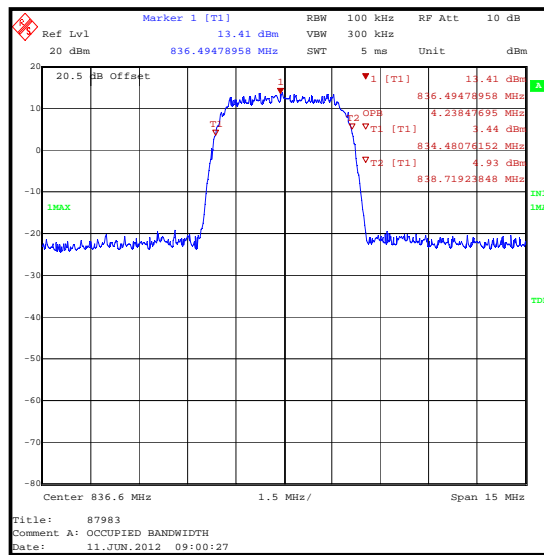


**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 1**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

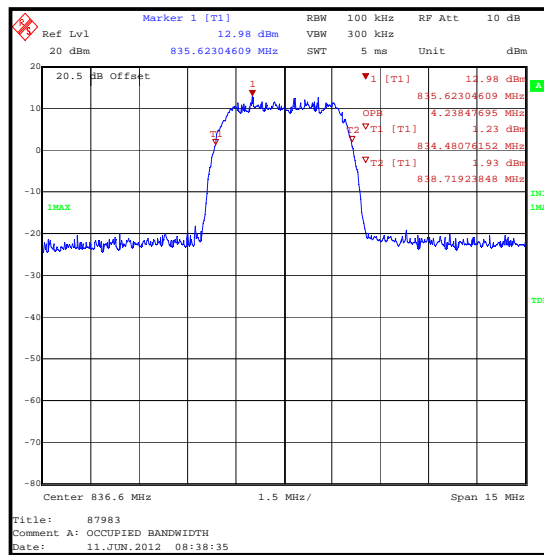

**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 2**


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

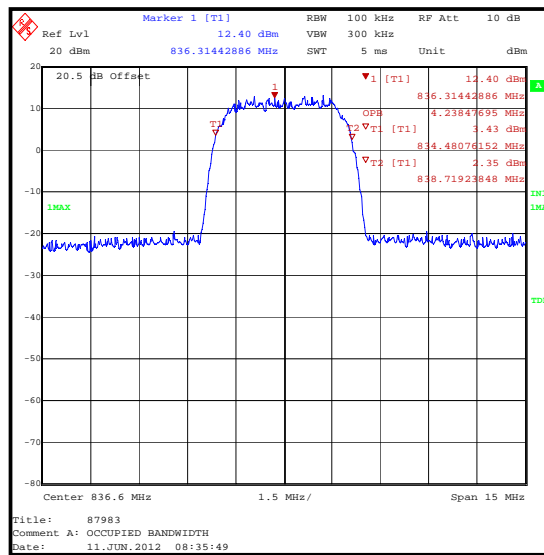

### **Transmitter Occupied Bandwidth (continued)**


### Results: HSUPA Sub-Test 3

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

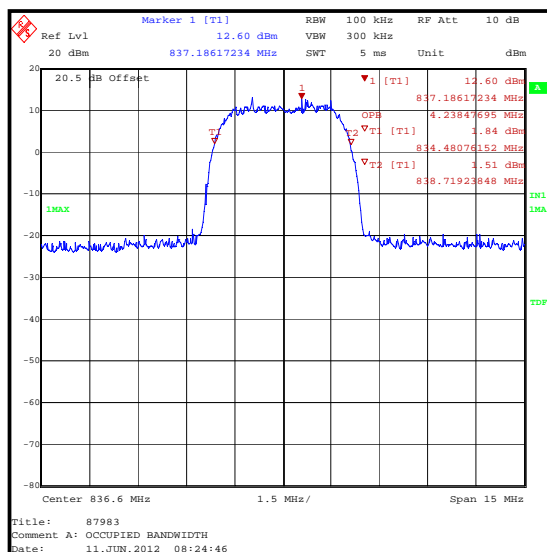


**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 4**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

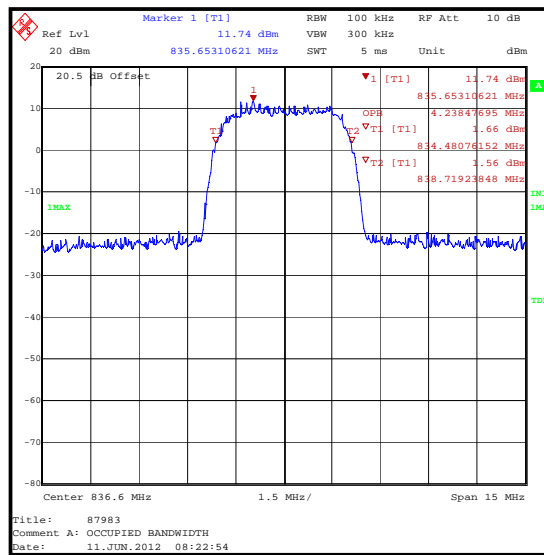

**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 5**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

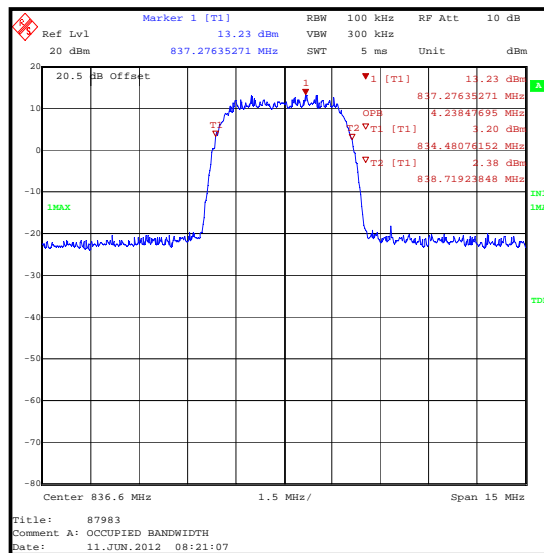**Note(s):**

- In lieu of the test method detailed in ANSI C63.4 Section 13.7, the 99% occupied bandwidth was measured using the Occupied Bandwidth function of the spectrum analyzer.

**5.2.7. Transmitter Out of Band Radiated Emissions****Test Summary:**

Test Engineers:	Nick Steele & David Doyle	Test Dates:	01 June 2012 & 06 June 2012
Test Sample IMEI:	359952040036328		

FCC Part:	2.1053 & 22.917
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Part 2.1053
Frequency Range:	30 MHz to 9 GHz
Configuration:	RMC / 12.2 kbps

**Environmental Conditions:**

Temperature (°C):	23 to 26
Relative Humidity (%):	39 to 49

**Results: RMC / 12.2 kbps - Bottom Channel**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
3783.567	-25.2	-13.0	12.2	Complied

**Results: RMC / 12.2 kbps - Middle Channel**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1348.697	-32.7	-13.0	19.7	Complied
3825.651	-24.8	-13.0	11.8	Complied





**Results: RMC / 12.2 kbps - Top Channel**



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1697.395	-30.7	-13.0	176.7	Complied



**Transmitter Out of Band Radiated Emissions (continued)****Note(s):**

1. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
2. The uplink and downlink traffic channels are shown on the 30 MHz to 1 GHz plot.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
4. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

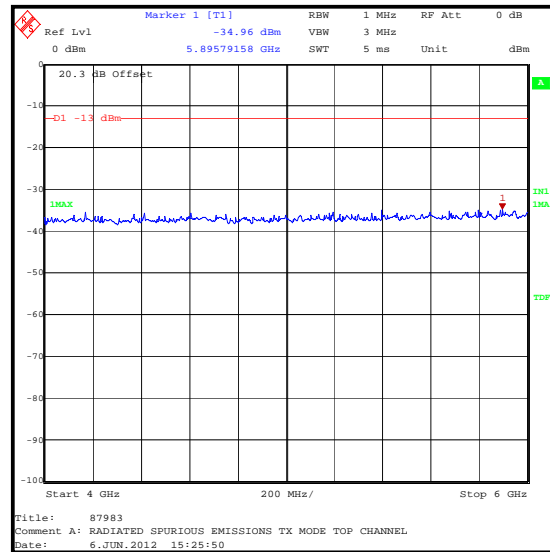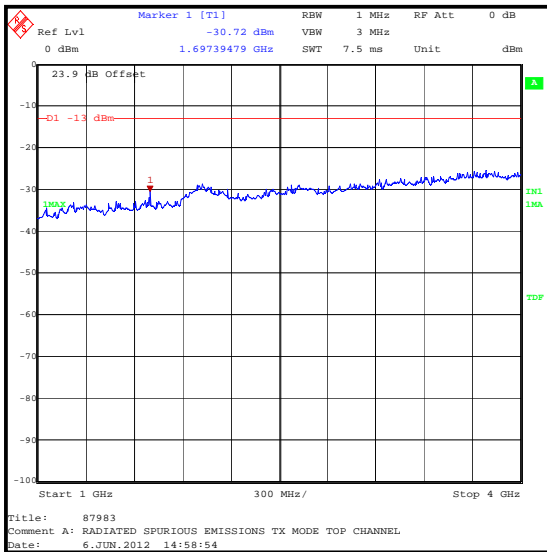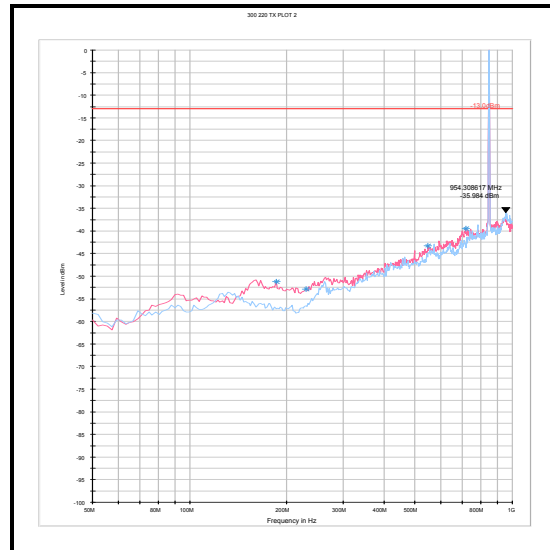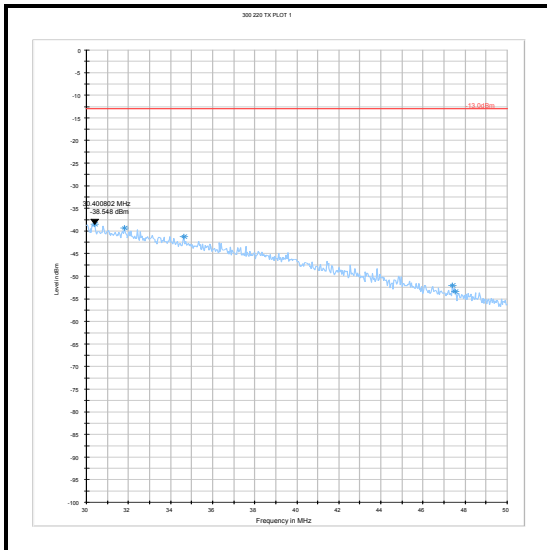**Transmitter Out of Band Radiated Emissions (continued)**

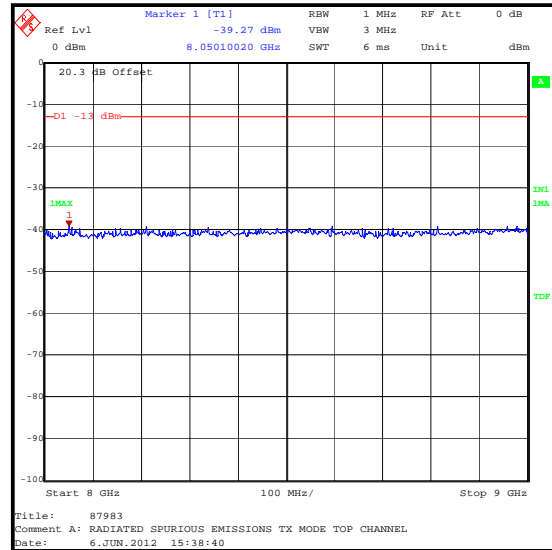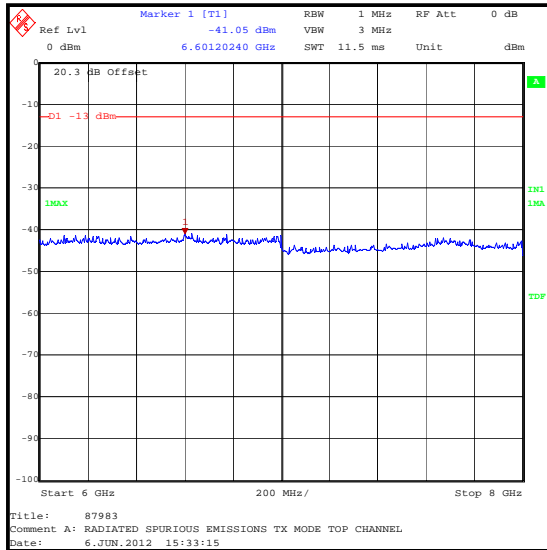**Transmitter Out of Band Radiated Emissions (continued)**

**5.2.8. Transmitter Radiated Emissions at Band Edges****Test Summary:**

Test Engineer:	David Doyle	Test Date:	01 June 2012
Test Sample IMEI:	359952040036328		



FCC Part:	2.1053 & 22.917
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Part 22.917

**Environmental Conditions:**

Temperature (°C):	24
Relative Humidity (%):	46



**Results: RMC / 12.2 kbps**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-23.3	-13.0	10.3	Complied
849	-26.0	-13.0	13.0	Complied

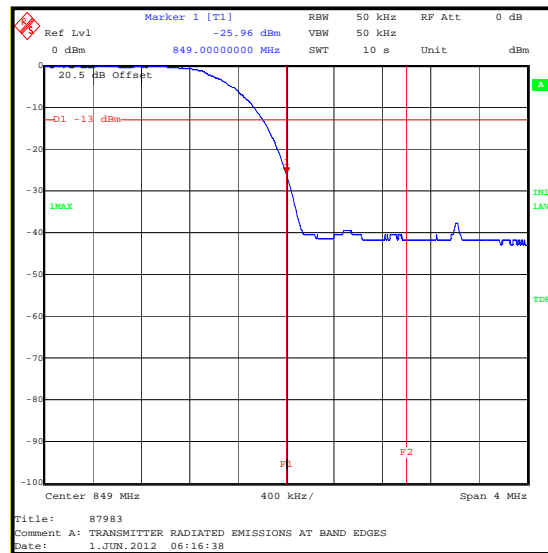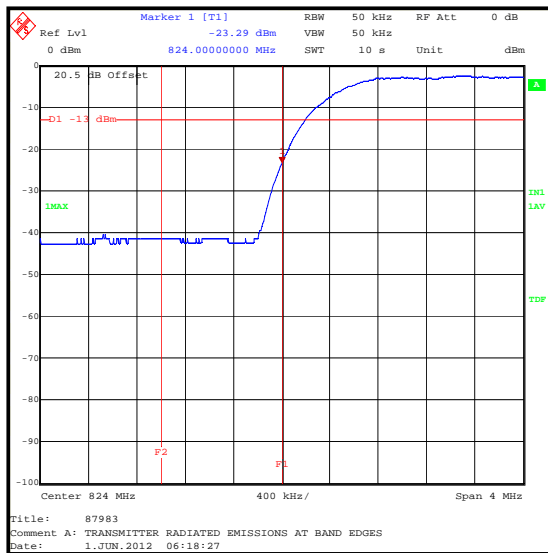



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 1****Results: RMC / 12.2 kbps**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-22.7	-13.0	9.7	Complied
849	-27.3	-13.0	14.3	Complied

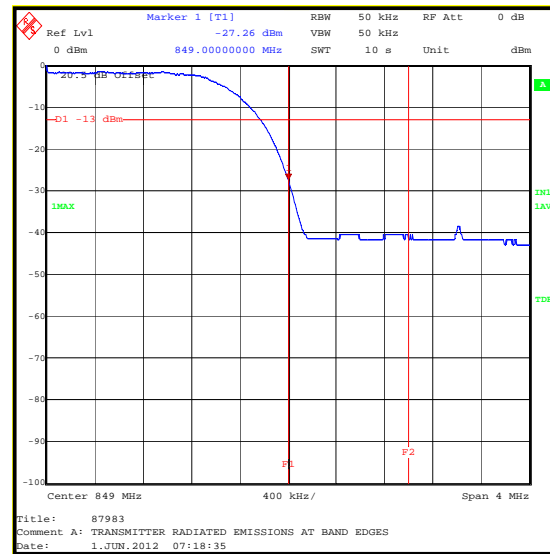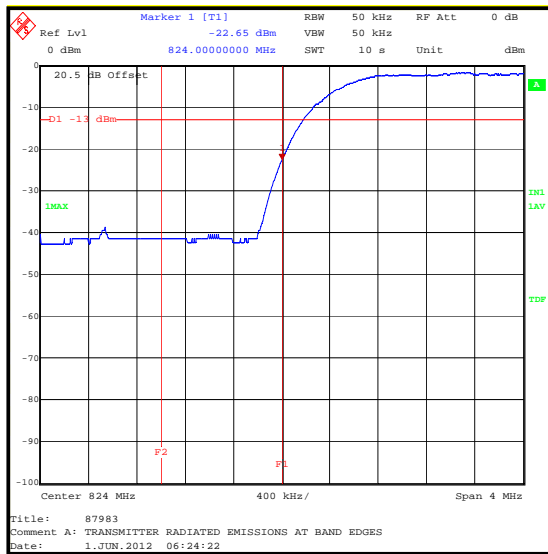



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 2**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-22.7	-13.0	9.7	Complied
849	-27.5	-13.0	14.5	Complied

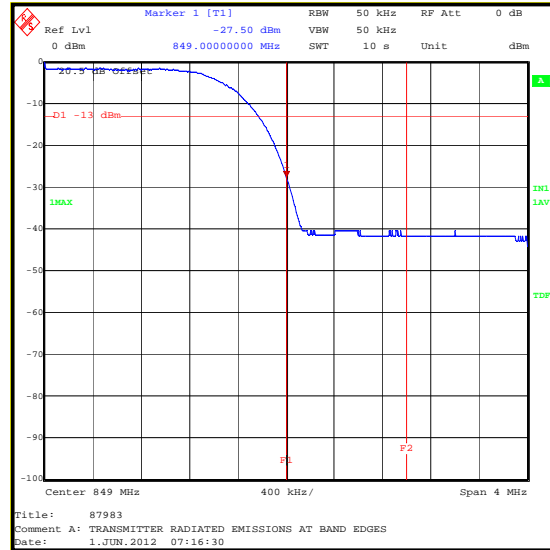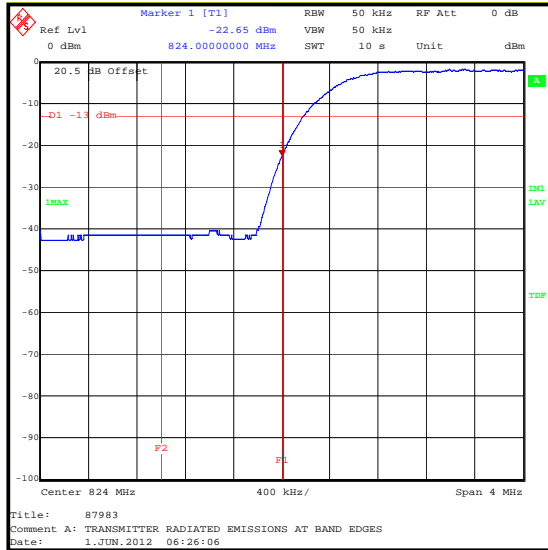



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-22.5	-13.0	9.5	Complied
849	-27.5	-13.0	14.5	Complied

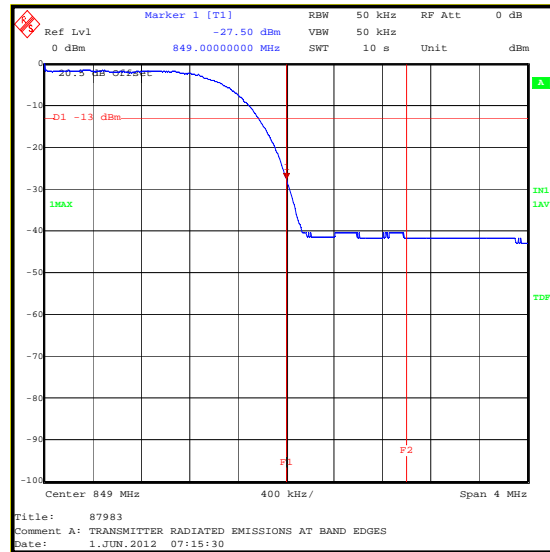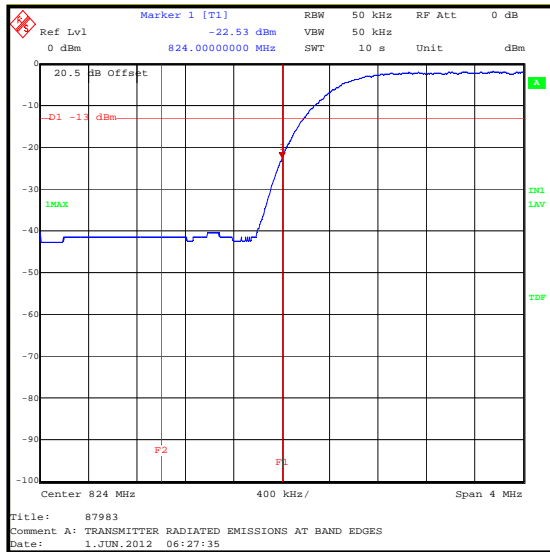

**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 4**



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-22.4	-13.0	9.4	Complied
849	-28.3	-13.0	15.3	Complied

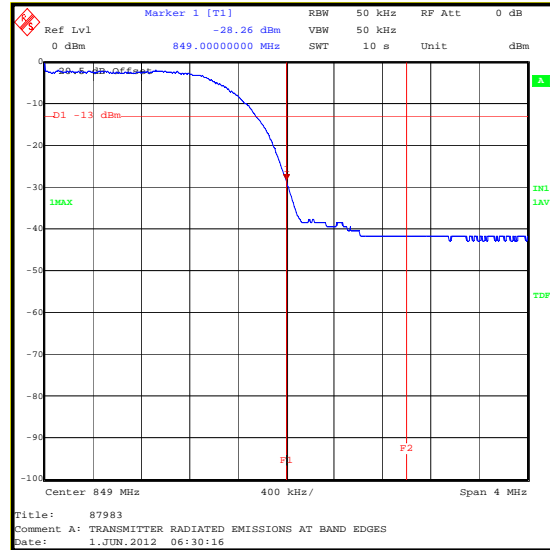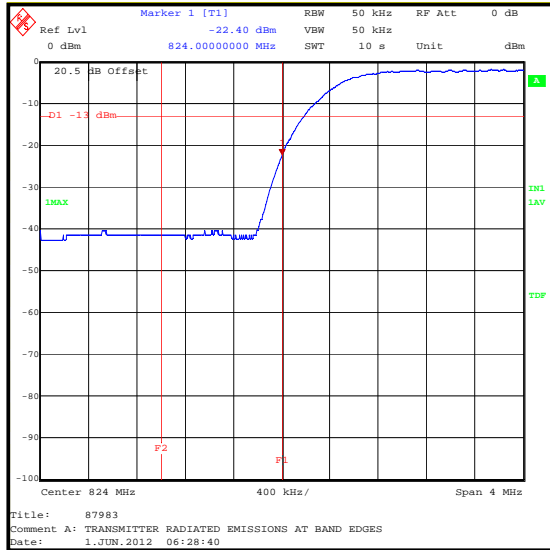





**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 1**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-24.0	-13.0	11.0	Complied
849	-26.8	-13.0	13.8	Complied

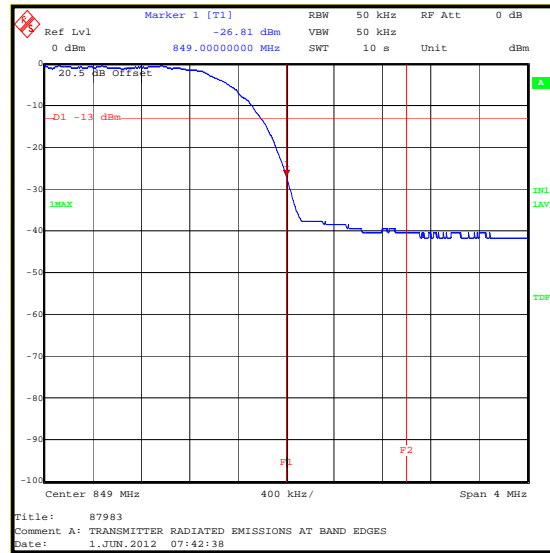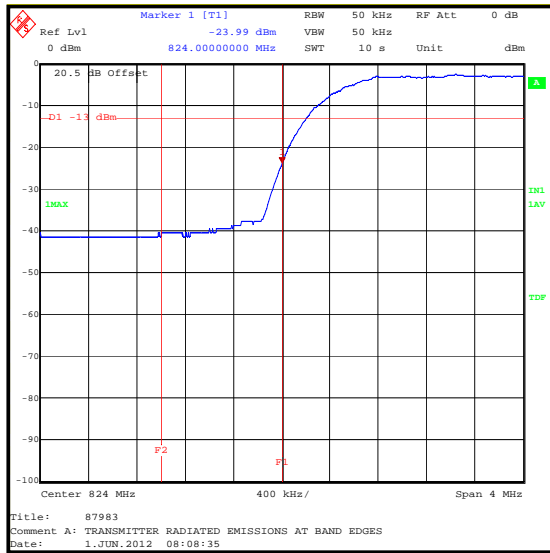



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 2**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-23.7	-13.0	10.7	Complied
849	-26.6	-13.0	16.6	Complied

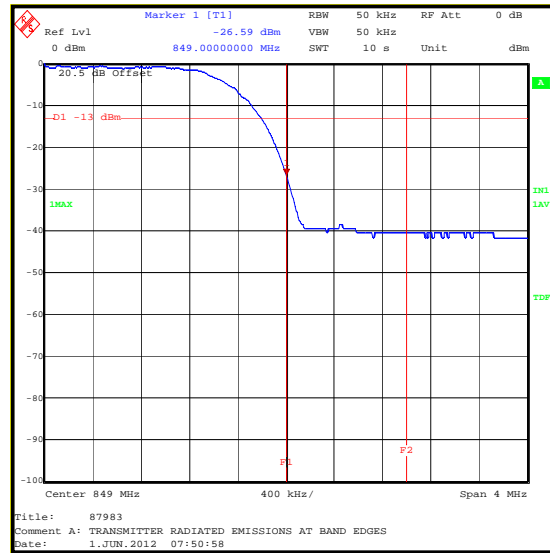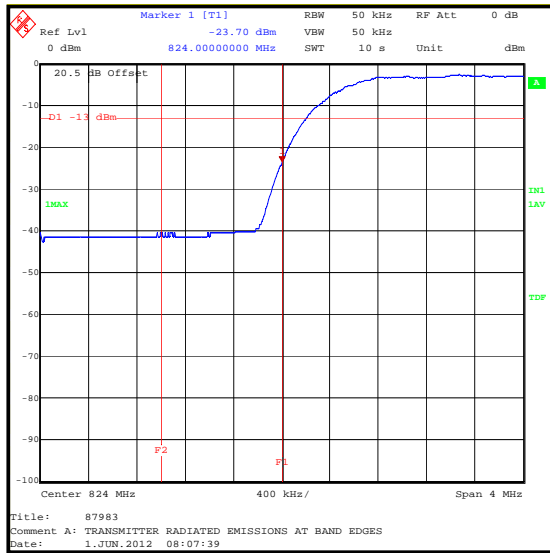



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-24.3	-13.0	11.3	Complied
849	-27.3	-13.0	14.3	Complied

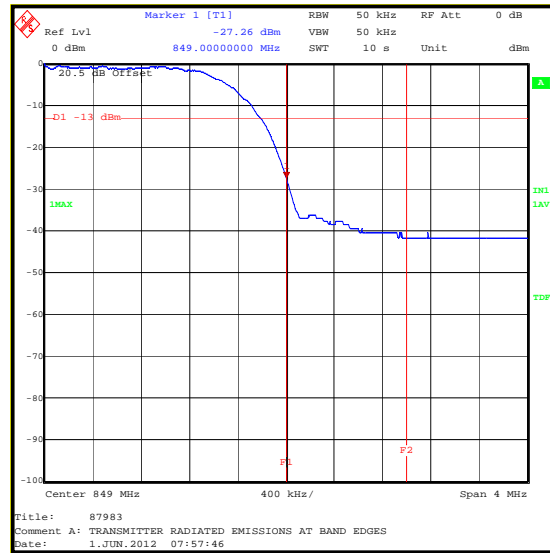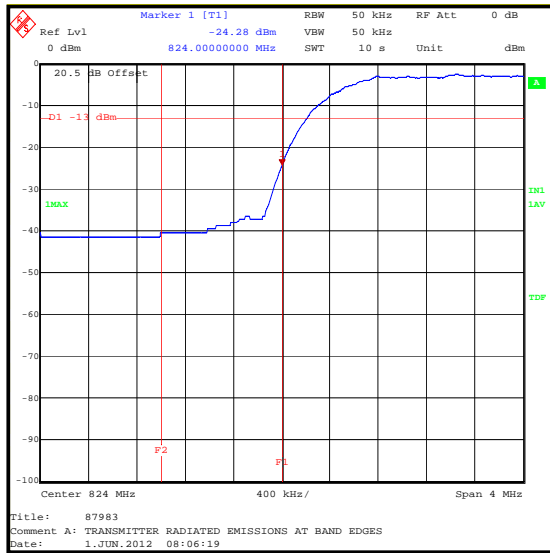



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-23.4	-13.0	10.4	Complied
849	-26.6	-13.0	13.6	Complied

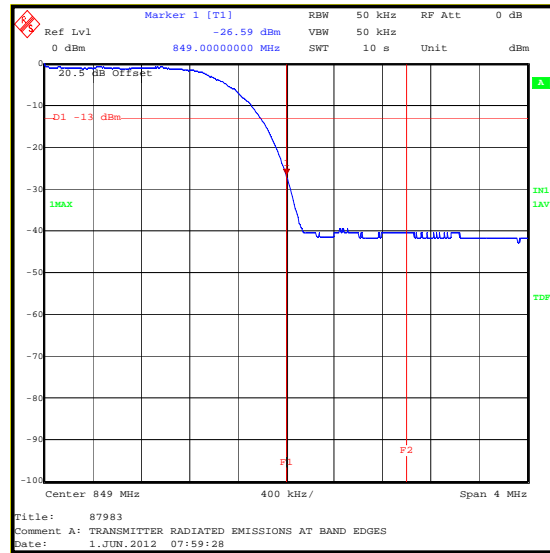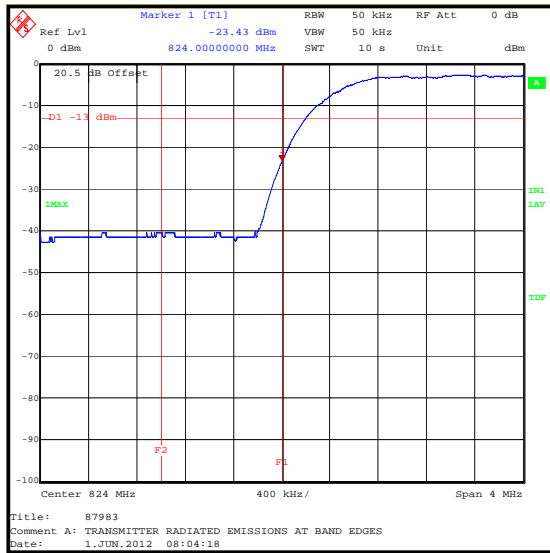

**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 5**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-24.0	-13.0	11.0	Complied
849	-27.3	-13.0	14.3	Complied

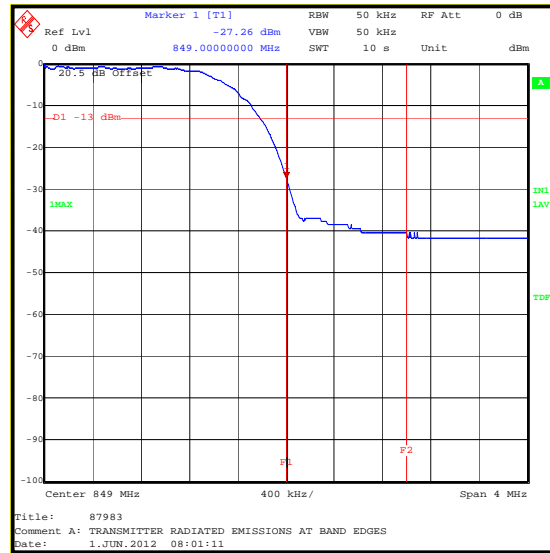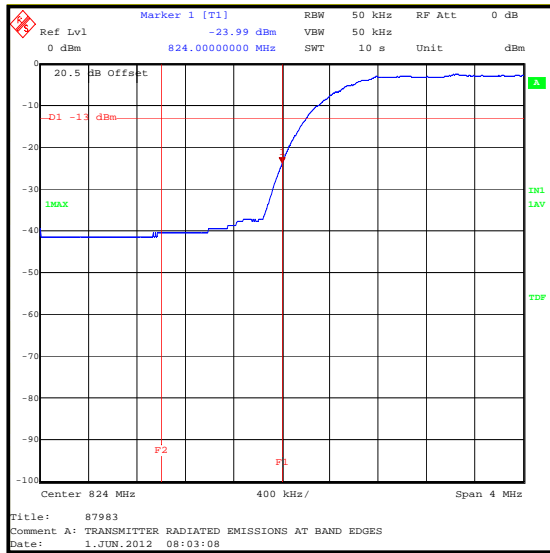

## **6. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
Effective Radiated Power (ERP)	824 to 849 MHz	95%	±2.94 dB
Frequency Stability	824 to 849 MHz	95%	±0.92 ppm
Occupied Bandwidth	824 to 849 MHz	95%	±0.92 ppm
Radiated Spurious Emissions	30 MHz to 9 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

**Appendix 1. Test Equipment Used**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (months)
A1393	Attenuator	Huber & Suhner	757456	6820.17.B	08 Jul 2012	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	09 Oct 2012	12
A1818	Antenna	EMCO	3115	00075692	09 Oct 2012	12
A1834	Attenuator	Hewlett Packard	8491B	10444	29 Jan 2013	12
A1974	High Pass Filter	AtlanTecRF	AFH-01000	090000283	15 Mar 2013	12
A253	Antenna	Flann Microwave	12240-20	128	09 Oct 2012	12
A254	Antenna	Flann Microwave	14240-20	139	09 Oct 2012	12
A255	Antenna	Flann Microwave	16240-20	519	09 Oct 2012	12
A288	Antenna	Chase	CBL6111A	1589	19 Aug 2012	12
A553	Antenna	Chase	CBL6111A	1593	15 Feb 2013	12
E013	Environmental Chamber	Sanyo	MTH-4200PR	None	10 Aug 2012	12
G0543	Amplifier	Sonoma	310N	230801	13 Jul 2012	3
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	31 Aug 2012	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	09 Oct 2012	12
M1124	Spectrum Analyser	Rohde & Schwarz	ESI26	100046K	29 Jun 2012	12
M1229	Digital Multimeter	Fluke	179	87640015	21 Jun 2012	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	03 Feb 2013	12
M1642	Fluke 52II Thermomter	Fluke	52II	18890119	16 Mar 2013	12
M1662	CMU 200	Rohde & Schwarz	CMU 200	109374	21 May 2013	12
S011	DC Power Supply Unit	INSTEK	PR-3010H	9401270	Calibrate before use	-

**NB** In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.