

## TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: NTT docomo EB-4059

FCC ID: UCE 112056A

To: FCC Part 22: 2011 Subpart H

**Test Report Serial No.:**  
RFI-RPT-RP89460JD02A


This Test Report Is Issued Under The Authority  
Of John Newell, Group Quality Manager:



**Checked By:**

Ian Watch

**Signature:**



**Date of Issue:**

28 August 2012

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, selecting text and graphics, adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

**RFI Global Services Ltd**

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG  
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001  
Email: [info@rfi-global.com](mailto:info@rfi-global.com) Website: [www.rfi-global.com](http://www.rfi-global.com)

Registered in England and Wales. Company number: 2117901

This page has been left intentionally blank.

**Table of Contents**

<b>1. Customer Information .....</b>	<b>4</b>
<b>2. Summary of Testing .....</b>	<b>5</b>
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
<b>3. Equipment Under Test (EUT) .....</b>	<b>6</b>
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	6
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	7
3.5. Support Equipment	7
<b>4. Operation and Monitoring of the EUT during Testing .....</b>	<b>8</b>
4.1. Operating Modes	8
4.2. Configuration and Peripherals	8
<b>5. Measurements, Examinations and Derived Results .....</b>	<b>9</b>
5.1. General Comments	9
5.2. Test Results	10
5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions	10
5.2.2. Receiver/Idle Mode Radiated Spurious Emissions	13
5.2.3. Transmitter Effective Radiated Power (ERP)	17
5.2.4. Transmitter Frequency Stability (Temperature Variation)	19
5.2.5. Transmitter Frequency Stability (Voltage Variation)	20
5.2.6. Transmitter Occupied Bandwidth	21
5.2.7. Transmitter Out of Band Radiated Emissions	31
5.2.8. Transmitter Radiated Emissions at Band Edges	34
<b>6. Measurement Uncertainty .....</b>	<b>44</b>
<b>Appendix 1. Test Equipment Used .....</b>	<b>45</b>

**1. Customer Information**










<b>Company Name:</b>	Panasonic Mobile Communications Development of Europe Ltd.
<b>Address:</b>	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom

## **2. Summary of Testing**

### **2.1. General Information**

<b>Specification Reference:</b>	47CFR22
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 22 Subpart H (Public Mobile Services)
<b>Specification Reference:</b>	47CFR15.107 and 47CFR15.109
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 15 Subpart B (Unintentional Radiators) - Sections 15.107 and 15.109
<b>Site Registration:</b>	209735
<b>Location of Testing:</b>	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
<b>Test Dates:</b>	13 August 2012 to 15 August 2012

### **2.2. Summary of Test Results**

<b>FCC Reference (47CFR)</b>	<b>Measurement</b>	<b>Result</b>
Part 15.107(a)	Receiver/Idle Mode AC Conducted Spurious Emissions	
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
Part 22.913(a)	Transmitter Effective Radiated Power (ERP)	
Part 2.1055/22.355	Transmitter Frequency Stability (Temperature and Voltage Variation)	
Part 2.1049	Transmitter Occupied Bandwidth	
Part 2.1053/22.917	Transmitter Out of Band Radiated Emissions	
Part 2.1053/22.917	Transmitter Band Edge Radiated Emissions	
<b>Key to Results</b>  = Complied  = Did not comply		

### **2.3. Methods and Procedures**

<b>Reference:</b>	ANSI/TIA-603-C-2004
<b>Title:</b>	Land Mobile Communications Equipment, Measurements and performance Standards
<b>Reference:</b>	ANSI C63.4 (2009)
<b>Title:</b>	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

### **2.4. Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	NTT docomo
<b>Model Name or Number:</b>	EB-4059
<b>IMEI:</b>	353008050015078 ( <i>Radiated sample #1</i> )
<b>Hardware Version Number:</b>	Rev C
<b>Software Version Number:</b>	ACPU: B-D22CS1-01.02.001 CCPU: D22CS1_Cv18102002
<b>FCC ID:</b>	UCE112056A

<b>Brand Name:</b>	NTT docomo
<b>Model Name or Number:</b>	EB-4059
<b>IMEI:</b>	353008050015086 ( <i>Conducted RF port sample #1</i> )
<b>Hardware Version Number:</b>	Rev C
<b>Software Version Number:</b>	ACPU: B-D22CS1-01.02.001 CCPU: D22CS1_Cv18102002
<b>FCC ID:</b>	UCE112056A

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	AC Charger
<b>Model Name or Number:</b>	AC 01

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	Charge/USB Data cable
<b>Model Name or Number:</b>	Not marked or stated

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	Cradle
<b>Model Name or Number:</b>	P51

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	Stereo PHF
<b>Model Name or Number:</b>	P01

#### **3.2. Description of EUT**

The equipment under test was a Single Mode UMTS Mobile Phone

### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

### **3.4. Additional Information Related to Testing**

Technology Tested:	UMTS850		
Type of Radio Device:	Transceiver		
Mode:	UMTS FDD V and 3GPP Rel. 5 HSDPA / Rel. 6 HSUPA		
Modulation Type:	QPSK / 8PSK		
Channel Spacing:	5 MHz		
Power Supply Requirement(s):	Nominal	3.7 V	
	Minimum	3.4 V	
	Maximum	4.255 V	
Maximum Output Power (ERP):	Voice (12.2 kbps)	22.8 dBm	
	HSDPA Sub-Test 2	24.3 dBm	
	HSUPA Sub-Test 1	23.6 dBm	
Transmit Frequency Range:	824 to 849 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	4132	826.4
	Middle	4183	836.6
	Top	4233	846.6
Receive Frequency Range:	869 to 894 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	4357	871.4
	Middle	4407	881.6
	Top	4458	891.6

### **3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

<b>Brand Name:</b>	Generic
<b>Description:</b>	2 GB Micro SD Memory Card
<b>Model Name or Number:</b>	Not Stated

<b>Brand Name:</b>	Not Stated
<b>Description:</b>	Dummy Battery
<b>Model Name or Number:</b>	Not Stated

## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.
- Constantly transmitting at full power on bottom, middle and top channels as required.
- Occupied bandwidth, ERP and band edge tests were performed with the EUT in Voice (12.2 kbps), HSDPA (Sub-tests 1 to 4) or HSUPA (Sub-tests 1 to 5) modes.
- Transmitter radiated spurious emissions were checked in all modes during pre-scans. Voice (12.2 kbps) was found to be the worst case and all final measurements were performed with the EUT in this mode.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- Connected to a Rohde & Schwarz CMU 200 Universal Radio Communications Tester, operating in UMTS Band V mode.
- The conducted sample with IMEI 353008050015086 was used for frequency stability and occupied bandwidth measurements.
- The radiated sample with IMEI 353008050015078 was used for all other measurements.
- The dummy battery was fitted for frequency stability measurements.
- Idle mode and transmit mode radiated spurious emissions tests were performed with the Stereo PHF connected to the EUT. Pre-scans were performed with all accessories connected. The Stereo PHF was found to have the highest emission levels and final measurements were performed with the Stereo PHF connected.



## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

**5.2. Test Results****5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions****Test Summary:**

Test Engineer:	David Doyle	Test Date:	15 August 2012
Test Sample IMEI:	353008050015078		

FCC Part:	15.107
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

**Environmental Conditions:**

Temperature (°C):	25
Relative Humidity (%):	54

**Results: Live / Quasi Peak**

Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.154500	Live	44.4	65.8	21.4	Complied
1.252500	Live	35.4	56.0	20.6	Complied
1.680000	Live	41.2	56.0	14.8	Complied
3.898500	Live	33.0	56.0	23.0	Complied
13.938000	Live	12.8	60.0	47.2	Complied
14.388000	Live	12.8	60.0	47.2	Complied
20.778000	Live	11.0	60.0	49.0	Complied

**Results: Live / Average**



Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
1.392000	Live	29.7	46.0	16.3	Complied
1.707000	Live	28.7	46.0	17.3	Complied
3.813000	Live	20.6	46.0	25.4	Complied
13.974000	Live	7.4	50.0	42.6	Complied
14.356500	Live	6.8	50.0	43.2	Complied
20.805000	Live	8.4	50.0	41.6	Complied

**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)****Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.154500	Neutral	43.5	65.8	22.3	Complied
1.545000	Neutral	33.8	56.0	22.2	Complied
3.579000	Neutral	16.3	56.0	39.7	Complied
4.884000	Neutral	14.9	56.0	41.1	Complied
13.965000	Neutral	13.4	60.0	46.6	Complied
14.469000	Neutral	11.9	60.0	48.1	Complied

**Results: Neutral / Average**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.172500	Neutral	32.4	54.8	22.4	Complied
1.558500	Neutral	29.4	46.0	16.6	Complied
3.939000	Neutral	14.8	46.0	31.2	Complied
13.582500	Neutral	7.3	50.0	42.7	Complied
13.978500	Neutral	8.0	50.0	42.0	Complied
14.064000	Neutral	7.3	50.0	42.7	Complied

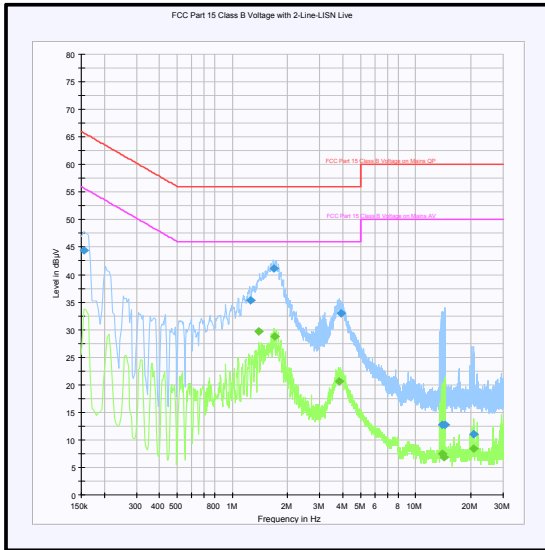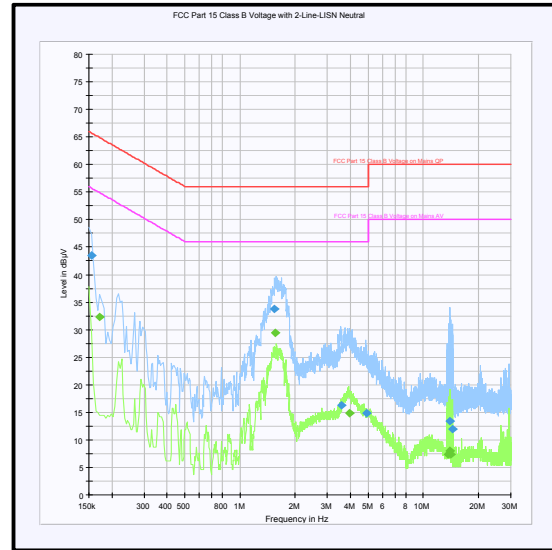**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)****Live****Neutral**

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**5.2.2. Receiver/Idle Mode Radiated Spurious Emissions****Test Summary:**

<b>Test Engineer:</b>	David Doyle	<b>Test Date:</b>	15 August 2012
<b>Test Sample Serial No:</b>	353008050015078		

<b>FCC Part:</b>	15.109
<b>Test Method Used:</b>	As detailed in ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4
<b>Frequency Range:</b>	30 MHz to 1000 MHz

**Environmental Conditions:**


<b>Temperature (°C):</b>	26
<b>Relative Humidity (%):</b>	43

**Results: Quasi Peak**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
50.588	Vertical	9.3	40.0	30.7	Complied
299.598	Horizontal	9.5	46.0	36.5	Complied
558.713	Vertical	17.7	46.0	28.3	Complied
705.477	Horizontal	20.3	46.0	25.7	Complied
784.512	Horizontal	22.0	46.0	24.0	Complied
935.885	Horizontal	24.5	46.0	21.5	Complied
955.045	Horizontal	24.9	46.0	21.1	Complied

**Note(s):**

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

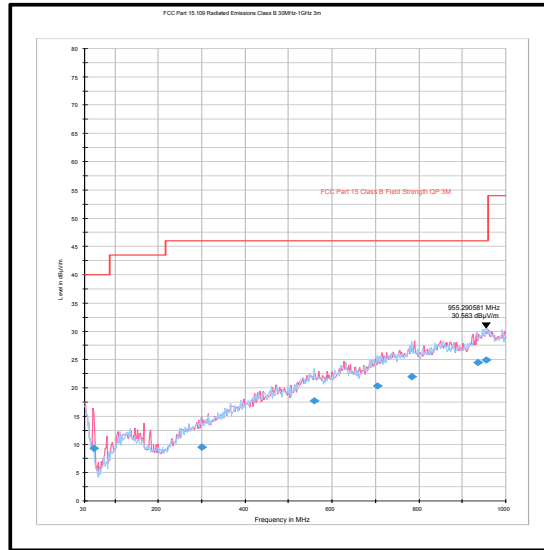**Receiver/Idle Mode Radiated Spurious Emissions (continued)**

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.*

**Receiver/Idle Mode Radiated Spurious Emissions (continued)****Test Summary:**

<b>Test Engineer:</b>	David Doyle	<b>Test Date:</b>	13 August 2011
<b>Test Sample IMEI:</b>	353008050015078		

<b>FCC Part:</b>	15.109
<b>Test Method Used:</b>	As detailed in ANSI C63.4 Section 8
<b>Frequency Range:</b>	1 GHz to 5 GHz

**Environmental Conditions:**



<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	51

**Results:**

<b>Frequency (MHz)</b>	<b>Antenna Polarity</b>	<b>Peak Level (dBµV/m)</b>	<b>Average Limit (dBµV/m)</b>	<b>Margin (dB)</b>	<b>Result</b>
3963.928	Vertical	45.9	54.0	8.1	Complied

**Note(s):**

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.
3. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

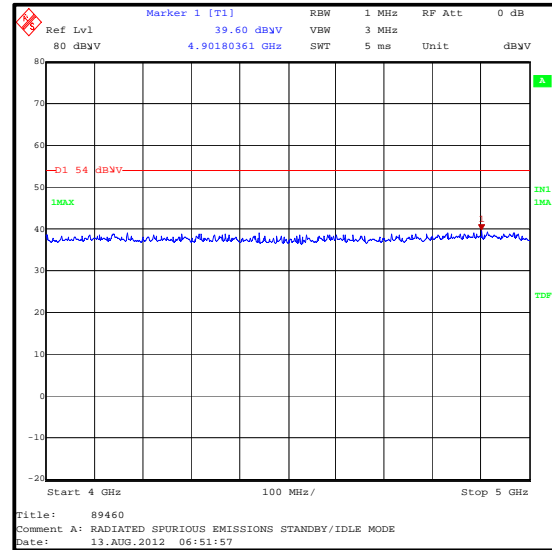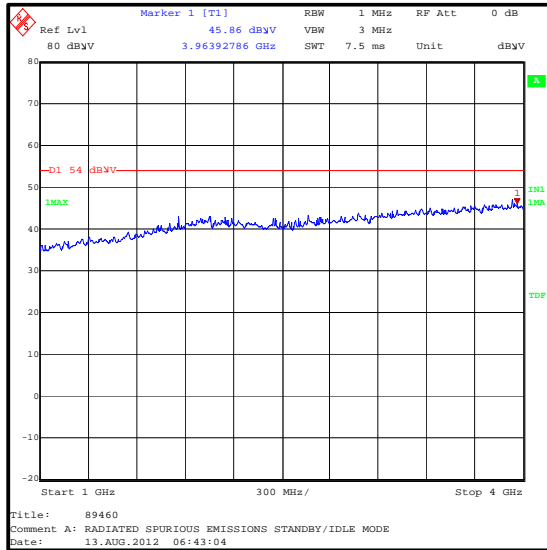**Receiver/Idle Mode Radiated Spurious Emissions (continued)**

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*



**5.2.3. Transmitter Effective Radiated Power (ERP)****Test Summary:**

Test Engineer:	David Doyle	Test Date:	14 August 2012
Test Sample IMEI:	353008050015078		

FCC Part:	22.913(a)
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.17.2

**Environmental Conditions:**

Temperature (°C):	25
Relative Humidity (%):	51

**Results: Peak ERP**

Modes		HSDPA				Voice			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	22.0	23.3	23.2	23.2	22.6	38.5	15.2	Complied
	4183	23.1	24.3	24.2	24.1	22.8	38.5	14.2	Complied
	4233	23.1	24.0	23.9	23.8	22.3	38.5	14.5	Complied
$\beta_c$		2	12	15	15				
$\beta_d$		15	15	8	4				
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8				

**Results: RMS ERP**

Modes		HSDPA				Voice			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	19.0	19.1	18.3	18.3	19.7	38.5	18.8	Complied
	4183	20.1	20.2	19.4	19.4	20.0	38.5	18.3	Complied
	4233	20.2	21.2	19.5	19.4	19.6	38.5	17.3	Complied
$\beta_c$		2	12	15	15				
$\beta_d$		15	15	8	4				
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8				

**Transmitter Effective Radiated Power (ERP) (Continued)****Results: Peak ERP**

Modes		HSUPA							
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	23.4	22.7	23.3	22.7	23.6	38.5	14.9	Complied
	4183	23.1	22.3	22.8	22.4	23.2	38.5	15.3	Complied
	4233	23.0	22.6	23.1	22.8	23.4	38.5	15.1	Complied
$\beta_c$		11	6	15	2	15			
$\beta_d$		15	15	9	15	15			
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8	8			

**Results: RMS ERP**

Modes		HSUPA							
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	18.8	19.0	18.4	19.1	19.2	38.5	19.3	Complied
	4183	18.8	18.8	18.3	18.8	18.9	38.5	19.6	Complied
	4233	19.2	19.3	18.8	19.3	19.4	38.5	19.1	Complied
$\beta_c$		11	6	15	2	15			
$\beta_d$		15	15	9	15	15			
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8	8			

**Note(s):**

1. All modes were compared on each channel and the highest power recorded was subtracted from the limit to show the margin.

**5.2.4. Transmitter Frequency Stability (Temperature Variation)****Test Summary:**

<b>Test Engineer:</b>	Mark Percival	<b>Test Date:</b>	13 August 2012
<b>Test Sample IMEI:</b>	353008050015086		

<b>FCC Part:</b>	2.1055 & 22.355
<b>Test Method Used:</b>	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

**Environmental Conditions:**

<b>Ambient Temperature (°C):</b>	27
<b>Ambient Relative Humidity (%):</b>	44

**Results: Middle Channel (836.6 MHz)**

Temperature (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	836.600037	37	0.0442	2.5	2.4558	Complied
-20	836.599988	12	0.0143	2.5	2.4857	Complied
-10	836.600012	12	0.0143	2.5	2.4857	Complied
0	836.600018	18	0.0215	2.5	2.4785	Complied
10	836.599990	10	0.0120	2.5	2.4880	Complied
20	836.600009	9	0.0108	2.5	2.4892	Complied
30	836.600030	30	0.0359	2.5	2.4641	Complied
40	836.599987	13	0.0155	2.5	2.4845	Complied
50	836.599992	8	0.0096	2.5	2.4904	Complied

**Note(s):**

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using the UMTS Band V modulation test on a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was placed in a temperature chamber and connected by suitable RF cables to the CMU 200 outside the chamber. A bidirectional communications link was established on the centre channel between the EUT and the CMU 200. The frequency meter value was recorded.
3. Temperature was monitored throughout the test with a calibrated digital thermometer.

**5.2.5. Transmitter Frequency Stability (Voltage Variation)****Test Summary:**

<b>Test Engineer:</b>	Mark Percival	<b>Test Date:</b>	13 August 2012
<b>Test Sample IMEI:</b>	353008050015086		

<b>FCC Part:</b>	2.1055 & 22.355
<b>Test Method Used:</b>	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

**Environmental Conditions:**

<b>Temperature (°C):</b>	20
<b>Relative Humidity (%):</b>	44

**Results: Middle Channel (836.6 MHz)**

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
3.4	836.599980	20	0.0239	2.5	2.4761	Complied
4.255	836.600010	10	0.0108	2.5	2.4892	Complied

**Note(s):**

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using the UMTS Band V modulation test on a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMU 200. A bidirectional communications link was established on the centre channel between the EUT and the CMU 200. The frequency meter value was recorded.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

**5.2.6. Transmitter Occupied Bandwidth****Test Summary:**

Test Engineer:	David Doyle	Test Date:	13 August 2012
Test Sample IMEI:	353008050015086		


FCC Part:	2.1049
Test Method Used:	Occupied Bandwidth function of a spectrum analyser

**Environmental Conditions:**

Temperature (°C):	25
Relative Humidity (%):	50


**Results: Voice / 12.2 kbps**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4328.657

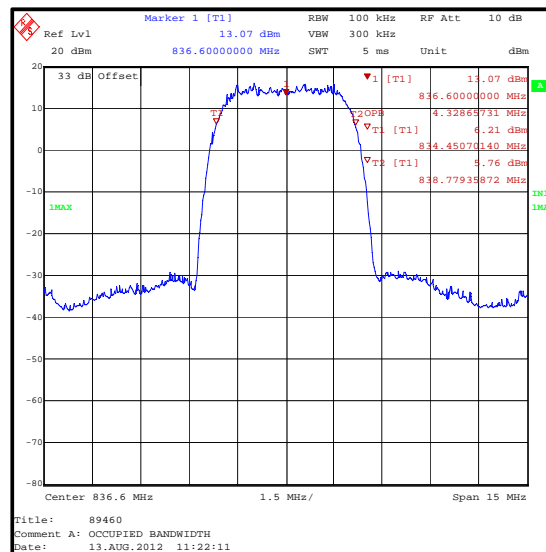


**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 1**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4328.657

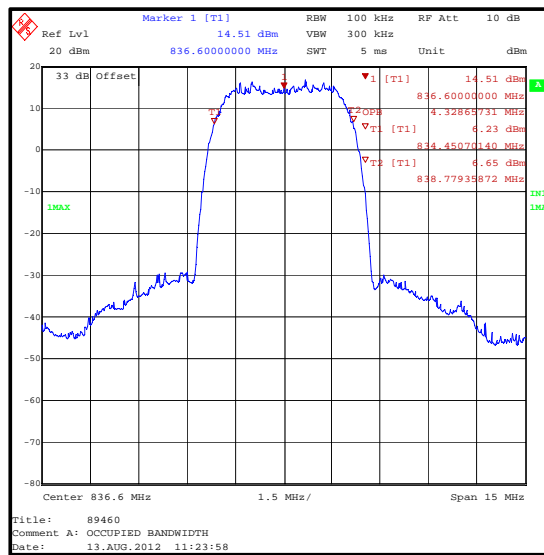


**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 2**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4328.657

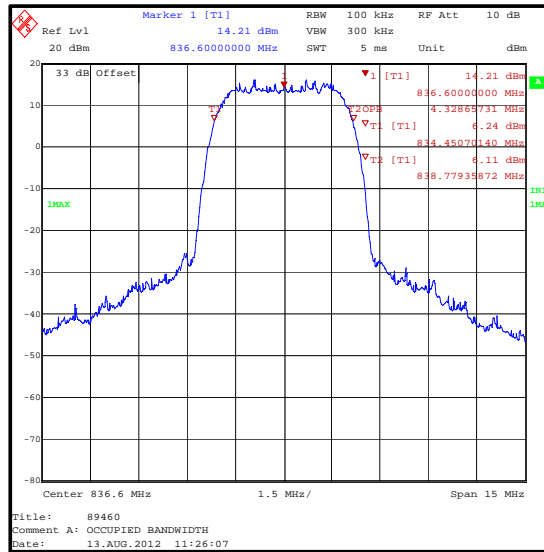

**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 3**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4328.657

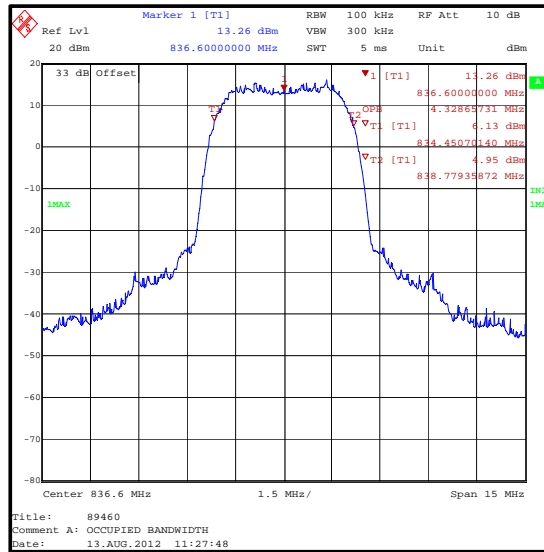




### **Transmitter Occupied Bandwidth (continued)**


### Results: HSDPA Sub-Test 4

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4328.657

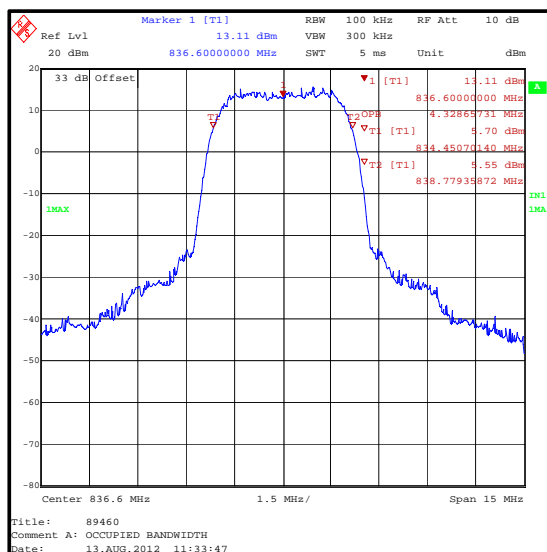


**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 1**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4298.597

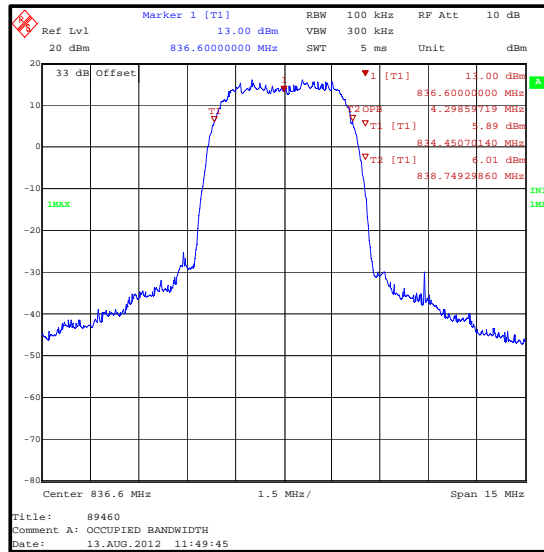


**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 2**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4298.597

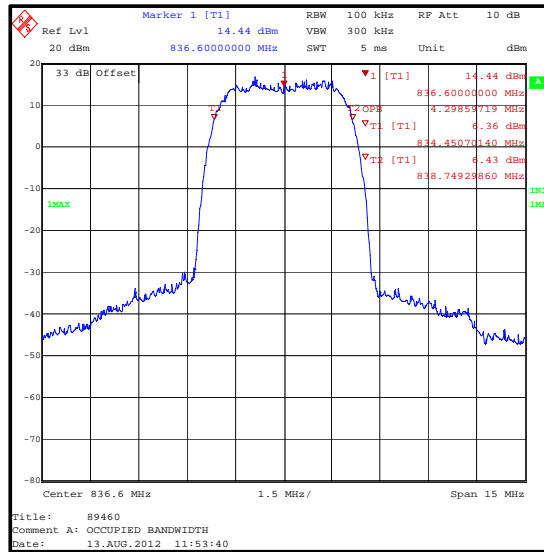


**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 3**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4328.657

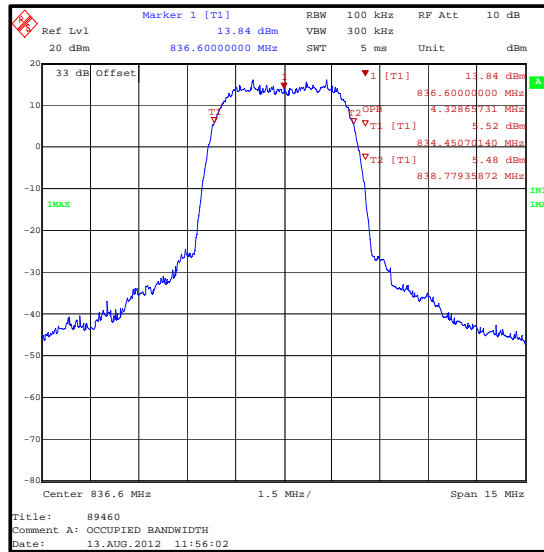


**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 4**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4328.657

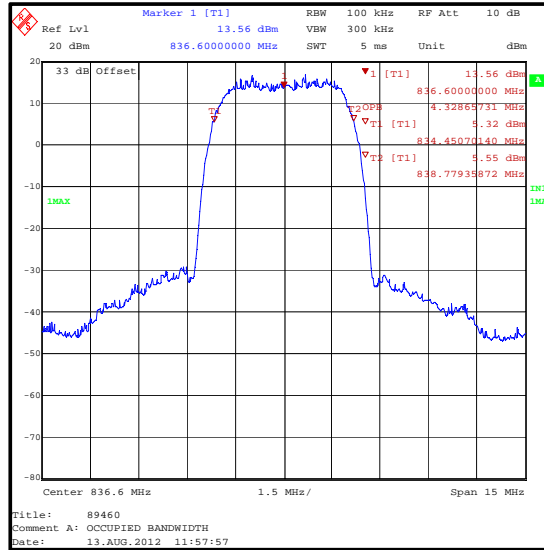

**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 5**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4358.717

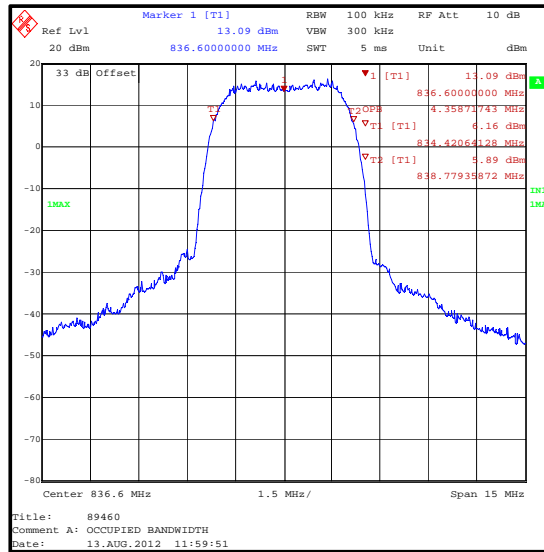**Note(s):**

1. In lieu of the test method detailed in ANSI C63.4 Section 13.7, the 99% occupied bandwidth was measured using the Occupied Bandwidth function of the spectrum analyzer.

**5.2.7. Transmitter Out of Band Radiated Emissions****Test Summary:**

Test Engineer:	David Doyle	Test Date:	13 August 2012
Test Sample IMEI:	353008050015078		

FCC Part:	2.1053 & 22.917
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Part 2.1053
Frequency Range:	30 MHz to 9 GHz
Configuration:	Voice / 12.2 kbps

**Environmental Conditions:**





Temperature (°C):	25
Relative Humidity (%):	51

**Results: Voice / 12.2 kbps**



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
8959.920	-33.8	-13.0	20.8	Complied

**Note(s):**

1. No spurious emissions were detected above the noise floor of the measuring receiver; the highest peak noise floor reading of the measuring receiver was recorded.
2. The uplink and downlink traffic channels are shown on the 30 MHz to 1 GHz plot.
3. All emissions shown on the pre-scan plots were investigated and found to be below the measurement system noise floor or ambient.
4. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
5. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

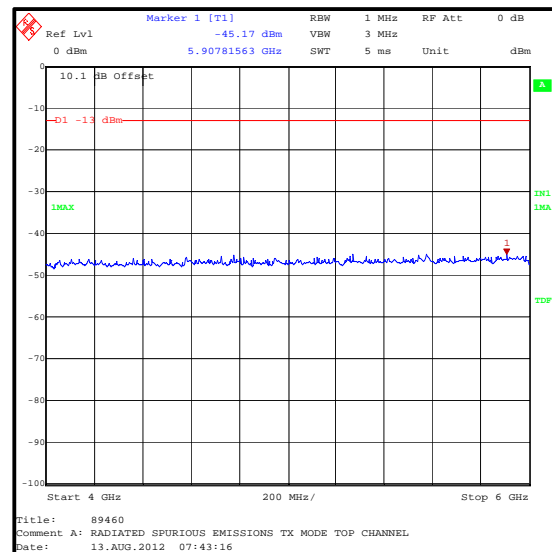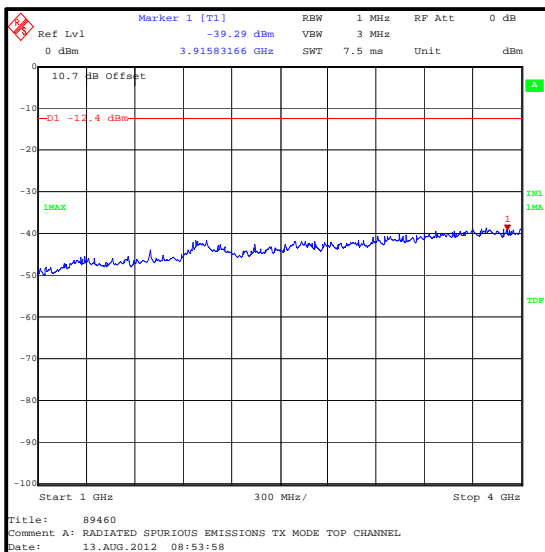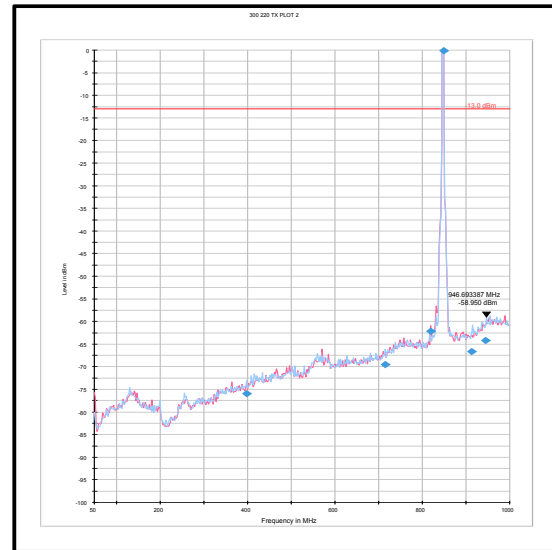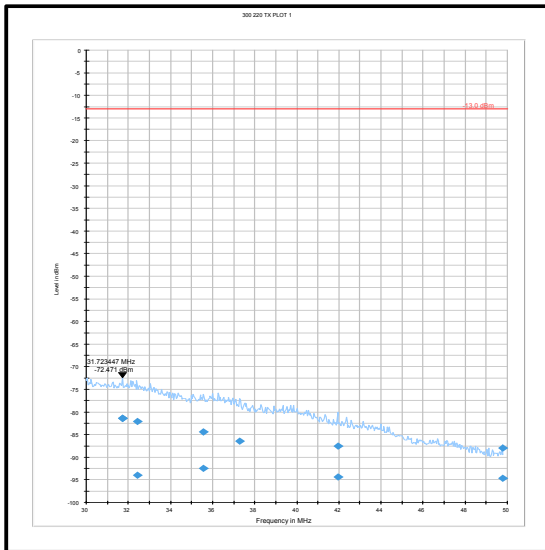**Transmitter Out of Band Radiated Emissions (continued)**

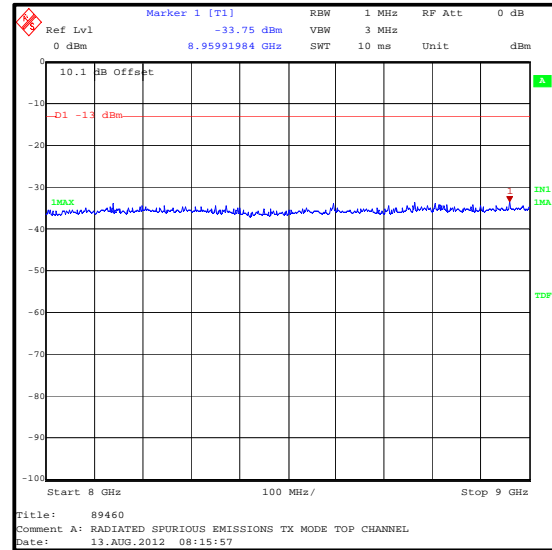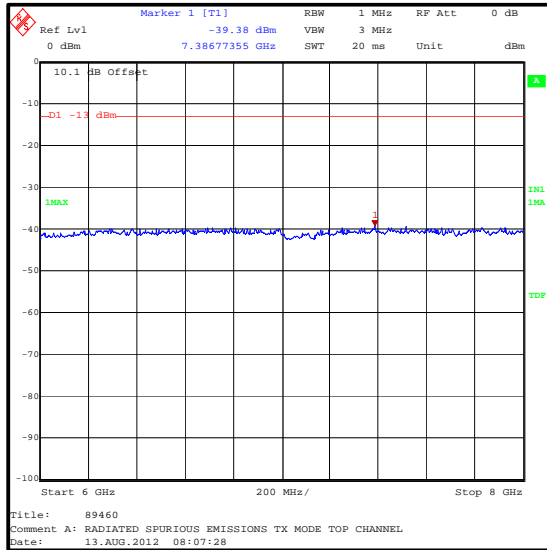

**Transmitter Out of Band Radiated Emissions (continued)**

**5.2.8. Transmitter Radiated Emissions at Band Edges****Test Summary:**

<b>Test Engineer:</b>	David Doyle	<b>Test Dates:</b>	14 August 2012 & 15 August 2012
<b>Test Sample IMEI:</b>	353008050015078		



<b>FCC Part:</b>	2.1053 & 22.917
<b>Test Method Used:</b>	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Part 22.917

**Environmental Conditions:**

<b>Temperature (°C):</b>	25 to 26
<b>Relative Humidity (%):</b>	51 to 58



**Results: Voice / 12.2 kbps**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-17.7	-13.0	4.7	Complied
849	-19.3	-13.0	6.3	Complied

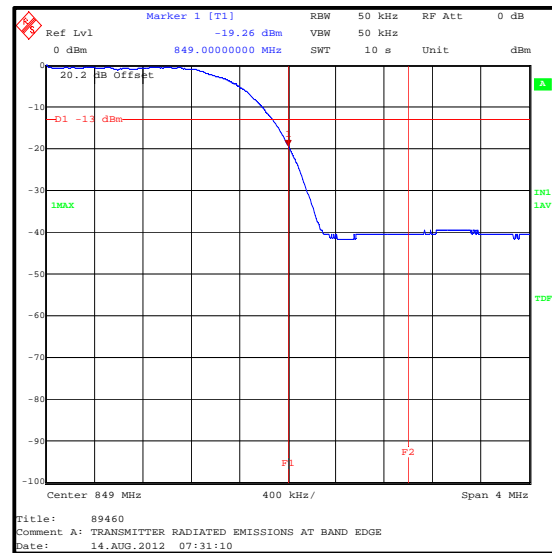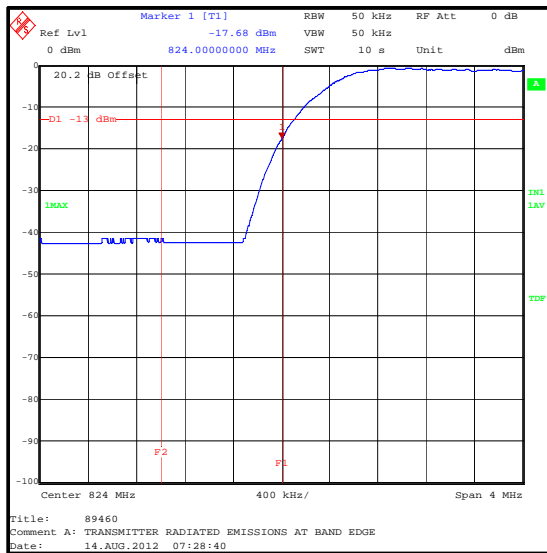



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 1****Results: Voice / 12.2 kbps**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-18.1	-13.0	5.1	Complied
849	-19.2	-13.0	6.2	Complied

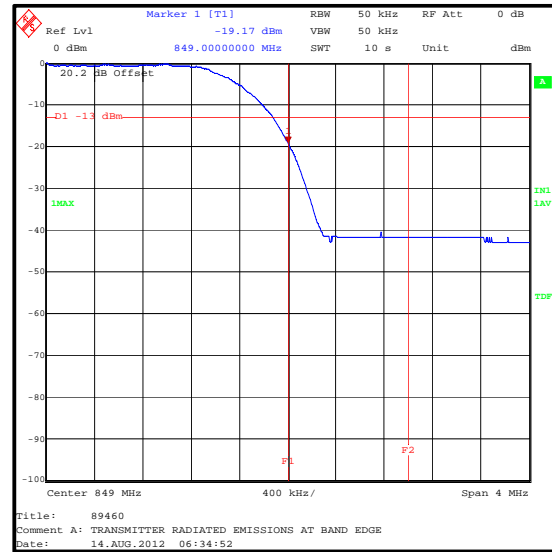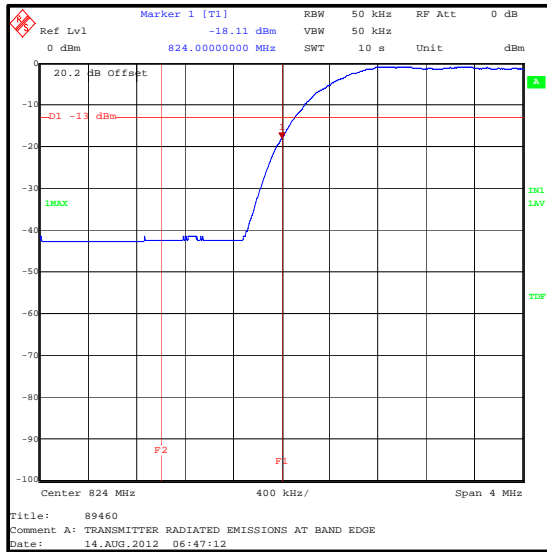



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 2**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-18.6	-13.0	5.6	Complied
849	-19.6	-13.0	6.6	Complied

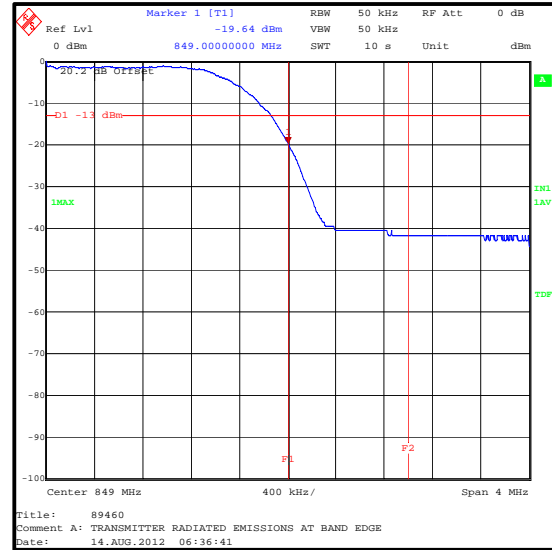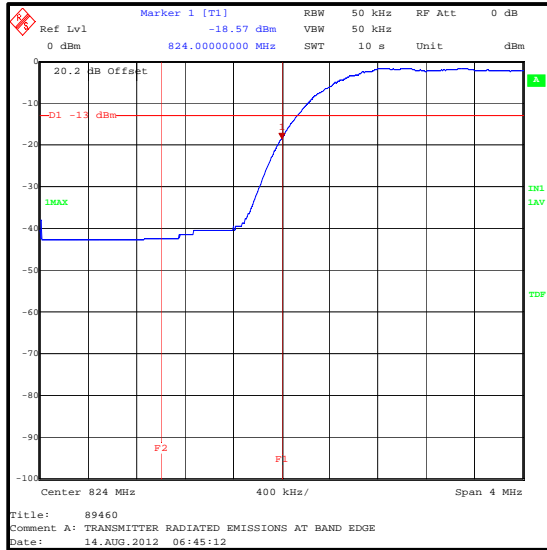



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-18.6	-13.0	5.6	Complied
849	-19.7	-13.0	6.7	Complied

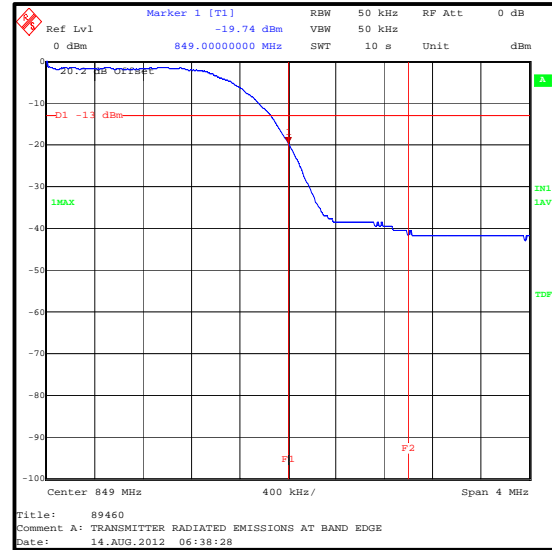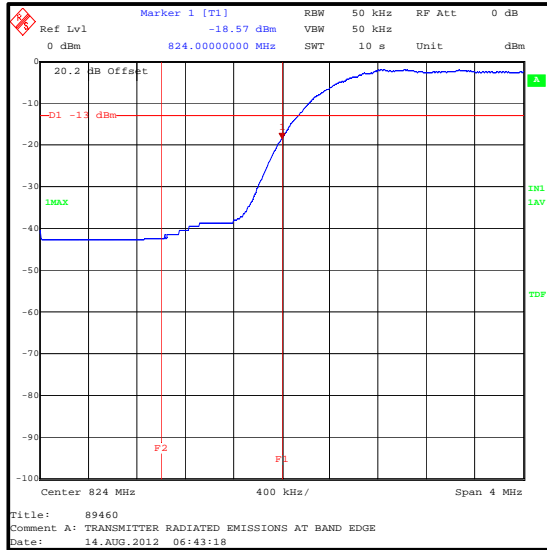



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-18.6	-13.0	5.6	Complied
849	-19.6	-13.0	6.6	Complied

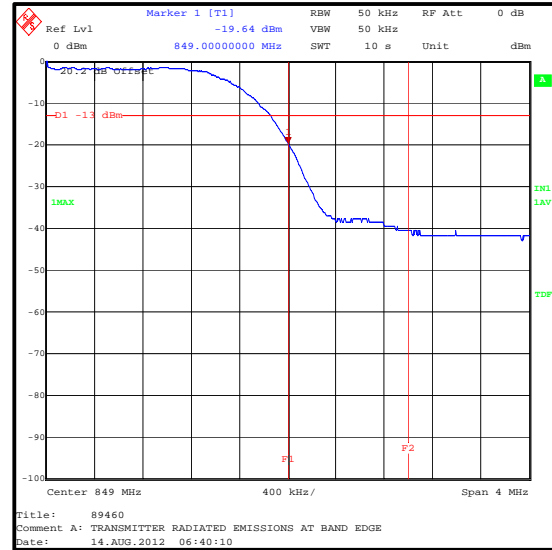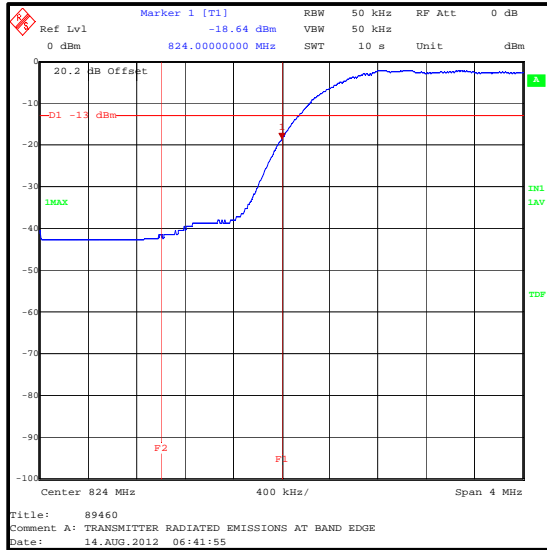



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 1**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-17.9	-13.0	4.9	Complied
849	-21.9	-13.0	8.9	Complied

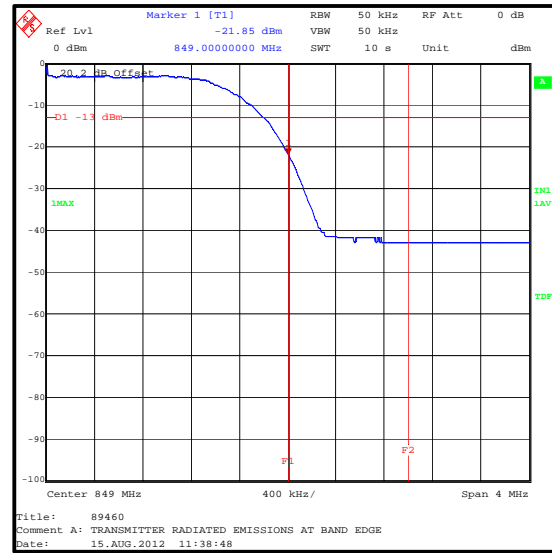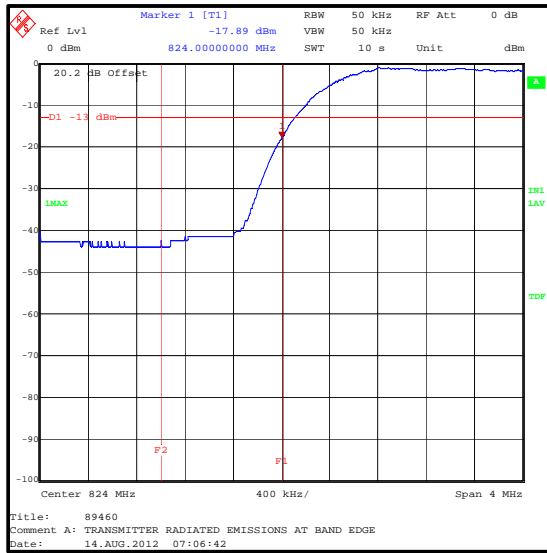

**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 2**



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-18.0	-13.0	5.0	Complied
849	-21.6	-13.0	8.6	Complied

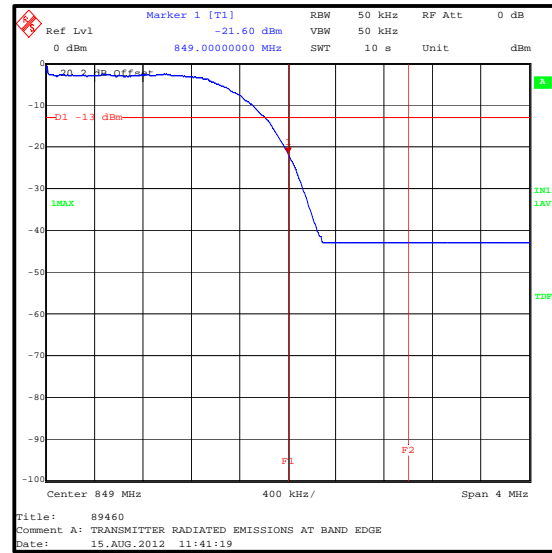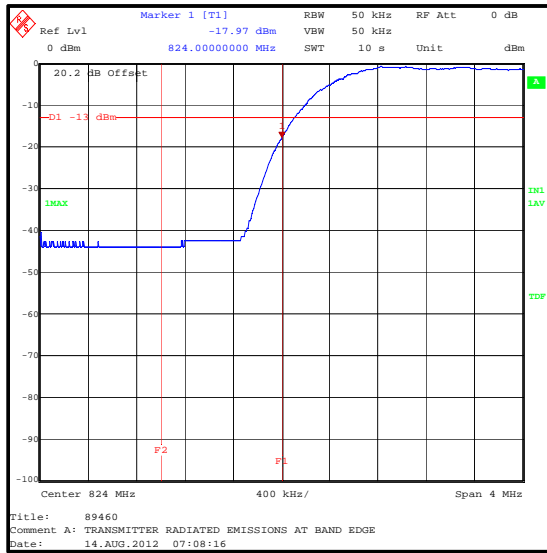





**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-17.7	-13.0	4.7	Complied
849	-21.4	-13.0	8.4	Complied

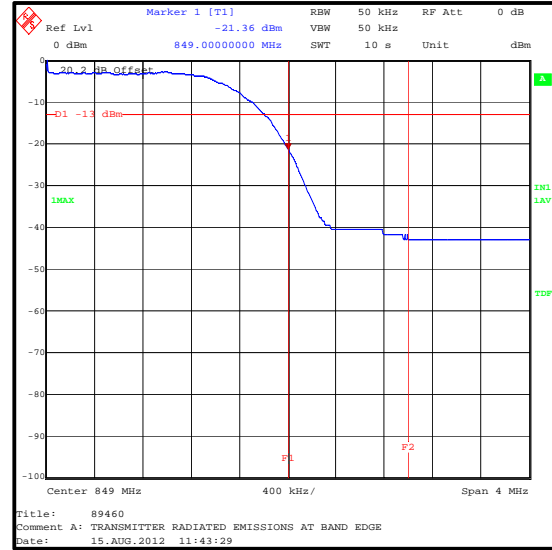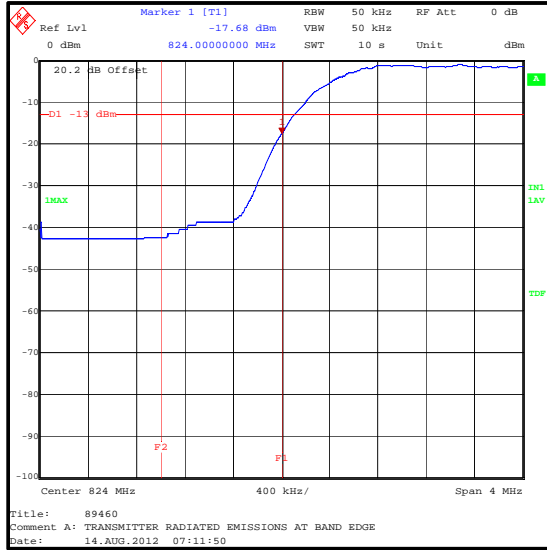



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-18.0	-13.0	5.0	Complied
849	-21.5	-13.0	8.5	Complied

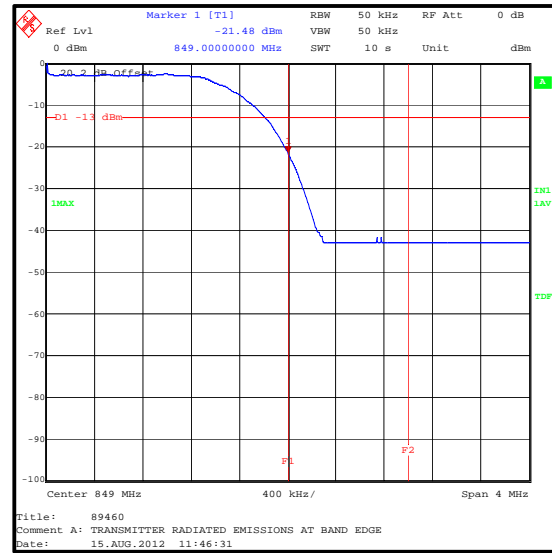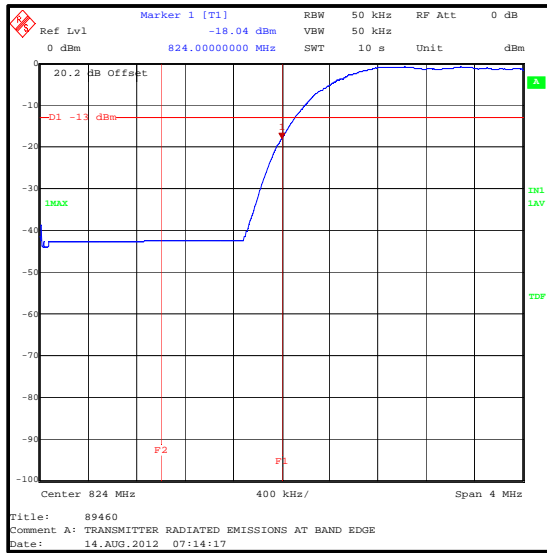

**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 5**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-17.6	-13.0	4.6	Complied
849	-21.2	-13.0	8.2	Complied

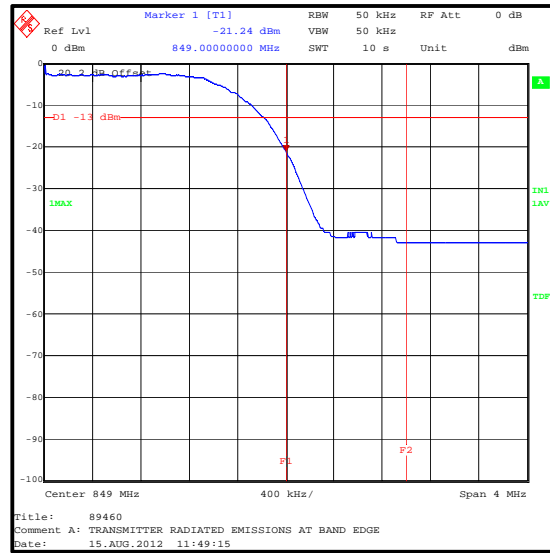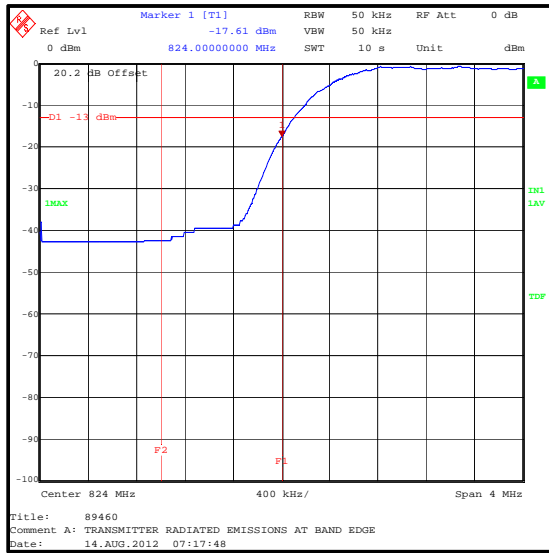

## **6. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
Effective Radiated Power (ERP)	824 to 849 MHz	95%	±2.94 dB
Frequency Stability	824 to 849 MHz	95%	±0.92 ppm
Occupied Bandwidth	824 to 849 MHz	95%	±0.92 ppm
Radiated Spurious Emissions	30 MHz to 9 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## **Appendix 1. Test Equipment Used**

<b>RFI No.</b>	<b>Instrument</b>	<b>Manufacturer</b>	<b>Type No.</b>	<b>Serial No.</b>	<b>Date Calibration Due</b>	<b>Cal. Interval</b>
A1393	Attenuator	Huber & Suhner	6820.17.B	757456	06 Jul 2013	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	06 Jul 2013	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	09 Oct 2012	12
A1818	Antenna	EMCO	3115	00075692	09 Oct 2012	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	25 Feb 2013	12
A1834	Attenuator	Hewlett Packard	8491B	10444	29 Jan 2013	12
A2072	Directional Coupler	Narda	4242B	03549	Calibrated before use	12
A253	Antenna	Flann	12240-20	128	09 Oct 2012	12
A254	Antenna	Flann	14240-20	139	09 Oct 2012	12
A255	Antenna	Flann	16240-20	519	09 Oct 2012	12
A288	Antenna	Chase	CBL6111A	1589	19 Aug 2012	12
A490	Antenna	Chase	CBL6111A	1590	14 May 2013	12
A553	Antenna	Chase	CBL6111A	1593	15 Feb 2013	12
A649	Single Phase LISN	Rohde & Schwarz	ESH3-Z5	825562/008	19 Feb 2013	12
G017	Signal Generator	Rohde & Schwarz	SMH	863 771/023	13 Jun 2013	24
G0543	Amplifier	Sonoma	310N	230801	15 Oct 2012	3
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	31 Aug 2012	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	09 Oct 2012	12
L1067	Test Receiver	Rohde & Schwarz	ESIB 40	100262	29 May 2013	12
M1229	Digital Multimeter	Fluke	179	87640015	18 Jun 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	03 Feb 2013	12
M1379	Test Receiver	Rohde & Schwarz	ESIB7	100330	20 Oct 2012	12
M1642	Thermometer	Fluke	52II	18890119	21 Feb 2013	12
M1662	Comms. Tester	Rohde & Schwarz	CMU 200	109374	21 May 2013	12
S0537	Dual Power Supply	TTI	EL302D	249928	Calibrated before use	12

**NB** In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.