
Confidential Report

Dosimetric Assessment of the Portable Device Panasonic P-01A (FCC ID: UCE208009A)

According to the FCC Requirements

October 22, 2008

IMST GmbH

Carl-Friedrich-Gauß-Str. 2

D-47475 Kamp-Lintfort

Customer

Panasonic Mobile Communications Dev of Europe Ltd.

Panasonic House Willoughby Road

Bracknell, Berkshire, RG12 8FP, UK

The test results only relate to the items tested. This report shall not be reproduced except in full without the written approval of the testing laboratory.

Executive Summary

The P-01A is a mobile phone (Portable Device) from Panasonic operating in the 850 MHz, 900 MHz, 1800 MHz and 1900 MHz frequency range. The device has an integrated antenna and the system concepts used are the GSM 900, GSM 1800, GSM 1900, WCDMA I (FDD) and WCDMA V (FDD) standards including GPRS Class 10 and Bluetooth capability. The device provides HSDPA in WCDMA.

The objective of the measurements done by IMST was the dosimetric assessment of one device in the WCDMA V and PCS 1900 standards.

The examinations have been carried out with the dosimetric assessment system „DASY4“.

The measurements were made according to the Supplement C to OET Bulletin 65 of the Federal Communications Commission (FCC) Guidelines [OET 65] for evaluating compliance of mobile and portable devices with FCC limits for human exposure (general population) to radiofrequency emissions. Additional information and guidelines given by the following FCC documents were used: SAR Measurement Procedures for 3G Devices [3G Devices]. Following table 2 of SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas [KDB 648474] stand alone SAR for bluetooth is not required since bluetooth output power is $\leq 2 P_{ref}$ and antenna is ≥ 5.0 cm from other antennas. All measurements have been performed in accordance to the recommendations given by SPEAG.

Compliance statement

The Panasonic P-01A mobile phone (FCC ID: UCE208009A) is in compliance with the Federal Communications Commission (FCC) Guidelines [OET 65] for uncontrolled exposure.

The phone was tested in addition to the head positions in the following configurations:

Body worn with the following accessories:

- GSM and WCDMA V (FDD), with headset, display towards the phantom and display towards the ground (15 mm distance)
- GPRS (Class 10), display towards the phantom and display towards the ground (15 mm distance)

Maximum SAR_{1g} = 0.722 W/kg (Head, cheek left, WCDMA V, Channel 4183)

prepared by: 

Alexander Rahn
test engineer

reviewed by: 

Dipl.-Ing. Christoph Hennes
quality assurance engineer

IMST GmbH
Carl-Friedrich-Gauß-Straße 2
D-47475 Kamp-Lintfort

Tel. +49- 2842-981 373
Fax +49- 2842-981 399
email: hennes@imst.de

Table of Contents

1	SUBJECT OF INVESTIGATION.....	5
2	THE IEEE STANDARD C95.1-1999 AND THE FCC EXPOSURE CRITERIA.....	5
2.1	<i>DISTINCTION BETWEEN EXPOSED POPULATION, DURATION OF EXPOSURE AND FREQUENCIES</i>	<i>5</i>
2.2	<i>DISTINCTION BETWEEN MAXIMUM PERMISSIBLE EXPOSURE AND SAR LIMITS.....</i>	<i>6</i>
2.3	<i>SAR LIMIT.....</i>	<i>6</i>
3	THE FCC MEASUREMENT PROCEDURE.....	7
3.1	<i>GENERAL REQUIREMENTS.....</i>	<i>7</i>
3.2	<i>DEVICE OPERATING NEXT TO A PERSON'S EAR.....</i>	<i>7</i>
4	BODY-WORN CONFIGURATIONS.....	10
4.1	<i>POC POSITION.....</i>	<i>10</i>
4.2	<i>PHANTOM REQUIREMENTS.....</i>	<i>11</i>
4.3	<i>TEST TO BE PERFORMED.....</i>	<i>11</i>
5	THE MEASUREMENT SYSTEM.....	13
5.1	<i>PHANTOM.....</i>	<i>14</i>
5.2	<i>PROBE.....</i>	<i>15</i>
5.3	<i>MEASUREMENT PROCEDURE.....</i>	<i>16</i>
5.4	<i>UNCERTAINTY ASSESSMENT.....</i>	<i>17</i>
6	SAR RESULTS.....	18
7	EVALUATION.....	21
8	APPENDIX.....	24
8.1	<i>ADMINISTRATIVE DATA.....</i>	<i>24</i>
8.2	<i>DEVICE UNDER TEST AND TEST CONDITIONS.....</i>	<i>24</i>
8.3	<i>TISSUE RECIPES.....</i>	<i>25</i>
8.4	<i>MATERIAL PARAMETERS.....</i>	<i>26</i>
8.5	<i>SIMPLIFIED PERFORMANCE CHECKING.....</i>	<i>28</i>
8.6	<i>ENVIRONMENT.....</i>	<i>36</i>
8.7	<i>TEST EQUIPMENT.....</i>	<i>36</i>
8.8	<i>CERTIFICATES OF CONFORMITY.....</i>	<i>38</i>
8.9	<i>PICTURES OF THE DEVICE UNDER TEST.....</i>	<i>40</i>
8.10	<i>TEST POSITIONS FOR THE DEVICE UNDER TEST.....</i>	<i>41</i>
8.11	<i>PICTURES TO DEMONSTRATE THE REQUIRED LIQUID DEPTH.....</i>	<i>43</i>
9	REFERENCES.....	44

1 Subject of Investigation

The P-01A is a mobile phone (Portable Device) from Panasonic operating in the 850 MHz, 900 MHz, 1800 MHz and 1900 MHz frequency range. The device has an integrated antenna and the system concepts used are the GSM 900, GSM 1800, GSM 1900, WCDMA I (FDD) and WCDMA V (FDD) standards including GPRS Class 10 and Bluetooth capability. The device provides HSDPA in WCDMA.

CONFIDENTIAL

Please refer to appendix
[SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures](#)

Fig. 1: Pictures of the device under test

The objective of the measurements done by IMST was the dosimetric assessment of one device in the WCDMA V and PCS 1900 standards. The examinations have been carried out with the dosimetric assessment system „DASY4“ described below.

2 The IEEE Standard C95.1-1999 and the FCC Exposure Criteria

In the USA the FCC exposure criteria [OET 65] are based on the withdrawn IEEE Standard C95.1-1999 [IEEE C95.1-1999]. This version was replaced by the IEEE Std C95.1-2005 in October, 2005.

Both IEEE standards sets limits for human exposure to radio frequency electromagnetic fields in the frequency range 3 kHz to 300 GHz. One of the major differences in the newly revised C95.1 is the change in the basic restrictions for localized exposure, from 1.6 W/kg averaged over 1 g tissue to 2.0 W/kg averaged over 10 g tissue, which is now identical to the ICNIRP guidelines [ICNIRP 1998].

2.1 Distinction Between Exposed Population, Duration of Exposure and Frequencies

The American Standard [IEEE C95.1-1999] distinguishes between controlled and uncontrolled environment. Controlled environments are locations where there is exposure that may be incurred by persons who are aware of the potential for exposure as a concomitant of employment or by other cognizant persons. Uncontrolled environments are locations where there is the exposure of individuals who have no knowledge or control of their exposure. The exposures may occur in living quarters or workplaces. For exposure in controlled environments higher field strengths are admissible. In addition the duration of exposure is considered.

Due to the influence of frequency on important parameters, as the penetration depth of the electromagnetic fields into the human body and the absorption capability of different tissues, the limits in general vary with frequency.

2.2 Distinction between Maximum Permissible Exposure and SAR Limits

The biological relevant parameter describing the effects of electromagnetic fields in the frequency range of interest is the specific absorption rate SAR (dimension: power/mass). It is a measure of the power absorbed per unit mass. The SAR may be spatially averaged over the total mass of an exposed body or its parts. The SAR is calculated from the r.m.s. electric field strength E inside the human body, the conductivity σ and the mass density ρ of the biological tissue:

$$SAR = \sigma \frac{E^2}{\rho} = c \frac{\partial T}{\partial t} \Big|_{t \rightarrow 0+} \quad (1)$$

The specific absorption rate describes the initial rate of temperature rise $\partial T / \partial t$ as a function of the specific heat capacity c of the tissue. A limitation of the specific absorption rate prevents an excessive heating of the human body by electromagnetic energy.

As it is sometimes difficult to determine the SAR directly by measurement (e.g. whole body averaged SAR), the standard specifies more readily measurable maximum permissible exposures in terms of external electric E and magnetic field strength H and power density S , derived from the SAR limits. The limits for E , H and S have been fixed so that even under worst case conditions, the limits for the specific absorption rate SAR are not exceeded.

For the relevant frequency range the maximum permissible exposure may be exceeded if the exposure can be shown by appropriate techniques to produce SAR values below the corresponding limits.

2.3 SAR Limit

In this report the comparison between the FCC exposure limits and the measured data is made using the spatial peak SAR; the power level of the device under test guarantees that the whole body averaged SAR is not exceeded.

Having in mind a worst case consideration, the SAR limit is valid for uncontrolled environment and mobile respectively portable transmitters. According to Table 1 the SAR values have to be averaged over a mass of 1 g (SAR_{1g}) with the shape of a cube.

Standard	Status	SAR limit [W/kg]
IEEE C95.1-1999	Replaced	1.6

Table 1: Relevant spatial peak SAR limit averaged over a mass of 1 g.

3 The FCC Measurement Procedure

The Federal Communications Commission (FCC) has published a report and order on the 1st of August 1996 [FCC 96-326], which requires routine dosimetric assessment of mobile telecommunications devices, either by laboratory measurement techniques or by computational modeling, prior to equipment authorization or use. In 2001 the Commission's Office of Engineering and Technology has released Edition 01-01 of Supplement C to OET Bulletin 65. This revised edition, which replaces Edition 97-01, provides additional guidance and information for evaluating compliance of mobile and portable devices with FCC limits for human exposure to radiofrequency emissions [OET 65].

3.1 General Requirements

The test shall be performed in a laboratory with an environment which avoids influence on SAR measurements by ambient EM sources and any reflection from the environment itself. The ambient temperature shall be in the range of 20°C to 26°C and 30-70% humidity.

3.2 Device Operating Next to a Person's Ear

3.2.1 Phantom Requirements

The phantom is a simplified representation of the human anatomy and comprised of material with electrical properties similar to the corresponding tissues. The physical characteristics of the phantom model shall resemble the head and the neck of a user since the shape is a dominant parameter for exposure.

3.2.2 Test Positions

As it cannot be expected that the user will hold the mobile phone exactly in one well defined position, different operational conditions shall be tested. The Supplement C to OET Bulletin 65 requires two test positions. For an exact description helpful geometrical definitions are introduced and shown in Fig. 2 - 3.

There are two imaginary lines on the mobile, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A on Fig. 2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Fig. 2). The two lines intersect at point A.

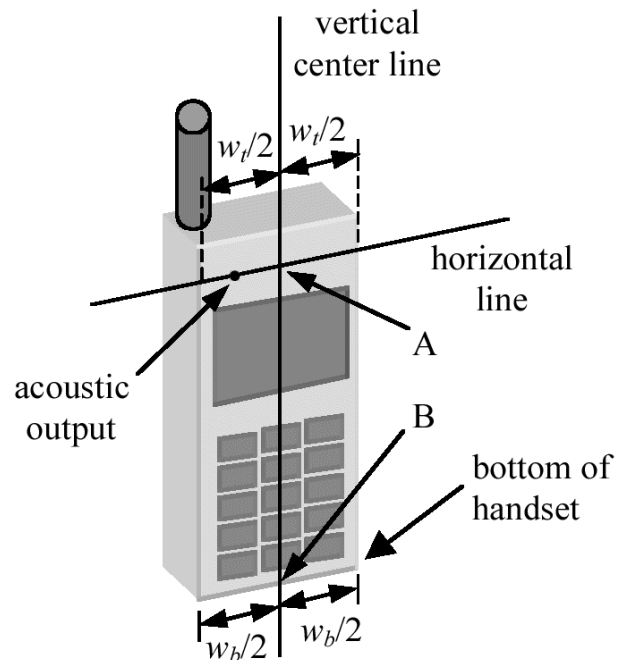


Fig. 2: Handset vertical and horizontal reference lines.

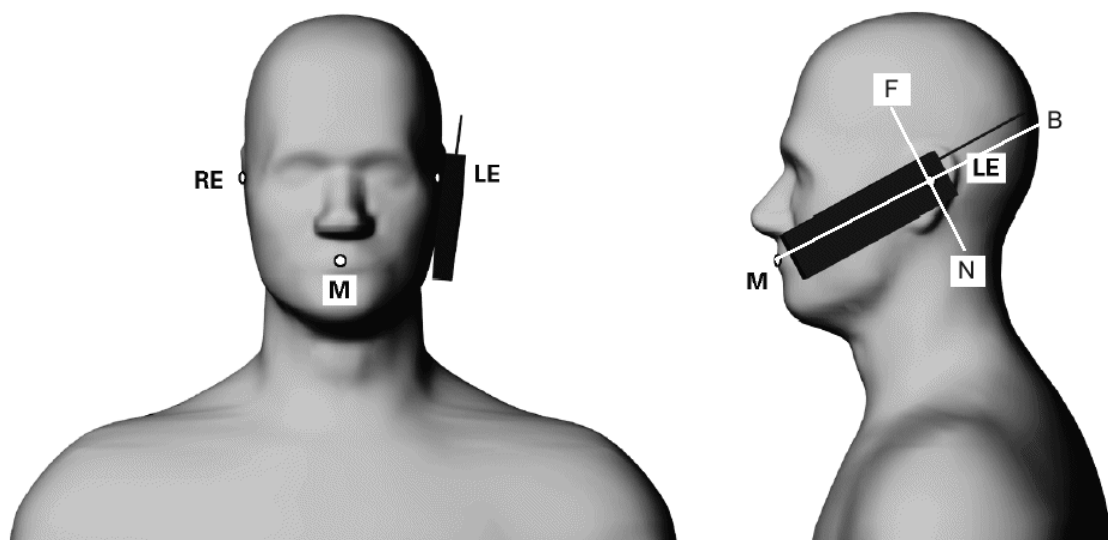


Fig. 3: Phantom reference points.

According to Fig. 3 the human head position is given by means of the following three reference points: auditory canal opening of both ears (RE and LE) and the center of the closed mouth (M). The ear reference points are 15-17 mm above the entrance to the ear canal along the BM line (back-mouth), as shown in Fig. 3. The plane passing through the two ear canals and M is defined as the reference plane. The line NF (Neck-Front) perpendicular to the reference plane and passing through the RE (or LE) is called the reference pivoting line. Line BM is perpendicular to the NF line. With this definitions the test positions are given by

- **Cheek position (see Fig. 4):**

Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Fig. 3), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom. Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the ear. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane). Rotate the phone around the vertical centerline until the phone (horizontal line) is symmetrical with respect to the line NF. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the ear.

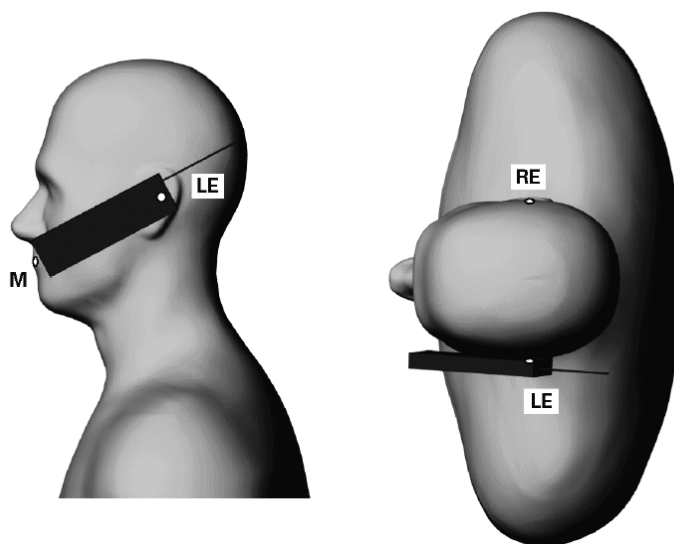


Fig. 4: The cheek position.

- **Tilted position (see Fig. 5):**

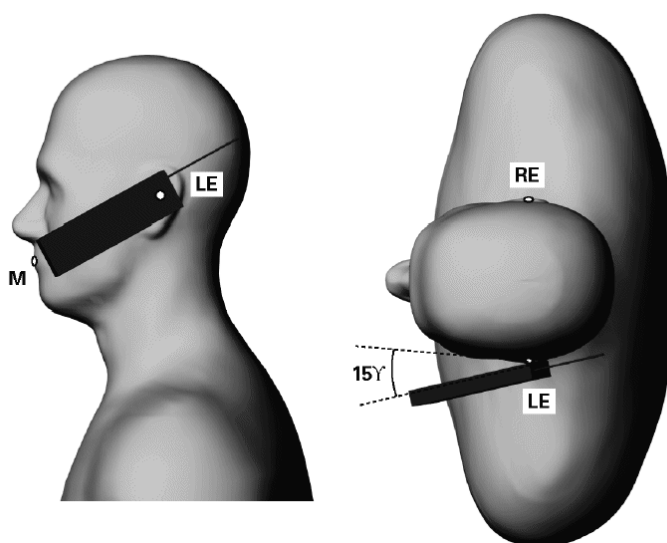


Fig. 5: The tilted position.

While maintaining the orientation of the phone retract the phone parallel to the reference plane far enough to enable a rotation of the phone by 15°. Rotate the phone around the horizontal line by 15°. While maintaining the orientation of the phone, move the phone parallel to the reference plane until any part of the phone touches the head. In this position, point A will be located on the line RE-LE.

- **Measurements in mouth and jaw regions of the SAM phantom:**

Not required for this sample, antennas for GSM and WCDMA are located in the hinge area of the sample.

3.2.3 Test to be Performed

The SAR test shall be performed with both phone positions described above, on the left and right side of the phantom. The device shall be measured for all modes operating when the device is next to the ear, even if the different modes operate in the same frequency band.

For devices with retractable antenna the SAR test shall be performed with the antenna fully extended and fully retracted. Other factors that may affect the exposure shall also be tested. For example, optional antennas or optional battery packs which may significantly change the volume, lengths, flip open/closed, etc. of the device, or any other accessories which might have the potential to considerably increase the peak spatial-average SAR value.

The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional.

4 Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration. Devices with a headset output shall be tested with a connected headset.

For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do. For multiple accessories that do not contain metallic components, the device may be tested only with that accessory which provides the closest spacing to the body.

For multiple accessories that contain metallic components, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component, only the accessory that provides the closest spacing to the body must be tested.

4.1 PoC Position

The PoC configurations shall be tested with the front of the device positioned at 25 mm from a flat phantom.

4.2 Phantom Requirements

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

4.3 Test to be Performed

For devices with retractable antenna the SAR test shall be performed with the antenna fully extended and fully retracted. Other factors that may affect the exposure shall also be tested. For example, optional antennas or optional battery packs which may significantly change the volume, lengths, flip open/closed, etc. of the device, or any other accessories which might have the potential to considerably increase the peak spatial-average SAR value.

The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional

For measurements in WCDMA, the default test configuration is to establish a radio link between the DUT and a communication test set using a 12.2 kbps RMC configured Test Loop Mode 1 and TPC bits configured to all "1". The SAR will be tested for all bands using a Rel99 call configured to transmit at maximum output power per 3GPP 34.121 [3GPP 34.121].

If required, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA. Maximum output power is verified according to 3GPP 34.121 and SAR must be measured according to these maximum output conditions.

Furthermore, body SAR for HSUPA is measured with E-DCH with H-Set 1 in Sub-test 5 and QPSK for FRC and a 12.2 kbps RMC configuration in Test Loop Mode 1 using the highest body SAR configuration in 12.2 kbps RMC without HSUPA. Maximum output power is verified according to 3GPP 34.121 and SAR must be measured according to these maximum output conditions.

		GSM	GPRS (Class 10)
Band	Channel	Power [dBm]	Power [dBm]
PCS 1900	512	29.48	29.45
	661	29.22	29.17
	810	29.11	29.13

Table 2: Measured conducted power values for PCS 1900 for the Panasonic P-01A.

Modes		HSDPA				WCDMA
Sets		1	2	3	4	
Band	Channel	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]	Power [dBm]
850	4132	22.50	21.50	21.40	20.60	22.40
	4183	22.60	21.60	21.50	20.70	22.60
	4233	22.00	21.00	20.90	20.10	22.00
β_c		2/15	12/15	15/15	15/15	
β_d		15/15	15/15	8/15	4/15	
$\Delta\text{ACK}, \Delta\text{NACK}, \Delta\text{CQI}$		8	8	8	8	
AGV						

Table 3: Measured conducted power values for WCDMA V for the Panasonic P-01A.

SAR measurements in HSDPA are not required since the output power with HSDPA active is not more than 0.25 dB higher than measured without HSDPA.

As stated by the manufacturer, the UE is fully compliant with 3GPP standards defining required UMTS spreading factors.

- The DPCCH spreading factor is 256 per 3GPP TS 25.213 section 4.3.1.2.1.
- The DPDCH spreading factor is dependent on number of DPDCH channels and data rate. For a single channel the spreading factor can range from 4 to 256. For more than one DPDCH channel the spreading factor is 4. Further details are defined by 3GPP in TS 25.213 section 4.3.1.2.1.
- HS-DPCCH spreading factor is 256. Further details can be found in 3GPP TS 25.213 section 4.3.1.2.2.

5 The Measurement System

DASY is an abbreviation of „Dosimetric Assessment System“ and describes a system that is able to determine the SAR distribution inside a phantom of a human being according to different standards. The DASY4 system consists of the following items as shown in Fig: 6. Additional Fig: 7 shows the equipment, similar to the installations in other laboratories.

- Fully compliant with all current measurement standards as stated in Fig. 18
- High precision robot with controller
- Measurement server (for surveillance of the robot operation and signal filtering)
- Data acquisition electronics DAE (for signal amplification and filtering)
- Field probes calibrated for use in liquids
- Electro-optical converter EOC (conversion from the optical into a digital signal)
- Light beam (improving of the absolute probe positioning accuracy)
- Two SAM phantoms filled with tissue simulating liquid
- DASY4 software
- SEMCAD

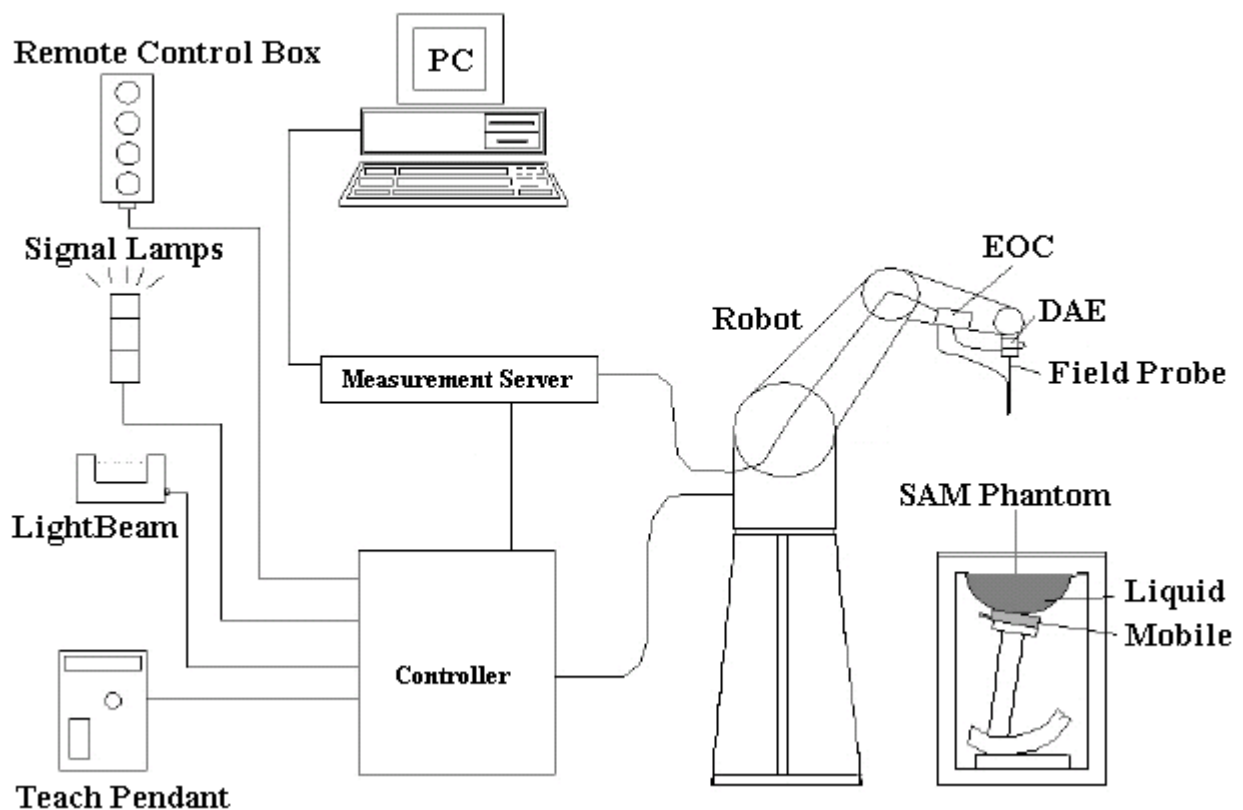


Fig. 6: The DASY4 measurement system.



Fig. 7: The measurement set-up with two SAM phantoms containing tissue simulating liquid.

The mobile phone operating at the maximum power level is placed by a non metallic device holder (delivered from Schmid & Partner) in the above described positions at a shell phantom of a human being. The distribution of the electric field strength E is measured in the tissue simulating liquid within the shell phantom. For this miniaturised field probes with high sensitivity and low field disturbance are used. Afterwards the corresponding SAR values are calculated with the known electrical conductivity σ and the mass density ρ of the tissue in the SEMCAD FDTD software. The software is able to determine the averaged SAR values (averaging region 1 g or 10 g) for compliance testing.

The measurements are done by two scans: first a coarse scan determines the region of the maximum SAR, afterwards the averaged SAR is measured in a second scan within the shape of a cube. The measurement time takes about 20 minutes.

5.1 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM Twin Phantom V4.0) defined by the IEEE SCC-34/SC2 group and delivered by Schmid & Partner Engineering AG is used. The phantom is a fibreglass shell integrated in a wooden table. The thickness of the phantom amounts to $2 \text{ mm} \pm 0.2 \text{ mm}$. It enables the dosimetric evaluation of left and right hand phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a coverage

(polyethylene), which prevents the evaporation of the liquid. The details and the Certificate of conformity can be found in Fig. 19.

5.2 Probe

For the measurements the Dosimetric E-Field Probes ET3DV6 or EX3DV4 with following specifications are used. They are manufactured and calibrated in accordance with FCC [OET 65] and IEEE [IEEE 1528-2003] recommendations annually by Schmid & Partner Engineering AG.

ET3DV6:

- Dynamic range: 5 μ W/g to > 100mW/g
- Tip diameter: 6.8 mm
- Probe linearity: ± 0.2 dB (30 MHz to 3 GHz)
- Axial isotropy: ± 0.2 dB
- Spherical isotropy: ± 0.4 dB
- Distance from probe tip to dipole centers: 2.7 mm
- Calibration range: 450 MHz / 900MHz / 1810MHz / 1950 MHz for head and body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

EX3DV4:

- Dynamic range: 10 μ W/g to > 100mW/g (noise typically < 1 μ W/g)
- Tip diameter: 2.5 mm
- Probe linearity: ± 0.2 dB (30 MHz to 6 GHz)
- Axial isotropy: ± 0.2 dB
- Spherical isotropy: ± 0.4 dB
- Distance from probe tip to dipole centers: 1.0 mm
- Calibration range: 1950 MHz / 2450MHz / 2600 MHz / 3500 MHz / 5200 MHz / 5300 MHz / 5600 MHz / 5800 MHz for head and body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

5.3 Measurement Procedure

The following steps are used for each test position:

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile phone and the base station simulator is established via air interface.
- Measurement of the local E-field value at a fixed location (P1). This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid spacing of 15 mm x 15 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With this values the area of the maximum SAR is calculated by a interpolation scheme (combination of a least-square fitted function and a weighted average method). Additional all peaks within 2 dB of the maximum SAR are searched.
- Around this points, a cube of 30 mm x 30 mm x 30 mm is assessed by measuring 7 x 7 x 7 points whereby the first two measurement points are within the required 10 mm of the surface. With these data, the peak spatial-average SAR value can be calculated within the SEMCAD software.
- The used extrapolation and interpolation routines are all based on the modified Quadratic Shepard's method [DASY4].
- Repetition of the E-field measurement at the fixed location (P1) and repetition of the whole procedure if the two results differ by more than ± 0.21 dB.

5.4 Uncertainty Assessment

Table 4 includes the worst case uncertainty budget suggested by the [IEEE 1528-2003] and determined by Schmid & Partner Engineering AG. The expanded uncertainty (K=2) is assessed to be $\pm 21.7\%$ and is valid up to 3.0 GHz.

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c_i	Standard Uncertainty	v_i^2 or v_{eff}
Measurement System						
Probe calibration	$\pm 5.9 \%$	Normal	1	1	$\pm 5.9 \%$	∞
Axial isotropy	$\pm 4.7 \%$	Rectangular	$\sqrt{3}$	0.7	$\pm 1.9 \%$	∞
Hemispherical isotropy	$\pm 9.6 \%$	Rectangular	$\sqrt{3}$	0.7	$\pm 3.9 \%$	∞
Boundary effects	$\pm 1.0 \%$	Rectangular	$\sqrt{3}$	1	$\pm 0.6 \%$	∞
Linearity	$\pm 4.7 \%$	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$	∞
System detection limit	$\pm 1.0 \%$	Rectangular	$\sqrt{3}$	1	$\pm 0.6 \%$	∞
Readout electronics	$\pm 1.0 \%$	Normal	1	1	$\pm 1.0 \%$	∞
Response time	$\pm 0.8 \%$	Rectangular	$\sqrt{3}$	1	$\pm 0.5 \%$	∞
Integration time	$\pm 2.6\%$	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$	∞
RF ambient conditions	$\pm 3.0 \%$	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Probe positioner	$\pm 0.4 \%$	Rectangular	$\sqrt{3}$	1	$\pm 0.2 \%$	∞
Probe positioning	$\pm 2.9 \%$	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$	∞
Algorithm for max SAR eval.	$\pm 1.0 \%$	Rectangular	$\sqrt{3}$	1	$\pm 0.6 \%$	∞
Test Sample Related						
Device positioning	$\pm 2.9 \%$	Normal	1	1	$\pm 2.9 \%$	145
Device holder	$\pm 3.6 \%$	Normal	1	1	$\pm 3.6 \%$	5
Power drift	$\pm 5.0 \%$	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$	∞
Phantom and Set-up						
Phantom uncertainty	$\pm 4.0 \%$	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$	∞
Liquid conductivity (target)	$\pm 5.0 \%$	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8 \%$	∞
Liquid conductivity (meas.)	$\pm 2.5 \%$	Normal	1	0.64	$\pm 1.6 \%$	∞
Liquid permittivity (target)	$\pm 5.0 \%$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7 \%$	∞
Liquid permittivity (meas.)	$\pm 2.5 \%$	Normal	1	0.6	$\pm 1.5 \%$	∞
Combined Uncertainty					$\pm 10.8 \%$	

Table 4: Uncertainty budget of DASY4.

6 SAR Results

The Tables below contain the measured SAR values averaged over a mass of 1 g.

Phantom Configuration Liquid depth: 16.4 cm	Test Position	SAR _{1g} [W/kg] (Drift[dB])			Temperature	
		Channel 4132 826.40 MHz 22.40 dBm	Channel 4183 836.60 MHz 22.60 dBm	Channel 4233 846.60 MHz 22.00 dBm	Ambient [° C]	Liquid [° C]
Left Side	Cheek		0.722* (0.140)		21.9	20.80
	Tilted		0.145 (-0.005)		21.9	20.80
Right Head	Cheek		0.401* (0.059)		21.9	20.80
	Tilted		0.145* (0.141)		21.9	20.80

Table 5: Measured head phantom results for WCDMA V for the Panasonic P-01A (*Max Cube).

Phantom Configuration Liquid depth: 16.4 cm	Test Position	SAR _{1g} [W/kg] (Drift[dB])			Temperature	
		Channel 512 1850.2 MHz 29.48 dBm	Channel 661 1880.0 MHz 29.22 dBm	Channel 810 1909.8 MHz 29.11 dBm	Ambient [° C]	Liquid [° C]
Left Side	Cheek		0.531* (-0.121)		22.0	20.9
	Tilted		0.120 (-0.029)		22.0	20.9
Right Head	Cheek		0.659* (-0.109)		22.0	20.9
	Tilted		0.151 (0.100)		22.0	20.9

Table 6: Measured head phantom results for PCS 1900 for the Panasonic P-01A (*Max Cube).

Accessory Liquid depth: 15.5 cm	SAR _{1g} [W/kg] (Drift[dB])			Temperature	
	Channel 4132 826.40 MHz 22.40 dBm	Channel 4183 836.60 MHz 22.60 dBm	Channel 4233 846.60 MHz 22.00 dBm	Ambient [° C]	Liquid [° C]
WCDMA V, headset, (Display towards the phantom, 15 mm distance)		0.213* (-0.008)		22.6	21.8
WCDMA V, headset, (Display towards the ground, 15 mm distance)		0.119 (-0.014)		22.6	21.8
WCDMA V (Display towards the phantom, 15 mm distance)		0.239 (0.022)		22.5	21.8
WCDMA V (Display towards the ground, 15 mm distance)		0.158 (0.029)		22.5	21.8

Table 7: Measurement results in body-worn configuration for WCDMA V (FDD) for the Panasonic P-01A (*Max Cube).

Accessory Liquid depth: 16.3 cm	SAR _{1g} [W/kg] (Drift[dB])			Temperature	
	Channel 512 1850.2 MHz 29.48 dBm	Channel 661 1880.0 MHz 29.22 dBm	Channel 810 1909.8 MHz 29.11 dBm	Ambient [° C]	Liquid [° C]
GSM, headset (Display towards the phantom, 15 mm distance)		0.295* (0.049)		22.5	21.8
GSM, headset (Display towards the ground, 15 mm distance)		0.144* (0.029)		22.5	21.8

Table 8: Measurement results in body-worn configuration for GSM 1900 for the Panasonic P-01A (*Max Cube).

Accessory Liquid depth: 16.3 cm	SAR _{1g} [W/kg] (Drift[dB])			Temperature	
	Channel 512 1850.2 MHz 29.45 dBm	Channel 661 1880.0 MHz 29.17 dBm	Channel 810 1909.8 MHz 29.13 dBm	Ambient [° C]	Liquid [° C]
GPRS (Class10) (Display towards the phantom, 15 mm distance)		0.638* (-0.086)		22.3	21.7
GPRS (Class10) (Display towards the ground, 15 mm distance)		0.414* (0.001)		22.3	21.7

Table 9: Measurement results in body-worn configuration for GPRS 1900 (Class 10) for the Panasonic P-01A (*Max Cube).

The “* Max Cube” labeling indicates that during the grid scanning an additional peak was found which was within 2.0 dB of the highest peak. The value of the highest cube is given in the tables above, the value from the second assessed cube is given in the SAR distribution plots (see appendix).

The above mentioned power values are conducted power values, they were measured on the same sample which was prepared for the FCC approval. The values were delivered by Panasonic.

To control the output power stability during the SAR test the used DASY4 system calculates the power drift by measuring the e-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in the above tables labeled as: (Drift[dB]). This ensures that the power drift during one measurement is within 5%. Please note that we add the measured “power drift” values from the DASY4 system since the used CMU 200 delivers only 1 usable position after decimal point and therefore only one power level is listed in the above tables.

7 Evaluation

In Fig. 8 - 11 the head and body worn SAR results for WCDMA V and PCS 1900 given in Table 5 - 9 are summarized and compared to the limit.

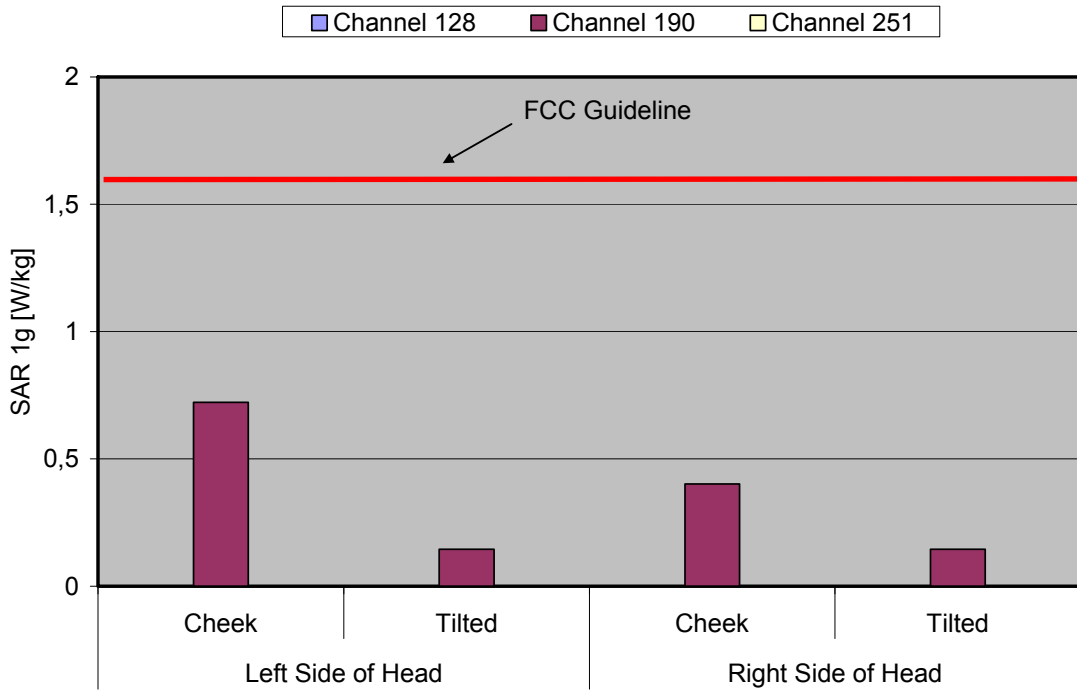


Fig. 8: The measured head phantom SAR values for the Panasonic P-01A for WCDMA V in comparison to the FCC exposure limit.

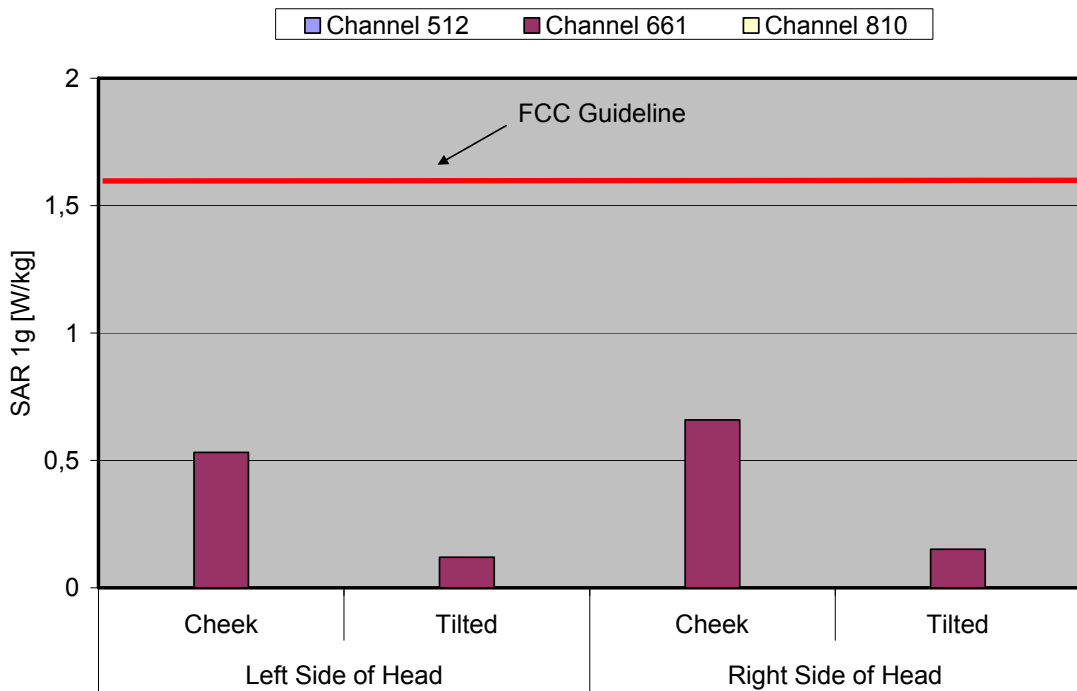


Fig. 9: The measured head phantom SAR values for the Panasonic P-01A for GSM 1900 in comparison to the FCC exposure limit.

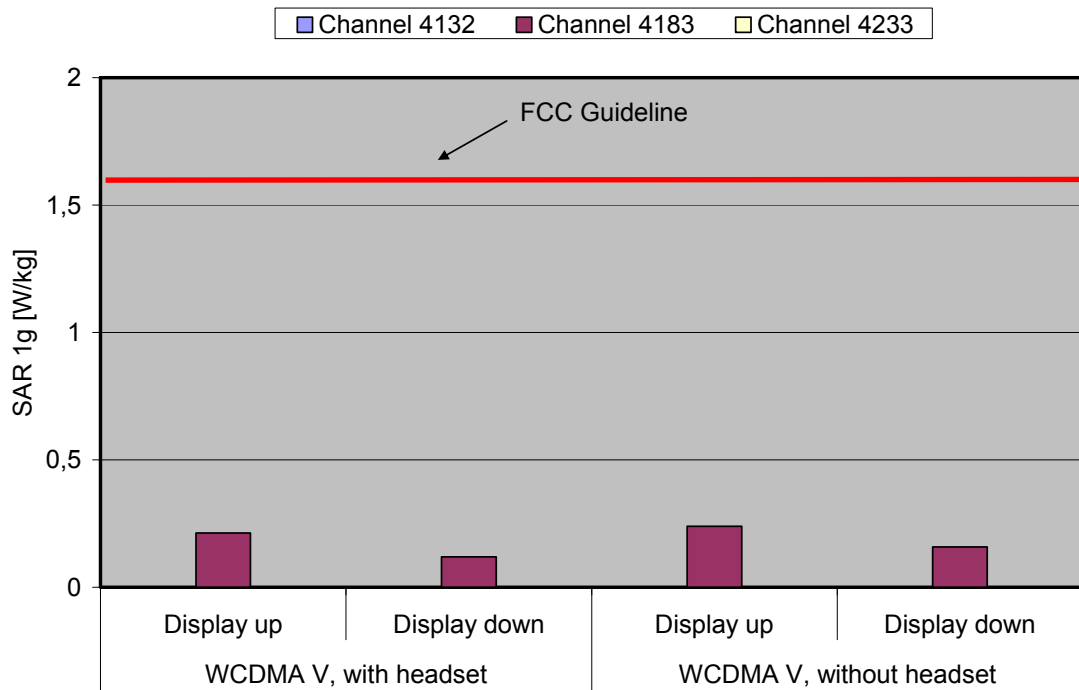


Fig. 10: The measured SAR values in body worn configuration (15 mm distance) for the Panasonic P-01A for WCDMA V in comparison to the FCC exposure limit.

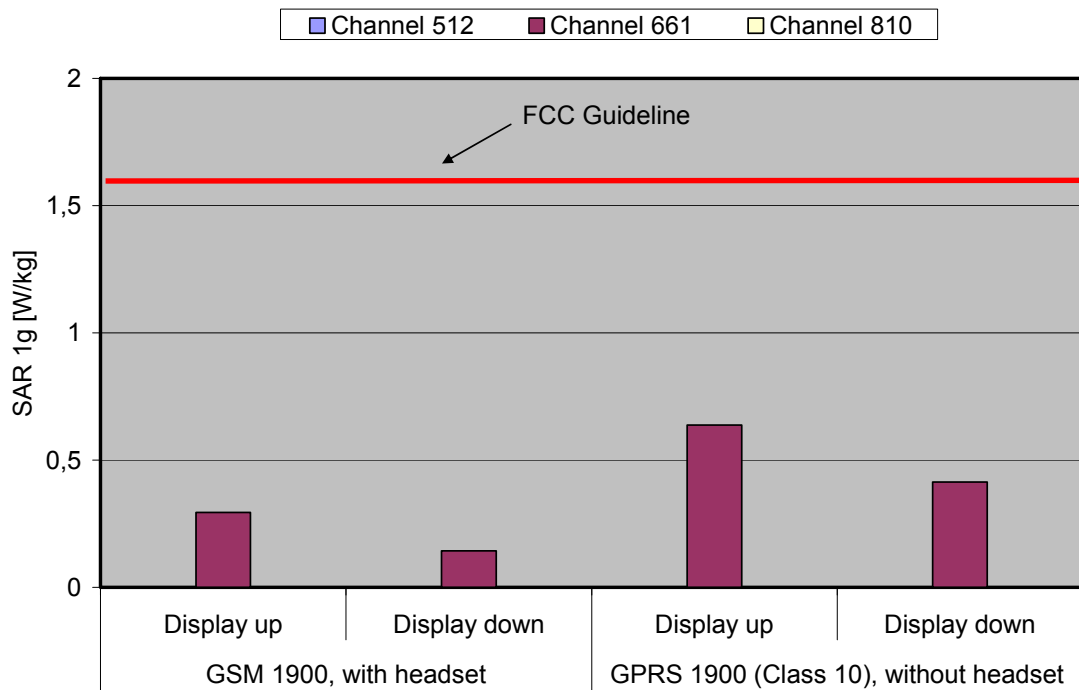


Fig. 11: The measured SAR values in body worn configuration (15 mm distance) for the Panasonic P-01A for GSM 1900 in comparison to the FCC exposure limit.

The Panasonic P-01A mobile phone (FCC ID: UCE208009A) is in compliance with the Federal Communications Commission (FCC) Guidelines [OET 65] for uncontrolled exposure.

The phone was tested in addition to the head positions in the following configurations:

Body worn with the following accessories:

- GSM and WCDMA V (FDD), with headset, display towards the phantom and display towards the ground (15 mm distance)
- GPRS (Class 10), display towards the phantom and display towards the ground (15 mm distance)

Maximum SAR_{1g} = 0.722 W/kg (Head, cheek left, WCDMA V, Channel 4183)

8 Appendix

8.1 Administrative Data

Date of validation: 835 MHz, Head: September 23, 2008
 835 MHz, Body: September 24, 2008
 835 MHz, Body: September 25, 2008
 1900 MHz, Head: September 23, 2008
 1900 MHz, Body: September 24, 2008
 1900 MHz, Body: September 25, 2008

Date of measurement: September 23, 2008 -September 25, 2008

Data stored: Panasonic_6620_715

8.2 Device under Test and Test Conditions

MTE: Panasonic P-01A, identical prototype

Date of receipt: September 23, 2008

IMEI: 359946010018316

Hardware version number: Rev D

Software version number: B-WN907A-01.02.004, 08-2H_CPF_Cv0103101

FCC ID: UCE208009A

Equipment class: Portable device

RF exposure environment: General Population/Uncontrolled

Power supply: Internal Battery (Other batteries not available)

Antenna: Antenna Type: integrated

Tested Accessories, Body: Personal Hands-free (stereo):
 Flat-plug Stereo Earphone Set P01

Measured Standards: WCDMA V; GSM 1900

Operational Mode Class GSM: B (GPRS and GSM, but not simultaneously)

GPRS Multislot Class: 10

Method to establish a call: GSM 1900 & WCDMA: Basestation simulator, using the air interface

Modulation: GSM: GMSK, WCDMA (FDD): QPSK

Power Class: WCDMA V (FDD) 850: 3, tested with max.allow. UE Power of 33dBm
 GSM 1900: 1, tested with power level 0

Bluetooth: Output power below 12 mW, SAR measurements not required

Panasonic P-01A	TX Range [MHz]	RX Range [MHz]	Used Channels [low, middle, high]	Used Crest Factor
WCDMA V (FDD)	826.4 – 846.6	871.4 – 891.6	4132, 4183, 4233	1
GSM 1900	1850.2 – 1909.8	1930.2 – 1989.8	512, 661, 810	8
GPRS 1900	1850.2 – 1909.8	1930.2 – 1989.8	512, 661, 810	4

Used Phantom: SAM Twin Phantom V4.0, as defined by the IEEE SCC-34/SC2 group and delivered by Schmid & Partner Engineering AG

8.3 Tissue Recipes

The following recipes are provided in percentage by weight.

835 MHz, Head:	41.45 %	De-Ionized Water
	1.45 %	Salt
	56.00 %	Sugar
	00.10 %	Preventol D7
	01.00 %	Hydroxyetyl-Cellulose
835 MHz, Body:	52.40 %	De-Ionized Water
	01.50 %	Salt
	45.00 %	Sugar
	00.10 %	Preventol D7
	01.00 %	Hydroxyetyl-Cellulose
1900 MHz, Head:	45.65 %	Diethylenglykol-monobutylether
	54.00 %	De-Ionized Water
	0.35 %	Salt
1900 MHz, Body:	29.68 %	Diethylenglykol-monobutylether
	70.00 %	De-Ionized Water
	0.32 %	Salt

8.4 Material Parameters

For the measurement of the following parameters the HP 85070B dielectric probe kit is used, representing the open-ended coaxial probe measurement procedure. The measured values should be within $\pm 5\%$ of the recommended values given by the FCC.

Frequency		ϵ_r	σ [S/m]	Temperature	
				Ambient [° C]	Liquid [° C]
835 MHz (Head)	Recommended Value	41.50 ± 2.00	0.90 ± 0.05	20.0 - 26.0	-
	Measured Value	41.90	0.92	21.9	20.8
835 MHz (Body) (Sept. 24, 2008)	Recommended Value	55.2 ± 2.76	0.97 ± 0.05	20.0 - 26.0	-
	Measured Value	52.70	0.99	22.5	21.8
835 MHz (Body) (Sept. 25, 2008)	Recommended Value	55.2 ± 2.76	0.97 ± 0.05	20.0 - 26.0	-
	Measured Value	53.90	1.00	22.6	21.8

Table 10: Parameters of the tissue simulating liquids for the 835 MHz validation.

Frequency		ϵ_r	σ [S/m]	Temperature	
				Ambient [° C]	Liquid [° C]
1900 MHz (Head)	Recommended Value	40.00 ± 2.00	1.40 ± 0.07	20.0 - 26.0	-
	Measured Value	41.60	1.45	21.7	20.8
1900 MHz (Body) (Sept. 24, 2008)	Recommended Value	53.30 ± 2.60	1.52 ± 0.07	20.0 - 26.0	-
	Measured Value	54.40	1.56	22.3	21.6
1900 MHz (Body) (Sept. 25, 2008)	Recommended Value	53.30 ± 2.60	1.52 ± 0.07	20.0 - 26.0	-
	Measured Value	53.50	1.55	22.5	21.8

Table 11: Parameters of the tissue simulating liquids for the 1900 MHz validation.

Frequency		ϵ_r	σ [S/m]	Temperature	
				Ambient [° C]	Liquid [° C]
836.6 MHz (Head)	Recommended Value	41.50 ± 2.00	0.90 ± 0.05	20.0 - 26.0	-
	Measured Value	41.90	0.92	21.9	20.8
836.6 MHz (Body) (Sept. 24, 2008)	Recommended Value	55.2 ± 2.76	0.97 ± 0.05	20.0 - 26.0	-
	Measured Value	52.70	0.99	22.5	21.8
836.6 MHz (Body) (Sept. 25, 2008)	Recommended Value	55.2 ± 2.76	0.97 ± 0.05	20.0 - 26.0	-
	Measured Value	53.90	1.00	22.6	21.8

Table 12: Parameters of the tissue simulating liquids for the WCDMA V measurements.

Frequency		ϵ_r	σ [S/m]	Temperature	
				Ambient [° C]	Liquid [° C]
1880.0 MHz (Head)	Recommended Value	40.00 ± 2.00	1.40 ± 0.07	20.0 - 26.0	-
	Measured Value	41.70	1.42	21.7	20.8
1880.0 MHz (Body) (Sept. 24, 2008)	Recommended Value	53.30 ± 2.60	1.52 ± 0.07	20.0 - 26.0	-
	Measured Value	54.50	1.54	22.3	21.6
1880.0 MHz (Body) (Sept. 25, 2008)	Recommended Value	53.30 ± 2.60	1.52 ± 0.07	20.0 - 26.0	-
	Measured Value	53.50	1.51	22.5	21.8

Table 13: Parameters of the tissue simulating liquids for the GSM 1900 measurements.

8.5 Simplified Performance Checking

The simplified performance check was realized using the dipole validation kits. The input power of the dipole antennas were 250 mW (cw signal) and they were placed under the flat part of the SAM phantom. The target and measured results are listed in the Table 14 - 15 and shown in Fig. 12 – 17. The target values were adopted from the manufactures calibration certificates which are attached in the appendix. Table 16 includes the uncertainty assessment for the system performance checking which was suggested by the [IEEE 1528-2003] and determined by Schmid & Partner Engineering AG. The expanded uncertainty (K=2) is assessed to be $\pm 18.4\%$.

Available Dipoles		SAR _{1g} [W/kg]	ϵ_r	σ [S/m]
D835V2, SN #437	Target Values Head	2.38	41.60	0.90
D835V2, SN #437	Target Values Body	2.55	54.10	1.00
D1900V2, SN #535	Target Values Head	9.18	38.40	1.40
D1900V2, SN #5d051		9.23	39.30	1.46
D1900V2, SN #535	Target Values Body	9.59	51.80	1.54
D1900V2, SN #5d051		9.26	54.30	1.56

Table 14: Dipole target results as given by the manufactures calibration certificates.

Used Dipoles		SAR _{1g} [W/kg]	ϵ_r	σ [S/m]	Temperature	
					Ambient [° C]	Liquid [° C]
835 MHz, SN:# 437 (September 23, 2008)	Measured Values Head	2.26	41.90	0.92	21.9	20.8
835 MHz, SN: #437 (September 24, 2008)	Measured Values Body	2.56	52.70	0.99	22.5	21.8
835 MHz, SN: #437 (September 25, 2008)	Measured Values Body	2.56	53.90	1.00	22.5	21.8
1900 MHz, SN: #5d051 (September 23, 2008)	Measured Values Head	9.71	41.60	1.45	22.7	20.8
1900 MHz, SN: #5d051 (September 24, 2008)	Measured Values Body	9.98	54.40	1.56	22.3	21.6
1900 MHz, SN: #5d051 (September 25, 2008)	Measured Values Body	10.00	53.50	1.55	22.3	21.6

Table 15: Measured dipole validation results.

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [230908_y_1579.da4](#)

DUT: Dipole 835 MHz SN437; Type: D835V2; Serial: D835V2 - SN:437

Program Name: System Performance Check at 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(6.53, 6.53, 6.53); Calibrated: 23.01.2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 08.02.2008
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.45 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.5 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 2.26 mW/g; SAR(10 g) = 1.45 mW/g

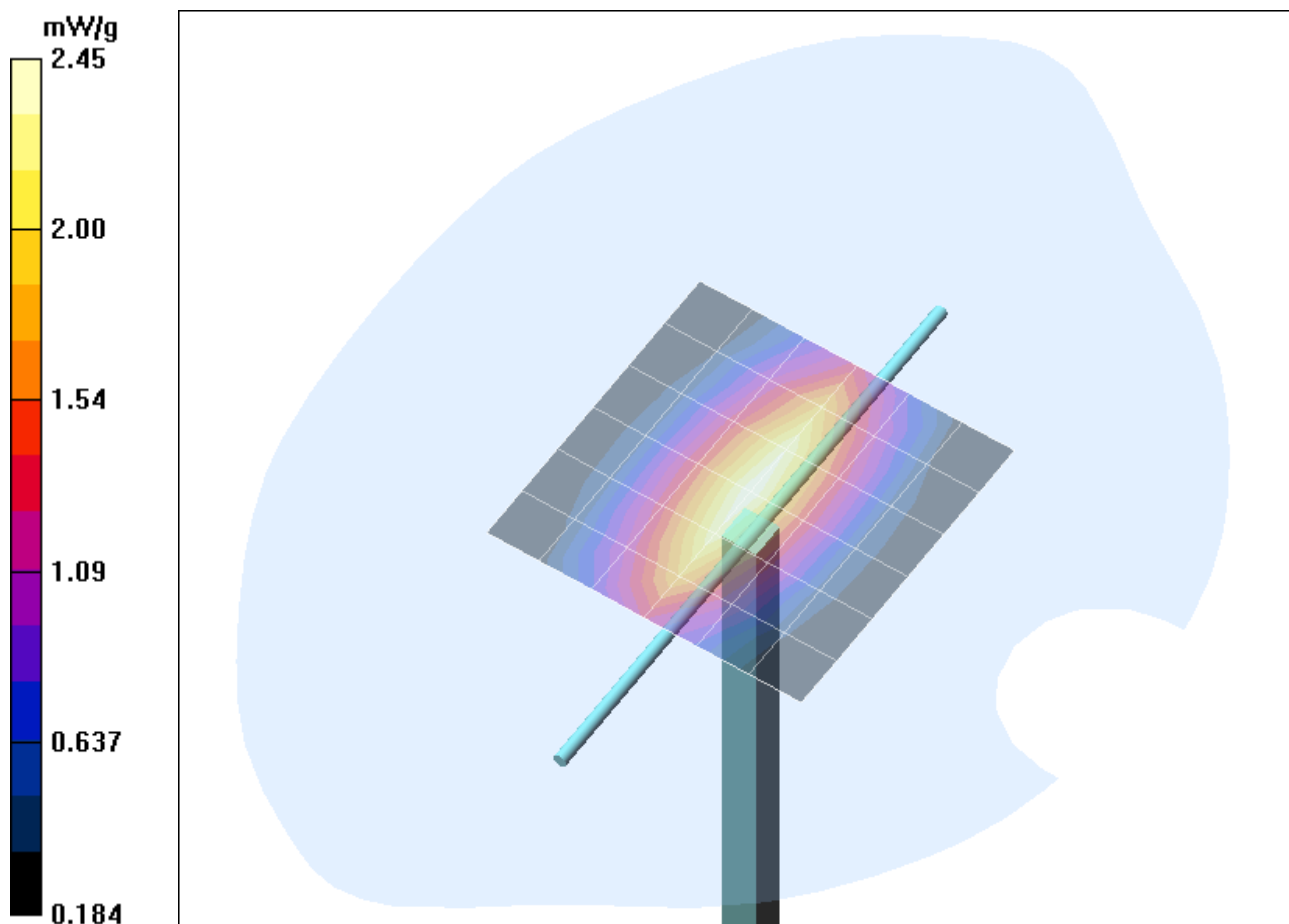


Fig. 12: Validation measurement 835 MHz Head (September 23, 2008), coarse grid. Ambient Temperature: 21.9° C, Liquid Temperature: 20.8° C.

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: [240908_y_1579.da4](#)

DUT: Dipole 835 MHz SN437; Type: D835V2; Serial: D835V2 - SN:437

Program Name: System Performance Check at 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(6.24, 6.24, 6.24); Calibrated: 23.01.2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 08.02.2008
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.75 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.2 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.67 mW/g

Maximum value of SAR (measured) = 2.77 mW/g

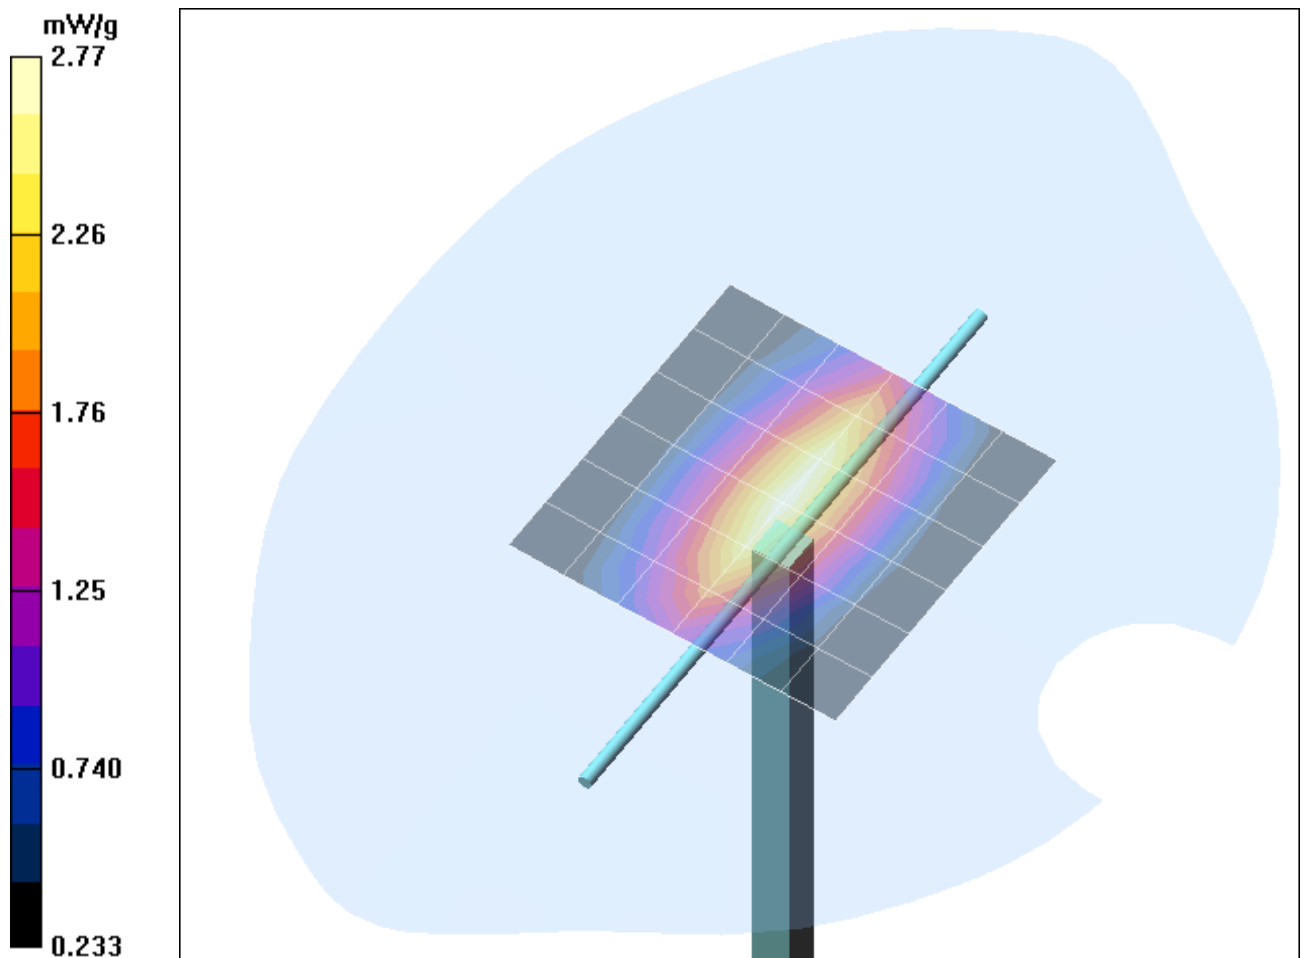


Fig. 13: Validation measurement 835 MHz Body (September 24, 2008), coarse grid. Ambient Temperature: 22.5° C, Liquid Temperature: 21.8° C.

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: [250908_y_1579.da4](#)

DUT: Dipole 835 MHz SN437; Type: D835V2; Serial: D835V2 - SN:437

Program Name: System Performance Check at 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(6.24, 6.24, 6.24); Calibrated: 23.01.2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 08.02.2008
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.77 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.0 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 3.72 W/kg

SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.67 mW/g

Maximum value of SAR (measured) = 2.78 mW/g

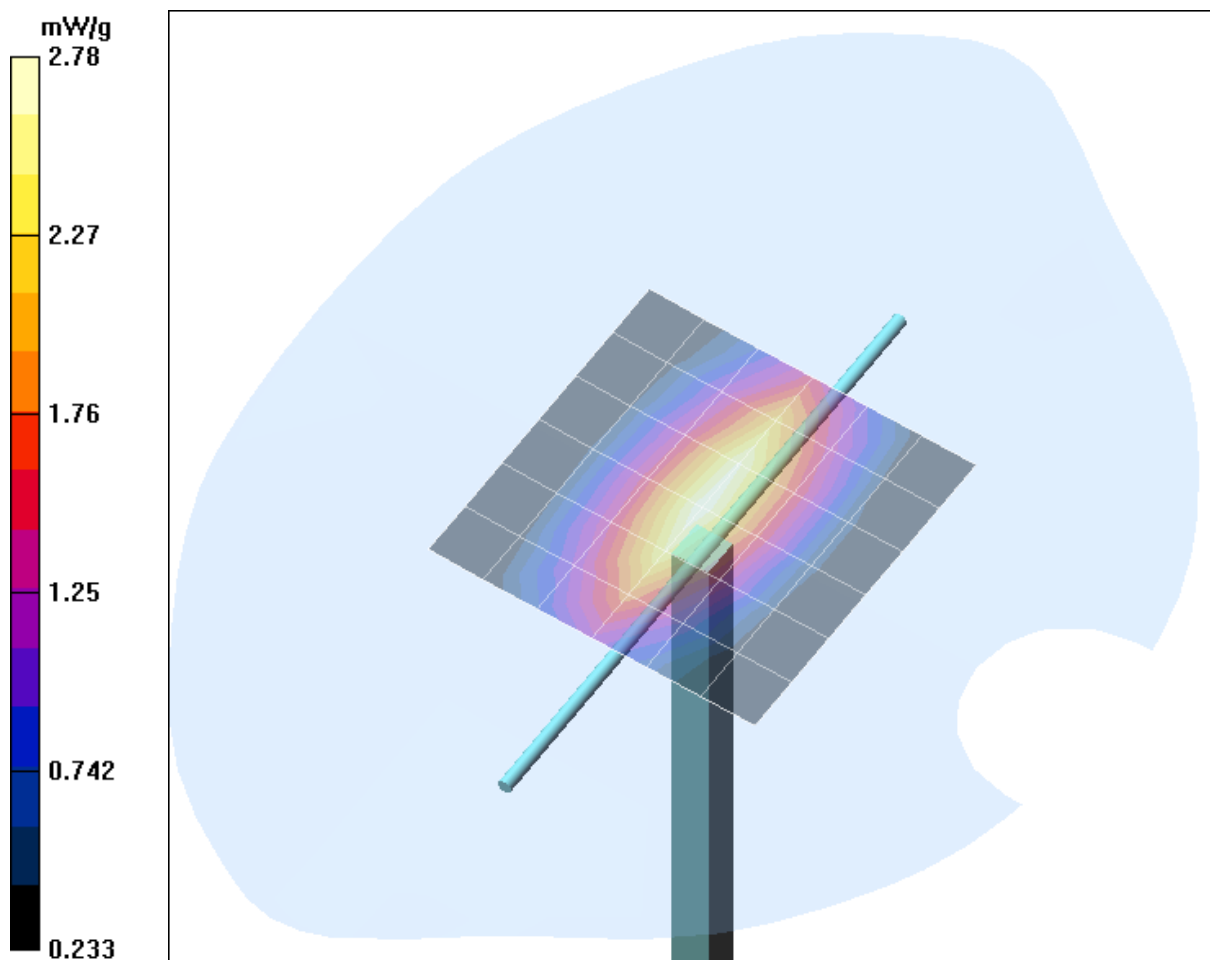


Fig. 14: Validation measurement 835 MHz Body (September 25, 2008), coarse grid. Ambient Temperature: 22.6° C, Liquid Temperature: 21.8° C.

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [230908_b_1579.da4](#)

DUT: Dipole 1900 MHz SN: 5d051; Type: D1900V2; Serial: D1900V2 - SN5d051

Program Name: System Performance Check at 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(5.25, 5.25, 5.25); Calibrated: 23.01.2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 08.02.2008
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 10.6 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.3 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.71 mW/g; SAR(10 g) = 5.17 mW/g

Maximum value of SAR (measured) = 11.0 mW/g

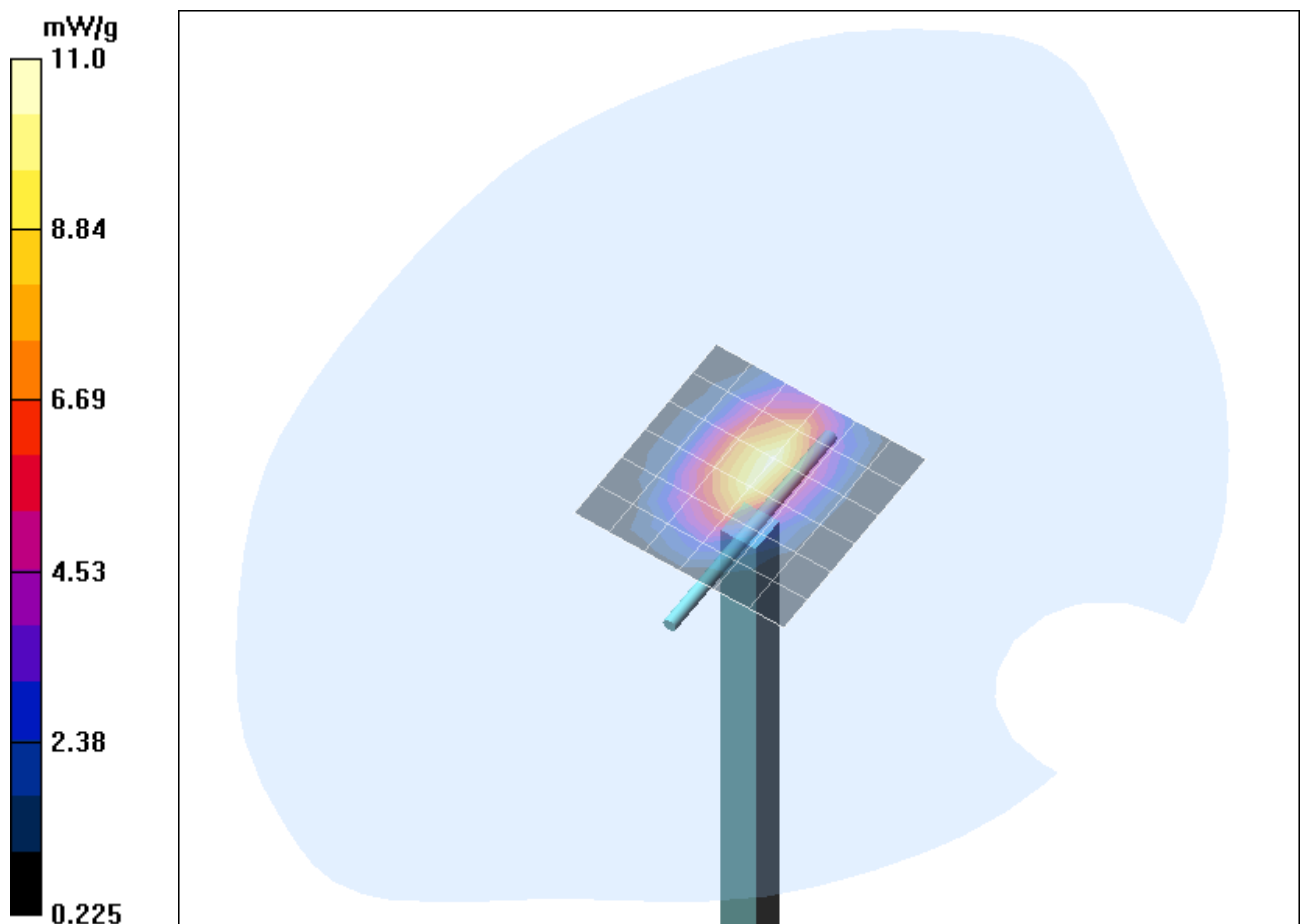


Fig. 15: Validation measurement 1900 MHz Head (September 23, 2008), coarse grid. Ambient Temperature: 21.7° C, Liquid Temperature: 20.8° C.

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [240908_y_1579.da4](#)

DUT: Dipole 1900 MHz SN: 5d051; Type: D1900V2; Serial: D1900V2 - SN5d051

Program Name: System Performance Check at 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 54.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.91, 4.91, 4.91); Calibrated: 23.01.2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 08.02.2008
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 11.3 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.8 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.98 mW/g; SAR(10 g) = 5.29 mW/g

Maximum value of SAR (measured) = 11.4 mW/g

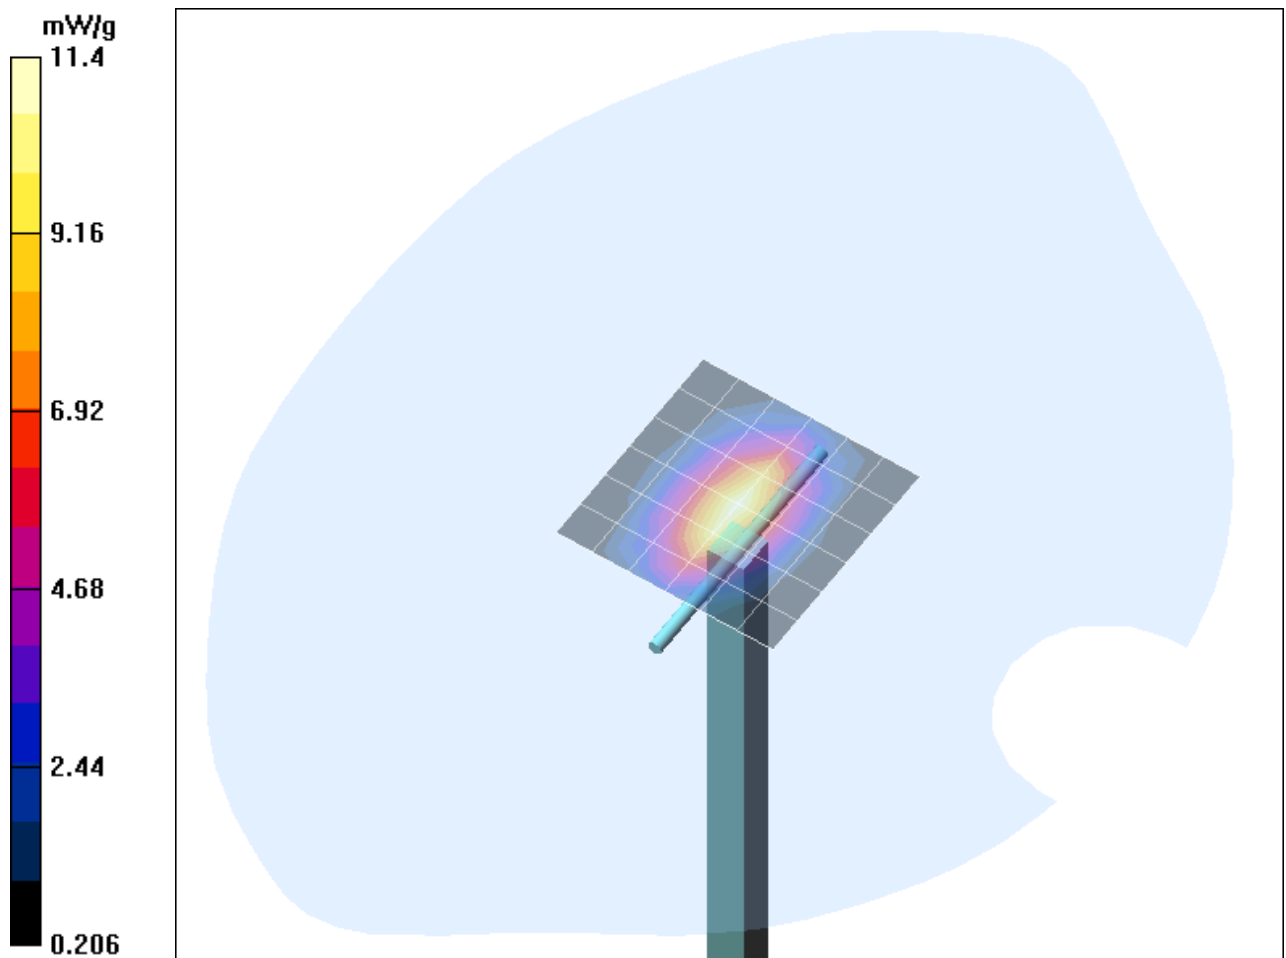


Fig. 16: Validation measurement 1900 MHz Body (September 24, 2008), coarse grid. Ambient Temperature: 22.3° C, Liquid Temperature: 21.6° C.

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [250908_y_1579.da4](#)

DUT: Dipole 1900 MHz SN: 5d051; Type: D1900V2; Serial: D1900V2 - SN5d051

Program Name: System Performance Check at 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.91, 4.91, 4.91); Calibrated: 23.01.2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 08.02.2008
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 11.3 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.1 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 17.1 W/kg

SAR(1 g) = 10 mW/g; SAR(10 g) = 5.28 mW/g

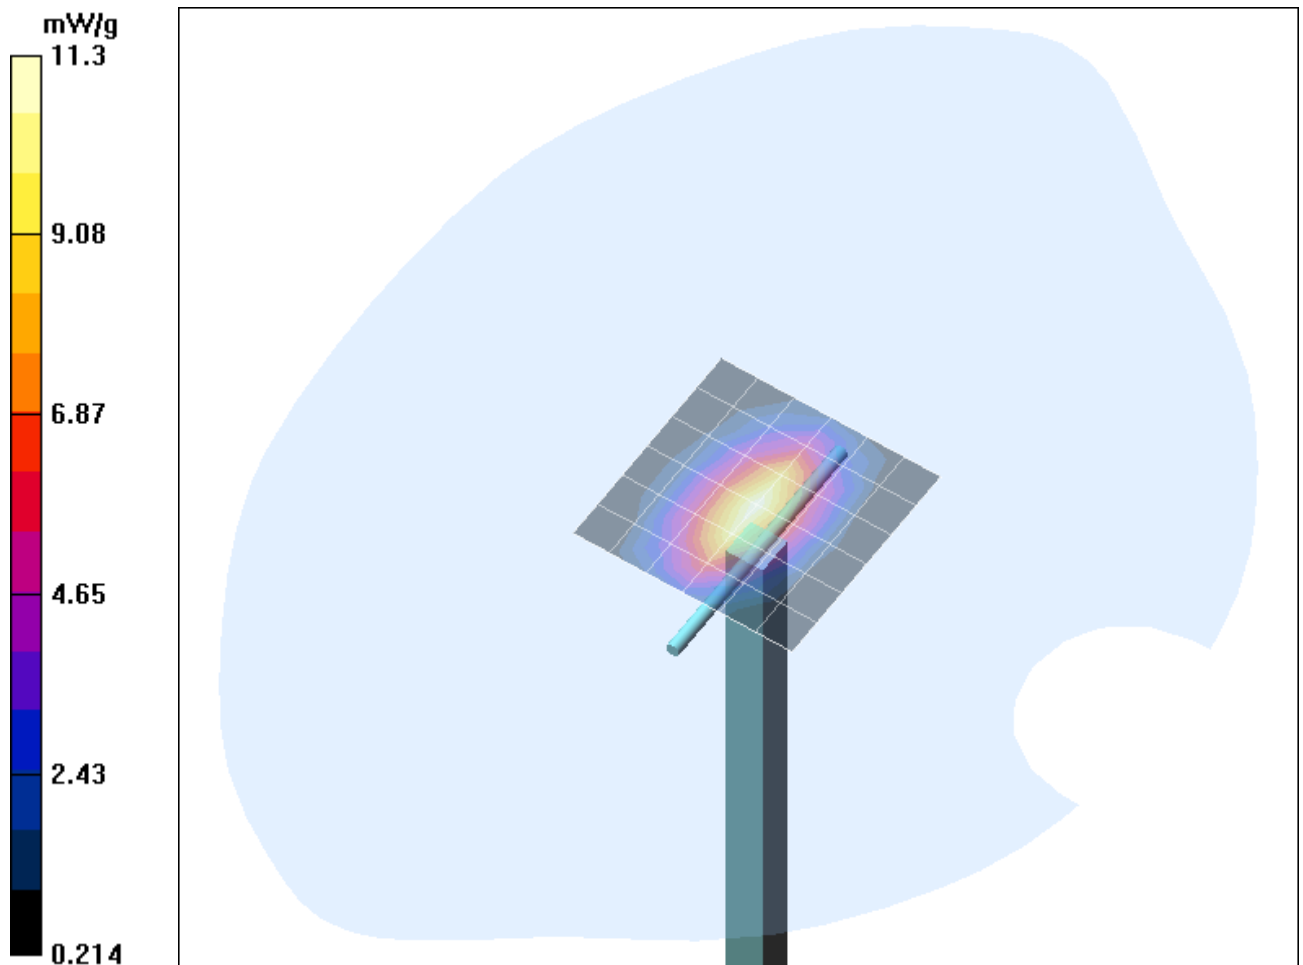


Fig. 17: Validation measurement 1900 MHz Body (September 25, 2008), coarse grid. Ambient Temperature: 22.5° C, Liquid Temperature: 21.8° C.

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c_i	Standard Uncertainty	v_i^2 or v_{eff}
Measurement System						
Probe calibration	± 5.9 %	Normal	1	1	± 5.9 %	∞
Axial isotropy	± 4.7 %	Rectangular	√3	1	± 2.7 %	∞
Hemispherical isotropy	± 0 %	Rectangular	√3	1	± 0 %	∞
Boundary effects	± 1.0 %	Rectangular	√3	1	± 0.6 %	∞
Linearity	± 4.7 %	Rectangular	√3	1	± 2.7 %	∞
System detection limit	± 1.0 %	Rectangular	√3	1	± 0.6 %	∞
Readout electronics	± 0.3 %	Normal	1	1	± 0.3 %	∞
Response time	± 0 %	Rectangular	√3	1	± 0 %	∞
Integration time	± 0%	Rectangular	√3	1	± 0 %	∞
RF ambient conditions	± 3.0 %	Rectangular	√3	1	± 1.7 %	∞
RF ambient reflections	± 3.0 %	Rectangular	√3	1	± 1.7 %	∞
Probe positioner	± 0.4 %	Rectangular	√3	1	± 0.2 %	∞
Probe positioning	± 2.9 %	Rectangular	√3	1	± 1.7 %	∞
Algorithms for max SAR evaluation.	± 1.0 %	Rectangular	√3	1	± 0.6 %	∞
Dipole						
Dipole Axis to Liquid Distance	± 2.0 %	Rectangular	1	1	± 1.2 %	∞
Input power and SAR drift mea.	± 4.7 %	Rectangular	√3	1	± 2.7 %	∞
Phantom and Set-up						
Phantom uncertainty	± 4.0 %	Rectangular	√3	1	± 2.3 %	∞
Liquid conductivity (target)	± 5.0 %	Rectangular	√3	0.64	± 1.8 %	∞
Liquid conductivity (meas.)	± 2.5 %	Normal	1	0.64	± 1.6 %	∞
Liquid permittivity (target)	± 5.0 %	Rectangular	√3	0.6	± 1.7 %	∞
Liquid permittivity (meas.)	± 2.5 %	Normal	1	0.6	± 1.5 %	∞
Combined Uncertainty					± 9.2 %	

Table 16: Uncertainty budget for the system performance check.

8.6 Environment

To comply with the required noise level (less than 12 mW/kg) periodically measurements without a DUT were conducted.

Humidity: 40% ± 5 %

8.7 Test Equipment

Test Equipment	Model	Serial Number	Last Calibration	Next Calibration
DASY4 Systems				
Software Versions DASY4	V4.7	N/A	N/A	N/A
Software Versions SEMCAD	V1.8	N/A	N/A	N/A
Dosimetric E-Field Probe	ET3DV6	1579	01/2008	01/2009
Dosimetric E-Field Probe	EX3DV4	3536	09/2008	09/2009
Data Acquisition Electronics	DAE 3	335	02/2008	02/2009
Data Acquisition Electronics	DAE 4	631	09/2007	09/2008
Phantom	SAM	1059	N/A	N/A
Phantom	SAM	1176	N/A	N/A
Phantom	SAM	1340	N/A	N/A
Phantom	SAM	1341	N/A	N/A
Dipoles				
Validation Dipole	D835V2	437	12/2006	12/2008
Validation Dipole	D1900V2	535	12/2006	12/2008
Validation Dipole	D1900V2	5d051	09/2007	09/2009
Material Measurement				
Network Analyzer	E5071C	MY46103220	01/2008	01/2009
Dielectric Probe Kit	HP85070B	US33020263	N/A	N/A

Table 17: SAR equipment.

Test Equipment	Model	Serial Number	Last Calibration	Next Calibration
Power Meters				
Power Meter, Agilent	E4416A	GB41050414	12/2006	12/2008
Power Meter, Agilent	E4417A	GB41050441	12/2006	12/2008
Power Meter, Anritsu	ML2487A	6K00002319	11/2007	11/2009
Power Meter, Anritsu	ML2488A	6K00002078	11/2007	11/2009
Power Sensors				
Power Sensor, Agilent	E9301H	US40010212	12/2006	12/2008
Power Sensor, Agilent	E9301A	MY41495584	12/2006	12/2008
Power Sensor, Anritsu	MA2481B	031600	12/2007	12/2009
Power Sensor, Anritsu	MA2490A	031565	12/2007	12/2009
RF Sources				
Network Analyzer	Agilent E5071C	MY46103220	01/2008	01/2009
Rohde & Schwarz	SME300	100142	N/A	N/A
Amplifiers				
Mini Circuits	ZHL-42	D012296	N/A	N/A
Mini Circuits	ZHL-42	D031104#01	N/A	N/A
Mini Circuits	ZVE-8G	D031004	N/A	N/A
Radio Tester				
Rohde & Schwarz	CMU200	835305/050	01/2008	01/2009

Table 18: Test equipment, General.

8.8 Certificates of conformity

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Certificate of conformity

Item	Dosimetric Assessment System DASY4
Type No	SD 000 401A, SD 000 402A
Software Version No	DASY 4.7
Manufacturer / Origin	Schmid & Partner Engineering AG Zeughausstrasse 43, CH-8004 Zürich, Switzerland

References

- [1] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
- [2] EN 50361:2001, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz)", July 2001
- [3] IEC 62209 – 1, "Specific Absorption Rate (SAR) in the frequency range of 300 MHz to 3 GHz – Measurement Procedure, Part 1: Hand-held mobile wireless communication devices", February 2005
- [4] IEC 62209 – 2, Draft Version 0.9, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation and Procedures Part 2: Procedure to determine the Specific Absorption Rate (SAR) for ... including accessories and multiple transmitters", December 2004
- [5] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Edition 01-01
- [6] ANSI-C63.19-2006, "American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids", June 2006
- [7] ANSI-C63.19-2007, "American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids", June 2007

Conformity

We certify that this system is designed to be fully compliant with the standards [1 – 7] for RF emission tests of wireless devices.

Uncertainty

The uncertainty of the measurements with this system was evaluated according to the above standards and is documented in the applicable chapters of the DASY4 system handbook.

The uncertainty values represent current state of methodology and are subject to changes. They are applicable to all laboratories using DASY4 provided the following requirements are met (responsibility of the system end user):

- 1) the system is used by an experienced engineer who follows the manual and the guidelines taught during the training provided by SPEAG,
- 2) the probe and validation dipoles have been calibrated for the relevant frequency bands and media within the requested period,
- 3) the DAE has been calibrated within the requested period,
- 4) the "minimum distance" between probe sensor and inner phantom shell and the radiation source is selected properly,
- 5) the system performance check has been successful,
- 6) the operational mode of the DUT is CW, CDMA, FDMA or TDMA (GSM, DCS, PCS, IS136, PDC) and the measurement/integration time per point is ≥ 500 ms,
- 7) if applicable, the probe modulation factor is evaluated and applied according to field level, modulation and frequency,
- 8) the dielectric parameters of the liquid are conformant with the standard requirement,
- 9) the DUT has been positioned as described in the manual.
- 10) the uncertainty values from the calibration certificates, and the laboratory and measurement equipment dependent uncertainties, are updated by end user accordingly.

Date 24.4.2008

Signature / Stamp

Doc No 880 – SD00040XA-Standards_0804 – F

KP/FB

Page 1 (1)

Fig. 18: Certificate of conformity for the used DASY4 system

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Certificate of conformity

Item	Dosimetric Assessment System DASY4
Type No	SD 000 401A, SD 000 402A
Software Version No	4.7
Manufacturer / Origin	Schmid & Partner Engineering AG Zeughausstrasse 43, CH-8004 Zürich, Switzerland

References

- [1] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
- [2] EN 50361:2001, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz)", July 2001
- [3] IEC 62209 – 1, "Specific Absorption Rate (SAR) in the frequency range of 300 MHz to 3 GHz – Measurement Procedure, Part 1: Hand-held mobile wireless communication devices", February 2005
- [4] IEC 62209 – 2, Draft Version 0.9, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation and Procedures Part 2: Procedure to determine the Specific Absorption Rate (SAR) for ... including accessories and multiple transmitters", December 2004
- [5] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Edition 01-01
- [6] ANSI-C63.19-2007, "American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids", June 2007

Conformity

We certify that this system is designed to be fully compliant with the standards [1 – 6] for RF emission tests of wireless devices.

Uncertainty

The uncertainty of the measurements with this system was evaluated according to the above standards and is documented in the applicable chapters of the DASY4 system handbook.

The uncertainty values represent current state of methodology and are subject to changes. They are applicable to all laboratories using DASY4 provided the following requirements are met (responsibility of the system end user):

- 1) the system is used by an experienced engineer who follows the manual and the guidelines taught during the training provided by SPEAG,
- 2) the probe and validation dipoles have been calibrated for the relevant frequency bands and media within the requested period,
- 3) the DAE has been calibrated within the requested period,
- 4) the "minimum distance" between probe sensor and inner phantom shell and the radiation source is selected properly,
- 5) the system performance check has been successful,
- 6) the operational mode of the DUT is CW, CDMA, FDMA or TDMA (GSM, DCS, PCS, IS136, PDC) and the measurement/integration time per point is ≥ 500 ms,
- 7) the dielectric parameters of the liquid are conformant with the standard requirement,
- 8) the DUT has been positioned as described in the manual.
- 9) the uncertainty values from the calibration certificates, and the laboratory and measurement equipment dependent uncertainties, are updated by end user accordingly.

Date 15.8.2007

Signature / Stamp

s p e a g
 Schmid & Partner Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com, http://www.speag.com

Fig. 19: Certificate of conformity for the used SAM phantom.

8.9 Pictures of the device under test

Fig. 20 – 22 show the device under test, used and available accessories.

CONFIDENTIAL

Please refer to appendix
SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures

Fig. 20: Pictures of the device under test.

CONFIDENTIAL

Please refer to appendix
SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures

Fig. 21: Side view of the device, open configuration.

CONFIDENTIAL

Please refer to appendix
SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures

Fig. 22: Used headset, Stereo Earphone Set P01

8.10 Test Positions for the Device under Test

Fig. 23 - 30 show the test positions for the SAR measurements.

CONFIDENTIAL

Please refer to appendix
SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures

Fig. 23: Cheek position, left side.

CONFIDENTIAL

Please refer to appendix
SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures

Fig. 24: Tilted position, left side.

CONFIDENTIAL

Please refer to appendix
SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures

Fig. 25: Cheek position, right side.

CONFIDENTIAL

Please refer to appendix
SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures

Fig. 26: Tilted position, right side

CONFIDENTIAL

Please refer to appendix
[SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures](#)

Fig. 27: Body worn configuration, GSM and WCDMA V mode with headset, display towards the phantom.

CONFIDENTIAL

Please refer to appendix
[SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures](#)

Fig. 28: Body worn configuration, GSM and WCDMA V mode with headset, display towards the ground.

CONFIDENTIAL

Please refer to appendix
[SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures](#)

Fig. 29: Body worn configuration, GPRS and WCDMA V mode without headset, display towards the phantom.

CONFIDENTIAL

Please refer to appendix
[SAR_Report_Panasonic_6620_715_FCC_WCDMA V_1900_P-01A_Pictures](#)

Fig. 30: Body worn configuration, GPRS and WCDMA V mode without headset, display towards the ground.

8.11 Pictures to demonstrate the required liquid depth

Fig. 31 - 32 show the liquid depth in the used SAM phantom.

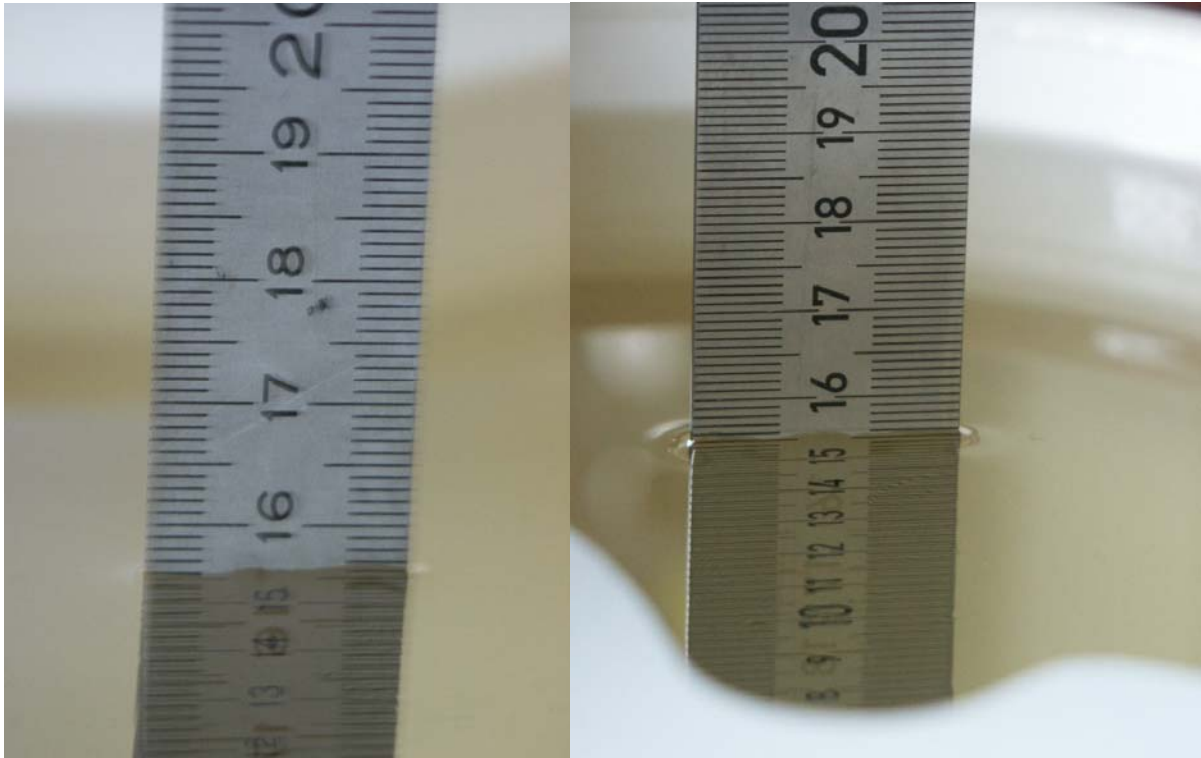


Fig. 31: Liquid depth for GSM 850 head and body measurements.



Fig. 32: Liquid depth for GSM 1900 head and body measurements.

9 References

- [OET 65] Federal Communications Commission: Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01), FCC, 2001.
- [IEEE C95.1-1999] IEEE Std C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, Inst. of Electrical and Electronics Engineers, Inc., 1999.
- [IEEE C95.1-2005] IEEE Std C95.1-2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, Inst. of Electrical and Electronics Engineers, Inc., 2005.
- [ICNIRP 1998] ICNIRP: Guidelines for Limiting Exposure to Time-varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz), In: Health Physics, Vol. 74, No. 4, 494-522, 1998.
- [IEEE 1528-2003] IEEE Std 1528-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques. 1528-2003, December 19, 2003, The Institute of Electrical and Electronics Engineers.
- [NIST 1994] NIST: Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results, Technical Note 1297 (TN1297), United States Department of Commerce Technology Administration, National Institute of Standards and Technology, 1994.
- [DASY4] Schmid & Partner Engineering AG: DASY4 Manual. April 2008
- [FCC 96-326] FCC 96-326, ET Docket No. 93-62, Report and Order, August 1, 1996
- [3G Devices] Laboratory Division, Office of Engineering and Technology, Federal Communications Commission: SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-DO – WCDMA / HSDPA- (Rev. 2; October 2007)
- [3GPP 34.121] ETSI TS 134 121-1 V7.4.0, Universal Mobile Telecommunications System (UMTS) ; User Equipment (UE) conformance specification; Radio transmission and reception (FDD)
- [KDB 648474] 648474 D01 SAR Handsets Multi Xmitter and Ant v01r03: SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas, May 2008, Laboratory Division FCC