



**TEST REPORT  
FROM  
RFI GLOBAL SERVICES LTD**

Test of: Softbank 941P  
To: FCC Part 15.225: 2008 Subpart C

**Test Report Serial No:**  
RFI/RPT2/RP76421JD07A

**Supersedes Test Report Serial No:**  
RFI-RPT1-RP76421JD07A

<b>This Test Report Is Issued Under The Authority Of Chris Guy, Operations Manager - Cellular &amp; Wireless:</b> 	
<b>Checked By:</b>	Tony Henriques
<b>Signature:</b>	 pp
<b>Date of Issue:</b>	31 December 2009

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

**RFI Global Services Ltd**

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG  
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001  
Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number:2117901

This page has been left intentionally blank.

**Table of Contents**

**1. Customer Information ..... 4**

**2. Summary of Testing ..... 5**

**3. Equipment Under Test (EUT) ..... 6**

**4. Operation and Monitoring of the EUT during Testing ..... 8**

**5. Measurements, Examinations and Derived Results ..... 9**

**6. Measurement Uncertainty ..... 20**

**Appendix 1. Test Equipment Used ..... 21**

**1. Customer Information**








<b>Company Name:</b>	Panasonic Mobile Communications Development of Europe Ltd
<b>Address:</b>	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom



## 2. Summary of Testing

### 2.1. General Information

<b>Specification Reference:</b>	47CFR15.225
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2008: Part 15 Subpart C (Radio Frequency Devices) - Section 15.225
<b>Specification Reference:</b>	47CFR15.107 and 47CFR15.109
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2008: Part 15 Subpart B (Radio Frequency Devices) - Sections 15.107 and 15.109
<b>Site Registration:</b>	FCC: 209735
<b>Location of Testing:</b>	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
<b>Test Dates:</b>	05 December 2009 to 15 December 2009

### 2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Port Type	Result
Part 15.107(a)	Receiver / Idle Mode AC Conducted Spurious Emissions	AC Mains	
Part 15.109(a) 15.225(d)	Receiver / Idle Mode Radiated Spurious Emissions	Enclosure	
Part 15.225(a)(b)(c)(d)	Transmitter Fundamental Field Strength	Antenna	
Part 15.209(a), 15.225(d)	Transmitter Radiated Spurious Emissions	Antenna	
Part 15.209(a), 15.225(c)(d)	Transmitter Band Edge Radiated Emissions	Antenna	
Part 2.1049	Transmitter 20 dB Bandwidth	Antenna	
Part 15.225(e)	Transmitter Frequency Stability (Temperature & Voltage Variation)	Antenna	

**Key to Results**  
 = Complied     = Did not comply

### 2.3. Methods and Procedures

<b>Reference:</b>	ANSI C63.4 (2003)
<b>Title:</b>	American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

### 2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### 3. Equipment Under Test (EUT)

#### 3.1. Identification of Equipment Under Test (EUT)

<b>Brand Name:</b>	SoftBank
<b>Model Name or Number:</b>	941P
<b>IMEI Number:</b>	004401220894337
<b>Hardware Version Number:</b>	Rev C
<b>Software Version Number:</b>	941PVA16
<b>FCC ID Number:</b>	UCE209023A

<b>Description:</b>	AC Charger
<b>Brand Name:</b>	SoftBank
<b>Model Name or Number:</b>	ZTDAA1

<b>Description:</b>	DC Charger
<b>Brand Name:</b>	SoftBank
<b>Model Name or Number:</b>	PMJAA1

<b>Description:</b>	USB Data Cable
<b>Brand Name:</b>	SoftBank
<b>Model Name or Number:</b>	ZTFE01

<b>Description:</b>	Personal Hands-free
<b>Brand Name:</b>	SoftBank
<b>Model Name or Number:</b>	ZTCK01

<b>Description:</b>	Personal Hands-free Converter
<b>Brand Name:</b>	SoftBank
<b>Model Name or Number:</b>	PMLAJ1

<b>Description:</b>	Battery
<b>Brand Name:</b>	SoftBank
<b>Model Name or Number:</b>	PMBAS1

<b>Description:</b>	Micro SD memory card
<b>Brand Name:</b>	Not Stated
<b>Model Name or Number:</b>	Not Stated

### **3.2. Description of EUT**

The Equipment Under Test was a dual mode (W-CDMA FDDI/GSM900/1800/1900MHz) cellular mobile telephone with Bluetooth, WLAN and RFID.

### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

### **3.4. Additional Information Related to Testing**

<b>Technology Tested:</b>	RFID	
<b>Channel Spacing:</b>	Single channel device	
<b>Transmit Frequency:</b>	13.56 MHz	
<b>Receive Frequency:</b>	13.56 MHz	
<b>Power Supply Requirement(s):</b>	Minimum (V)	3.4
	Nominal (V)	3.7
	Maximum (V)	4.2
<b>Tested Temperature (°C):</b>	Minimum (Temp):	-20
	Maximum (Temp)	+50

### **3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

<b>Description:</b>	Dummy battery
<b>Model Name or Number:</b>	Not stated
<b>Serial Number:</b>	Not stated

<b>Description:</b>	Laptop PC
<b>Brand Name:</b>	Sony VAIO PCG-551N
<b>Model Name or Number:</b>	283506 2 1208763
<b>Serial Number:</b>	Not stated

## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.
- Constantly transmitting at full power with a modulated carrier in RFID test mode.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration:

- The RFID transmitter was enabled using a bespoke application on a laptop PC supplied by the customer.
- Idle mode and transmitter mode radiated spurious emissions tests were performed with the PHF connected to the EUT, with the TV antenna extended as this was found to be the worst case during prescans. All accessories were individually connected with the TV antenna extended and retracted during prescan measurements to determine the worst case combination.
- As the EUT is not capable of transmitting while charging, no AC Mains Conducted Emissions (150 kHz to 30 MHz) test was performed in transmit mode.



## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

**5.2. Test Results****5.2.1. Receiver / Idle Mode AC Conducted Spurious Emissions****Test Summary:**

<b>FCC Part:</b>	15.107(a)
<b>Test Method Used:</b>	As detailed in ANSI C63.4 Section 7 and relevant annexes

**Environmental Conditions:**

<b>Temperature (°C):</b>	26
<b>Relative Humidity (%):</b>	30


**Results: Quasi Peak Detector Measurements**

Frequency (MHz)	Line	Quasi Peak Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.154500	Live	44.3	65.8	21.5	Complied
1.234500	Neutral	35.2	56.0	20.8	Complied
1.396500	Neutral	36.9	56.0	19.1	Complied
1.608000	Live	37.2	56.0	18.8	Complied
1.878000	Live	41.1	56.0	14.9	Complied
1.932000	Neutral	41.5	56.0	14.5	Complied
2.098500	Neutral	39.7	56.0	16.3	Complied
2.413500	Neutral	33.7	56.0	22.3	Complied
3.547500	Neutral	35.5	56.0	20.5	Complied
3.660000	Neutral	35.5	56.0	20.5	Complied

**Results: Average Detector Measurements**

Frequency (MHz)	Line	Average Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.159000	Live	30.8	55.5	24.7	Complied
1.630500	Live	30.1	46.0	15.9	Complied
1.824000	Live	29.3	46.0	16.7	Complied
1.878000	Live	29.8	46.0	16.2	Complied
2.085000	Neutral	29.3	46.0	16.7	Complied

**Receiver / Idle Mode AC Conducted Spurious Emissions (continued)**

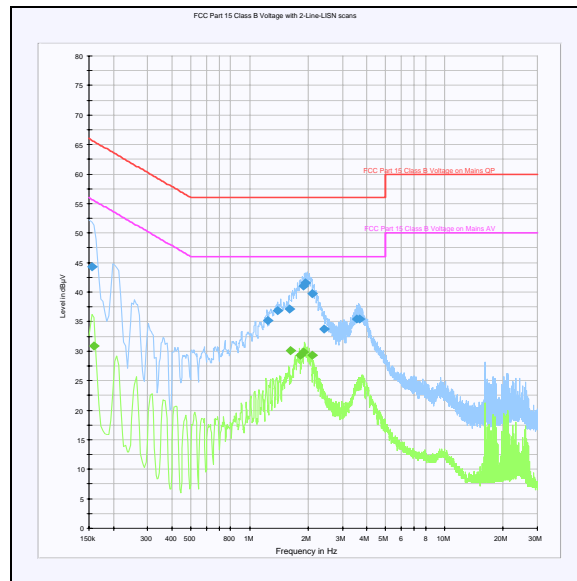

*This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.*

**5.2.2. Receiver / Idle Mode Radiated Spurious Emissions****Test Summary:**

<b>FCC Part:</b>	15.109, 15.225(d)
<b>Test Method Used:</b>	As detailed in ANSI C63.4 Section 8 and relevant annexes
<b>Frequency Range:</b>	9 kHz to 1000 MHz

**Environmental Conditions:**

<b>Temperature (°C):</b>	26
<b>Relative Humidity (%):</b>	29





**Results:**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
41.509	Vertical	17.6	40.0	22.4	Complied
55.837	Vertical	22.9	40.0	17.1	Complied
108.086	Vertical	23.1	43.5	20.4	complied

**Note(s):**

- Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by making the measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
- A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.

**Receiver / Idle Mode Radiated Spurious Emissions (continued)**

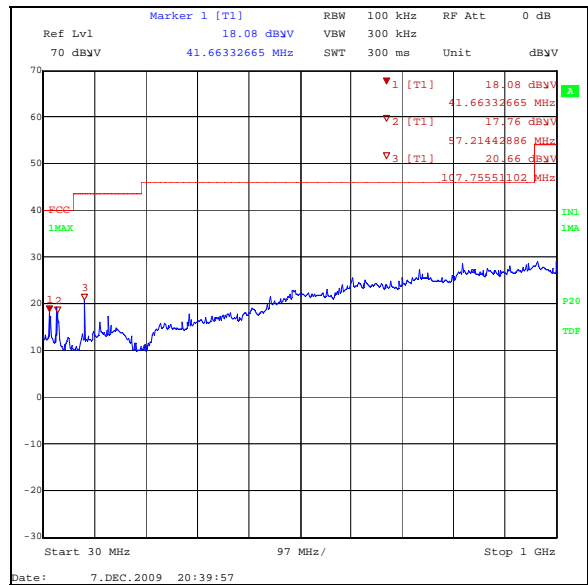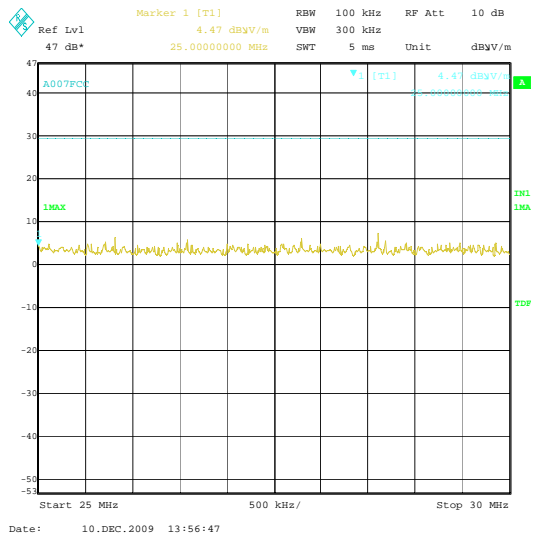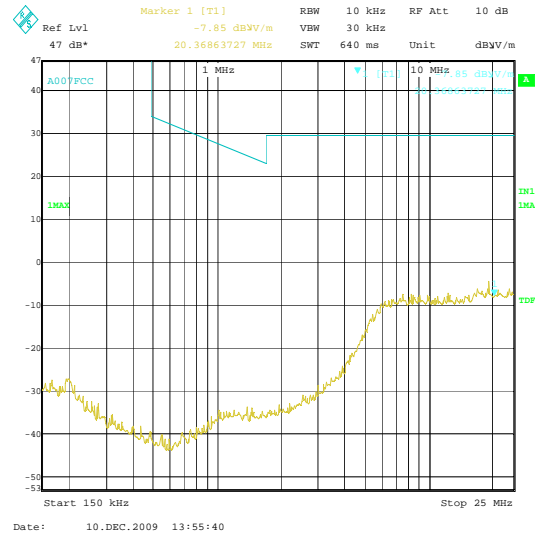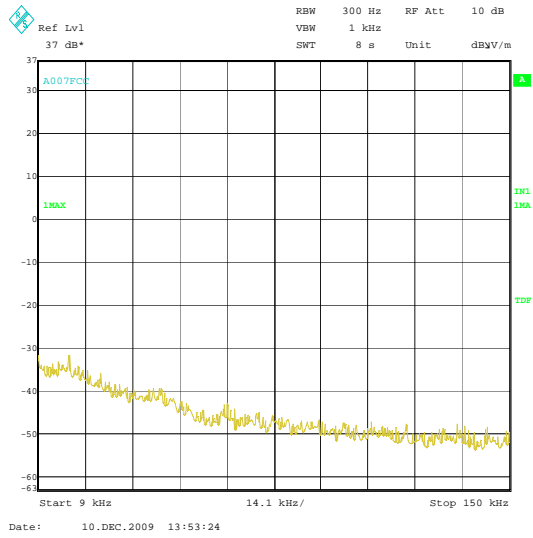

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

**5.2.3. Transmitter Fundamental Field Strength**

**Test Summary:**

FCC Part:	15.225 (a)(b)(c)(d)
-----------	---------------------

**Environmental Conditions:**


Temperature (°C):	25
Relative Humidity (%):	31

**Results:**

Frequency (MHz)	Antenna Polarity	Q-P Level (dB $\mu$ V/m)	Limit at 30 m (dB $\mu$ V/m)	Margin (dB)	Result
13.56	90° to EUT	11.4	84.0	72.6	Complied

**Note(s):**

- Measurements were performed at 3 metres and results extrapolated to 30 metres.
- The limit is specified at a test distance of 30 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by making the measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.

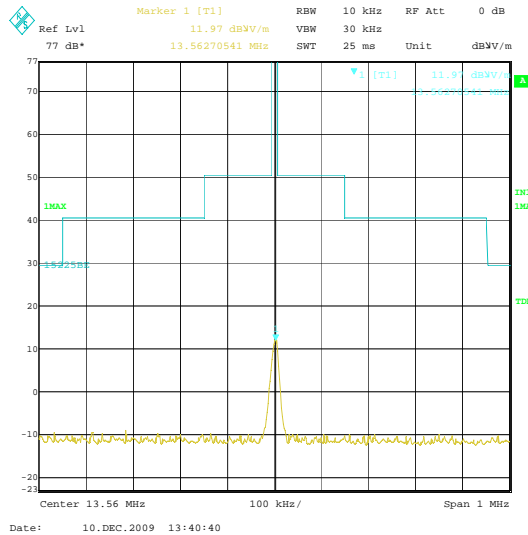

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

**5.2.4. Transmitter Radiated Spurious Emissions****Test Summary:**

<b>FCC Part:</b>	15.209 (a), 15.225(d)
<b>Test Method Used:</b>	As detailed in ANSI C63.4 Section 8 and relevant annexes
<b>Frequency Range:</b>	9 KHz to 1000 MHz

**Environmental Conditions:**

<b>Temperature (°C):</b>	26
<b>Relative Humidity (%):</b>	29





**Results: Electric Field Strength Measurements**

<b>Frequency (MHz)</b>	<b>Antenna Polarity</b>	<b>Level (dB<math>\mu</math>V/m)</b>	<b>Limit (dB<math>\mu</math>V/m)</b>	<b>Margin (dB)</b>	<b>Result</b>
107.475	Vertical	22.6	43.5	20.9	Complied

**Note(s):**

1. Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by making the measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.
3. The emission at 13.514 MHz is the fundamental.

**Transmitter Radiated Spurious Emissions (continued)**

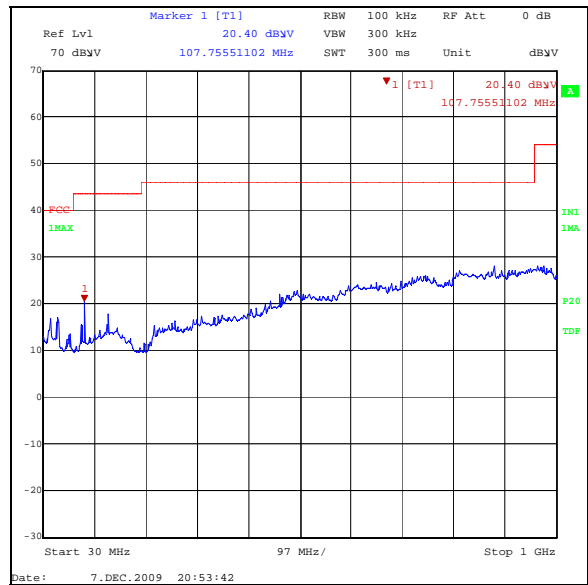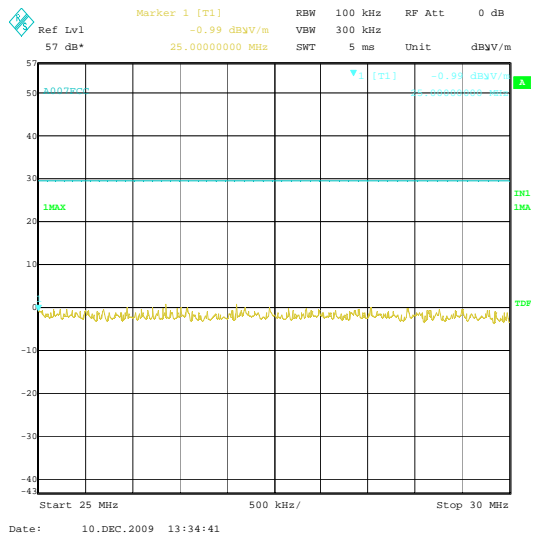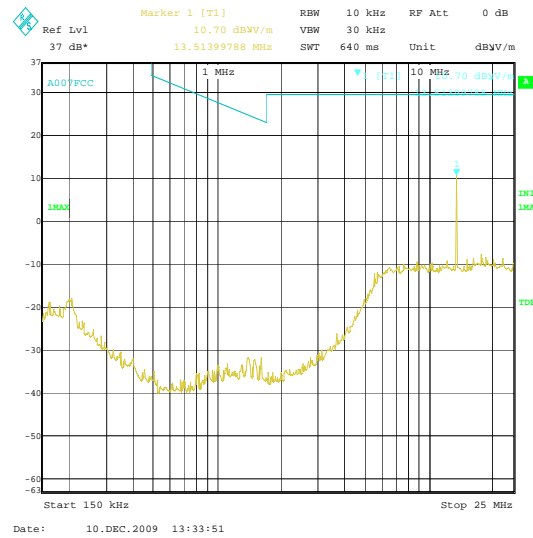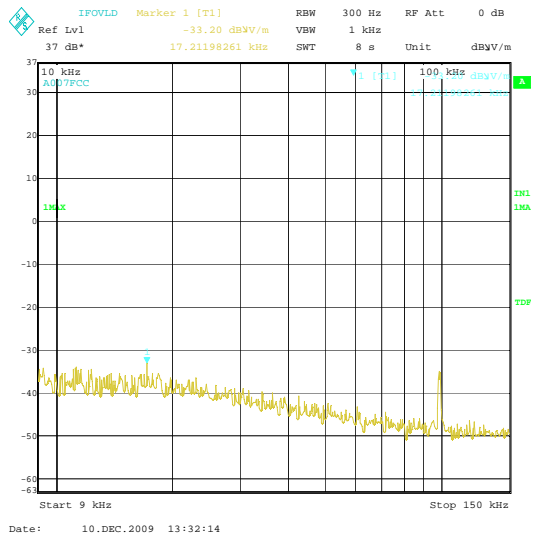

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.



**5.2.5. Transmitter Radiated Emissions at Band Edges**

**Test Summary:**

<b>FCC Part:</b>	15.209(a), 15.225(c)(d)
<b>Test Method Used:</b>	As detailed in ANSI C63.4 Section 8 and relevant annexes

**Environmental Conditions:**

<b>Temperature (°C):</b>	25
<b>Relative Humidity (%):</b>	30

**Results: Lower Band Edge**


Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result
13.11	-11.2	40.5	51.7	Complied

**Results: Upper Band Edge**

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result
14.01	-10.9	40.5	51.4	Complied

**Note(s):**

1. Measurements were performed at 3 metres and results extrapolated to 30 metres.
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.

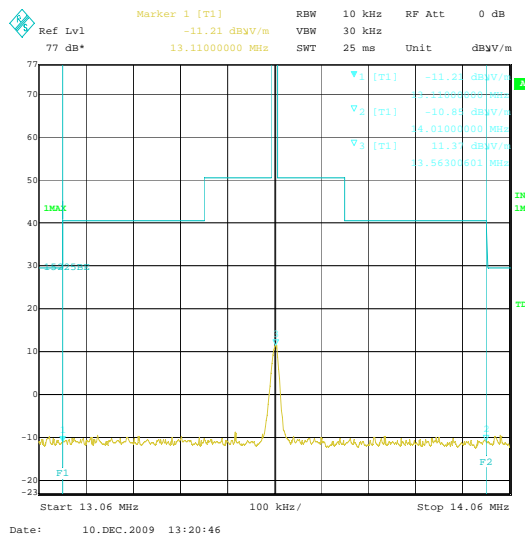

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.*

**5.2.6. Transmitter 20 dB Bandwidth**

**Test Summary:**


<b>FCC Part:</b>	2.1049
<b>Test Method Used:</b>	As detailed in ANSI C63.4 Section 13.1.7 and relevant annexes

**Environmental Conditions:**

<b>Temperature (°C):</b>	25
<b>Relative Humidity (%):</b>	34

**Results:**

<b>Transmitter 20 dB Bandwidth (kHz)</b>
37.675

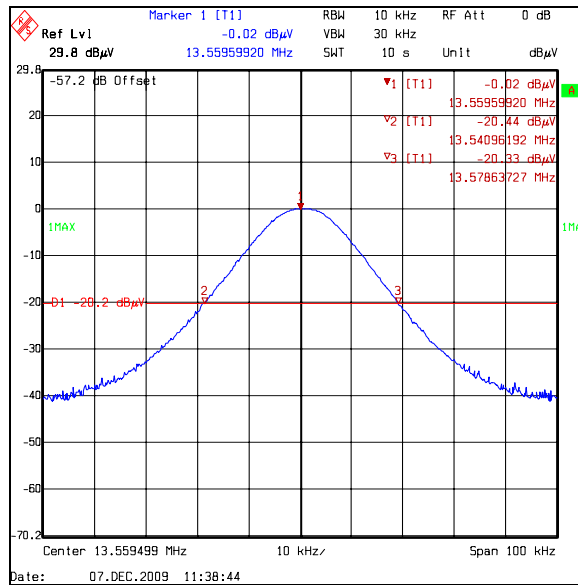

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

**5.2.7. Transmitter Frequency Stability (Temperature & Voltage Variation)****Test Summary:**

<b>FCC Part:</b>	15.225 (e)
<b>Test Method Used:</b>	As detailed in ANSI C63.4 Section 13.1.6 and relevant annexes

**Environmental Conditions:**

<b>Temperature (°C):</b>	25
<b>Relative Humidity (%):</b>	31

**Results: Maximum frequency error of the EUT with variations in ambient temperature**

Temperature (°C)	Nominal Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
-20	13.56	13.560029	29	0.000214	0.01	0.009786	Complied
20	13.56	13.560052	52	0.000383	0.01	0.009617	Complied
55	13.56	13.559980	-20	0.000147	0.01	0.009853	Complied

**Results: Maximum frequency error of the EUT with variations in nominal operating voltage at an ambient temperature of 20°C**

Supply Voltage (V)	Nominal Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
3.4	13.56	13.560052	52	0.000383	0.01	0.009617	Complied
3.7	13.56	13.560052	52	0.000383	0.01	0.009617	Complied
4.2	13.56	13.560051	51	0.000376	0.01	0.009624	Complied

## **6. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

<b>Measurement Type</b>	<b>Range</b>	<b>Confidence Level (%)</b>	<b>Calculated Uncertainty</b>
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
20 dB Bandwidth	N/A	95%	±0.92 ppm
Frequency Stability	N/A	95%	±0.92 ppm
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	±3.53 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±2.94 dB
Transmitter Fundamental Field Strength	9 kHz to 30 MHz	95%	±3.53 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A007	Antenna	Rohde & Schwarz	HFH2-Z2	880 458/020	29 Mar 2009	12
A1830	Pulse Limiter	Rhode & Schwarz	ESH3-Z2	100668	05 Jan 2009	12
A288	Antenna	Chase	CBL6111A	1589	13 Mar 2009	12
A649	LISN	Rohde & Schwarz	ESH3-Z5	825562/008	19 Mar 2009	12
E013	Environmental Chamber	Sanyo	ATMOS chamber	None	Calibrated before use	-
K0001	5m SA Chamber	Rainford EMC	N/A	N/A	04 May 2009	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	01 Sep 2009	12
M1269	Multimeter	Fluke	179	90250210	23 Jun 2009	12
M1124	Spectrum Analyser	Rohde & Schwarz	ESIB26	100046K	09 Mar 2009	12
M1273	Test Receiver	Rhode & Schwarz	ESIB26	100275	01 Apr 2009	12
M1379	Test Receiver	Rhode & Schwarz	ESIB7	100330	20 Aug 2009	12
M245	Thermometer/	Oregon Scientific	M245	M245	21 Jul 2009	12
S012	DC Power Supply	INSTEK	PS-6010	9564304	Calibrated before use	-

**NB** In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.