



TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: NTT docomo P-03B

To: FCC Part 15.225: 2008 Subpart C

Test Report Serial No:
RFI/RPT2/RP76408JD01A

Supersedes Test Report Serial No:
RFI/RPT1/RP76408JD01A

This Test Report Is Issued Under The Authority Of Brian Watson, Operations Director:		
Checked By:	A. Henriques	
Signature:		
Date of Issue:	14 December 2009	

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001
Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number: 2117901

This page has been left intentionally blank.

Table of Contents

1. Customer Information..... 4

2. Summary of Testing..... 5

3. Equipment Under Test (EUT) 7

4. Operation and Monitoring of the EUT during Testing 9

5. Measurements, Examinations and Derived Results10

6. Measurement Uncertainty21

Appendix 1. Test Equipment Used22

1. Customer Information










Company Name:	Panasonic Mobile Communications Development of Europe Ltd
Address:	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.225
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2008: Part 15 Subpart C (Radio Frequency Devices) - Section 15.225
Specification Reference:	47CFR15.107 and 47CFR15.109
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2008: Part 15 Subpart B (Radio Frequency Devices) - Sections 15.107 and 15.109
Site Registration:	FCC: 209735
Location of Testing:	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	24 November to 10 December 2009

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Port Type	Result
Part 15.107(a)	Receiver / Idle Mode AC Conducted Spurious Emissions	AC Mains	
Part 15.109(a) 15.225(d)	Receiver / Idle Mode Radiated Spurious Emissions	Enclosure	
Part 15.225(a)(b)(c)(d)	Transmitter Fundamental Field Strength	Antenna	
Part 15.209(a), 15.225(d)	Transmitter Radiated Spurious Emissions	Antenna	
Part 15.209(a) 15.225(c)(d)	Transmitter Band Edge Radiated Emissions	Antenna	
Part 2.1049	Transmitter 20 dB Bandwidth	Antenna	
Part 15.225(e)	Transmitter Frequency Stability (Temperature & Voltage Variation)	Antenna	
Key to Results  = Complied  = Did not comply			

2.3. Methods and Procedures

Reference:	ANSI C63.4 (2003)
Title:	American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	NTT docomo
Model Name or Number:	P-03B
IMEI Number:	353154030008237
Hardware Version Number:	Rev D
Software Version Number:	B-D92CS1-001.02.003 D92CS1-Cv38161807
FCC ID Number:	UCE209024A

Description:	AC Charger
Brand Name:	NTT docomo
Model Name or Number:	FOMA AC Adapter 01 for Global use / MAS-BH0008-A 002

Description:	DC Charger
Brand Name:	NTT docomo
Model Name or Number:	FOMA DC Adapter 02

Description:	Charge/USB Data cable
Brand Name:	NTT docomo
Model Name or Number:	FOMA USB Cable with Charge Function 02

Description:	Personal Hands-Free
Brand Name:	NTT docomo
Model Name or Number:	Stereo Earphone Set 01

Description:	Battery
Brand Name:	NTT docomo
Model Name or Number:	P21

Description:	Micro SD memory card
Brand Name:	Not Stated
Model Name or Number:	Not Stated

3.2. Description of EUT

The equipment under test was a dual mode UMTS/GSM cellular handset with RFID

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	RFID	
Channel Spacing:	Single channel device	
Transmit Frequency:	13.56 MHz	
Receive Frequency:	13.56 MHz	
Power Supply Requirement(s):	Minimum (V)	3.4
	Nominal (V)	3.7
	Maximum (V)	4.2
Tested Temperature (°C):	Minimum (Temp):	-20
	Maximum (Temp)	+50

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Dummy battery
Model Name or Number:	Not stated
Serial Number:	Not stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.
- Constantly transmitting at full power with a modulated carrier in RFID test mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The RFID transmitter test mode was enabled by fitting a special test USIM into the EUT and selecting the test mode from a menu in the User Interface.
- The Micro SD card was installed during all tests.
- Radiated spurious emissions tests were performed with the Charge/USB Data cable connected to the EUT as this was found to be the worst case during pre-scans. All accessories were individually connected and measurements made during pre-scans to determine the worst case combination.
- As the EUT is not capable of transmitting while charging, no AC Mains Conducted Emissions (150 kHz to 30 MHz) test was performed in transmit mode.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

5.2. Test Results

5.2.1. Receiver / Idle Mode AC Conducted Spurious Emissions

Test Summary:

FCC Part:	15.107(a)
Test Method Used:	As detailed in ANSI C63.4 Section 7 and relevant annexes

Environmental Conditions:

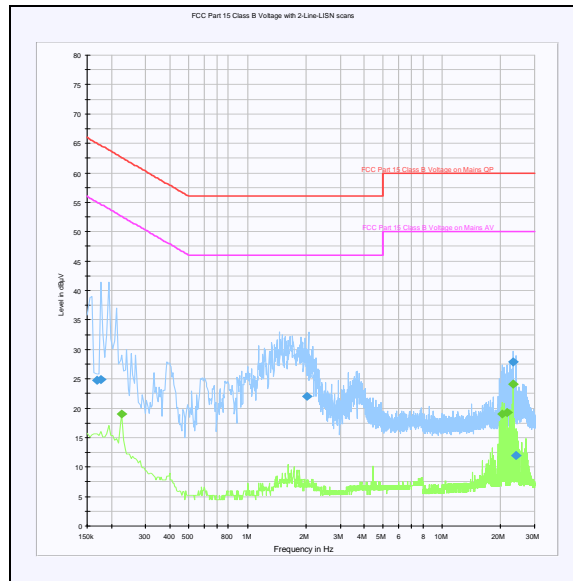
Temperature (°C):	26
Relative Humidity (%):	30

Results: Quasi Peak Detector Measurements

Frequency (MHz)	Line	Quasi Peak Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.168000	Live	24.7	65.1	40.4	Complied
0.177000	Live	24.9	64.6	39.7	Complied
2.017500	Neutral	22.0	56.0	34.0	Complied
23.127000	Live	27.9	60.0	32.1	Complied
24.000000	Neutral	12.0	60.0	48.0	Complied

Results: Average Detector Measurements

Frequency (MHz)	Line	Average Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.226500	Live	19.1	52.6	33.5	Complied
20.319000	Neutral	19.0	50.0	31.0	Complied
21.664500	Live	19.3	50.0	30.7	Complied
23.127000	Live	24.1	50.0	25.9	Complied

Receiver / Idle Mode AC Conducted Spurious Emissions (continued)

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

5.2.2. Receiver / Idle Mode Radiated Spurious Emissions**Test Summary:**

FCC Part:	15.109, 15.225(d)
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes
Frequency Range:	9 kHz to 1000 MHz

Environmental Conditions:

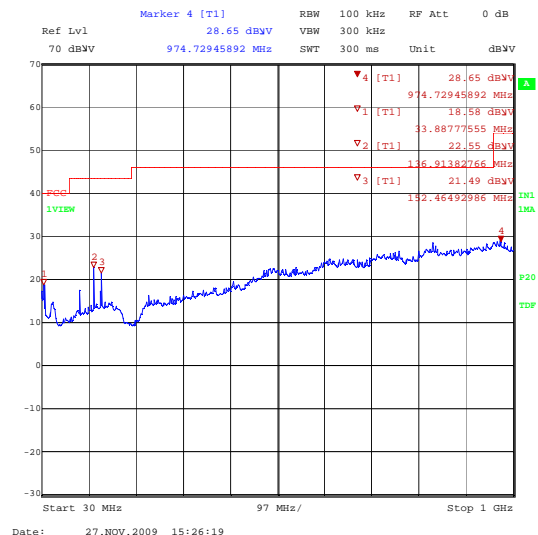
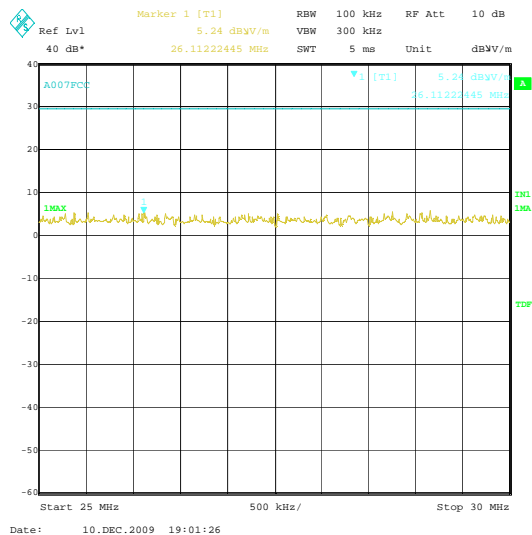
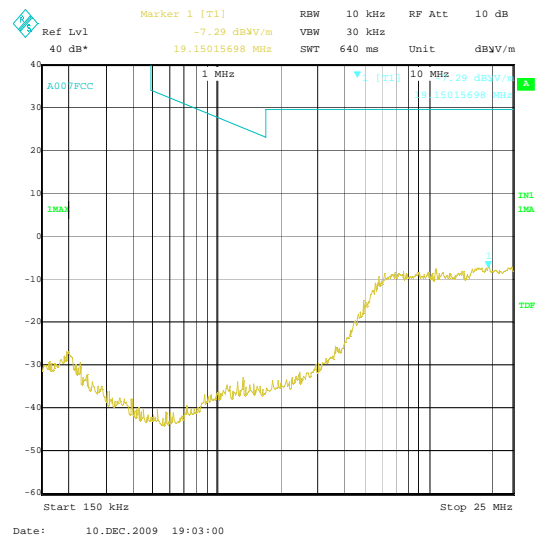
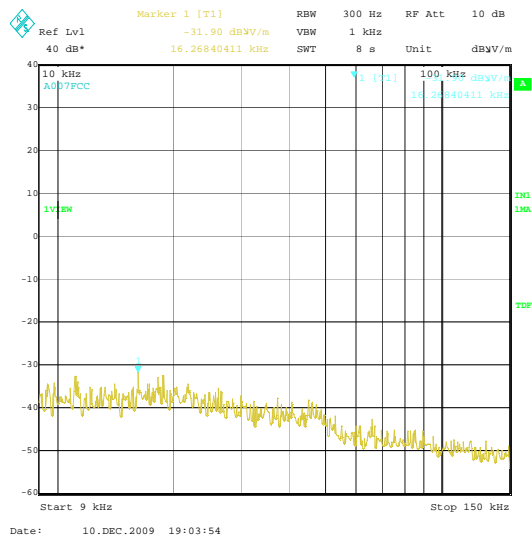
Temperature (°C):	25
Relative Humidity (%):	30

Results:

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
33.734	Horizontal	20.3	40.0	19.7	Complied
137.233	Horizontal	21.4	43.5	22.1	Complied
152.496	Horizontal	22.9	43.5	20.6	Complied

Note(s):

1. Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by making the measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.

Receiver / Idle Mode Radiated Spurious Emissions (continued)

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

5.2.3. Transmitter Fundamental Field Strength**Test Summary:**

FCC Part:	15.225 (a)(b)(c)(d)
-----------	---------------------

Environmental Conditions:

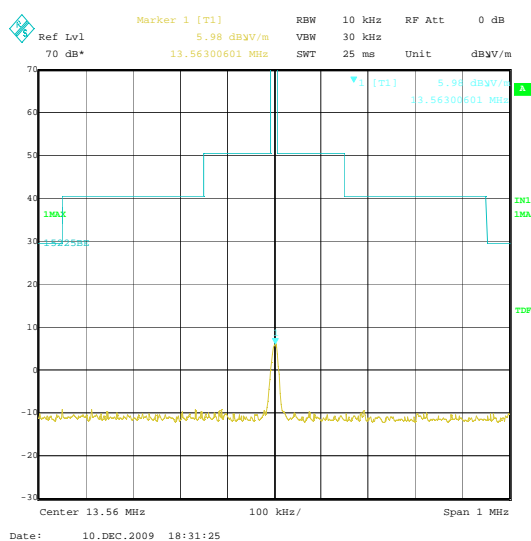
Temperature (°C):	25
Relative Humidity (%):	30

Results:

Frequency (MHz)	Antenna Polarity	Q-P Level (dBμV/m)	Limit at 30 m (dBμV/m)	Margin (dB)	Result
13.56	0° to EUT	5.6	84.0	78.4	Complied

Note(s):

- Measurements were performed at 3 metres and results extrapolated to 30 metres.
- The limit is specified at a test distance of 30 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by making the measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.



5.2.4. Transmitter Radiated Spurious Emissions**Test Summary:**

FCC Part:	15.209 (a), 15.225(d)
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes
Frequency Range:	9 kHz to 1000 MHz

Environmental Conditions:

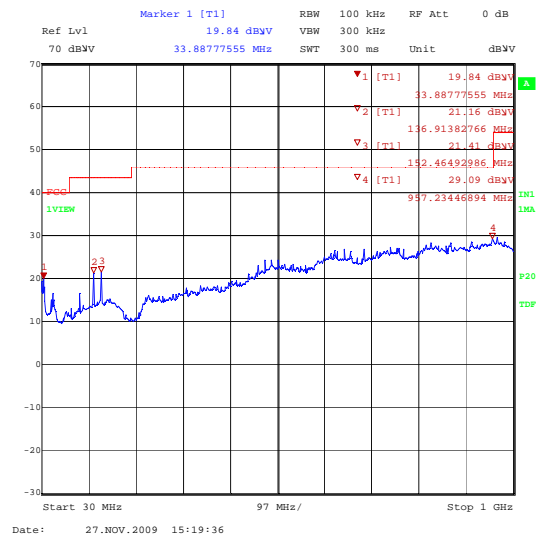
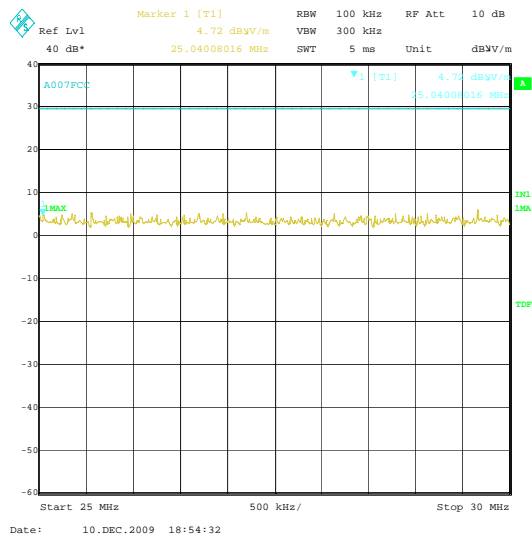
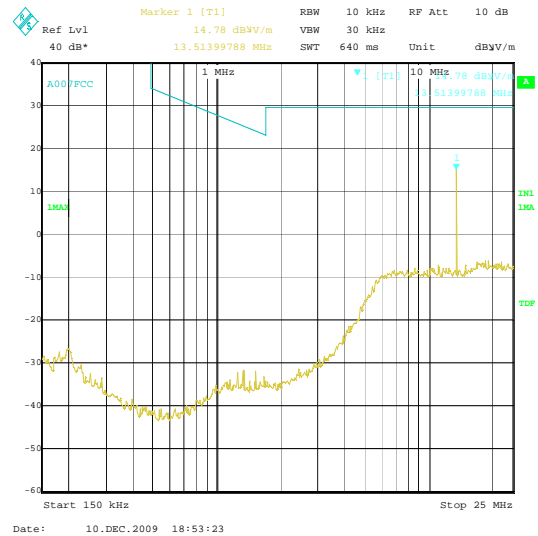
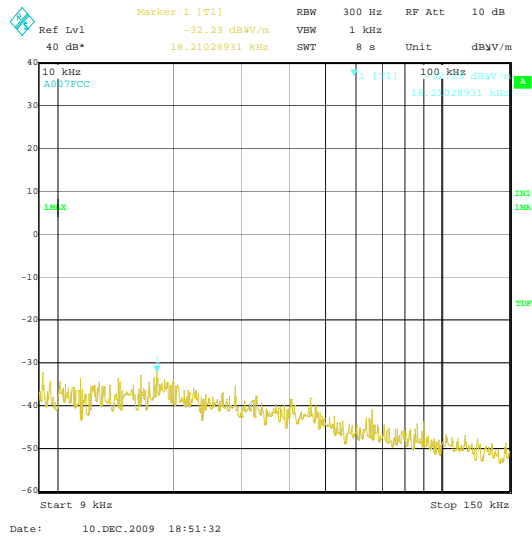
Temperature (°C):	25
Relative Humidity (%):	30

Results: Electric Field Strength Measurements

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
34.165	Horizontal	21.6	40	18.4	Complied
136.794	Horizontal	24.2	43.5	19.3	Complied
151.888	Horizontal	23.3	43.5	20.2	Complied

Note(s):

1. Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by making the measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.
3. The emission at 13.514 MHz is the fundamental.

Transmitter Radiated Spurious Emissions (continued)

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

5.2.5. Transmitter Radiated Emissions at Band Edges**Test Summary:**

FCC Part:	15.209(a) 15.225(c)(d)
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	30

Results: Lower Band Edge

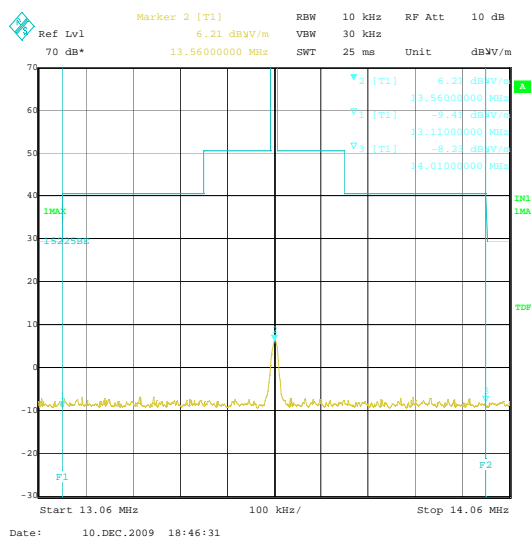
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
13.11	-9.4	40.5	49.9	Complied

Results: Upper Band Edge

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
14.01	-8.2	40.5	48.7	Complied

Note(s):

- Measurements were performed at 3 metres and results extrapolated to 30 metres.
- A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.



5.2.6. Transmitter 20 dB Bandwidth**Test Summary:**

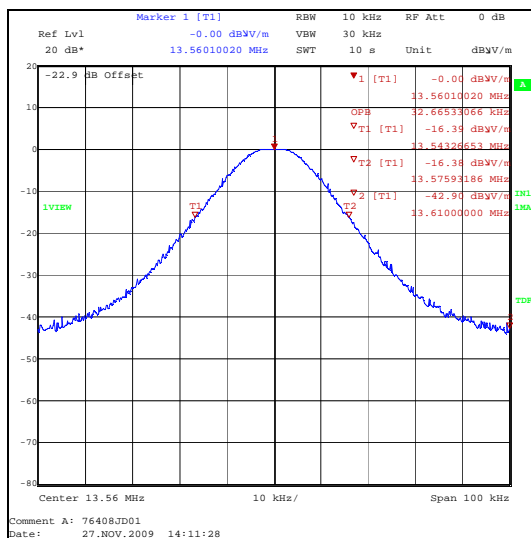
FCC Part:	2.1049
Test Method Used:	As detailed in ANSI C63.4 Section 13.1.7 and relevant annexes (see note below)

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	30

Results:

Transmitter 20 dB Bandwidth (kHz)
32.665

**Note(s):**

1. In lieu of the test method detailed in ANSI C63.4 Section 13.1.7 the 20 dB bandwidth was measured using the Occupied Bandwidth function of the spectrum analyser.

5.2.7. Transmitter Frequency Stability (Temperature & Voltage Variation)**Test Summary:**

FCC Part:	15.225 (e)
Test Method Used:	As detailed in ANSI C63.4 Section 13.1.6 and relevant annexes

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	36

Results: Maximum frequency error of the EUT with variations in ambient temperature

Temp (°C)	Nominal Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
-20	13.56	13.559989	11	0.000081	0.01	0.009919	Complied
20	13.56	13.559983	17	0.000125	0.01	0.009875	Complied
50	13.56	13.559978	22	0.000162	0.01	0.009838	Complied

Results: Maximum frequency error of the EUT with variations in nominal operating voltage at an ambient temperature of 20°C

Supply Voltage (V)	Nominal Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
3.4	13.56	13.559990	10	0.000073	0.01	0.009927	Complied
3.7	13.56	13.559987	13	0.000096	0.01	0.009904	Complied
4.2	13.56	13.559992	8	0.000059	0.01	0.009941	Complied

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
20 dB Bandwidth	N/A	95%	±0.92 ppm
Frequency Stability	N/A	95%	±0.92 ppm
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	±3.53 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±2.94 dB
Transmitter Fundamental Field Strength	9 kHz to 30 MHz	95%	±3.53 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A007	Antenna	Rohde & Schwarz	HFH2-Z2	880 458/020	29 Mar 2009	12
A288	Antenna	Chase	CBL6111A	1589	13 Mar 2009	12
E013	Environmental Chamber	Sanyo	ATMOS chamber	None	Calibrated before use	-
K0001	5m SA Chamber	Rainford EMC	N/A	N/A	04 May 2009	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	01 Sep 2009	12
M1124	Spectrum Analyser	Rohde & Schwarz	ESIB26	100046K	09 Mar 2009	12
M1269	Multimeter	Fluke	179	90250210	23 Jun 2009	12
M1273	Test Receiver	Rhode & Schwarz	ESIB26	100275	01 Apr 2009	12
M1379	Test Receiver	Rhode & Schwarz	ESIB7	100330	20 Aug 2009	12
M245	Thermometer	Oregon Scientific	M245	M245	21 Jul 2009	12
S021	DC Power Supply	Thurlby Thandar	CPX200	061034	Calibrated before use	-

NB In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.