



TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: NTT docomo P-06B

To: FCC Part 15.225: 2009 Subpart C

Test Report Serial No:
RFI-RPT-RP77775JD05A

This Test Report Is Issued Under The Authority Of Brian Watson, COO Payments and Consultancy:		
Checked By:	Ian Watch	
Signature:		
Date of Issue:	07 June 2010	

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001
Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number: 2117901

This page has been left intentionally blank.

Table of Contents

1. Customer Information 4

2. Summary of Testing 5

3. Equipment Under Test (EUT) 6

4. Operation and Monitoring of the EUT during Testing 8

5. Measurements, Examinations and Derived Results 9

6. Measurement Uncertainty 20

Appendix 1. Test Equipment Used 21

1. Customer Information










Company Name:	Panasonic Mobile Communications Development of Europe Ltd
Address:	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.225
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2009: Part 15 Subpart C (Radio Frequency Devices) - Section 15.225
Specification Reference:	47CFR15.107 and 47CFR15.109
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2009: Part 15 Subpart B (Radio Frequency Devices) - Sections 15.107 and 15.109
Site Registration:	FCC: 209735
Location of Testing:	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	26 May 2010 to 27 May 2010

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.107(a)	Receiver/Idle Mode AC Conducted Spurious Emissions	
Part 15.109, 15.225(d)	Receiver/Idle Mode Radiated Spurious Emissions	
Part 15.225(a)(b)(c)(d)	Transmitter Fundamental Field Strength	
Part 15.209(a), 15.225(d)	Transmitter Radiated Spurious Emissions	
Part 15.209(a), 15.225(c)(d)	Transmitter Band Edge Radiated Emissions	
Part 2.1049	Transmitter 20 dB Bandwidth	
Part 15.225(e)	Transmitter Frequency Stability (Temperature & Voltage Variation)	
Key to Results  = Complied  = Did not comply		

2.3. Methods and Procedures

Reference:	ANSI C63.10 (2009)
Title:	American National Standard for Testing Unlicensed Wireless Devices

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	NTT docomo
Model Name or Number:	P-06B
IMEI Number:	358864030023375 (<i>radiated sample</i>)
Hardware Version Number:	Rev C
Software Version Number:	B-D01SW1-01.04.001 D01SW1_Cv60.05.24.02
FCC ID Number:	UCE210028A

Description:	Battery
Brand Name:	NTT
Model Name or Number:	P22

Description:	AC Charger
Brand Name:	NTT docomo
Model Name or Number:	FOMA AC Adapter 01 for Global use / MAS-BH0008-A 002

Description:	DC Charger
Brand Name:	NTT docomo
Model Name or Number:	FOMA DC Adapter 02

Description:	Charge/USB Data cable
Brand Name:	NTT docomo
Model Name or Number:	FOMA USB Cable with Charge Function 02

Description:	Personal Hands-Free
Brand Name:	NTT docomo
Model Name or Number:	Stereo Earphone Set 01

Description:	Micro SD memory card
Brand Name:	Not stated
Model Name or Number:	Not stated

3.2. Description of EUT

The equipment under test was a dual mode UMTS/GSM cellular handset with *Bluetooth* and RFID.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Tested Technology:	RFID	
Category of Equipment:	Transceiver	
Channel Spacing:	Single channel device	
Transmit Frequency Range:	13.56 MHz	
Receive Frequency Range:	13.56 MHz	
Power Supply Requirement:	Nominal	3.7 V
	Minimum	3.4 V
	Maximum	4.2 V
Tested Temperature Range:	Minimum	-20°C
	Maximum	50°C

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Dummy battery
Brand Name:	Not Stated
Serial Number:	Not Stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode
- Constantly transmitting at full power with a modulated carrier in RFID test mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The RFID transmitter was enabled using a bespoke application on a laptop PC supplied by the customer.
- Radiated spurious emission test were performed with the personal hands free connected to the EUT as this was found to be the worst case during pre-scans. All accessories were individually connected and measurements made during pre-scans to determine the worst case combination.
- As the EUT is not capable of transmitting while charging, no AC Mains Conducted Emissions (150 kHz to 30 MHz) test was performed in transmit mode.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

5.2. Test Results**5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions****Test Summary:**

FCC Part:	15.107
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

Environmental Conditions:

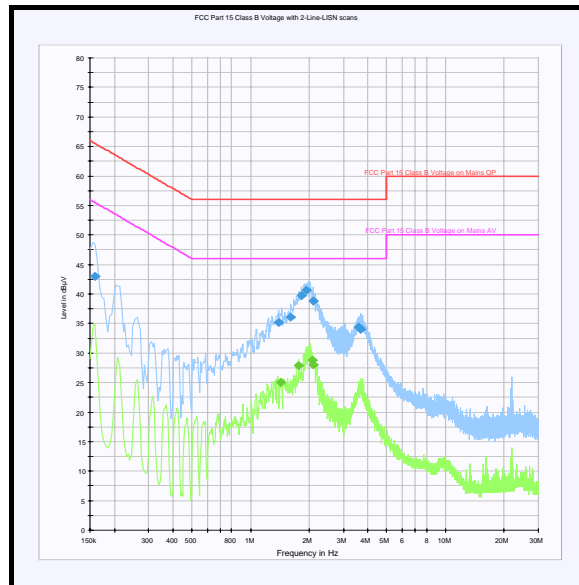
Temperature (°C):	23
Relative Humidity (%):	21

Results: Quasi Peak Detector Measurements

Frequency (MHz)	Line	Quasi Peak Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.159000	Live	43.0	65.5	22.5	Complied
1.392000	Live	35.1	56.0	20.9	Complied
1.612500	Neutral	36.1	56.0	19.9	Complied
1.828500	Neutral	39.7	56.0	16.3	Complied
1.936500	Live	40.6	56.0	15.4	Complied
2.098500	Live	38.8	56.0	17.2	Complied
3.601500	Live	34.4	56.0	21.6	Complied
3.664500	Live	34.0	56.0	22.0	Complied

Results: Average Detector Measurements

Frequency (MHz)	Line	Average Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
1.423500	Live	25.1	46.0	20.9	Complied
1.770000	Neutral	27.9	46.0	18.1	Complied
2.080500	Live	28.8	46.0	17.2	Complied
2.094000	Live	28.0	46.0	18.0	Complied

Receiver/Idle Mode AC Conducted Spurious Emissions (continued)

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

5.2.2. Receiver/Idle Mode Radiated Spurious Emissions**Test Summary:**

FCC Part:	15.109, 15.225(d)
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3, 6.4 and 6.5 referencing ANSI C63.4
Frequency Range:	9 kHz to 1000 MHz

Environmental Conditions:

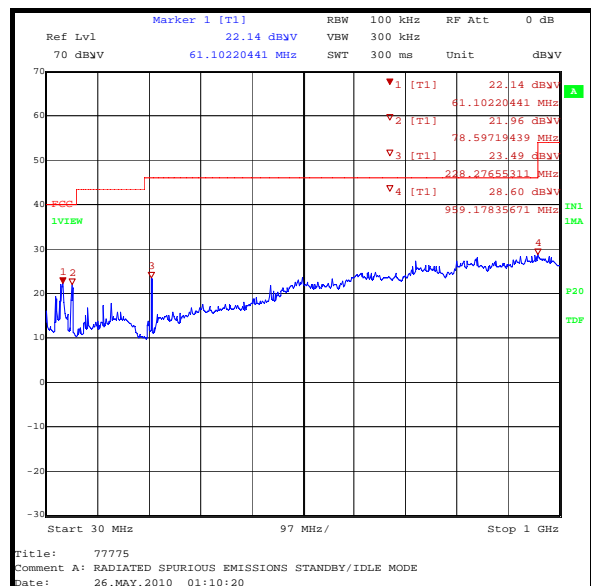
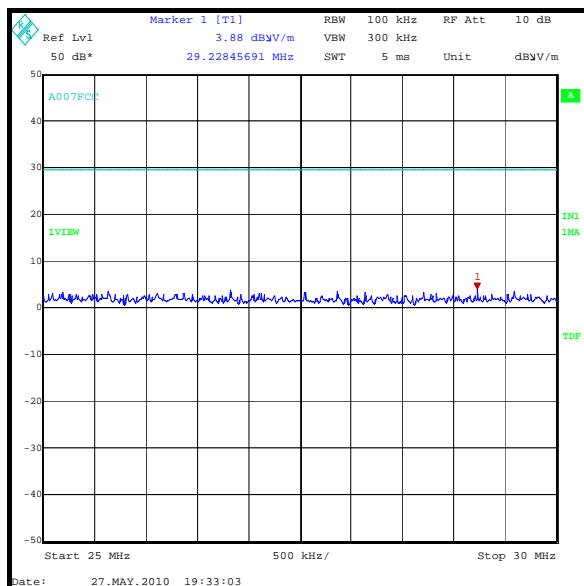
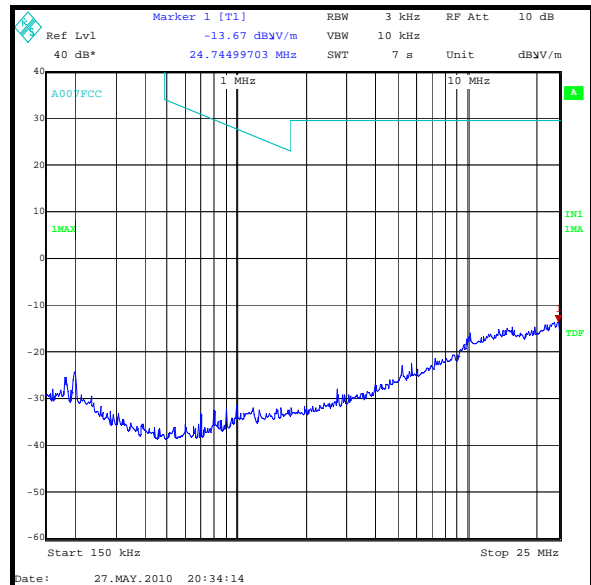
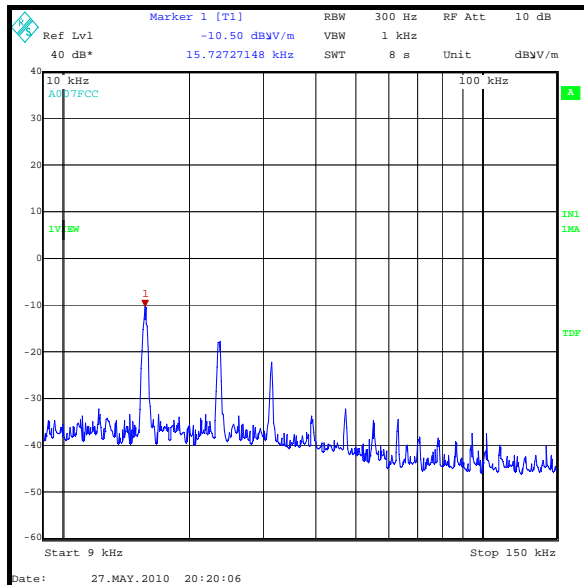
Temperature (°C):	29
Relative Humidity (%):	20

Results:

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
62.128	Vertical	25.8	40.0	14.2	Complied
80.030	Vertical	24.5	40.0	15.5	Complied
228.276	Vertical	27.7	46.0	18.3	Complied

Note(s):

1. Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by making the measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.
3. Final measurement values include corrections for antenna factor and cable losses.
4. All emissions on the 9 kHz to 150 kHz plot were investigated and found to be radiating from the test site turntable.

Receiver/Idle Mode Radiated Spurious Emissions (continued)

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

5.2.3. Transmitter Fundamental Field Strength**Test Summary:**

FCC Part:	15.225 (a)(b)(c)(d)
Test Method Used:	ANSI C63.10 Section 6.4

Environmental Conditions:

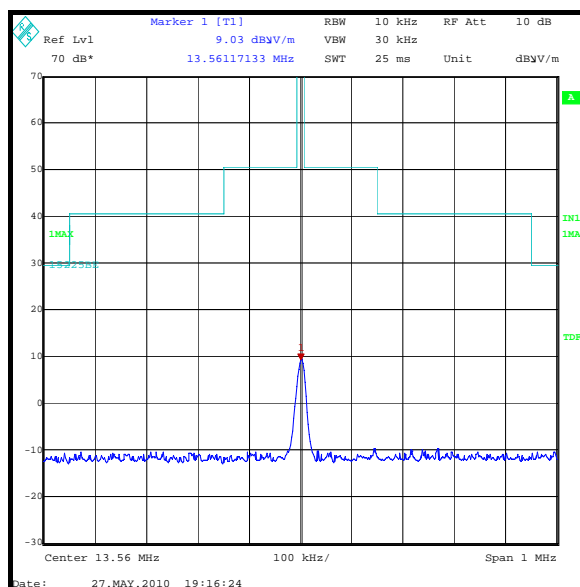
Temperature (°C):	29
Relative Humidity (%):	20

Results:

Frequency (MHz)	Antenna Polarity	Quasi-peak Level (dB μ V/m)	Limit at 30 m (dB μ V/m)	Margin (dB)	Result
13.56	90° to EUT	9.0	84.0	75.0	Complied

Note(s):

- Measurements were performed at 3 metres and results extrapolated to 30 metres.
- The limit is specified at a test distance of 30 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by making the measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.



5.2.4. Transmitter Radiated Spurious Emissions**Test Summary:**

FCC Part:	15.209 (a), 15.225(d)
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3, 6.4 and 6.5 referencing ANSI C63.4
Frequency Range:	9 kHz to 1000 MHz

Environmental Conditions:

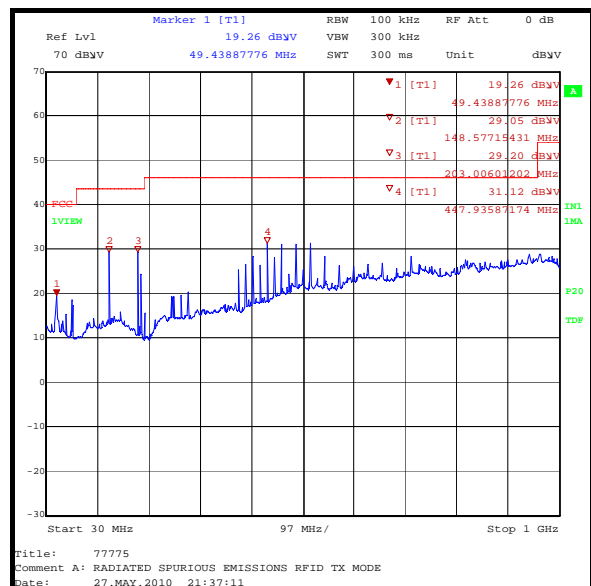
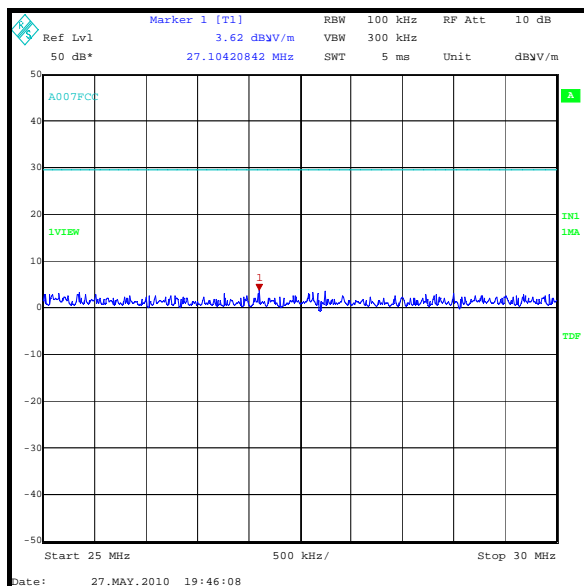
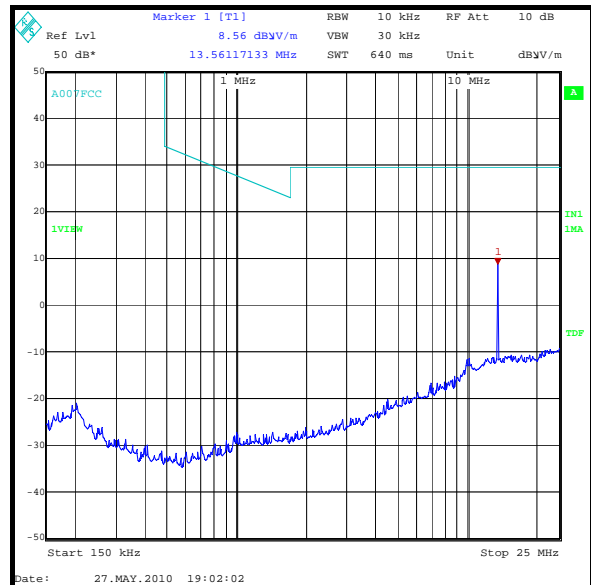
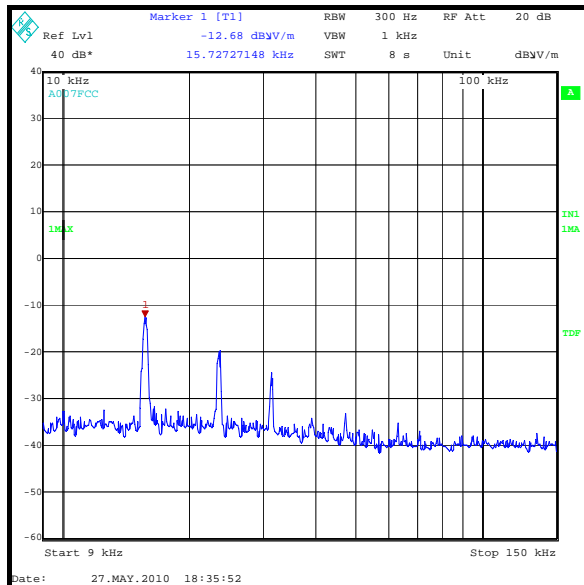
Temperature (°C):	29
Relative Humidity (%):	20

Results: Electric Field Strength Measurements

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
50.102	Vertical	20.4	40.0	19.6	Complied
149.046	Vertical	30.0	43.5	13.5	Complied
203.377	Vertical	28.9	43.5	14.6	Complied
406.779	Vertical	27.4	46.0	18.6	Complied
447.465	Vertical	31.2	46.0	14.8	Complied
501.706	Vertical	32.4	46.0	13.6	Complied
583.080	Vertical	28.1	46.0	17.9	Complied
718.651	Vertical	27.7	46.0	18.3	Complied

Note(s):

1. Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by making the measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.
3. Final measurement values include corrections for antenna factor and cable losses.
4. The emission shown at approximately 13.56 MHz is the fundamental.
5. All emissions on the 9 kHz to 150 kHz plot were investigated and found to be radiating from the test site turntable.

Transmitter Radiated Spurious Emissions (continued)

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.2.5. Transmitter Radiated Emissions at Band Edges**Test Summary:**

FCC Part:	15.209(a) 15.225(c)(d)
Test Method Used:	As detailed in ANSI C63.10 Section 6.9.2

Environmental Conditions:

Temperature (°C):	29
Relative Humidity (%):	20

Results: Lower Band Edge

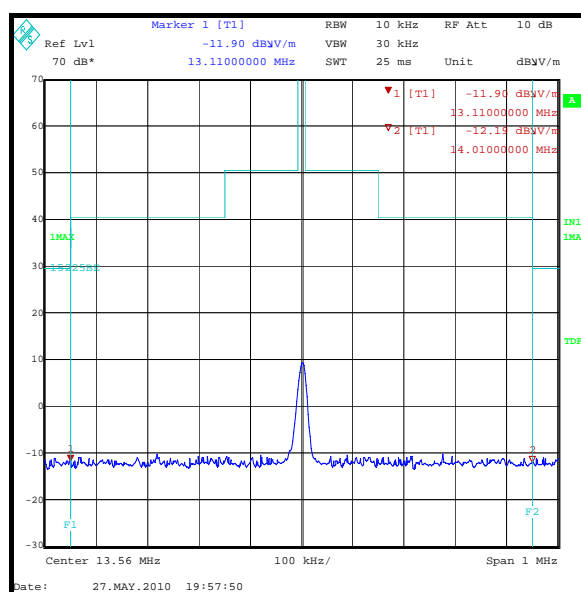
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
13.11	-11.9	30.0	41.9	Complied

Results: Upper Band Edge

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
14.01	-12.2	30.0	42.2	Complied

Note(s):

- Measurements were performed at 3 metres and results extrapolated to 30 metres.
- A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.



5.2.6. Transmitter 20 dB Bandwidth**Test Summary:**

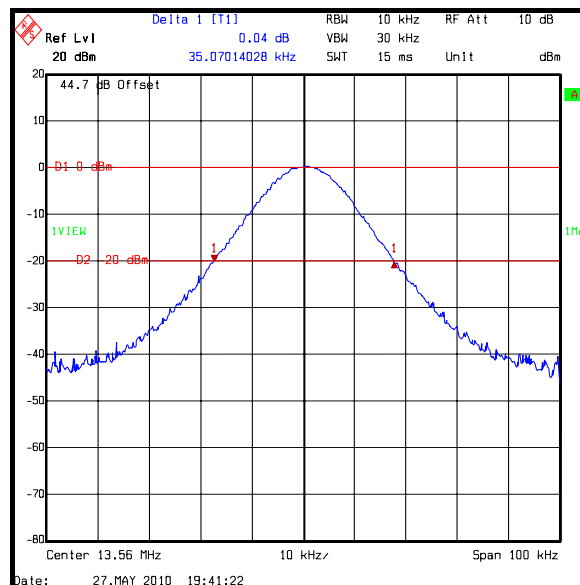
FCC Part:	2.1049
Test Method Used:	As detailed in ANSI C63.10 Section 6.9.1

Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	31

Results:

20 dB Bandwidth (kHz)
35.070



5.2.7. Transmitter Frequency Stability (Temperature & Voltage Variation)**Test Summary:**

FCC Part:	15.225 (e)
Test Method Used:	As detailed in ANSI C63.10 Section 6.8

Environmental Conditions:

Ambient Temperature (°C):	25
Ambient Relative Humidity (%):	31

Results: Maximum frequency error of the EUT with variations in ambient temperature

Temperature (°C)	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
-20	13.559925 MHz	13.559934 MHz	13.559940 MHz	13.559941 MHz
20	13.560008 MHz	13.560004 MHz	13.560001 MHz	13.560000 MHz
50	13.559954 MHz	13.559953 MHz	13.559952 MHz	13.559952 MHz

Frequency with Worst Case Deviation (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
13.559925	75	0.0006	0.01	0.0094	Complied

Results: Maximum frequency error of the EUT with variations in nominal operating voltage at an ambient temperature of 20°C

Supply Voltage (V)	Nominal Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
3.4	13.56	13.559976	24	0.0002	0.01	0.0098	Complied
3.7	13.56	13.559976	24	0.0002	0.01	0.0098	Complied
4.2	13.56	13.559974	26	0.0002	0.01	0.0098	Complied

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
20 dB Bandwidth	13 MHz to 14 MHz	95%	±0.92 ppm
Frequency Stability	13 MHz to 14 MHz	95%	±0.92 ppm
Radiated Spurious Emissions	9 kHz to 1000 MHz	95%	±3.53 dB
Transmitter Fundamental Field Strength	13 MHz to 14 MHz	95%	±3.53 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A007	Loop Antenna	Rohde & Schwarz	HFH2-Z2	880 458/020	13 Apr 2011	12
A1069	LISN	Rohde & Schwarz	ESH3-Z5	837469/012	13 Apr 2011	12
A1830	Pulse Limiter	Rhode & Schwarz	ESH3-Z2	100668	01 Mar 2011	12
A288	Antenna	Chase	CBL6111A	1589	16 Mar 2011	12
K0001	5m Semi-Anechoic Chamber	Rainford EMC	N/A	N/A	25 Apr 2011	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	01 Sep 2010	12
M1068	Thermometer	Iso-Tech	RS55	93102884	01 Oct 2010	12
M1124	Spectrum Analyser	Rohde & Schwarz	ESI26	100046K	22 Apr 2011	12
M122	Digital Voltmeter	Fluke	77	64910017	23 Jun 2010	12
M1223	Environmental Chamber	Votsch	VT4002	58566072720 010	Calibrated before use	-
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	10 Jul 2010	12
M1273	Test Receiver	Rhode & Schwarz	ESIB 26	100275	08 Apr 2011	12
S0520	Bench PSU	GW instek	GPC-3030	E835141	Calibrated before use	-

NB In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.