



TEST REPORT FROM RFI GLOBAL SERVICES LTD



Test of: NTT DoCoMo EB-4054

FCC ID: UCE211046A

To: FCC Part 22: 2011 Subpart H, Part 24: 2011 Subpart E

Test Report Serial No.:
RFI-RPT-RP85051JD01D V3.0

Version 3.0 Supersedes All Previous Versions

This Test Report Is Issued Under The Authority Of Chris Guy, Head of Global Approvals:		
Checked By:	Ian Watch	
Signature:		
Date of Issue:	14 February 2012	

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of . The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001
Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number:2117901



This page has been left intentionally blank.

Table of Contents

1. Customer Information	4
2. Summary of Testing	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
3. Equipment Under Test (EUT)	7
3.1. Identification of Equipment Under Test (EUT)	7
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
4. Operation and Monitoring of the EUT during Testing	10
4.1. Operating Modes	10
4.2. Configuration and Peripherals	10
5. Measurements, Examinations and Derived Results	11
5.1. General Comments	11
5.2. Test Results - Part 22	12
5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions	12
5.2.2. Receiver/Idle Mode Radiated Spurious Emissions	15
5.2.3. Transmitter Output Power (ERP)	19
5.2.4. Transmitter Frequency Stability (Temperature Variation)	20
5.2.5. Transmitter Frequency Stability (Voltage Variation)	21
5.2.6. Transmitter Occupied Bandwidth	22
5.2.7. Transmitter Out of Band Radiated Emissions	26
5.2.8. Transmitter Radiated Emissions at Band Edges	29
5.3. Test Results - Part 24	32
5.3.1. Receiver/Idle Mode AC Conducted Spurious Emissions	32
5.3.2. Receiver/Idle Mode Radiated Spurious Emissions	35
5.3.3. Transmitter Output Power (EIRP)	39
5.3.4. Transmitter Frequency Stability (Temperature Variation)	40
5.3.5. Transmitter Frequency Stability (Voltage Variation)	42
5.3.6. Transmitter Occupied Bandwidth	43
5.3.7. Transmitter Out of Band Radiated Emissions	47
5.3.8. Transmitter Band Edge Radiated Emissions	51
6. Measurement Uncertainty	54
Appendix 1. Test Equipment Used	55

1. Customer Information

















Company Name:	Panasonic Mobile Communications Development of Europe Ltd.
Address:	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR22
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 22 Subpart H (Public Mobile Services)
Specification Reference:	47CFR24
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 24 Subpart E (Personal Communication Services)
Specification Reference:	47CFR15.107 and 47CFR15.109
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 15 Subpart B (Unintentional Radiators) - Sections 15.107 and 15.109
Site Registration:	209735
Location of Testing:	RFI Global Services Ltd., Wade Road, Basingstoke, Hampshire, RG24 8AH
Test Dates:	17 January 2012 to 26 January 2012

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 22		
Part 15.107(a)	Receiver/Idle Mode AC Conducted Spurious Emissions	
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
Part 22.913(a)	Transmitter Output Power (ERP)	
Part 2.1055/22.355	Transmitter Frequency Stability (Temperature and Voltage Variation)	
Part 2.1049	Transmitter Occupied Bandwidth	
Part 2.1053/22.917	Transmitter Out of Band Radiated Emissions	
Part 2.1053/22.917	Transmitter Band Edge Radiated Emissions	
Part 24		
Part 15.107(a)	Receiver/Idle Mode AC Conducted Spurious Emissions	
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
Part 24.232	Transmitter Output Power (EIRP)	
Part 2.1055/24.235	Transmitter Frequency Stability (Temperature and Voltage Variation)	
Part 2.1049	Transmitter Occupied Bandwidth	
Part 2.1053/24.238	Transmitter Out of Band Radiated Emissions	
Part 2.1053/24.238	Transmitter Band Edge Radiated Emissions	
Key to Results		
 = Complied  = Did not comply		

2.3. Methods and Procedures

Reference:	ANSI/TIA-603-C-2004
Title:	Land Mobile Communications Equipment, Measurements and performance Standards
Reference:	ANSI C63.4 (2009)
Title:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	NTT DoCoMo
Model Name or Number:	EB-4054
IMEI:	359569040021561 (<i>Radiated sample #1</i>) 359569040021272 (<i>Conducted RF port sample #1</i>)
Hardware Version Number:	Rev C
Software Version Number:	ACPU: dcm-07-0215 CCPU: R1B_1_EC02_01_DOO
FCC ID:	UCE211046A

Brand Name:	NTT DoCoMo
Description:	AC Charger
Model Name or Number:	P01
Hardware Version Number:	N0JZZY000008

Brand Name:	NTT DoCoMo
Description:	Charge/USB Data cable
Model Name or Number:	Not marked or stated

Brand Name:	NTT DoCoMo
Description:	Personal Hands-Free
Model Name or Number:	Not marked or stated

3.2. Description of EUT

The equipment under test was a dual mode UMTS/GSM Mobile Phone with WLAN, *Bluetooth* and RFID.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Type of Radio Device:	Transceiver		
Mode:	GSM/GPRS/EGPRS		
Modulation Type:	GMSK / 8PSK		
Channel Spacing:	200 kHz		
Power Supply Requirement(s):	Nominal	3.8 V	
	Minimum	3.4 V	
	Maximum	4.35 V	
Technology Tested:	GSM850		
Maximum Output Power (ERP):	GSM	30.8 dBm	
	GPRS	30.6 dBm	
	EGPRS	29.5 dBm	
Transmit Frequency Range:	824 to 849 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	128	824.2
	Middle	190	836.6
	Top	251	848.8
Receive Frequency Range:	869 to 894 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	128	869.2
	Middle	190	881.6
	Top	251	893.8

Additional Information Related to Testing (continued)

Technology Tested:	PCS1900		
Maximum Output Power (EIRP):	GSM	26.9 dBm	
	GPRS	26.3 dBm	
	EGPRS	25.5 dBm	
Transmit Frequency Range:	1850 to 1910 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	512	1850.2
	Middle	660	1879.8
	Top	810	1909.8
Receive Frequency Range:	1930 to 1990 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	512	1930.2
	Middle	660	1959.8
	Top	810	1989.8

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.
- Constantly transmitting at full power on bottom, middle and top channels as required.
- Occupied bandwidth, ERP/EIRP and band edge tests were performed with the EUT in GSM single timeslot circuit switched and GPRS/EGPRS Multislot Class 12 with the unit transmitting on one timeslot in the uplink. The EUT output power was initially checked when transmitting at maximum power on one, two, three and four timeslots. The highest power was observed when transmitting on one timeslot.
- EGPRS tests were performed with the EUT using MCS5 (8PSK modulation).
- Transmitter radiated spurious emissions were checked in all modes during pre-scans. Circuit switched voice was found to be the worst case and all final measurements were performed with the EUT in this mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The conducted sample with IMEI 359569040021272 was used for occupied bandwidth and frequency stability measurements.
- The radiated sample with IMEI 359569040021561 was used for all radiated measurements.
- Idle mode and transmitter mode radiated spurious emissions tests were performed with the AC charger and Personal Hands-Free connected to the EUT.
- Connected to a GSM/GPRS/EGPRS system simulator, operating in transceiver mode.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

5.2. Test Results - Part 22**5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions**

Test Engineer:	Mark Percival	Test Date:	24 January 2012
Test Sample IMEI:	359369040021561		

FCC Part:	15.107
Test Method Used:	As detailed in ANSI C63.4 Section 7

Environmental Conditions:

Temperature (°C):	20
Relative Humidity (%):	23

Results: Live / Quasi Peak

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.357	Live	43.0	58.8	15.8	Complied
0.758	Live	36.5	56.0	19.5	Complied
0.762	Live	39.7	56.0	16.3	Complied
0.762	Live	39.0	56.0	17.0	Complied
0.870	Live	37.2	56.0	18.8	Complied
0.992	Live	40.2	56.0	15.8	Complied
1.005	Live	39.5	56.0	16.5	Complied
1.509	Live	40.6	56.0	15.4	Complied

Results: Live / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.362	Live	35.3	48.7	13.4	Complied
0.735	Live	29.1	46.0	16.9	Complied
1.086	Live	26.6	46.0	19.4	Complied
1.185	Live	31.4	46.0	14.6	Complied
1.388	Live	27.9	46.0	18.1	Complied
1.442	Live	26.3	46.0	19.7	Complied
1.478	Live	28.8	46.0	17.2	Complied
1.559	Live	26.2	46.0	19.8	Complied


Receiver/Idle Mode AC Conducted Spurious Emissions (continued)**Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
1.064	Neutral	30.8	56.0	25.2	Complied
1.113	Neutral	31.2	56.0	24.8	Complied
1.208	Neutral	32.4	56.0	23.6	Complied
1.275	Neutral	32.6	56.0	23.4	Complied
1.284	Neutral	31.9	56.0	24.1	Complied
1.410	Neutral	32.2	56.0	23.8	Complied
1.487	Neutral	33.1	56.0	23.0	Complied
1.842	Neutral	32.4	56.0	23.6	Complied
1.860	Neutral	32.7	56.0	23.3	Complied


Results: Neutral / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.389	Neutral	31.2	48.1	16.9	Complied
0.389	Neutral	31.7	48.1	16.4	Complied
0.398	Neutral	29.7	47.9	18.2	Complied
0.402	Neutral	29.1	47.8	18.7	Complied
0.461	Neutral	23.4	46.7	23.3	Complied
2.832	Neutral	15.6	46.0	30.4	Complied

Receiver/Idle Mode AC Conducted Spurious Emissions (continued)

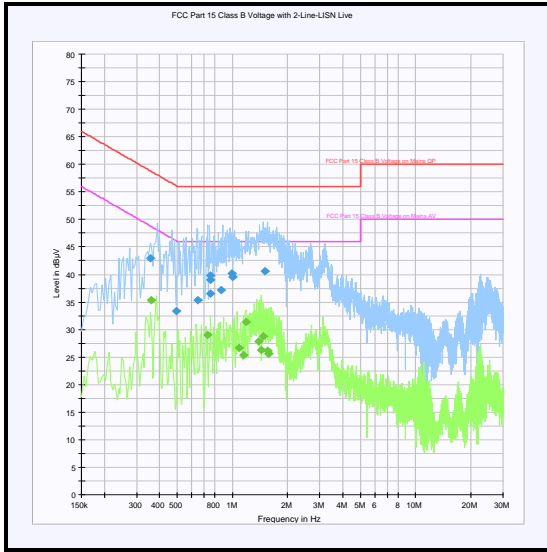

Live

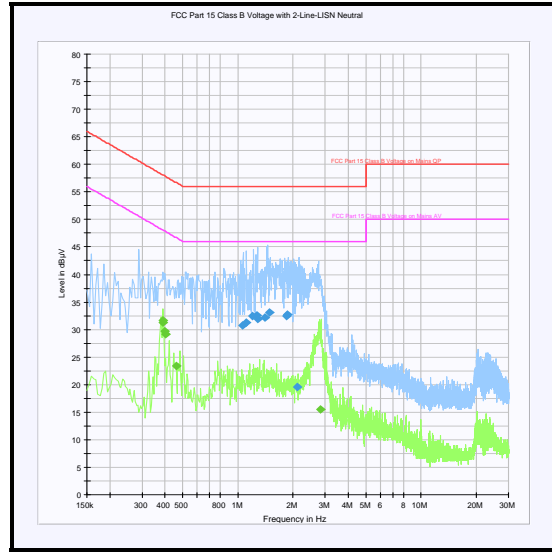

Neutral

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.2.2. Receiver/Idle Mode Radiated Spurious Emissions**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	17 January 2012
Test Sample IMEI:	359569040021561		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	28


Results: Quasi Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
31.393	Vertical	14.6	40.0	25.4	Complied
43.238	Vertical	16.3	40.0	23.7	Complied
63.416	Vertical	4.2	40.0	35.8	Complied
131.934	Vertical	10.0	43.5	33.5	Complied
460.556	Horizontal	15.4	46.0	30.6	Complied
957.191	Horizontal	22.6	46.0	23.4	Complied

Note(s):

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Receiver/Idle Mode Radiated Spurious Emissions (continued)

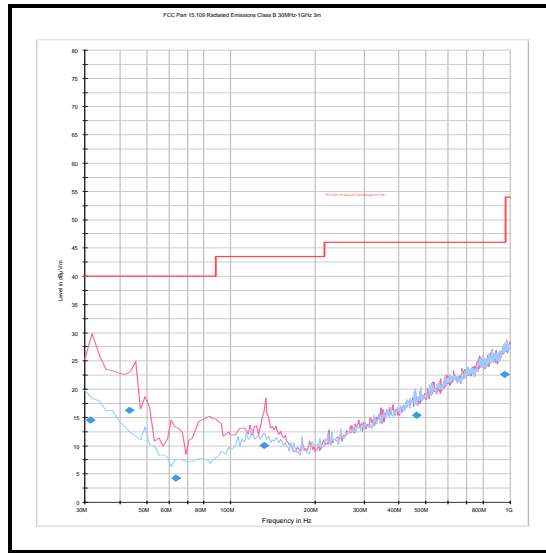

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Receiver/Idle Mode Radiated Spurious Emissions (continued)**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	18 January 2012
Test Sample IMEI:	359569040021561		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8
Frequency Range:	1 GHz to 5 GHz

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	22



Results:

Frequency (MHz)	Antenna Polarity	Peak Level (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Result
3975.952	Vertical	46.8	54.0	7.2	Complied

Note(s):

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.
3. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Receiver/Idle Mode Radiated Spurious Emissions (continued)

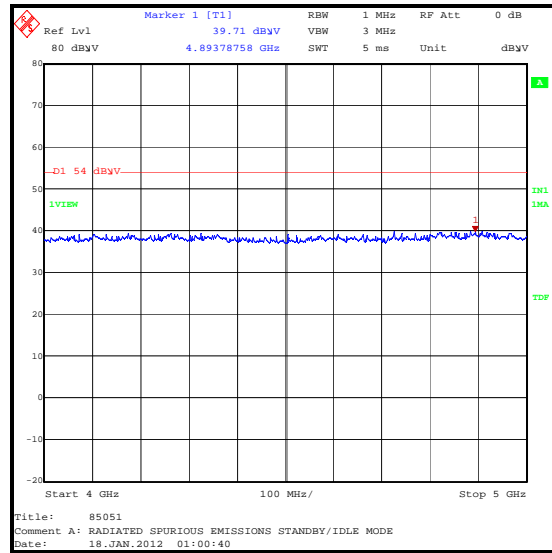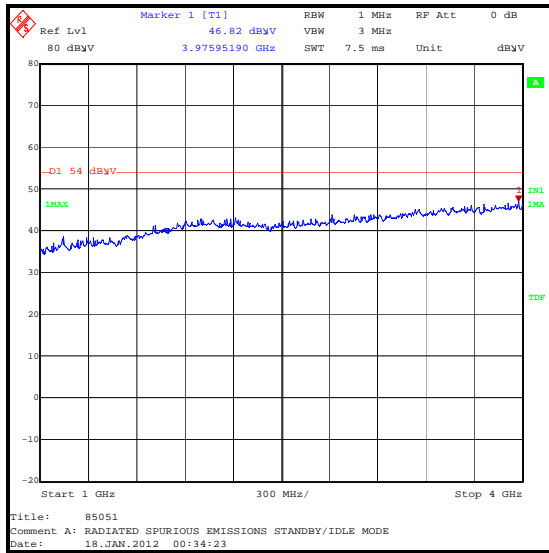

5.2.3. Transmitter Output Power (ERP)**Test Summary:**

Test Engineer:	Mark Percival	Test Date:	26 January 2012
Test Sample IMEI:	359569040021561		

FCC Part:	22.913(a)
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.17.2

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	21

Results: GSM Circuit Switched

Channel	Frequency (MHz)	Antenna Polarity	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	824.2	Vertical	27.9	38.45	10.55	Complied
Middle	836.6	Vertical	29.6	38.45	8.85	Complied
Top	848.8	Vertical	30.8	38.45	7.65	Complied

Results: GPRS

Channel	Frequency (MHz)	Antenna Polarity	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	824.2	Vertical	27.8	38.45	10.65	Complied
Middle	836.6	Vertical	29.5	38.45	8.95	Complied
Top	848.8	Vertical	30.6	38.45	7.85	Complied

Results: EGPRS / MCS5

Channel	Frequency (MHz)	Antenna Polarity	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	824.2	Vertical	26.6	38.45	11.85	Complied
Middle	836.6	Vertical	28.4	38.45	10.05	Complied
Top	848.8	Vertical	29.5	38.45	8.95	Complied

5.2.4. Transmitter Frequency Stability (Temperature Variation)**Test Summary:**

Test Engineer:	David Doyle	Test Date:	20 January 2012
Test Sample IMEI:	359569040021272		

FCC Part:	2.1055 & 22.355
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

Environmental Conditions:

Ambient Temperature (°C):	26
Ambient Relative Humidity (%):	20

Results: Middle Channel (836.6 MHz)

Temperature (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	836.599971	29	0.0347	2.5	2.4653	Complied
-20	836.599972	28	0.0335	2.5	2.4665	Complied
-10	836.599975	25	0.0299	2.5	2.4701	Complied
0	836.599978	22	0.0263	2.5	2.4737	Complied
10	836.599972	28	0.0335	2.5	2.4665	Complied
20	836.599972	28	0.0335	2.5	2.4665	Complied
30	836.599977	23	0.0275	2.5	2.4725	Complied
40	836.599976	24	0.0287	2.5	2.4713	Complied
50	836.599976	24	0.0287	2.5	2.4713	Complied

Note(s):

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMU 200. A bi-directional communications link was established between the EUT and CMU 200. The frequency meter value was recorded.
3. Temperature was monitored throughout the test with a calibrated digital thermometer.

5.2.5. Transmitter Frequency Stability (Voltage Variation)**Test Summary:**

Test Engineer:	David Doyle	Test Date:	20 January 2012
Test Sample IMEI:	359569040021272		

FCC Part:	2.1055 & 22.355
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

Environmental Conditions:

Temperature (°C):	20
Relative Humidity (%):	20

Results: Middle Channel (836.6 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
3.4	836.599972	28	0.0335	2.5	2.4665	Complied
4.35	836.599978	22	0.0263	2.5	2.4737	Complied

Note(s):

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMU 200. A bi-directional communications link was established between the EUT and CMU 200. The frequency meter value was recorded.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

5.2.6. Transmitter Occupied Bandwidth**Test Summary:**

Test Engineer:	David Doyle	Test Date:	19 January 2012
Test Sample IMEI:	359569040021272		

FCC Part:	2.1049
Test Method Used:	The 99% occupied bandwidth was measured using the Occupied Bandwidth function of a spectrum analyser

Environmental Conditions:

Temperature (°C):	27
Relative Humidity (%):	22

Results: GSM Circuit Switched

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Bottom	824.2	247.695
Middle	836.6	245.291
Top	848.8	245.291

Results: GPRS




Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Bottom	824.2	244.088
Middle	836.6	242.886
Top	848.8	244.088

Results: EGPRS / MCS5

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Bottom	824.2	241.683
Middle	836.6	245.291
Top	848.8	238.076




Transmitter Occupied Bandwidth (continued)

GSM Circuit Switched

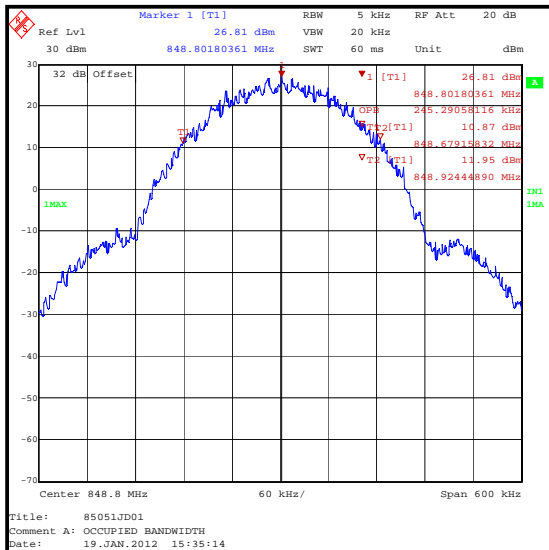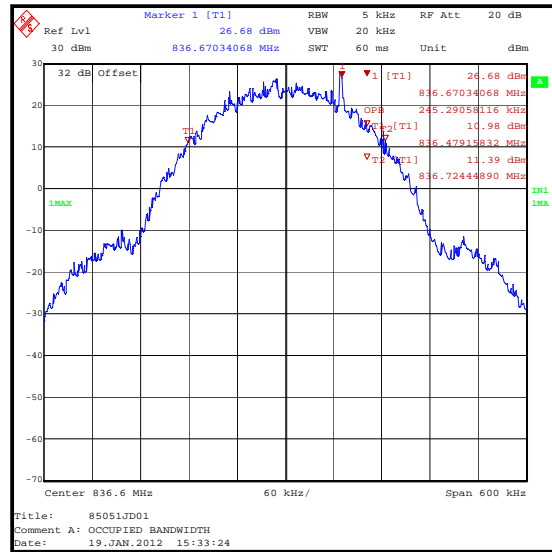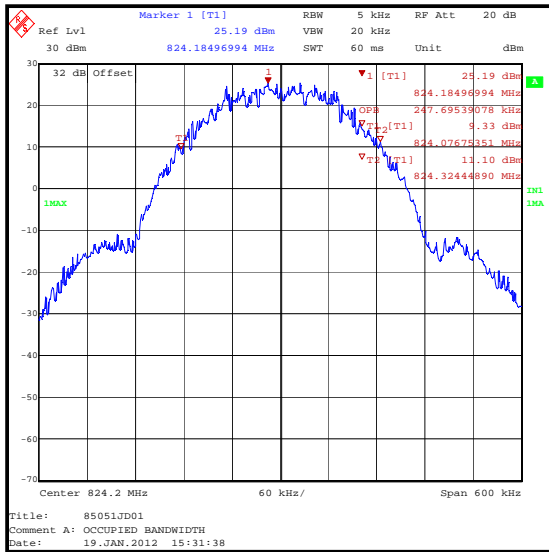




Transmitter Occupied Bandwidth (continued)

GPRS / GMSK

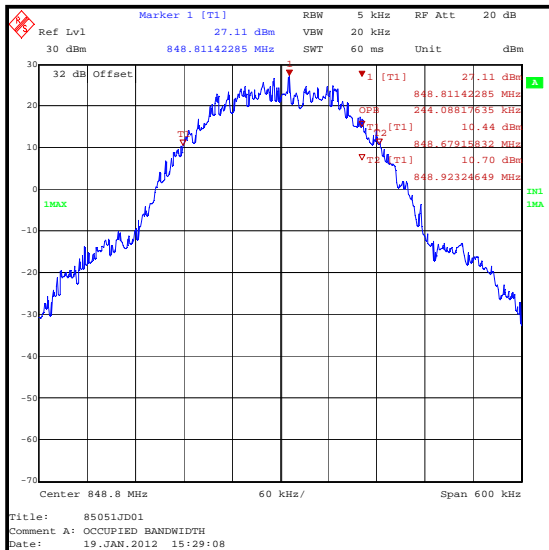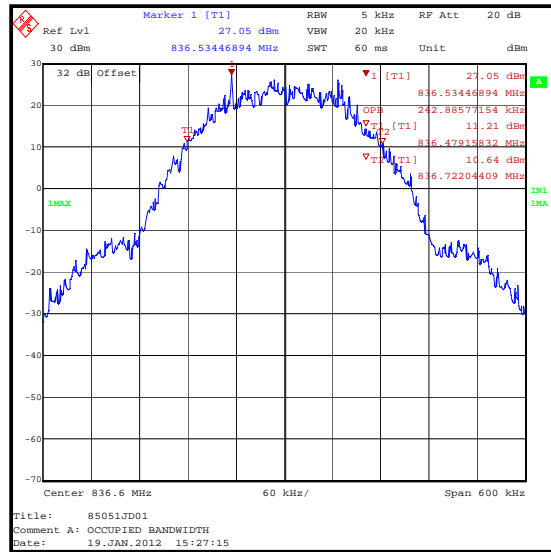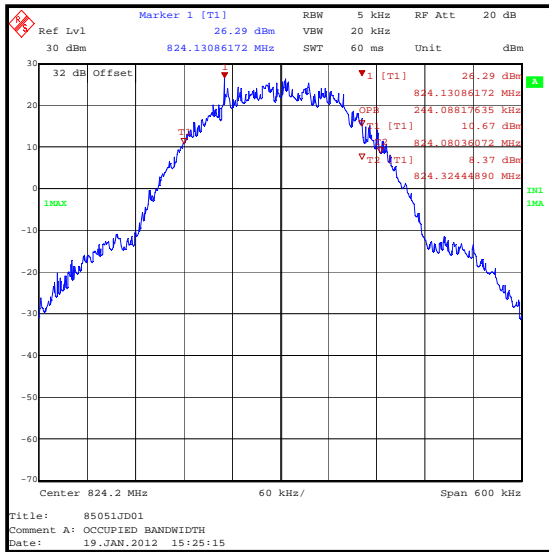

Transmitter Occupied Bandwidth (continued)

EGPRS / MCS5

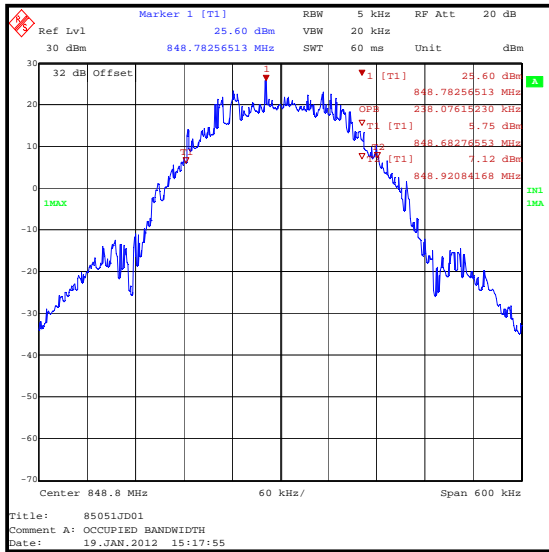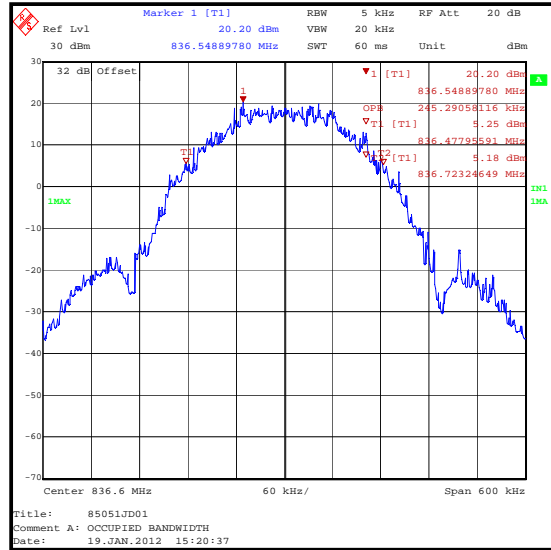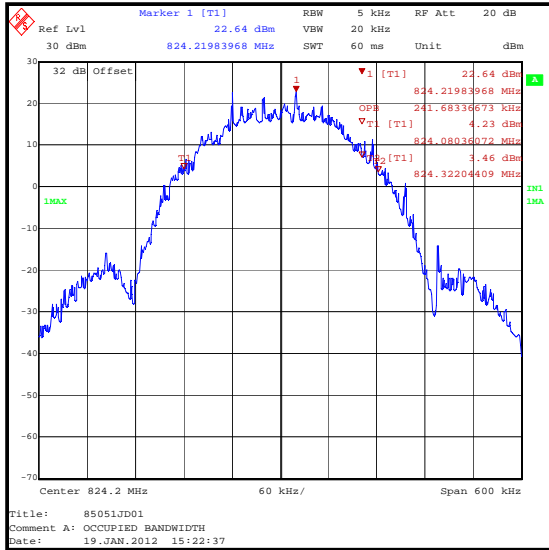

5.2.7. Transmitter Out of Band Radiated Emissions**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	17 January 2012
Test Sample IMEI:	359569040021561		

FCC Part:	2.1053 & 22.917
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Part 2.1053
Frequency Range:	30 MHz to 9 GHz
Configuration:	GSM Circuit Switched

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	28





Results: Top Channel

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1697.600	-37.1	-13.0	24.1	Complied



Note(s):

1. The uplink and downlink traffic channels are shown on the 30 MHz to 1 GHz plot.
2. All emissions shown on the pre-scan plots were investigated. Final measurements were made using appropriate RF filters and attenuators where required. The second harmonic of the top channel at 1697.6 MHz shown on the 1 GHz to 4 GHz plot, was investigated and found to be >20 dB below the limit but was recorded above. Bottom and middle channels were also measured, found to have second harmonic levels lower than the top channel and therefore, were not recorded. Any other emissions shown on the pre-scan plots were found to be below the measurement system noise floor or ambient.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions (continued)

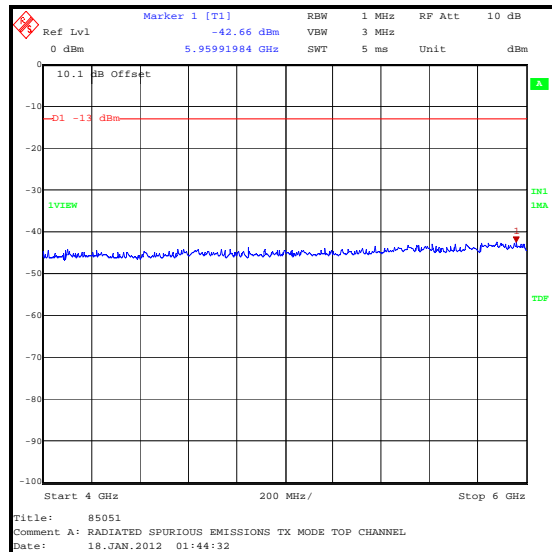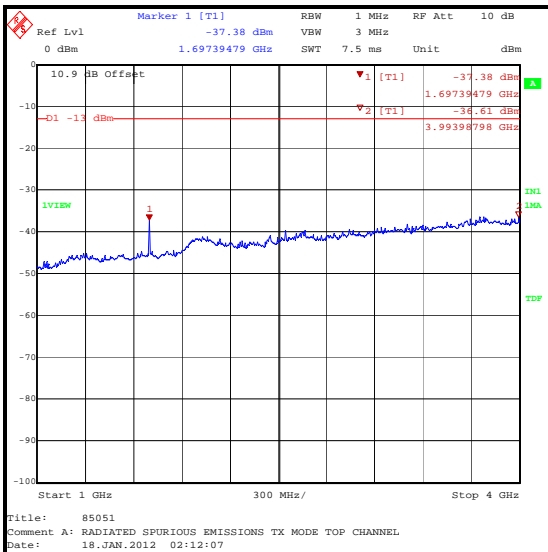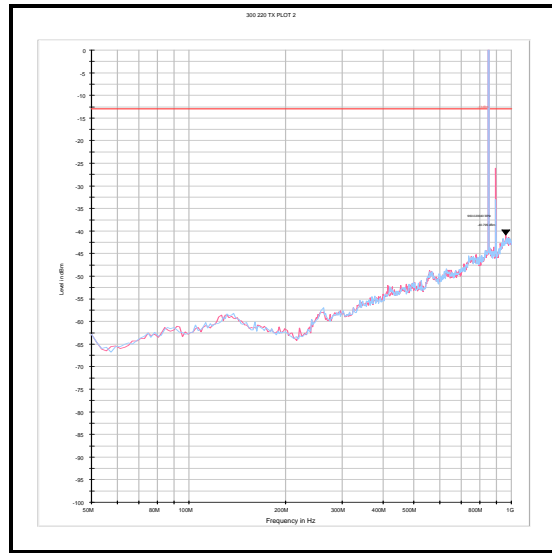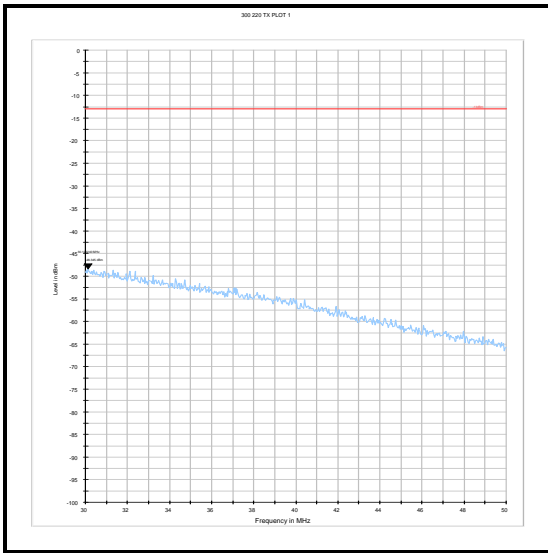

Transmitter Out of Band Radiated Emissions (continued)

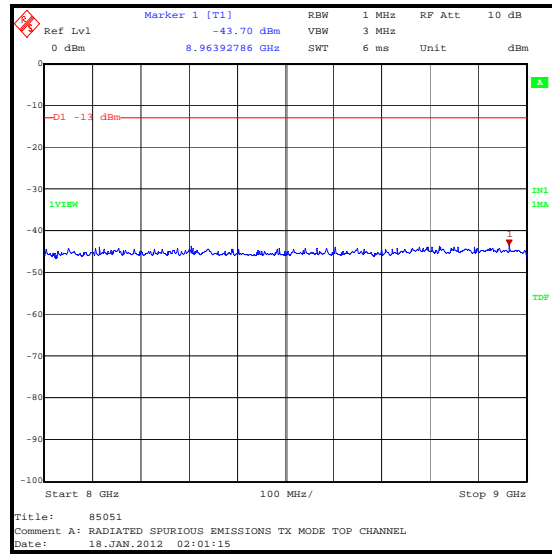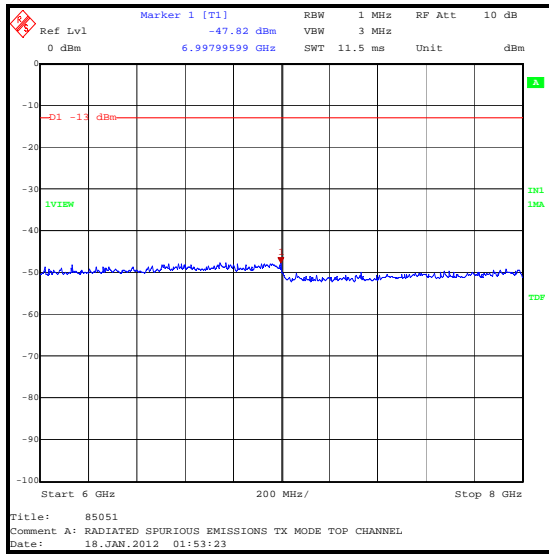

5.2.8. Transmitter Radiated Emissions at Band Edges

Test Summary:

Test Engineer:	Nick Steele	Test Date:	24 January 2012
Test Sample IMEI:	359569040021561		



FCC Part:	2.1053 & 22.917
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Part 22.917

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	23

Results: GSM Circuit Switched



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824.000	-15.5	-13.0	2.5	Complied
849.000	-16.0	-13.0	3.0	Complied
849.017	-15.0	-13.0	2.0	Complied

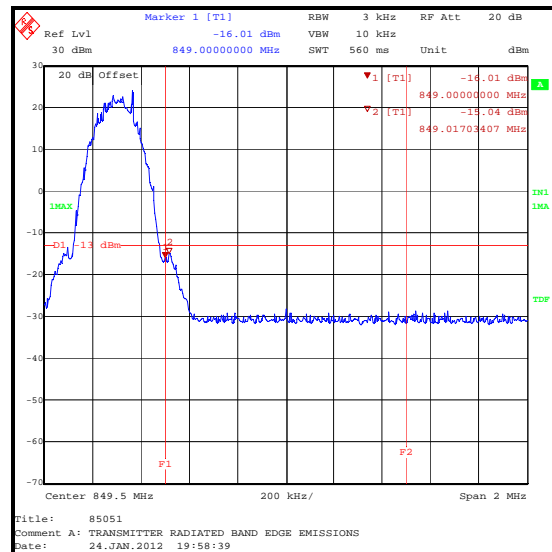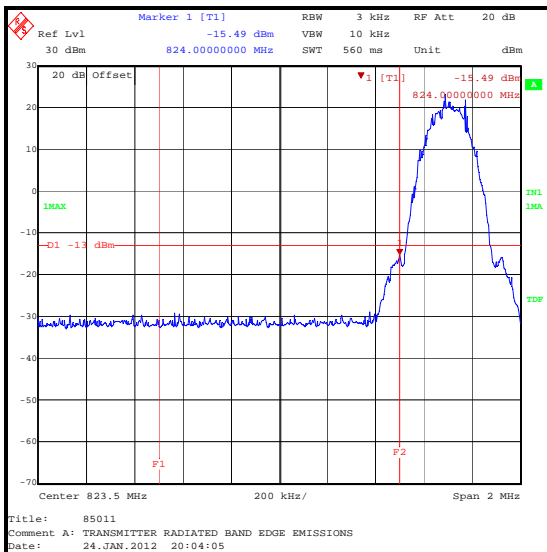

Transmitter Band Edge Radiated Emissions (continued)

Results: GPRS



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824.000	-18.6	-13.0	5.6	Complied
849.000	-19.4	-13.0	6.4	Complied
849.021	-18.6	-13.0	5.6	Complied

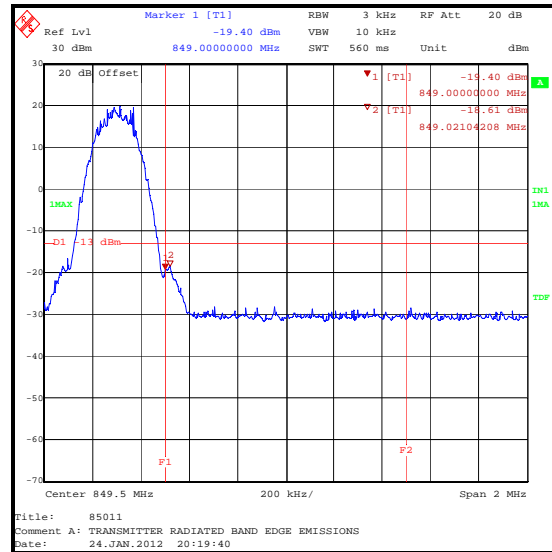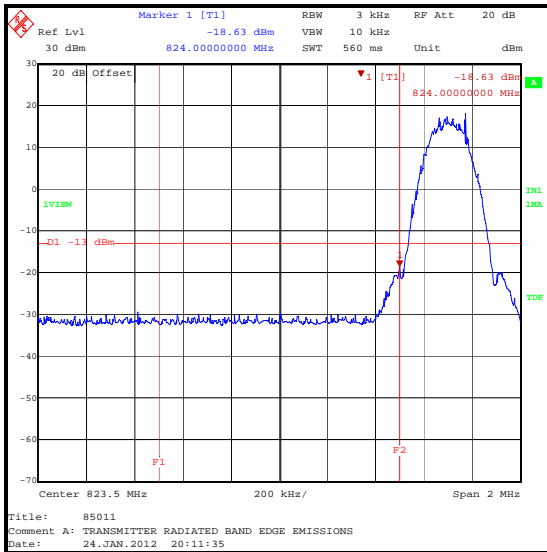

Transmitter Band Edge Radiated Emissions (continued)

Results: EGPRS / MCS5

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824.000	-16.7	-13.0	3.7	Complied
849.000	-17.4	-13.0	4.4	Complied
849.017	-15.8	-13.0	2.8	Complied

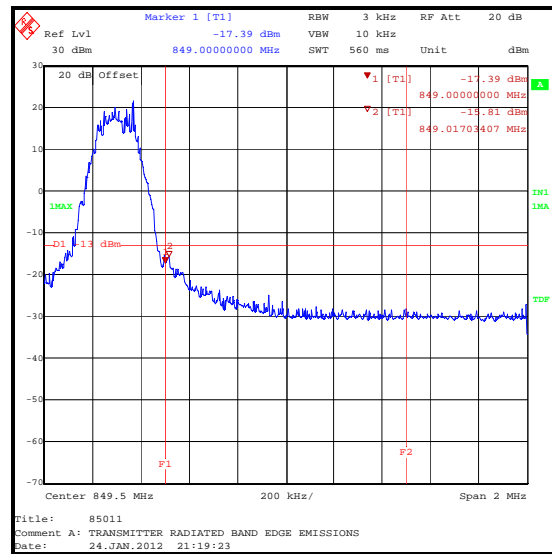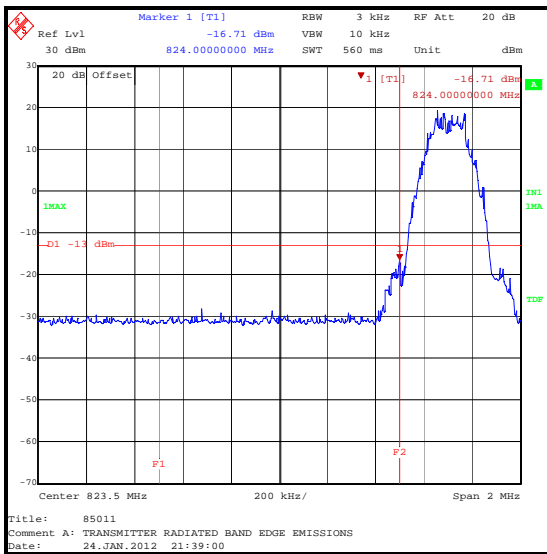

5.3. Test Results - Part 24**5.3.1. Receiver/Idle Mode AC Conducted Spurious Emissions****Test Summary:**

Test Engineer:	Mark Percival	Test Date:	24 January 2012
Test Sample IMEI:	359369040021561		

FCC Part:	15.107
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

Environmental Conditions:

Temperature (°C):	20
Relative Humidity (%):	23

Results: Live / Quasi Peak

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.357	Live	43.0	58.8	15.8	Complied
0.758	Live	36.5	56.0	19.5	Complied
0.762	Live	39.7	56.0	16.3	Complied
0.762	Live	39.0	56.0	17.0	Complied
0.870	Live	37.2	56.0	18.8	Complied
0.992	Live	40.2	56.0	15.8	Complied
1.005	Live	39.5	56.0	16.5	Complied
1.509	Live	40.6	56.0	15.4	Complied

Results: Live / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.362	Live	35.3	48.7	13.4	Complied
0.735	Live	29.1	46.0	16.9	Complied
1.086	Live	26.6	46.0	19.4	Complied
1.185	Live	31.4	46.0	14.6	Complied
1.388	Live	27.9	46.0	18.1	Complied
1.442	Live	26.3	46.0	19.7	Complied
1.478	Live	28.8	46.0	17.2	Complied
1.559	Live	26.2	46.0	19.8	Complied


Receiver/Idle Mode AC Conducted Spurious Emissions (continued)**Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
1.064	Neutral	30.8	56.0	25.2	Complied
1.113	Neutral	31.2	56.0	24.8	Complied
1.208	Neutral	32.4	56.0	23.6	Complied
1.275	Neutral	32.6	56.0	23.4	Complied
1.284	Neutral	31.9	56.0	24.1	Complied
1.410	Neutral	32.2	56.0	23.8	Complied
1.487	Neutral	33.1	56.0	23.0	Complied
1.842	Neutral	32.4	56.0	23.6	Complied
1.860	Neutral	32.7	56.0	23.3	Complied


Results: Neutral / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.389	Neutral	31.2	48.1	16.9	Complied
0.389	Neutral	31.7	48.1	16.4	Complied
0.398	Neutral	29.7	47.9	18.2	Complied
0.402	Neutral	29.1	47.8	18.7	Complied
0.461	Neutral	23.4	46.7	23.3	Complied
2.832	Neutral	15.6	46.0	30.4	Complied

Receiver/Idle Mode AC Conducted Spurious Emissions (continued)

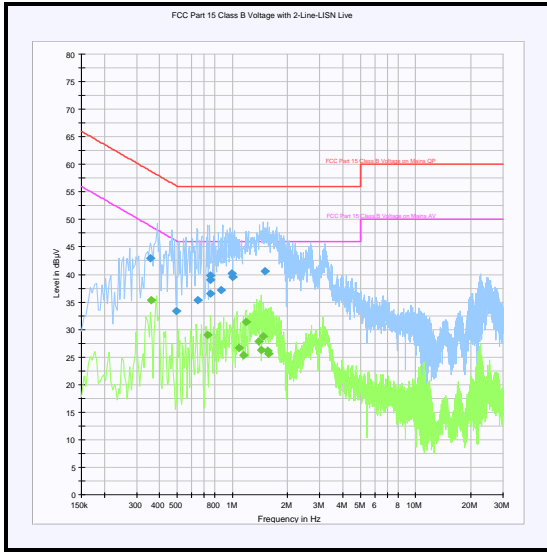

Live

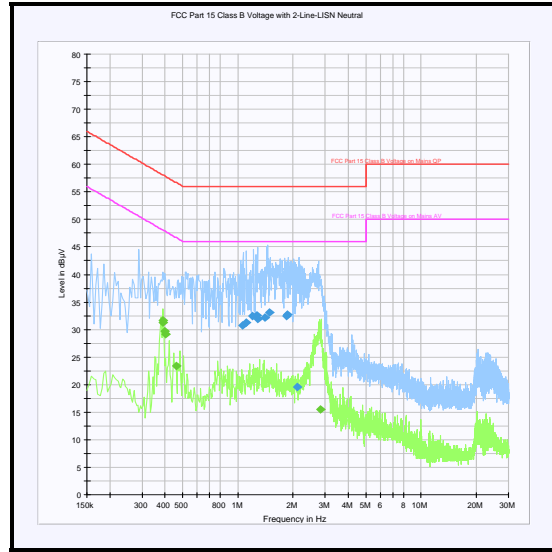

Neutral

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.3.2. Receiver/Idle Mode Radiated Spurious Emissions**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	17 January 2012
Test Sample IMEI:	359569040021561		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	28


Results: Quasi Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
31.393	Vertical	14.6	40.0	25.4	Complied
43.238	Vertical	16.3	40.0	23.7	Complied
63.416	Vertical	4.2	40.0	35.8	Complied
131.934	Vertical	10.0	43.5	33.5	Complied
460.556	Horizontal	15.4	46.0	30.6	Complied
957.191	Horizontal	22.6	46.0	23.4	Complied

Note(s):

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Receiver/Idle Mode Radiated Spurious Emissions (continued)

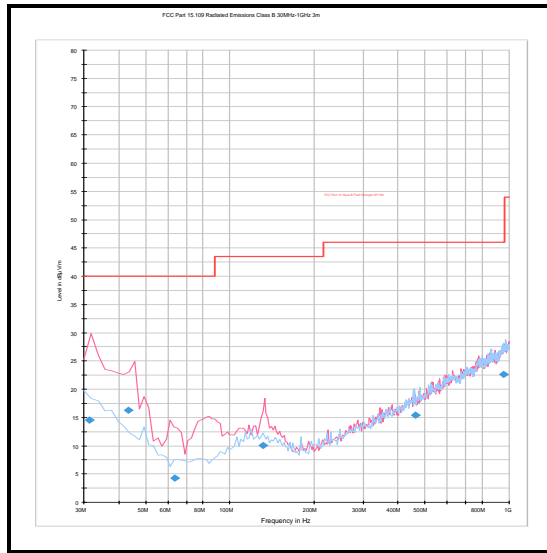

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Receiver/Idle Mode Radiated Spurious Emissions (continued)**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	18 January 2012
Test Sample IMEI:	359569040021561		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8
Frequency Range:	1 GHz to 10 GHz

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	21





Results:

Frequency (MHz)	Antenna Polarity	Peak Level (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Result
3975.952	Vertical	46.8	54.0	7.2	Complied

Note(s):

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.
3. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Receiver/Idle Mode Radiated Spurious Emissions (continued)

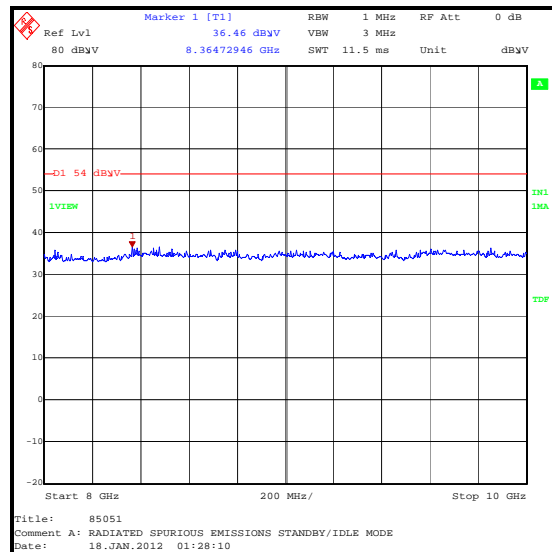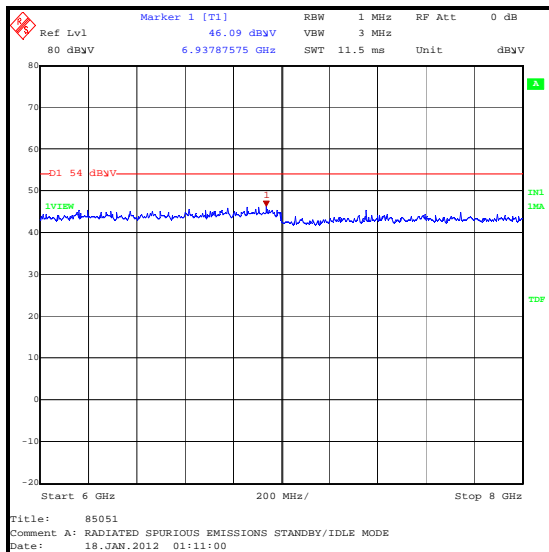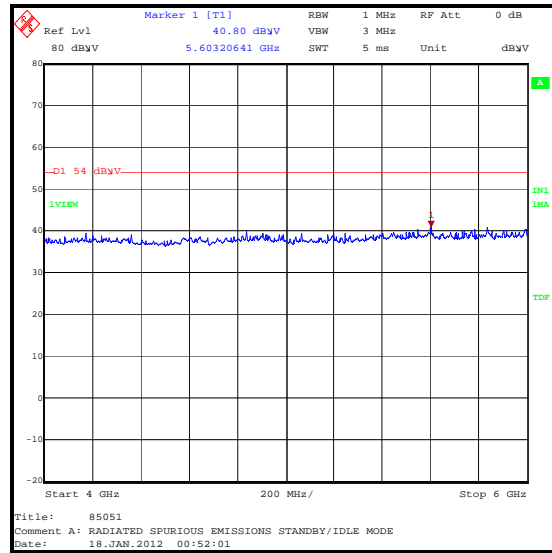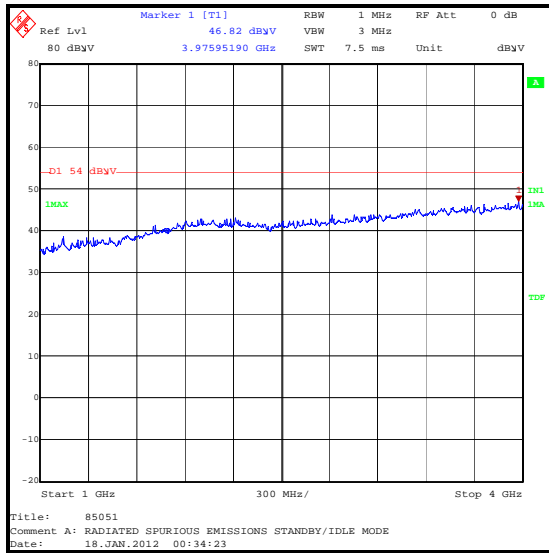

5.3.3. Transmitter Output Power (EIRP)**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	26 January 2012
Test Sample IMEI:	359569040021561		

FCC Part:	24.232
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.17.2

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	21

Results: GSM Circuit Switched

Channel	Frequency (MHz)	Antenna Polarity	EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	1850.2	Horizontal	25.8	33.0	7.2	Complied
Middle	1879.8	Horizontal	26.2	33.0	6.8	Complied
Top	1909.8	Horizontal	26.9	33.0	6.1	Complied

Results: GPRS

Channel	Frequency (MHz)	Antenna Polarity	EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	1850.2	Horizontal	24.5	33.0	8.5	Complied
Middle	1879.8	Horizontal	25.4	33.0	7.6	Complied
Top	1909.8	Horizontal	26.3	33.0	6.7	Complied

Results: EGPRS / MCS5

Channel	Frequency (MHz)	Antenna Polarity	EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	1850.2	Horizontal	24.3	33.0	8.7	Complied
Middle	1879.8	Horizontal	25.3	33.0	7.7	Complied
Top	1909.8	Horizontal	25.5	33.0	7.5	Complied

5.3.4. Transmitter Frequency Stability (Temperature Variation)**Test Summary:**

Test Engineer:	David Doyle	Test Date:	20 January 2012
Test Sample IMEI:	359569040021272		

FCC Part:	2.1055 & 24.235
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

Environmental Conditions:

Ambient Temperature (°C):	26
Ambient Relative Humidity (%):	20

Results: Bottom Channel (1850.2 MHz)

Temperature (°C)	Frequency Error (Hz)	Measured Frequency (MHz)	Lower Band Edge Limit (MHz)	Margin (MHz)	Result
-30	57	1850.199943	1850.0	0.199943	Complied
-20	59	1850.199941	1850.0	0.199941	Complied
-10	47	1850.199953	1850.0	0.199953	Complied
0	70	1850.199930	1850.0	0.199930	Complied
10	49	1850.199951	1850.0	0.199951	Complied
20	43	1850.199957	1850.0	0.199957	Complied
30	76	1850.199924	1850.0	0.199924	Complied
40	42	1850.200042	1850.0	0.200042	Complied
50	50	1850.199950	1850.0	0.199950	Complied

Results: Top Channel (1909.8 MHz)

Temperature (°C)	Frequency Error (Hz)	Measured Frequency (MHz)	Upper Band Edge Limit (MHz)	Margin (MHz)	Result
-30	96	1909.800096	1910.0	0.199904	Complied
-20	36	1909.799964	1910.0	0.200036	Complied
-10	68	1909.799932	1910.0	0.200068	Complied
0	72	1909.799928	1910.0	0.200072	Complied
10	33	1909.799967	1910.0	0.200033	Complied
20	63	1909.799937	1910.0	0.200063	Complied
30	43	1909.799957	1910.0	0.200043	Complied
40	31	1909.799969	1910.0	0.200031	Complied
50	64	1909.800064	1910.0	0.199936	Complied

Transmitter Frequency Stability (Temperature Variation) (continued)**Note(s):**

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMU 200. A bidirectional communications link was established between the EUT and CMU 200. The frequency meter value was recorded.
3. Temperature was monitored throughout the test with a calibrated digital thermometer.

5.3.5. Transmitter Frequency Stability (Voltage Variation)**Test Summary:**

Test Engineer:	David Doyle	Test Date:	20 January 2012
Test Sample IMEI:	359569040021272		

FCC Part:	2.1055 & 24.235
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

Environmental Conditions:

Temperature (°C):	20
Relative Humidity (%):	20

Results: Bottom Channel (1850.2 MHz)

Supply Voltage (V)	Frequency Error (Hz)	Measured Frequency (MHz)	Lower Band Edge Limit (MHz)	Margin (MHz)	Result
3.4	42	1850.199958	1850.0	0.199958	Complied
4.35	38	1850.199962	1850.0	0.199962	Complied

Results: Top Channel (1909.8 MHz)

Supply Voltage (V)	Frequency Error (Hz)	Measured Frequency (MHz)	Upper Band Edge Limit (MHz)	Margin (MHz)	Result
3.4	41	1909.800041	1910.0	0.199959	Complied
4.35	64	1909.799936	1910.0	0.200064	Complied

Note(s):

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMU 200. A bidirectional communications link was established between the EUT and CMU 200. The frequency meter value was recorded.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

5.3.6. Transmitter Occupied Bandwidth**Test Summary:**

Test Engineer:	David Doyle	Test Date:	19 January 2012
Test Sample IMEI:	359569040021272		

FCC Part:	2.1049
Test Method Used:	The 99% occupied bandwidth was measured using the Occupied Bandwidth function of a spectrum analyser

Environmental Conditions:

Temperature (°C):	27
Relative Humidity (%):	22

Results: GSM Circuit Switched

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Bottom	1850.2	248.898
Middle	1879.8	244.088
Top	1909.8	245.291

Results: GPRS




Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Bottom	1850.2	240.481
Middle	1879.8	245.291
Top	1909.8	240.481

Results: EGPRS / MCS5

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Bottom	1850.2	240.481
Middle	1879.8	241.683
Top	1909.8	239.279




Transmitter Occupied Bandwidth (continued)

GSM Circuit Switched

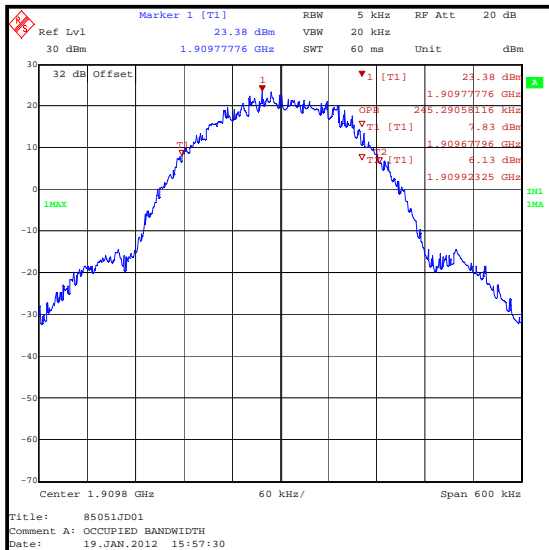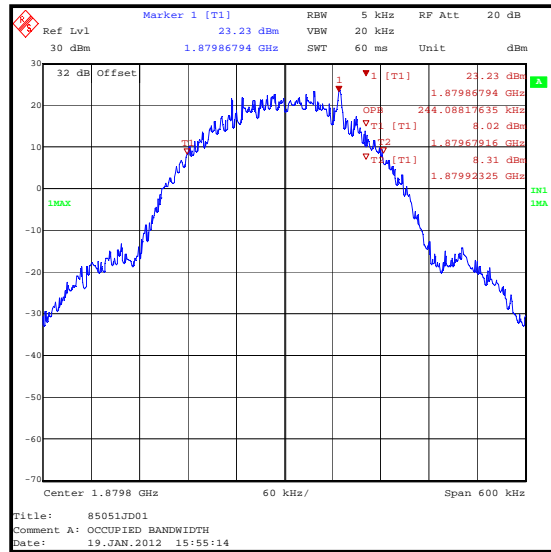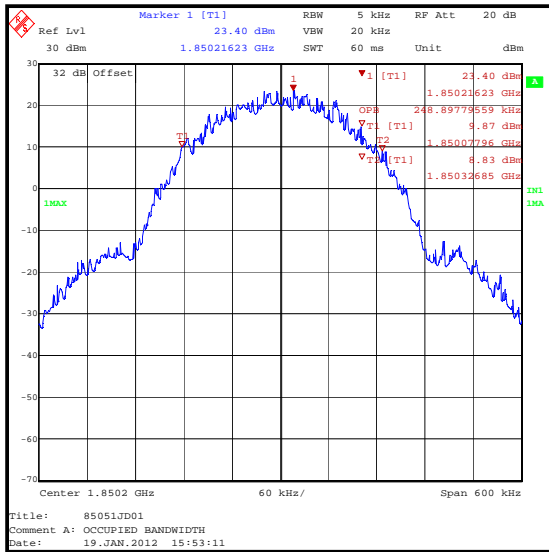




Transmitter Occupied Bandwidth (continued)

GPRS

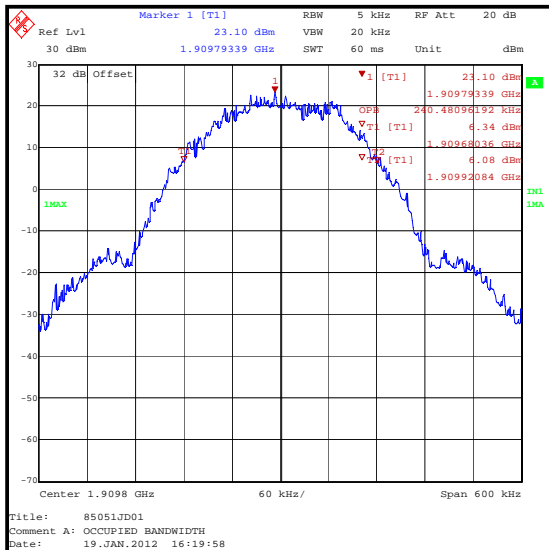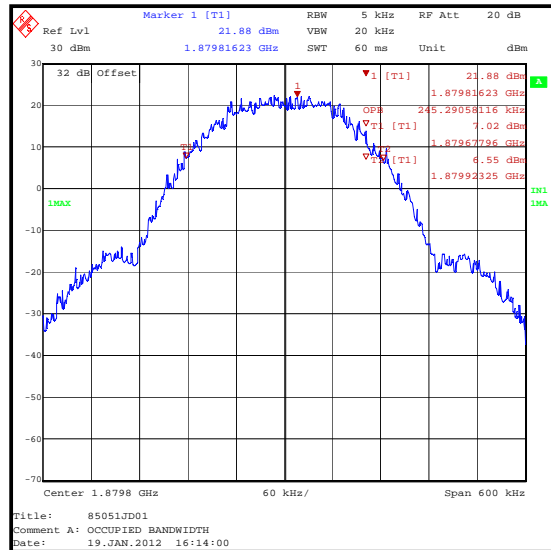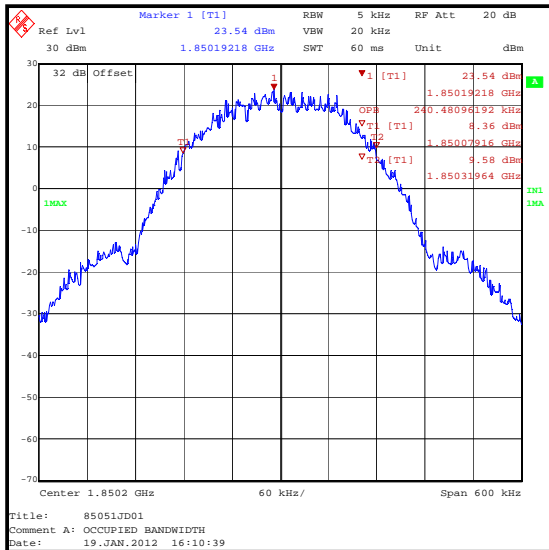

Transmitter Occupied Bandwidth (continued)

EGPRS / MCS5

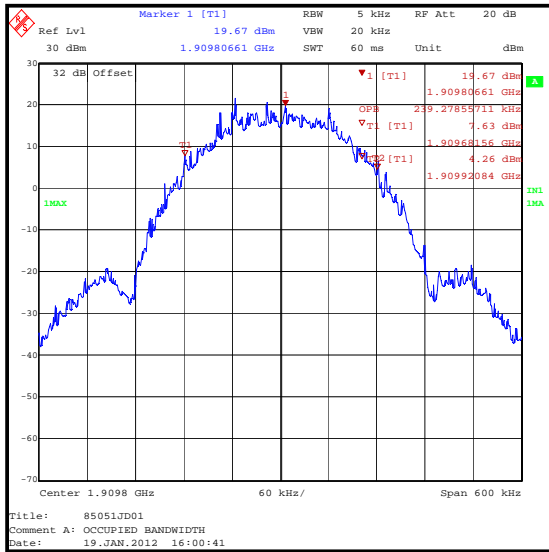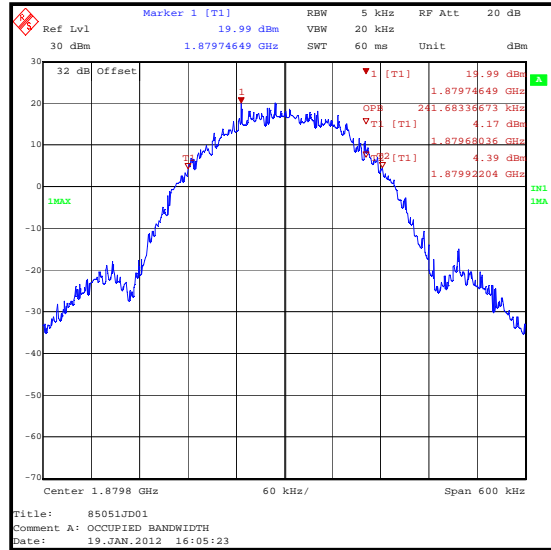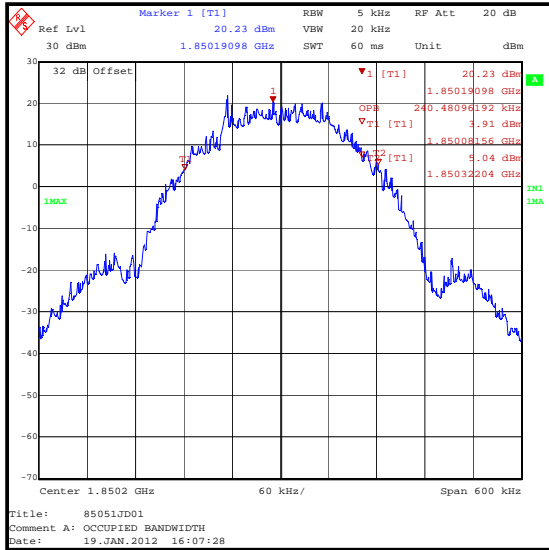

5.3.7. Transmitter Out of Band Radiated Emissions**Test Summary:**

Test Engineers:	Andrew Edwards & Nick Steele	Test Dates:	17 January 2012 & 24 January 2012
Test Sample IMEI:	359569040021561		

FCC Part:	2.1053 & 24.238
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Parts 2.1053 and 24.238
Frequency Range:	30 MHz to 20 GHz
Configuration:	GSM Circuit Switched

Environmental Conditions:

Temperature (°C):	22 to 24
Relative Humidity (%):	23 to 28





Results:

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
3793.587	-35.6	-13.0	22.6	Complied





Note(s):

- All emissions shown on the pre-scan plots were investigated and found to be ambient, or >20 dB below the applicable limit or below the measurement system noise floor. Therefore the highest peak noise floor reading of the measuring receiver was recorded in the table above.
- The uplink traffic channels are shown on the 1 GHz to 4 GHz plot.
- Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
- Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions (continued)

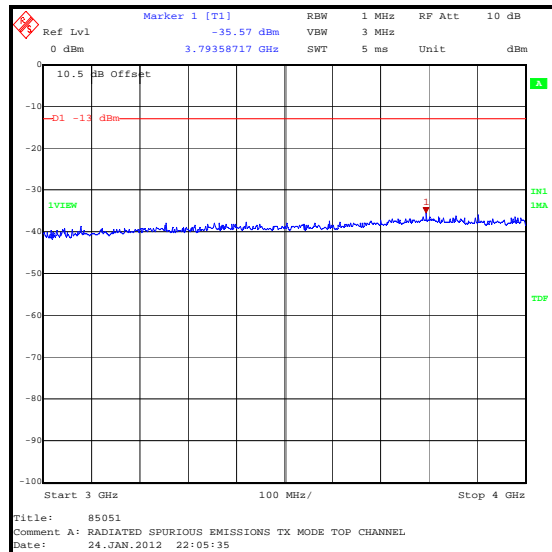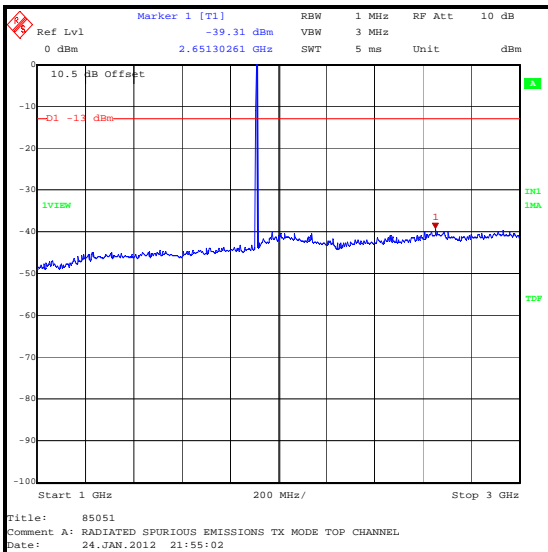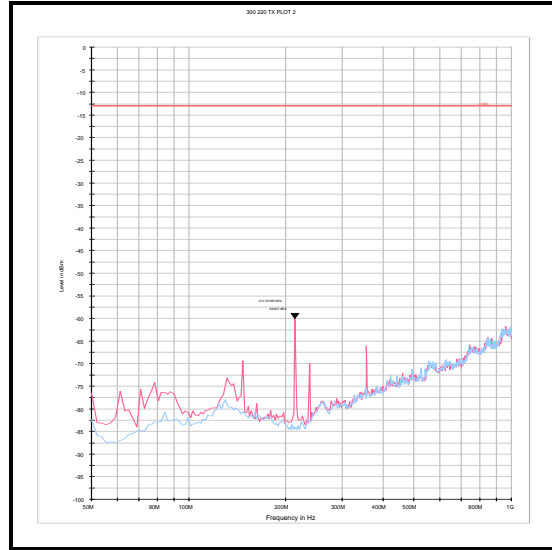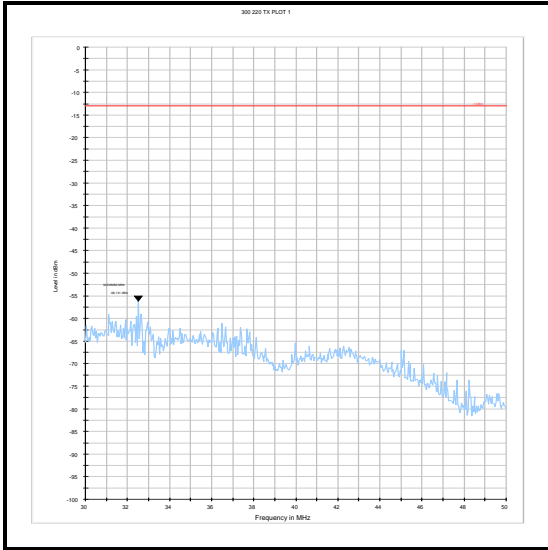

Transmitter Out of Band Radiated Emissions (continued)

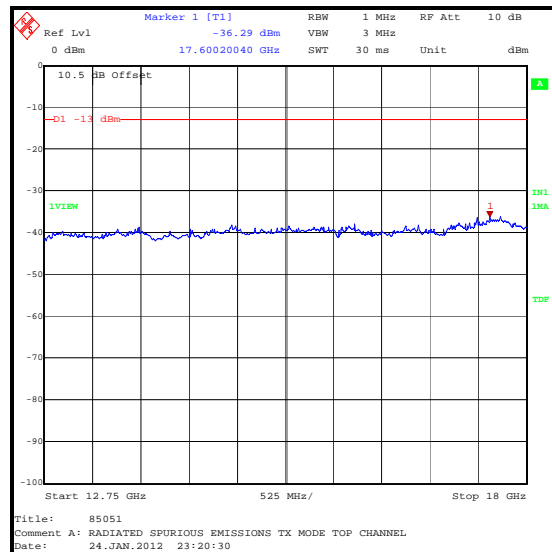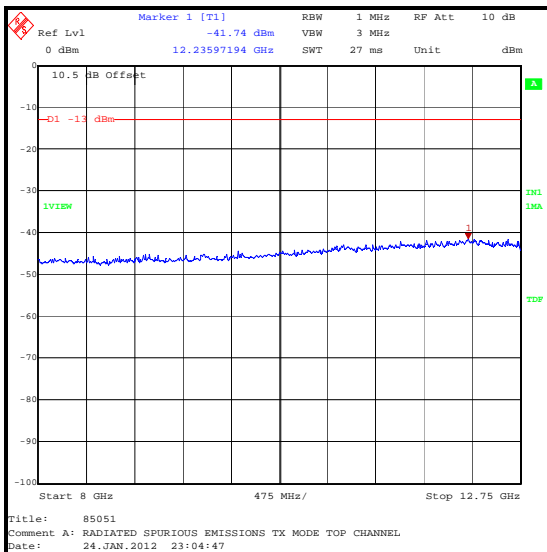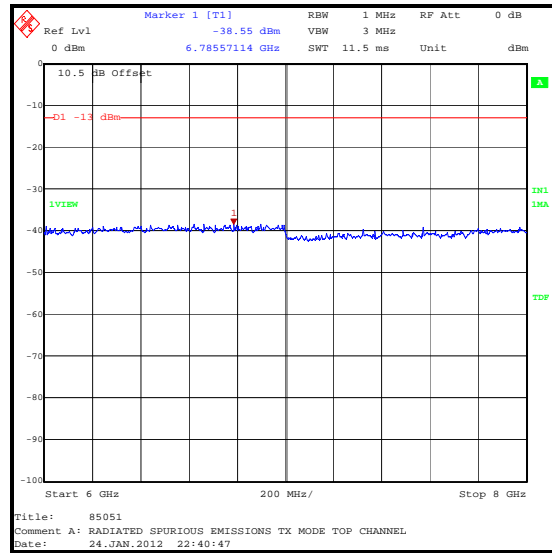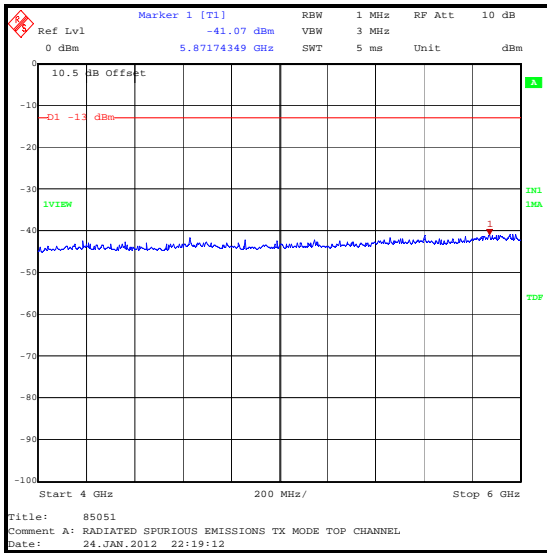

5.3.8. Transmitter Band Edge Radiated Emissions

Test Summary:

Test Engineer:	Nick Steele	Test Date:	25 January 2012
Test Sample IMEI:	359569040021561		



FCC Part:	2.1053 & 24.238
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Parts 2.1053 and 24.238

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	23

Results: GSM Circuit Switched



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850.000	19.0	-13.0	6.0	Complied
1910.000	-19.1	-13.0	6.1	Complied
1910.021	-18.0	-13.0	5.0	Complied

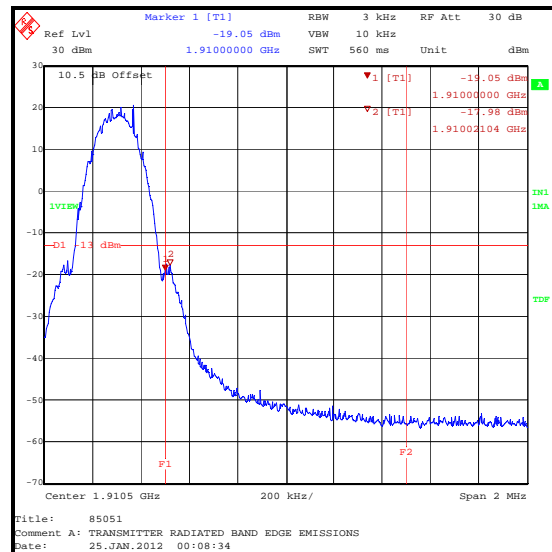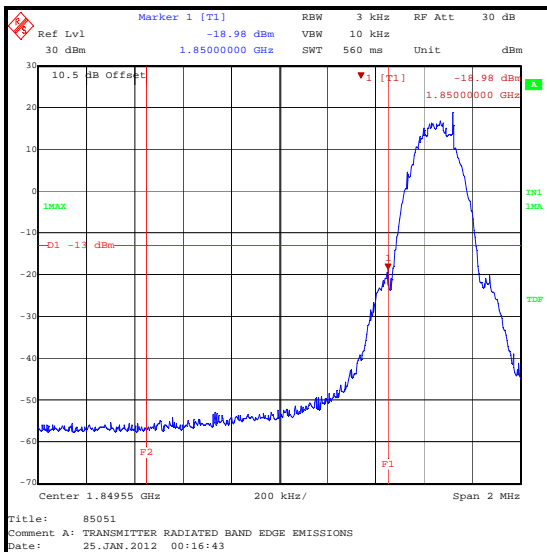

Transmitter Band Edge Radiated Emissions (continued)

Results: GPRS



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850.000	-21.9	-13.0	8.9	Complied
1910.000	-22.3	-13.0	9.3	Complied
1910.021	-20.8	-13.0	7.8	Complied

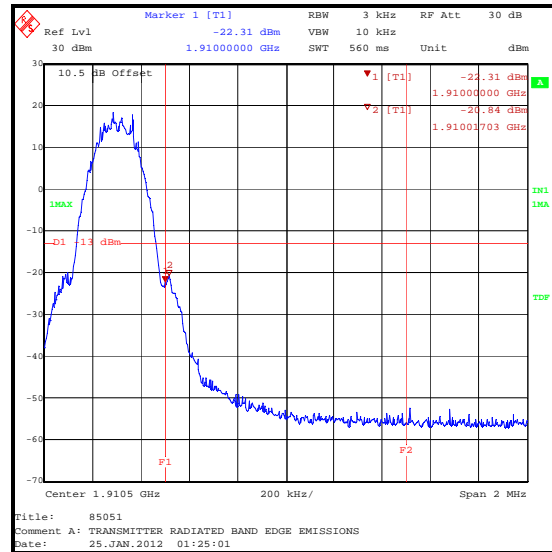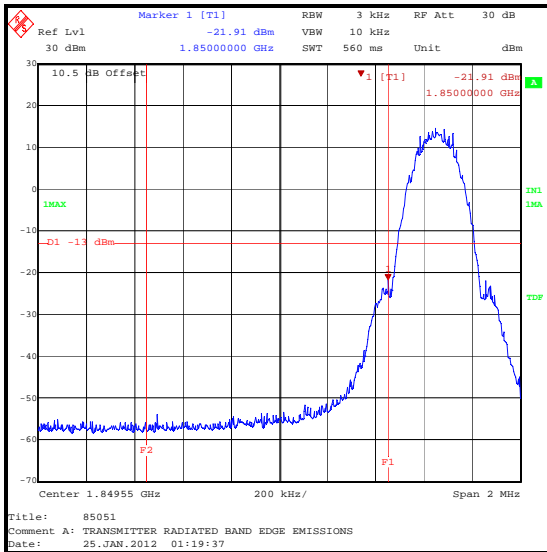

Transmitter Band Edge Radiated Emissions (continued)

Results: EGPRS / MCS5

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
1850	-21.4	-13.0	8.4	Complied
1910	-19.9	-13.0	6.9	Complied

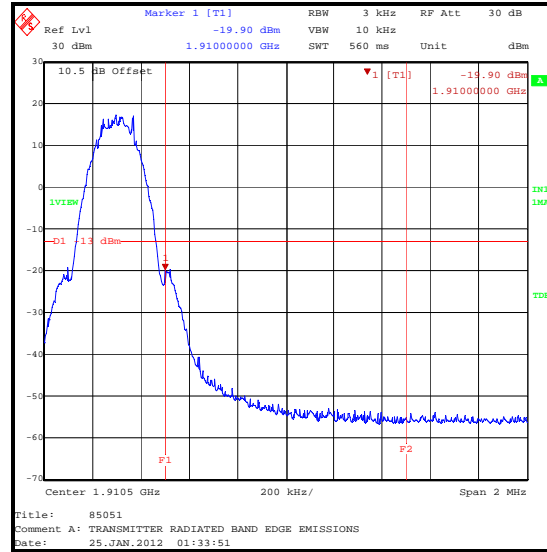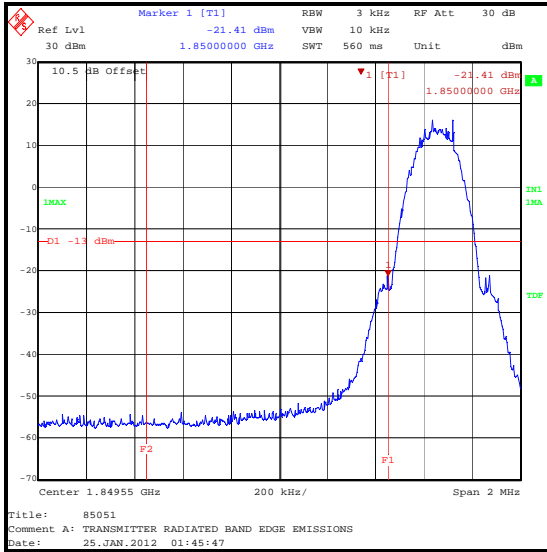

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
Effective Radiated Power (ERP)	824 to 849 MHz	95%	±2.94 dB
Effective Isotropic Radiated Power (EIRP)	1850 to 1910 MHz	95%	±2.94 dB
Conducted Output Power	824 to 849 MHz / 1850 to 1910 MHz	95%	±0.27 dB
Frequency Stability	824 to 849 MHz / 1850 to 1910 MHz	95%	±0.92 ppm
Occupied Bandwidth	824 to 849 MHz / 1850 to 1910 MHz	95%	±0.92 ppm
Radiated Spurious Emissions	30 MHz to 20 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval
A067	LISN	Rohde & Schwarz	ESH3-Z5	890603/002	02 Jun 2012	12
A1368	Directional Coupler	Pasternack	PE2214-10	None	Calibrated before use	-
A1396	Attenuator	Huber & Suhner	757987	6810.17.B	08 Jul 2012	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	09 Oct 2012	12
A1818	Antenna	EMCO	3115	00075692	09 Oct 2012	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	05 Mar 2012	12
A1834	Attenuator	Hewlett Packard	8491B	10444	26 Jul 2012	12
A1974	High Pass Filter	AtlanTecRF	AFH-01000	090000283	28 Feb 2012	12
A1975	High Pass Filter	AtlanTecRF	AFH-03000	090424010	28 Feb 2012	12
A244	Attenuator	Schaffner	6820-17-B	None	09 Feb 2012	12
A253	Antenna	Flann Microwave	12240-20	128	09 Oct 2012	12
A254	Antenna	Flann Microwave	14240-20	139	09 Oct 2012	12
A255	Antenna	Flann Microwave	16240-20	519	09 Oct 2012	12
A256	Antenna	Flann Microwave	18240-20	400	09 Oct 2012	12
A288	Antenna	Chase	CBL6111A	1589	19 Aug 2012	12
A436	Antenna	Flann	20240-20	330	09 Oct 2012	12
A553	Antenna	Chase	CBL6111A	1593	26 Mar 2012	12
E013	Temp Chamber	Sanyo	ATMOS	N/A	Calibrated Before Use	-
G040	Signal Generator	Rohde & Schwarz	SMY 02	841 070/004	16 Jun 2012	24
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	29 May 2012	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	09 Oct 2012	12
M1124	Spectrum Analyser	Rohde & Schwarz	ESI26	100046K	29 Jun 2012	12
M1249	Thermometer	Fluke	52II	88800049	15 Nov 2012	12
M1263	Test Receiver	Rohde & Schwarz	ESIB7	100265	13 Jul 2012	12
M1269	Multimeter	Fluke	179	90250210	20 Jul 2012	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	04 Feb 2012	12
M1379	Test Receiver	Rohde & Schwarz	ESIB7	100330	20 Sep 2012	12
M1620	Radio Comms Tester	Rohde & Schwarz	CMU 200	111379	10 Feb 2012	12

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	11 May 2012	12
S011	DC Power Supply Unit	INSTEK	PR-3010H	9401270	Calibrated Before Use	-