

TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: SoftBank EB-3236

FCC ID: UCE211047A

To: FCC Part 15.225: 2011 Subpart C

Test Report Serial No.:
RFI-RPT-RP85037JD01E

**This Test Report Is Issued Under The Authority
Of Chris Guy, Head of Global Approvals:**



Checked By:

Ian Watch

Signature:



Date of Issue:

31 January 2012

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG

Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001

Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number: 2117901

This page has been left intentionally blank.

Table of Contents

1. Customer Information	4
2. Summary of Testing	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
3. Equipment Under Test (EUT)	6
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	6
3.3. Modifications Incorporated in the EUT	6
3.4. Additional Information Related to Testing	7
3.5. Support Equipment	7
4. Operation and Monitoring of the EUT during Testing	8
4.1. Operating Modes	8
4.2. Configuration and Peripherals	8
5. Measurements, Examinations and Derived Results	9
5.1. General Comments	9
5.2. Test Results	10
5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions	10
5.2.2. Receiver/Idle Mode Radiated Spurious Emissions	13
5.2.3. Transmitter Fundamental Field Strength	15
5.2.4. Transmitter Radiated Spurious Emissions	16
5.2.5. Transmitter Band Edge Radiated Emissions	19
5.2.6. Transmitter 20 dB Bandwidth	20
5.2.7. Transmitter Frequency Stability (Temperature & Voltage Variation)	21
6. Measurement Uncertainty	22
Appendix 1. Test Equipment Used	23

1. Customer Information










Company Name:	Panasonic Mobile Communications Development of Europe Ltd.
Address:	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.225
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 15 Subpart C (Radio Frequency Devices) - Section 15.225
Specification Reference:	47CFR15.107 and 47CFR15.109
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 15 Subpart B (Radio Frequency Devices) - Sections 15.107 and 15.109
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 15 Subpart C (Intentional Radiators) - Section 15.209
Site Registration:	209735
Location of Testing:	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	05 January 2012 to 25 January 2012

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.107(a)	Receiver/Idle Mode AC Conducted Spurious Emissions	
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
Part 15.225(a)(b)(c)(d)	Transmitter Fundamental Field Strength	
Part 15.209(a), 15.225(d)	Transmitter Radiated Spurious Emissions	
Part 15.209(a), 15.225(c)(d)	Transmitter Band Edge Radiated Emissions	
Part 2.1049	Transmitter 20 dB Bandwidth	
Part 15.225(e)	Transmitter Frequency Stability (Temperature & Voltage Variation)	
Key to Results  = Complied  = Did not comply		

2.3. Methods and Procedures

Reference:	ANSI C63.4 (2009)
Title:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
Reference:	ANSI C63.10 (2009)
Title:	American National Standard for Testing Unlicensed Wireless Devices

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	SoftBank
Model Name or Number:	EB-3236
IMEI:	004401221182088 (<i>Radiated Sample #1</i>) 004401221182070 (<i>Radiated Sample #2</i>) 004401221181825 (<i>Radiated Sample #3</i>) 004401221182146 (<i>Conducted Sample</i>)
Hardware Version Number:	Rev C
Software Version Number:	ACPU: sbm-07-0192 CCPU: R1B_1_EC02_01_S02
FCC ID:	UCE211047A

Brand Name:	SoftBank
Description:	AC Charger
Model Name or Number:	PM CBD1
Hardware Version Number:	N0JZZY000007

Brand Name:	SoftBank
Description:	Charge/USB Data cable
Model Name or Number:	Not marked or stated

Brand Name:	SoftBank
Description:	Personal Hands-Free
Model Name or Number:	Not marked or stated

3.2. Description of EUT

The equipment under test was a dual mode UMTS/GSM Mobile Phone with WLAN, *Bluetooth* and RFID.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	RFID	
Category of Equipment:	Transceiver	
Channel Spacing:	Single channel device	
Transmit Frequency Range:	13.56 MHz	
Receive Frequency Range:	13.56 MHz	
Power Supply Requirement:	Nominal	3.8 V
	Minimum	3.4 V
	Maximum	4.35 V
Tested Temperature Range:	Minimum	-20°C
	Maximum	50°C

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Brand Name:	Panasonic
Description:	Laptop PC
Model Name or Number:	Toughbook CF-74

Brand Name:	Buffalo
Description:	USB Hub
Model Name or Number:	BSH3U01

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.
- Constantly transmitting at full power with a modulated carrier in RFID test mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The conducted sample with IMEI 004401221182146 was used for occupied bandwidth measurements.
- The radiated sample with IMEI 004401221181825 was used for frequency stability measurements.
- The radiated sample with IMEI 004401221182070 was used for AC conducted emissions measurements.
- The radiated sample with IMEI 004401221182088 was used for all other measurements.
- The RFID transmitter test mode was enabled by means of bespoke software on a laptop PC provided by the Customer.
- Receiver Idle/standby mode radiated spurious emission tests were performed with the AC Charger and Personal Hands-Free connected to the EUT.
- Transmitter radiated spurious emission tests were performed with the Personal Hands-Free and USB hub connected to the EUT.
- As the EUT is not capable of transmitting while charging, no AC Mains conducted emissions (150 kHz to 30 MHz) tests were performed in transmit mode.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6: Measurement Uncertainties* for details.

5.2. Test Results**5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions****Test Summary:**

Test Engineer:	Sarah Williams	Test Date:	16 January 2012
Test Sample IMEI:	004401221182070		

FCC Part:	15.107
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

Environmental Conditions:

Temperature (°C):	20
Relative Humidity (%):	23

Results: Live / Quasi Peak

Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.407	Live	38.2	57.7	19.5	Complied
0.528	Live	31.3	56.0	24.7	Complied
0.798	Live	35.3	56.0	20.7	Complied
0.960	Live	34.1	56.0	21.9	Complied
1.617	Live	35.6	56.0	20.4	Complied
2.108	Live	34.0	56.0	22.0	Complied

Results: Live / Average

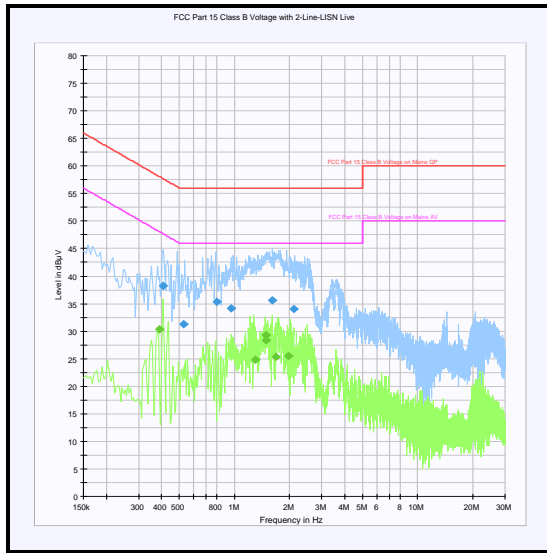
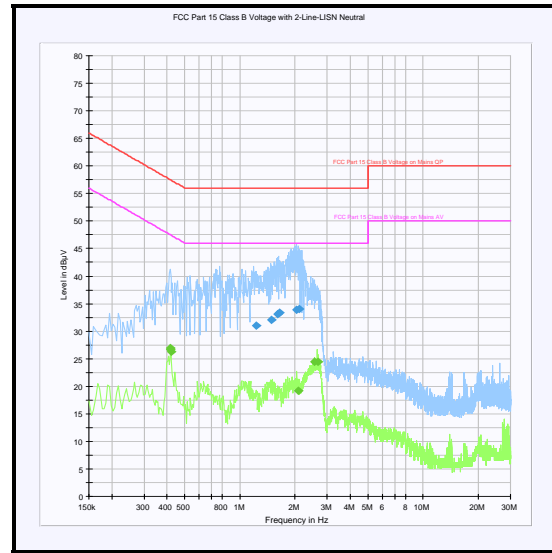
Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.389	Live	30.4	48.1	17.7	Complied
1.307	Live	24.8	46.0	21.2	Complied
1.496	Live	28.3	46.0	17.7	Complied
1.496	Live	29.3	46.0	16.7	Complied
1.676	Live	25.4	46.0	20.6	Complied
1.973	Live	25.5	46.0	20.5	Complied

Receiver/Idle Mode AC Conducted Spurious Emissions (continued)**Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
1.226	Neutral	30.9	56.0	25.1	Complied
1.487	Neutral	32.1	56.0	23.9	Complied
1.617	Neutral	33.1	56.0	22.9	Complied
1.649	Neutral	33.4	56.0	22.6	Complied
2.036	Neutral	33.9	56.0	22.1	Complied
2.108	Neutral	34.0	56.0	22.0	Complied

Results: Neutral / Average

Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.416	Neutral	26.7	47.5	20.8	Complied
0.416	Neutral	26.9	47.5	20.6	Complied
0.420	Neutral	26.3	47.4	21.2	Complied
2.076	Neutral	19.1	46.0	26.9	Complied
2.567	Neutral	24.4	46.0	21.6	Complied
2.666	Neutral	24.5	46.0	21.5	Complied

Receiver/Idle Mode AC Conducted Spurious Emissions (continued)**Live****Neutral**

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.2.2. Receiver/Idle Mode Radiated Spurious Emissions**Test Summary:**

Test Engineer:	Nick Steele & Patrick Jones	Test Dates:	06 January 2012 & 09 January 2012
Test Sample IMEI:	004401221182088		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3, 6.4 and 6.5 referencing ANSI C63.4
Frequency Range:	9 kHz to 1000 MHz

Environmental Conditions:

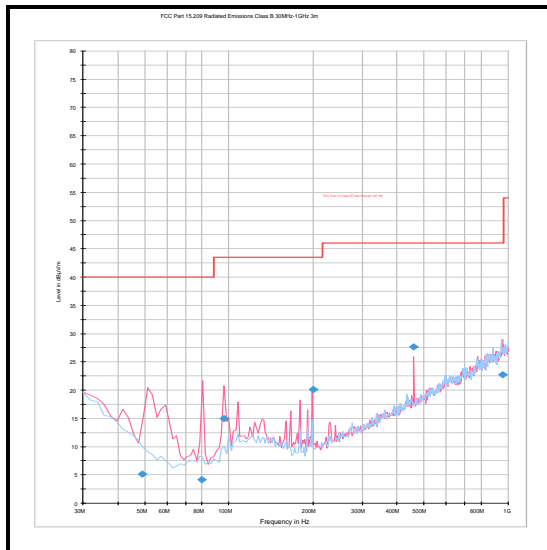
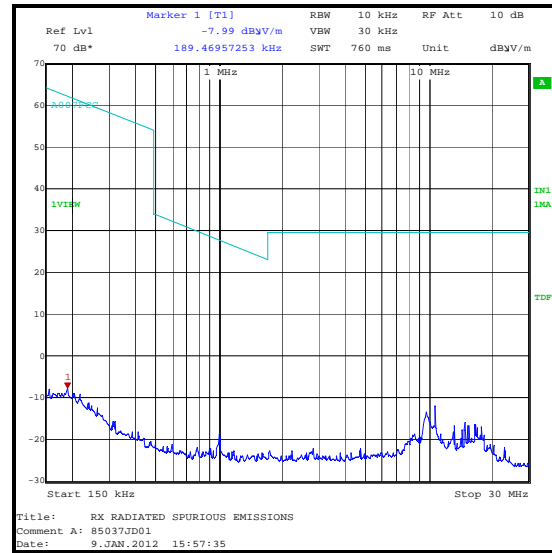
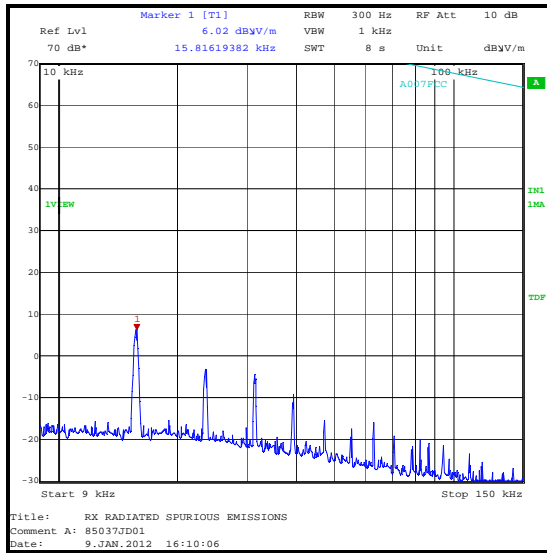
Temperature (°C):	24
Relative Humidity (%):	29

Results: Quasi Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
49.002	Vertical	5.1	40.0	34.9	Complied
80.007	Vertical	4.1	40.0	35.9	Complied
96.039	Vertical	14.9	43.5	28.6	Complied
199.998	Vertical	20.1	43.5	23.4	Complied
458.777	Vertical	27.7	46.0	18.3	Complied
955.401	Vertical	22.7	46.0	23.3	Complied

Note(s):

- Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).
- A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required. A distance extrapolation factor of 40 dB was used.
- Final measurement values include corrections for antenna factor and cable losses.
- All emissions on the 9 kHz to 150 kHz plot were investigated and found to be radiating from the test site turntable.
- All other emissions shown on the pre-scan plots were investigated and found to be >20 dB below the applicable limit or below the measurement system noise floor.
- Measurements in the range 30 MHz to 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres

Receiver/Idle Mode Radiated Spurious Emissions (continued)

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying table.

5.2.3. Transmitter Fundamental Field Strength**Test Summary:**

Test Engineer:	Patrick Jones	Test Date:	09 January 2012
Test Sample IMEI:	004401221182088		

FCC Part:	15.225(a)(b)(c)(d)
Test Method Used:	ANSI C63.10 Section 6.4

Environmental Conditions:

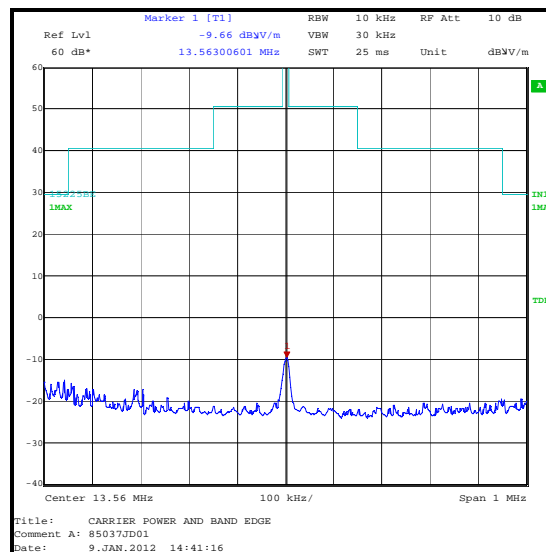
Temperature (°C):	23
Relative Humidity (%):	29

Results: Quasi Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit at 30 m (dB μ V/m)	Margin (dB)	Result
13.56	90° to EUT	-11.4	84.0	95.4	Complied

Note(s):

1. The limit is specified at a test distance of 30 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres. A distance extrapolation factor of 40 dB was used.



5.2.4. Transmitter Radiated Spurious Emissions**Test Summary:**

Test Engineer:	Patrick Jones & Nick Steele	Test Dates:	09 January 2012 & 10 January 2012
Test Sample IMEI:	004401221182088		

FCC Part:	15.225(d) & 15.209(a)
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3, 6.4 and 6.5 referencing ANSI C63.4
Frequency Range:	9 kHz to 1000 MHz

Environmental Conditions:

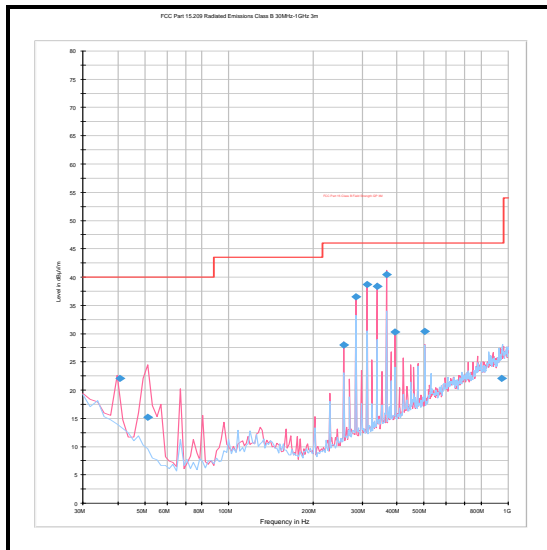
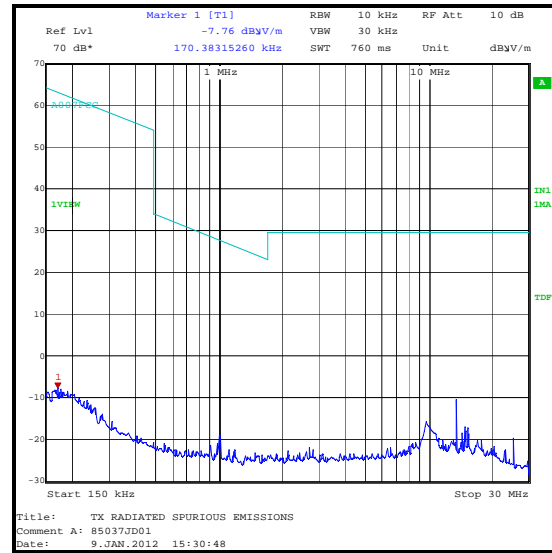
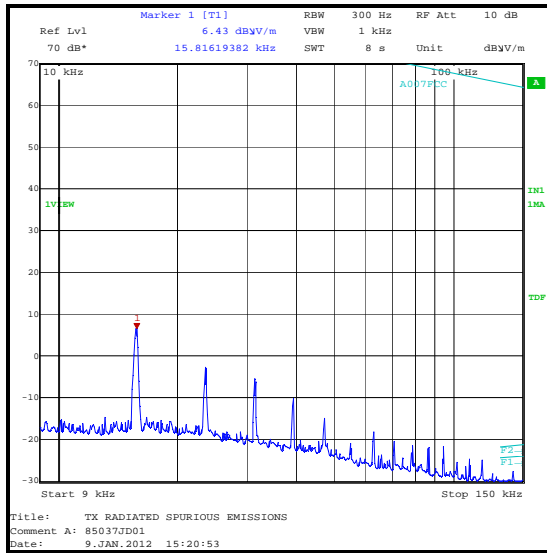
Temperature (°C):	24
Relative Humidity (%):	28

Results: Quasi Peak

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
40.657	Vertical	22.1	40.0	17.9	Complied
51.089	Vertical	15.2	40.0	24.8	Complied
257.622	Vertical	28.0	46.0	18.0	Complied
284.741	Vertical	36.5	46.0	9.5	Complied
311.859	Vertical	38.7	46.0	7.3	Complied
338.977	Vertical	38.4	46.0	7.6	Complied
366.105	Vertical	40.4	46.0	5.6	Complied
393.223	Vertical	30.3	46.0	15.7	Complied
501.715	Vertical	30.4	46.0	15.6	Complied
951.331	Horizontal	22.1	46.0	23.9	Complied

Transmitter Radiated Spurious Emissions (continued)**Note(s):**

1. Limits below 30 MHz are specified at a test distance of 30 metres, whilst below 0.49 MHz they are specified at a test distance of 300 metres. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required. A distance extrapolation factor of 40 dB was used.
3. Final measurement values include corrections for antenna factor and cable losses.
4. The emission shown at approximately 13.56 MHz is the fundamental.
5. All emissions on the 9 kHz to 150 kHz plot were investigated and found to be radiating from the test site turntable.
6. All other emissions shown on the pre-scan plots were investigated and found to be >20 dB below the applicable limit or below the measurement system noise floor.
7. Measurements in the range 30 MHz to 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Radiated Spurious Emissions (continued)

5.2.5. Transmitter Band Edge Radiated Emissions**Test Summary:**

Test Engineer:	Patrick Jones	Test Date:	09 January 2012
Test Sample IMEI:	004401221182088		

FCC Part:	15.225(c)(d) & 15.209(a)
Test Method Used:	As detailed in ANSI C63.10 Section 6.9.2

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	28

Results: Quasi Peak Lower Band Edge

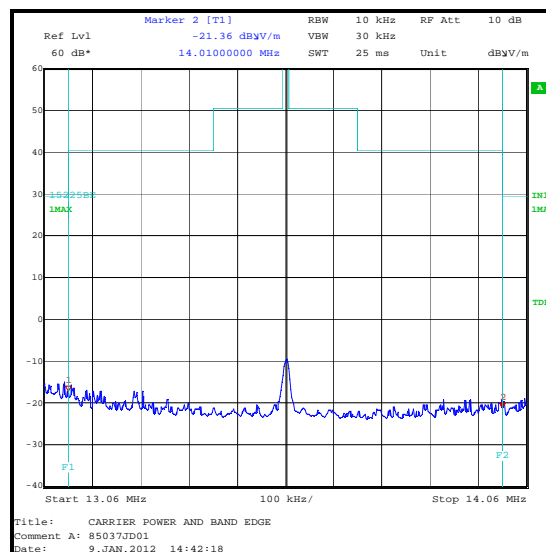
Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
13.11	-36.9	29.5	66.4	Complied

Results: Quasi Peak Upper Band Edge

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
14.01	-37.6	29.5	67.1	Complied

Note(s):

1. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required.
2. A transducer factor on the measuring instrument was used to extrapolate the results at 3 metres to a distance of 30 metres where required. A distance extrapolation factor of 40 dB was used.



5.2.6. Transmitter 20 dB Bandwidth**Test Summary:**

Test Engineer:	Mark Percival	Test Date:	17 January 2012
Test Sample IMEI:	004401221182146		

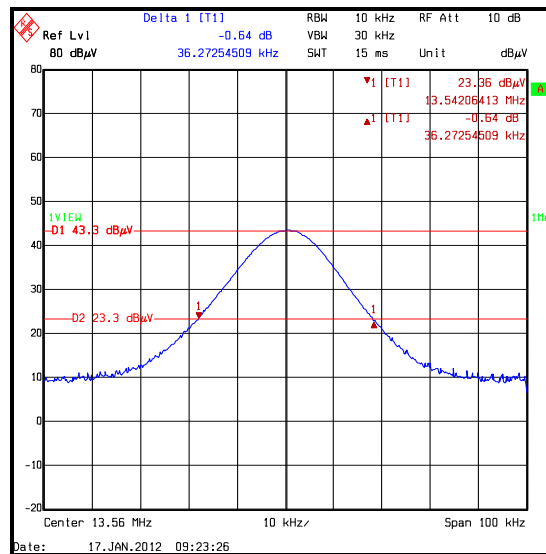
FCC Part:	2.1049
Test Method Used:	As detailed in ANSI C63.10 Section 6.9.1

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	23

Results:

20 dB Bandwidth (kHz)
36.273



5.2.7. Transmitter Frequency Stability (Temperature & Voltage Variation)**Test Summary:**

Test Engineer:	David Doyle	Test Date:	25 January 2012
Test Sample IMEI:	004401221181825		

FCC Part:	15.225(e)
Test Method Used:	As detailed in ANSI C63.10 Section 6.8.1 and 6.8.2

Environmental Conditions:

Ambient Temperature (°C):	26
Ambient Relative Humidity (%):	24

Results: Maximum frequency error of the EUT with variations in ambient temperature

Temperature (°C)	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
-20	13.560115	13.560118	13.560118	13.560118
20	13.560017	13.560009	13.560005	13.560002
50	13.559948	13.559945	13.559949	13.559953

Frequency with Worst Case Deviation (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
13.560118	118	0.0009	0.01	0.0091	Complied

Results: Maximum frequency error of the EUT with variations in nominal operating voltage at an ambient temperature of 20°C

Supply Voltage (V)	Nominal Frequency (MHz)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (%)	Limit (%)	Margin (%)	Result
3.23	13.56	13.559994	6	0.00004	0.01	0.00996	Complied
3.8	13.56	13.560002	2	0.00001	0.01	0.00999	Complied
4.37	13.56	13.560003	3	0.00002	0.01	0.00998	Complied

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
20 dB Bandwidth	13 MHz to 14 MHz	95%	±0.92 ppm
Frequency Stability	13 MHz to 14 MHz	95%	±0.92 ppm
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	±3.53 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±2.94 dB
Transmitter Fundamental Field Strength	13 MHz to 14 MHz	95%	±3.53 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval
A067	LISN	Rohde & Schwarz	ESH3-Z5	890603/002	02 Jun 2012	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	05 Mar 2012	12
A1834	Attenuator	Hewlett Packard	8491B	10444	26 Jul 2012	12
A553	Antenna	Chase	CBL6111A	1593	26 Mar 2012	12
E013	Environmental Chamber	Sanyo	ATMOS chamber	None	Calibrated Before Use	-
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	29 May 2012	12
M1263	Test Receiver	Rohde & Schwarz	ESIB7	100265	13 Jul 2012	12
M1269	Multimeter	Fluke	179	90250210	20 Jul 2012	12
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	08 Nov 2012	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	04 Feb 2012	12
M1379	Test Receiver	Rohde & Schwarz	ESIB7	100330	20 Sep 2012	12
M1568	Magnetic Loop	Rohde & Schwarz	HFH2-Z2	879284/2	27 Jan 2012	12
S0529	DC Power Supply Unit	ISO-Tech	IPS2302A	504E005G2	Calibrated before use	-

NB In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.