

## TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: NTT docomo EB-4058

FCC ID: UCE212051A

To: FCC Part 22: 2011 Subpart H

**Test Report Serial No.:**  
RFI-RPT-RP87473JD11B V2.0

**Version 2.0 Supersedes All Previous Versions**

<b>This Test Report Is Issued Under The Authority Of John Newell, Group Quality Manager:</b>		
<b>Checked By:</b>	Steven White	
<b>Signature:</b>		
<b>Date of Issue:</b>	04 July 2012	

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, selecting text and graphics, adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

**RFI Global Services Ltd**

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG  
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001  
Email: [info@rfi-global.com](mailto:info@rfi-global.com) Website: [www.rfi-global.com](http://www.rfi-global.com)

Registered in England and Wales. Company number:2117901

This page has been left intentionally blank.

**Table of Contents**

<b>1. Customer Information .....</b>	<b>4</b>
<b>2. Summary of Testing .....</b>	<b>5</b>
2.1. General Information .....	5
2.2. Summary of Test Results .....	5
2.3. Methods and Procedures .....	5
2.4. Deviations from the Test Specification .....	5
<b>3. Equipment Under Test (EUT) .....</b>	<b>6</b>
3.1. Identification of Equipment Under Test (EUT) .....	6
3.2. Description of EUT .....	6
3.3. Modifications Incorporated in the EUT .....	6
3.4. Additional Information Related to Testing .....	7
3.5. Support Equipment .....	7
<b>4. Operation and Monitoring of the EUT during Testing .....</b>	<b>8</b>
4.1. Operating Modes .....	8
4.2. Configuration and Peripherals .....	8
<b>5. Measurements, Examinations and Derived Results .....</b>	<b>9</b>
5.1. General Comments .....	9
5.2. Test Results .....	10
5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions .....	10
5.2.2. Receiver/Idle Mode Radiated Spurious Emissions .....	13
5.2.3. Transmitter Effective Radiated Power (ERP) .....	17
5.2.4. Transmitter Frequency Stability (Temperature Variation) .....	19
5.2.5. Transmitter Frequency Stability (Voltage Variation) .....	20
5.2.6. Transmitter Occupied Bandwidth .....	21
5.2.7. Transmitter Out of Band Radiated Emissions .....	31
5.2.8. Transmitter Radiated Emissions at Band Edges .....	34
<b>6. Measurement Uncertainty .....</b>	<b>44</b>
<b>Appendix 1. Test Equipment Used .....</b>	<b>45</b>

**1. Customer Information**










<b>Company Name:</b>	Panasonic Mobile Communications Development of Europe Ltd.
<b>Address:</b>	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom

## **2. Summary of Testing**

### **2.1. General Information**

<b>Specification Reference:</b>	47CFR22
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 22 Subpart H (Public Mobile Services)
<b>Specification Reference:</b>	47CFR15.107 and 47CFR15.109
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 15 Subpart B (Unintentional Radiators) - Sections 15.107 and 15.109
<b>Site Registration:</b>	209735
<b>Location of Testing:</b>	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
<b>Test Dates:</b>	24 May 2012 to 12 June 2012

### **2.2. Summary of Test Results**

<b>FCC Reference (47CFR)</b>	<b>Measurement</b>	<b>Result</b>
Part 15.107(a)	Receiver/Idle Mode AC Conducted Spurious Emissions	
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
Part 22.913(a)	Transmitter Effective Radiated Power (ERP)	
Part 2.1055/22.355	Transmitter Frequency Stability (Temperature and Voltage Variation)	
Part 2.1049	Transmitter Occupied Bandwidth	
Part 2.1053/22.917	Transmitter Out of Band Radiated Emissions	
Part 2.1053/22.917	Transmitter Band Edge Radiated Emissions	
<b>Key to Results</b>  = Complied  = Did not comply		

### **2.3. Methods and Procedures**

<b>Reference:</b>	ANSI/TIA-603-C-2004
<b>Title:</b>	Land Mobile Communications Equipment, Measurements and performance Standards
<b>Reference:</b>	ANSI C63.4 (2009)
<b>Title:</b>	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
<b>Reference:</b>	ANSI C63.10 (2009)
<b>Title:</b>	American National Standard for Testing Unlicensed Wireless Devices

### **2.4. Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	NTT docomo
<b>Model Name or Number:</b>	EB-4058
<b>IMEI:</b>	351807050017170 (Radiated sample #1)
<b>Hardware Version Number:</b>	Rev E
<b>Software Version Number:</b>	ACPU: fujiko-ics-09-0316 CCPU: HY11-N5119_ALL_00.20.31
<b>FCC ID:</b>	UCE212051A

<b>Brand Name:</b>	NTT docomo
<b>Model Name or Number:</b>	EB-4058
<b>IMEI:</b>	351807050017253 (Conducted RF port sample #1)
<b>Hardware Version Number:</b>	Rev E
<b>Software Version Number:</b>	ACPU: fujiko-ics-09-0316 CCPU: HY11-N5119_ALL_00.20.31
<b>FCC ID:</b>	UCE212051A

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	AC Charger
<b>Model Name or Number:</b>	Type P01

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	USB Data cable
<b>Model Name or Number:</b>	Type 01

<b>Brand Name:</b>	NTT docomo
<b>Description:</b>	Personal Hands-Free
<b>Model Name or Number:</b>	Type 02

#### **3.2. Description of EUT**

The equipment under test was a Dual Mode UMTS/GSM Mobile Phone with WLAN, *Bluetooth* and RFID

#### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

**3.4. Additional Information Related to Testing**

Technology Tested:	UMTS850		
Type of Radio Device:	Transceiver		
Mode:	HSDPA/HSUPA		
Modulation Type:	QPSK / 8PSK		
Channel Spacing:	5 MHz		
Power Supply Requirement(s):	Nominal	3.8 V	
	Minimum	3.23 V	
	Maximum	4.37 V	
Maximum Output Power (ERP):	Voice (12.2 kbps)	26.1 dBm	
	HSDPA Sub-Test 4	26.6 dBm	
	HSUPA Sub-Test 3	26.6 dBm	
Transmit Frequency Range:	824 to 849 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	4132	826.4
	Middle	4183	836.6
	Top	4233	846.6
Receive Frequency Range:	869 to 894 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	4357	871.4
	Middle	4407	881.6
	Top	4458	891.6

**3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

<b>Brand Name:</b>	Generic
<b>Description:</b>	Micro SD Memory Card
<b>Model Name or Number:</b>	Not Stated

<b>Brand Name:</b>	Not Stated
<b>Description:</b>	Dummy Battery
<b>Model Name or Number:</b>	Not Stated

## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.
- Constantly transmitting at full power on bottom, middle and top channels as required.
- Occupied bandwidth, ERP and band edge tests were performed with the EUT in Voice (12.2 kbps), HSDPA (Sub-tests 1 to 4) or HSUPA (Sub-tests 1 to 5) modes.
- Transmitter radiated spurious emissions were checked in all modes during pre-scans. Voice (12.2 kbps) was found to be the worst case and all final measurements were performed with the EUT in this mode.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- Connected to a Rohde & Schwarz CMU 200 Universal Radio Communications Tester, operating in UMTS Band V mode.
- The conducted sample with IMEI 351807050017253 was used for frequency stability and occupied bandwidth measurements.
- The radiated sample with IMEI 351807050017170 was used for all other measurements.
- The dummy battery was fitted for frequency stability measurements.
- Receiver/idle mode and transmitter radiated spurious emissions tests were performed with the PHF and AC charger connected to the EUT as this was found to be the worst case during pre-scans. All the supplied accessories were individually connected and measurements made during the pre-scans to determine the worst case combination. The micro SD card was fitted during all tests.
- The dummy battery was fitted for frequency stability measurements.
- AC conducted emissions tests were performed with the EUT connected to the AC charger. The AC charger was connected to a 120 VAC 60 Hz single phase supply via a LISN.
- The EUT was connected to a UMTS system simulator, operating in transceiver mode.



## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

## 5.2. Test Results

### 5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions

#### Test Summary:

Test Engineer:	Nick Steele	Test Date:	12 June 2012
Test Sample Serial No:	351807050017170		

FCC Part:	15.107
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

#### Environmental Conditions:

Temperature (°C):	25
Relative Humidity (%):	39

#### Results: Live / Quasi Peak

Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.150	Live	48.2	66.0	17.8	Complied
0.303	Live	38.5	60.2	21.7	Complied
1.167	Live	36.2	56.0	19.8	Complied
1.333	Live	33.8	56.0	22.2	Complied
1.585	Live	35.8	56.0	20.2	Complied
3.489	Live	36.3	56.0	19.7	Complied
3.813	Live	35.5	56.0	20.5	Complied
4.861	Live	33.1	56.0	22.9	Complied

#### Results: Live / Average



Frequency (MHz)	Line	Level (dBμV)	Limit (dBμV)	Margin (dB)	Result
0.550	Live	27.9	46.0	18.1	Complied
1.014	Live	28.1	46.0	17.9	Complied
1.113	Live	27.5	46.0	18.5	Complied
1.176	Live	27.5	46.0	18.5	Complied
1.630	Live	28.0	46.0	18.0	Complied
2.436	Live	31.0	46.0	15.0	Complied
3.606	Live	29.1	46.0	16.9	Complied
16.026	Live	33.7	50.0	16.3	Complied
16.152	Live	34.2	50.0	15.8	Complied
16.260	Live	32.3	50.0	17.7	Complied

**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)****Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dBµV)	Limit (dBµV)	Margin (dB)	Result
0.150	Neutral	55.6	66.0	10.4	Complied
0.163	Neutral	54.7	65.3	10.6	Complied
0.208	Neutral	51.6	63.3	11.7	Complied
0.240	Neutral	48.8	62.1	13.3	Complied
0.411	Neutral	39.4	57.6	18.2	Complied
0.465	Neutral	37.9	56.6	18.7	Complied
4.969	Neutral	35.4	56.0	20.6	Complied

**Results: Neutral / Average**

Frequency (MHz)	Line	Level (dBµV)	Limit (dBµV)	Margin (dB)	Result
0.402	Neutral	31.0	47.8	16.8	Complied
0.523	Neutral	33.7	46.0	12.3	Complied
0.829	Neutral	22.7	46.0	23.3	Complied
3.579	Neutral	24.3	46.0	21.7	Complied
4.654	Neutral	26.9	46.0	19.1	Complied
15.481	Neutral	15.7	50.0	34.3	Complied

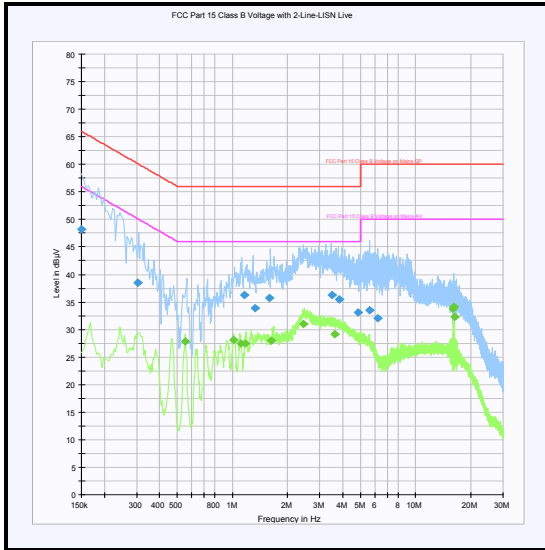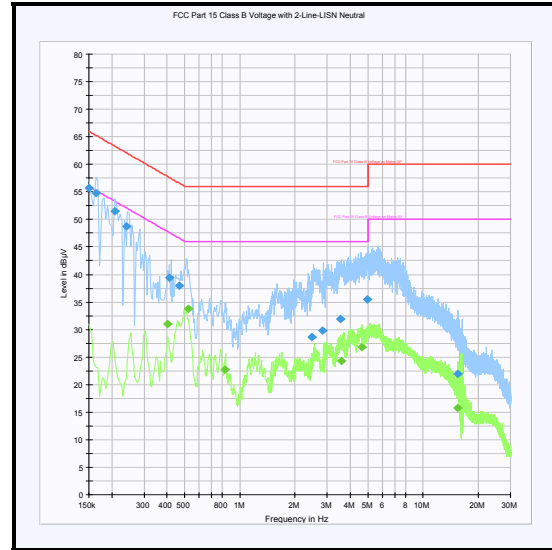**Receiver/Idle Mode AC Conducted Spurious Emissions (continued)****Live****Neutral**

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**5.2.2. Receiver/Idle Mode Radiated Spurious Emissions****Test Summary:**

<b>Test Engineer:</b>	Nick Steele	<b>Test Date:</b>	29 May 2012
<b>Test Sample IMEI:</b>	351807500171700		

<b>FCC Part:</b>	15.109
<b>Test Method Used:</b>	As detailed in ANSI C63.4 Section 8
<b>Frequency Range:</b>	30 MHz to 1000 MHz

**Environmental Conditions:**


<b>Temperature (°C):</b>	28
<b>Relative Humidity (%):</b>	35

**Results: Quasi Peak**

Frequency (MHz)	Antenna Polarity	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
30.284	Vertical	13.3	40.0	26.7	Complied
41.436	Vertical	11.6	40.0	28.4	Complied
63.387	Vertical	4.0	40.0	36.0	Complied
74.600	Vertical	4.6	40.0	35.4	Complied
160.005	Vertical	16.6	43.5	26.9	Complied
954.842	Horizontal	25.2	46.0	20.8	Complied

**Note(s):**

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

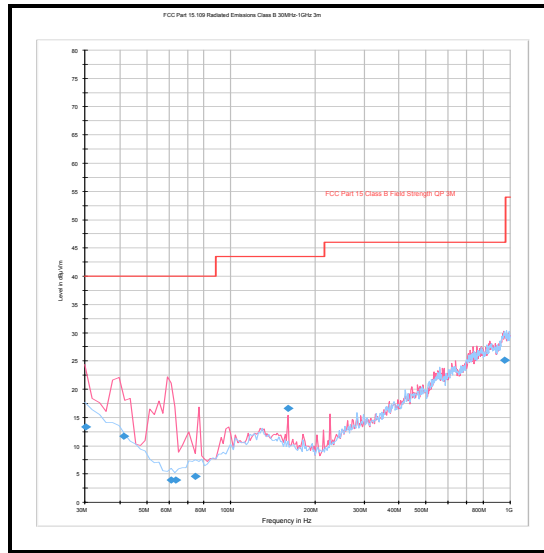**Receiver/Idle Mode Radiated Spurious Emissions (continued)**

*Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.*

**Receiver/Idle Mode Radiated Spurious Emissions (continued)****Test Summary:**

<b>Test Engineer:</b>	Mark Percival & Andrew Edwards	<b>Test Date:</b>	21 May 2012 & 29 May 2012
<b>Test Sample IMEI:</b>	351807050017170		

<b>FCC Part:</b>	15.109
<b>Test Method Used:</b>	As detailed in ANSI C63.4 Section 8
<b>Frequency Range:</b>	1 GHz to 5 GHz

**Environmental Conditions:**



<b>Temperature (°C):</b>	26
<b>Relative Humidity (%):</b>	44

**Results:**

<b>Frequency (MHz)</b>	<b>Antenna Polarity</b>	<b>Peak Level (dB<math>\mu</math>V/m)</b>	<b>Average Limit (dB<math>\mu</math>V/m)</b>	<b>Margin (dB)</b>	<b>Result</b>
3945.892	Vertical	45.6	54.0	8.4	Complied

**Note(s):**

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit.
3. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
4. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

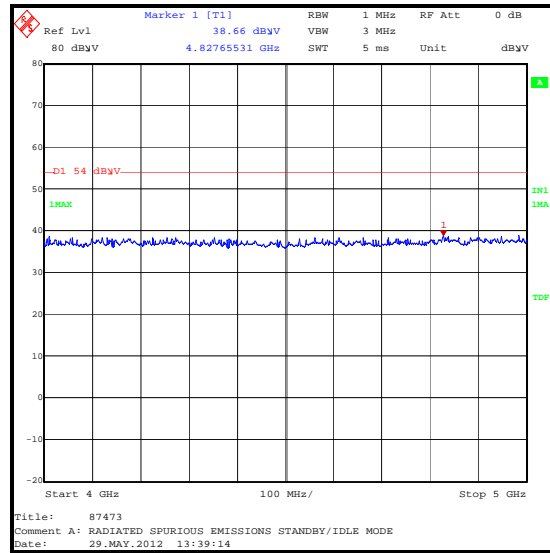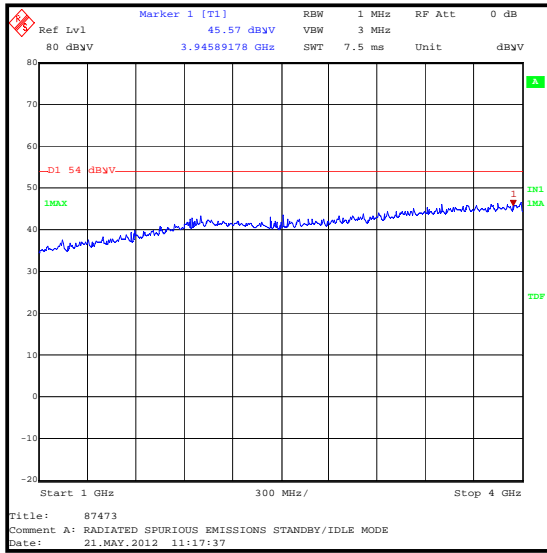**Receiver/Idle Mode Radiated Spurious Emissions (continued)**



**5.2.3. Transmitter Effective Radiated Power (ERP)****Test Summary:**

<b>Test Engineer:</b>	Andrew Edwards & David Doyle	<b>Test Date:</b>	28 May 2012 & 30 May 2012
<b>Test Sample IMEI:</b>	351807050017170		

<b>FCC Part:</b>	22.913(a)
<b>Test Method Used:</b>	As detailed in ANSI TIA-603-C-2004 Section 2.2.17.2

**Environmental Conditions:**

<b>Temperature (°C):</b>	26 to 29
<b>Relative Humidity (%):</b>	33 to 45

**Results: Peak ERP**

Modes		HSDPA				Voice			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	23.0	23.6	23.9	23.9	23.3	38.5	14.6	Complied
	4183	24.0	24.6	24.8	24.8	24.4	38.5	13.7	Complied
	4233	25.7	26.4	26.6	26.6	26.1	38.5	11.9	Complied
$\beta_c$		2	12	15	15				
$\beta_d$		15	15	8	4				
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8				

**Results: RMS ERP**

Modes		HSDPA				Voice			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	19.7	19.3	19.5	19.5	20.2	38.5	18.3	Complied
	4183	20.7	20.2	20.2	20.2	21.2	38.5	17.3	Complied
	4233	22.6	22.3	22.3	22.4	23.0	38.5	15.5	Complied
$\beta_c$		2	12	15	15				
$\beta_d$		15	15	8	4				
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8				

**Transmitter Effective Radiated Power (ERP) (Continued)****Results: Peak ERP**

Modes		HSUPA							
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	23.2	22.6	23.7	22.9	23.7	38.5	14.8	Complied
	4183	24.2	23.6	24.7	24.0	24.7	38.5	13.8	Complied
	4233	26.0	25.4	26.6	25.7	26.4	38.5	12.1	Complied
$\beta_c$		11	6	15	2	15			
$\beta_d$		15	15	9	15	15			
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8	8			

**Results: RMS ERP**

Modes		HSUPA							
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	19.3	19.3	19.8	19.8	19.9	38.5	18.6	Complied
	4183	20.2	20.2	20.7	20.7	20.7	38.5	17.8	Complied
	4233	22.1	22.1	22.7	22.7	22.7	38.5	15.8	Complied
$\beta_c$		11	6	15	2	15			
$\beta_d$		15	15	9	15	15			
$\Delta ACK, \Delta NACK, \Delta CQI$		8	8	8	8	8			

**Note(s):**

1. All modes were compared on each channel and the highest power recorded was subtracted from the limit to show the margin.

**5.2.4. Transmitter Frequency Stability (Temperature Variation)****Test Summary:**

<b>Test Engineer:</b>	Mark Percival	<b>Test Date:</b>	25 May 2012
<b>Test Sample IMEI:</b>	351807050017253		

<b>FCC Part:</b>	2.1055 & 22.355
<b>Test Method Used:</b>	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

**Environmental Conditions:**

<b>Ambient Temperature (°C):</b>	25
<b>Ambient Relative Humidity (%):</b>	47

**Results: Middle Channel (836.6 MHz)**

Temperature (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	836.599989	11	0.0131	2.5	2.4869	Complied
-20	836.59999	10	0.0120	2.5	2.4880	Complied
-10	836.59999	10	0.0120	2.5	2.4880	Complied
0	836.599988	12	0.0143	2.5	2.4857	Complied
10	836.600013	13	0.0155	2.5	2.4845	Complied
20	836.599991	9	0.0108	2.5	2.4982	Complied
30	836.599989	11	0.0131	2.5	2.4869	Complied
40	836.600011	11	0.0131	2.5	2.4869	Complied
50	836.600013	13	0.0155	2.5	2.4845	Complied

**Note(s):**

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using the UMTS Band V modulation test on a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was placed in a temperature chamber and connected by suitable RF cables to the CMU 200 outside the chamber. A bidirectional communications link was established on the centre channel between the EUT and the CMU 200. The frequency meter value was recorded.
3. Temperature was monitored throughout the test with a calibrated digital thermometer.

**5.2.5. Transmitter Frequency Stability (Voltage Variation)****Test Summary:**

<b>Test Engineer:</b>	Mark Percival	<b>Test Date:</b>	25 May 2012
<b>Test Sample IMEI:</b>	351807050017253		

<b>FCC Part:</b>	2.1055 & 22.355
<b>Test Method Used:</b>	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

**Environmental Conditions:**

<b>Temperature (°C):</b>	25
<b>Relative Humidity (%):</b>	47

**Results: Middle Channel (836.6 MHz)**

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
3.4	836.599986	14	0/0167	2.5	2.4833	Complied
4.34	836.600006	9	0.0108	2.5	2.4982	Complied

**Note(s):**

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using the UMTS Band V modulation test on a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMU 200. A bidirectional communications link was established on the centre channel between the EUT and the CMU 200. The frequency meter value was recorded.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

### 5.2.6. Transmitter Occupied Bandwidth

### Test Summary:

<b>Test Engineer:</b>	Andrew Edwards & Mark Percival	<b>Test Date:</b>	24 May 2012 & 28 May 2012
<b>Test Sample IMEI:</b>	351807050017253		


<b>FCC Part:</b>	2.1049
<b>Test Method Used:</b>	The 99% occupied bandwidth was measured using the Occupied Bandwidth function of a spectrum analyser

### Environmental Conditions:

<b>Temperature (°C):</b>	25 to 29
<b>Relative Humidity (%):</b>	44 to 46


### Results: Voice / 12.2 kbps

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.357

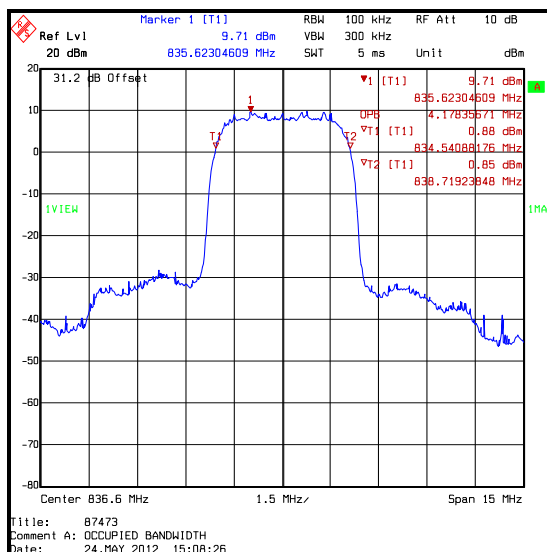


**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 1**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.357

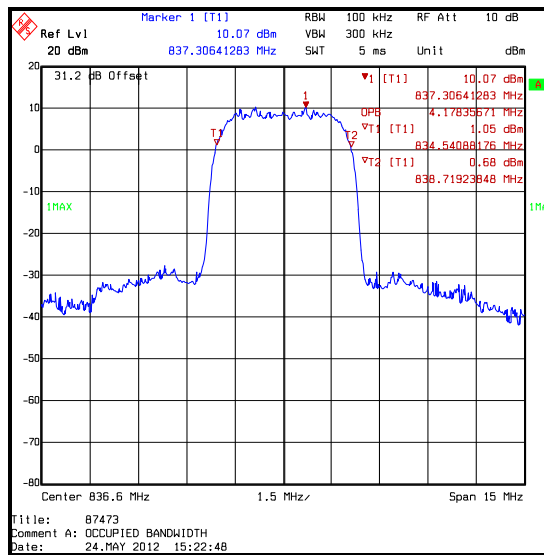


**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 2**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4209.417

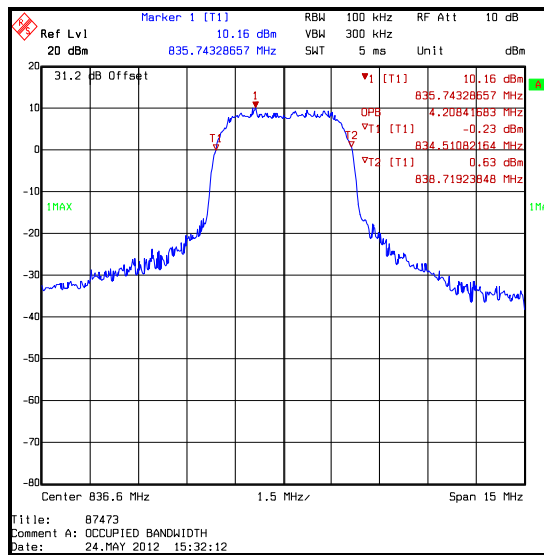

**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 3**


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

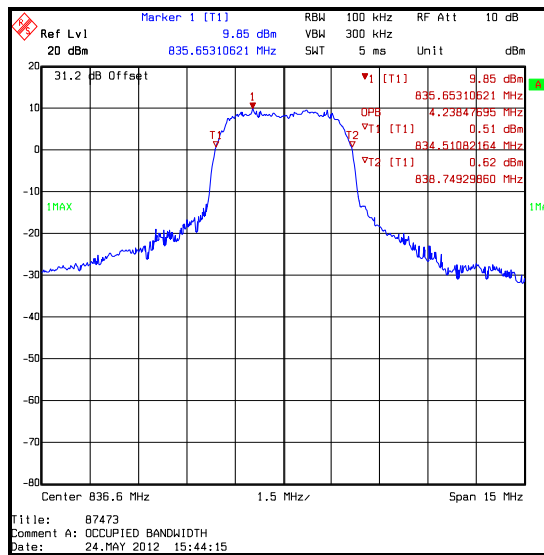




**Transmitter Occupied Bandwidth (continued)****Results: HSDPA Sub-Test 4**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4268.537

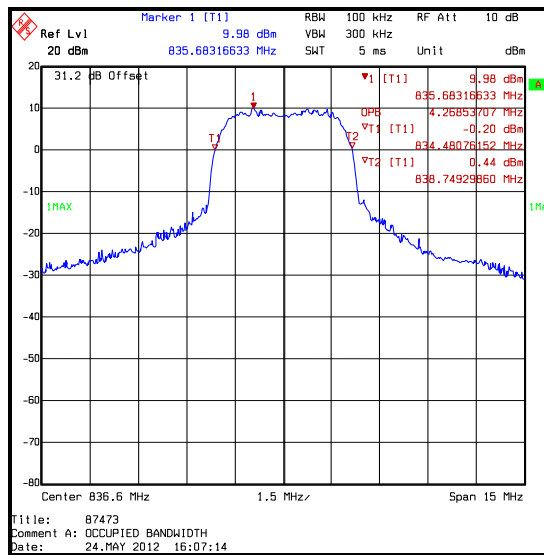


**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 1**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.297

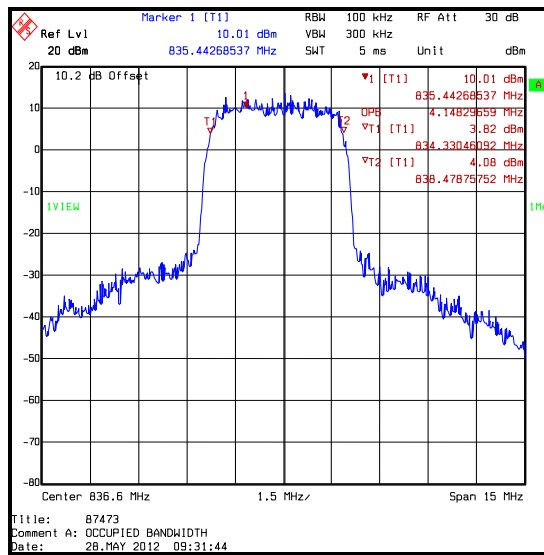


**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 2**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.297

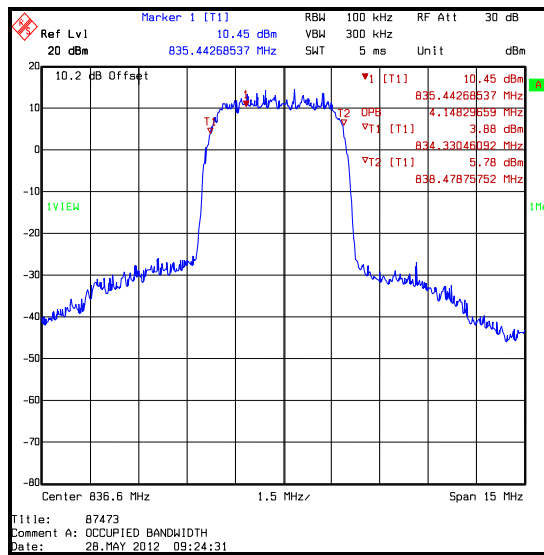


**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 3**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.357

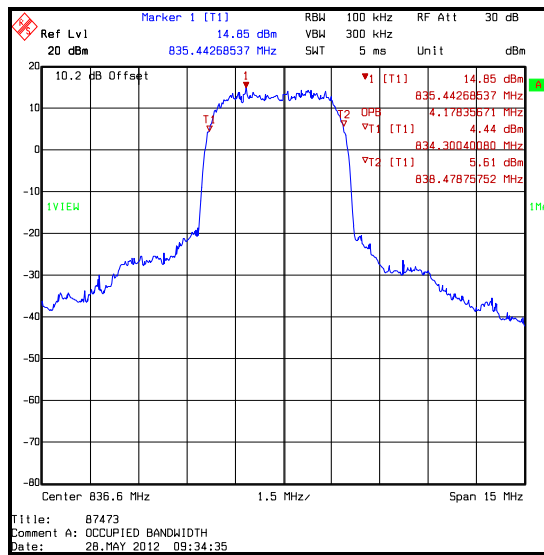


**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 4**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.357

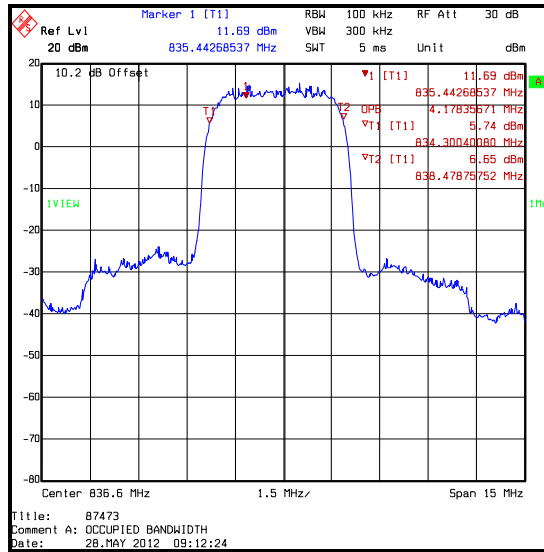

**Transmitter Occupied Bandwidth (continued)****Results: HSUPA Sub-Test 5**

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.357

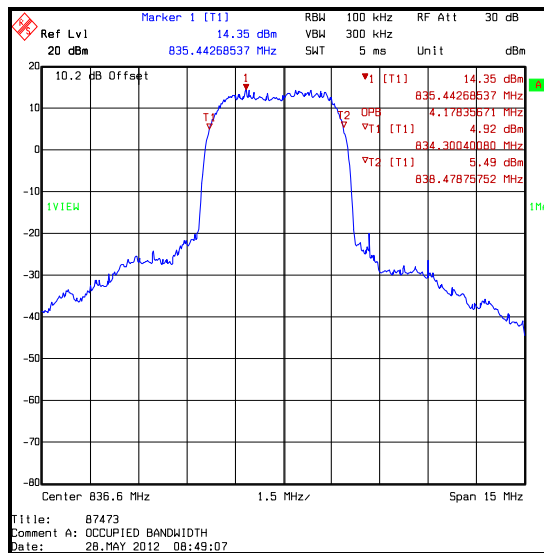**Note(s):**

- In lieu of the test method detailed in ANSI C63.4 Section 13.7, the 99% occupied bandwidth was measured using the Occupied Bandwidth function of the spectrum analyser.

**5.2.7. Transmitter Out of Band Radiated Emissions****Test Summary:**

<b>Test Engineer:</b>	David Doyle & Mark Percival	<b>Test Date:</b>	24 May 2012 & 31 May 2012
<b>Test Sample IMEI:</b>	351807050017170		

<b>FCC Part:</b>	2.1053 & 22.917
<b>Test Method Used:</b>	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Part 2.1053
<b>Frequency Range:</b>	30 MHz to 9 GHz
<b>Configuration:</b>	Voice / 12.2 kbps

**Environmental Conditions:**





<b>Temperature (°C):</b>	25 to 28
<b>Relative Humidity (%):</b>	35 to 47

**Results: Voice / 12.2 kbps**



<b>Frequency (MHz)</b>	<b>Peak Level (dBm)</b>	<b>Limit (dBm)</b>	<b>Margin (dB)</b>	<b>Result</b>
8919.840	-35.1	-13.0	22.1	Complied

**Note(s):**

1. No spurious emissions were detected above the noise floor of the measuring receiver; the highest peak noise floor reading of the measuring receiver was recorded.
2. The uplink and downlink traffic channels are shown on the 30 MHz to 1 GHz plot.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
4. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

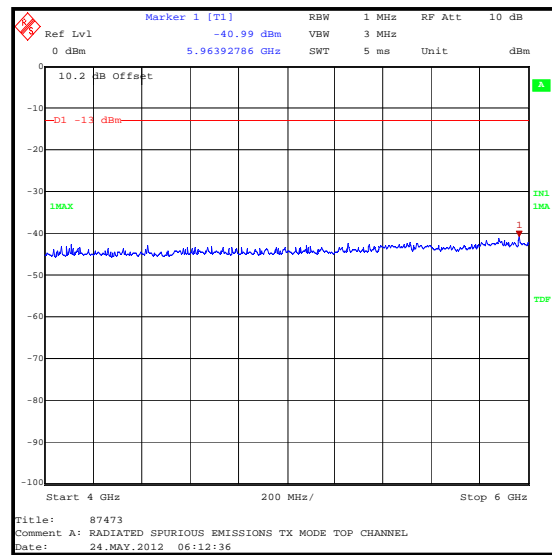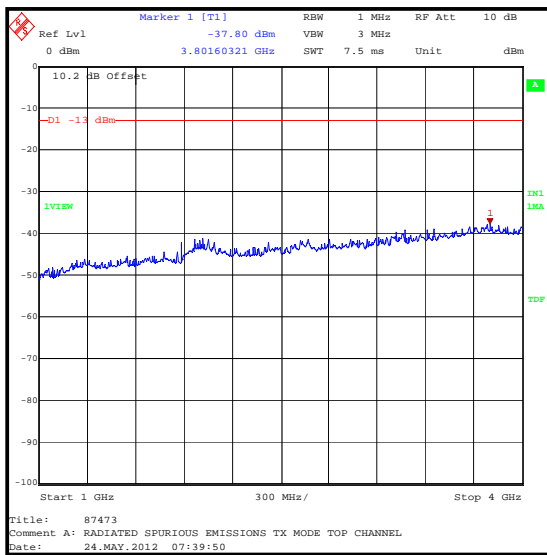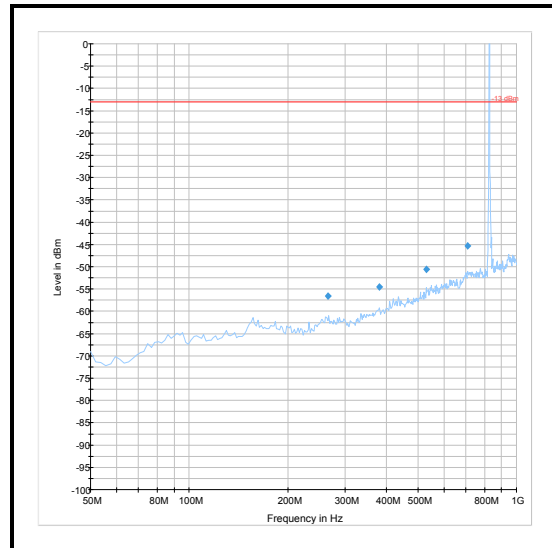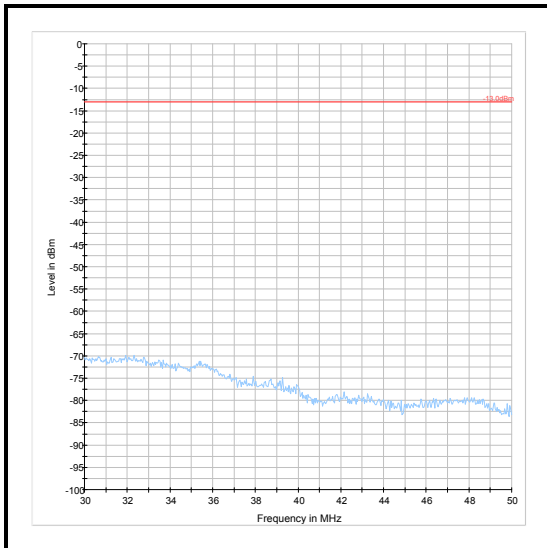**Transmitter Out of Band Radiated Emissions (continued)**

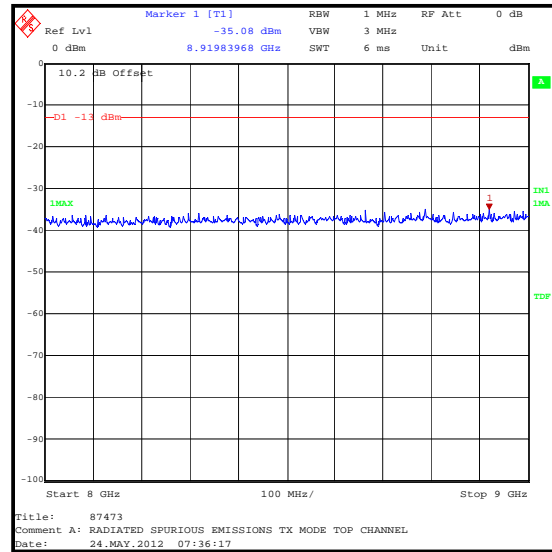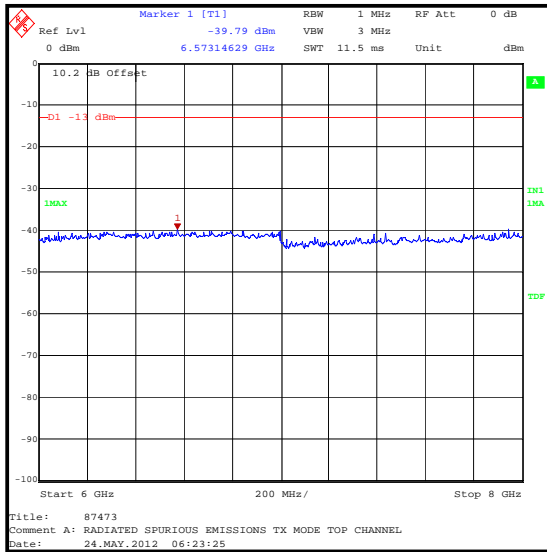

**Transmitter Out of Band Radiated Emissions (continued)**

**5.2.8. Transmitter Radiated Emissions at Band Edges****Test Summary:**

Test Engineer:	David Doyle	Test Date:	30 May 2012
Test Sample IMEI:	351807050017170		



FCC Part:	2.1053 & 22.917
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Part 22.917

**Environmental Conditions:**

Temperature (°C):	24
Relative Humidity (%):	47

**Results: Voice / 12.2 kbps**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-36.0	-13.0	23.0	Complied
849	-31.8	-13.0	18.8	Complied

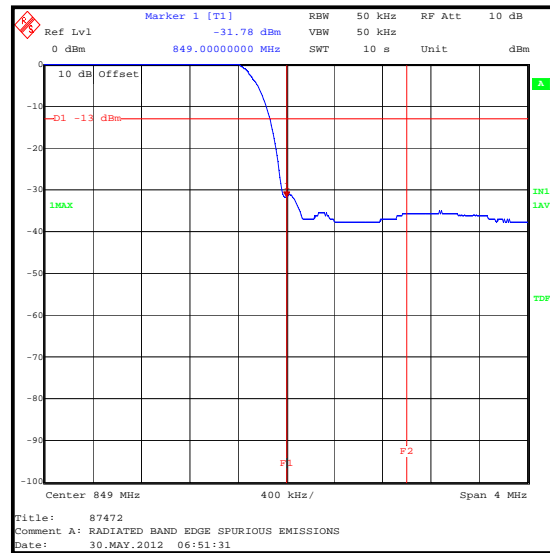
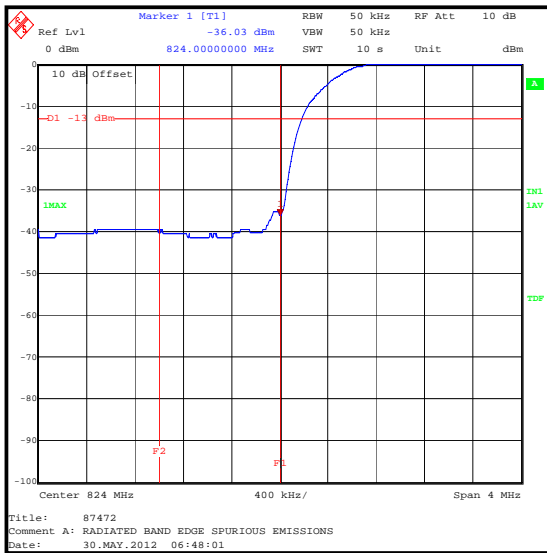


### **Transmitter Radiated Emissions at Band Edges (continued)**

### Results: HSDPA Sub-Test 1



### Results: Voice / 12.2 kbps

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-38.0	-13.0	25.0	Complied
849	-33.5	-13.0	20.5	Complied

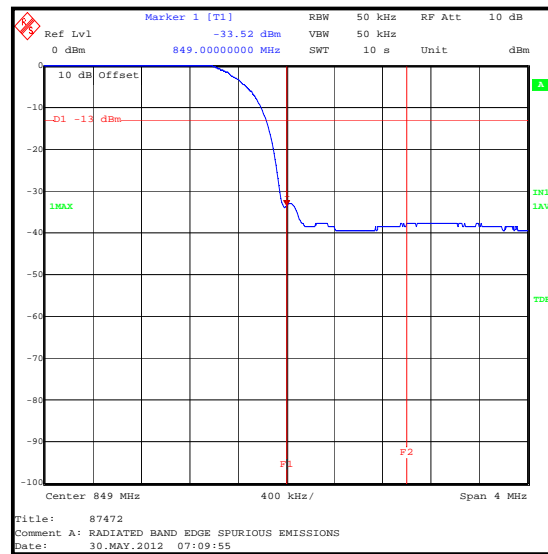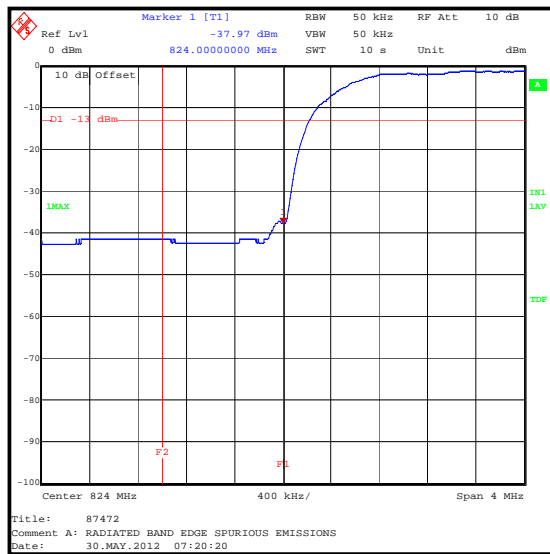



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 2**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-37.3	-13.0	24.3	Complied
849	-34.0	-13.0	21.0	Complied

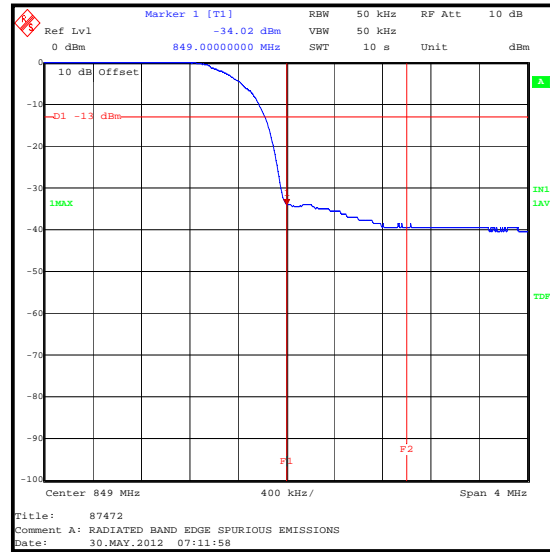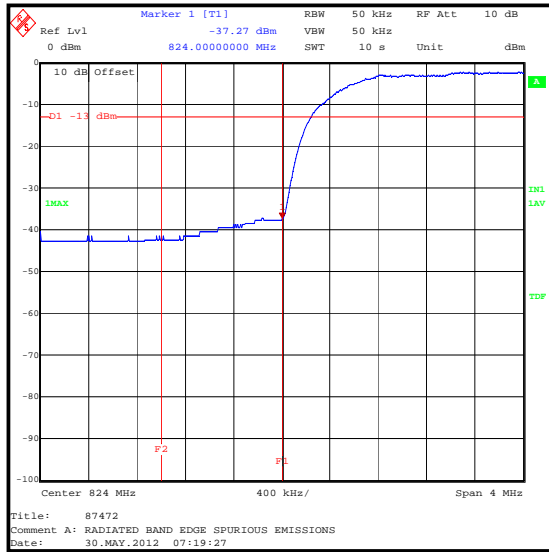



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-37.3	-13.0	24.3	Complied
849	-33.5	-13.0	20.5	Complied

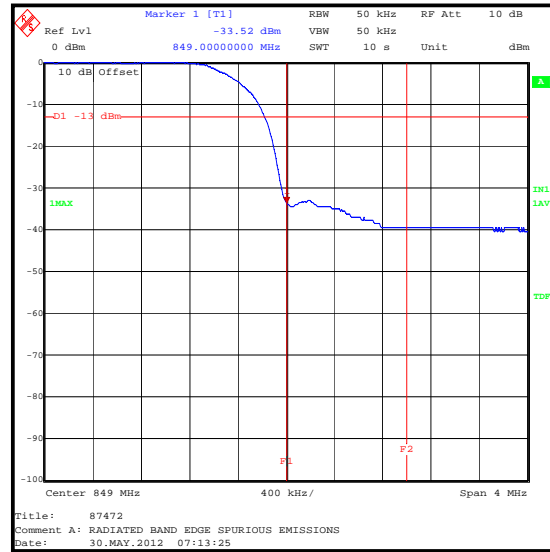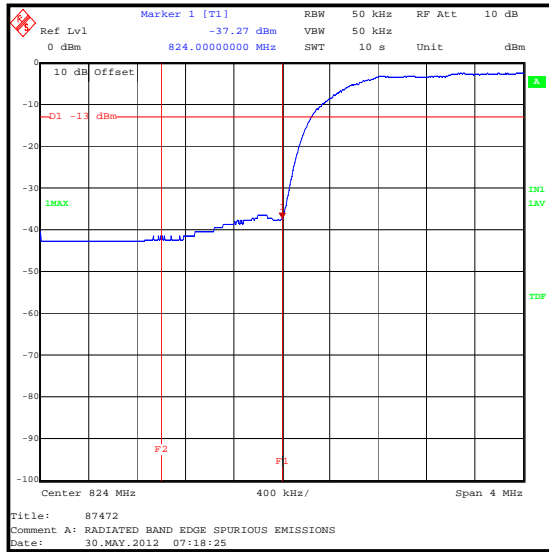



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSDPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-37.3	-13.0	24.3	Complied
849	-33.5	-13.0	20.5	Complied

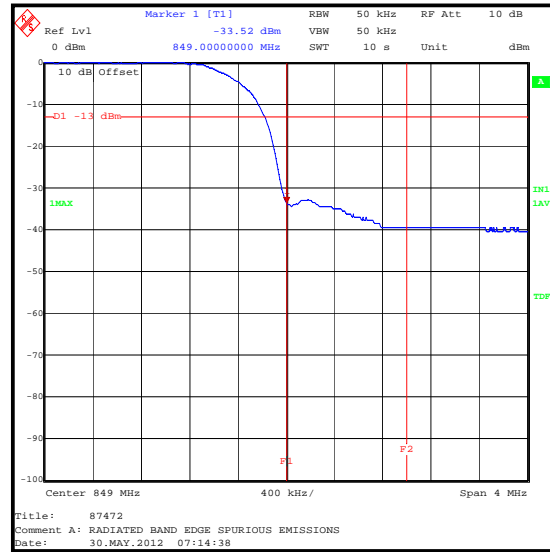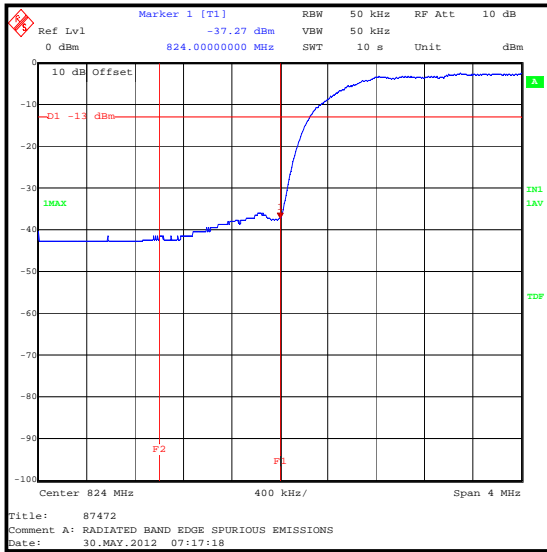



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 1**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-37.3	-13.0	24.3	Complied
849	-33.5	-13.0	20.5	Complied

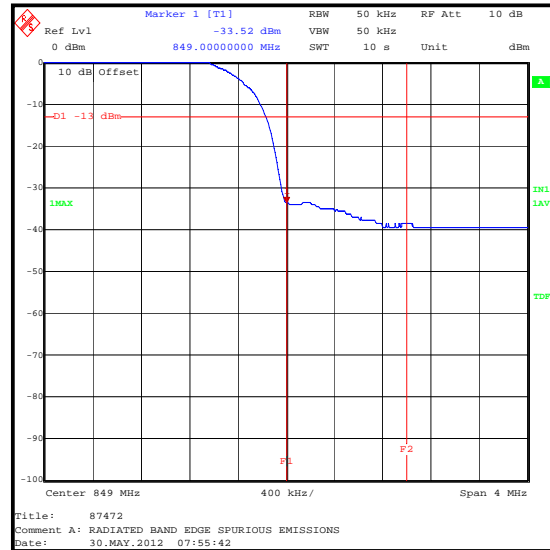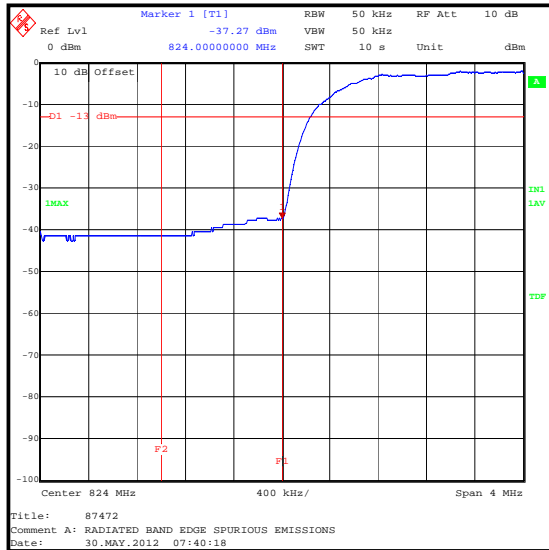

**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 2**



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-38.0	-13.0	25.0	Complied
849	-34.0	-13.0	21.0	Complied

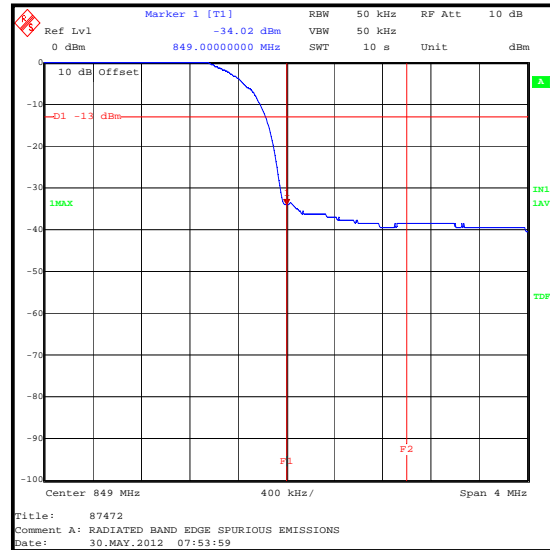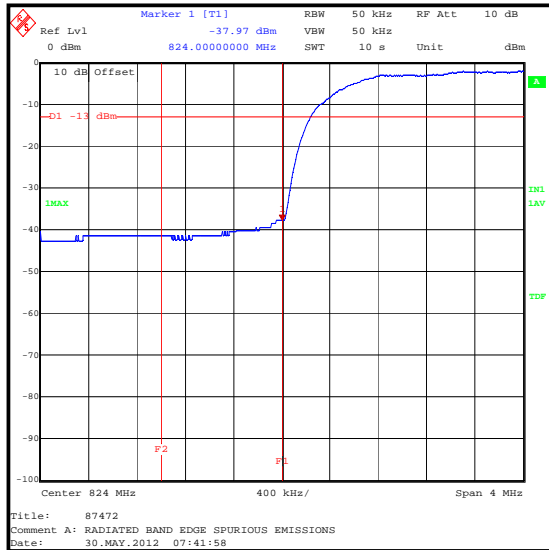





**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 3**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-36.6	-13.0	23.6	Complied
849	-33.5	-13.0	20.5	Complied

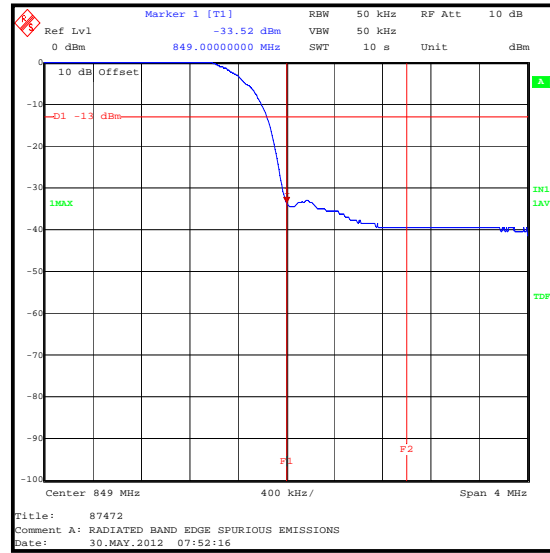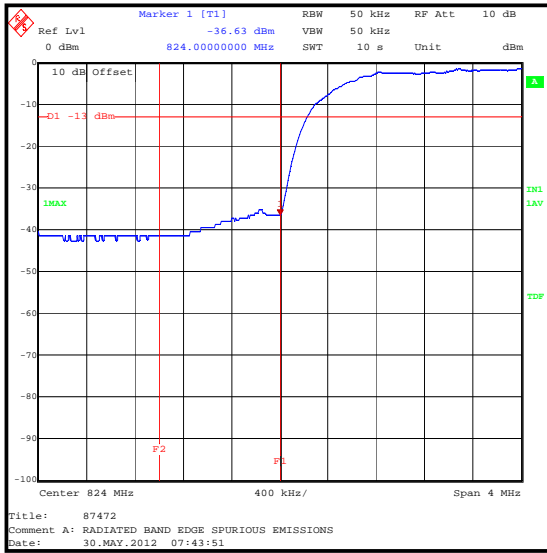



**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 4**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-38.7	-13.0	25.7	Complied
849	-34.0	-13.0	21.0	Complied

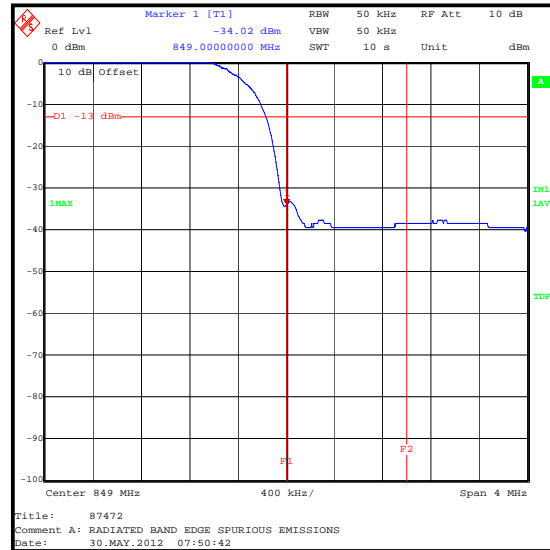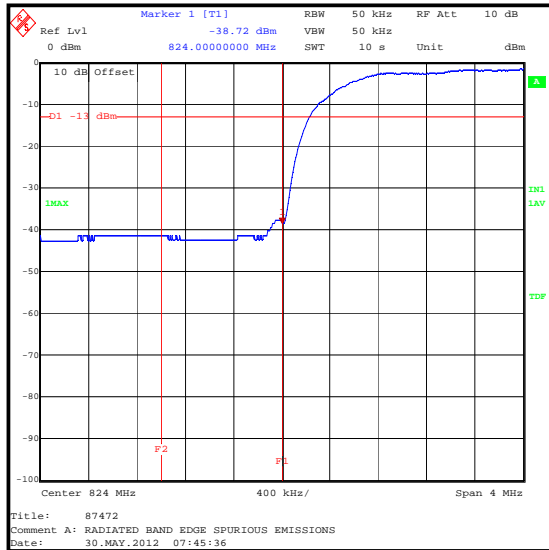

**Transmitter Radiated Emissions at Band Edges (continued)****Results: HSUPA Sub-Test 5**

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-36.6	-13.0	23.6	Complied
849	-33.5	-13.0	20.5	Complied

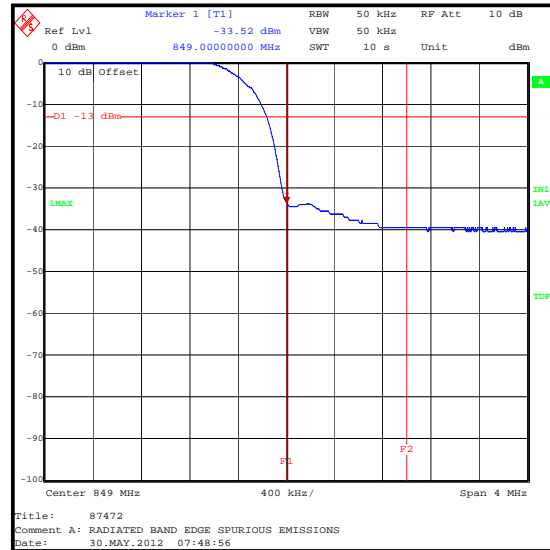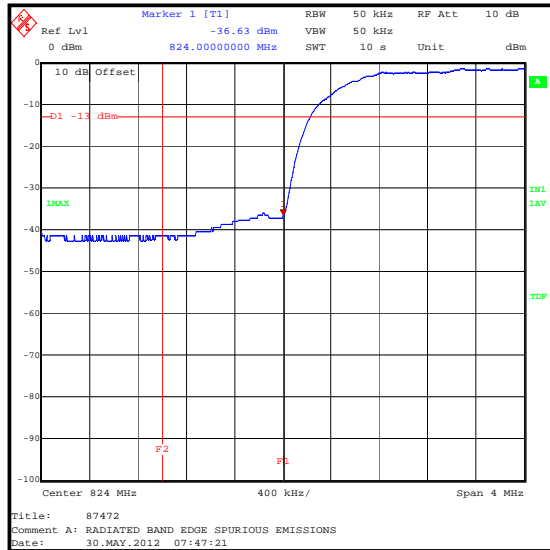

## **6. Measurement Uncertainty**

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
Effective Radiated Power (ERP)	824 to 849 MHz	95%	±2.94 dB
Frequency Stability	824 to 849 MHz	95%	±0.92 ppm
Occupied Bandwidth	824 to 849 MHz	95%	±0.92 ppm
Radiated Spurious Emissions	30 MHz to 9 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

**Appendix 1. Test Equipment Used**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (months)
A1391	Attenuator	HUBER + SUHNER AG	757987	6810.17.B	03 Apr 2013	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	09 Oct 2012	12
A1818	Antenna	EMCO	3115	00075692	09 Oct 2012	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	25 Feb 2013	12
A1834	Attenuator	Hewlett Packard	8491B	10444	29 Jan 2013	12
A1974	High Pass Filter	AtlanTecRF	AFH-01000	090000283	15 Mar 2013	12
A2137	Directional coupler 0.4-6GHz	Atlan TecRF	A4224-10	Batch No.26861	Calibrated before use	-
A244	Attenuator	Schaffner	6820-17-B	None	03 Apr 2013	12
A253	Antenna	Flann Microwave	12240-20	128	09 Oct 2012	12
A254	Antenna	Flann Microwave	14240-20	139	09 Oct 2012	12
A255	Antenna	Flann Microwave	16240-20	519	09 Oct 2012	12
A288	Antenna	Chase	CBL6111A	1589	19 Aug 2012	12
A553	Antenna	Chase	CBL6111A	1593	15 Feb 2013	12
A649	Single Phase LISN	Rohde & Schwarz	ESH3-Z5	825562/008	19 Apr 2013	12
E013	Environmental Chamber	Sanyo	MTH-4200PR	None	10 Aug 2012	12
G0543	Amplifier	Sonoma Instrument Co.	310N	230801	13 Jul 2012	3
K0001	5m Semi-Anechoic Chamber	Rainford EMC	N/A	N/A	31 Aug 2012	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	09 Oct 2012	12
M1124	Spectrum Analyser	Rohde & Schwarz	ESI26	100046K	29 Jun 2012	12
M1269	Multimeter	Fluke	179	90250210	20 Jul 2012	12
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	08 Nov 2012	12

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (months)
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	03 Feb 2013	12
M1379	Test Receiver	Rohde and Schwarz	ESIB7	100330	20 Sep 2012	12
M1642	Fluke 52II Thermometer	Fluke	52II	18890119	16 Mar 2013	12
M1662	CMU 200	Rohde & Schwarz	CMU 200	109374	21 May 2013	12
S011	DC Power Supply Unit	INSTEK	PR-3010H	9401270	Calibration not required	-

**NB** In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All test equipment used was in calibration at the time of testing.