

TEST REPORT FROM RFI GLOBAL SERVICES LTD



Test of: NTT docomo EB-4056

FCC ID: UCE212054A

To: FCC Part 22: 2011 Subpart H

Test Report Serial No.:
RFI-RPT-RP87471JD13B V2.0

Version 2.0 Supersedes All Previous Versions

This Test Report Is Issued Under The Authority Of John Newell, Group Quality Manager:		
Checked By:	Ian Watch	
Signature:		
Date of Issue:	11 June 2012	

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, selecting text and graphics, adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001
Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number:2117901

This page has been left intentionally blank.

Table of Contents

1. Customer Information	4
2. Summary of Testing	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	5
2.4. Deviations from the Test Specification	5
3. Equipment Under Test (EUT)	6
3.1. Identification of Equipment Under Test (EUT)	6
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	7
3.5. Support Equipment	8
4. Operation and Monitoring of the EUT during Testing	9
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
5. Measurements, Examinations and Derived Results	10
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions	11
5.2.2. Receiver/Idle Mode Radiated Spurious Emissions	14
5.2.3. Transmitter Effective Radiated Power (ERP)	18
5.2.4. Transmitter Frequency Stability (Temperature Variation)	20
5.2.5. Transmitter Frequency Stability (Voltage Variation)	21
5.2.6. Transmitter Occupied Bandwidth	22
5.2.7. Transmitter Out of Band Radiated Emissions	32
5.2.8. Transmitter Radiated Emissions at Band Edges	35
6. Measurement Uncertainty	45
Appendix 1. Test Equipment Used	46

1. Customer Information










Company Name:	Panasonic Mobile Communications Development of Europe Ltd.
Address:	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR22
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 22 Subpart H (Public Mobile Services)
Specification Reference:	47CFR15.107 and 47CFR15.109
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2011: Part 15 Subpart B (Unintentional Radiators) - Sections 15.107 and 15.109
Site Registration:	209735
Location of Testing:	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	01 May 2012 to 28 May 2012

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.107(a)	Receiver/Idle Mode AC Conducted Spurious Emissions	
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
Part 22.913(a)	Transmitter Effective Radiated Power (ERP)	
Part 2.1055/22.355	Transmitter Frequency Stability (Temperature and Voltage Variation)	
Part 2.1049	Transmitter Occupied Bandwidth	
Part 2.1053/22.917	Transmitter Out of Band Radiated Emissions	
Part 2.1053/22.917	Transmitter Band Edge Radiated Emissions	
Key to Results		
 = Complied  = Did not comply		

2.3. Methods and Procedures

Reference:	ANSI/TIA-603-C-2004
Title:	Land Mobile Communications Equipment, Measurements and performance Standards
Reference:	ANSI C63.4 (2009)
Title:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Reference:	ANSI C63.10 (2009)
Title:	American National Standard for Testing Unlicensed Wireless Devices

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	NTT docomo
Model Name or Number:	EB-4056 (D21BR7)
IMEI:	351808050018796 (<i>Radiated sample</i>)
Hardware Version Number:	Rev C
Software Version Number:	ACPU: nemo-ics-09-0433 CCPU: R1C_0_EC10_00_D00
FCC ID:	UCE212054A

Brand Name:	NTT docomo
Model Name or Number:	EB-4056 (D21BR7)
IMEI:	351808050018796 (<i>Radiated sample</i>)
Hardware Version Number:	Rev C
Software Version Number:	ACPU: nemo-ics-09-0507 CCPU: R1C_0_EC12_00_D00
FCC ID:	UCE212054A

Brand Name:	NTT docomo
Model Name or Number:	EB-4056 (D21BR7)
IMEI:	351808050018994 (<i>Conducted RF port sample</i>)
Hardware Version Number:	Rev C
Software Version Number:	ACPU: nemo-ics-09-0507 CCPU: R1C_0_EC12_00_D00
FCC ID:	UCE212054A

Brand Name:	NTT docomo
Description:	AC Charger (with USB Data/Charge Cable)
Model Name or Number:	03

Brand Name:	NTT docomo
Description:	Charge/USB Data cable
Model Name or Number:	Not marked or stated

Brand Name:	NTT docomo
Description:	Personal Hands-Free
Model Name or Number:	Part Number 549266

3.2. Description of EUT

The equipment under test was a Dual Mode UMTS/GSM Mobile Phone with WLAN, *Bluetooth* and RFID.

3.3. Modifications Incorporated in the EUT

The Customer changed the Software Version on the sample with IMEI 351808050018796 from
ACPU: nemo-ics-09-0433 CCPU: R1C_0_EC10_00_D00 to
ACPU: nemo-ics-09-0507 CCPU: R1C_0_EC12_00_D00 on 10 May 2012.

The Customer declared that the software update was to fix GPRS/EGPRS connectivity problems only and the software change did not affect any other parameters.

3.4. Additional Information Related to Testing

Technology Tested:	UMTS850		
Type of Radio Device:	Transceiver		
Mode:	UMTS FDD V and 3GPP Rel. 5 HSDPA / Rel. 6 HSUPA		
Modulation Type:	QPSK / 8PSK		
Channel Spacing:	5 MHz		
Power Supply Requirement(s):	Nominal	3.8 V	
	Minimum	3.4 V	
	Maximum	4.35 V	
Maximum Output Power (ERP):	Voice (12.2 kbps)	26.0 dBm	
	HSDPA Sub-Test 3	26.1 dBm	
Transmit Frequency Range:	824 to 849 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	4132	826.4
	Middle	4183	836.6
	Top	4233	846.6
Receive Frequency Range:	869 to 894 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	4357	871.4
	Middle	4407	881.6
	Top	4458	891.6

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	2 GB Micro SD Card
Brand Name:	Not marked or stated
Model Name or Number:	MMAGR02GUECA

Description:	USB Hub
Brand Name:	Buffalo
Model Name or Number:	BSH3U01

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode.
- Constantly transmitting at full power on bottom, middle and top channels as required.
- Occupied bandwidth, ERP and band edge tests were performed with the EUT in Voice (12.2 kbps), HSDPA (Sub-tests 1 to 4) or HSUPA (Sub-tests 1 to 5) modes.
- Transmitter radiated spurious emissions were checked in all modes during pre-scans. Voice (12.2 kbps) was found to be the worst case and all final measurements were performed with the EUT in this mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The conducted sample with IMEI 351808050018994 was used for frequency stability and conducted power measurements.
- The radiated sample with IMEI 351808050018796 was used for all other measurements.
- Idle and transmitter radiated spurious emissions tests were performed with the AC Charger and PHF connected to the EUT as this was found to be the worst case during pre-scans. All the accessories were individually connected and measurements made during the pre-scans to determine the worst case combination. The micro SD card was fitted during all tests.
- The dummy battery was fitted for frequency stability measurements.
- AC conducted emissions tests were performed with the EUT connected to the AC charger. The AC charger was connected to a 120 VAC 60 Hz single phase supply via a LISN.
- Connected to a Rohde & Schwarz CMU 200 Universal Radio Communications Tester, operating in UMTS Band V mode.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

5.2. Test Results**5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions****Test Summary:**

Test Engineer:	Mark Percival	Test Date:	15 May 2012
Test Sample Serial No:	351808050018796		

FCC Reference:	Part 15.107(a)
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

Environmental Conditions:

Temperature (°C):	21
Relative Humidity (%):	39

Note(s):

1. Live / Average emission results were all >30 dB below the applicable limits and therefore not recorded.

Results: Live / Quasi Peak

Frequency (MHz)	Line	Level (dBµV)	Limit (dBµV)	Margin (dB)	Result
0.636000	Live	29.2	56.0	26.8	Complied
0.744000	Live	26.2	56.0	29.8	Complied
1.252500	Live	33.2	56.0	22.8	Complied
1.333500	Live	31.6	56.0	24.4	Complied
1.743000	Live	36.2	56.0	19.8	Complied
13.920000	Live	17.0	60.0	43.0	Complied


Receiver/Idle Mode AC Conducted Spurious Emissions (continued)**Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.240000	Neutral	36.3	62.1	25.8	Complied
0.348000	Neutral	36.0	59.0	23.0	Complied
0.505500	Neutral	30.1	56.0	25.9	Complied
1.225500	Neutral	35.8	56.0	20.2	Complied
1.725000	Neutral	48.8	56.0	7.2	Complied
2.188500	Neutral	32.6	56.0	23.4	Complied


Results: Neutral / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
1.752000	Neutral	32.3	46.0	13.7	Complied
2.103000	Neutral	21.5	46.0	24.5	Complied
2.197500	Neutral	22.5	46.0	23.5	Complied
2.427000	Neutral	20.3	46.0	25.7	Complied
2.454000	Neutral	21.7	46.0	24.3	Complied
2.571000	Neutral	24.4	46.0	21.6	Complied

Receiver/Idle Mode AC Conducted Spurious Emissions (continued)

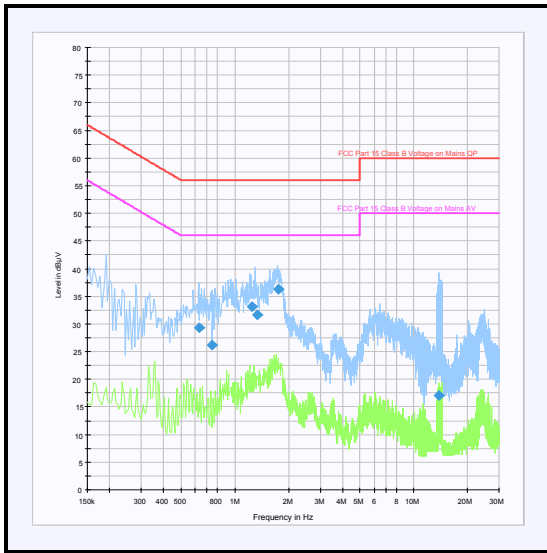

Live

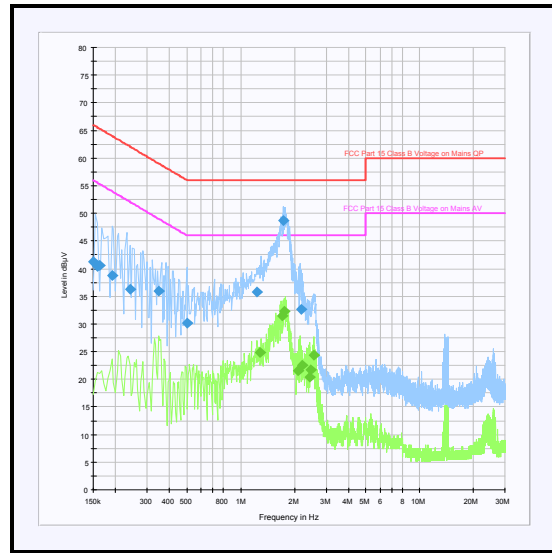

Neutral

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

5.2.2. Receiver/Idle Mode Radiated Spurious Emissions**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	03 May 2012
Test Sample Serial No:	351808050018796		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	33


Results: Quasi Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
30.909	Horizontal	27.6	40.0	12.4	Complied
58.672	Horizontal	31.1	40.0	8.9	Complied
60.895	Horizontal	31.7	40.0	8.3	Complied
108.424	Horizontal	25.6	43.5	17.9	Complied
129.576	Horizontal	20.4	43.5	23.1	Complied
458.806	Horizontal	31.3	46.0	14.7	Complied
944.903	Horizontal	22.8	46.0	23.2	Complied

Note(s):

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Receiver/Idle Mode Radiated Spurious Emissions (continued)

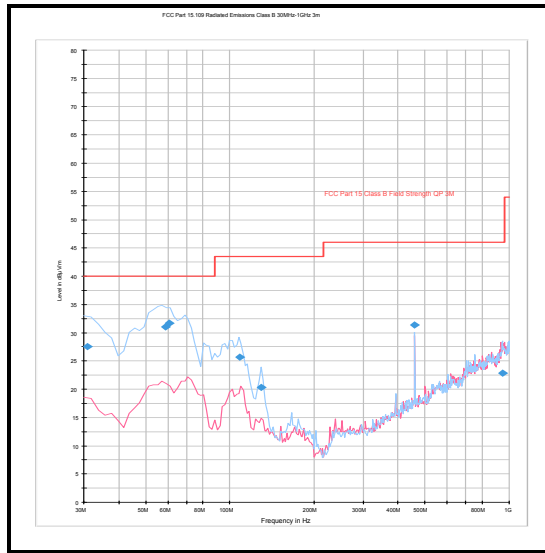

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Receiver/Idle Mode Radiated Spurious Emissions (continued)**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	01 May 2012
Test Sample IMEI:	351808050018796		

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8
Frequency Range:	1 GHz to 5 GHz

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	25



Results:

Frequency (MHz)	Antenna Polarity	Peak Level (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Result
3969.940	Vertical	46.9	54.0	7.1	Complied

Note(s):

1. The final measured value, for the given emission, in the table above incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit.
3. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Receiver/Idle Mode Radiated Spurious Emissions (continued)

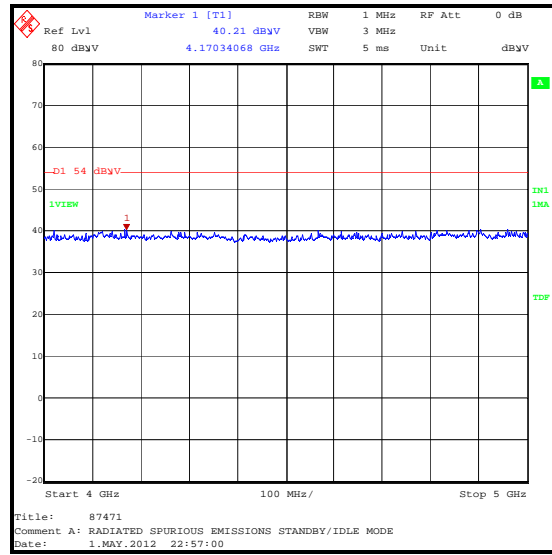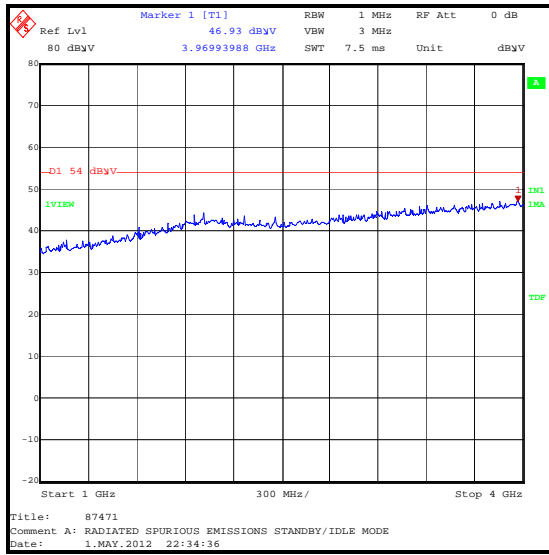

5.2.3. Transmitter Effective Radiated Power (ERP)**Test Summary:**

Test Engineer:	Andrew Edwards & David Doyle	Test Date:	22 May 2012 & 28 May 2012
Test Sample IMEI:	351808050018796		

FCC Part:	22.913(a)
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.17.2

Environmental Conditions:

Temperature (°C):	30
Relative Humidity (%):	35

Results: Peak ERP

Modes		HSDPA				Voice			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	24.2	24.4	24.7	24.0	24.3	38.5	13.8	Complied
	4183	24.7	25.0	25.1	25.3	24.9	38.5	13.2	Complied
	4233	26.0	26.1	26.1	26.0	26.0	38.5	12.4	Complied
βc		2	12	15	15				
βd		15	15	8	4				
ΔACK, ΔNACK, ΔCQI		8	8	8	8				

Results: RMS ERP

Modes		HSDPA				Voice			
Sub-test		1	2	3	4	12.2 kbps			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Limit (dBm)	Margin (dB)	Result
850	4132	20.9	20.4	20.4	20.3	21.1	38.5	17.4	Complied
	4183	21.5	20.9	21.0	20.9	21.7	38.5	16.8	Complied
	4233	22.8	22.9	22.9	22.9	22.8	38.5	15.6	Complied
βc		2	12	15	15				
βd		15	15	8	4				
ΔACK, ΔNACK, ΔCQI		8	8	8	8				

Transmitter Effective Radiated Power (ERP) (Continued)**Results: Peak ERP**

Modes		HSUPA					Limit (dBm)	Margin (dB)	Result
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)			
850	4132	24.4	24.2	24.2	23.2	24.6	38.5	13.9	Complied
	4183	24.9	24.8	24.8	23.8	25.0	38.5	13.5	Complied
	4233	25.8	25.7	25.6	24.7	25.8	38.5	12.7	Complied
βc		11	6	15	2	15			
βd		15	15	9	15	15			
ΔACK, ΔNACK, ΔCQI		8	8	8	8	8			

Results: RMS ERP

Modes		HSUPA					Limit (dBm)	Margin (dB)	Result
Sub-test		1	2	3	4	5			
Band	Channel	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)	Power (dBm)			
850	4132	20.3	20.8	19.8	18.8	20.3	38.5	17.7	Complied
	4183	20.9	21.4	20.4	19.4	20.9	38.5	17.1	Complied
	4233	21.8	22.4	21.3	21.3	21.8	38.5	16.1	Complied
βc		11	6	15	2	15			
βd		15	15	9	15	15			
ΔACK, ΔNACK, ΔCQI		8	8	8	8	8			

Note(s):

1. All modes were compared on each channel and the highest power recorded was subtracted from the limit to show the margin.

5.2.4. Transmitter Frequency Stability (Temperature Variation)**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	23 May 2012
Test Sample IMEI:	351808050018994		

FCC Part:	2.1055 & 22.355
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

Environmental Conditions:

Ambient Temperature (°C):	27
Ambient Relative Humidity (%):	46

Results: Middle Channel (836.6 MHz)

Temperature (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	836.600016	16	0.0191	2.5	2.4809	Complied
-20	836.599987	13	0.0155	2.5	2.4845	Complied
-10	836.599984	16	0.0191	2.5	2.4809	Complied
0	836.599980	20	0.0239	2.5	2.4761	Complied
10	836.599980	20	0.0239	2.5	2.4761	Complied
20	836.599972	28	0.0335	2.5	2.4665	Complied
30	836.600016	16	0.0191	2.5	2.4809	Complied
40	836.599982	18	0.0215	2.5	2.4785	Complied
50	836.599984	16	0.0191	2.5	2.4809	Complied

Note(s):

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using the UMTS Band V modulation test on a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was placed in a temperature chamber and connected by suitable RF cables to the CMU 200 outside the chamber. A bidirectional communications link was established on the centre channel between the EUT and the CMU 200. The frequency meter value was recorded.
3. Temperature was monitored throughout the test with a calibrated digital thermometer.

5.2.5. Transmitter Frequency Stability (Voltage Variation)**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	23 May 2012
Test Sample IMEI:	351808050018994		

FCC Part:	2.1055 & 22.355
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.2 referencing FCC CFR Part 2.1055

Environmental Conditions:

Temperature (°C):	20
Relative Humidity (%):	47

Results: Middle Channel (836.6 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
3.4	836.599985	20	0.0239	2.5	24761	Complied
4.35	836.599978	22	0.0263	2.5	2.4737	Complied

Note(s):

1. A dummy battery was placed on the EUT and the dummy battery cables connected to a bench power supply.
2. Frequency error was measured using the UMTS Band V modulation test on a calibrated Rohde & Schwarz CMU 200 Universal Radio Communications Tester in accordance with current Rohde & Schwarz application notes. The EUT was connected by suitable RF cables to the CMU 200. A bidirectional communications link was established on the centre channel between the EUT and the CMU 200. The frequency meter value was recorded.
3. Voltage was monitored throughout the test with a calibrated digital voltmeter.

5.2.6. Transmitter Occupied Bandwidth

Test Summary:

Test Engineer:	Andrew Edwards & David Doyle	Test Date:	22 May 2012 & 28 May 2012
Test Sample IMEI:	351808050018994		


FCC Part:	2.1049
Test Method Used:	The 99% occupied bandwidth was measured using the Occupied Bandwidth function of a spectrum analyser

Environmental Conditions:

Temperature (°C):	26 to 29
Relative Humidity (%):	39 to 40

Results: Voice / 12.2 kbps


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4208.417

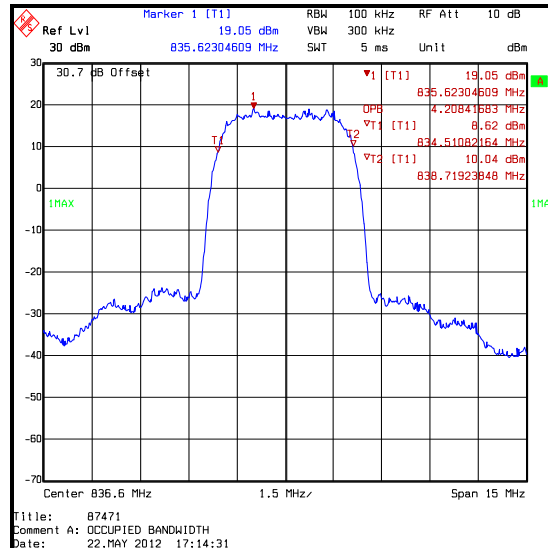

Transmitter Occupied Bandwidth (continued)

Results: HSDPA Sub-Test 1


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4208.417

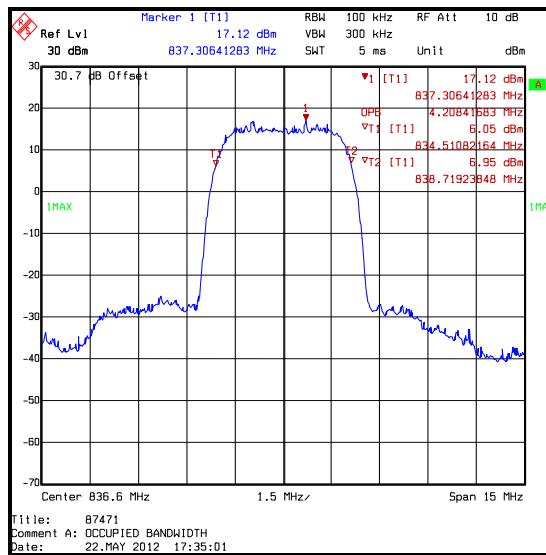

Transmitter Occupied Bandwidth (continued)

Results: HSDPA Sub-Test 2


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4208.417

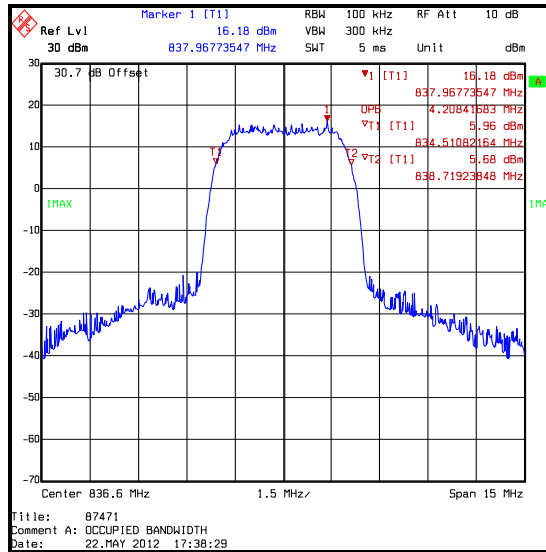

Transmitter Occupied Bandwidth (continued)

Results: HSDPA Sub-Test 3


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4208.417

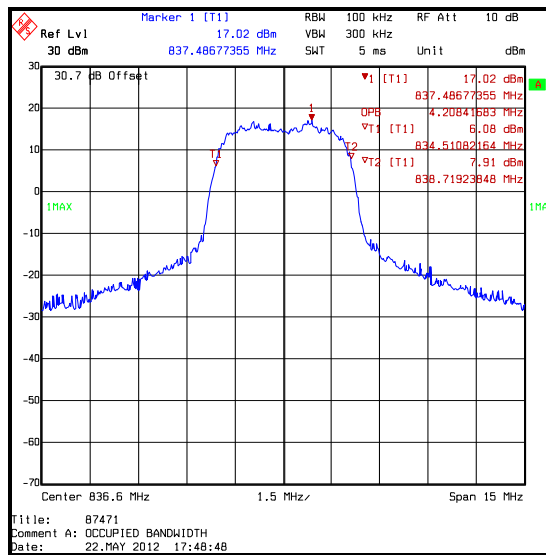

Transmitter Occupied Bandwidth (continued)

Results: HSDPA Sub-Test 4


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4208.417

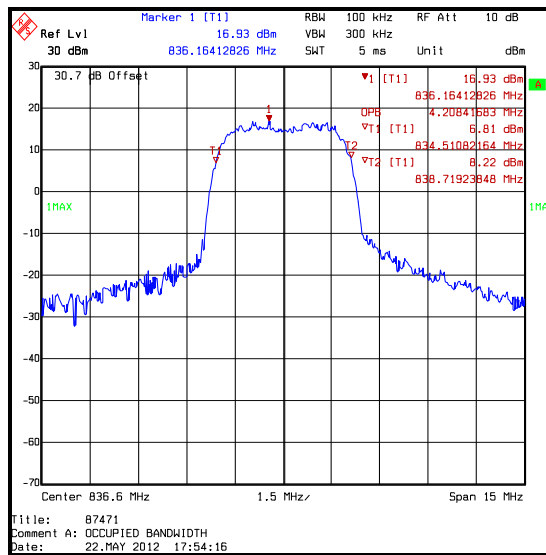

Transmitter Occupied Bandwidth (continued)

Results: HSUPA Sub-Test 1


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.357

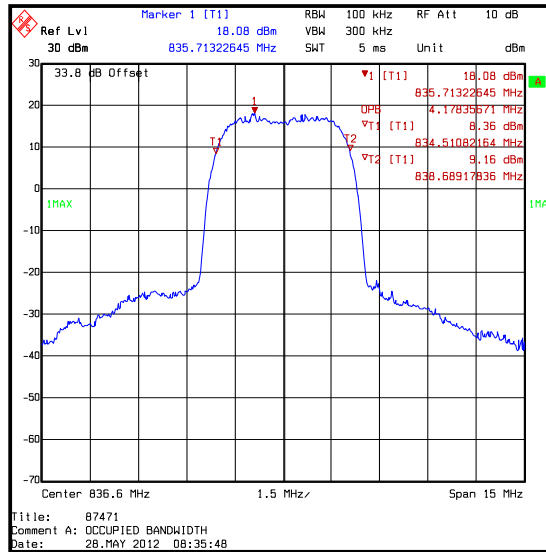

Transmitter Occupied Bandwidth (continued)

Results: HSUPA Sub-Test 2


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4238.477

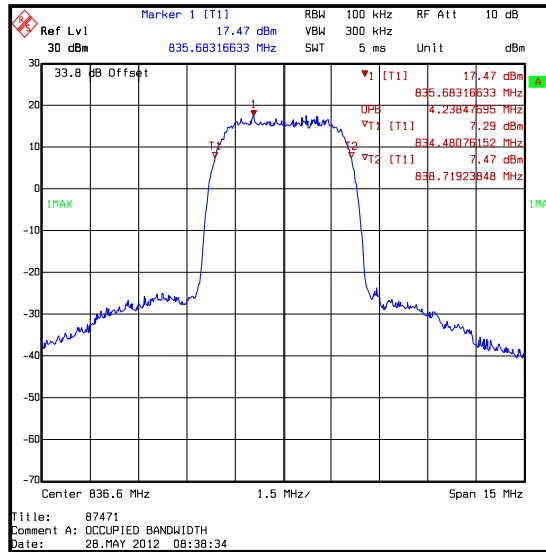

Transmitter Occupied Bandwidth (continued)

Results: HSUPA Sub-Test 3


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.357

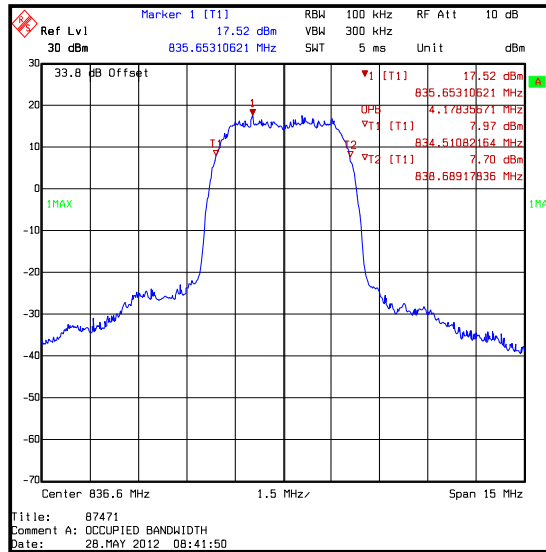

Transmitter Occupied Bandwidth (continued)

Results: HSUPA Sub-Test 4


Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.357

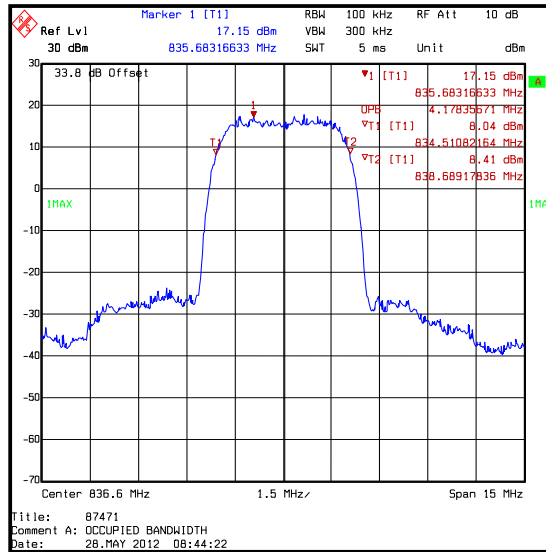

Transmitter Occupied Bandwidth (continued)

Results: HSUPA Sub-Test 5

Channel	Frequency (MHz)	Occupied Bandwidth (kHz)
Middle	836.6	4178.357

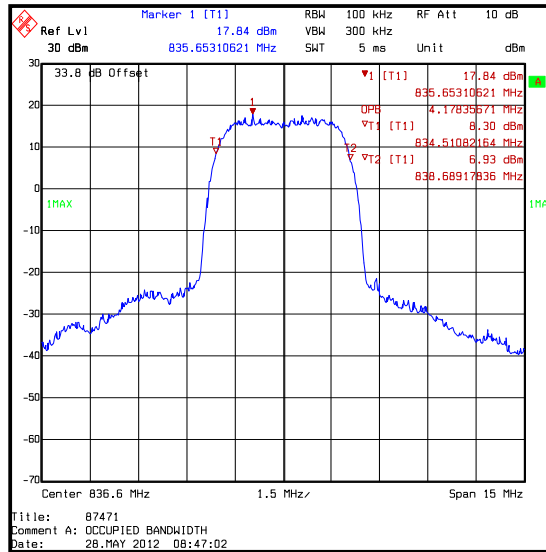

5.2.7. Transmitter Out of Band Radiated Emissions**Test Summary:**

Test Engineer:	Mark Percival & Nick Steele	Test Date:	23 May 2012
Test Sample IMEI:	351808050018796		

FCC Part:	2.1053 & 22.917
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Part 2.1053
Frequency Range:	30 MHz to 9 GHz
Configuration:	Voice / 12.2 kbps

Environmental Conditions:

Temperature (°C):	24 to 30
Relative Humidity (%):	38 to 51





Results: Voice / 12.2 kbps

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
8771.543	-32.8	-13.0	19.8	Complied



Note(s):

1. The uplink and downlink traffic channels are shown on the 30 MHz to 1 GHz plot.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
4. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions (continued)

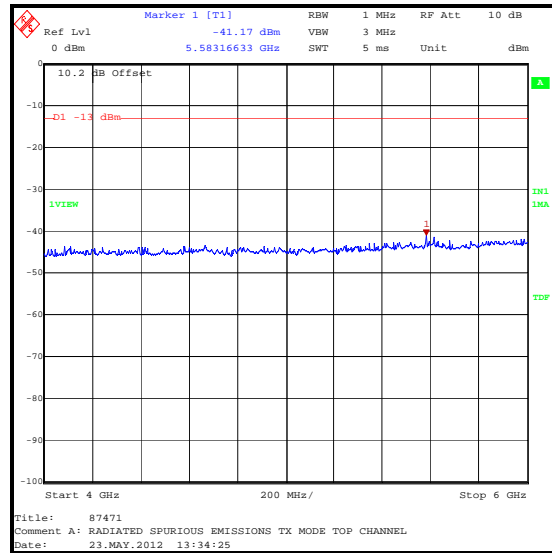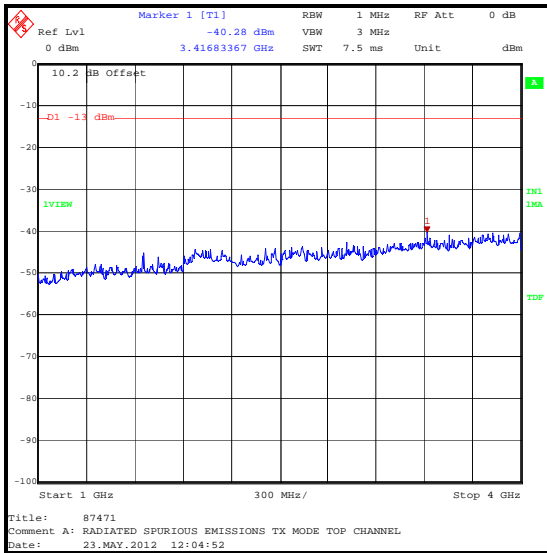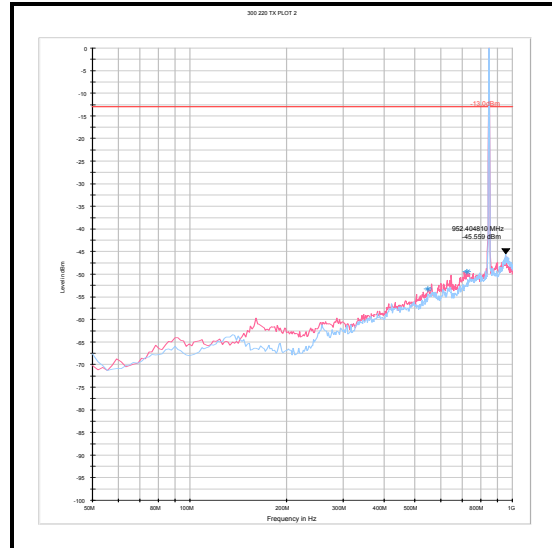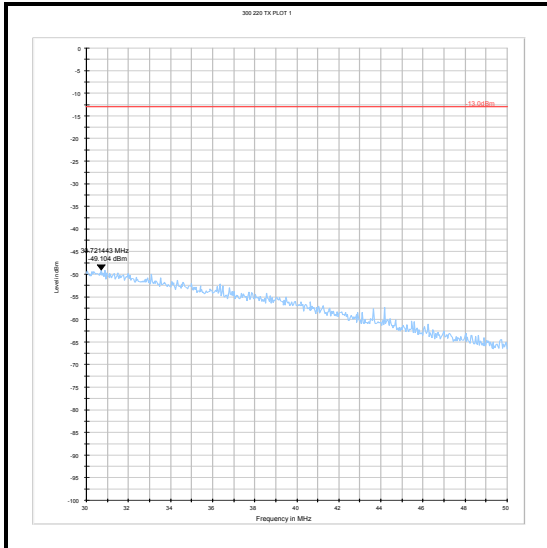

Transmitter Out of Band Radiated Emissions (continued)

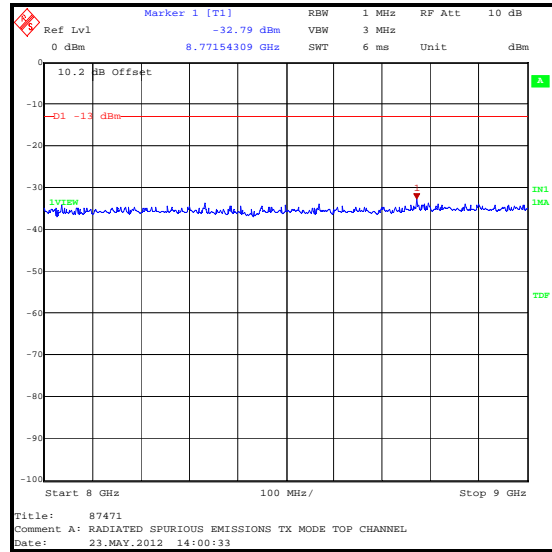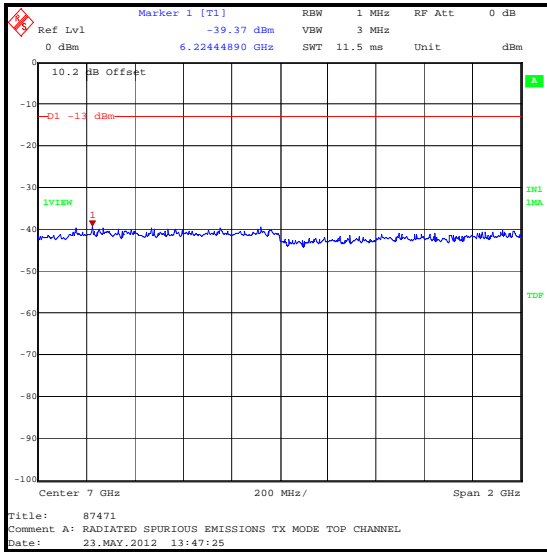

5.2.8. Transmitter Radiated Emissions at Band Edges

Test Summary:

Test Engineer:	Mark Percival & David Doyle	Test Dates:	23 May 2012 & 25 May 2012
Test Sample IMEI:	351808050018796		



FCC Part:	2.1053 & 22.917
Test Method Used:	As detailed in ANSI TIA-603-C-2004 Section 2.2.12 referencing FCC CFR Part 22.917

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	47

Results: Voice / 12.2 kbps

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-24.9	-13.0	11.9	Complied
849	-24.1	-13.0	11.1	Complied

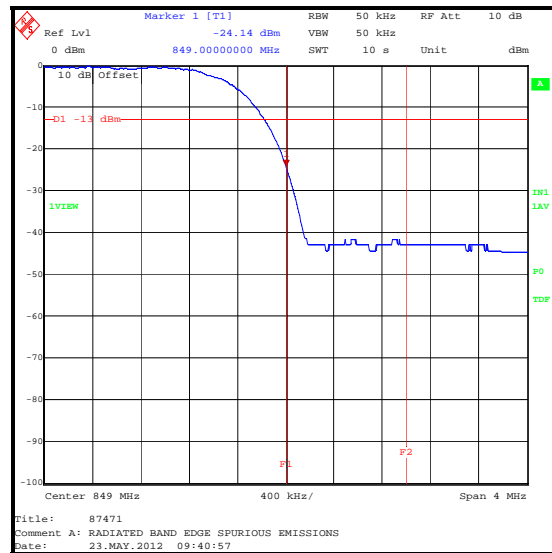
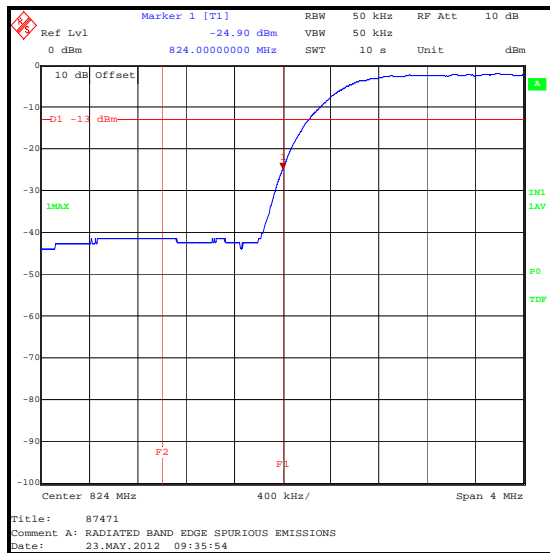


Transmitter Radiated Emissions at Band Edges (continued)

Results: HSDPA Sub-Test 1

Results: Voice / 12.2 kbps



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-25.4	-13.0	12.4	Complied
849	-23.8	-13.0	10.8	Complied

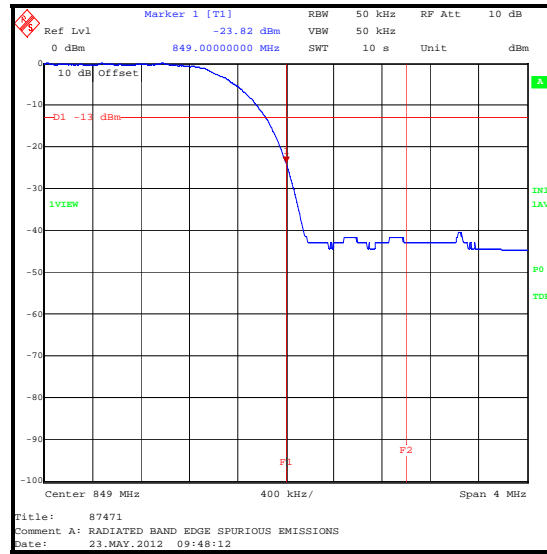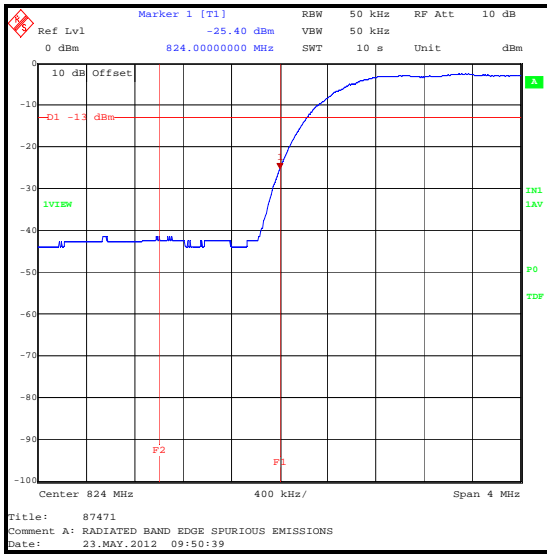

Transmitter Radiated Emissions at Band Edges (continued)

Results: HSDPA Sub-Test 2



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-25.4	-13.0	12.4	Complied
849	-25.8	-13.0	12.8	Complied

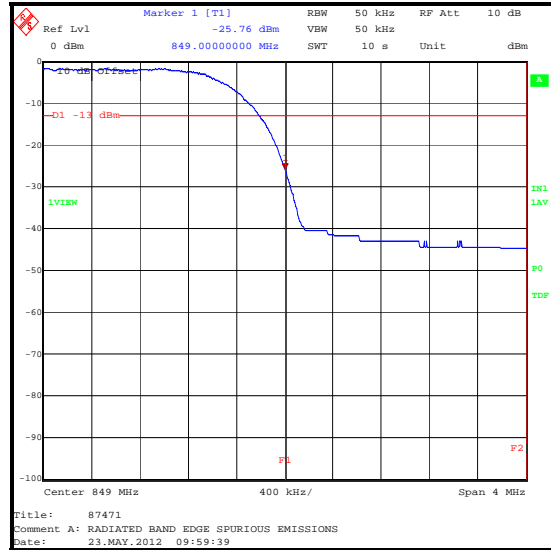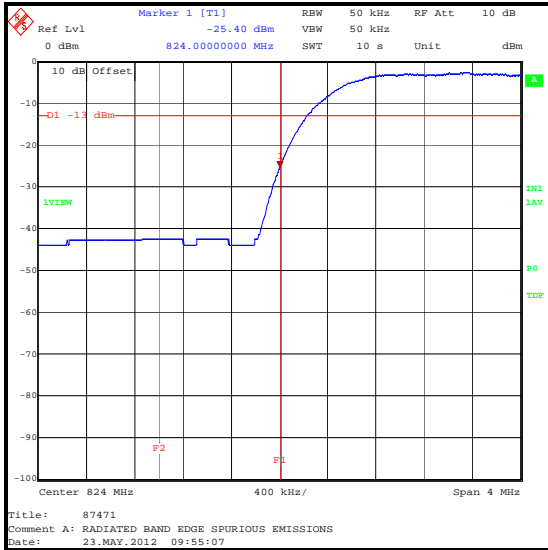

Transmitter Radiated Emissions at Band Edges (continued)

Results: HSDPA Sub-Test 3



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-27.1	-13.0	14.1	Complied
849	-25.0	-13.0	12.0	Complied

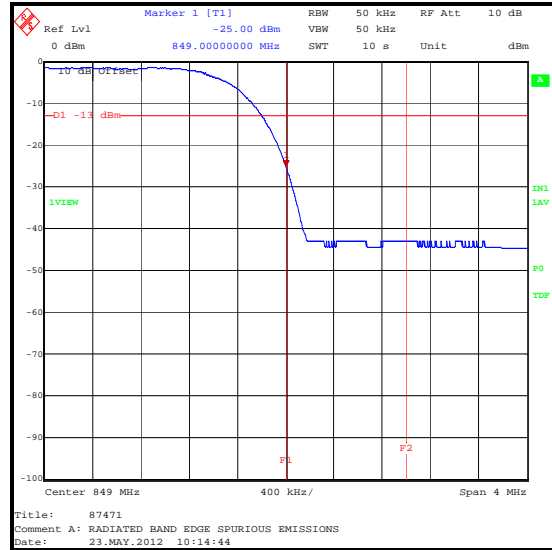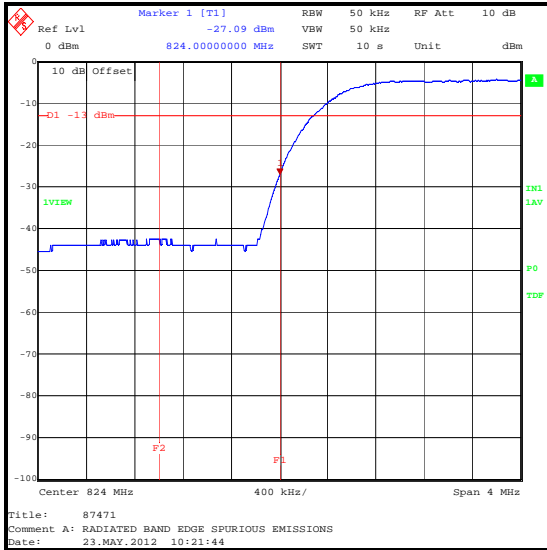

Transmitter Radiated Emissions at Band Edges (continued)

Results: HSDPA Sub-Test 4



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-27.1	-13.0	14.1	Complied
849	-25.0	-13.0	12.0	Complied

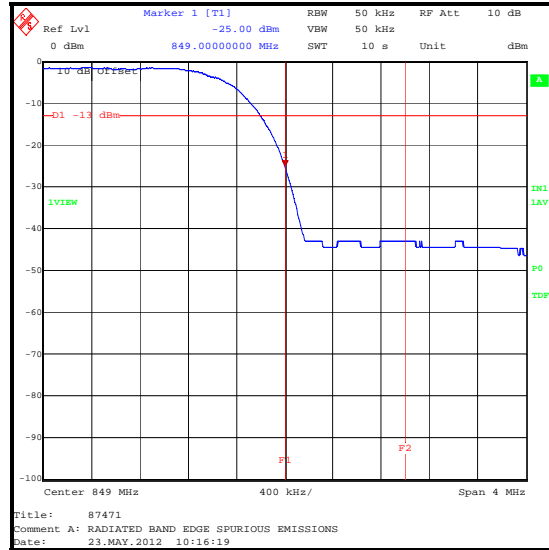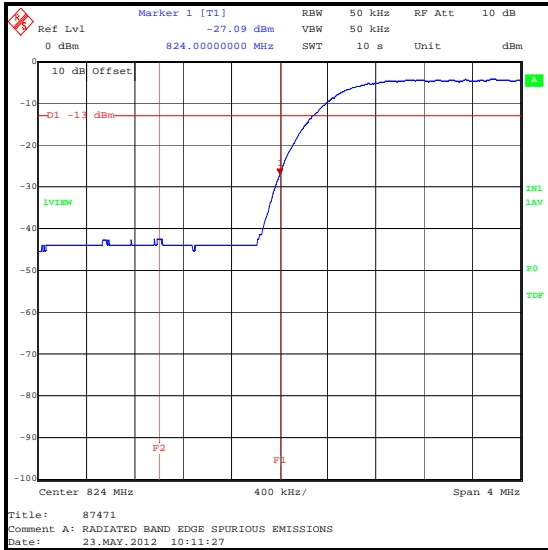

Transmitter Radiated Emissions at Band Edges (continued)

Results: HSUPA Sub-Test 1



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-28.2	-13.0	15.2	Complied
849	-28.5	-13.0	15.5	Complied

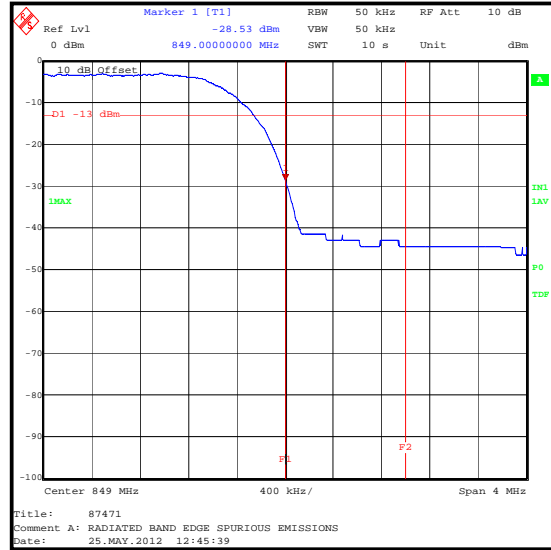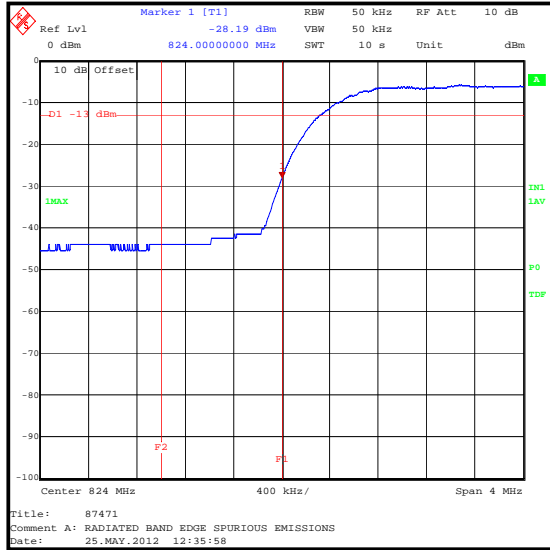

Transmitter Radiated Emissions at Band Edges (continued)

Results: HSUPA Sub-Test 2



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-27.7	-13.0	14.7	Complied
849	-28.3	-13.0	15.3	Complied

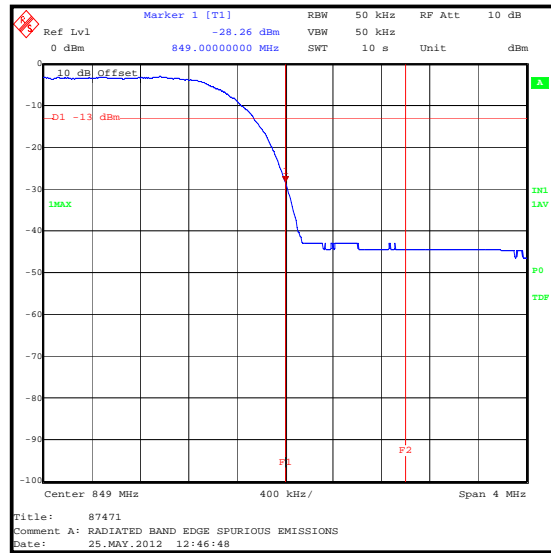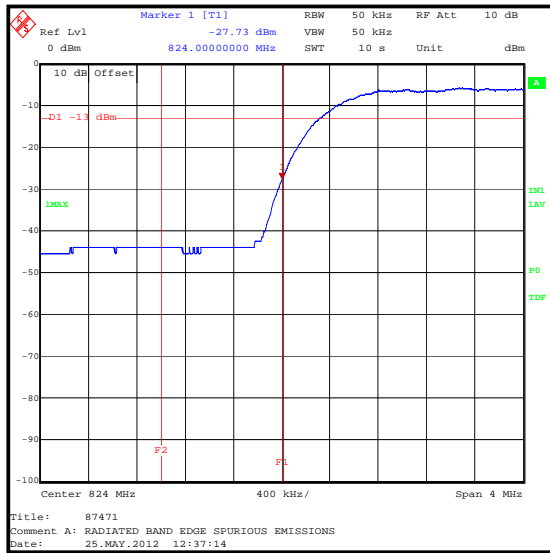

Transmitter Radiated Emissions at Band Edges (continued)

Results: HSUPA Sub-Test 3



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-28.4	-13.0	15.4	Complied
849	-28.5	-13.0	15.5	Complied

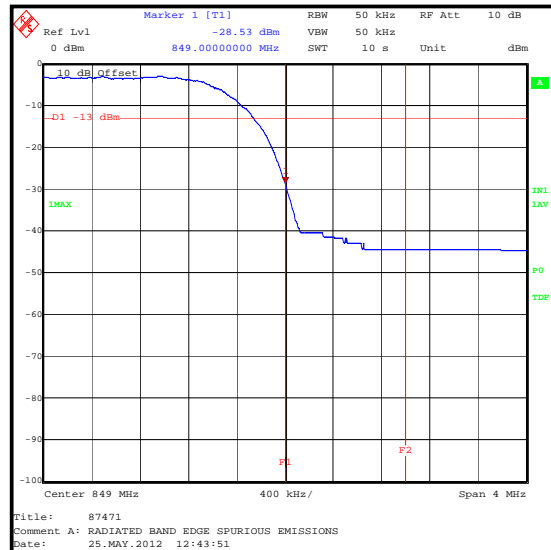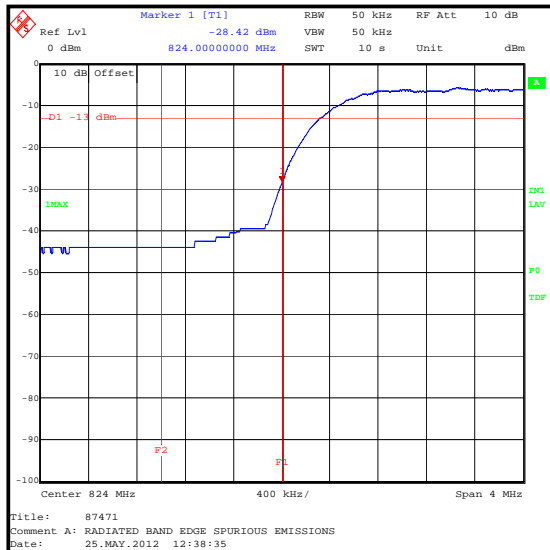

Transmitter Radiated Emissions at Band Edges (continued)

Results: HSUPA Sub-Test 4



Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-27.5	-13.0	14.5	Complied
849	-28.3	-13.0	15.3	Complied

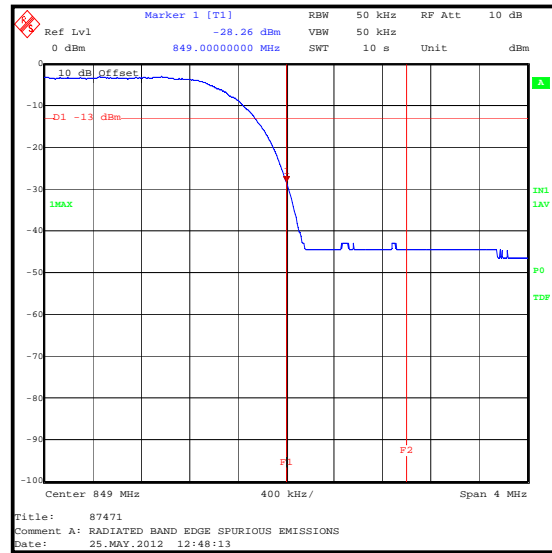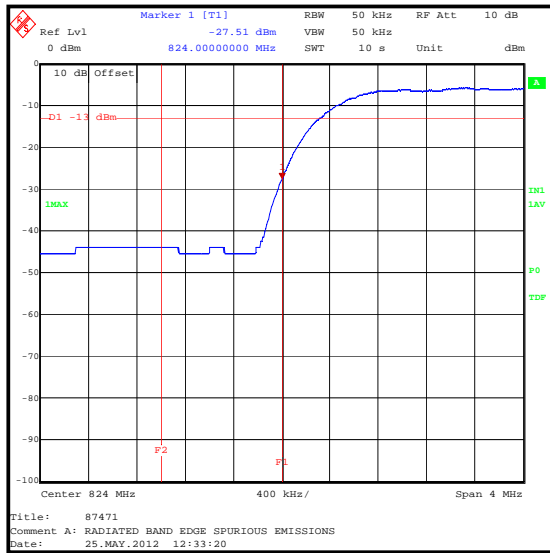

Transmitter Radiated Emissions at Band Edges (continued)

Results: HSUPA Sub-Test 5

Frequency (MHz)	Peak Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-28.2	-13.0	15.2	Complied
849	-28.5	-13.0	15.5	Complied

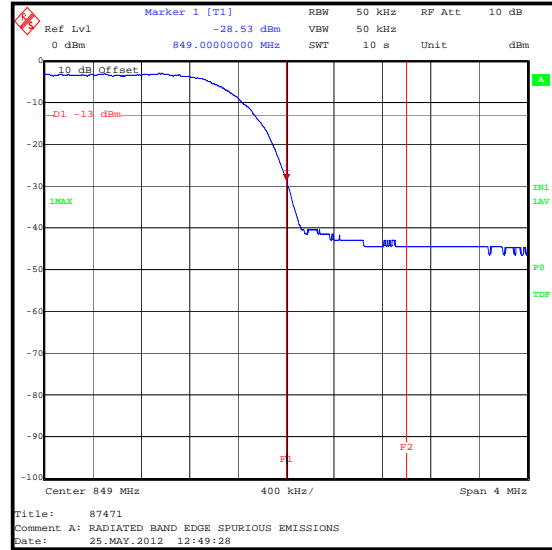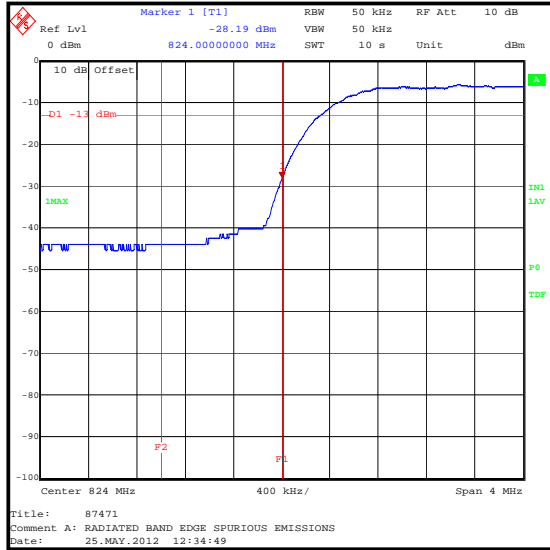

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
Effective Radiated Power (ERP)	824 to 849 MHz	95%	±2.94 dB
Frequency Stability	824 to 849 MHz	95%	±0.92 ppm
Occupied Bandwidth	824 to 849 MHz	95%	±0.92 ppm
Radiated Spurious Emissions	30 MHz to 9 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (months)
A067	LISN	Rohde & Schwarz	ESH3-Z5	890603/002	02 Jun 2012	12
A1368	Directional Coupler	Pasternack	PE2214-10	None	Calibrated before use	-
A1391	Attenuator	Huber & Suhner	757987	6810.17.B	03 Apr 2013	12
A1393	Attenuator	Huber & Suhner	757456	6820.17.B	08 Jul 2012	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	09 Oct 2012	12
A1818	Antenna	EMCO	3115	00075692	09 Oct 2012	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	25 Feb 2013	12
A1834	Attenuator	Hewlett Packard	8491B	10444	29 Jan 2013	12
A1974	High Pass Filter	AtlanTecRF	AFH-01000	090000283	15 Mar 2013	12
A1998	Attenuator	Huber & Suhner	6820.17.B	07101	03 Apr 2013	12
A2137	High Pass Filter	AtlanTecRF	A4224-10	Batch 26861	Calibrated before use	-
A244	Attenuator	Schaffner	6820-17-B	None	03 Apr 2013	12
A253	Antenna	Flann Microwave	12240-20	128	09 Oct 2012	12
A254	Antenna	Flann Microwave	14240-20	139	09 Oct 2012	12
A255	Antenna	Flann Microwave	16240-20	519	09 Oct 2012	12
A288	Antenna	Chase	CBL6111A	1589	19 Aug 2012	12
A553	Antenna	Chase	CBL6111A	1593	15 Feb 2013	12
E013	Environmental Chamber	Sanyo	MTH-4200PR	None	10 Aug 2012	12
G017	Signal Generator	Rohde & Schwarz	SMH	863 771/023	13 Jun 2013	24
G0543	Amplifier	Sonoma	310N	230801	13 Jul 2012	3
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	29 May 2012	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	09 Oct 2012	12
L1058	Comms Test Set	Rohde & Schwarz	CMU200	107252	16 Mar 2013	12
M1124	Spectrum Analyser	Rohde & Schwarz	ESI26	100046K	29 Jun 2012	12
M1242	Spectrum Analyser	Rohde & Schwarz	FSEM30	845986/022	12 Dec 2012	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	03 Feb 2013	12
M1379	Test Receiver	Rohde & Schwarz	ESIB7	100330	20 Sep 2012	12
M1642	Thermometer	Fluke	52II	18890119	16 Mar 2013	12
M1662	Comms Test Set	Rohde & Schwarz	CMU 200	109374	21 May 2013	12
S011	DC Power Supply Unit	INSTEK	PR-3010H	9401270	Calibrated before use	-

NB In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.