



TEST REPORT

Test Report No. : UL-RPT-RP90385JD16A

Manufacturer : Panasonic Mobile Communications Development of Europe Ltd
Model No. : NTT docomo EB-4063
FCC ID : UCE312057A
Technology : WLAN
Test Standard(s) : FCC Parts 15.107(a), 15.109, 15.207, 15.209(a), 15.403(i) & 15.407

1. This test report shall not be reproduced in full or partial, without the written approval of RFI Global Services Ltd trading as UL.
2. The results in this report apply only to the sample(s) tested.
3. This sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0

Date of Issue: 30 November 2012

Checked by:

Ian Watch
WiSE Senior Engineer

Issued by :

pp
John Newell
Group Quality Manager, WiSE
Basingstoke,
UL Verification Services



This laboratory is accredited by UKAS. The tests reported herein have been performed in accordance with its' terms of accreditation.

RFI Global Services Ltd trading as UL

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information	4
2. Summary of Testing	5
2.1. General Information	5
2.2. Summary of Test Results	6
2.3. Methods and Procedures	7
2.4. Deviations from the Test Specification	7
3. Equipment Under Test (EUT)	8
3.1. Identification of Equipment Under Test (EUT)	8
3.2. Description of EUT	8
3.3. Modifications Incorporated in the EUT	8
3.4. Additional Information Related to Testing	9
3.5. Support Equipment	10
4. Operation and Monitoring of the EUT during Testing	11
4.1. Operating Modes	11
4.2. Configuration and Peripherals	11
5. Measurements, Examinations and Derived Results	12
5.1. General Comments	12
5.2. Test Results	13
5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions	13
5.2.2. Receiver/Idle Mode Radiated Spurious Emissions	16
5.2.3. Transmitter AC Conducted Spurious Emissions	22
5.2.4. Transmitter 26 dB Emission Bandwidth	25
5.2.5. Transmitter Duty Cycle	45
5.2.6. Transmitter Maximum Conducted Output Power	53
5.2.7. Transmitter Peak Power Spectral Density	65
5.2.8. Transmitter Peak Excursion	77
5.2.8. Transmitter Out of Band Radiated Emissions	85
5.2.9. Transmitter Band Edge Radiated Emissions	91
6. Measurement Uncertainty	125
7. Report Revision History	126

1. Customer Information














Company Name:	Panasonic Mobile Communications Development of Europe Ltd
Address:	Panasonic House Willoughby Road Bracknell Berkshire RG12 8FP United Kingdom

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.407 and 47CFR15.403
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2012: Part 15 Subpart E (Unlicensed National Information Infrastructure Devices) – Sections 15.403 and 15.407
Specification Reference:	47CFR15.107 and 47CFR15.109
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2012: Part 15 Subpart B (Unintentional Radiators) - Sections 15.107 and 15.109
Specification Reference:	47CFR15.207 and 47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2012: Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209
Site Registration:	209735
Location of Testing:	RFI Global Services Ltd trading as UL, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	15 November 2012 to 27 November 2012

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.107(a)	Receiver/Idle Mode AC Conducted Emissions	
Part 15.109	Receiver/Idle Mode Radiated Spurious Emissions	
Part 15.207	Transmitter AC Conducted Emissions	
Part 15.403(i)	Transmitter 26 dB Emission Bandwidth	
Part 15.35(c)	Transmitter Duty Cycle	Note 1
Part 15.407(a)(1)	Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band)	
Part 15.407(a)(2)	Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)	
Part 15.407(a)(1)	Transmitter Peak Power Spectral Density (5.15-5.25 GHz band)	
Part 15.407(a)(2)	Transmitter Peak Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)	
Part 15.407(a)(6)	Transmitter Peak Excursion	
Part 15.407(b)/ 15.209(a)	Transmitter Out of Band Radiated Emissions	
Part 15.407(b)/ 15.209(a)	Transmitter Band Edge Radiated Emissions	
Part 15.407(g)	Transmitter Frequency Stability (Temperature & Voltage Variation)	Note 2
Part 15.407(h)(1)	Transmitter Power Control	Note 3
Key to Results		
 = Complied  = Did not comply		

Note(s):

1. The measurement was performed to assist in the calculation of the level of average output power, peak power spectral density, peak excursion and emissions as the EUT employs pulsed operation.
2. Frequency stability is better than 20 ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.
3. Transmit Power Control was not tested as the maximum EIRP is less than 500 mW (27 dBm).

2.3. Methods and Procedures

Reference:	ANSI C63.4 (2009)
Title:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
Reference:	ANSI C63.10 (2009)
Title:	American National Standard for Testing Unlicensed Wireless Devices
Reference:	FCC KDB 789033 D01 v01r02 26/9/2012
Title:	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E
Reference:	FCC Response To Inquiry
Title:	Tracking Number 969369 Date: 21 February 2012

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specifications identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	NTT docomo
Model Name or Number:	EB-4063
IMEI:	353740050011927 (<i>Radiated sample</i>)
Hardware Version Number:	Rev B-2
Software Version Number:	ACPU: rupy-jb-10-0336 CCPU: 101033_DCM_00.12
FCC ID:	UCE312057A

Brand Name:	NTT docomo
Model Name or Number:	EB-4063
Serial Number:	353740050012164 (<i>Conducted RF port sample</i>)
Hardware Version Number:	Rev B-2
Software Version Number:	ACPU: rupy-jb-10-0336 CCPU: 101033_DCM_00.12
FCC ID:	UCE312057A

Brand Name:	NTT docomo
Description:	AC Charger
Model Name or Number:	AC 04

Brand Name:	NTT docomo
Description:	Charge/USB Data cable
Model Name or Number:	Type 01

Brand Name:	NTT docomo
Description:	Personal Hands-Free
Model Name or Number:	Type 02

3.2. Description of EUT

The equipment under test was a Multi-Mode LTE/UMTS/GSM Mobile Phone with WLAN, Bluetooth and RFID.

The EUT supports DFS as a Client without Radar Detection.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	IEEE 802.11		
Type of Unit:	Transceiver		
Modulation:	BPSK, QPSK, 16QAM, 64QAM		
Data rates:	802.11a	6, 9, 12, 18, 24, 36, 48 & 54 Mbps	
	802.11n HT20	6.5, 13, 19.5, 26, 39, 52, 58.5, 65, 7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65 & 72.2 Mbps	
	802.11n HT40	13.5, 27, 40.5, 54, 81, 108, 121.5, 135, 15, 30, 45, 60, 90, 120, 135 & 150 Mbps	
Power Supply Requirement(s):	Nominal	3.8 VDC via 120 VAC 60 Hz adaptor	
Antenna Gain:	5.15 to 5.725 GHz	-1.8 dBi	
Maximum Conducted Output Power:	8.0 dBm		
Channel Spacing:	20 MHz		
Transmit & Receive Frequency Band:	5150 MHz to 5250 MHz		
Transmit & Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	36	5180
	Middle	40	5200
	Top	48	5240
Transmit & Receive Frequency Band:	5250 MHz to 5350 MHz		
Transmit & Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	52	5260
	Middle	56	5280
	Top	64	5320
Transmit & Receive Frequency Band:	5470 MHz to 5725 MHz		
Transmit & Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	100	5500
	Middle	116	5580
	Top	140	5700

Additional Information Related to Testing (continued)

Channel Spacing:	40 MHz		
Transmit & Receive Frequency Band:	5150 MHz to 5250 MHz		
Transmit & Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	38	5190
	Top	46	5230
Transmit & Receive Frequency Band:	5250 MHz to 5350 MHz		
Transmit & Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	54	5270
	Top	62	5310
Transmit & Receive Frequency Band:	5470 MHz to 5725 MHz		
Transmit & Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	102	5510
	Middle	118	5590
	Top	134	5670

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Laptop PC
Brand Name:	Panasonic
Model Name or Number:	CF74
Serial Number:	CF-74C3BBDE (MCEUK 7397)

Description:	2G Micro SD Card
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Receiver/Idle mode. The 802.11 mode was active but not transmitting.
- Continuously transmitting with a modulated carrier at maximum power on the bottom, middle and top channels as required using the supported data rates/modulation types.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- Controlled using a bespoke application on the laptop PC supplied by the Customer. The application was used to enable continuous transmission and receive modes and to select the test channels, data rates and modulation schemes as required.
- Receive/Idle tests: The 802.11 mode was active but not transmitting.
- All supported modes and channel widths were initially investigated on one channel. The modes that produced the highest power were:
 - 802.11a – 54 Mbps
 - 802.11n HT20 – 65 Mbps / MCS7
 - 802.11n HT40 – 135 Mbps / MCS7
- All supported modes and channel widths were initially investigated on one channel. The modes that produced the widest bandwidth were:
 - 802.11a – 9 Mbps
 - 802.11n HT20 – 6.5 Mbps / MCS0
 - 802.11n HT40 – 13.5 Mbps / MCS0
- Idle and transmitter radiated spurious emissions tests were performed with the PHF and AC charger connected to the EUT as this was found to be the worst case during pre-scans. All the accessories were individually connected and measurements made during the pre-scans to determine the worst case combination.
- Transmitter spurious emissions were performed with the EUT transmitting with a data rate of 54 Mbps, as this was found to have the highest power level and therefore deemed to be worst case.
- The conducted sample with IMEI 353740050012164 was used for 26 dB bandwidth, maximum output power, peak power spectral density and peak excursion tests.
- The radiated sample with IMEI 353740050011927 was used for all other tests.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6 Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results**5.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions****Test Summary:**

Test Engineer:	David Doyle	Test Date:	15 November 2012
Test Sample IMEI:	353740050011927		

FCC Reference:	Part 15.107(a)
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

Environmental Conditions:

Temperature (°C):	21
Relative Humidity (%):	41

Results: Live / Quasi Peak

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.479	Live	42.3	56.4	14.1	Complied
2.558	Live	34.6	56.0	21.4	Complied
4.259	Live	36.0	56.0	20.0	Complied
4.493	Live	37.9	56.0	18.1	Complied
5.325	Live	36.5	60.0	23.5	Complied
5.694	Live	36.2	60.0	23.8	Complied

Results: Live / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.474	Live	35.9	46.4	10.5	Complied
2.832	Live	33.4	46.0	12.6	Complied
4.335	Live	28.8	46.0	17.2	Complied
4.515	Live	30.6	46.0	15.4	Complied
5.357	Live	29.4	50.0	20.6	Complied
5.681	Live	29.9	50.0	20.1	Complied


Receiver/Idle Mode AC Conducted Spurious Emissions (continued)**Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.209	Neutral	34.6	63.3	28.7	Complied
2.004	Neutral	22.1	56.0	33.9	Complied
2.526	Neutral	23.7	56.0	32.3	Complied
3.539	Neutral	28.8	56.0	27.2	Complied
4.812	Neutral	36.7	56.0	19.3	Complied
5.240	Neutral	36.4	60.0	23.6	Complied
5.645	Neutral	36.2	60.0	23.8	Complied


Results: Neutral / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.213	Neutral	23.4	53.1	29.7	Complied
1.950	Neutral	13.6	46.0	32.4	Complied
2.949	Neutral	15.6	46.0	30.4	Complied
4.205	Neutral	22.6	46.0	23.4	Complied
4.920	Neutral	26.9	46.0	19.1	Complied
5.177	Neutral	27.7	50.0	22.3	Complied
5.573	Neutral	28.3	50.0	21.7	Complied

Receiver/Idle Mode AC Conducted Spurious Emissions (continued)

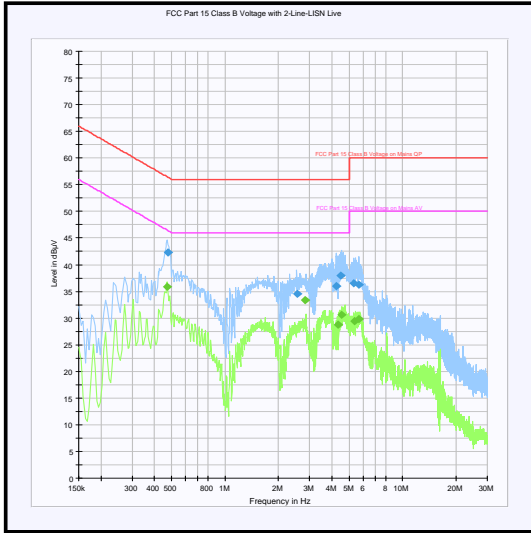

Live

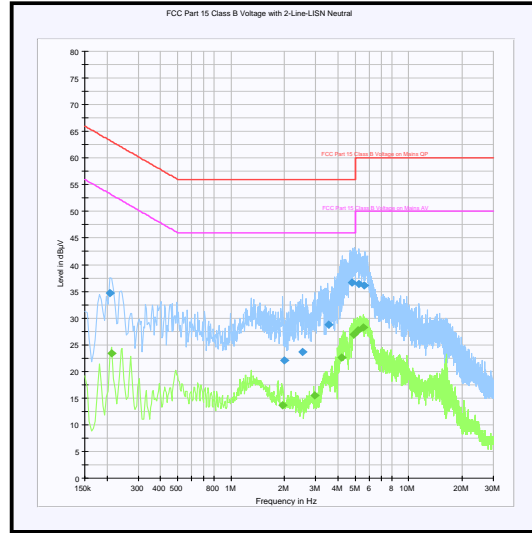

Neutral

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test Equipment Used:

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A649	LISN	Rohde & Schwarz	ESH3-Z5	825562/008	19 Feb 2013	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	25 Feb 2013	12
M1263	Test Receiver	Rohde & Schwarz	ESIB7	100265	09 Aug 2013	12

5.2.2. Receiver/Idle Mode Radiated Spurious Emissions**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	11 November 2012
Test Sample IMEI:	353740050011927		

FCC Reference:	Part 15.109
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:


Temperature (°C):	23
Relative Humidity (%):	33

Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
3. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Results: Quasi Peak

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
956.932	Vertical	24.6	46.0	21.4	Complied

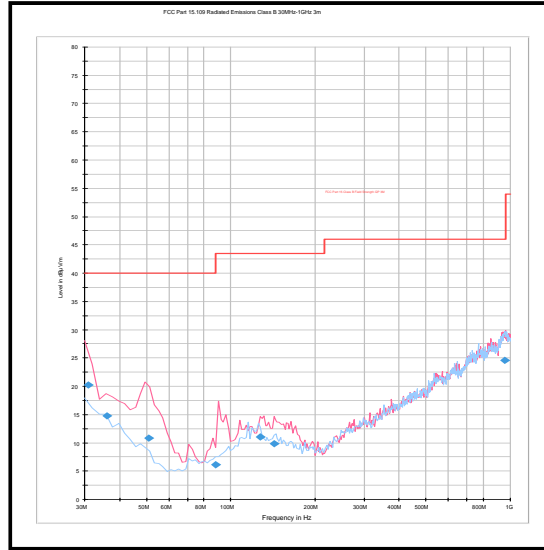Receiver/Idle Mode Radiated Spurious Emissions (continued)

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Test Equipment Used:

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A1834	Attenuator	Hewlett Packard	8491B	10444	29 Jan 2013	12
A553	Antenna	Chase	CBL6111A	1593	15 Feb 2013	12
G0543	Amplifier	Sonoma	310N	230801	02 Jan 2013	3
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	03 Feb 2013	12

Receiver/Idle Mode Radiated Spurious Emissions (continued)**Test Summary:**

Test Engineer:	Nick Steele	Test Dates:	13 November 2012 & 22 November 2012
Test Sample IMEI:	353740050011927		

FCC Reference:	Part 15.109
Test Method Used:	As detailed in ANSI C63.10 Sections 6.3 and 6.6 referencing ANSI C63.4
Frequency Range:	1 GHz to 30 GHz

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	39 to 41





Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table below. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.
3. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.




Results:

Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
16926.854	Vertical	49.9	54.0	4.1	Complied

Receiver/Idle Mode Radiated Spurious Emissions (continued)

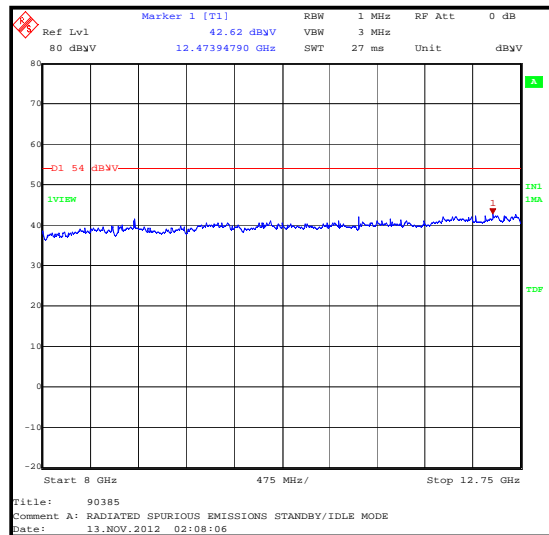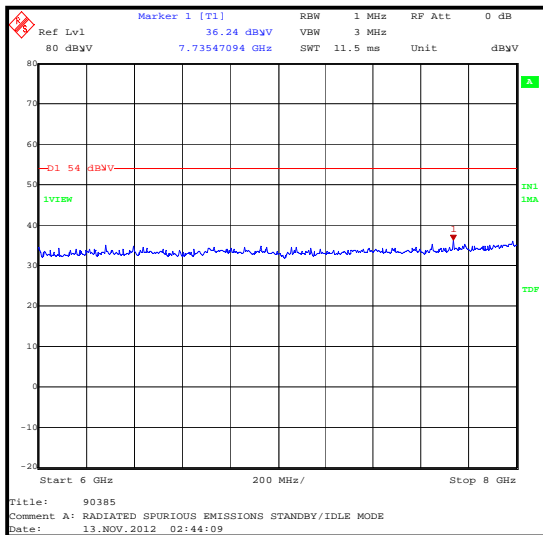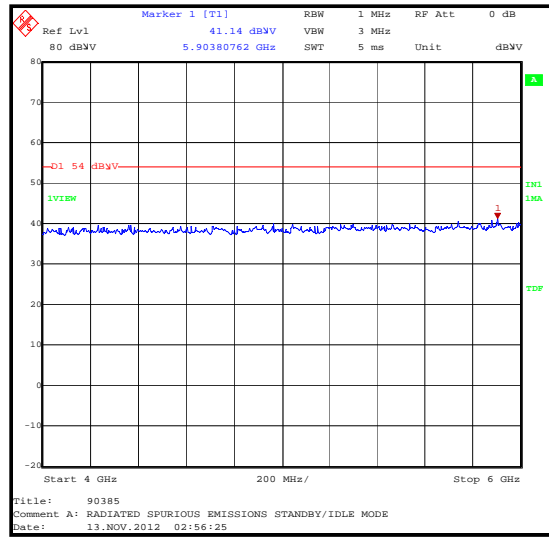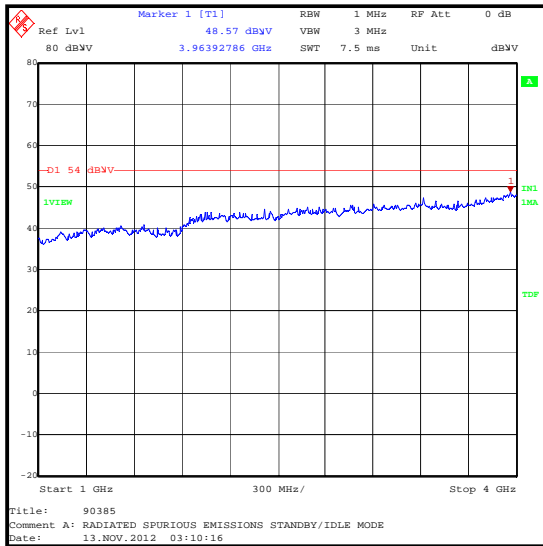

Receiver/Idle Mode Radiated Spurious Emissions (continued)

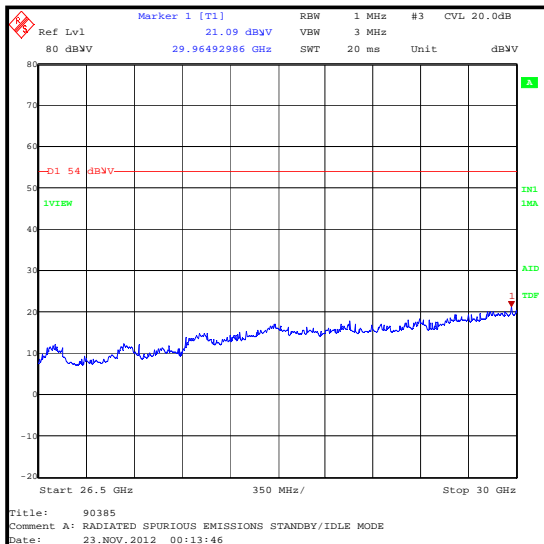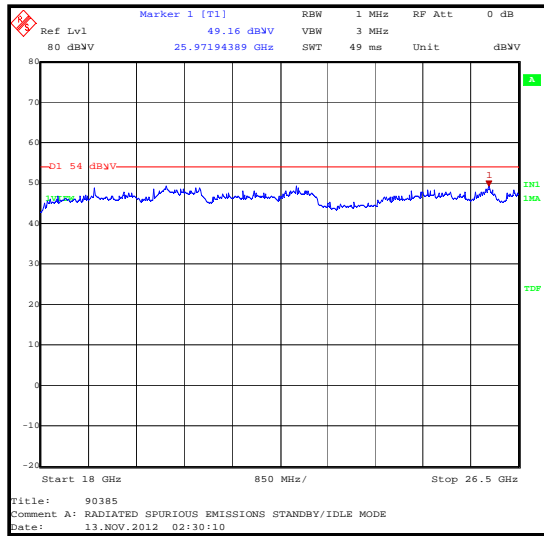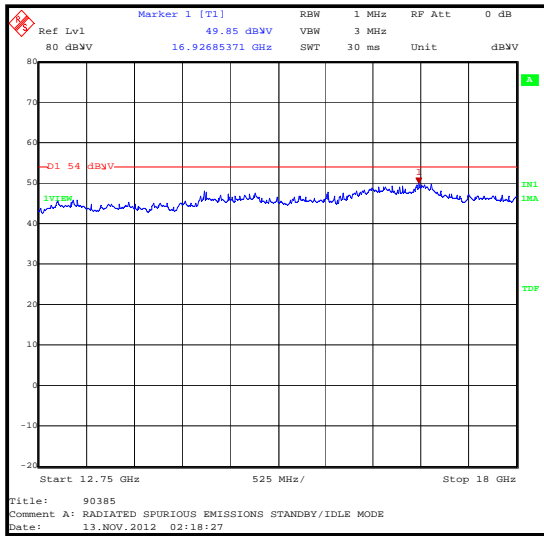

Receiver/Idle Mode Radiated Spurious Emissions (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	04 Nov 2013	12
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	N/A	14 Aug 2013	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	04 Nov 2013	12
A1818	Antenna	EMCO	3115	00075692	04 Nov 2013	12
A253	Antenna	Flann Microwave	12240-20	128	04 Nov 2013	12
A254	Antenna	Flann Microwave	14240-20	139	04 Nov 2013	12
A255	Antenna	Flann Microwave	16240-20	519	04 Nov 2013	12
A256	Antenna	Flann Microwave	18240-20	400	04 Nov 2013	12
A436	Antenna	Flann	20240-20	330	04 Nov 2013	12
M1390	Harmonic Mixer	Farran Technology	WHMP 28	FTL1677B	Calibrated before use	-
A366	Isolator	MRI	FRR-400	169	Calibrated before use	-
A203	Antenna	Flann Microwave	22240-20	343	11 May 2013	36
A1785	Pre-Amplifier	Farran Technology	FLNA-28-30	FTL 6483	Calibrated before use	-
S0537	Power Supply Unit	TTI	EL302D	249928	Calibrated before use	-
M1251	Digital Multimeter	Fluke	175	89170179	30 Jul 2013	12

5.2.3. Transmitter AC Conducted Spurious Emissions**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	21 November 2012
Test Sample IMEI:	353740050011927		

FCC Reference:	Part 15.207
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

Environmental Conditions:

Temperature (°C):	19
Relative Humidity (%):	46

Results: Live / Quasi Peak

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.150	Live	58.8	66.0	7.2	Complied
0.155	Live	58.4	65.8	7.4	Complied
0.159	Live	58.2	65.5	7.3	Complied
0.191	Live	56.5	64.0	7.5	Complied
0.240	Live	54.4	62.1	7.7	Complied
0.335	Live	50.9	59.3	8.4	Complied
0.416	Live	48.4	57.5	9.1	Complied
0.434	Live	47.6	57.2	9.6	Complied

Results: Live / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.204	Live	29.5	53.4	23.9	Complied
0.254	Live	30.4	51.6	21.2	Complied
0.258	Live	29.6	51.5	21.9	Complied
0.461	Live	27.5	46.7	19.2	Complied
0.6405	Live	24.9	46.0	21.1	Complied
4.988	Live	26.4	46.0	19.6	Complied


Transmitter AC Conducted Spurious Emissions (continued)**Results: Neutral / Quasi Peak**

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.150	Neutral	56.8	66.0	9.2	Complied
0.155	Neutral	56.9	65.8	8.9	Complied
0.182	Neutral	55.6	64.4	8.8	Complied
0.195	Neutral	55.2	63.8	8.6	Complied
0.204	Neutral	55.4	63.4	8.0	Complied
0.227	Neutral	53.9	62.6	8.7	Complied
0.245	Neutral	52.7	61.9	9.2	Complied
0.303	Neutral	51.6	60.2	8.6	Complied


Results: Neutral / Average

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.204	Neutral	33.6	19.8	53.4	Complied
0.209	Neutral	30.7	22.6	53.3	Complied
0.258	Neutral	28.9	22.6	51.5	Complied
0.447	Neutral	25.7	21.2	46.9	Complied
4.974	Neutral	24.4	21.6	46.0	Complied
5.316	Neutral	25.7	24.3	50.0	Complied

Transmitter AC Conducted Spurious Emissions (continued)

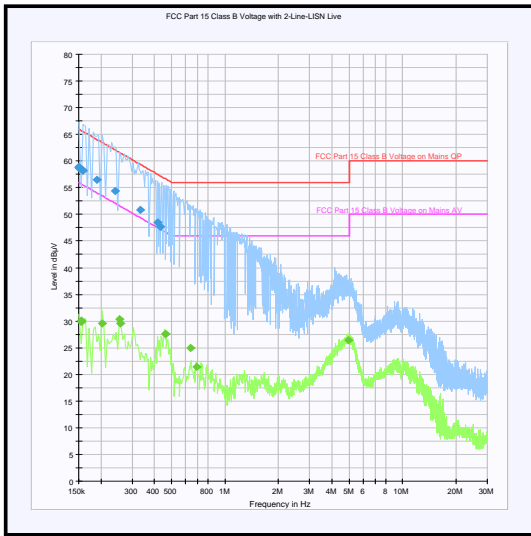

Live

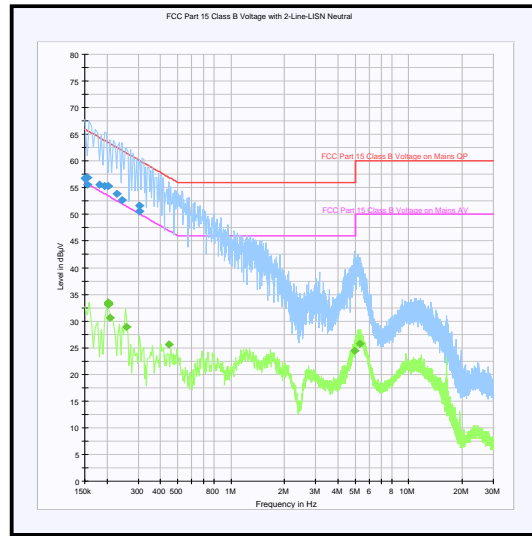

Neutral

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test Equipment Used:

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A649	LISN	Rohde & Schwarz	ESH3-Z5	825562/008	19 Feb 2013	12
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	25 Feb 2013	12
M1263	Test Receiver	Rohde & Schwarz	ESIB7	100265	09 Aug 2013	12

5.2.4. Transmitter 26 dB Emission Bandwidth**Test Summary:**

Test Engineer:	Andrew Edwards	Test Dates:	22 November 2012 & 26 November 2012
Test Sample IMEI:	353740050012164		

FCC Reference:	Part 15.403(i)
Test Method Used:	FCC KDB 789033 Section D)

Environmental Conditions:

Temperatures (°C):	23 to 24
Relative Humidity (%):	34 to 35

Note(s):


1. All configurations supported by the EUT were investigated on the top channel in accordance with KDB 789033 Section D emission bandwidth test procedure. The data rates that produced the widest bandwidth (worst case) have been reported as detailed below:
 - o 802.11a – BPSK / 9 Mbps
 - o 802.11n HT20 – BPSK / 6.5 Mbps / MCS0
 - o 802.11n HT40 – BPSK / 13.5 Mbps / MCS0
2. Final measurements were performed in each supported operating band using the above configurations on the bottom, middle and top channels.
3. For the power measurements in this report, the highest power output level was recorded when the EUT was configured as:
 - o 802.11a – 64QAM / 54 Mbps
 - o 802.11n HT20 – 64QAM / 65 Mbps / MCS7
 - o 802.11n HT40 – 64QAM / 135 Mbps / MCS7

Emission bandwidth plots in these configurations have been included as 'Reference plots' at the end of this Section and the results used for calculations in Section 5.2.6.


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11a / 20 MHz / 5.15-5.25 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps	26 dB Emission Bandwidth (MHz)
Bottom	5180	BPSK	9	22.766
Middle	5200	BPSK	9	23.687
Top	5240	BPSK	9	23.166

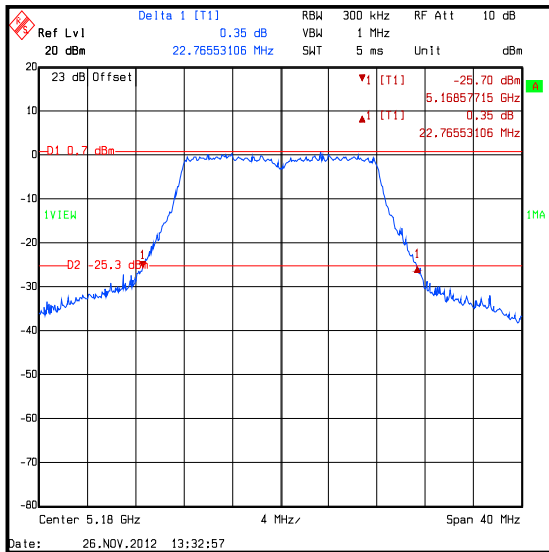

Bottom Channel

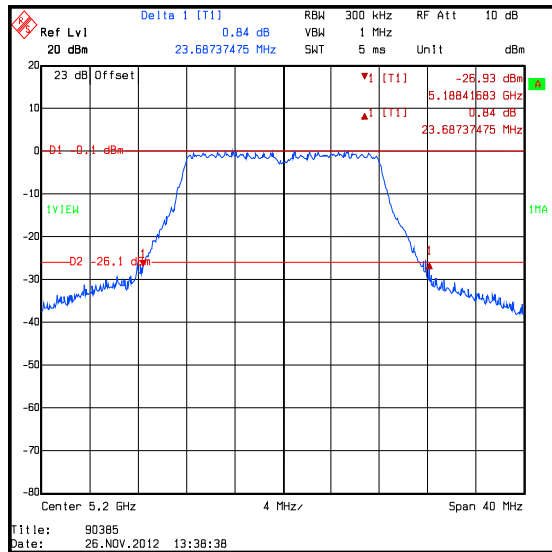

Middle Channel

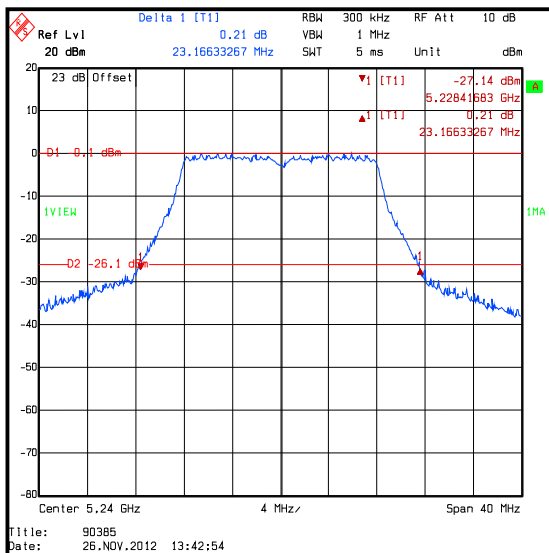


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11a / 20 MHz / 5.25-5.35 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps	26 dB Emission Bandwidth (MHz)
Bottom	5260	BPSK	9	22.926
Middle	5280	BPSK	9	23.327
Top	5320	BPSK	9	23.246

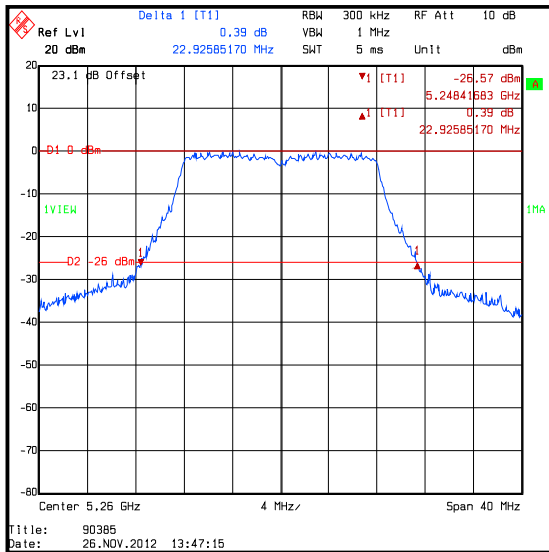

Bottom Channel

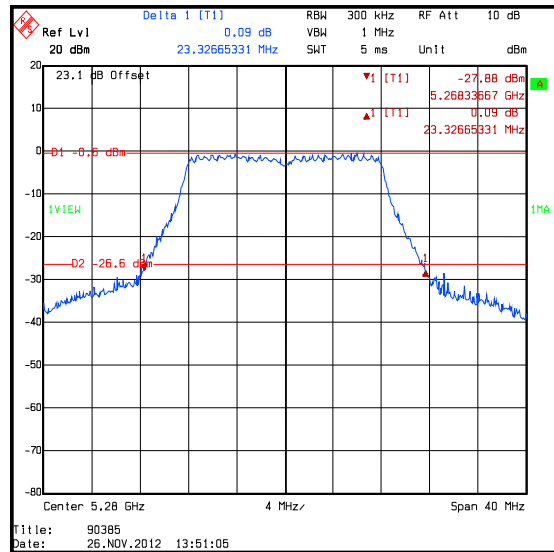

Middle Channel

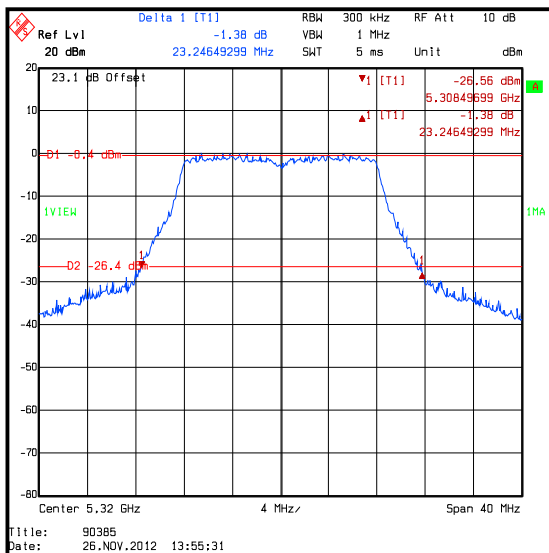


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11a / 20 MHz / 5.47-5.725 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps	26 dB Emission Bandwidth (MHz)
Bottom	5500	BPSK	9	22.846
Middle	5580	BPSK	9	23.246
Top	5700	BPSK	9	29.900

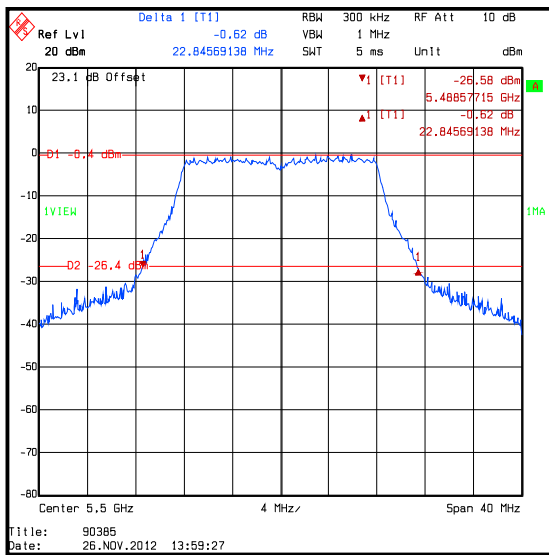

Bottom Channel

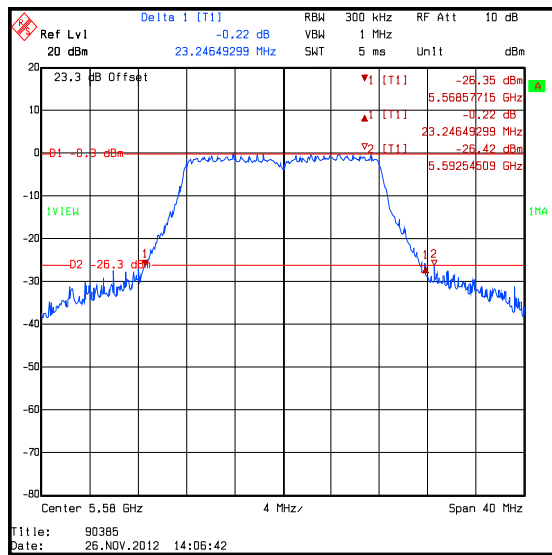

Middle Channel

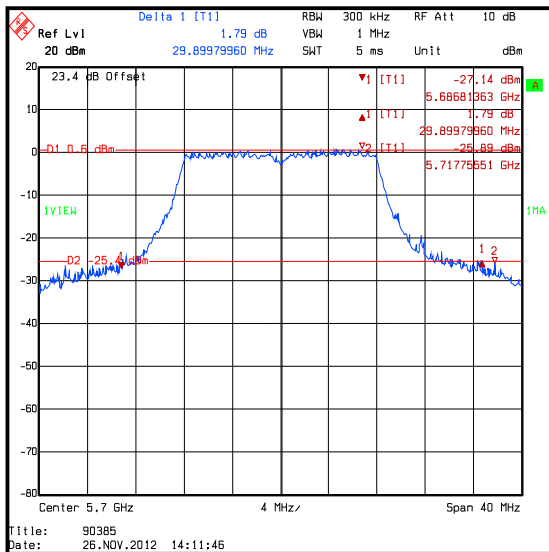


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 20 MHz / 5.15-5.25 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5180	BPSK	6.5 / MCS0	23.407
Middle	5200	BPSK	6.5 / MCS0	23.086
Top	5240	BPSK	6.5 / MCS0	23.727

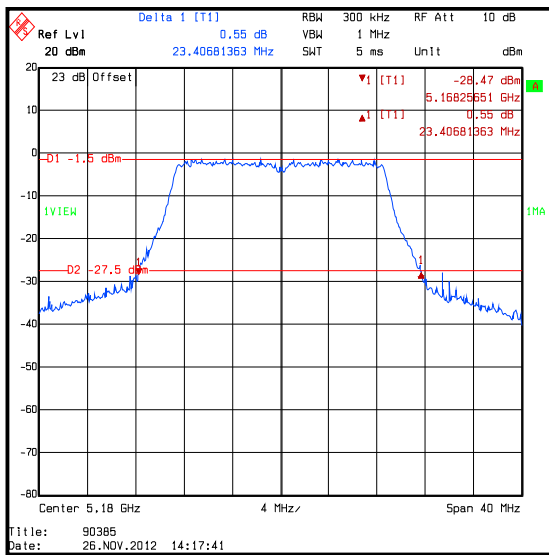

Bottom Channel

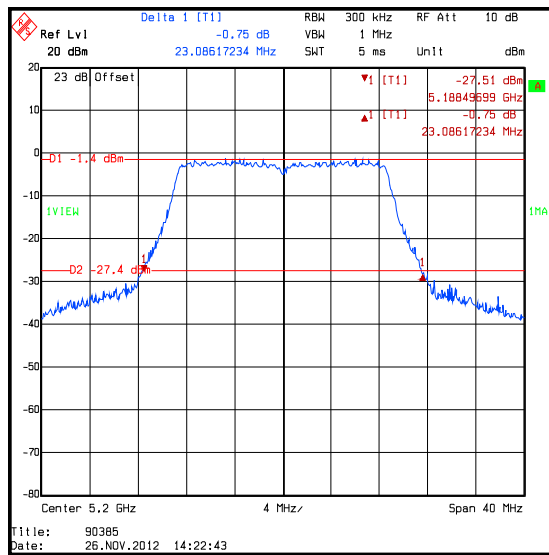

Middle Channel

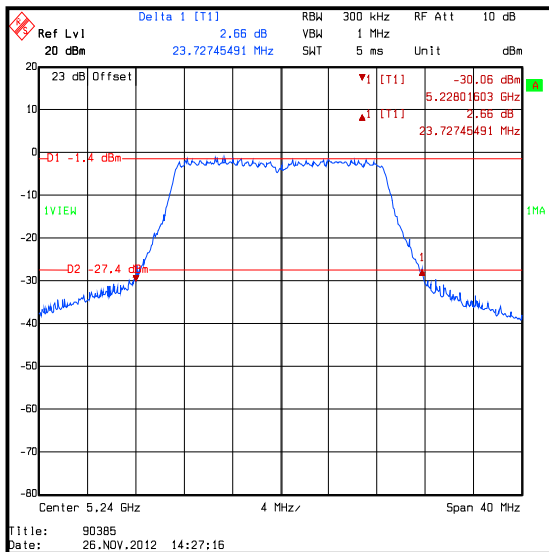


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 20 MHz / 5.25-5.35 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5260	BPSK	6.5 / MCS0	23.647
Middle	5280	BPSK	6.5 / MCS0	23.327
Top	5320	BPSK	6.5 / MCS0	23.327

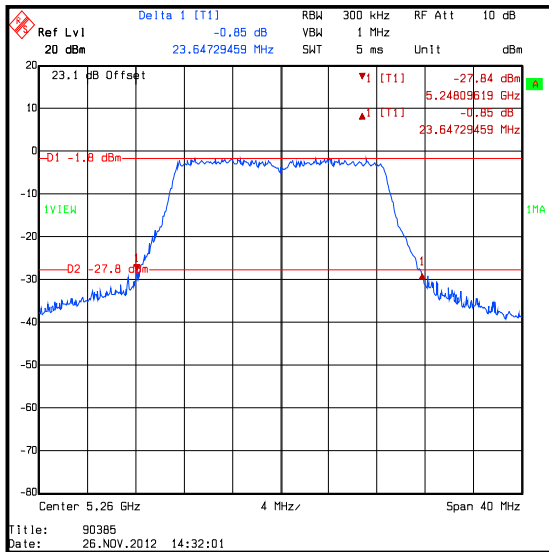

Bottom Channel

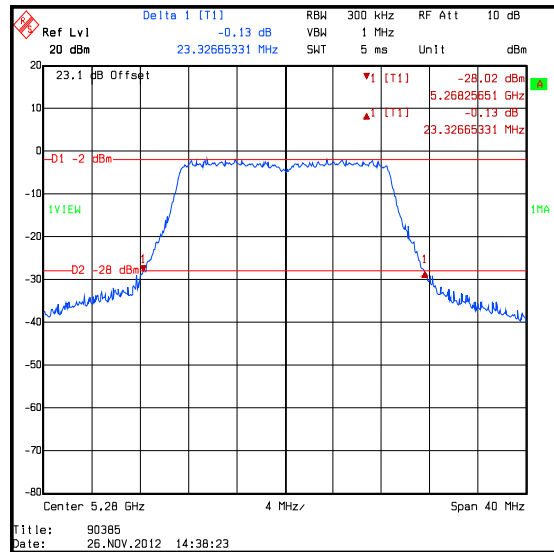

Middle Channel

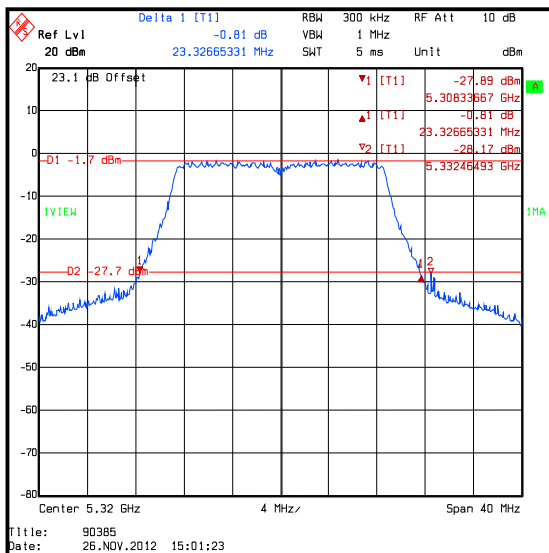


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 20 MHz / 5.47-5.725 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5500	BPSK	6.5 / MCS0	23.166
Middle	5580	BPSK	6.5 / MCS0	23.407
Top	5700	BPSK	6.5 / MCS0	26.854

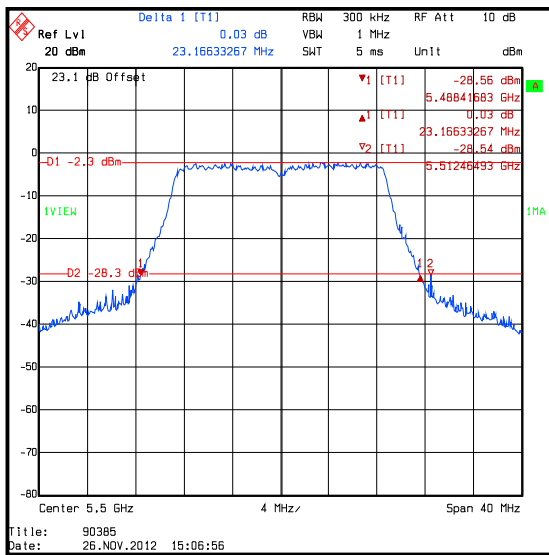

Bottom Channel

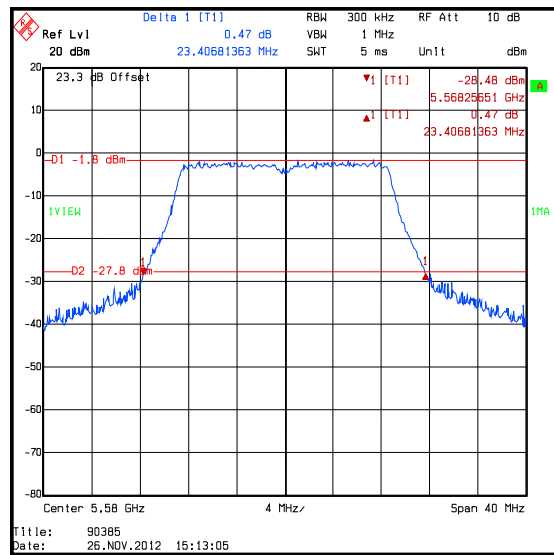

Middle Channel

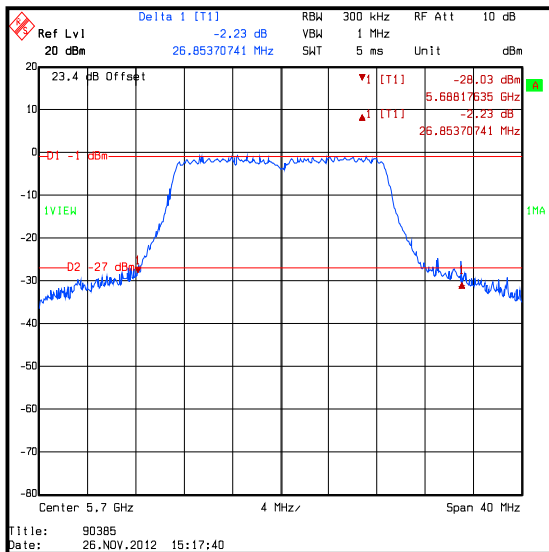


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 40 MHz / 5.15-5.25 GHz band

Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5190	BPSK	13.5 / MCS0	45.251
Top	5230	BPSK	13.5 / MCS0	45.050

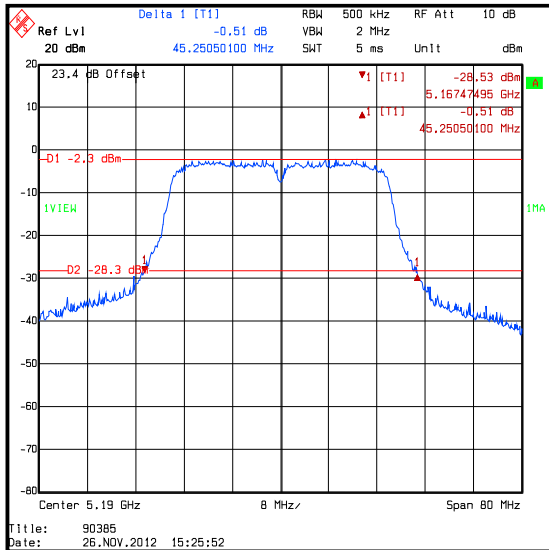

Bottom Channel

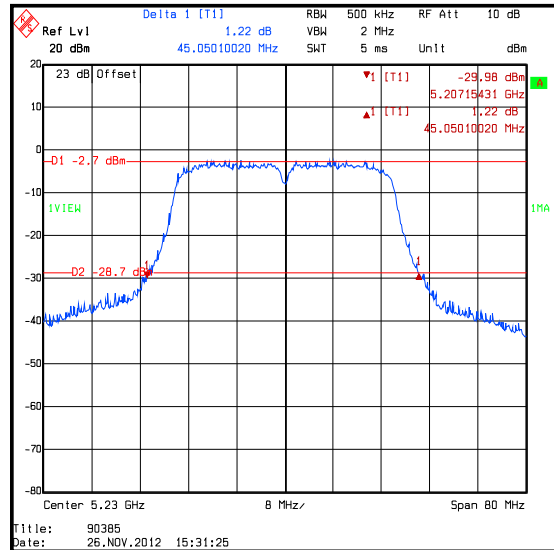


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 40 MHz / 5.25-5.35 GHz band

Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5270	BPSK	13.5 / MCS0	44.970
Top	5310	BPSK	13.5 / MCS0	45.691

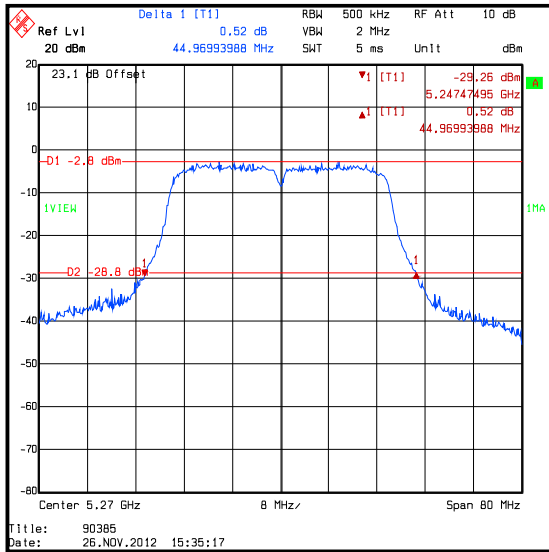

Bottom Channel

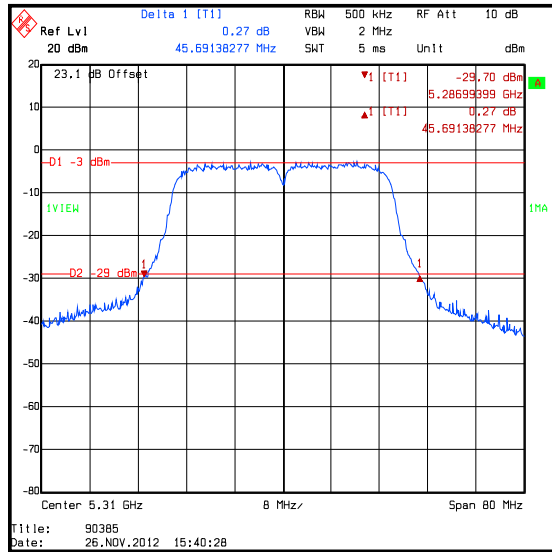


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 40 MHz / 5.47-5.725 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5510	BPSK	13.5 / MCS0	45.210
Middle	5590	BPSK	13.5 / MCS0	44.729
Top	5670	BPSK	13.5 / MCS0	45.691

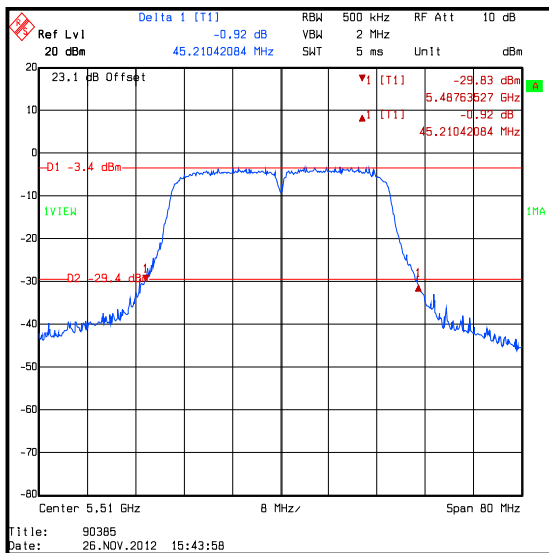

Bottom Channel

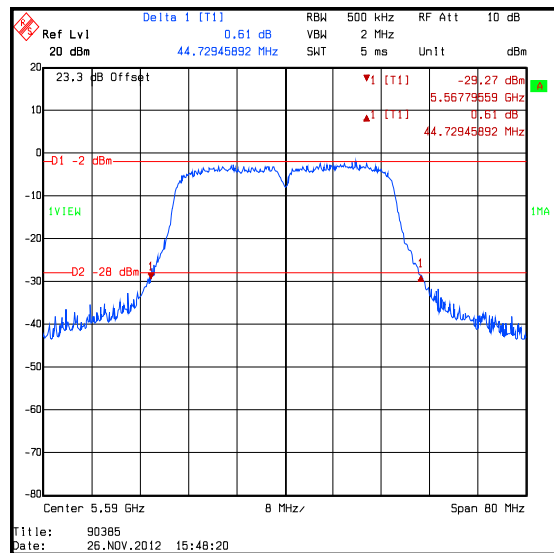

Middle Channel

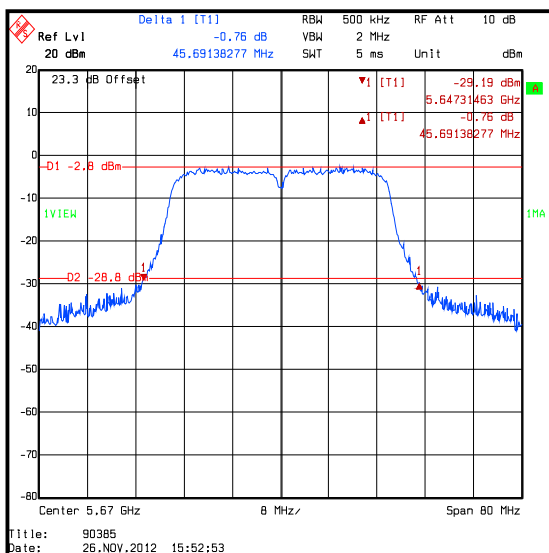


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11a / 20 MHz / 5.15-5.25 GHz band (Reference plots)


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps	26 dB Emission Bandwidth (MHz)
Bottom	5180	64QAM	54	22.124
Middle	5200	64QAM	54	22.445
Top	5240	64QAM	54	22.285

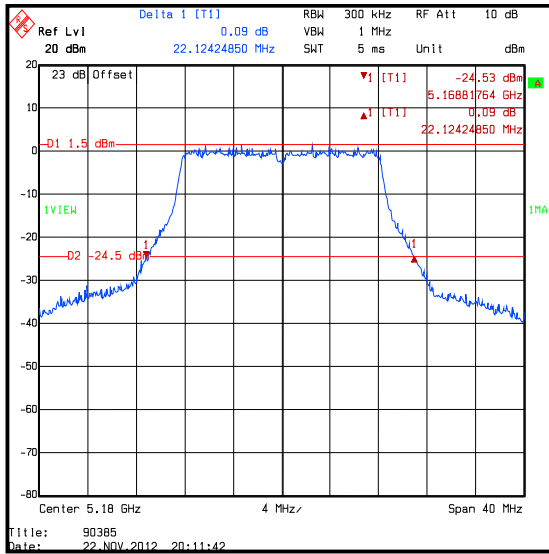

Bottom Channel

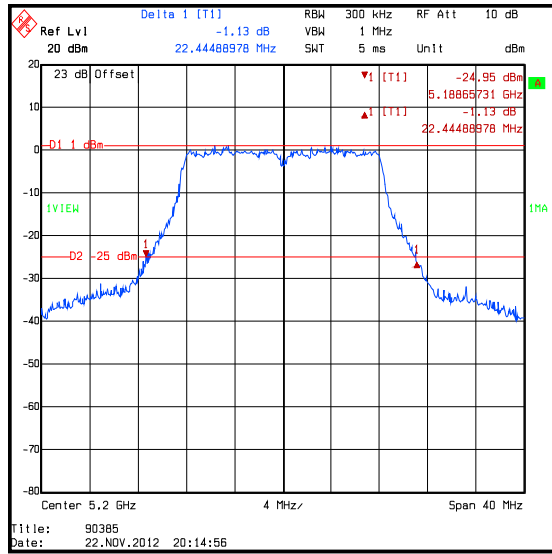

Middle Channel

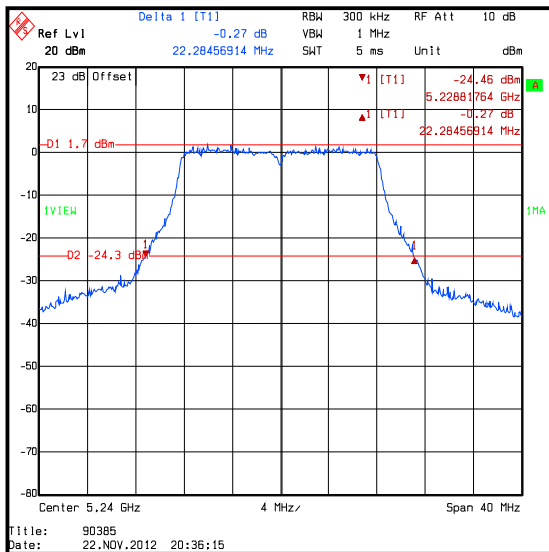


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11a / 20 MHz / 5.25-5.35 GHz band (Reference plots)


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps	26 dB Emission Bandwidth (MHz)
Bottom	5260	64QAM	54	22.285
Middle	5280	64QAM	54	22.445
Top	5320	64QAM	54	22.365

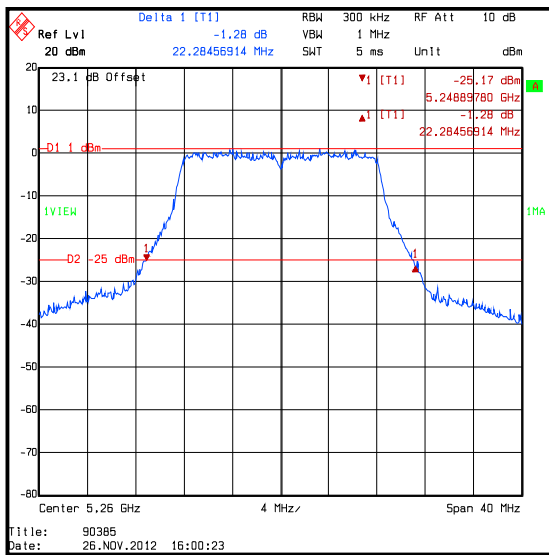

Bottom Channel

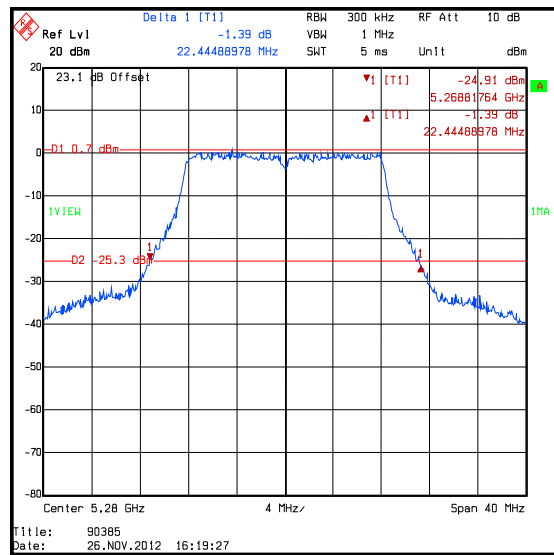

Middle Channel

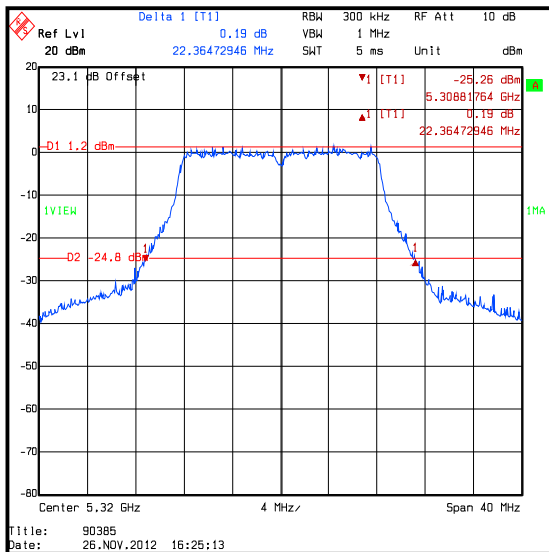


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11a / 20 MHz / 5.47-5.725 GHz band (Reference plots)


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps	26 dB Emission Bandwidth (MHz)
Bottom	5500	64QAM	54	22.124
Middle	5580	64QAM	54	22.204
Top	5700	64QAM	54	23.246

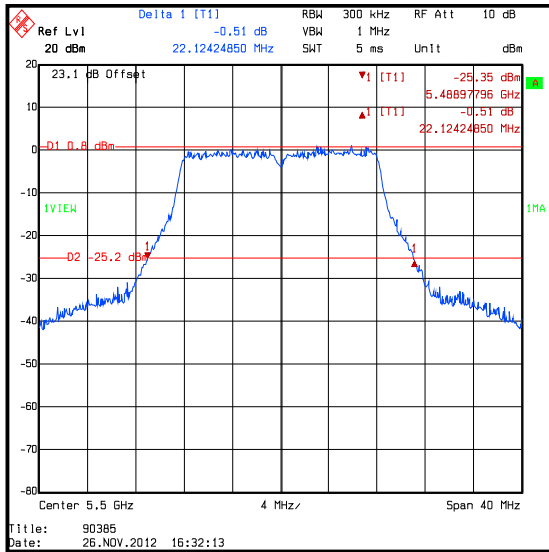

Bottom Channel

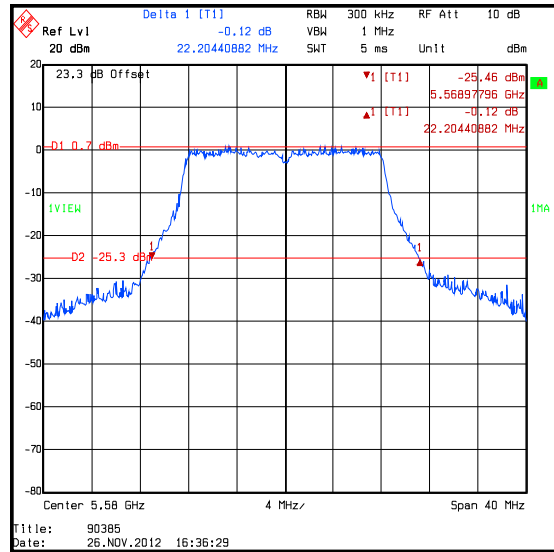

Middle Channel

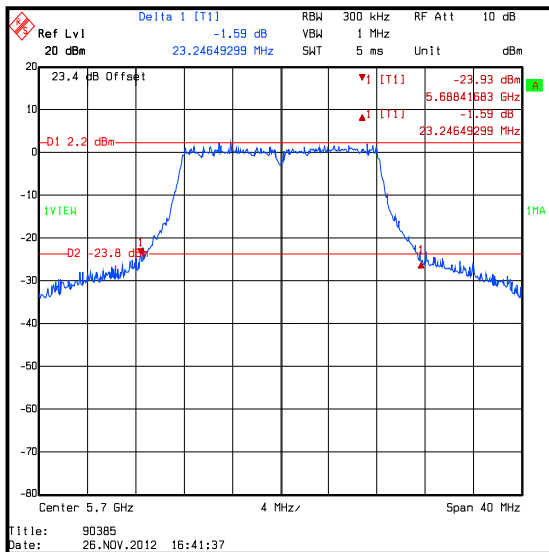


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 20 MHz / 5.15-5.25 GHz band (Reference plots)


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5180	64QAM	65 / MCS7	22.846
Middle	5200	64QAM	65 / MCS7	22.525
Top	5240	64QAM	65 / MCS7	22.766

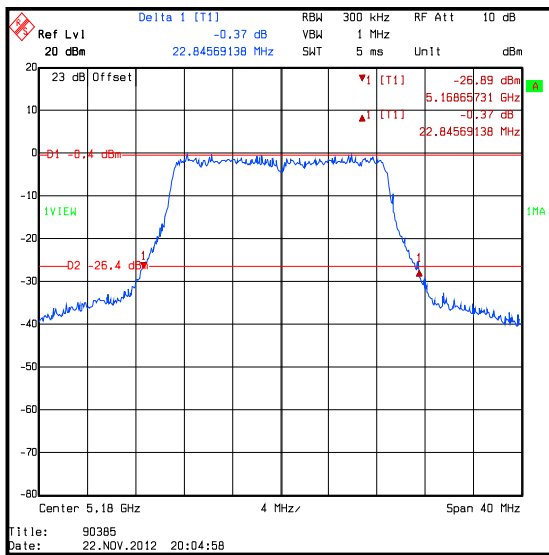

Bottom Channel

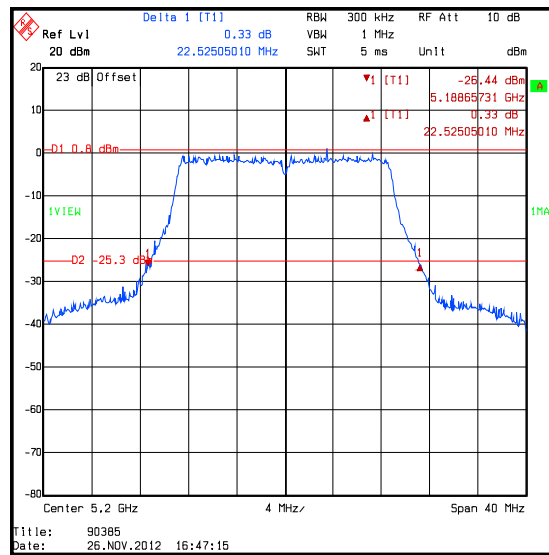

Middle Channel

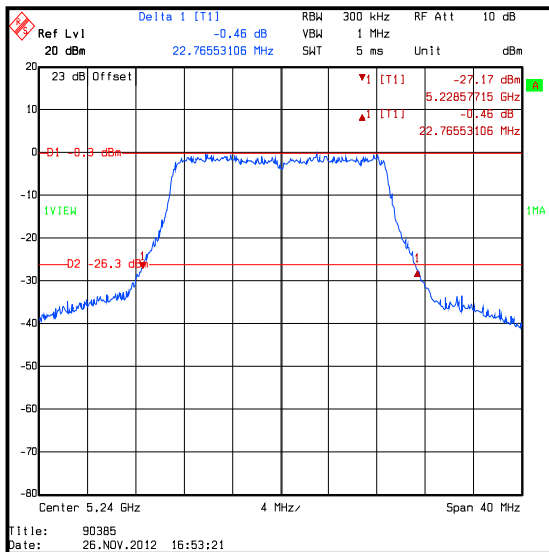


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 20 MHz / 5.25-5.35 GHz band (Reference plots)


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5260	64QAM	65 / MCS7	22.645
Middle	5280	64QAM	65 / MCS7	23.006
Top	5320	64QAM	65 / MCS7	22.766

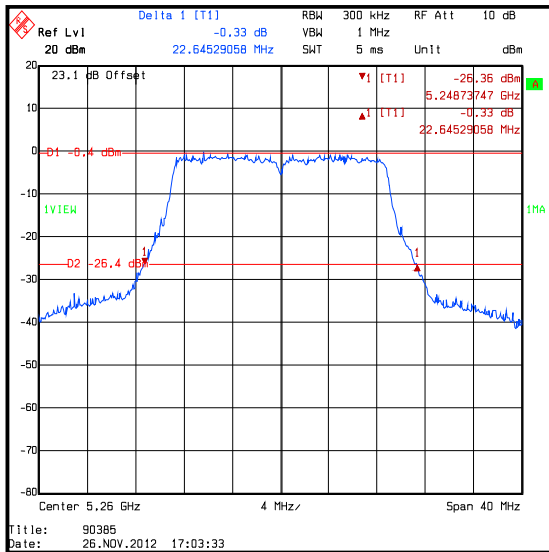

Bottom Channel

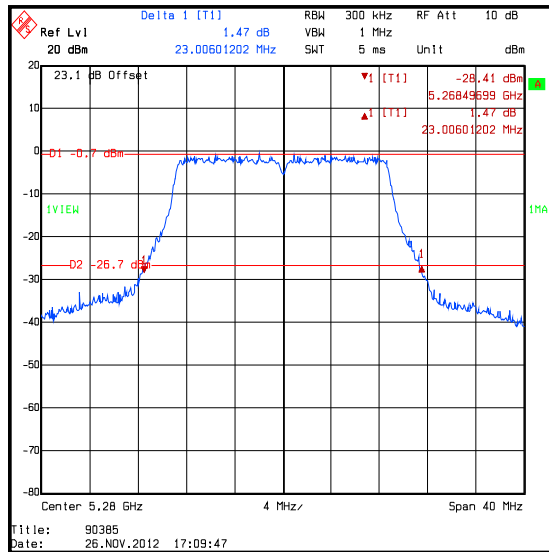

Middle Channel

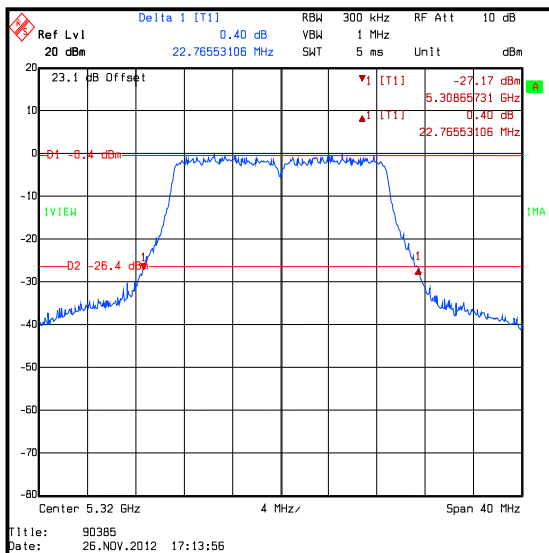


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 20 MHz / 5.47-5.725 GHz band (Reference plots)


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5500	64QAM	65 / MCS7	22.685
Middle	5580	64QAM	65 / MCS7	22.605
Top	5700	64QAM	65 / MCS7	23.166

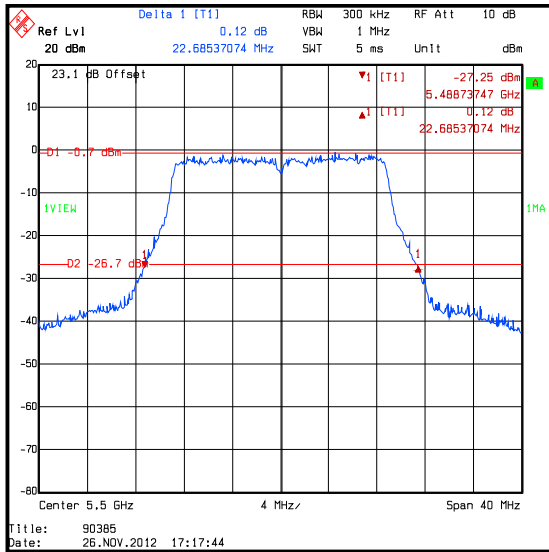

Bottom Channel

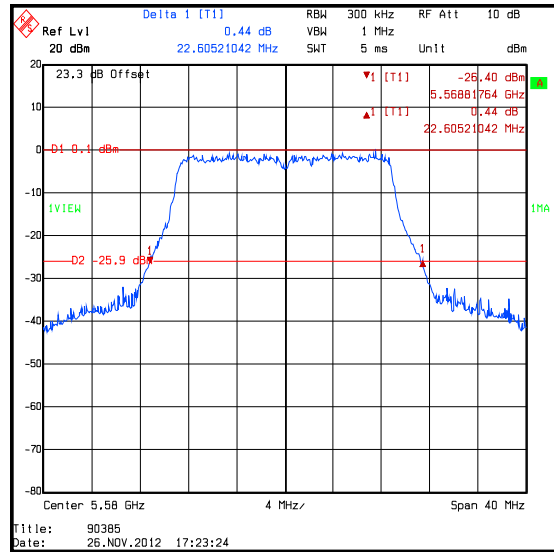

Middle Channel

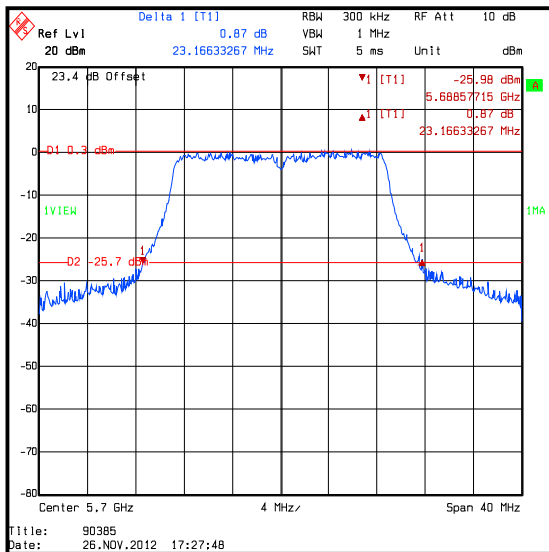


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 40 MHz / 5.15-5.25 GHz band (Reference plots)

Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5190	64QAM	135 / MCS7	43.327
Top	5230	64QAM	135 / MCS7	43.407

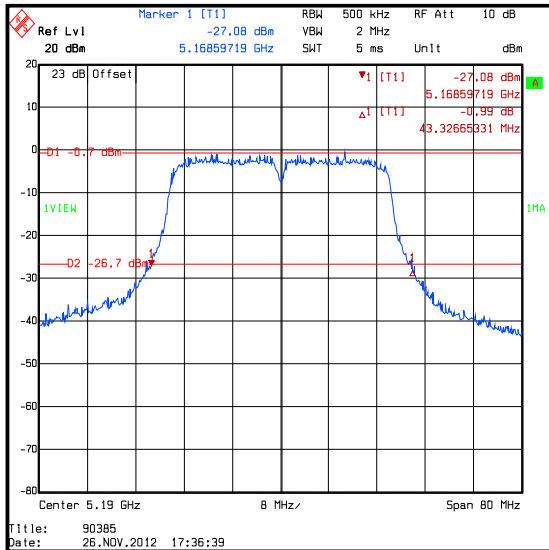

Bottom Channel

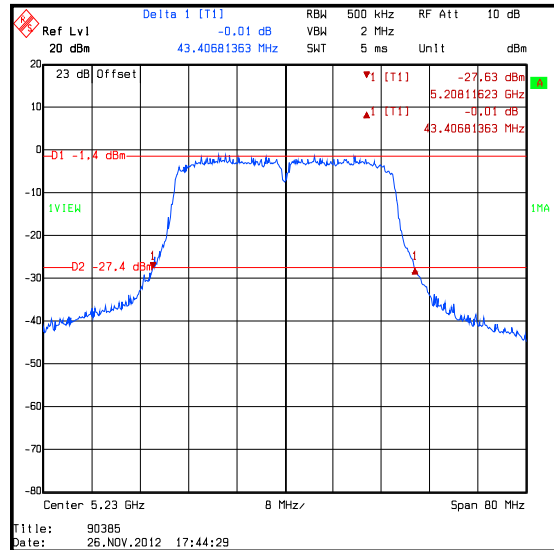


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 40 MHz / 5.25-5.35 GHz band (Reference plots)

Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5270	64QAM	135 / MCS7	44.569
Top	5310	64QAM	135 / MCS7	43.848

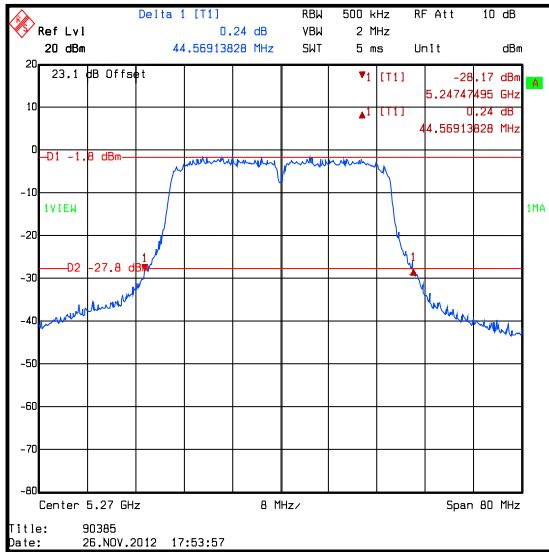

Bottom Channel

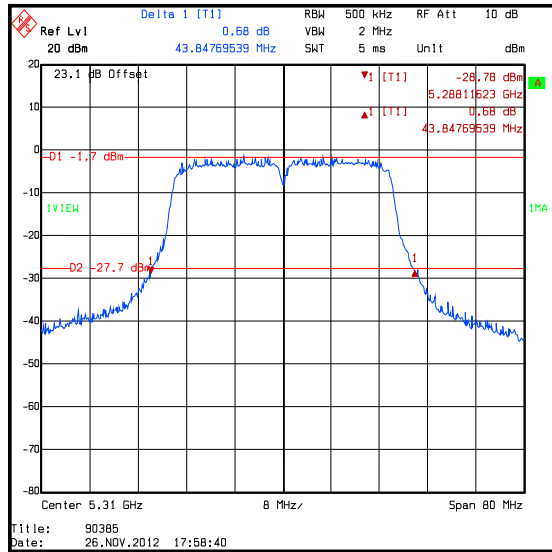


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 40 MHz / 5.47-5.725 GHz band (Reference plots)


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5510	64QAM	135 / MCS7	43.607
Middle	5590	64QAM	135 / MCS7	43.928
Top	5670	64QAM	135 / MCS7	43.447

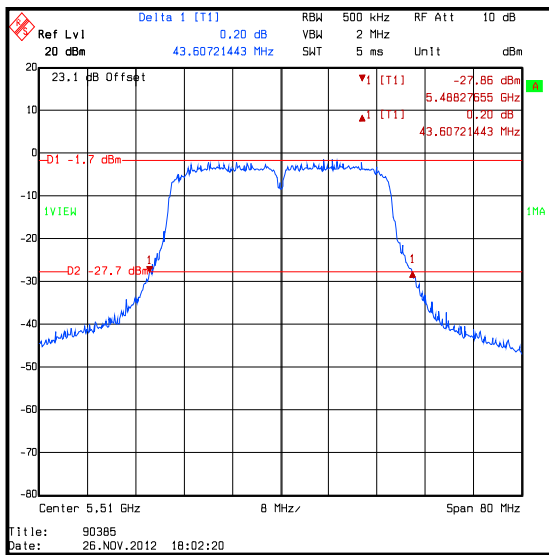

Bottom Channel

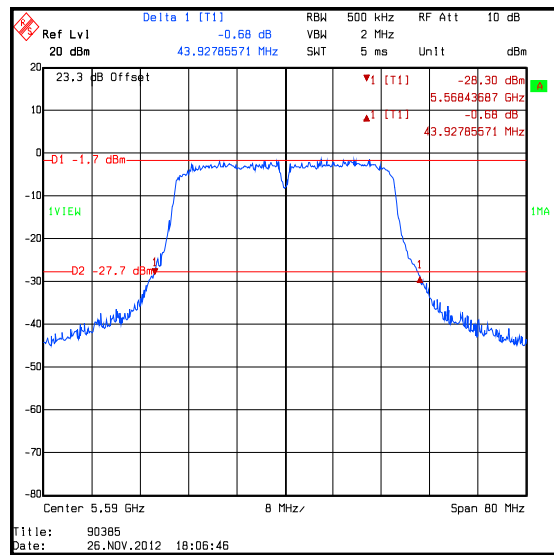

Middle Channel

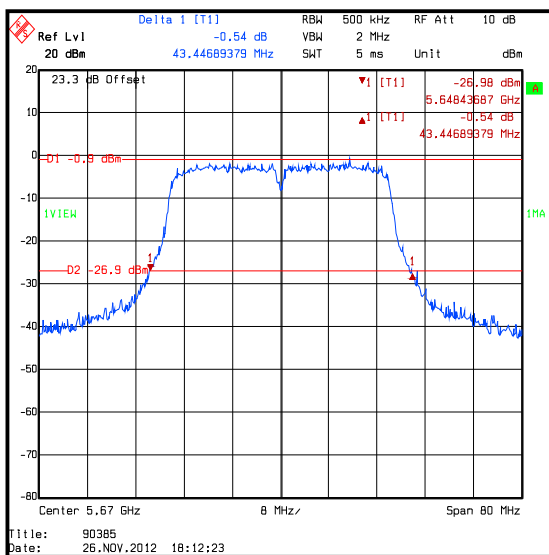

Top Channel

Transmitter 26 dB Emission Bandwidth (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A2142	Attenuator	Atlan TecRF	AN18-20	081120-23	25 May 2013	12
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	13 Aug 2013	12

5.2.5. Transmitter Duty Cycle**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	22 November 2012
Test Sample IMEI:	353740050012164		

FCC Reference:	Part 15.35(c)
Test Method Used:	FCC KDB 789033 Section B)

Environmental Conditions:

Temperature (°C):	26
Relative Humidity (%):	33

Note(s):

- In order to assist with the determination of the average level of fundamental and spurious emissions field strength, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter. The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:

$$10 \log (1 / (\text{On Time} / [\text{Period or } 100\text{mS whichever is the lesser}]))$$

$$802.11a / 9 \text{ Mbps duty cycle: } 10 \log (1 / (0.923/1.111)) = 0.8$$

$$802.11a / 54 \text{ Mbps duty cycle: } 10 \log (1 / (0.178/0.369)) = 3.2$$

$$802.11n \text{ HT20} / \text{MCS0 duty cycle: } 10 \log (1 / (1.280/1.460)) = 0.6$$

$$802.11n \text{ HT20} / \text{MCS7 duty cycle: } 10 \log (1 / (0.152/0.341)) = 3.5$$

$$802.11n \text{ HT40} / \text{MCS0 duty cycle: } 10 \log (1 / (0.629/0.721)) = 0.6$$


$$802.11n \text{ HT40} / \text{MCS7 duty cycle: } 10 \log (1 / (0.084/0.182)) = 3.4$$

Transmitter Duty Cycle (continued)


Results: 802.11a / 20 MHz / 9 Mbps

Pulse Duration (mS)	Duty Cycle (dB)
0.923	0.8


Period (mS)
1.111

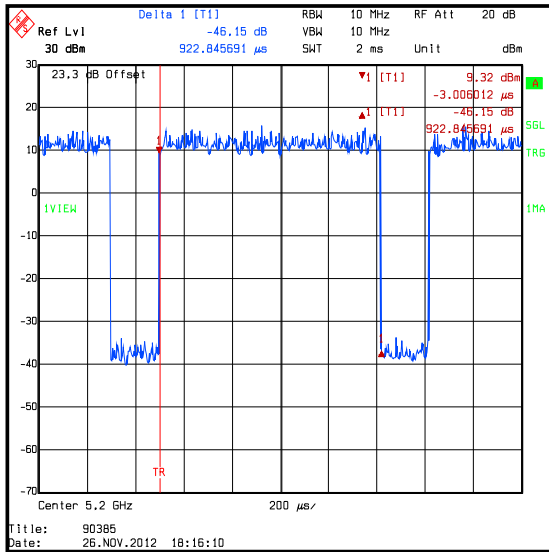

TX on time

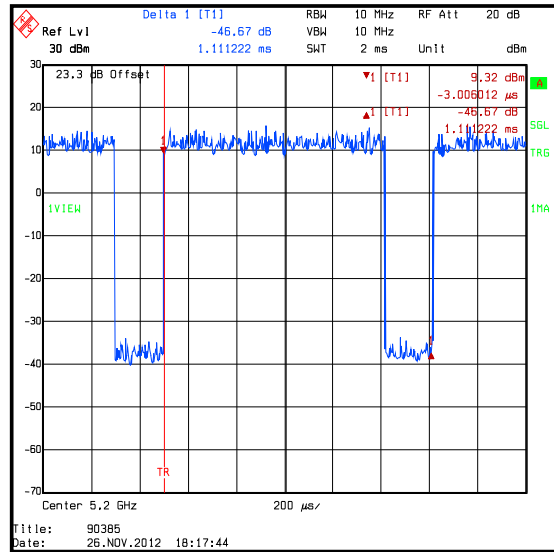

TX on + off time / period

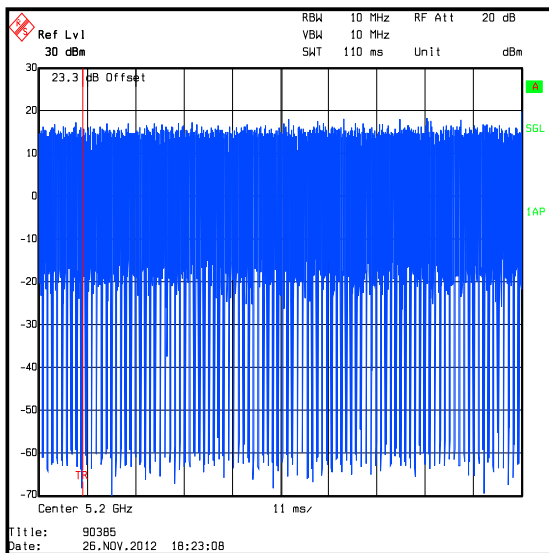


100 ms

Transmitter Duty Cycle (continued)


Results: 802.11a / 20 MHz / 54 Mbps

Pulse Duration (mS)	Duty Cycle (dB)
0.178	3.2


Period (mS)
0.369

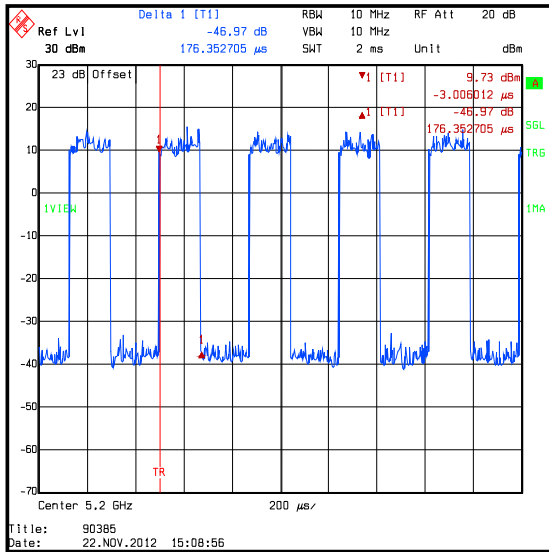

TX on time

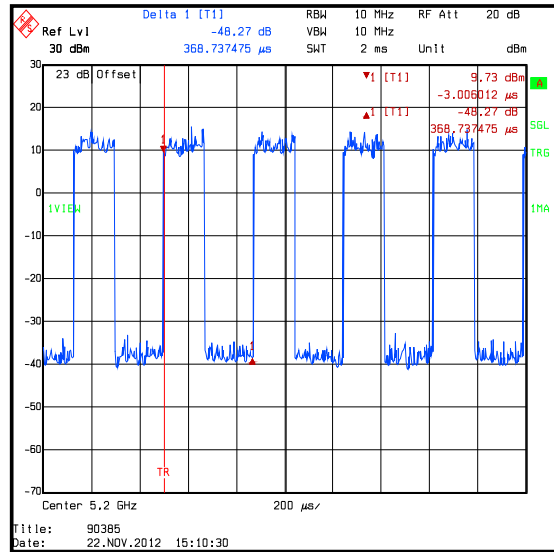

TX on + off time/ period

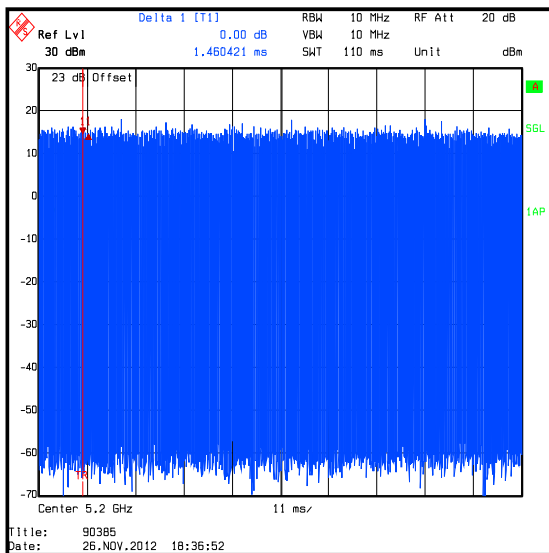


100 ms

Transmitter Duty Cycle (continued)


Results: 802.11n / 20 MHz / 6.5 Mbps / MCS0

Pulse Duration (mS)	Duty Cycle (dB)
1.280	0.6


Period (mS)
1.460

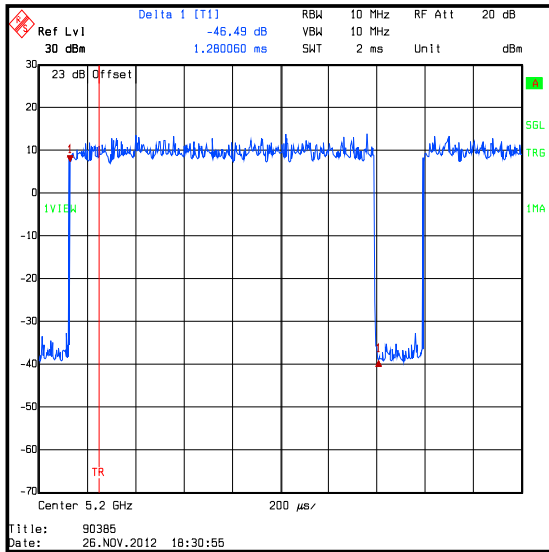

TX on time

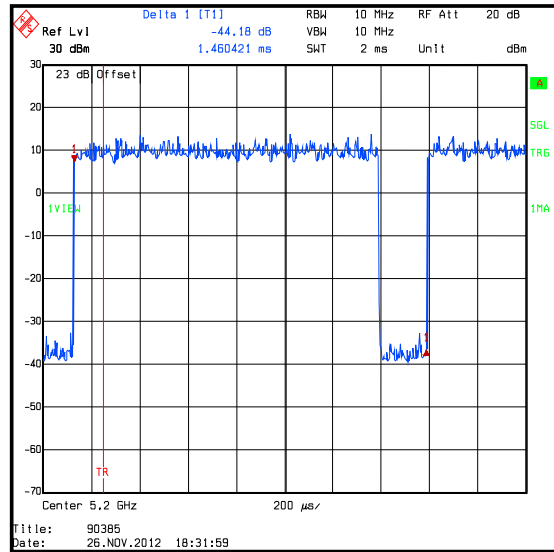

TX on + off time/ period

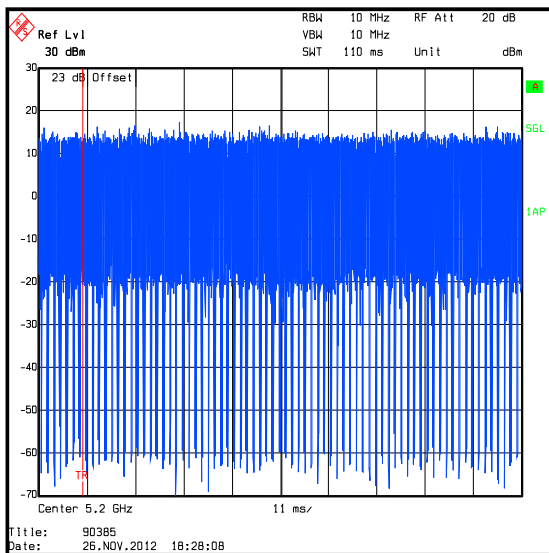


100 ms

Transmitter Duty Cycle (continued)


Results: 802.11n / 20 MHz / 65 Mbps / MCS7

Pulse Duration (mS)	Duty Cycle (dB)
0.152	3.5


Period (mS)
0.341

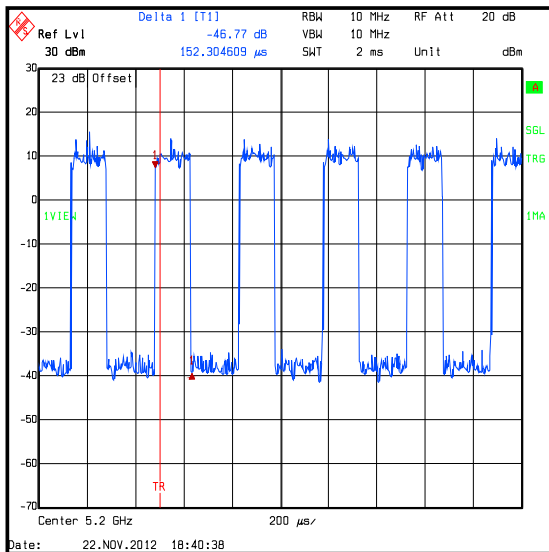

TX on

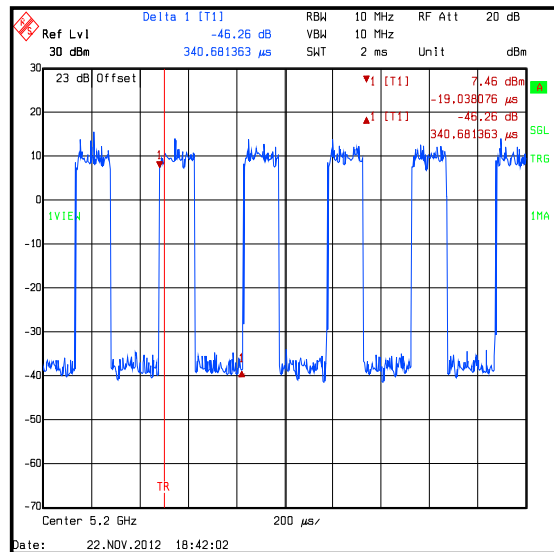

TX on + off time/ period

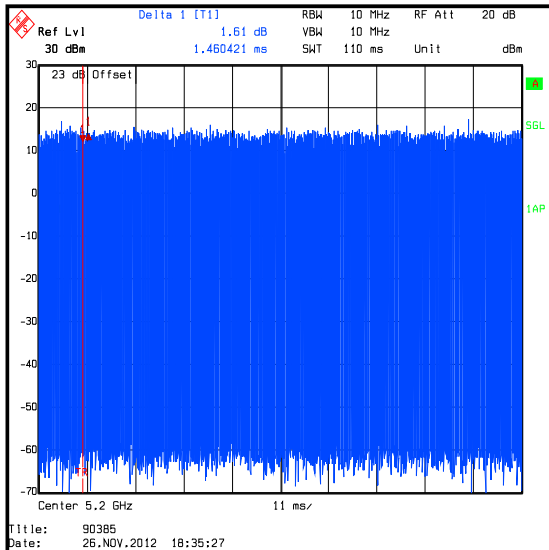


100 ms

Transmitter Duty Cycle (continued)


Results: 802.11n / 40 MHz / 13.5 Mbps / MCS0

Pulse Duration (mS)	Duty Cycle (dB)
0.629	0.6


Period (mS)
0.721

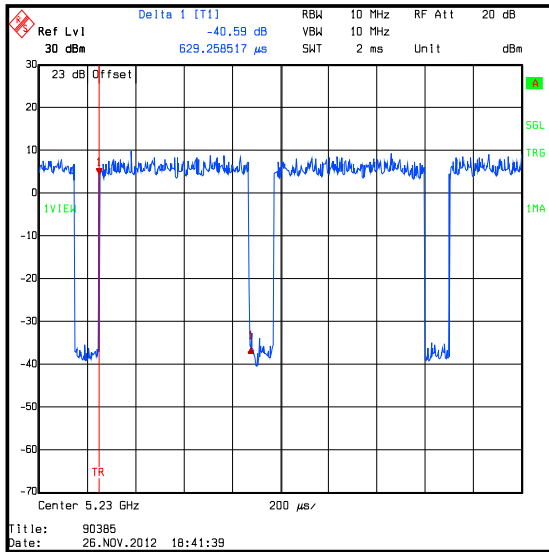

TX on time

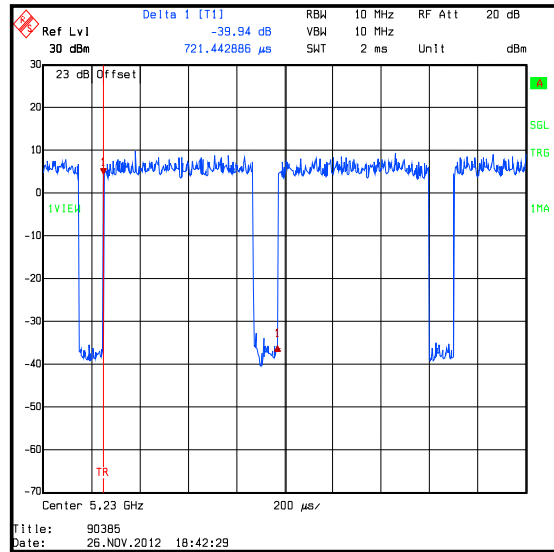

TX on + off time/ period

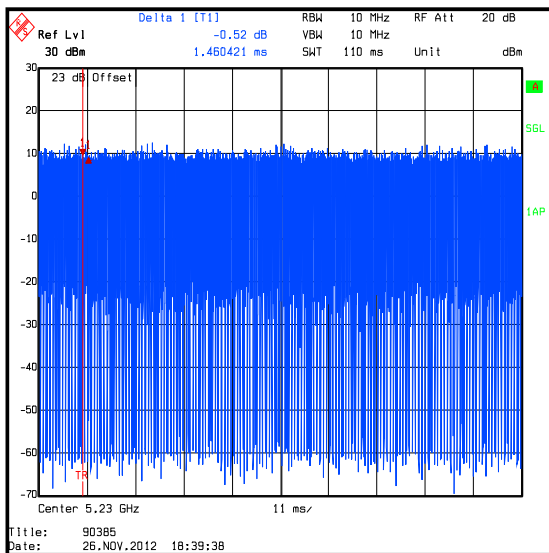


100 ms

Transmitter Duty Cycle (continued)


Results: 802.11n / 40 MHz / 135 Mbps / MCS7

Pulse Duration (µS)	Duty Cycle (dB)
0.084	3.4


Period (µS)
0.182

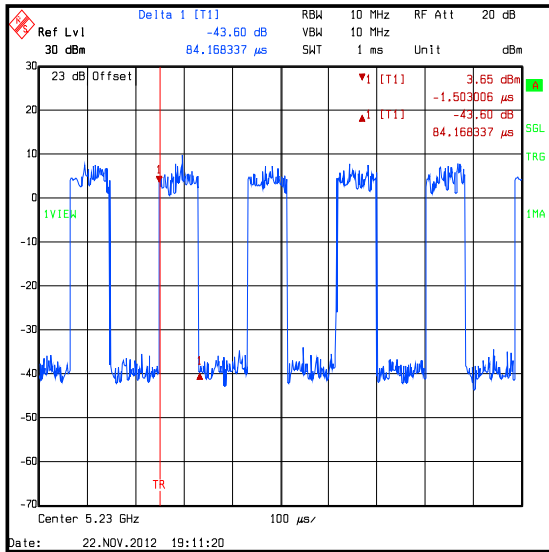

TX on

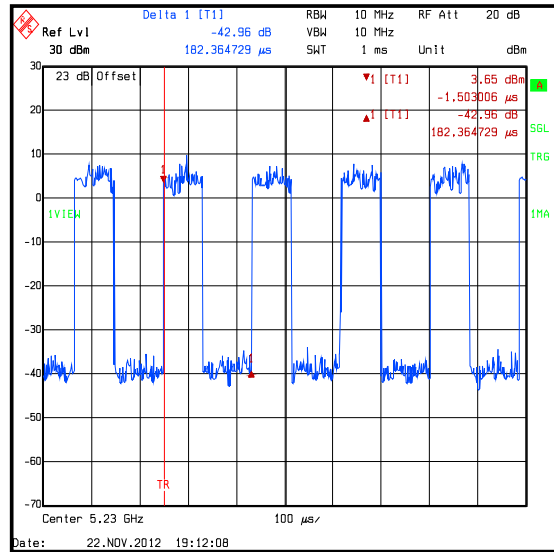

TX on + off time/ period

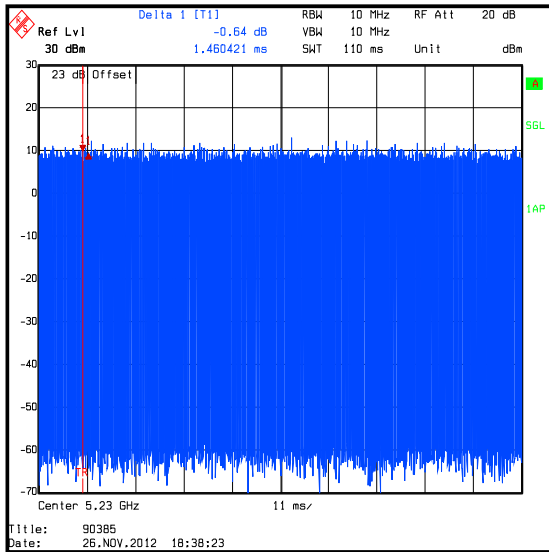

100 ms

Transmitter Duty Cycle (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A2142	Attenuator	Atlan TecRF	AN18-20	081120-23	25 May 2013	12
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	13 Aug 2013	12
M1267	Signal Generator	Rohde & Schwarz	SMP02	829076/008	14 Jun 2013	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	07 Jun 2013	12
M1267	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	07 Jun 2013	12

5.2.6. Transmitter Maximum Conducted Output Power**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	22 November 2012
Test Sample IMEI:	353740050012164		

FCC Reference:	Part 15.407(a)(1)
Test Method Used:	FCC KDB 789033 D01 Section C)3)e)

Environmental Conditions:

Temperature (°C):	26
Relative Humidity (%):	33

Note(s):

- All conducted power tests were performed using a test receiver in accordance with FCC KDB 789033 D01 C)3)e) Method SA-2 Alternative.
- All supported modes and channel widths were initially investigated on one channel. The modes that produced the highest power (e.g. worst case) were:
 - 802.11a – 64QAM / 54 Mbps
 - 802.11n HT20 – 64QAM / 65 Mbps / MCS7
 - 802.11n HT40 – 64QAM / 135 Mbps / MCS7
- The EUT was transmitting at <98% duty cycle. The calculated duty cycle in section 5.2.5 was added to the measured power in order to compute the average power during the actual transmission time.
- The EUT antenna has a gain of <6 dBi.
- The Part 15.407(a)(1) limit is the lesser of 50 mW (17.0 dBm) or $4 \text{ dBm} + 10 \log_{10} B$, where B is the previously measured 26 dB emission bandwidth in MHz. The limit for each channel was calculated as below:


$$\begin{aligned}
 &802.11a \text{ 20 MHz channel width / Bottom channel} = 4 \text{ dBm} + 10 \log_{10} 22.1 = 17.4 \text{ dBm} \\
 &802.11a \text{ 20 MHz channel width / Middle channel} = 4 \text{ dBm} + 10 \log_{10} 22.4 = 17.5 \text{ dBm} \\
 &802.11a \text{ 20 MHz channel width / Top channel} = 4 \text{ dBm} + 10 \log_{10} 22.3 = 17.5 \text{ dBm} \\
 &802.11n \text{ 20 MHz channel width / Bottom channel} = 4 \text{ dBm} + 10 \log_{10} 22.8 = 17.6 \text{ dBm} \\
 &802.11n \text{ 20 MHz channel width / Middle channel} = 4 \text{ dBm} + 10 \log_{10} 22.5 = 17.5 \text{ dBm} \\
 &802.11n \text{ 20 MHz channel width / Top channel} = 4 \text{ dBm} + 10 \log_{10} 22.8 = 17.6 \text{ dBm} \\
 &802.11n \text{ 40 MHz channel width / Bottom channel} = 4 \text{ dBm} + 10 \log_{10} 43.3 = 20.4 \text{ dBm} \\
 &802.11n \text{ 40 MHz channel width / Top channel} = 4 \text{ dBm} + 10 \log_{10} 43.4 = 20.4 \text{ dBm}
 \end{aligned}$$

Therefore the lesser of the two limits is the fixed limit of 50 mW (17 dBm). This was applied to the results.


Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (Continued)

Results: 802.11a / 20 MHz / 64QAM / 54 Mbps


Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5180	4.5	3.2	7.7	17.0	9.3	Complied
Middle	5200	4.3	3.2	7.5	17.0	9.5	Complied
Top	5240	4.3	3.2	7.5	17.0	9.5	Complied

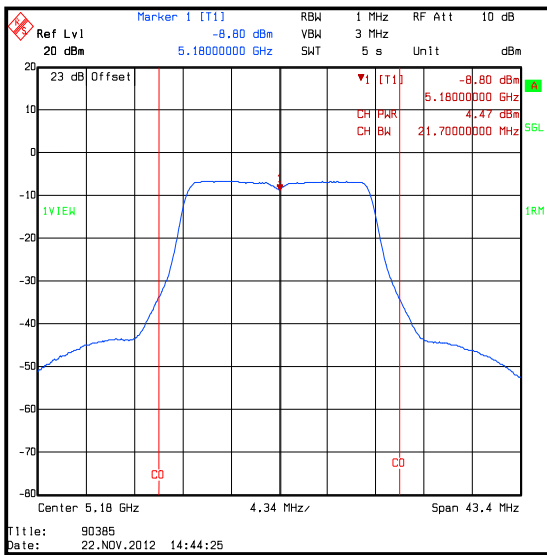

Bottom Channel

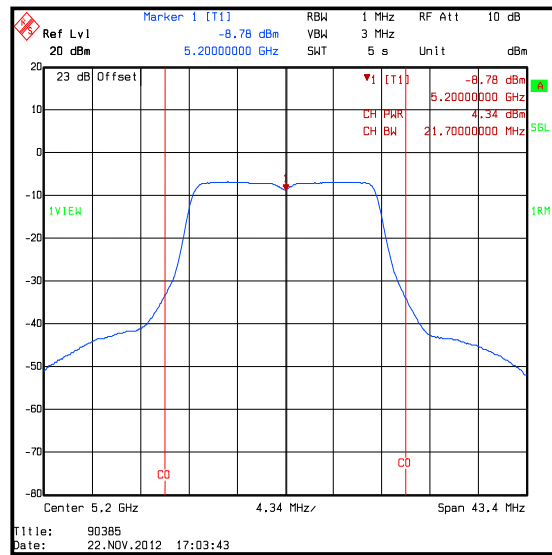

Middle Channel

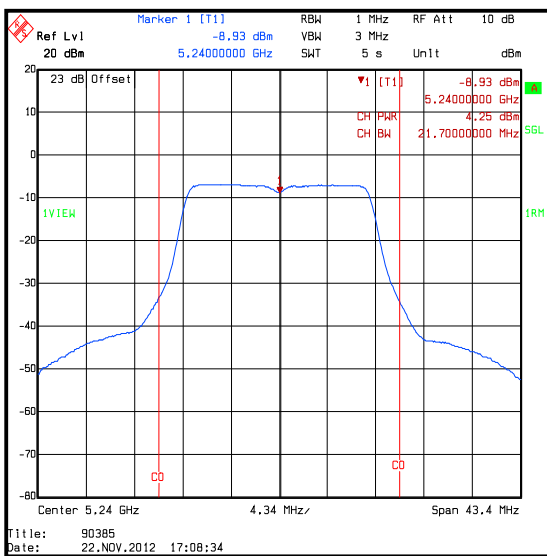


Top Channel


Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (Continued)

Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7


Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5180	3.0	3.5	6.5	17.0	10.5	Complied
Middle	5200	3.0	3.5	6.5	17.0	10.5	Complied
Top	5240	2.9	3.5	6.4	17.0	10.6	Complied

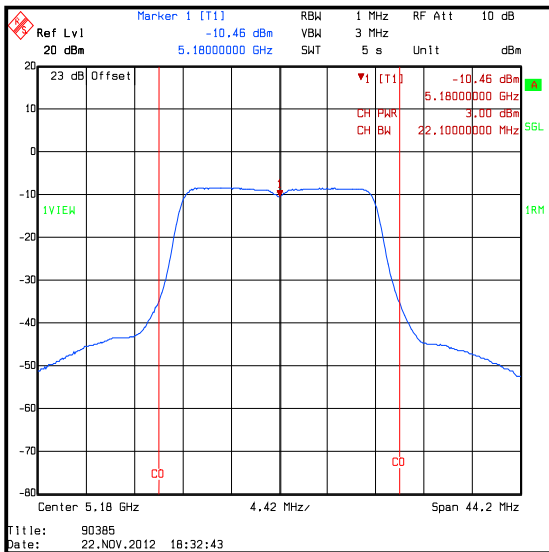

Bottom Channel

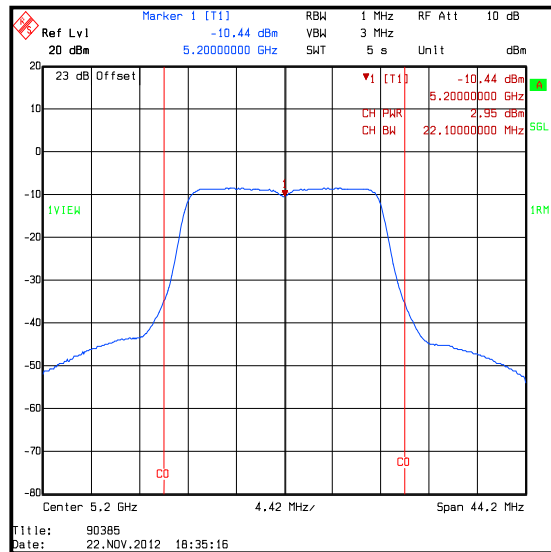

Middle Channel

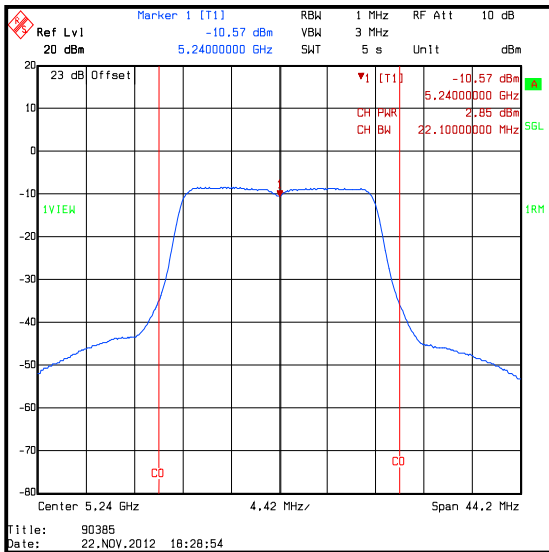


Top Channel


Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band) (Continued)

Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7

Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5190	2.4	3.4	5.8	17.0	11.2	Complied
Top	5230	2.2	3.4	5.6	17.0	11.4	Complied

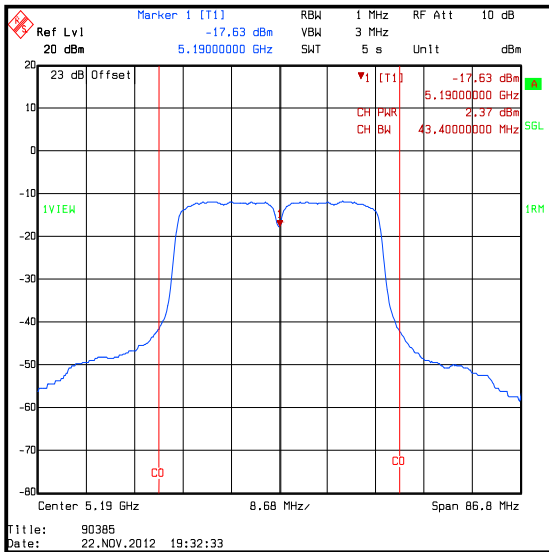

Bottom Channel

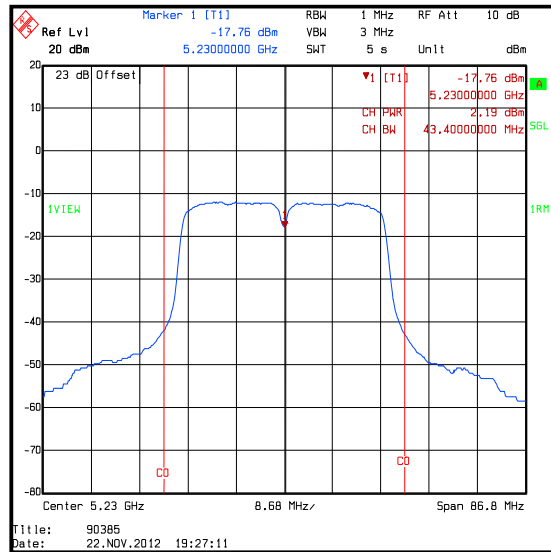

Top Channel

Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands) **(continued)**

Test Summary:

Test Engineer:	Andrew Edwards	Test Date:	22 November 2012
Test Sample IMEI:	353740050012164		

FCC Reference:	Part 15.407(a)(2)
Test Method Used:	FCC KDB 789033 D01 Section C)3)e)

Environmental Conditions:

Temperature (°C):	26
Relative Humidity (%):	33

Note(s):

- The FCC Part 15.407(a)(2) limit is the lesser of 250 mW (24.0 dBm) or $11 \text{ dBm} + 10 \log_{10} B$, where B is the previously measured 26 dB emission bandwidth in MHz. The limit for each channel was calculated as below:

5.25-5.35 GHz band

802.11a 20 MHz channel width / Bottom channel = $11 \text{ dBm} + 10 \log_{10} 22.3 = 24.5 \text{ dBm}$
 802.11a 20 MHz channel width / Middle channel = $11 \text{ dBm} + 10 \log_{10} 22.4 = 24.5 \text{ dBm}$
 802.11a 20 MHz channel width / Top channel = $11 \text{ dBm} + 10 \log_{10} 22.4 = 24.5 \text{ dBm}$
 802.11n 20 MHz channel width / Bottom channel = $11 \text{ dBm} + 10 \log_{10} 22.6 = 24.5 \text{ dBm}$
 802.11n 20 MHz channel width / Middle channel = $11 \text{ dBm} + 10 \log_{10} 23.0 = 24.6 \text{ dBm}$
 802.11n 20 MHz channel width / Top channel = $11 \text{ dBm} + 10 \log_{10} 22.8 = 24.6 \text{ dBm}$
 802.11n 40 MHz channel width / Bottom channel = $11 \text{ dBm} + 10 \log_{10} 44.6 = 27.5 \text{ dBm}$
 802.11n 40 MHz channel width / Top channel = $11 \text{ dBm} + 10 \log_{10} 43.8 = 27.4 \text{ dBm}$

5.47-5.725 GHz band


802.11a 20 MHz channel width / Bottom channel = $11 \text{ dBm} + 10 \log_{10} 22.1 = 24.4 \text{ dBm}$
 802.11a 20 MHz channel width / Middle channel = $11 \text{ dBm} + 10 \log_{10} 22.2 = 24.5 \text{ dBm}$
 802.11a 20 MHz channel width / Top channel = $11 \text{ dBm} + 10 \log_{10} 23.2 = 24.7 \text{ dBm}$
 802.11n 20 MHz channel width / Bottom channel = $11 \text{ dBm} + 10 \log_{10} 22.7 = 24.6 \text{ dBm}$
 802.11n 20 MHz channel width / Middle channel = $11 \text{ dBm} + 10 \log_{10} 22.6 = 24.5 \text{ dBm}$
 802.11n 20 MHz channel width / Top channel = $11 \text{ dBm} + 10 \log_{10} 23.2 = 24.7 \text{ dBm}$
 802.11n 40 MHz channel width / Bottom channel = $11 \text{ dBm} + 10 \log_{10} 43.6 = 27.4 \text{ dBm}$
 802.11n 40 MHz channel width / Middle channel = $11 \text{ dBm} + 10 \log_{10} 43.9 = 27.4 \text{ dBm}$
 802.11n 40 MHz channel width / Top channel = $11 \text{ dBm} + 10 \log_{10} 43.4 = 27.4 \text{ dBm}$

The lesser of the two limits is the fixed limit of 250 mW (24.0 dBm). This was applied to the results.


**Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11a / 20 MHz / 64QAM / 54 Mbps / 5.25-5.35 GHz band


Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5260	3.9	3.2	7.1	24.0	16.9	Complied
Middle	5280	3.7	3.2	6.9	24.0	17.1	Complied
Top	5320	4.1	3.2	7.3	24.0	16.7	Complied

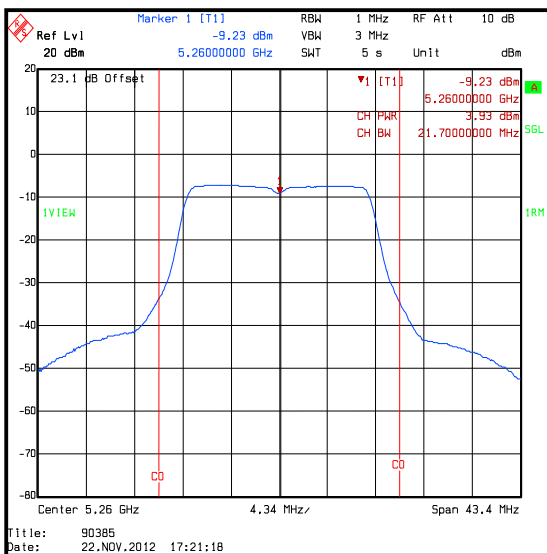

Bottom Channel

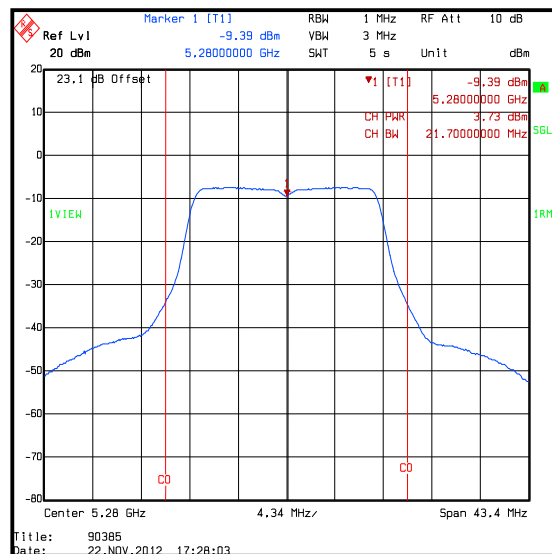

Middle Channel

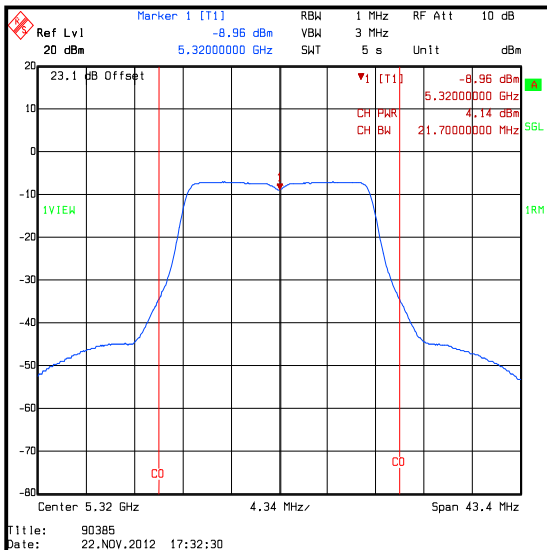


Top Channel


**Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7 / 5.25-5.35 GHz band


Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5260	2.6	3.5	6.1	24.0	17.9	Complied
Middle	5280	2.4	3.5	5.9	24.0	18.1	Complied
Top	5320	2.7	3.5	6.2	24.0	17.8	Complied

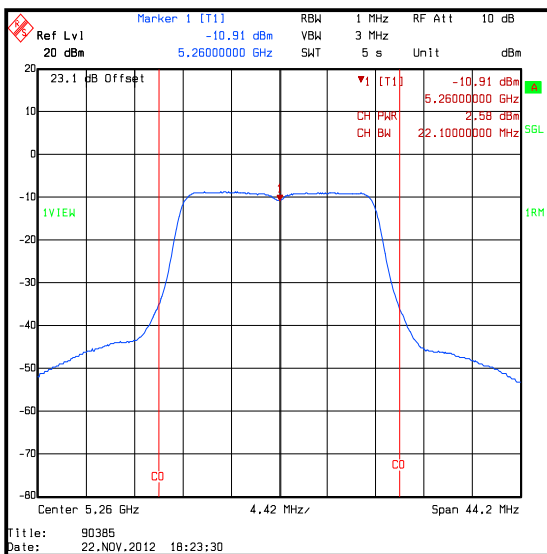

Bottom Channel

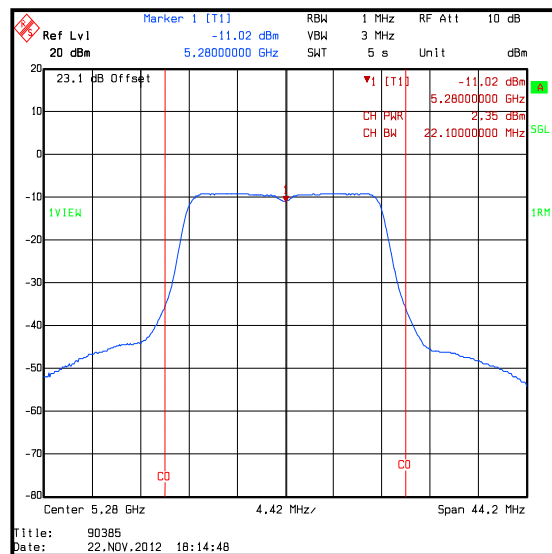

Middle Channel

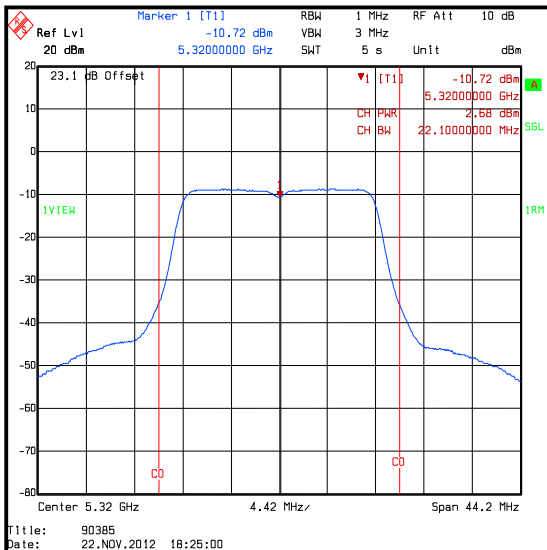


Top Channel


**Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7 / 5.25-5.35 GHz band

Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5270	1.8	3.4	5.2	24.0	18.8	Complied
Top	5310	2.0	3.4	5.4	24.0	18.6	Complied

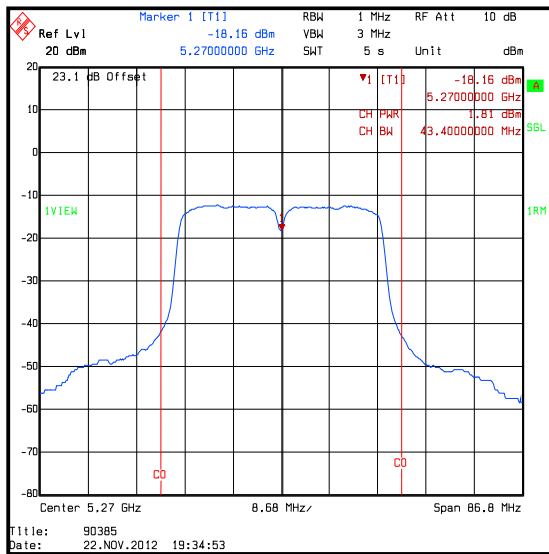

Bottom Channel

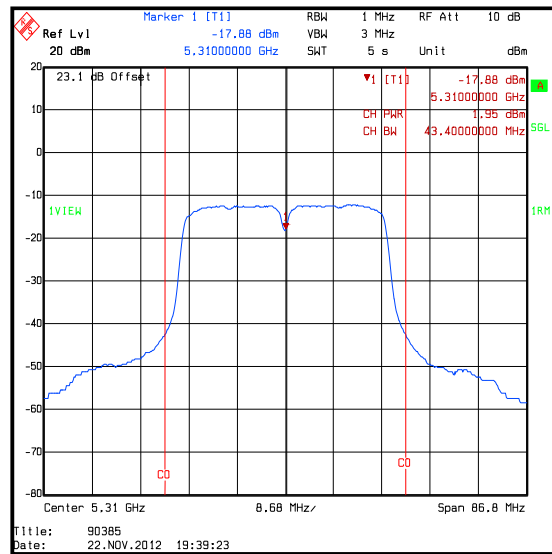


Top Channel


**Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11a / 20 MHz / 64QAM / 54 Mbps / 5.47-5.725 GHz band


Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5500	3.6	3.2	6.8	24.0	17.2	Complied
Middle	5580	4.0	3.2	7.2	24.0	16.8	Complied
Top	5700	4.8	3.2	8.0	24.0	16.0	Complied

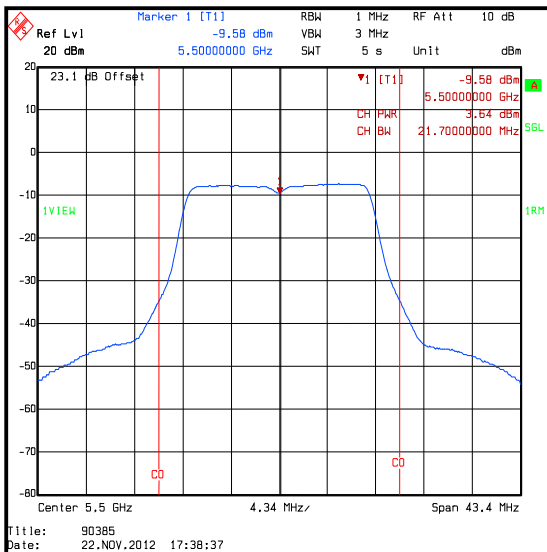

Bottom Channel

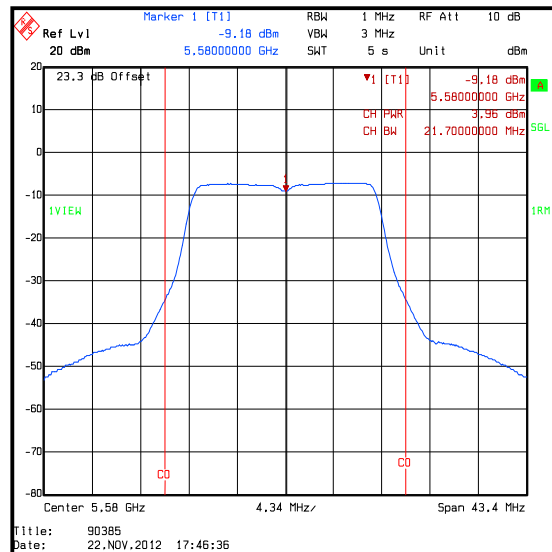

Middle Channel

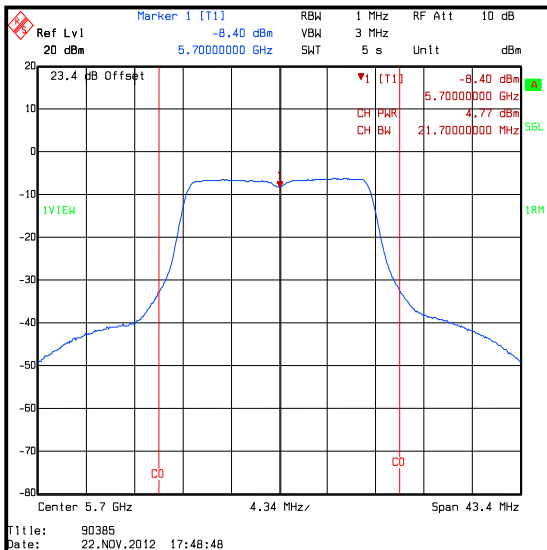


Top Channel


**Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7 / 5.47-5.725 GHz band


Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5500	2.4	3.5	5.9	24.0	18.1	Complied
Middle	5580	2.5	3.5	6.0	24.0	18.0	Complied
Top	5700	3.4	3.5	6.9	24.0	17.1	Complied

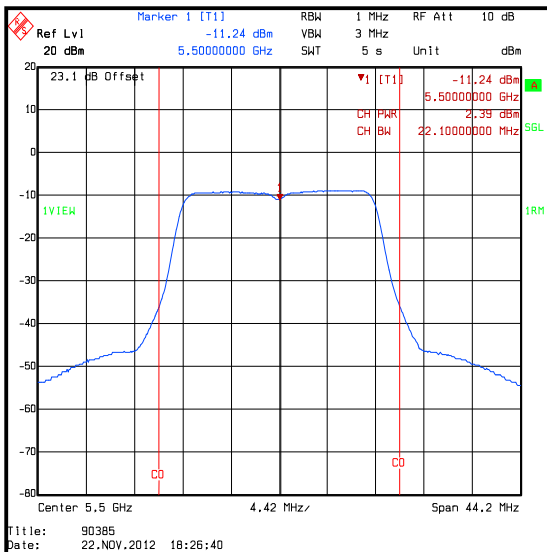

Bottom Channel

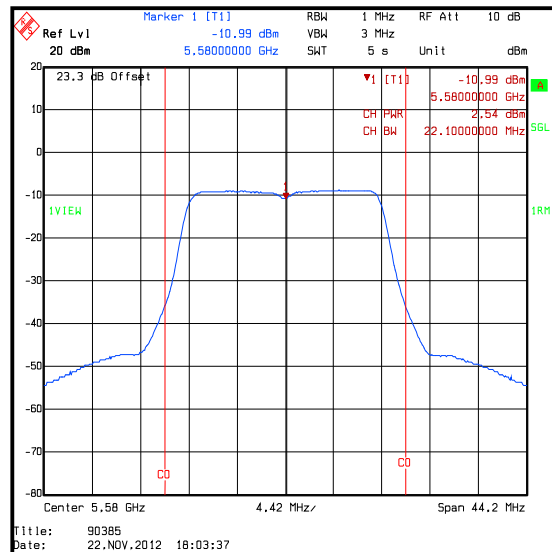

Middle Channel

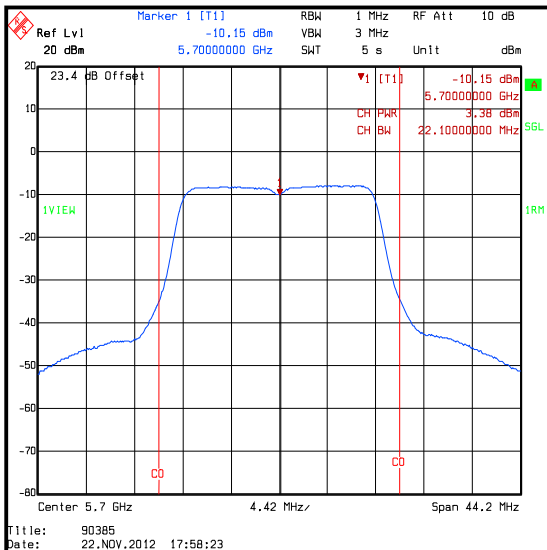


Top Channel


**Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7 / 5.47-5.725 GHz band


Channel	Frequency (MHz)	Conducted Power (dBm)	Duty cycle correction factor (dB)	Corrected Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	5510	1.7	3.4	5.1	24.0	18.9	Complied
Middle	5590	2.2	3.4	5.6	24.0	18.4	Complied
Top	5670	2.3	3.4	5.7	24.0	18.3	Complied

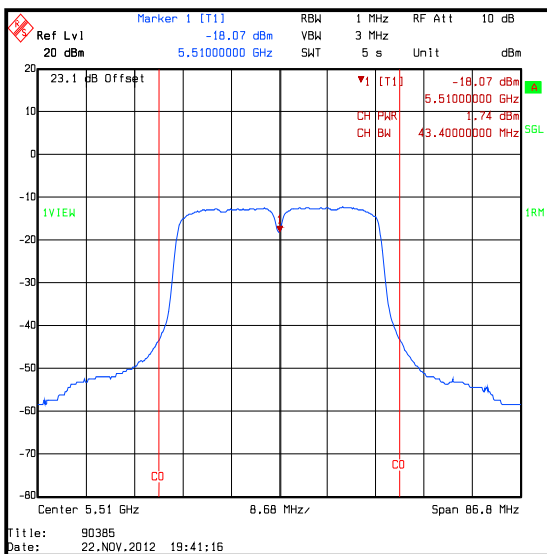

Bottom Channel

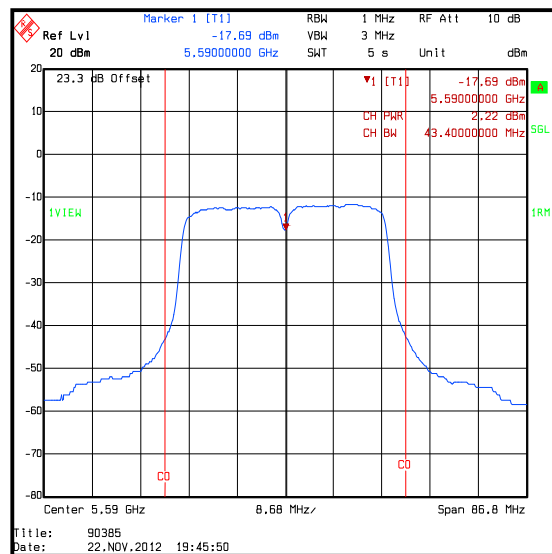

Middle Channel

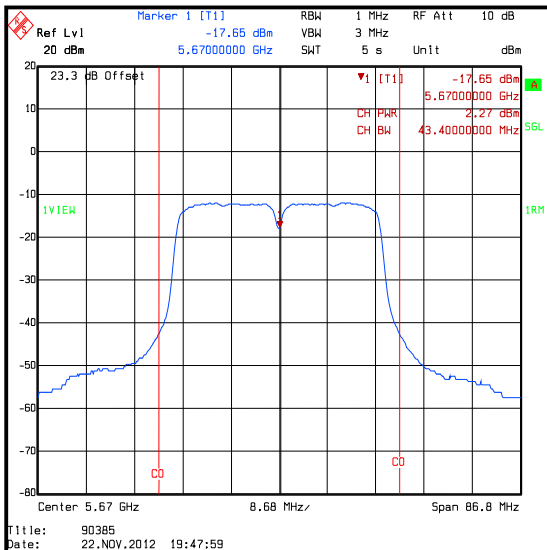

Top Channel

Transmitter Maximum Conducted Output Power (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A2142	Attenuator	Atlan TecRF	AN18-20	081120-23	25 May 2013	12
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	13 Aug 2013	12
M1267	Signal Generator	Rohde & Schwarz	SMP02	829076/008	14 Jun 2013	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	07 Jun 2013	12
M1267	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	07 Jun 2013	12

5.2.7. Transmitter Peak Power Spectral Density**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	22 November 2012
Test Sample IMEI:	353740050012164		

FCC Reference:	Part 15.407(a)(1)
Test Method Used:	FCC KDB 789033 E) referencing KDB 789033 C)3)e), Method SA-2 Alternative

Environmental Conditions:

Temperature (°C):	26
Relative Humidity (%):	34

Note(s):

1. Transmitter Peak Power Spectral Density tests in all bands were performed using a test receiver in accordance with FCC KDB 789033 D01 C)3)e) Method SA-2 Alternative.
2. All supported modes and channel widths were initially investigated on one channel. The modes that produced the highest power were:
 - o 802.11a – 64QAM / 54 Mbps
 - o 802.11n HT20 – 64QAM / 65 Mbps / MCS7
 - o 802.11n HT40 – 64QAM / 135 Mbps / MCS7


Measurements were then performed in these modes on bottom, middle and top channels in all operating bands.

3. The EUT was transmitting at <98% duty cycle. The calculated duty cycle in section 5.2.5 was added to the measured peak power spectral density in order to compute the average peak power spectral density during the actual transmission time.
4. The EUT antenna has a gain of <6 dBi.


Transmitter Peak Power Spectral Density (5.15-5.25 GHz band) (continued)

Results: 802.11a / 20 MHz / 64QAM / 54 Mbps


Channel	Frequency (MHz)	PPSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PPSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5180	-6.9	3.2	-3.7	4.0	7.7	Complied
Middle	5200	-7.0	3.2	-3.8	4.0	7.8	Complied
Top	5240	-7.0	3.2	-3.8	4.0	7.8	Complied

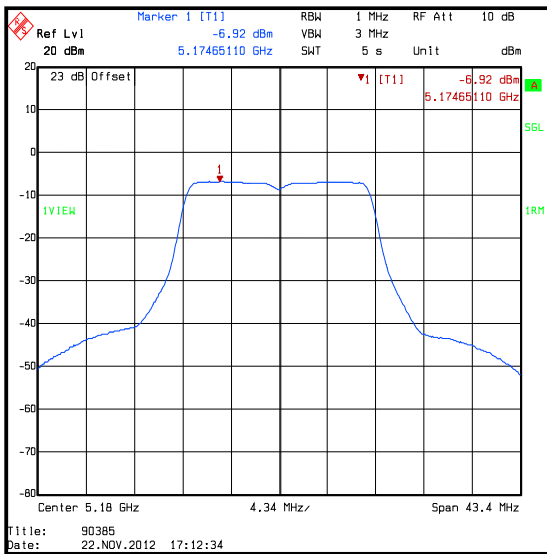

Bottom Channel

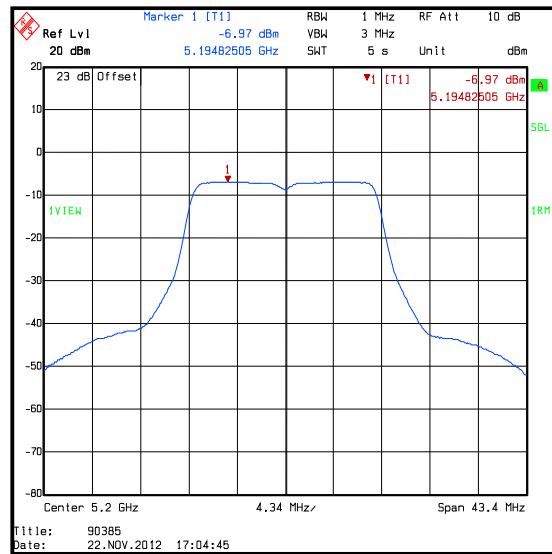

Middle Channel

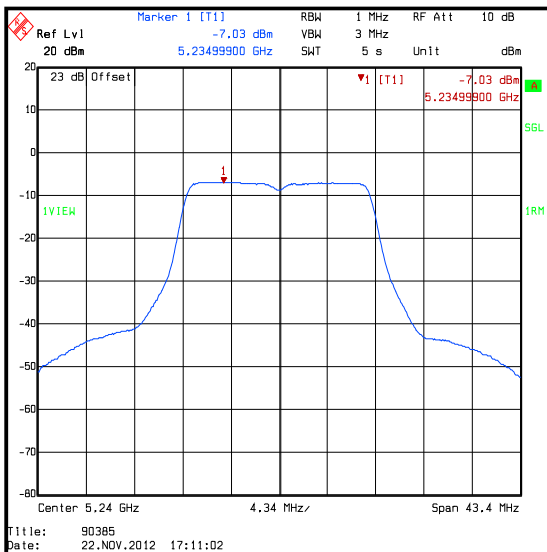


Top Channel


Transmitter Peak Power Spectral Density (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7


Channel	Frequency (MHz)	PPSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PPSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5180	-8.5	3.5	-5.0	4.0	9.0	Complied
Middle	5200	-8.6	3.5	-5.1	4.0	9.1	Complied
Top	5240	-8.6	3.5	-5.1	4.0	9.1	Complied

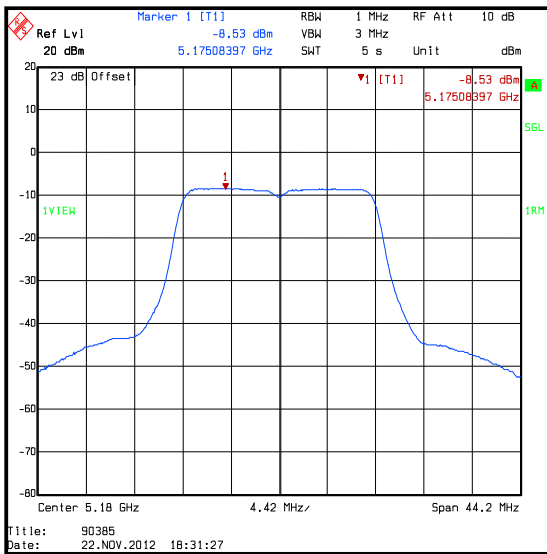

Bottom Channel

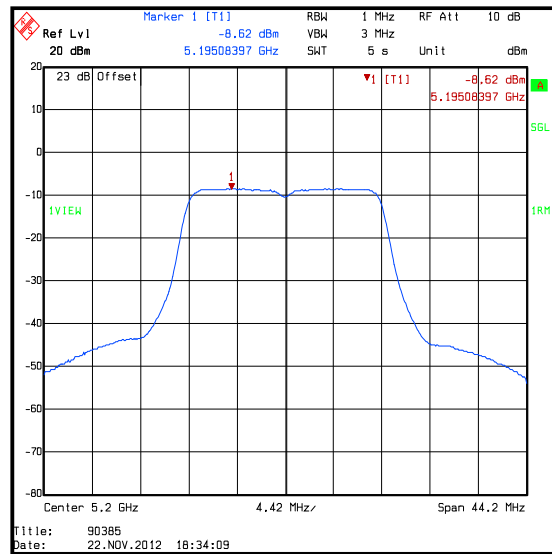

Middle Channel

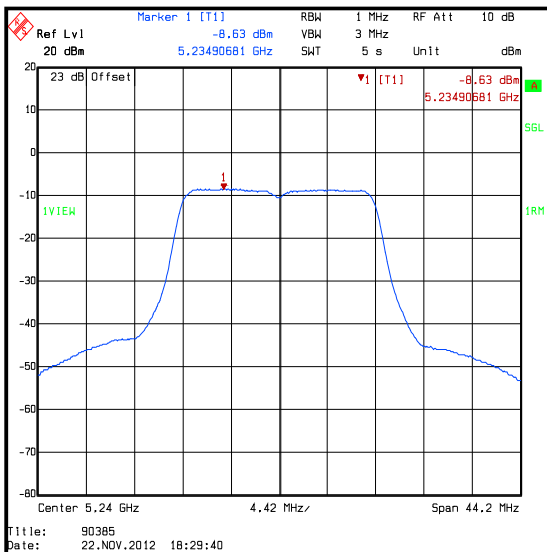


Top Channel


Transmitter Peak Power Spectral Density (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7

Channel	Frequency (MHz)	PPSD (dBm /MHz)	Duty cycle correction	Corrected PPSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5190	-12.0	3.4	-8.6	4.0	12.6	Complied
Top	5230	-12.1	3.4	-8.7	4.0	12.7	Complied

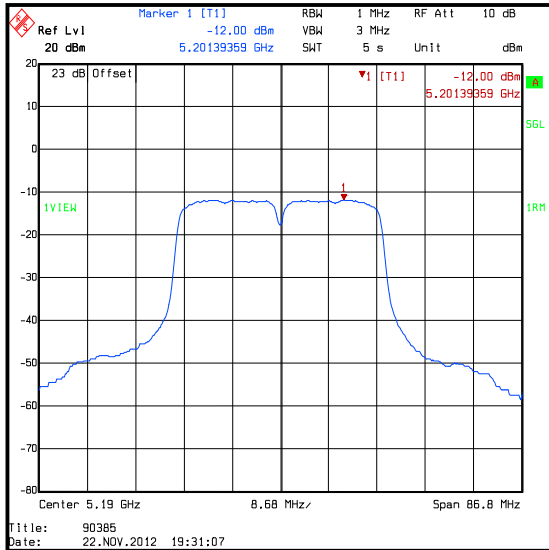

Bottom Channel

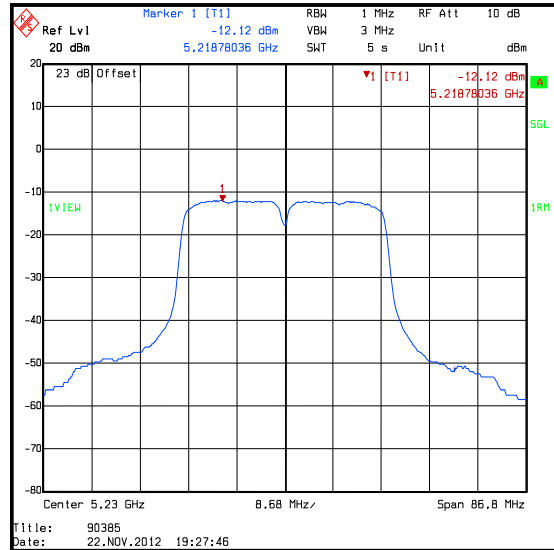

Top Channel

Transmitter Peak Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	22 November 2012
Test Sample IMEI:	353740050012164		

FCC Reference:	Part 15.407(a)(2)
Test Method Used:	FCC KDB 789033 E) referencing KDB 789033 C)3)c), Method SA-2 Alternative

Environmental Conditions:

Temperature (°C):	26
Relative Humidity (%):	33

Note(s):


1. FCC Part 15.407(a)(2) for PPSD in the 5.25-5.35 GHz and 5.47-5.725 GHz operating bands is <11 dBm/MHz.
2. All supported modes and channel widths were initially investigated on one channel. The modes that produced the highest power were:
 - o 802.11a – 64QAM / 54 Mbps
 - o 802.11n HT20 – 64QAM / 65 Mbps / MCS7
 - o 802.11n HT40 – 64QAM / 135 Mbps / MCS7

Measurements were then performed in these modes on bottom, middle and top channels in all operating bands.


**Transmitter Peak Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11a / 20 MHz / 64QAM / 54 Mbps / 5.25-5.35 GHz band


Channel	Frequency (MHz)	PPSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PPSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5260	-7.3	3.2	-4.1	11.0	15.1	Complied
Middle	5280	-7.6	3.2	-4.4	11.0	15.4	Complied
Top	5320	-7.2	3.2	-4.0	11.0	15.0	Complied

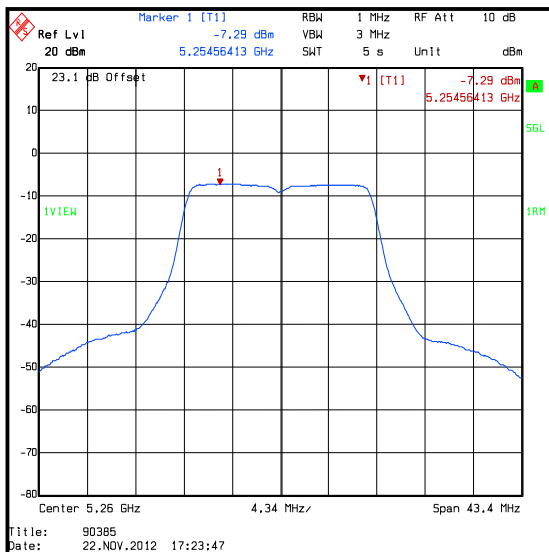

Bottom Channel

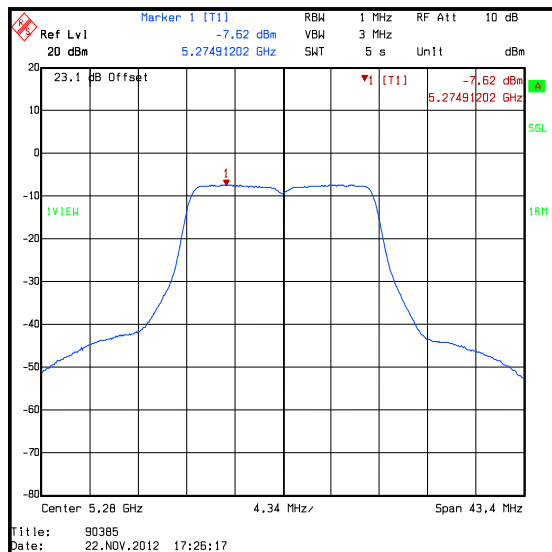

Middle Channel

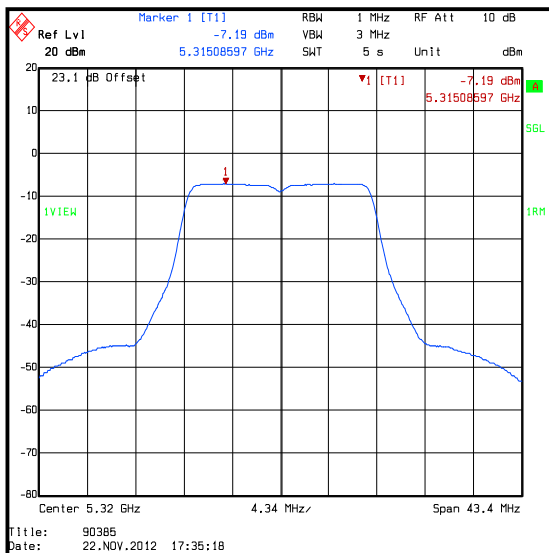


Top Channel


**Transmitter Peak Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7 / 5.25-5.35 GHz band


Channel	Frequency (MHz)	PPSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PPSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5260	-8.8	3.5	-5.3	11.0	16.3	Complied
Middle	5280	-9.3	3.5	-5.8	11.0	16.8	Complied
Top	5320	-8.8	3.5	-5.3	11.0	16.3	Complied

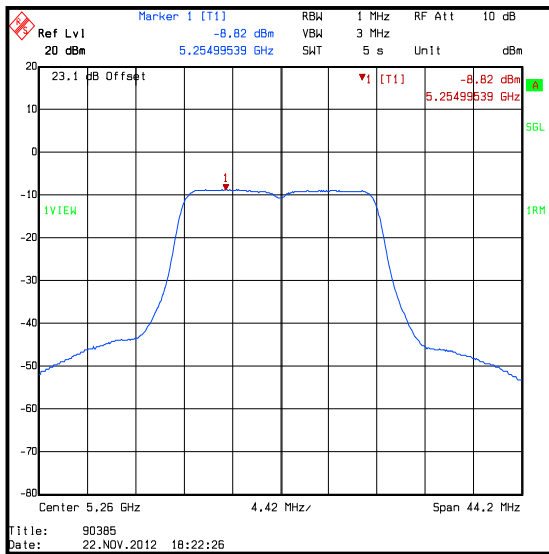

Bottom Channel

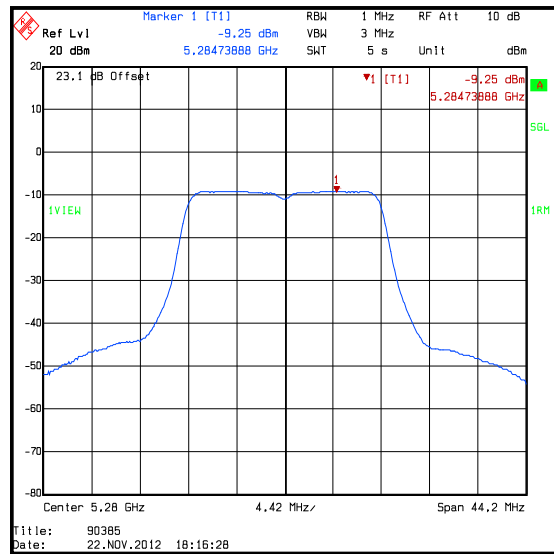

Middle Channel

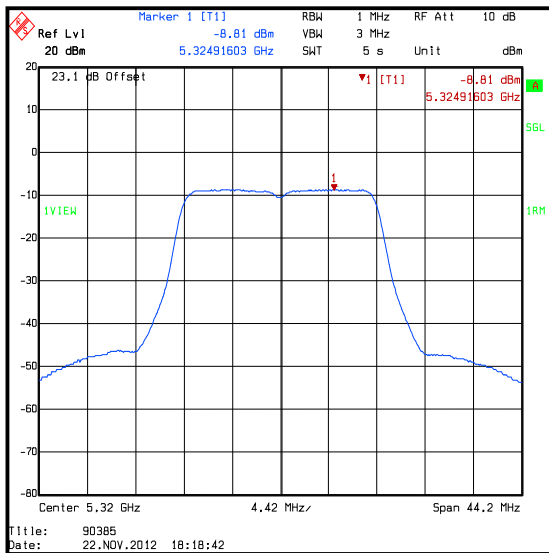


Top Channel


**Transmitter Peak Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7 / 5.25-5.35 GHz band

Channel	Frequency (MHz)	PPSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PPSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5270	-12.5	3.4	-9.1	11.0	20.1	Complied
Top	5310	-12.3	3.4	-8.9	11.0	19.9	Complied

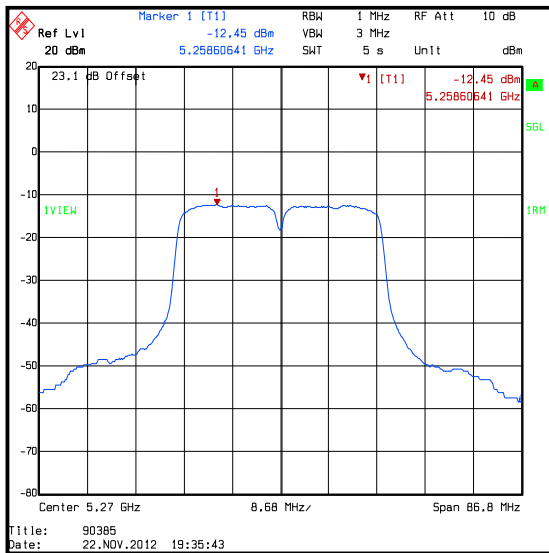

Bottom Channel

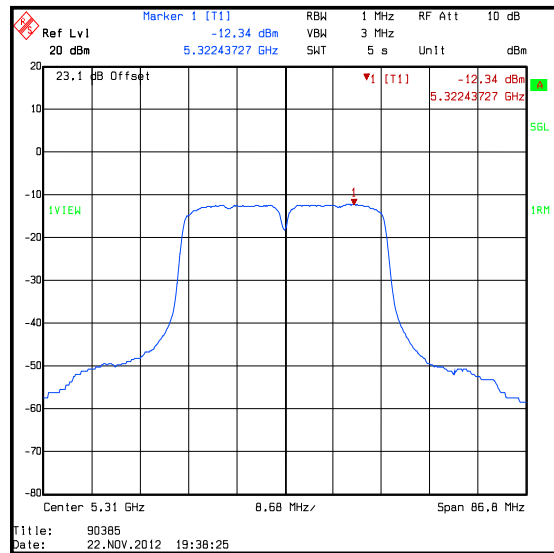


Top Channel


**Transmitter Peak Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11a / 20 MHz / 64QAM / 54 Mbps / 5.47-5.725 GHz band


Channel	Frequency (MHz)	PPSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PPSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5500	-7.5	3.2	-4.3	11.0	15.3	Complied
Middle	5580	-7.3	3.2	-4.1	11.0	15.1	Complied
Top	5700	-6.4	3.2	-3.2	11.0	14.2	Complied

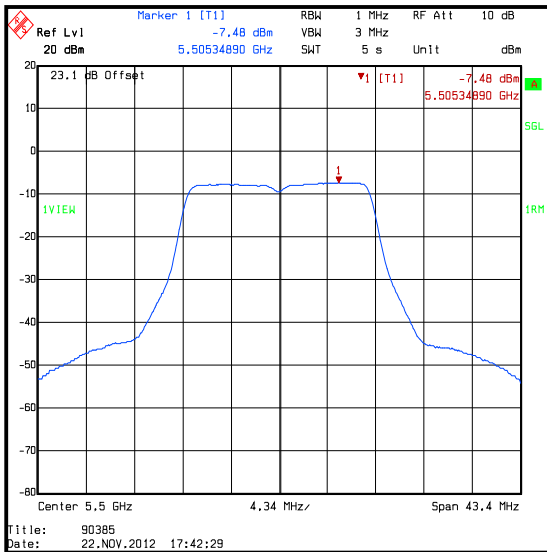

Bottom Channel

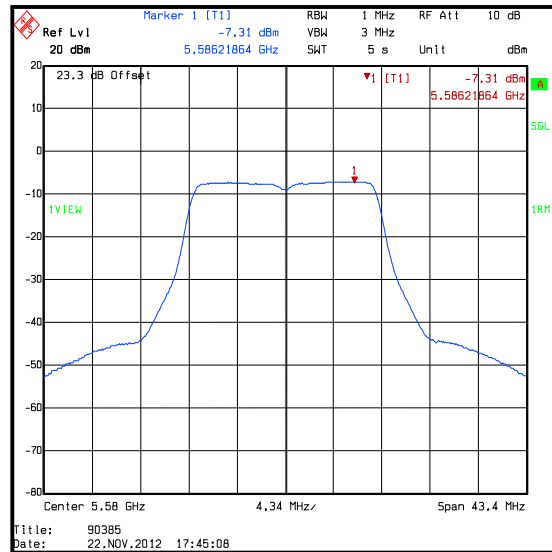

Middle Channel

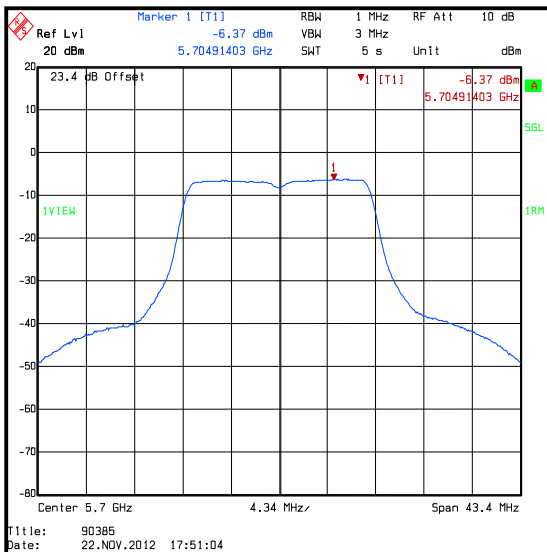


Top Channel


**Transmitter Peak Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7 / 5.47-5.725 GHz band


Channel	Frequency (MHz)	PPSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PPSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5500	-9.1	3.5	-5.6	11.0	16.6	Complied
Middle	5580	-9.0	3.5	-5.5	11.0	16.5	Complied
Top	5700	-8.1	3.5	-4.6	11.0	15.6	Complied

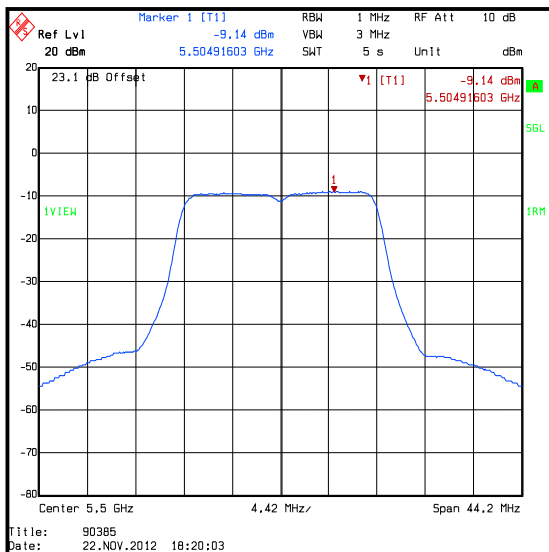

Bottom Channel

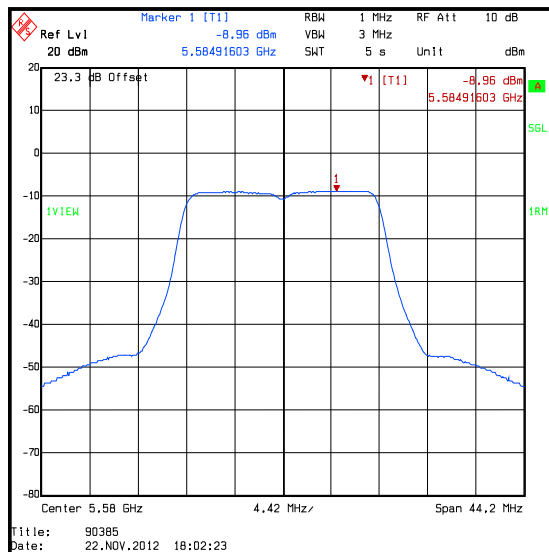

Middle Channel

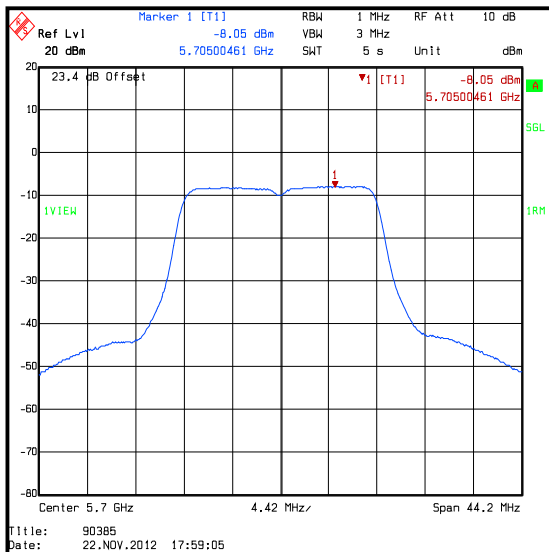


Top Channel


**Transmitter Peak Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)
(continued)**

Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7 / 5.47-5.725 GHz band


Channel	Frequency (MHz)	PPSD (dBm /MHz)	Duty cycle correction factor (dB)	Corrected PPSD (dBm /MHz)	Limit (dBm /MHz)	Margin (dB)	Result
Bottom	5510	-12.5	3.4	-9.1	11.0	20.1	Complied
Middle	5590	-11.8	3.4	-8.4	11.0	19.4	Complied
Top	5670	-12.1	3.4	-8.7	11.0	19.7	Complied

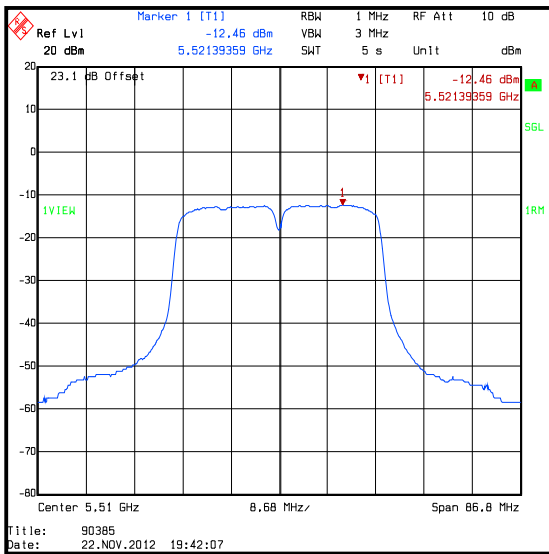

Bottom Channel

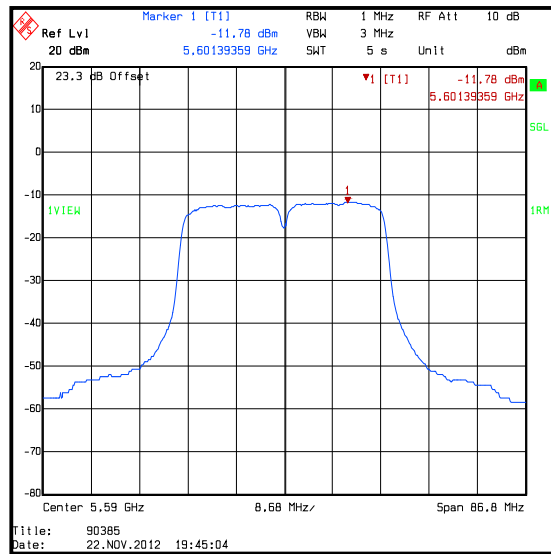

Middle Channel

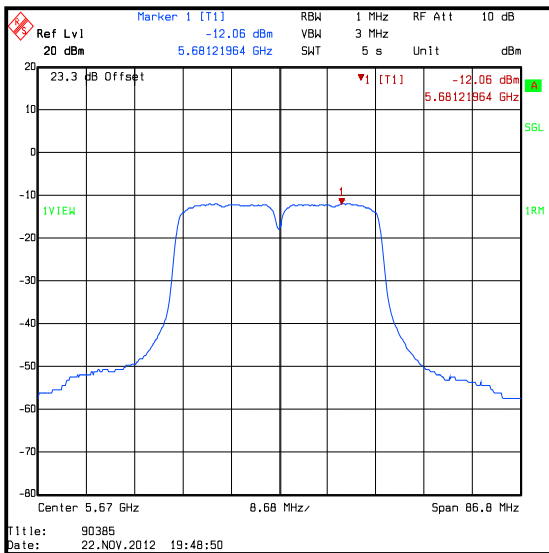

Top Channel

Transmitter Peak Power Spectral Density (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A2142	Attenuator	Atlan TecRF	AN18-20	081120-23	25 May 2013	12
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	13 Aug 2013	12
M1267	Signal Generator	Rohde & Schwarz	SMP02	829076/008	14 Jun 2013	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	07 Jun 2013	12
M1267	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	07 Jun 2013	12

5.2.8. Transmitter Peak Excursion**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	26 November 2012
Test Sample IMEI:	353740050012164		

FCC Reference:	Part 15.407(a)(6)
Test Method Used:	FCC KDB 789033 F)

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	35

Note(s):

1. All supported modes and channel widths were initially investigated on one channel. The modes that produced the highest power and widest bandwidth for all bands were:
 - o 802.11a – BPSK / 9 Mbps & 64QAM / 54 Mbps.
 - o 802.11n HT20 – BPSK / 6.5 Mbps / MCS0 & 64QAM / 65 Mbps / MCS7.
 - o 802.11n HT40 - BPSK / 13.5 Mbps / MCS0 & 64QAM / 135 Mbps / MCS7.


Measurements were then performed in these modes on middle channels for 802.11a and 802.11n 20 MHz, however 802.11n 40 MHz was tested on top channels.

2. The peak measurement (first trace) was performed in accordance with FCC KDB 789033 F) using a peak detector. The second measurement (trace 2) was performed in accordance with FCC KDB 789033 E) and FCC KDB 789033 C)3)e) Method SA-2 Alternative using an RMS detector. A marker was placed at the peak of the first trace. A delta marker was placed of at the peak of the second trace. As the EUT had a duty cycle <98 %, the correction factor has been taken into account in order to calculate the final results. The peak excursion is the delta between the two markers and the addition of the duty cycle correction factor calculated in Section 5.2.5.


Transmitter Peak Excursion (continued)

Results: 802.11a / 20 MHz / BPSK / 9 Mbps


Band (GHz)	Middle Frequency (MHz)	Peak Excursion (dB)	Duty cycle correction (dB)	Corrected Peak Excursion (dB)	Limit (dB)	Lowest Margin (dB)	Result
5.15-5.25	5200	11.0	0.8	10.2	13.0	2.8	Complied
5.25-5.35	5280	11.3	0.8	10.5	13.0	2.5	Complied
5.47-5.725	5580	11.1	0.8	10.3	13.0	2.7	Complied

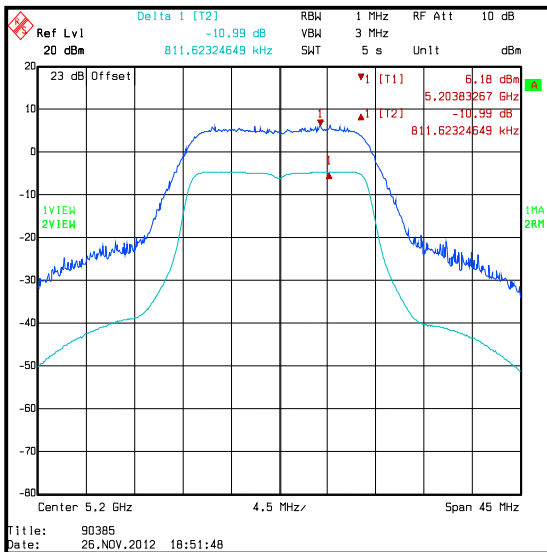

Middle Channel / 5.15-5.25 GHz band

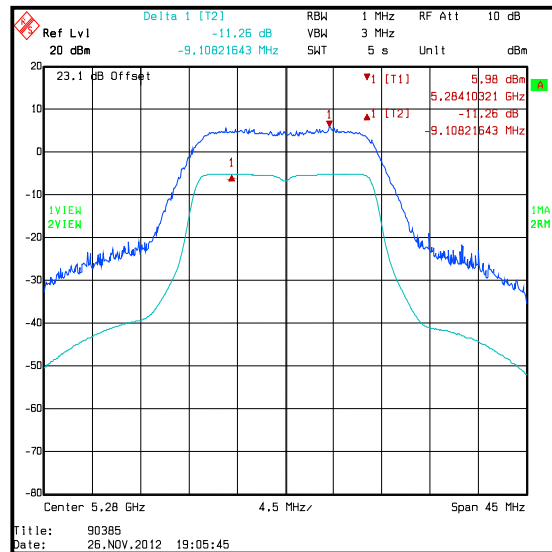

Middle Channel / 5.25-5.35 GHz band

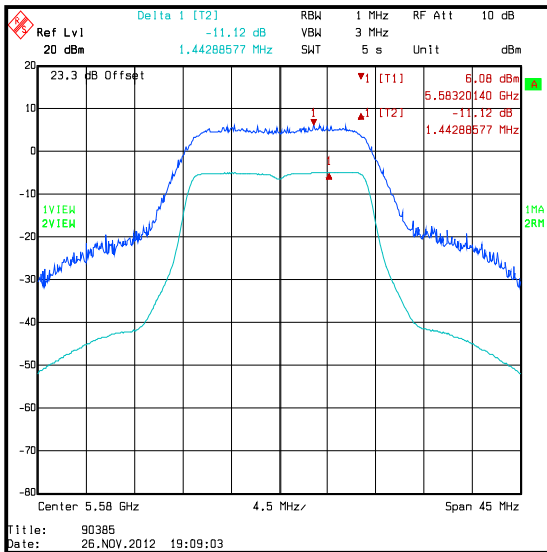


Middle Channel / 5.47-5.725 GHz band


Transmitter Peak Excursion (continued)

Results: 802.11a / 20 MHz / 64QAM / 54 Mbps


Band (GHz)	Middle Frequency (MHz)	Peak Excursion (dB)	Duty cycle correction (dB)	Corrected Peak Excursion (dB)	Limit (dB)	Lowest Margin (dB)	Result
5.15-5.25	5200	13.9	3.2	10.7	13.0	2.3	Complied
5.25-5.35	5280	14.3	3.2	11.1	13.0	1.9	Complied
5.47-5.725	5580	14.1	3.2	10.9	13.0	2.1	Complied

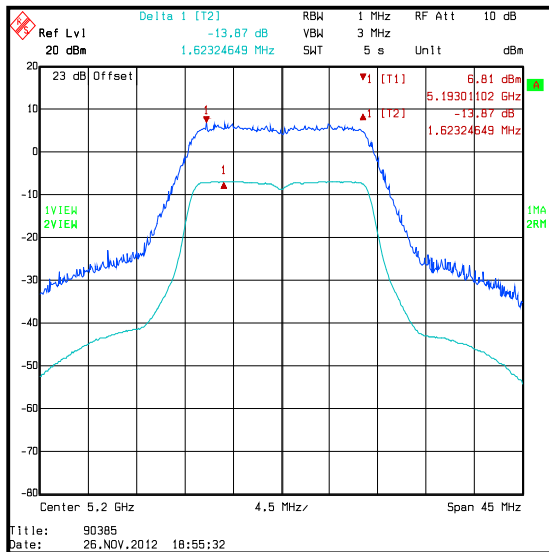

Middle Channel / 5.15-5.25 GHz band

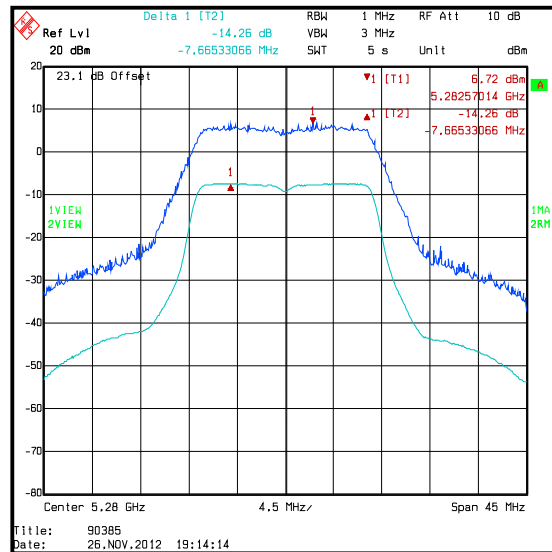

Middle Channel / 5.25-5.35 GHz band

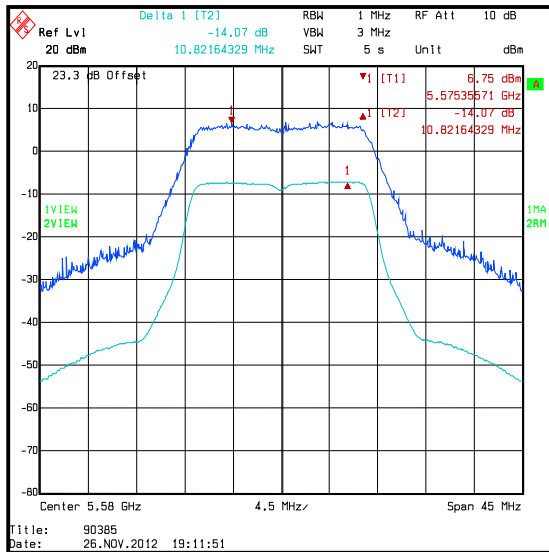


Middle Channel / 5.47-5.725 GHz band


Transmitter Peak Excursion (continued)

Results: 802.11n / 20 MHz / BPSK / 6.5 Mbps / MCS0


Band (GHz)	Middle Frequency (MHz)	Peak Excursion (dB)	Duty cycle correction (dB)	Corrected Peak Excursion (dB)	Limit (dB)	Lowest Margin (dB)	Result
5.15-5.25	5200	10.8	0.6	10.2	13.0	2.8	Complied
5.25-5.35	5280	11.0	0.6	10.4	13.0	2.6	Complied
5.47-5.725	5580	10.7	0.6	10.1	13.0	2.9	Complied

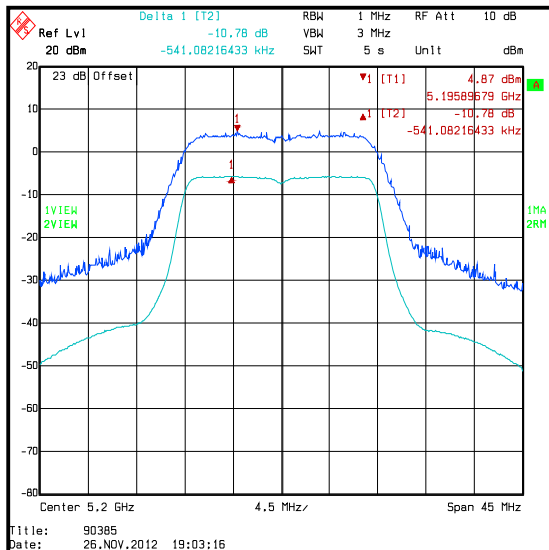

Middle Channel / 5.15-5.25 GHz band

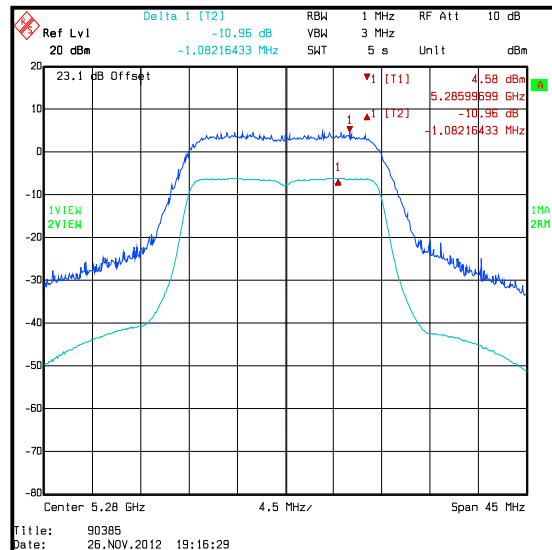

Middle Channel / 5.25-5.35 GHz band

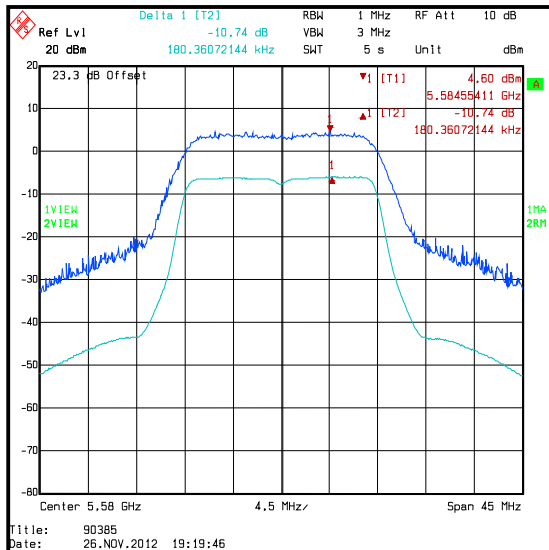


Middle Channel / 5.47-5.725 GHz band


Transmitter Peak Excursion (continued)

Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7


Band (GHz)	Middle Frequency (MHz)	Peak Excursion (dB)	Duty cycle correction (dB)	Corrected Peak Excursion (dB)	Limit (dB)	Lowest Margin (dB)	Result
5.15-5.25	5200	14.3	3.5	10.8	13.0	2.2	Complied
5.25-5.35	5280	14.4	3.5	10.9	13.0	2.1	Complied
5.47-5.725	5580	14.5	3.5	11.0	13.0	2.0	Complied

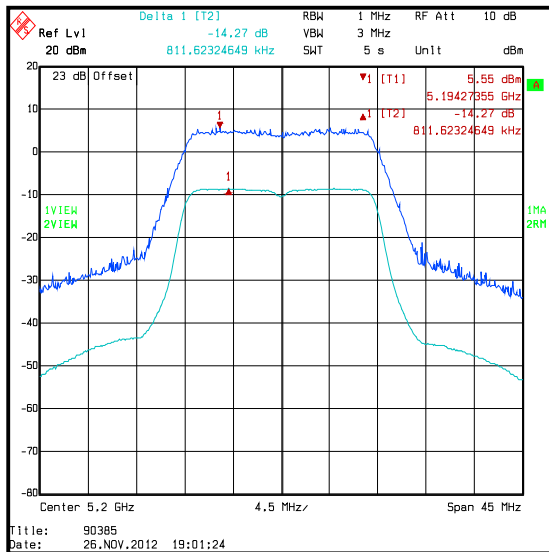

Middle Channel / 5.15-5.25 GHz band

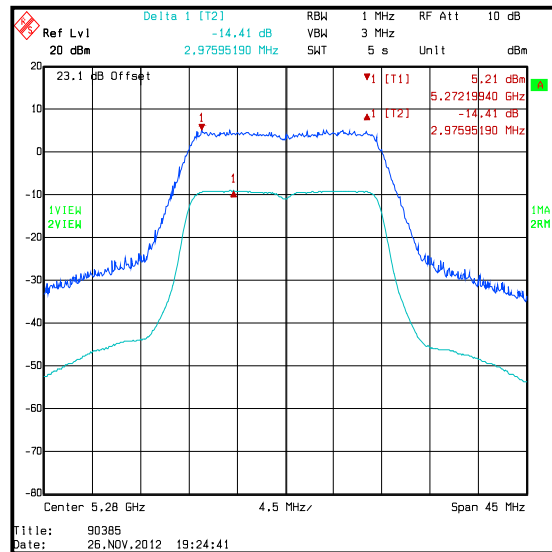

Middle Channel / 5.25-5.35 GHz band

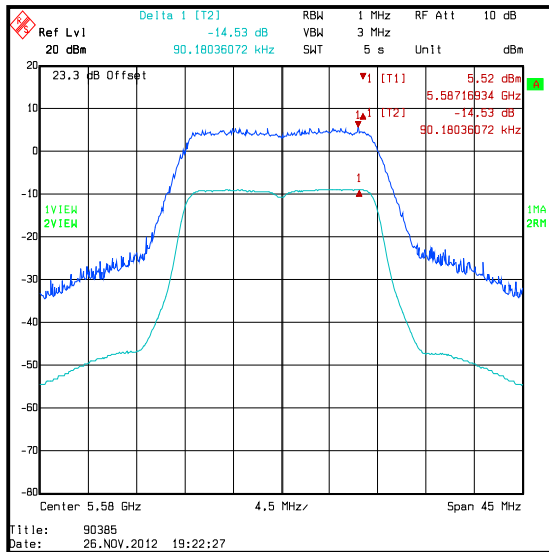


Middle Channel / 5.47-5.725 GHz band


Transmitter Peak Excursion (continued)

Results: 802.11n / 40 MHz / BPSK / 13.5 Mbps / MCS0


Band (GHz)	Middle Frequency (MHz)	Peak Excursion (dB)	Duty cycle correction (dB)	Corrected Peak Excursion (dB)	Limit (dB)	Lowest Margin (dB)	Result
5.15-5.25	5230	11.4	0.6	10.8	13.0	2.2	Complied
5.25-5.35	5310	11.1	0.6	10.5	13.0	2.5	Complied
5.47-5.725	5670	10.8	0.6	10.2	13.0	2.8	Complied

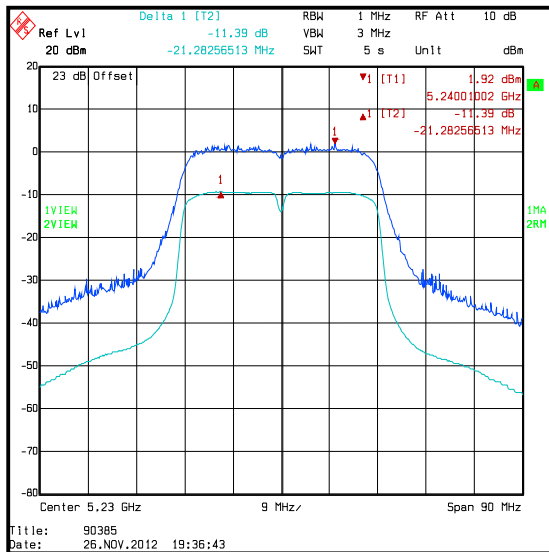

Top Channel / 5.15-5.25 GHz band

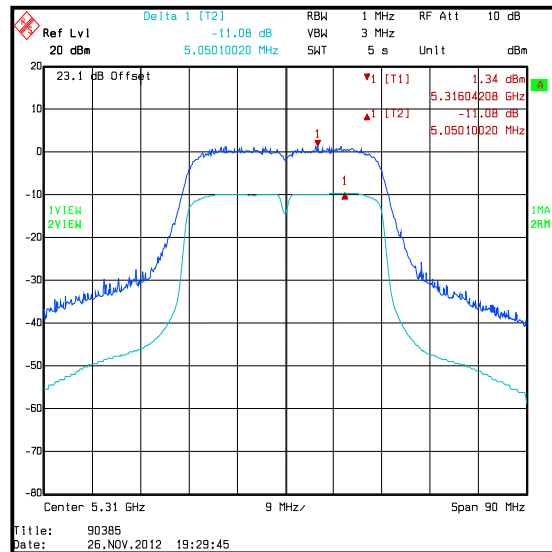

Top Channel / 5.25-5.35 GHz band

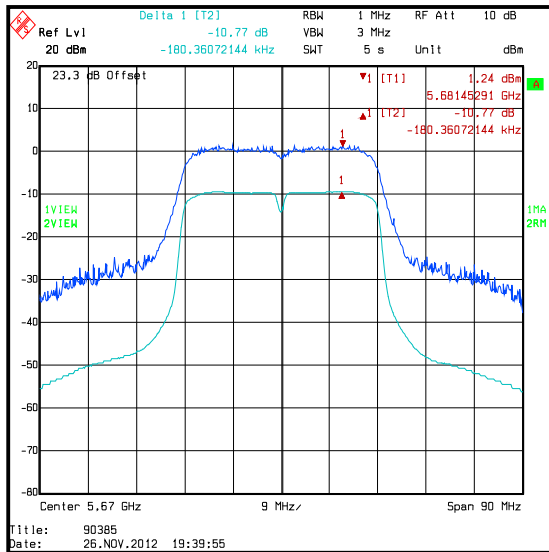


Top Channel / 5.47-5.725 GHz band


Transmitter Peak Excursion (continued)

Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7


Band (GHz)	Middle Frequency (MHz)	Peak Excursion (dB)	Duty cycle correction (dB)	Corrected Peak Excursion (dB)	Limit (dB)	Lowest Margin (dB)	Result
5.15-5.25	5230	14.3	3.4	10.9	13.0	2.1	Complied
5.25-5.35	5310	14.1	3.4	10.7	13.0	2.3	Complied
5.47-5.725	5670	14.2	3.4	10.8	13.0	2.2	Complied

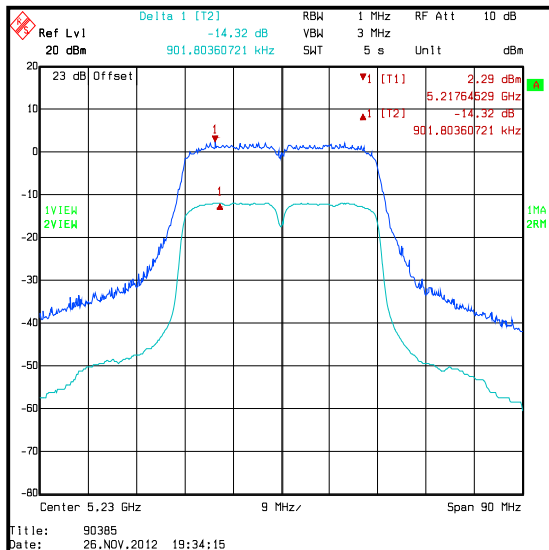

Top Channel / 5.15-5.25 GHz band

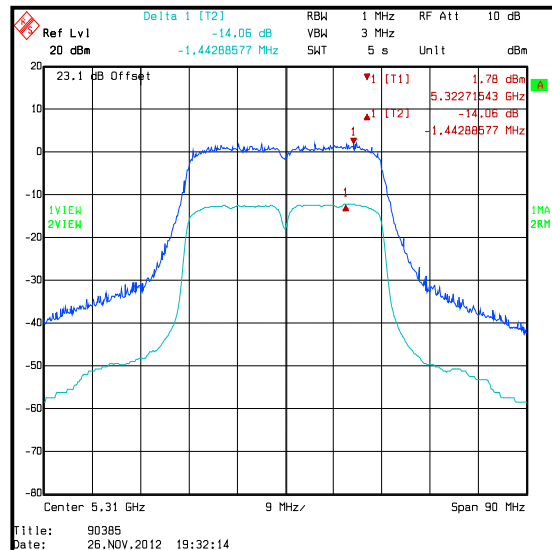

Top Channel / 5.25-5.35 GHz band

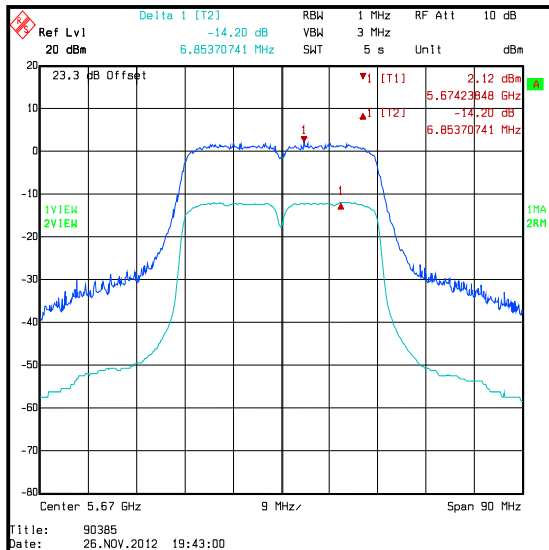

Top Channel / 5.47-5.725 GHz band

Transmitter Peak Excursion (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A2142	Attenuator	Atlan TecRF	AN18-20	081120-23	25 May 2013	12
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016	13 Aug 2013	12
M1267	Signal Generator	Rohde & Schwarz	SMP02	829076/008	14 Jun 2013	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	07 Jun 2013	12
M1267	Thermal Power Sensor	Rohde & Schwarz	NRV-Z52	100155	07 Jun 2013	12

5.2.8. Transmitter Out of Band Radiated Emissions**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	22 November 2012
Test Sample IMEI:	353740050011927		

FCC Reference:	Parts 15.407(b)(2),(6),(7) & 15.209(a)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Sections 6.3 and 6.5
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:


Temperature (°C):	22
Relative Humidity (%):	31

Note(s):

1. Measurements below 1 GHz were limited to the 5.47-5.725 GHz band, the EUT was transmitting with a data rate of 54 Mbps (802.11a) as it produced the highest conducted output power and was therefore deemed worst case.
2. Pre-scans with the EUT transmitting on the top channel were measured according to FCC Part 15.407(b)(3) which states for transmitters operating in the band 5.47 to 5.725 GHz: all emissions outside of the band shall not exceed -27 dBm/MHz. Part(b)(6) states unwanted emissions below 1 GHz must comply with the general field strength limits set forth in 15.209. Part(b)(7) states the provisions of 15.205 apply, e.g. restricted bands of operation.
3. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
4. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the top channel only.
5. The final measurements shown are within restricted bands, all other emissions were determined to be either unrestricted or greater than 20 dB below the appropriate limit.
6. Measurements below 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Results: Top Channel / Field Strength**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
108.030	Horizontal	8.6	43.5	34.9	Complied
116.825	Vertical	8.2	43.5	35.3	Complied
125.101	Vertical	13.3	43.5	30.2	Complied
125.198	Vertical	16.1	43.5	27.4	Complied

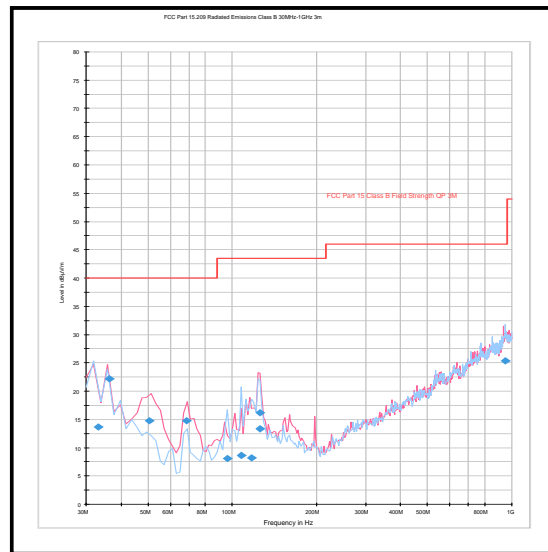

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Test Equipment Used:

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A1834	Attenuator	Hewlett Packard	8491B	10444	29 Jan 2013	12
A553	Antenna	Chase	CBL6111A	1593	15 Feb 2013	12
G0543	Amplifier	Sonoma	310N	230801	02 Jan 2013	3
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	03 Feb 2013	12

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Test Summary:**

Test Engineer:	Nick Steele	Test Dates:	22 November 2012 & 23 November 2012
Test Sample IMEI:	353740050011927		

FCC Part:	15.407(b)(3),(7) & 15.209(a)
Test Method Used:	FCC KDB 789033 G) & ANSI C63.10 Sections 6.3 and 6.6
Frequency Range:	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	38




Note(s):

1. FCC Part 15.407(b)(3) states for transmitters operating in the band 5.47 to 5.725 GHz: all emissions outside of the band will not exceed -27 dBm/MHz. Part(b)(7) states the provisions of 15.205 apply e.g. restricted bands of operation.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table below.
3. Pre-scans were performed on the 5.47-5.725 GHz band as it produced the highest conducted output power. Final measurements would be performed on any emission seen for each band as stated in FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012). As no final emissions were seen, the results only consist of pre-scans within the 5.47-5.725 GHz band
4. The final measured value, for the given emission in the field strength result tables, incorporates the calibrated antenna factor and cable loss.
5. The emission shown on the 4 GHz to 6 GHz plot is the EUT fundamental.
6. Measurements were performed across the two restricted bands closest to the bands of operation with the EUT transmitting on the top channel in the 5.47 to 5.725 GHz band. Plots are included in this section of the test report. Peak and average measurements were made. No emissions were observed above the noise floor of the measurements system.
7. Pre-scans above 1 GHz were performed in a fully anechoic chamber (RFI Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.


Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)

Results:

Frequency (MHz)	Antenna Polarity	Level (dBm)	Limit (dBm)	Margin (dB)	Result
40000.000	Vertical	50.4	54.0	3.6	Complied


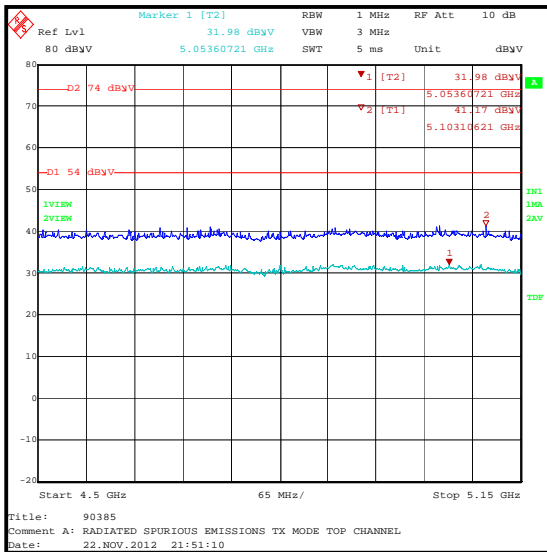
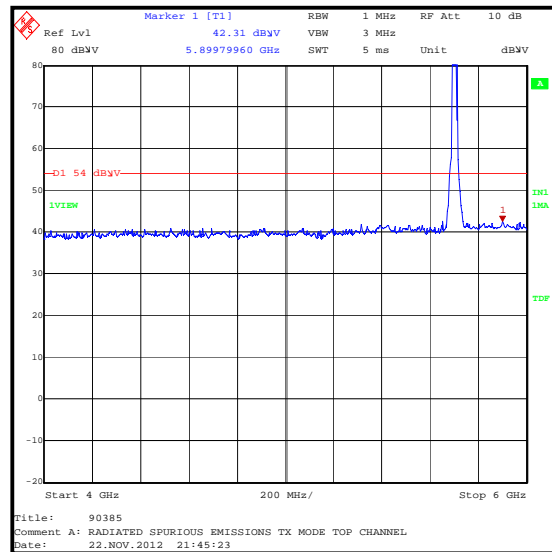
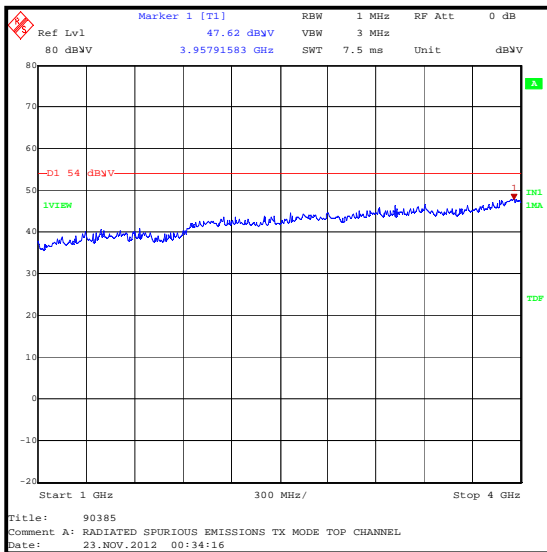



Restricted Band 4.5 GHz to 5.15 GHz

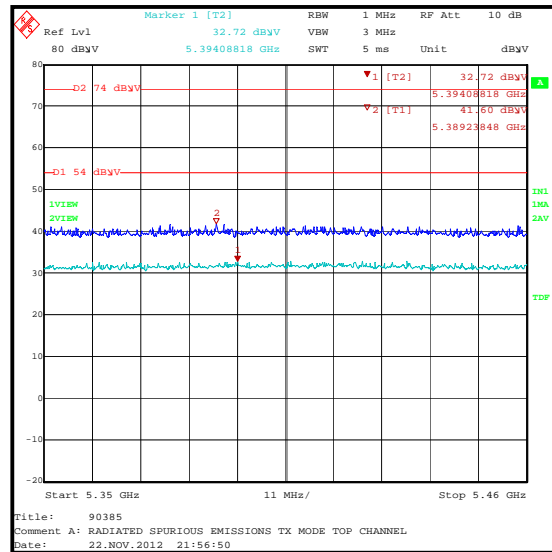

Restricted Band 5.35 GHz to 5.46 GHz

Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)

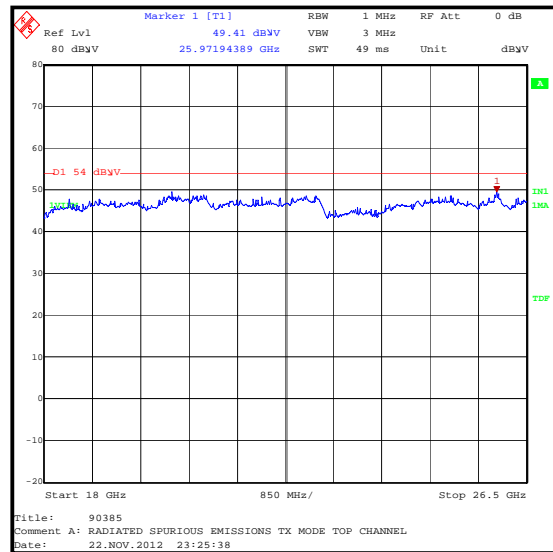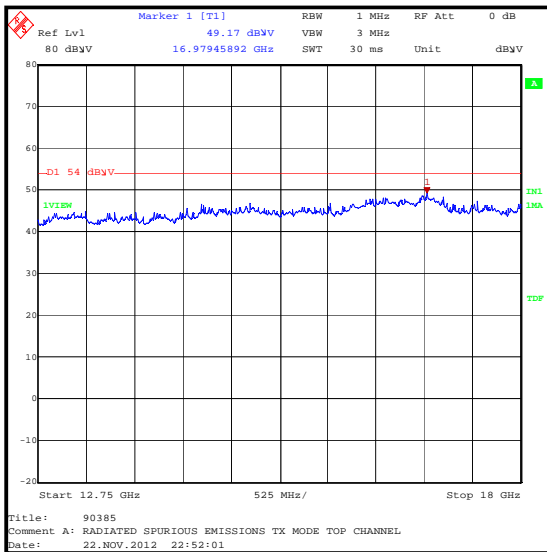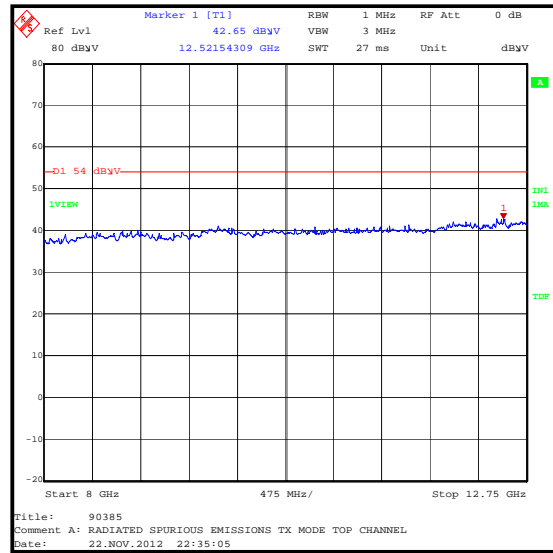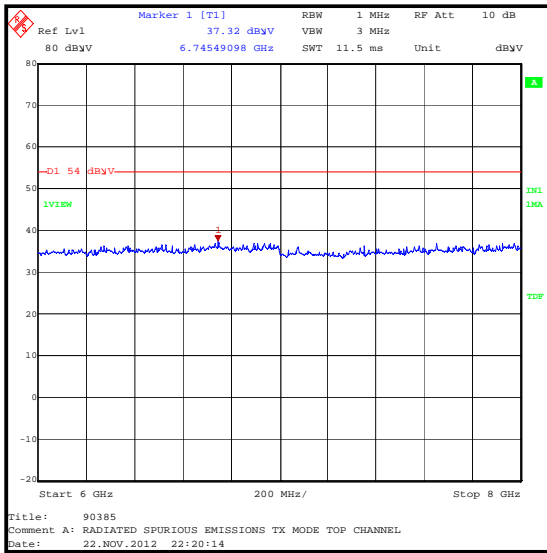

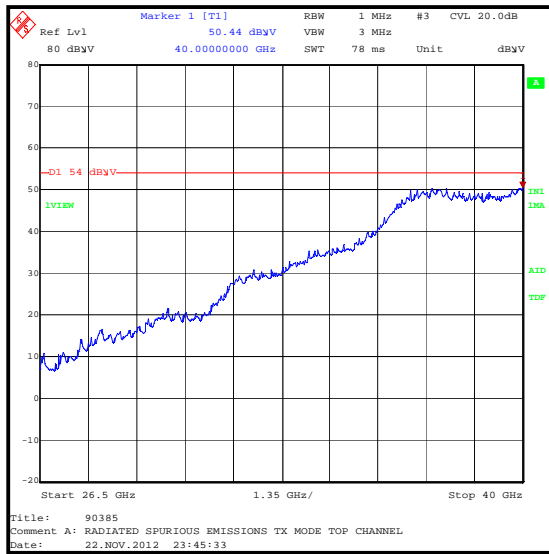Transmitter Out of Band Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
K0002	3m RSE Chamber	Rainford	N/A	N/A	04 Nov 2013	12
A1818	Antenna	EMCO	3115	00075692	04 Nov 2013	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	04 Nov 2013	12
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12
A253	Antenna	Flann Microwave	12240-20	128	04 Nov 2013	12
A254	Antenna	Flann Microwave	14240-20	139	04 Nov 2013	12
A255	Antenna	Flann Microwave	16240-20	519	04 Nov 2013	12
A256	Antenna	Flann Microwave	18240-20	400	04 Nov 2013	12
A436	Antenna	Flann Microwave	20240-20	330	04 Nov 2013	12
M1390	Harmonic Mixer	Farran Technology	WHMP 28	FTL1677B	Calibrated before use	-
A366	Isolator	MRI	FRR-400	169	Calibrated before use	-
A203	Antenna	Flann Microwave	22240-20	343	11 May 2013	36
A1785	Pre-Amplifier	Farran Technology	FLNA-28-30	FTL 6483	Calibrated before use	-

5.2.9. Transmitter Band Edge Radiated Emissions**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	27 November 2012
Test Sample IMEI:	353740050011927		

FCC Reference:	Parts 15.407(b)(1), 15.407(b)(7), 15.205 & 15.209(a)
Test Method Used:	ANSI C63.10 Section 6.9.2 & FCC KDB 789033 G)

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	37

Note(s):

1. FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012) confirmed band edge measurements need only be performed in the EUT modes that produce the highest power and the widest bandwidths. The modes that produced the highest power and widest bandwidth were:
 - 802.11a - BPSK / 9 Mbps & 64QAM / 54 Mbps.
 - 802.11n HT20 - BPSK / 6.5 Mbps / MCS0 & 64QAM / 65 Mbps / MCS7.
 - 802.11n HT40 - BPSK / 13.5 Mbps / MCS0 & 64QAM / 135 Mbps / MCS7.
2. Lower band edge measurements were performed with the EUT transmitting on the bottom channel. Upper band edge measurements were performed with the EUT transmitting on the top channel.
3. For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also above the upper band edge at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply.
4. Field strength measurements using peak and average detectors were performed in the restricted bands below 5.15 GHz and above 5.35 GHz. Field strength and EIRP results were found to be compliant with the restricted band limits and Part 15.407 out-of-band limits.
5. For average measurements the duty cycle correction factor calculated in section 5.2.5 was added to the measured result as the duty cycle was < 98 %.
6. As the duty cycle was < 98 %, the average measurements were performed using the number of sweeps stated below;
 - 802.11a 9Mbps – 120 sweeps
 - 802.11a 54Mbps – 207 sweeps
 - 802.11n HT20 / 6.5 Mbps / MCS0 – 114 sweeps
 - 802.11n HT20 / 65 Mbps / MCS7 – 224 sweeps
 - 802.11n HT40 / 13.5 Mbps / MCS0 – 115 sweeps
 - 802.11n HT40 / 135 Mbps / MCS7 – 217 sweeps

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 802.11a / 20 MHz / BPSK / 9 Mbps / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	49.7	74.0	24.3	Complied
5350	48.7	74.0	25.3	Complied

Results: 802.11a / 20 MHz / BPSK / 9 Mbps / Average


Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	38.4	0.8	39.2	54.0	14.8	Complied
5350	37.7	0.8	38.5	54.0	15.5	Complied

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)


Results: 802.11a / 20 MHz / BPSK / 9 Mbps

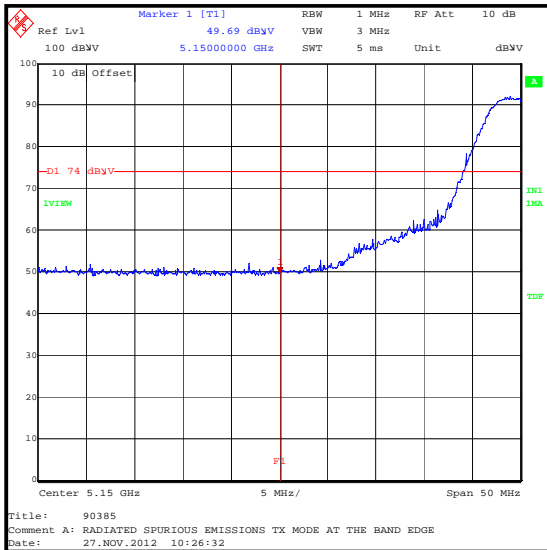


Lower Band Edge Peak Measurement

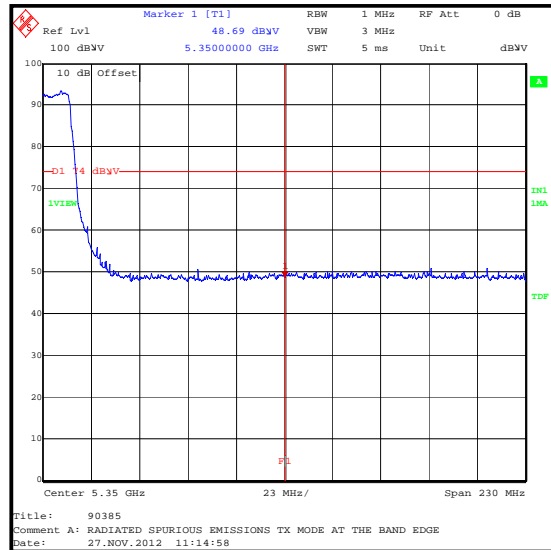

Upper Band Edge Peak Measurement

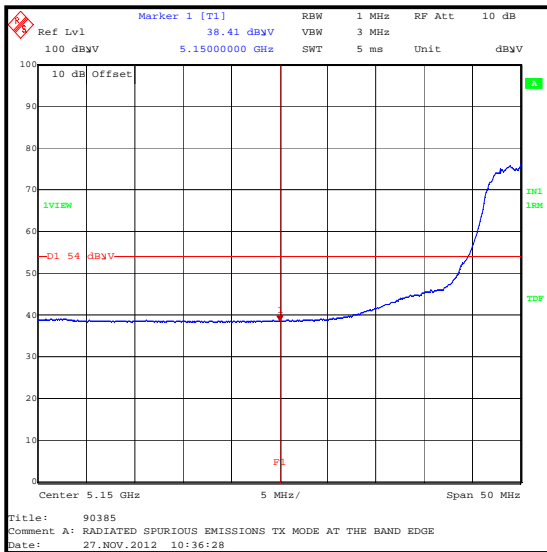

Lower Band Edge Average Measurement

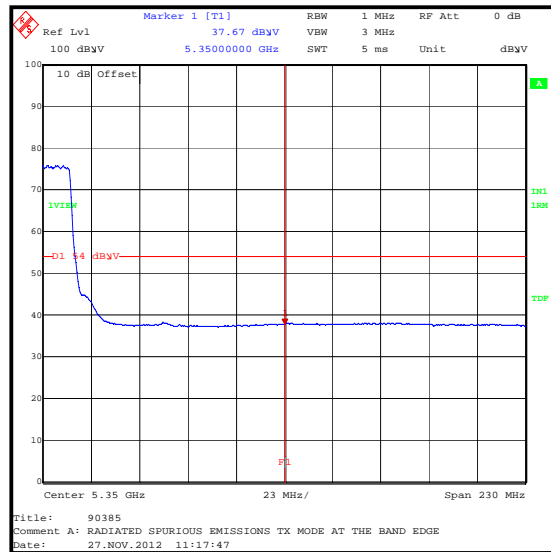

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 802.11a / 20 MHz / 64QAM / 54 Mbps / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	49.4	74.0	24.6	Complied
5350	48.6	74.0	25.4	Complied

Results: 802.11a / 20 MHz / 64QAM / 54 Mbps / Average


Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	38.2	3.2	41.4	54.0	12.6	Complied
5350	37.5	3.2	40.7	54.0	13.3	Complied

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)


Results: 802.11a / 20 MHz / 64QAM / 54 Mbps

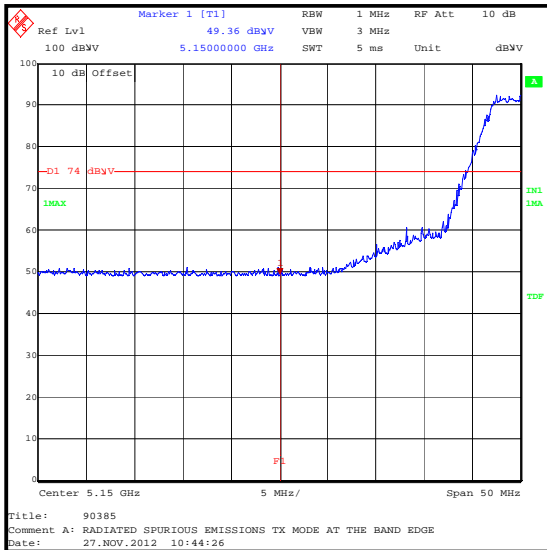


Lower Band Edge Peak Measurement

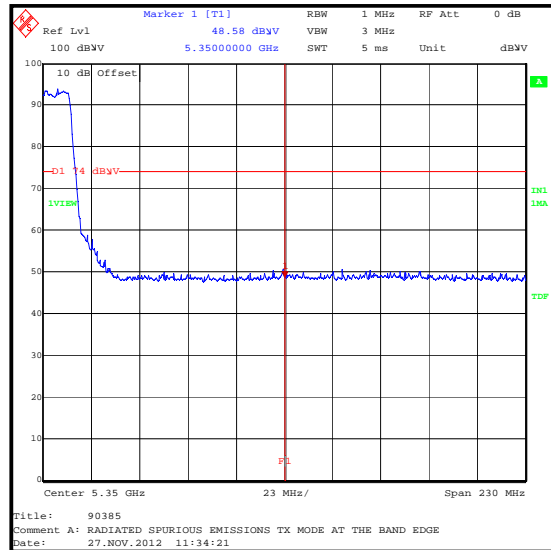

Upper Band Edge Peak Measurement

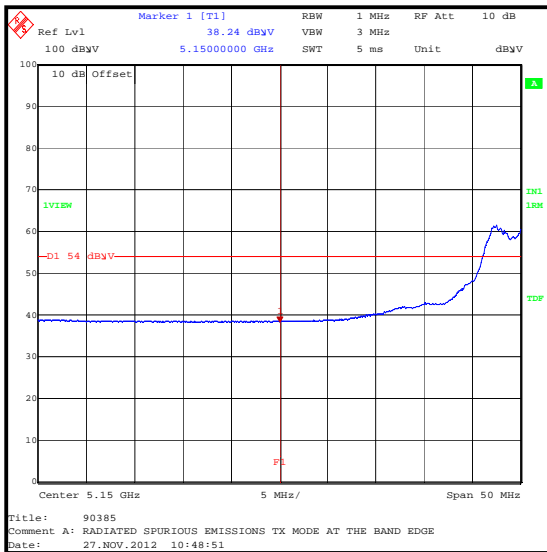

Lower Band Edge Average Measurement

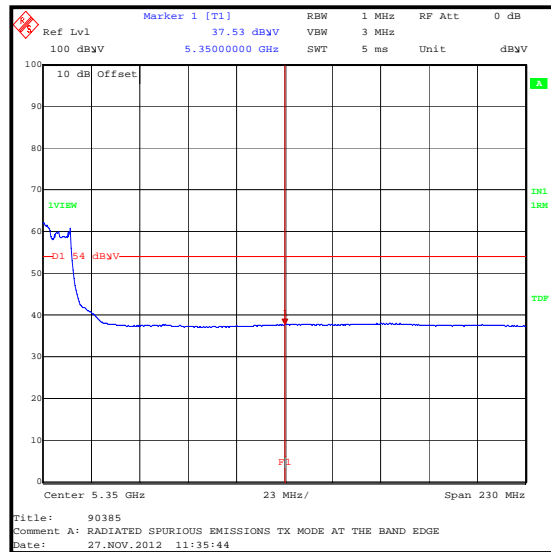

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 802.11n / 20 MHz / BPSK / 6.5 Mbps / MCS0 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	47.5	74.0	26.5	Complied
5350	48.4	74.0	25.6	Complied

Results: 802.11n / 20 MHz / BPSK / 6.5 Mbps / MCS0 / Average


Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	36.7	0.6	37.3	54.0	16.7	Complied
5350	37.4	0.6	38.0	54.0	16.0	Complied

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)


Results: 802.11n / 20 MHz / BPSK / 6.5 Mbps / MCS0

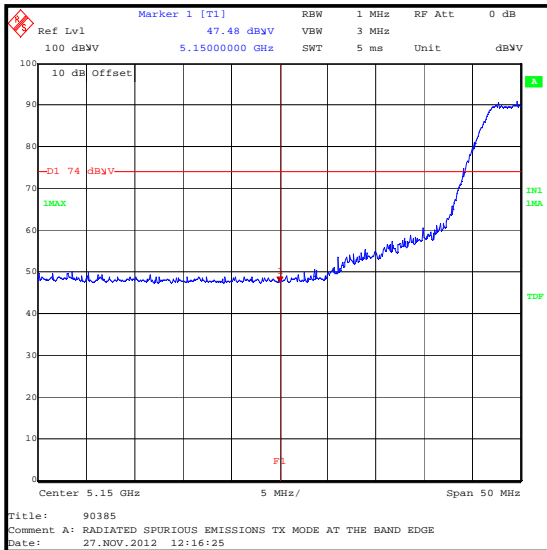


Lower Band Edge Peak Measurement

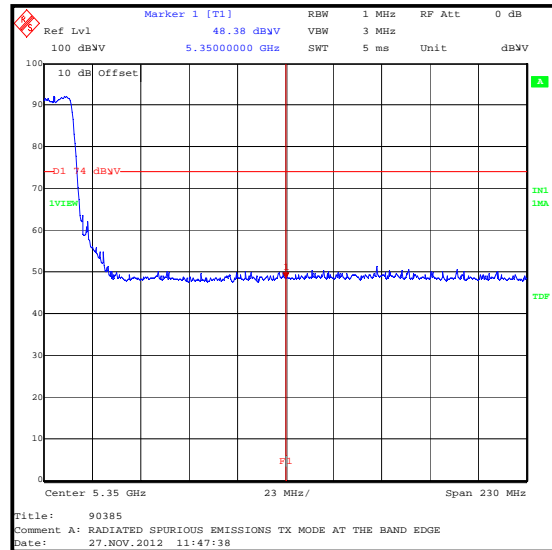

Upper Band Edge Peak Measurement

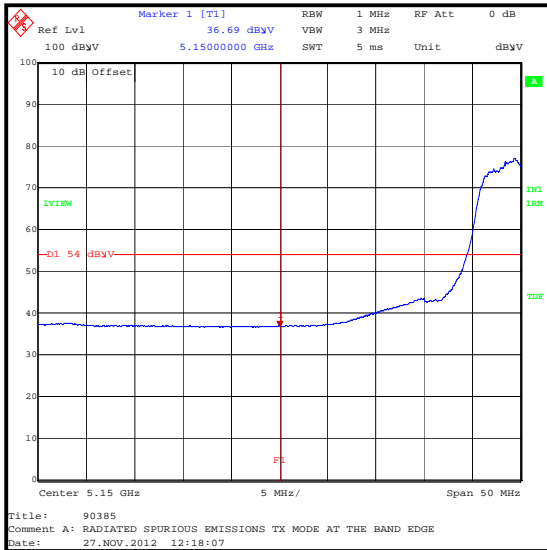

Lower Band Edge Average Measurement

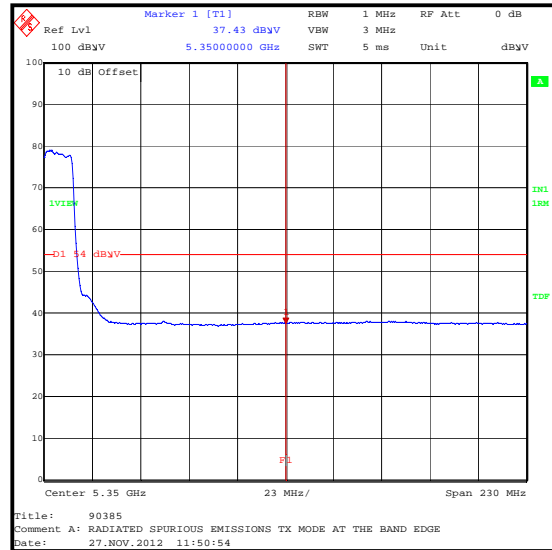

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	47.1	74.0	26.9	Complied
5350	48.8	74.0	25.2	Complied

Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7 / Average


Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	36.4	3.5	39.9	54.0	14.1	Complied
5350	37.5	3.5	41.0	54.0	13.0	Complied

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)


Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7

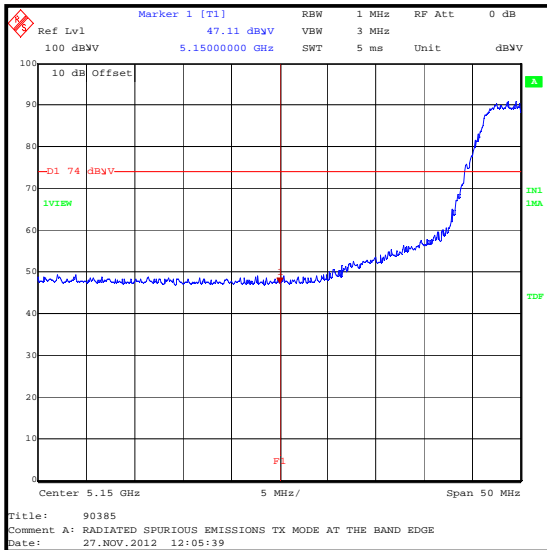


Lower Band Edge Peak Measurement

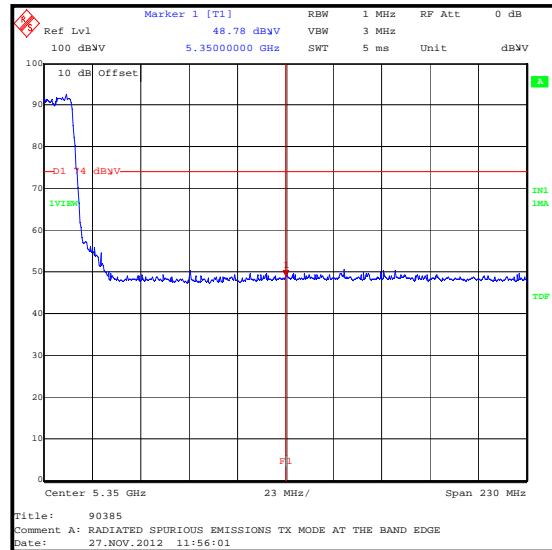

Upper Band Edge Peak Measurement

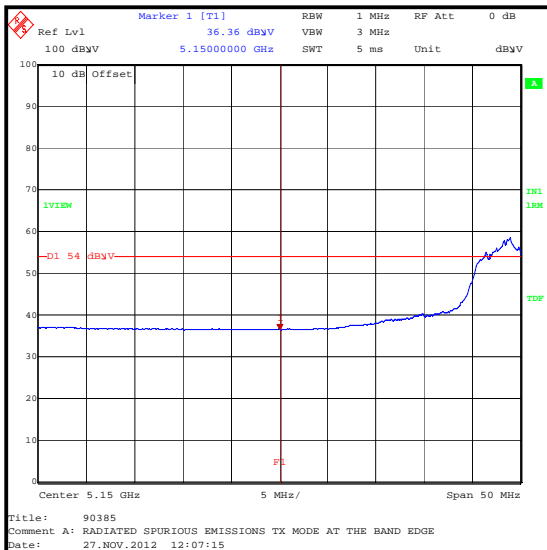

Lower Band Edge Average Measurement

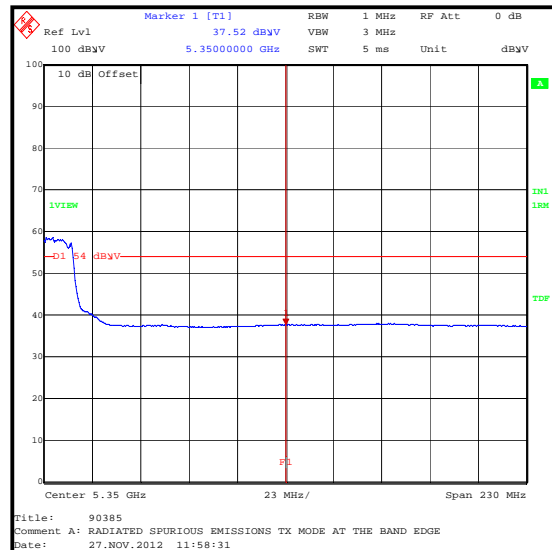

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 802.11n / 40 MHz / BPSK / 13.5 Mbps / MCS0 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	50.8	74.0	23.2	Complied
5350	48.5	74.0	25.5	Complied

Results: 802.11n / 40 MHz / BPSK / 13.5 Mbps / MCS0 / Average


Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	38.0	0.6	38.6	54.0	15.4	Complied
5350	37.8	0.6	38.4	54.0	15.6	Complied

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)


Results: 802.11n / 40 MHz / BPSK / 13.5 Mbps / MCS0

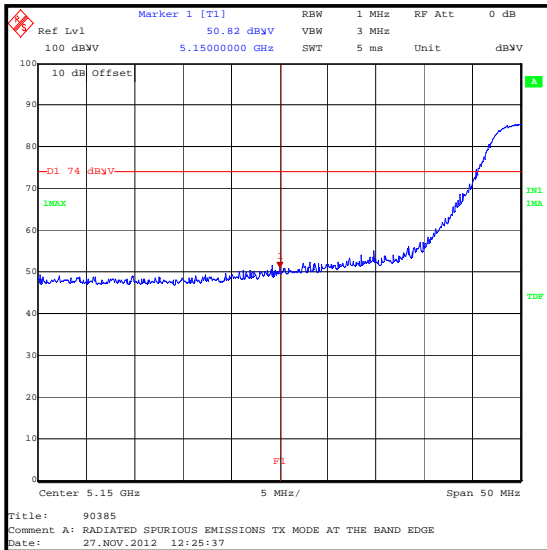


Lower Band Edge Peak Measurement

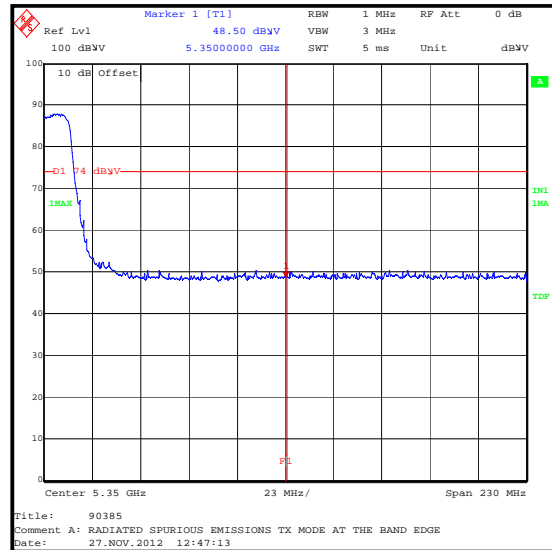

Upper Band Edge Peak Measurement

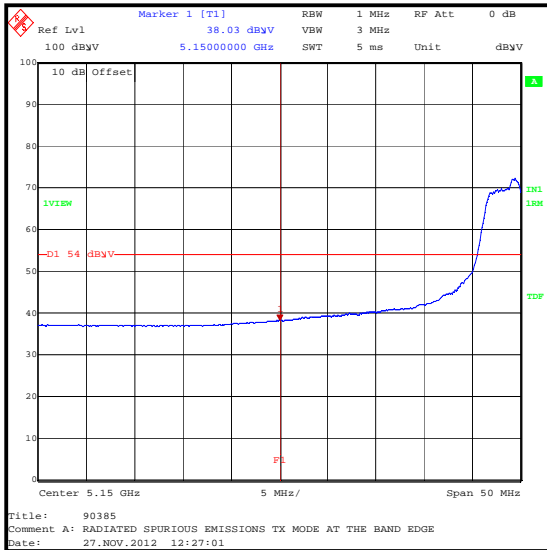

Lower Band Edge Average Measurement

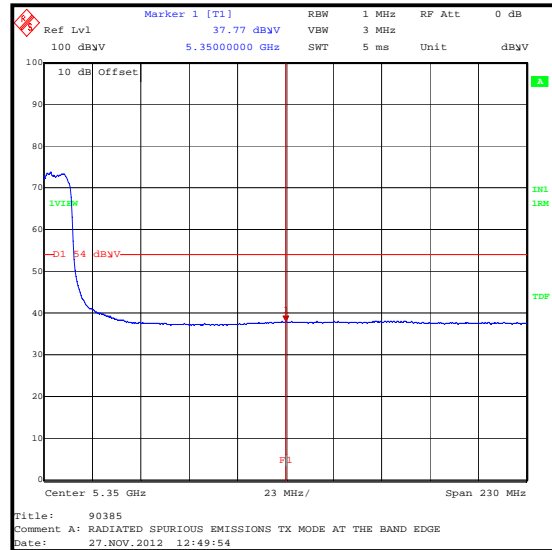

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)**Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	50.1	74.0	23.9	Complied
5350	49.6	74.0	24.4	Complied

Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7 / Average


Frequency (MHz)	Level (dB μ V/m)	Duty cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	37.1	3.4	40.5	54.0	13.5	Complied
5350	37.8	3.4	41.2	54.0	12.8	Complied

Transmitter Band Edge Radiated Emissions (5.15-5.25 GHz band operation) (continued)


Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7

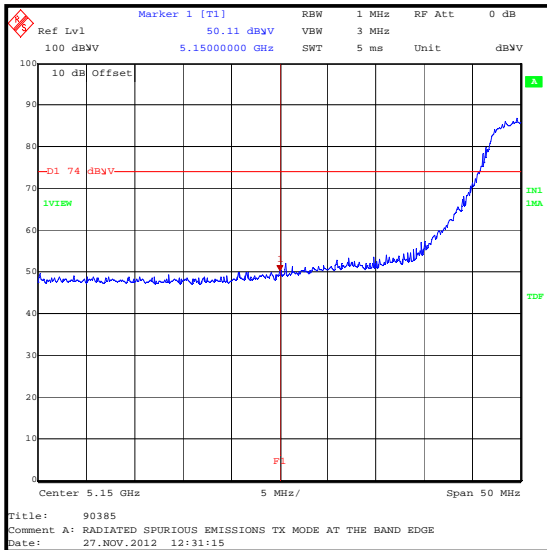


Lower Band Edge Peak Measurement

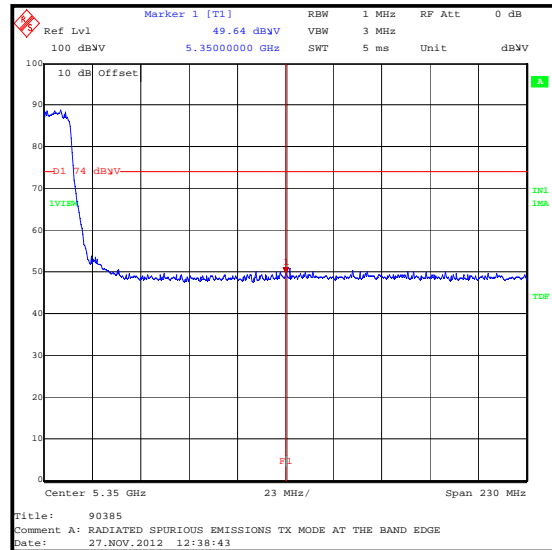

Upper Band Edge Peak Measurement

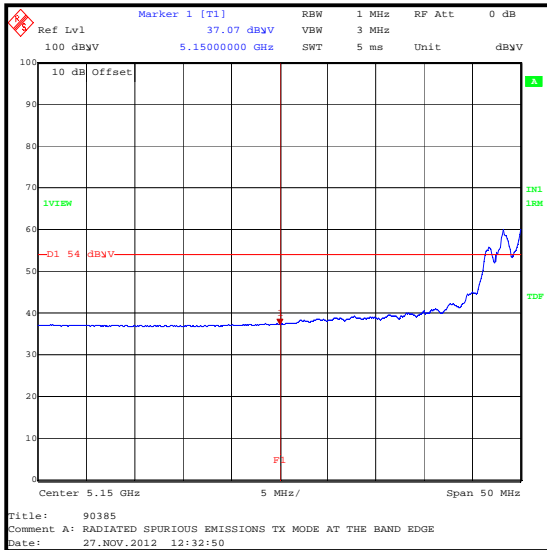

Lower Band Edge Average Measurement

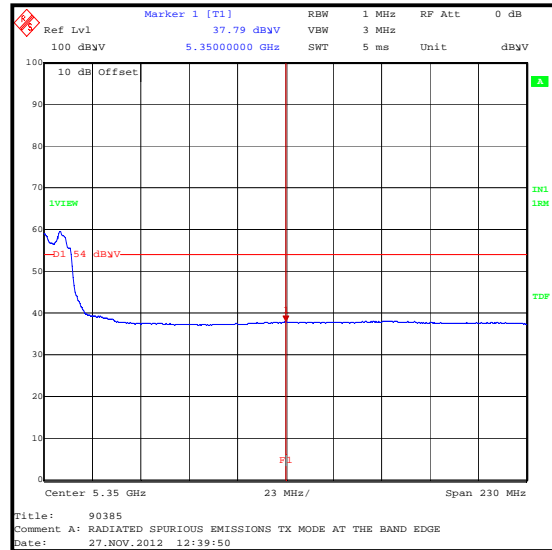

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band)**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	27 November 2012
Test Sample IMEI:	353740050011927		

FCC Reference:	Parts 15.407(b)(2), 15.407(b)(7), 15.205 & 15.209(a)
Test Method Used:	ANSI C63.10 Section 6.9.2 & FCC KDB 789033 G)

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	37

Note(s):

1. FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012) confirmed band edge measurements need only be performed in the EUT modes that produce the highest power and the widest bandwidths. The modes that produced the highest power and widest bandwidth were:
 - 802.11a - BPSK / 9 Mbps & 64QAM / 54 Mbps.
 - 802.11n HT20 - BPSK / 6.5 Mbps / MCS0 & 64QAM / 65 Mbps / MCS7.
 - 802.11n HT40 - BPSK / 13.5 Mbps / MCS0 & 64QAM / 135 Mbps / MCS7.
2. Lower band edge measurements were performed with the EUT transmitting on the bottom channel. Upper band edge measurements were performed with the EUT transmitting on the top channel.
3. For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also above the upper band edge at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply.
4. Field strength measurements using peak and average detectors were performed in the restricted bands below 5.15 GHz and above 5.35 GHz. Field strength and EIRP results were found to be compliant with the restricted band limits and Part 15.407 out-of-band limits.
5. For average measurements the duty cycle correction factor calculated in section 5.2.5 was added to the measured result as the duty cycle was < 98 %.
7. As the duty cycle was < 98 %, the average measurements were performed using the number of sweeps declared below;
 - 802.11a / BPSK / 9Mbps – 120 sweeps
 - 802.11a / 64QAM / 54Mbps – 207 sweeps
 - 802.11n HT20 / BPSK / 6.5 Mbps / MCS0 – 114 sweeps
 - 802.11n HT20 / 64QAM / 65 Mbps / MCS7 – 224 sweeps
 - 802.11n HT40 / BPSK / 13.5 Mbps / MCS0 – 115 sweeps
 - 802.11n HT40 / 64QAM / 135 Mbps / MCS7 – 217 sweeps

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11a / 20 MHz / BPSK / 9 Mbps / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	47.0	74.0	27.0	Complied
5350	56.1	74.0	17.9	Complied

Results: 802.11a / 20 MHz / BPSK / 9 Mbps / Average


Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	36.4	0.8	37.2	54.0	16.8	Complied
5350	38.4	0.8	39.2	54.0	14.8	Complied

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)


Results: 802.11a / 20 MHz / BPSK / 9 Mbps

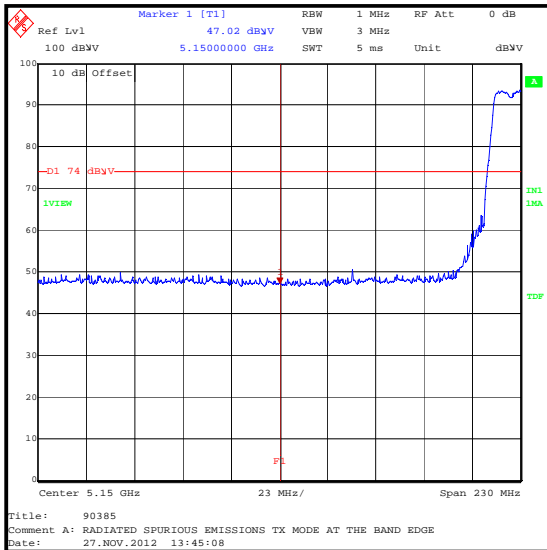


Lower Band Edge Peak Measurement

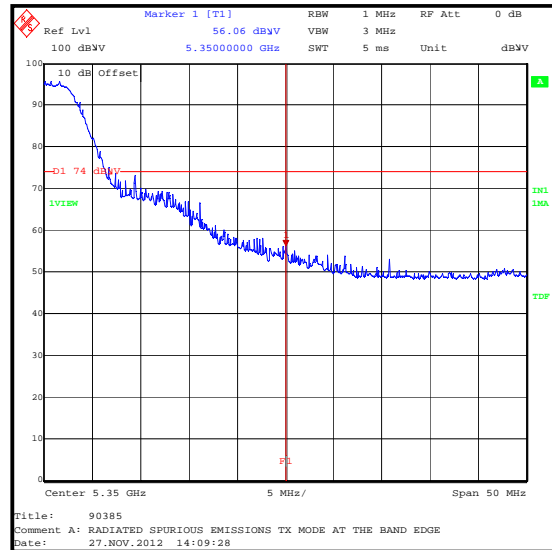

Upper Band Edge Peak Measurement

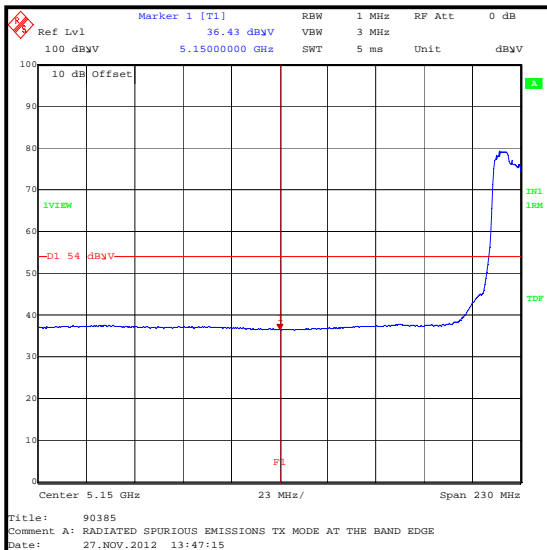

Lower Band Edge Average Measurement

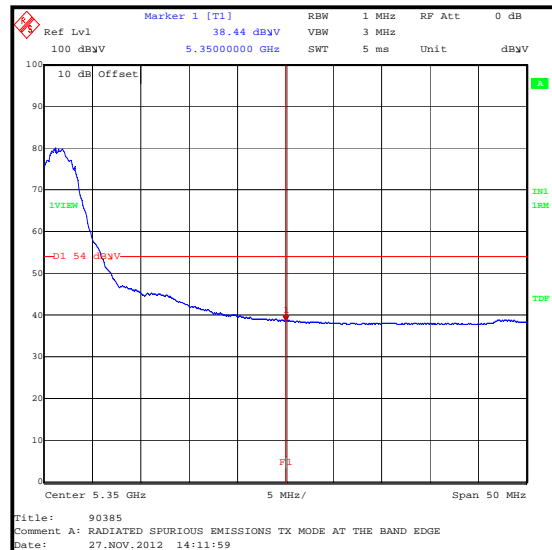

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11a / 20 MHz / 64QAM / 54 Mbps / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	47.5	74.0	26.5	Complied
5350	53.7	74.0	20.3	Complied
5351.102	55.1	74.0	18.9	Complied

Results: 802.11a / 20 MHz / 64QAM / 54 Mbps / Average


Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	36.2	3.2	39.4	54.0	14.6	Complied
5350	38.2	3.2	41.4	54.0	12.6	Complied

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)


Results: 802.11a / 20 MHz / 64QAM / 54 Mbps

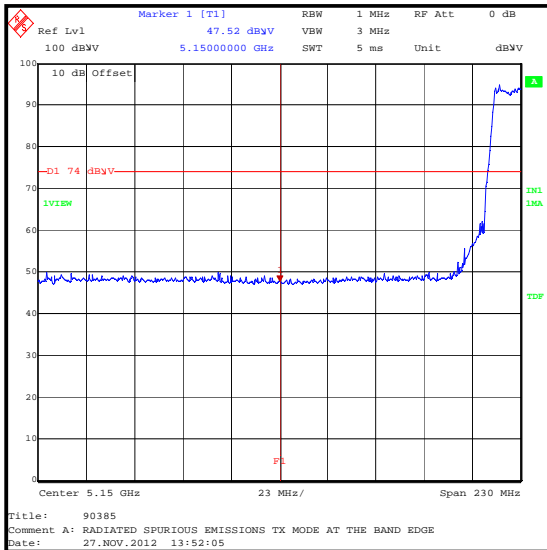


Lower Band Edge Peak Measurement

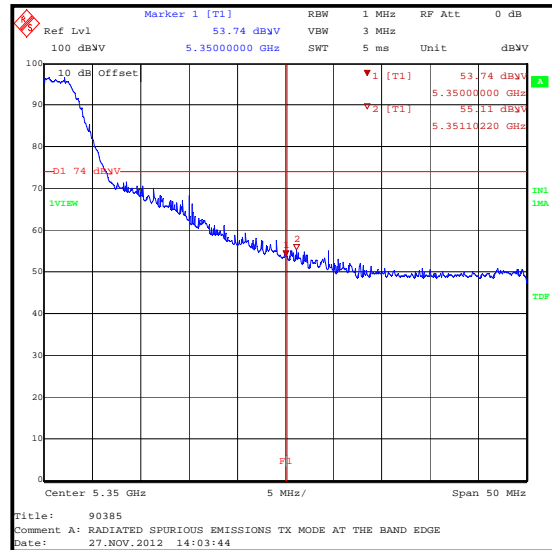

Upper Band Edge Peak Measurement

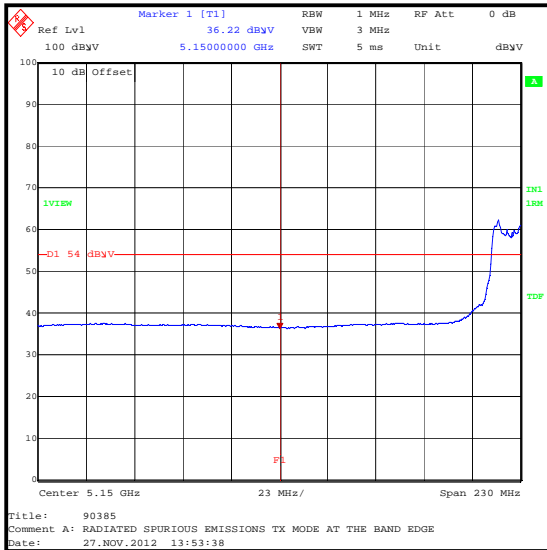

Lower Band Edge Average Measurement

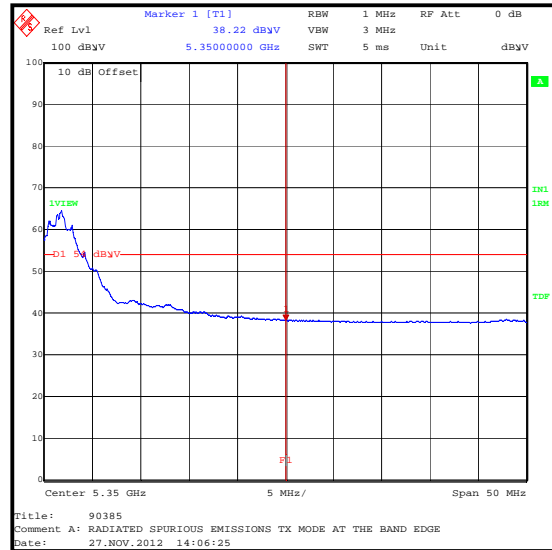

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 20 MHz / BPSK / 6.5 Mbps / MCS0 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	47.5	74.0	26.5	Complied
5350	51.6	74.0	22.4	Complied
5352.455	55.8	74.0	18.2	Complied

Results: 802.11n / 20 MHz / BPSK / 6.5 Mbps / MCS0 / Average


Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	36.3	0.6	36.9	54.0	17.1	Complied
5350	38.1	0.6	38.7	54.0	15.3	Complied

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)


Results: 802.11n / 20 MHz / BPSK / 6.5 Mbps / MCS0

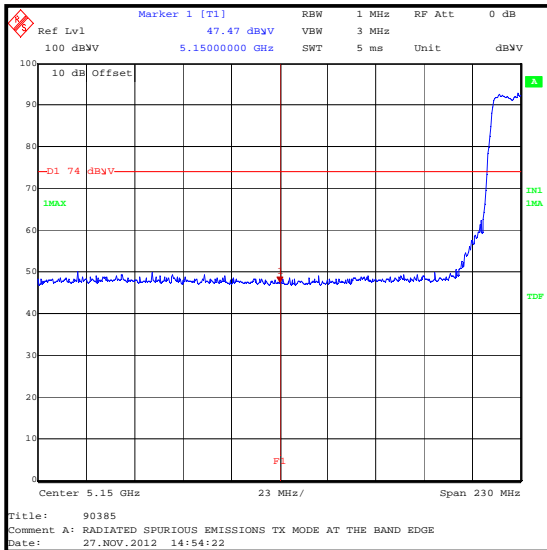


Lower Band Edge Peak Measurement

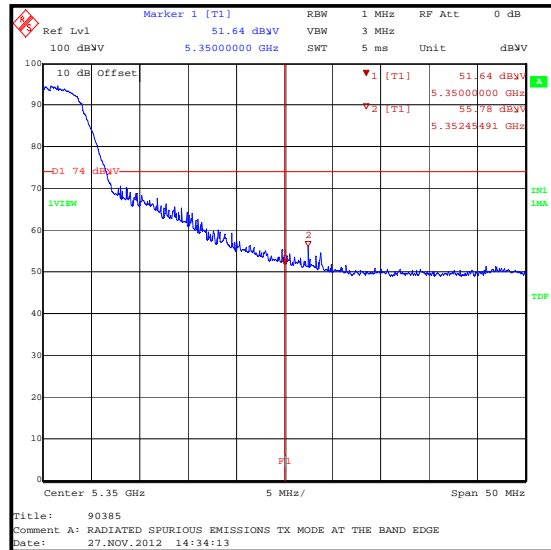

Upper Band Edge Peak Measurement

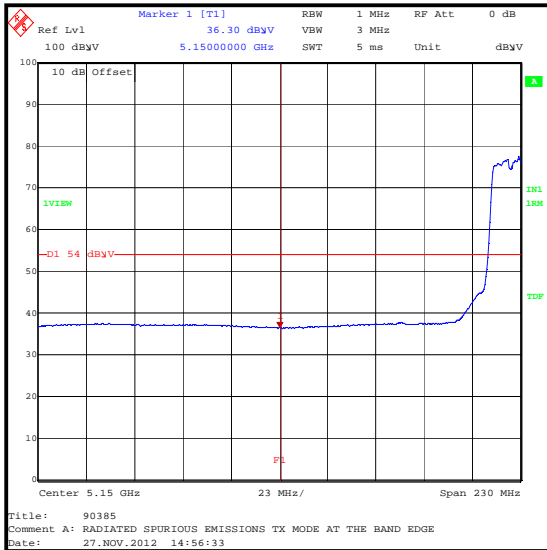

Lower Band Edge Average Measurement

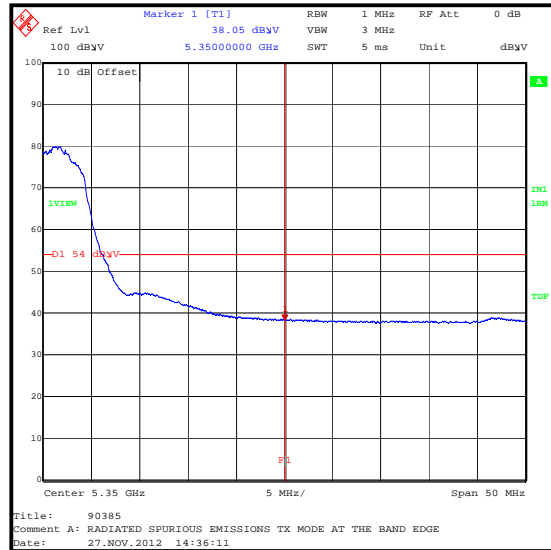

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	47.3	74.0	26.7	Complied
5350	53.5	74.0	20.5	Complied

Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7 / Average


Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	36.4	3.5	39.9	54.0	14.1	Complied
5350	37.8	3.5	41.3	54.0	12.7	Complied

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)


Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7

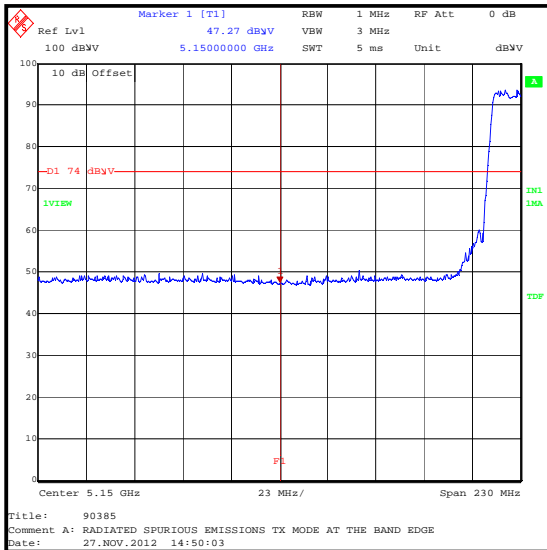


Lower Band Edge Peak Measurement

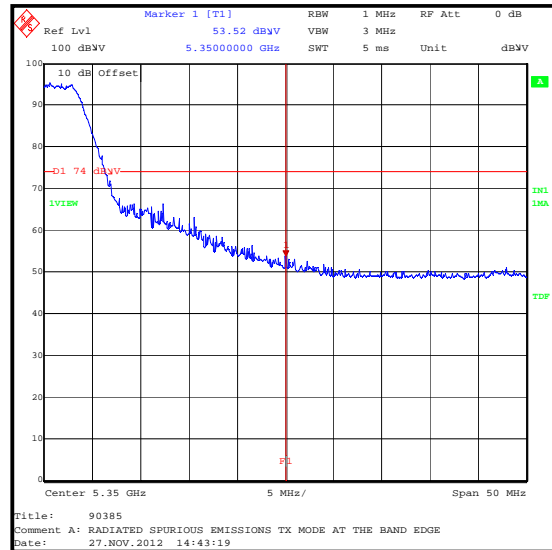

Upper Band Edge Peak Measurement

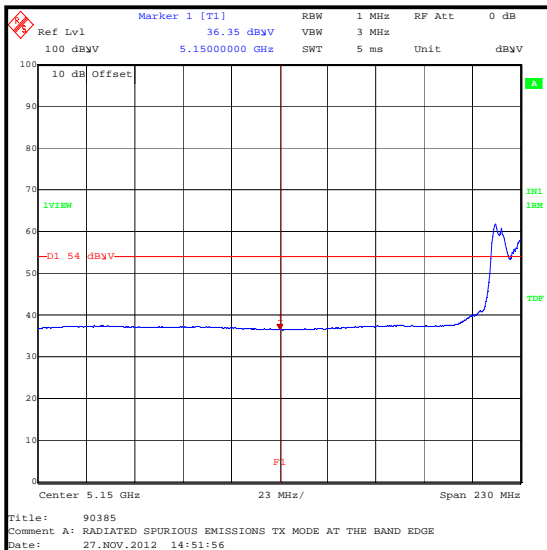

Lower Band Edge Average Measurement

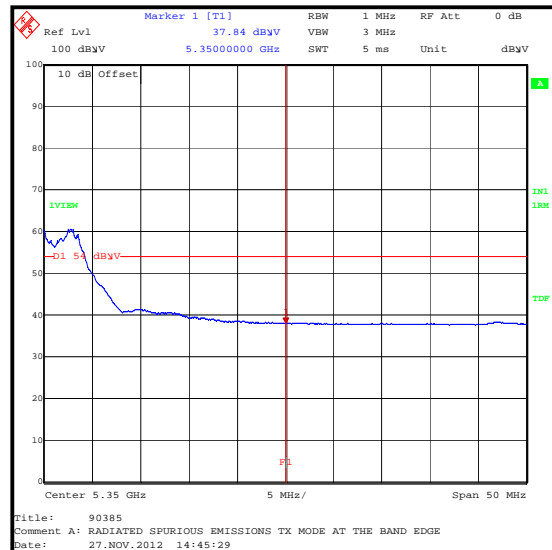

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 40 MHz / BPSK / 13.5 Mbps / MCS0 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	47.9	74.0	26.1	Complied
5350	52.5	74.0	21.5	Complied
5353.657	54.7	74.0	19.3	Complied

Results: 802.11n / 40 MHz / BPSK / 13.5 Mbps / MCS0 / Average


Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	36.5	0.6	37.1	54.0	16.9	Complied
5350	38.8	0.6	39.4	54.0	14.6	Complied

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)


Results: 802.11n / 40 MHz / BPSK / 13.5 Mbps / MCS0

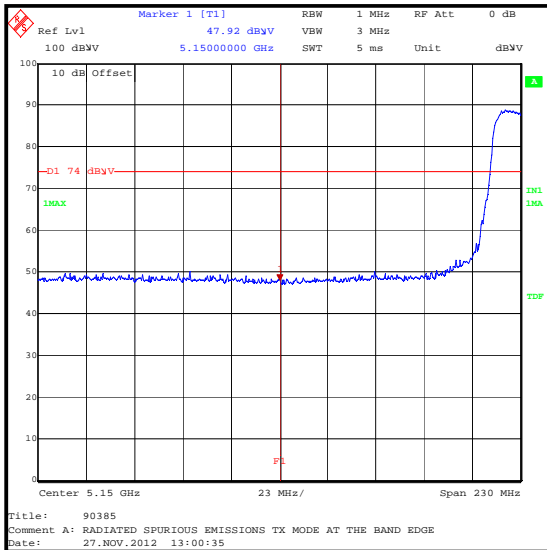


Lower Band Edge Peak Measurement

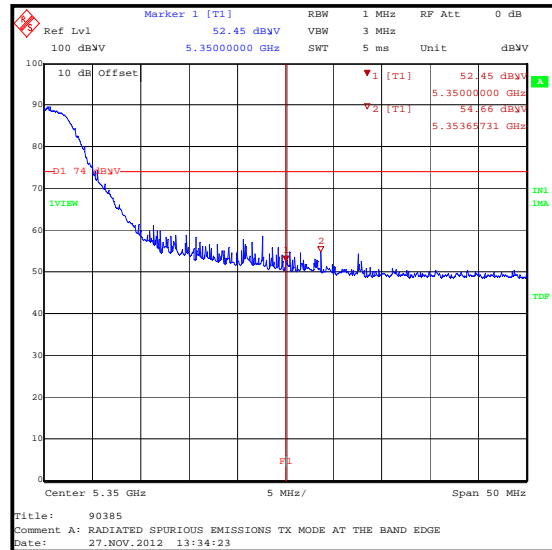

Upper Band Edge Peak Measurement

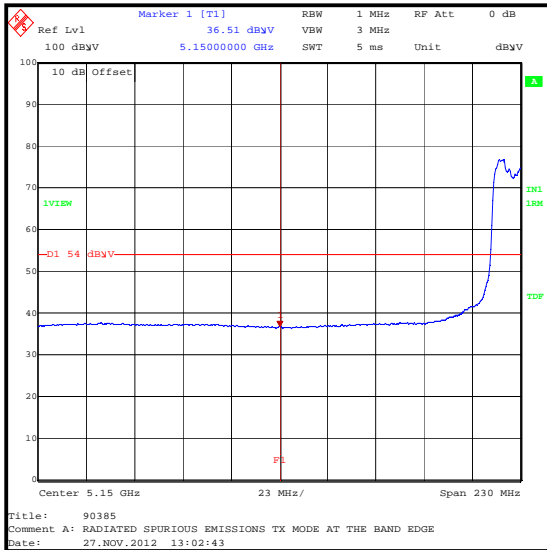

Lower Band Edge Average Measurement

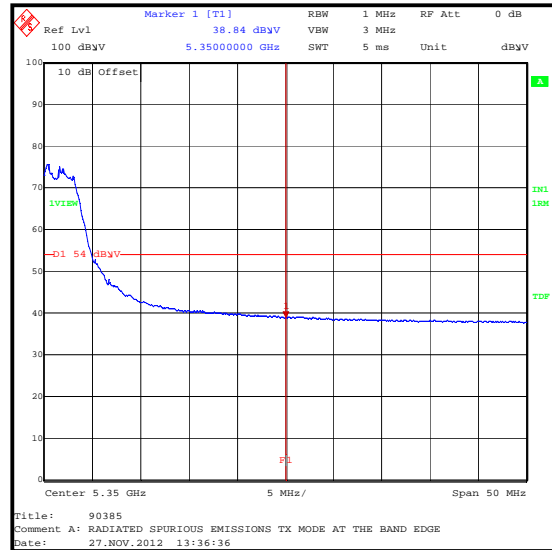

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)**Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7 / Peak**


Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	47.1	74.0	26.9	Complied
5350	50.6	74.0	23.4	Complied
5351.804	52.0	74.0	22.0	Complied

Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7 / Average


Frequency (MHz)	Level (dB μ V/m)	Duty Cycle correction (dB)	Corrected Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5150	36.5	3.4	39.9	54.0	14.1	Complied
5350	38.2	3.4	41.6	54.0	12.4	Complied

Transmitter Band Edge Radiated Emissions (5.25-5.35 GHz band operation) (continued)


Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7

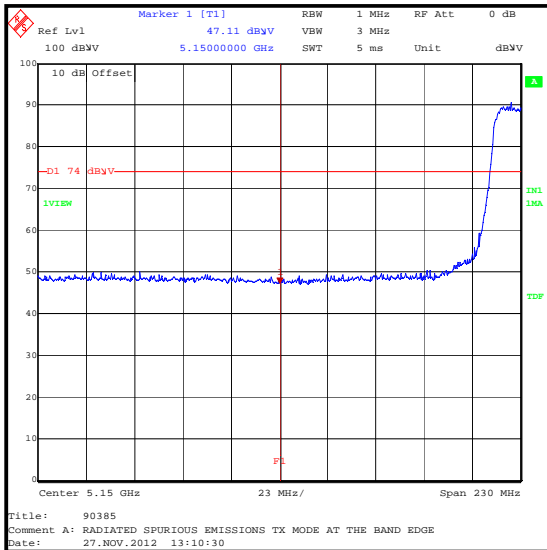


Lower Band Edge Peak Measurement

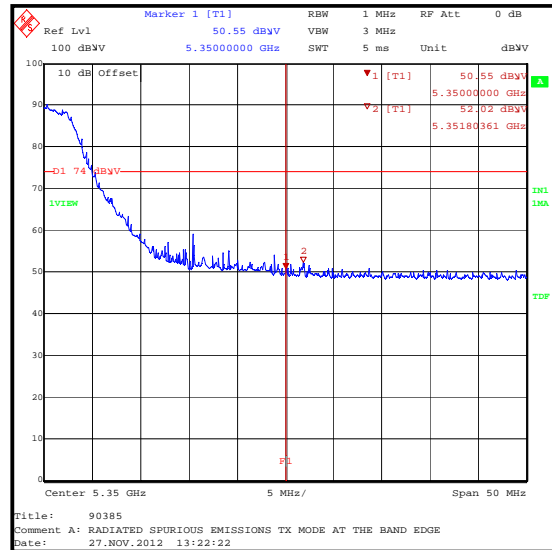

Upper Band Edge Peak Measurement

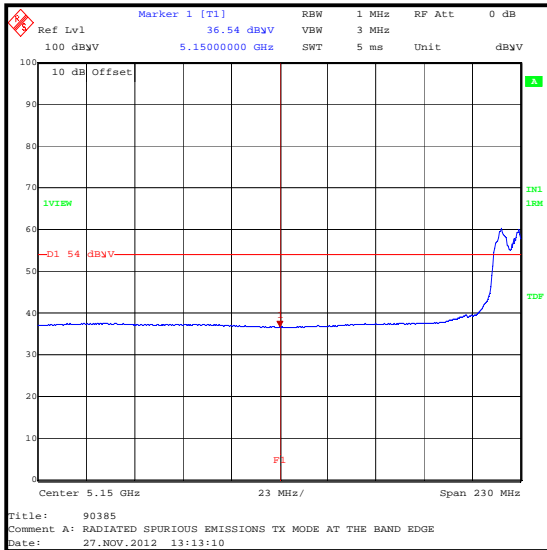

Lower Band Edge Average Measurement

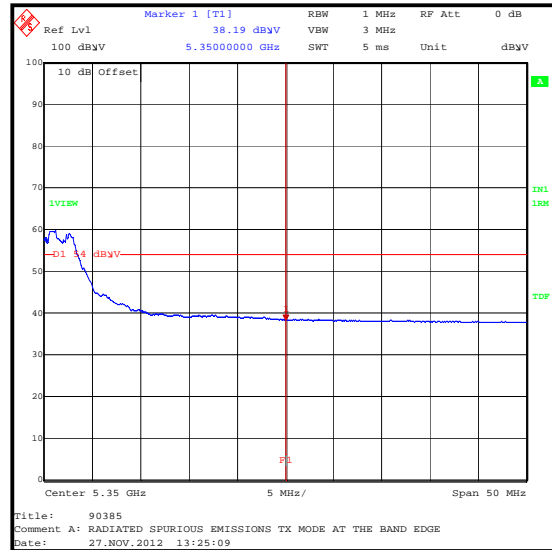

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band)**Test Summary:**

Test Engineer:	Andrew Edwards	Test Date:	27 November 2012
Test Sample IMEI:	353740050011927		

FCC Reference:	Parts 15.407(b)(3), 15.407(b)(7), 15.205 & 15.209(a)
Test Method Used:	ANSI C63.10 Section 6.9.2 & FCC KDB 789033 G)

Environmental Conditions:

Temperature (°C):	24
Relative Humidity (%):	36

Note(s):


- FCC Response to Inquiry (Tracking Number 917954 / Date: 14th February 2012) confirmed band edge measurements need only be performed in the EUT modes that produce the highest power and the widest bandwidths. The modes that produced the highest power and widest bandwidth were:
 - 802.11a - BPSK / 9 Mbps & 64QAM / 54 Mbps.
 - 802.11n HT20 - BPSK / 6.5 Mbps / MCS0 & 64QAM / 65 Mbps / MCS7.
 - 802.11n HT40 - BPSK / 13.5 Mbps / MCS0 & 64QAM / 135 Mbps / MCS7.
- Lower band edge measurements were performed with the EUT transmitting on the bottom channel. Upper band edge measurements were performed with the EUT transmitting on the top channel.
- For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz. However, there are restricted bands of operation below the lower band edge at 4.5-5.15 GHz and also at 5.35-5.46 GHz therefore the provisions of FCC Part 15.205 apply. Tests were performed in these restricted bands of operation with the EUT transmitting on the bottom and top channels within 5.47-5.725 GHz band, the results are included in the transmitter 5.47-5.725 GHz band radiated spurious emissions section of this test report.
- Field strength measurements using peak and average detectors were performed in the restricted bands below 5.15 GHz and above 5.35 GHz. Field strength and EIRP results were found to be compliant with the restricted band limits and Part 15.407 out-of-band limits.
- For completeness, results are also shown as EIRP measured at a distance of 3 metres in dBm and also as field strength in dBµV/m. Measured field strength was converted to EIRP in accordance with FCC KDB 789033G)3)d)(iii) using a conversion factor of 95.2.

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)


Results: 802.11a / 20 MHz / BPSK / 9 Mbps / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5470	-45.4	-27.0	18.4	Complied
5725	-43.8	-27.0	16.8	Complied
5730.461	-42.5	-27.0	15.5	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5470	49.8	68.2	18.4	Complied
5725	51.4	68.2	16.8	Complied
5730.461	52.7	68.2	15.5	Complied

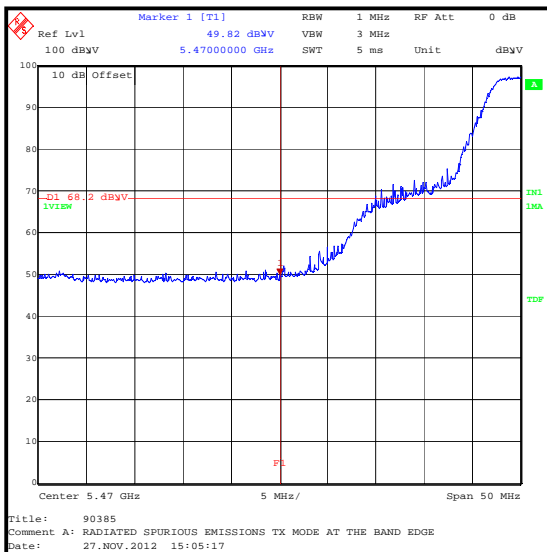

Lower Band Edge Measurement

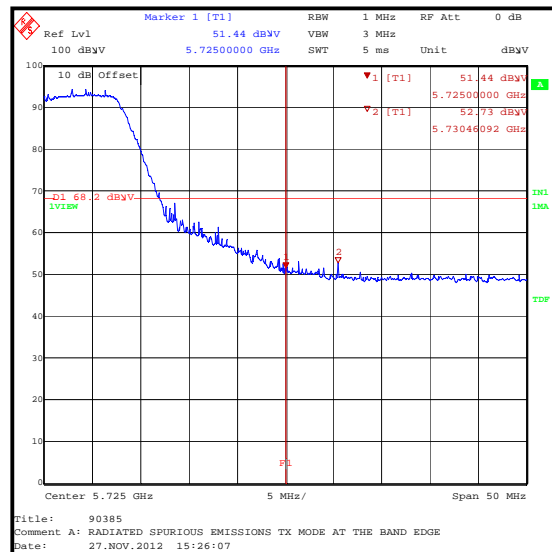


Upper Band Edge Measurement

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)


Results: 802.11a / 20 MHz / 64QAM / 54 Mbps / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5470	-46.0	-27.0	19.0	Complied
5725	-43.4	-27.0	16.4	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5470	49.2	68.2	19.0	Complied
5725	51.8	68.2	16.4	Complied

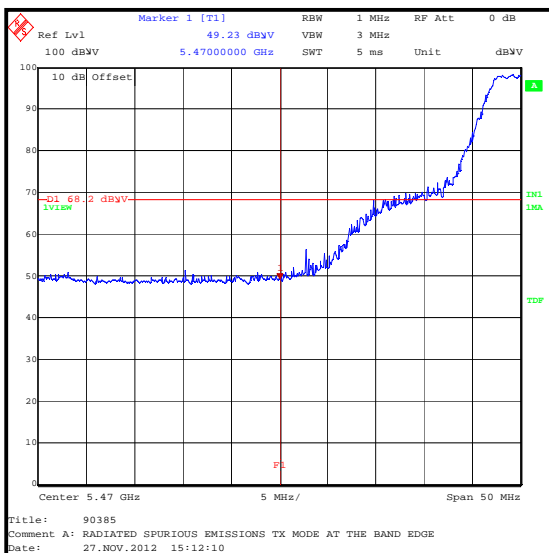

Lower Band Edge Measurement

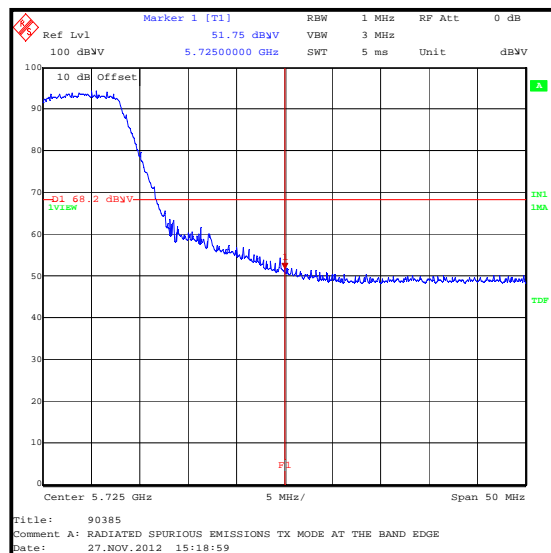


Upper Band Edge Measurement

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)


Results: 802.11n / 20 MHz / BPSK / 6.5 Mbps / MCS0 / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5470	-45.4	-27.0	18.4	Complied
5725	-44.8	-27.0	17.8	Complied
5727.856	-43.7	-27.0	16.7	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5470	49.8	68.2	18.4	Complied
5725	50.4	68.2	17.8	Complied
5727.856	51.5	68.2	16.7	Complied

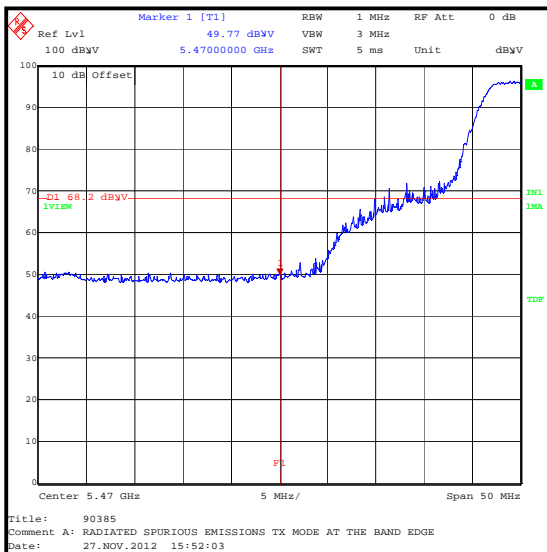

Lower Band Edge Measurement

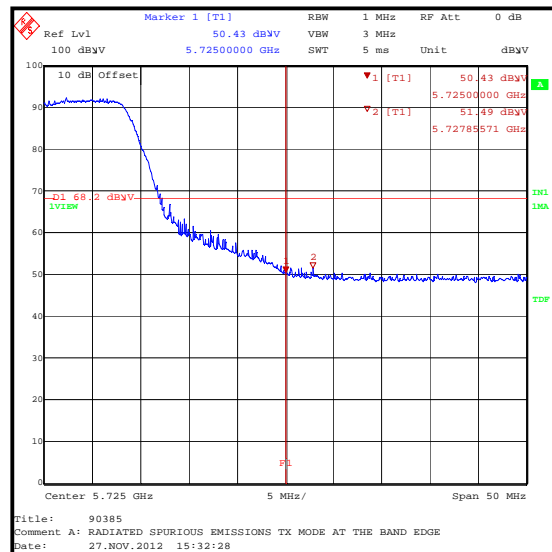


Upper Band Edge Measurement

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)


Results: 802.11n / 20 MHz / 64QAM / 65 Mbps / MCS7 / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5469.198	-44.3	-27.0	17.3	Complied
5470	-45.5	-27.0	18.5	Complied
5725	-44.0	-27.0	17.0	Complied
5728.457	-43.3	-27.0	16.3	Complied

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
5469.198	50.9	68.2	17.3	Complied
5470	49.7	68.2	18.5	Complied
5725	51.2	68.2	17.0	Complied
5728.457	51.9	68.2	16.3	Complied

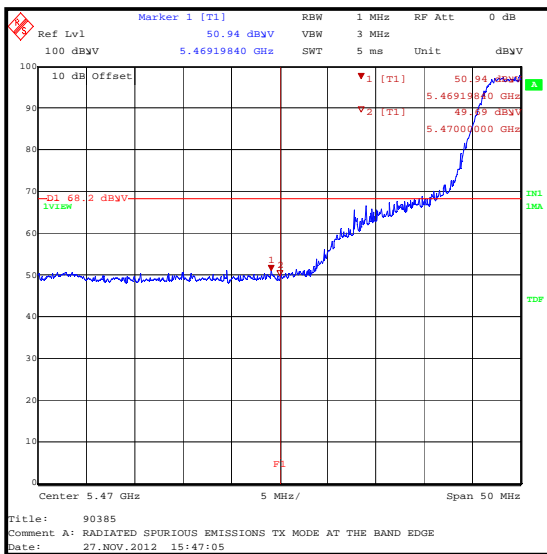

Lower Band Edge Measurement

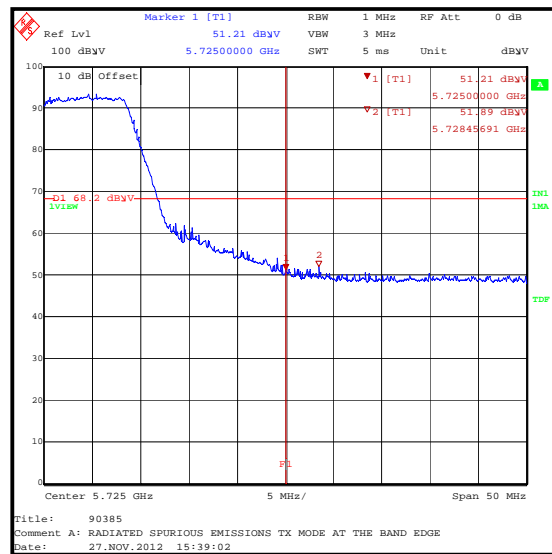


Upper Band Edge Measurement

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)


Results: 802.11n / 40 MHz / BPSK / 13.5 Mbps / MCS0 / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5469.198	-35.3	-27.0	8.3	Complied
5470	-38.1	-27.0	11.1	Complied
5725	-46.7	-27.0	19.7	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5469.198	59.9	68.2	8.3	Complied
5470	57.1	68.2	11.1	Complied
5725	48.5	68.2	19.7	Complied

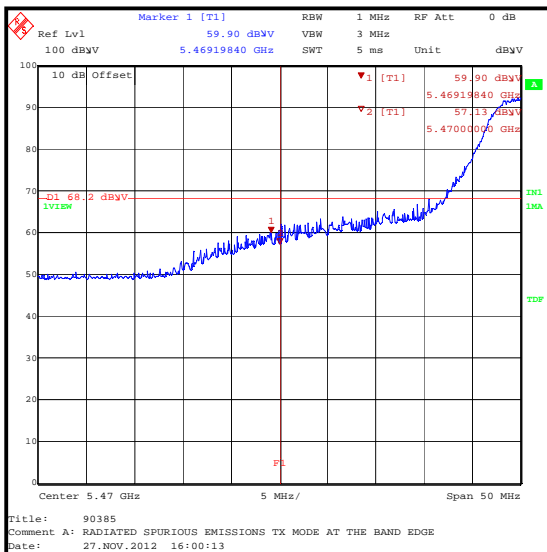

Lower Band Edge Measurement

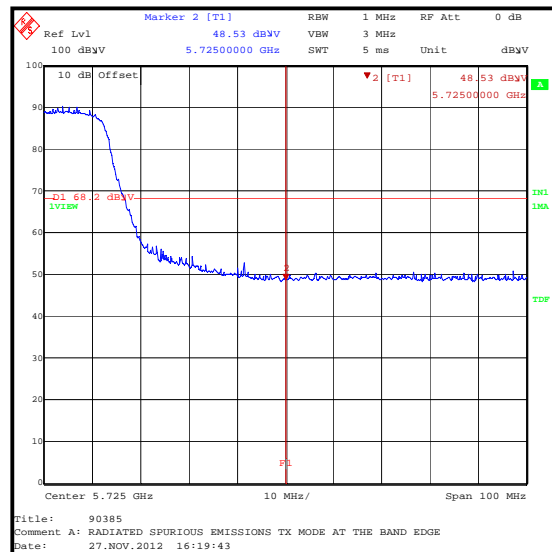


Upper Band Edge Measurement

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)


Results: 802.11n / 40 MHz / 64QAM / 135 Mbps / MCS7 / Peak

Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
5468.597	-36.6	-27.0	9.6	Complied
5470	-38.6	-27.0	11.6	Complied
5725	-46.5	-27.0	19.5	Complied

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
5468.597	58.6	68.2	9.6	Complied
5470	56.6	68.2	11.6	Complied
5725	48.7	68.2	19.5	Complied

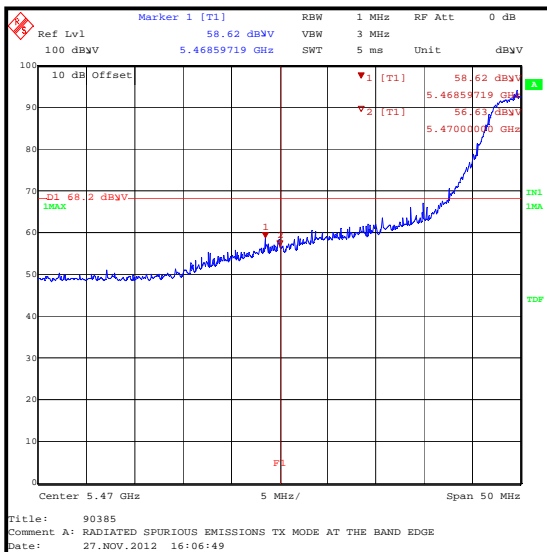

Lower Band Edge Measurement

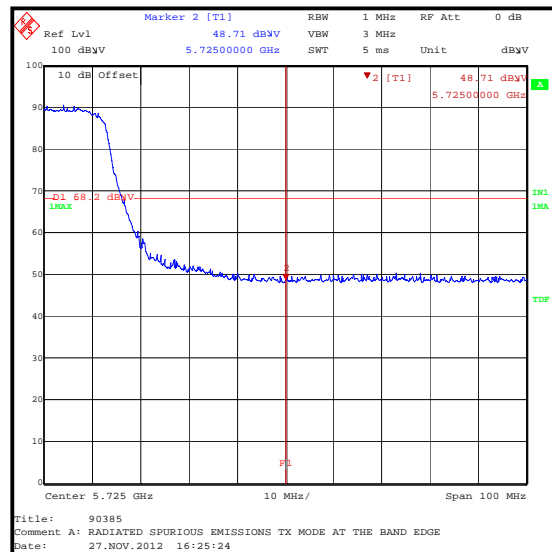

Upper Band Edge Measurement

Transmitter Band Edge Radiated Emissions (5.47-5.725 GHz band operation) (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	06 Jul 2013	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	04 Nov 2013	12
A253	Antenna	Flann Microwave	12240-20	128	04 Nov 2013	12
K0002	3m RSE Chamber	Rainford	N/A	N/A	04 Nov 2013	12
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
Maximum Conducted Output Power	5.15 GHz to 5.725 GHz	95%	±0.28 dB
Peak Power Spectral Density	5.15 GHz to 5.725 GHz	95%	±0.28 dB
Peak Excursion	5.15 GHz to 5.725 GHz	95%	±0.28 dB
26 dB Emission Bandwidth	5.15 GHz to 5.725 GHz	95%	±0.92 ppm
Radiated Spurious Emissions	30 MHz to 40 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version