



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663

Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: ee.guangzhou@sgs.com

Report No.: GZEM180600322001
Page: 1 of 60
FCC ID: UCZ-LWB6801-W

TEST REPORT

Application No.: GZEM1806003220CR
Applicant: Lorex Technology Inc.
Address of Applicant: 250 Royal Crest Court, Markham, ON L3R 3S1 Canada
Manufacturer: Lorex Technology Inc.
Address of Manufacturer: 250 Royal Crest Court, Markham, ON L3R 3S1 Canada
Factory: Lorex Technology Inc.
Address of Factory: 250 Royal Crest Court, Markham, ON L3R 3S1 Canada
Equipment Under Test (EUT):
FCC ID: UCZ-LWB6801-W
EUT Name: 1080p USB WIRE-FREE RECEIVER G2
Model No.: LWB6801-W
Trade Mark: LOREX
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2018-06-12
Date of Test: 2018-06-29 to 2018-07-11
Date of Issue: 2018-08-23

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Kobe Jian

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180600322001
Page: 2 of 60

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-08-23		Original

Authorized for issue by:			
Tested By	 Jackson_Yuan /Project Engineer	2018-06-29 to 2018-07-11	Date
Checked By	 Ricky_Liu /Reviewer	2018-07-20	Date



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.....	6
4.2 Environment parameter	6
4.3 Description of Support Units	8
4.4 Measurement Uncertainty.....	8
4.5 Test Location	8
4.6 Test Facility.....	9
4.7 Deviation from Standards	10
4.8 Abnormalities from Standard Conditions	10
5 Equipment List	11
6 Radio Spectrum Technical Requirement	15
6.1 Antenna Requirement.....	15
6.1.1 Test Requirement:.....	15
6.1.2 Conclusion.....	15
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	16
6.2.1 Test Requirement:.....	16
6.2.2 Conclusion.....	16
7 Radio Spectrum Matter Test Results	17
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	17
7.1.1 E.U.T. Operation.....	18
7.1.2 Test Setup Diagram.....	18
7.1.3 Measurement Procedure and Data	18
7.2 Conducted Peak Output Power	21
7.2.1 E.U.T. Operation.....	21
7.2.2 Test Setup Diagram.....	21
7.2.3 Measurement Procedure and Data	21
7.3 20dB Bandwidth.....	22
7.3.1 E.U.T. Operation.....	22
7.3.2 Test Setup Diagram.....	22
7.3.3 Measurement Procedure and Data	22
7.4 Carrier Frequencies Separation.....	23
7.4.1 E.U.T. Operation.....	23
7.4.2 Test Setup Diagram.....	23
7.4.3 Measurement Procedure and Data	23
7.5 Hopping Channel Number	24
7.5.1 E.U.T. Operation.....	24
7.5.2 Test Setup Diagram.....	24
7.5.3 Measurement Procedure and Data	24
7.6 Dwell Time	25
7.6.1 E.U.T. Operation.....	25



7.6.2	Test Setup Diagram.....	25
7.6.3	Measurement Procedure and Data	25
7.7	Conducted Band Edges Measurement.....	26
7.7.1	E.U.T. Operation.....	27
7.7.2	Test Setup Diagram.....	27
7.7.3	Measurement Procedure and Data	27
7.8	Conducted Spurious Emissions.....	28
7.8.1	E.U.T. Operation.....	28
7.8.2	Test Setup Diagram.....	28
7.8.3	Measurement Procedure and Data	28
7.9	Radiated Emissions which fall in the restricted bands.....	29
7.9.1	E.U.T. Operation.....	30
7.9.2	Test Setup Diagram.....	30
7.9.3	Measurement Procedure and Data	31
7.10	Radiated Spurious Emissions.....	34
7.10.1	E.U.T. Operation	35
7.10.2	Test Setup Diagram	35
7.10.3	Measurement Procedure and Data.....	36
8	Appendix	41
8.1	Appendix 15.247	41

4 General Information

4.1 Details of E.U.T.

Power Supply:	DC 5V
Test Voltage:	AC 120 V, 60Hz with NVR and DC power referred to section 4.3
Cable:	USB input cable (unshielded, <3m)
Adaptive Type	Adaptive Frequency Hopping
Antenna Gain	5 dBi
Antenna Type	Dedicate whip loaded antenna
Modulation Type	GFSK
Number of Channels	20
Operation Frequency	2410MHz to 2477MHz
Power Class	>=10mW
Spectrum Spread Technology	Frequency Hopping Spread Spectrum(FHSS)
Software Version	SecureCRT Portable V7.0.0.326

4.2 Environment parameter

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Value	Temperature(°C)	Voltage(V)
TNVN	25	5
TLVN	-10	5
THVN	45	5

Note:

VN:	Normal Voltage
TN:	Normal Temperature
TL:	Low Extreme Test Temperature
TH:	High Extreme Test Temperature



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2410MHz	6	2428MHz	11	2445MHz	16	2463MHz
2	2413MHz	7	2431MHz	12	2449MHz	17	2466MHz
3	2417MHz	8	2435MHz	13	2452MHz	18	2470MHz
4	2421MHz	9	2438MHz	14	2456MHz	19	2473MHz
5	2424MHz	10	2442MHz	15	2459MHz	20	2477MHz

Using test software was control EUT work in continuous transmitter and receiver mode, and select test channel as below:

Channel	Frequency
The lowest channel (CH1)	2410MHz
The middle channel (CH11)	2445MHz
The highest channel (CH20)	2477MHz

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Camera	Supplied by client	RS-CH2265CF-RF-28W-LR	None
DC power	ZHAOXIN	RXN-305D	REF. No.SEA2700
Laptop	Lenovo	T430u	REF. No.SEA1800
Mouse	Lenovo	M-U0025-O	REF. No.:SEA2400
NVR	Supplied by client	RS-H1104RQ-N-W-LR	None
Television	Samsung	UA32J4088AJXXZ?	0MF63TBG919802T

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	+/-5.5 x 10 ⁻⁸
2	Duty cycle	+/-0.57%
3	Occupied Bandwidth	+/-3%
4	RF Conducted power	+/-0.68dB
5	RF Power Density	+/-1.50dB
6	Conducted Spurious Emissions	+/-1.04dB
7	RF Radiated Power	+/-4.5dB (below 1GHz)
8	RF Radiated Power Radiated Spurious Emission Test	+/-4.8dB (above 1GHz)
		+/-4.5dB (30MHz-1GHz)
9	Radiated Spurious Emission Test	+/-4.8dB (1GHz-18GHz)
10	Temperature	+/-0.4 °C
11	Humidity	+/-1.3%
12	Supply Voltages	+/-1.5%
13	Time	+/-3%

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

● **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

● **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to

ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

● **FCC Recognized 2.948 Listed Test Firm(Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

● **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

● **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

● **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

● **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

20dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Carrier Frequencies Separation					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Hopping Channel Number					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Dwell Time					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM180600322001
Page: 12 of 60

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer	AgilentTechnologies	N9020A	SEM004-10	2018-03-10	2019-03-09
ESG Vector Signal Generator	Keysight	E4438C	SEM006-03	2018-04-10	2019-04-10
EXG Analog Signal Generator	AgilentTechnologies	N5171B	SEM006-04	2017-07-26	2020-07-25
Power Meter	AgilentTechnologies	U2021XA_Ch2	SEM009-02	2017-09-19	2018-09-18
Power Meter	AgilentTechnologies	U2021XA_Ch3	SEM009-03	2017-09-19	2018-09-18
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	Zhong Yu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Netwok	R&S	ENV216	EMC0118	2018-01-19	2019-01-18
LISN	SCHAFFNER CHASE	MN2050D/1	EMC0102	2017-09-20	2018-09-19
EMI Test Receiver	Rohde & Schwarz	ESCS30	EMC0506	2017-11-27	2018-11-26
Coaxial Cable	HangTianXing	2m	EMC0107	2016-07-24	2018-07-23
Voltage Probe	SGS	N/A	EMC0106	2018-04-04	2020-04-03
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
Chamber cable	HangTianXing	N/A	EMC0542	2017-06-30	2019-06-30
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-08	2019-01-07
Amplifier	HP	8447F	EMC2065	2018-06-01	2019-05-31
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2017-06-18	2019-06-18
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-11-29	2018-11-28
MXE EMI Receiver	Keysight	N9038A	EMC2139	2017-11-15	2018-11-14
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2017-11-15	2018-11-14
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
Chamber cable	HangTianXing	N/A	EMC0542	2017-06-30	2019-06-30
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-08	2019-01-07
Amplifier	HP	8447F	EMC2065	2018-06-01	2019-05-31
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2017-06-18	2019-06-18
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-11-29	2018-11-28
MXE EMI Receiver	Keysight	N9038A	EMC2139	2017-11-15	2018-11-14
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2017-11-15	2018-11-14
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2017-07-26	2018-07-25
DMM	Fluke	73	EMC0007	2017-07-26	2018-07-25

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)

6.1.2 Conclusion

Standard Requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is an antenna that uses a unique coupling to the intentional radiator as below and no consideration of replacement. The best case gain of the antenna is 5 dBi.

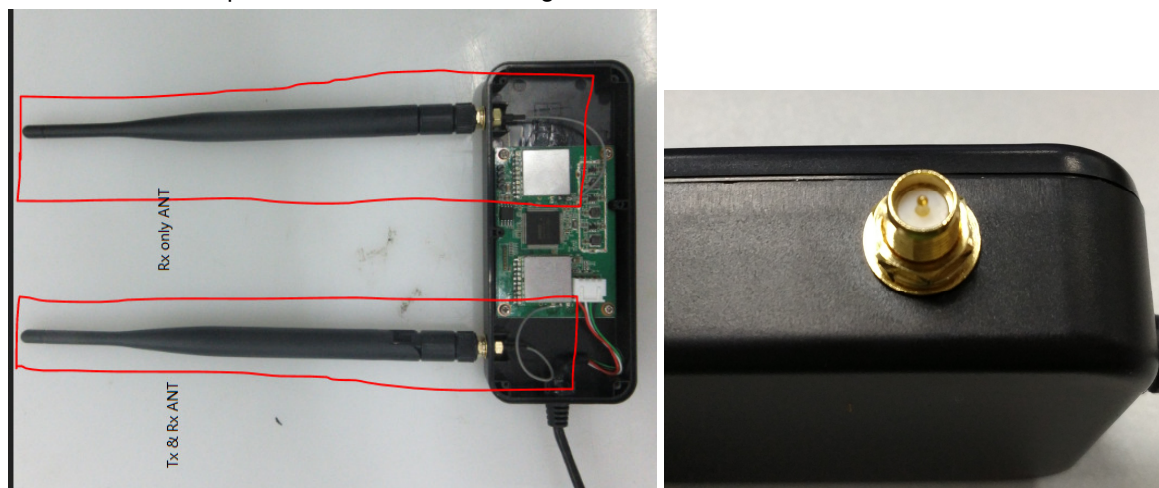

Test result: The unit does meet the FCC requirements.



6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in transmitter before hopping to another channel so that the receiver can follow.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum bands.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
Test Method: ANSI C63.10 (2013) Section 6.2
Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 23 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar

Pretest these modes to find the worst case:
a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation.
b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

The worst case for final test: a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation.

7.1.2 Test Setup Diagram

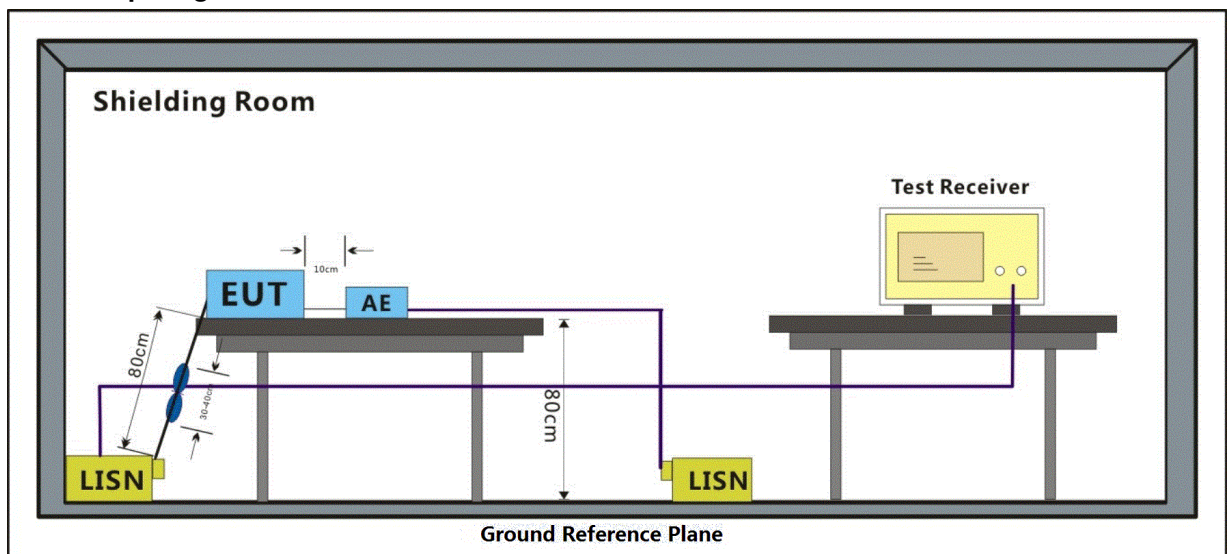


7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Mode:a; Line:Live Line

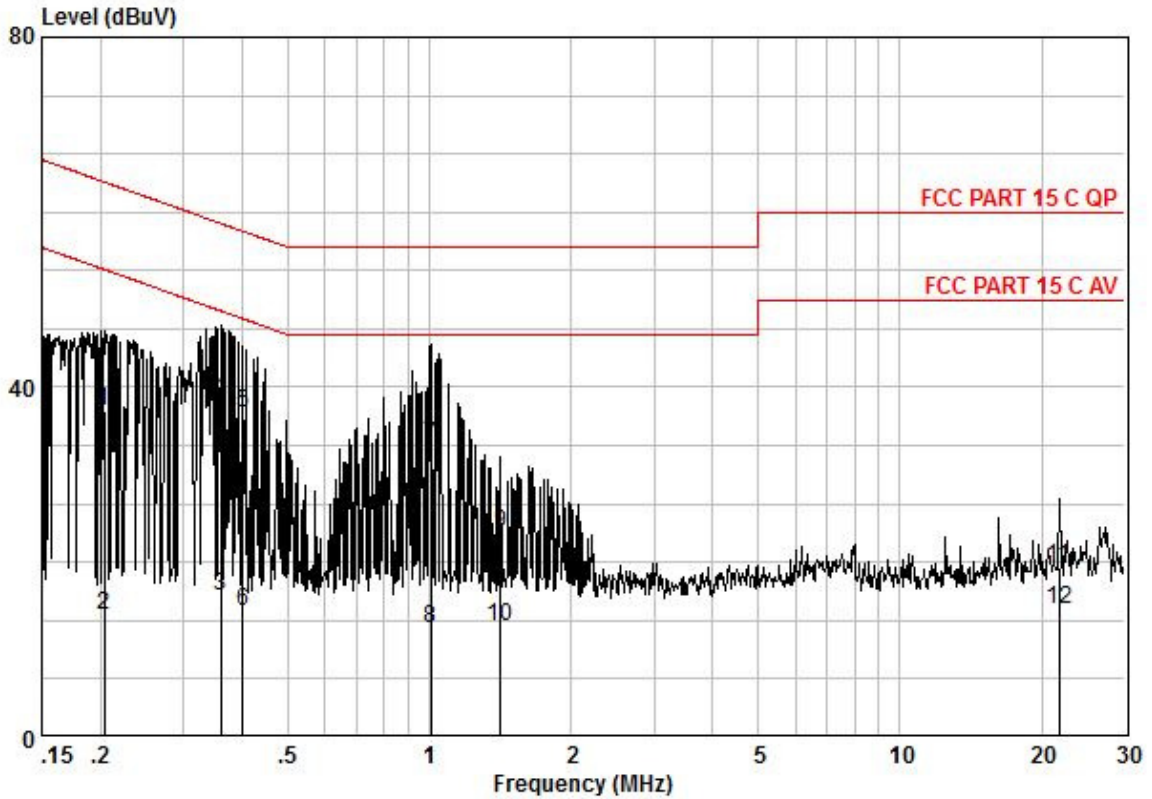

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0.20	27.63	0.08	9.60	37.31	63.45	-26.13	QP
0.20	4.29	0.08	9.60	13.97	53.45	-39.47	AVERAGE
0.36	6.47	0.05	9.68	16.20	48.74	-32.54	AVERAGE
0.36	28.78	0.05	9.68	38.51	58.74	-20.23	QP
0.40	27.47	0.05	9.60	37.12	57.81	-20.70	QP
0.40	4.75	0.05	9.60	14.40	47.81	-33.42	AVERAGE
1.00	23.66	0.00	9.70	33.36	56.00	-22.64	QP
1.00	2.63	0.00	9.70	12.33	46.00	-33.67	AVERAGE
1.42	13.56	0.05	9.70	23.31	56.00	-32.69	QP
1.42	2.96	0.05	9.70	12.71	46.00	-33.29	AVERAGE
21.83	8.80	0.42	10.27	19.49	60.00	-40.51	QP
21.83	3.93	0.42	10.27	14.62	50.00	-35.38	AVERAGE

Mode:a; Line:Neutral Line

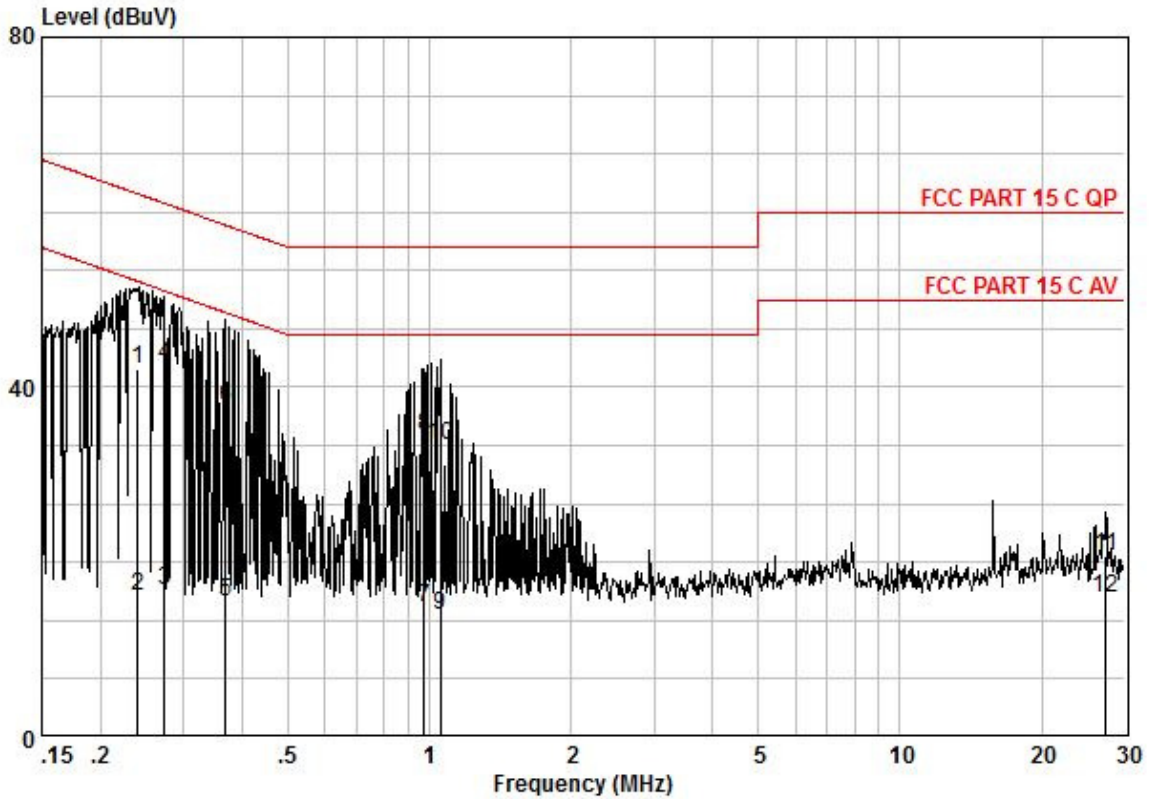

Pol : NEUTRAL
 No :
 Model :

Frequency MHz	read level dBuV	Cable Loss dB	LISN Factor dB	Measured level dBuV	Limit Line dBuV	Over limit dB	Remark
0,24	32,43	0,08	9,66	42,17	62,08	-19,92	QP
0,24	6,40	0,08	9,66	16,14	52,08	-35,95	AVERAGE
0,27	7,10	0,07	9,66	16,83	51,03	-34,20	AVERAGE
0,27	32,78	0,07	9,66	42,51	61,03	-18,52	QP
0,37	5,79	0,05	9,66	15,50	48,52	-33,02	AVERAGE
0,37	28,03	0,05	9,66	37,74	58,52	-20,78	QP
0,97	5,19	0,00	9,68	14,87	46,00	-31,13	AVERAGE
0,97	24,78	0,00	9,68	34,46	56,00	-21,54	QP
1,05	4,19	0,01	9,68	13,88	46,00	-32,12	AVERAGE
1,05	23,56	0,01	9,68	33,25	56,00	-22,75	QP
27,42	9,78	0,48	10,55	20,81	60,00	-39,19	QP
27,42	4,85	0,48	10,55	15,88	50,00	-34,12	AVERAGE

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.5
Limit:


Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 57 % RH Atmospheric Pressure: 1020 mbar
Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.2.2 Test Setup Diagram

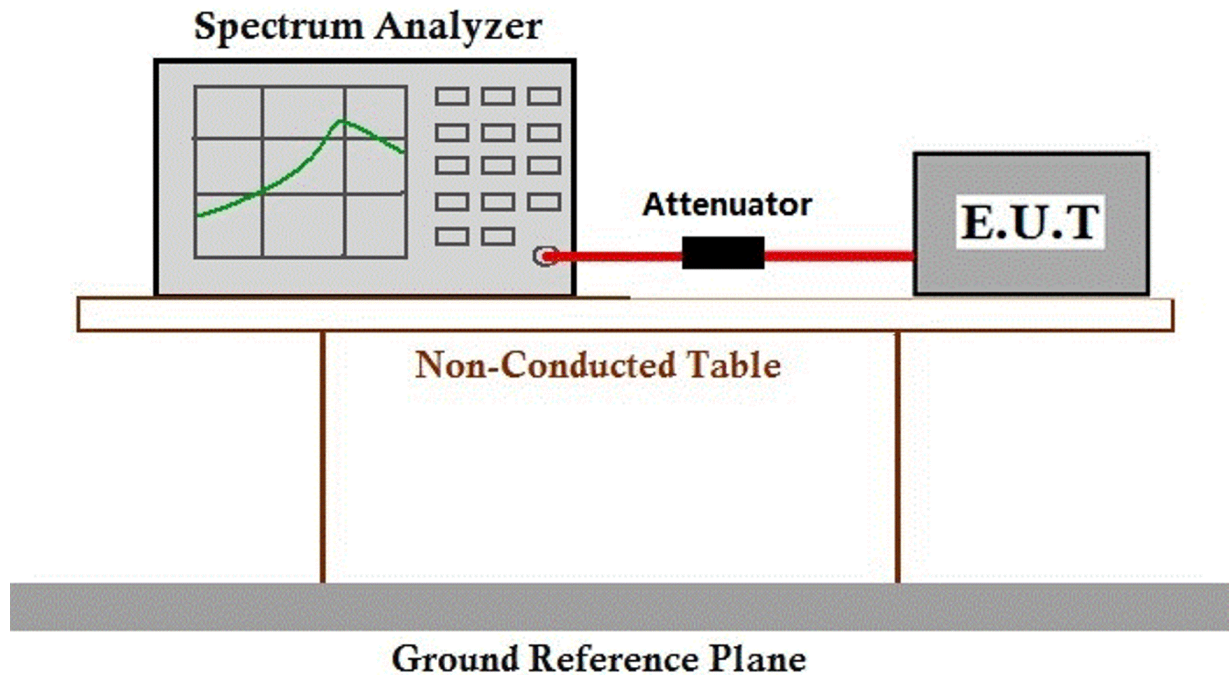

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.3 20dB Bandwidth


Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)
 Test Method: ANSI C63.10 (2013) Section 7.8.7

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar
 Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.3.2 Test Setup Diagram

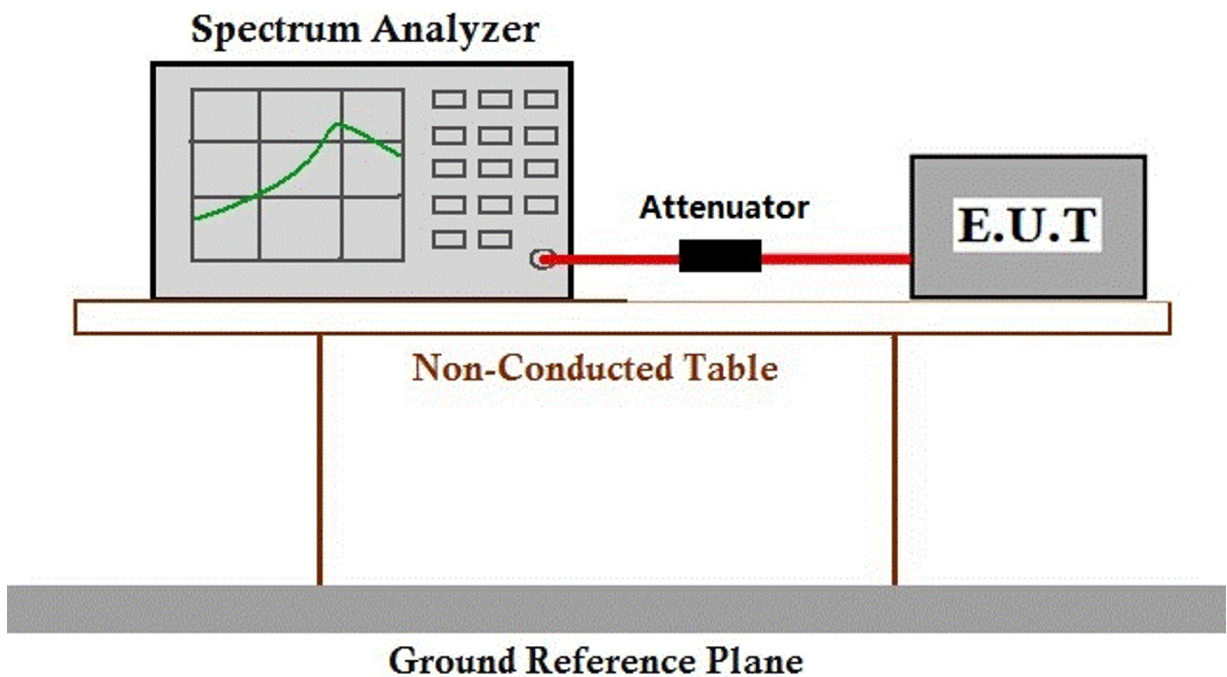

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.4 Carrier Frequencies Separation

Test Requirement	47 CFR Part 15, Subpart C 15.247a(1)
Test Method:	ANSI C63.10 (2013) Section 7.8.2
Limit:	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W


7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar

Test mode a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation.

7.4.2 Test Setup Diagram

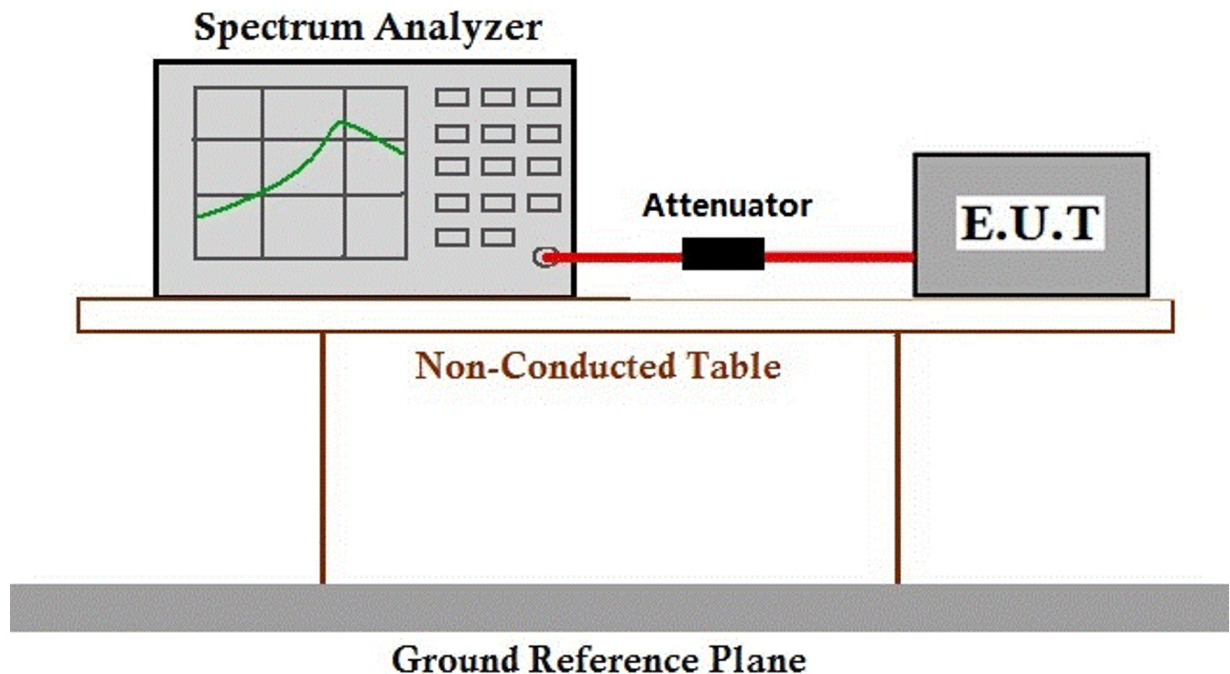

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.5 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)
 Test Method: ANSI C63.10 (2013) Section 7.8.3
 Limit:


Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar
 Test mode a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation.

7.5.2 Test Setup Diagram

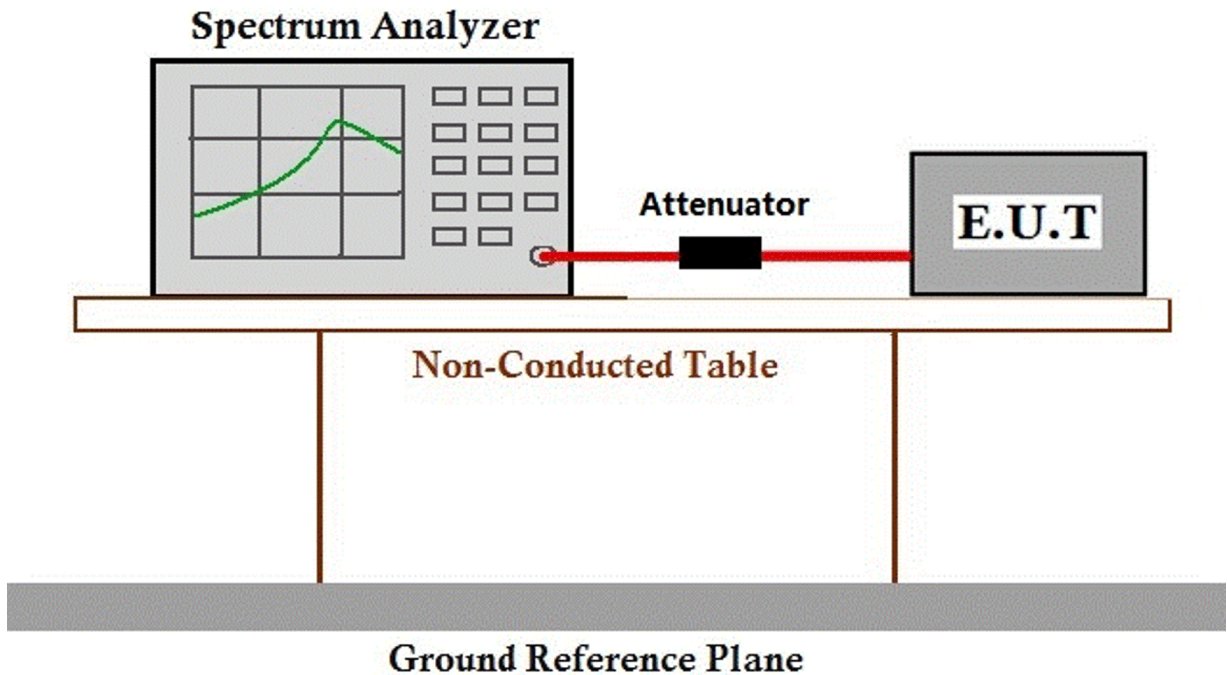

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.6 Dwell Time


Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)
Test Method: ANSI C63.10 (2013) Section 7.8.4
Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.6.1 E.U.T. Operation

Operating Environment:
Temperature: 25 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar
Test mode a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation.

7.6.2 Test Setup Diagram

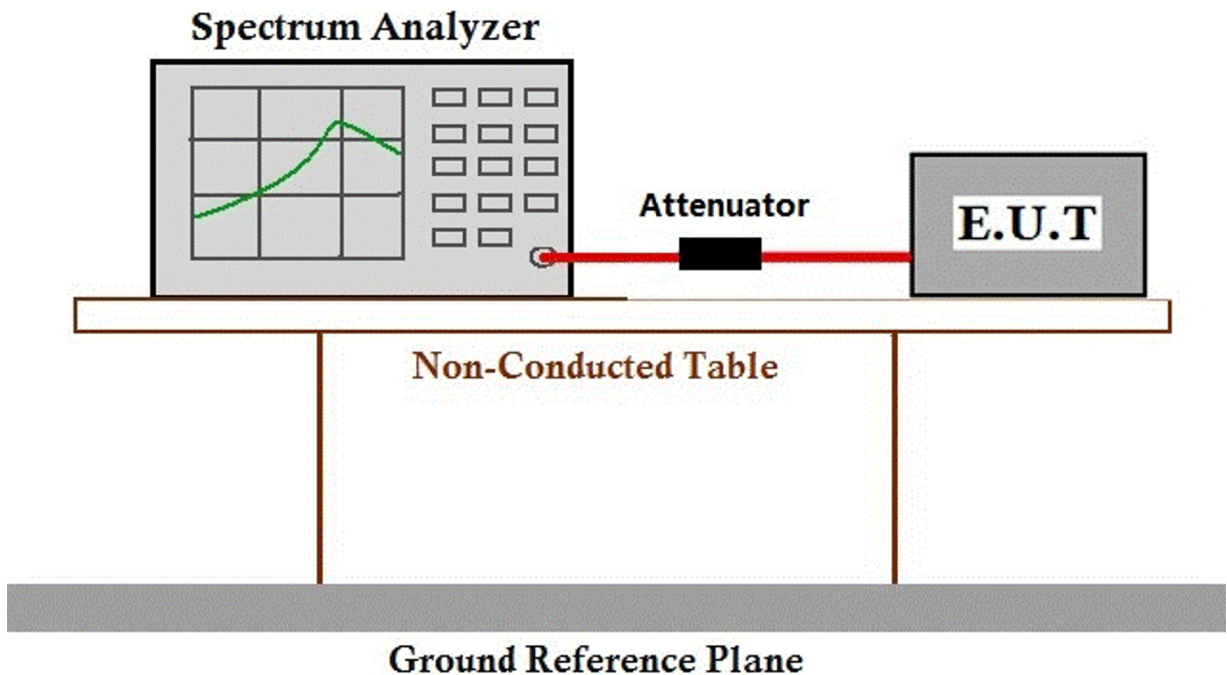

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



7.7 Conducted Band Edges Measurement

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 7.8.6
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Test Mode: a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation.
 b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.7.2 Test Setup Diagram

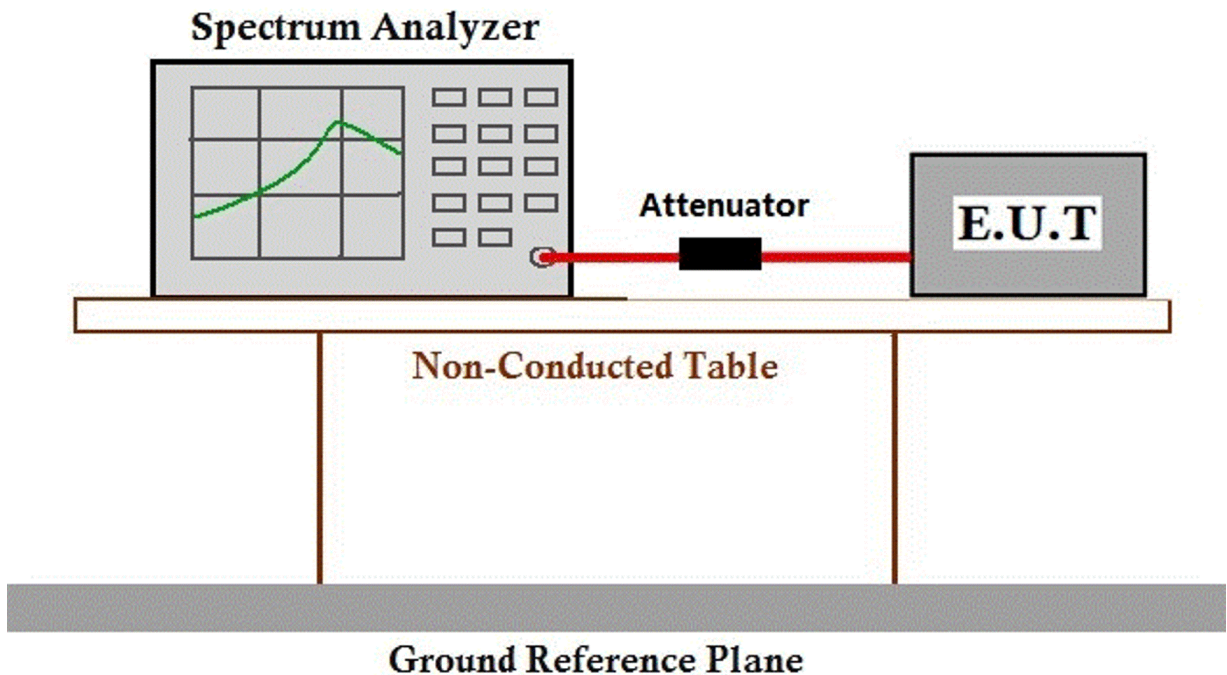

7.7.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 7.8.8
Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

7.8.1 E.U.T. Operation

Operating Environment:
 Temperature: 25 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar
 Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.8.2 Test Setup Diagram

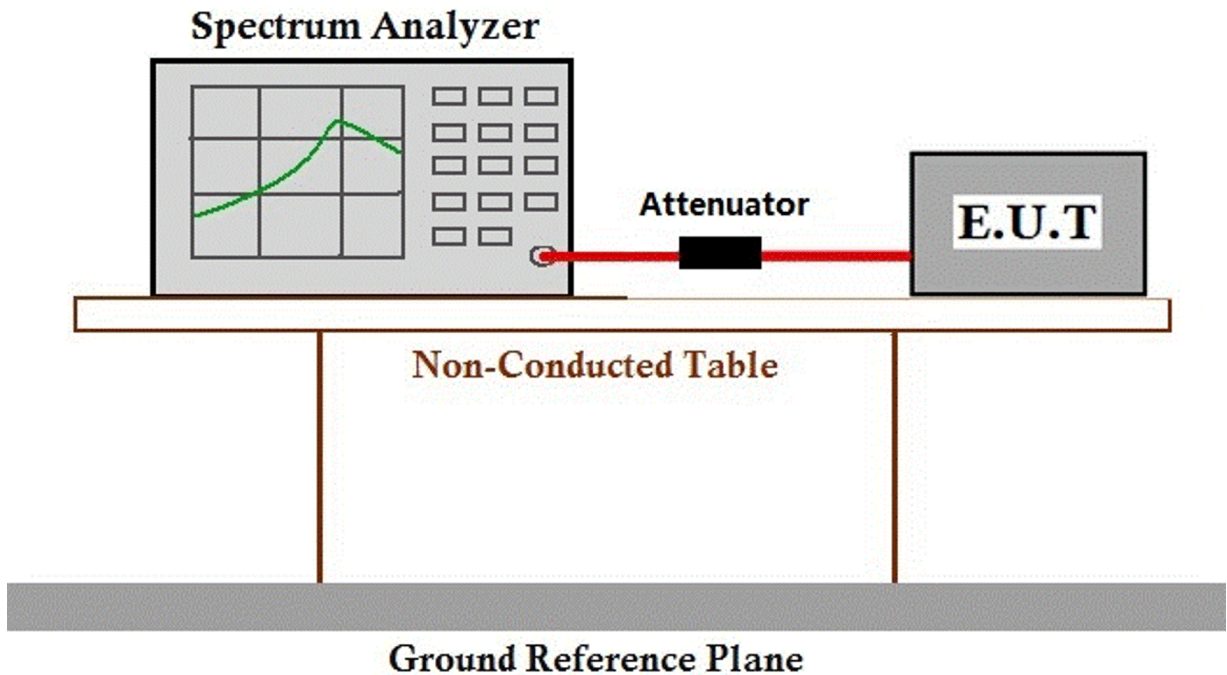

7.8.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.10.5
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3




Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar
 Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.9.2 Test Setup Diagram

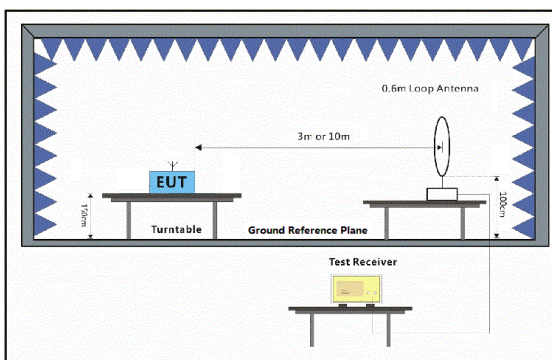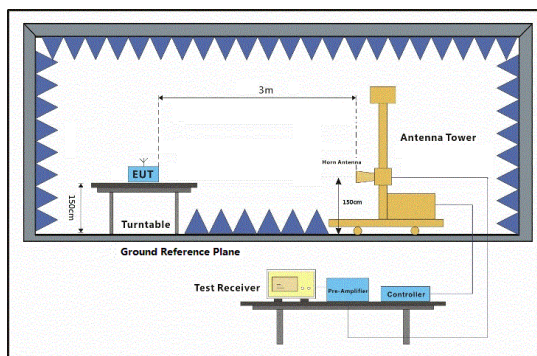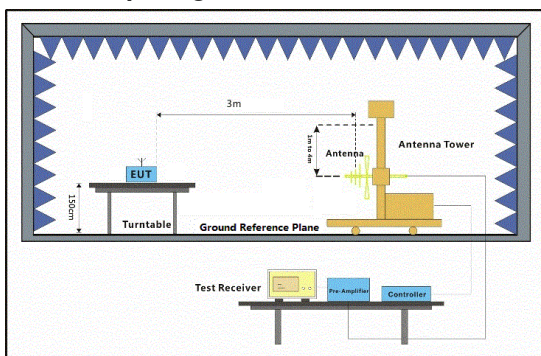

7.9.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	34.29	26.25	5.03	37.44	28.13	54.00	-25.87	VERTICAL	Average
2	2310.000	47.93	26.25	5.03	37.44	41.77	74.00	-32.23	VERTICAL	Peak
3	2390.000	36.88	26.43	4.88	37.42	30.77	54.00	-23.23	VERTICAL	Average
4	2390.000	54.30	26.43	4.88	37.42	48.19	74.00	-25.81	VERTICAL	Peak
5	2483.500	34.31	26.58	5.23	37.40	28.72	54.00	-25.28	VERTICAL	Average
6	2483.500	49.37	26.58	5.23	37.40	43.78	74.00	-30.22	VERTICAL	Peak
7	2500.000	33.01	26.60	4.95	37.39	27.17	54.00	-26.83	VERTICAL	Average
8	2500.000	48.65	26.60	4.95	37.39	42.81	74.00	-31.19	VERTICAL	Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	34.11	26.25	5.03	37.44	27.95	54.00	-26.05	HORIZONTAL	Average
2	2310.000	47.18	26.25	5.03	37.44	41.02	74.00	-32.98	HORIZONTAL	Peak
3	2390.000	32.85	26.43	4.88	37.42	26.74	54.00	-27.26	HORIZONTAL	Average
4	2390.000	46.98	26.43	4.88	37.42	40.87	74.00	-33.13	HORIZONTAL	Peak
5	2483.500	31.32	26.58	5.23	37.40	25.73	54.00	-28.27	HORIZONTAL	Average
6	2483.500	46.39	26.58	5.23	37.40	40.80	74.00	-33.20	HORIZONTAL	Peak
7	2500.000	32.66	26.60	4.95	37.39	26.82	54.00	-27.18	HORIZONTAL	Average
8	2500.000	46.58	26.60	4.95	37.39	40.74	74.00	-33.26	HORIZONTAL	Peak

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	31.71	26.25	5.03	37.44	25.55	54.00	-28.45	HORIZONTAL	Average
2	2310.000	46.12	26.25	5.03	37.44	39.96	74.00	-34.04	HORIZONTAL	Peak
3	2390.000	31.03	26.43	4.88	37.42	24.92	54.00	-29.08	HORIZONTAL	Average
4	2390.000	46.43	26.43	4.88	37.42	40.32	74.00	-33.68	HORIZONTAL	Peak
5	2483.500	45.03	26.58	5.23	37.40	39.44	54.00	-14.56	HORIZONTAL	Average
6	2483.500	59.32	26.58	5.23	37.40	53.73	74.00	-20.27	HORIZONTAL	Peak
7	2500.000	31.21	26.60	4.95	37.39	25.37	54.00	-28.63	HORIZONTAL	Average
8	2500.000	47.26	26.60	4.95	37.39	41.42	74.00	-32.58	HORIZONTAL	Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	32.46	26.25	5.03	37.44	26.30	54.00	-27.70	VERTICAL	Average
2	2310.000	47.46	26.25	5.03	37.44	41.30	74.00	-32.70	VERTICAL	Peak
3	2390.000	35.11	26.43	4.88	37.42	29.00	54.00	-25.00	VERTICAL	Average
4	2390.000	48.17	26.43	4.88	37.42	42.06	74.00	-31.94	VERTICAL	Peak
5	2483.500	37.53	26.58	5.23	37.40	31.94	54.00	-22.06	VERTICAL	Average
6	2483.500	56.79	26.58	5.23	37.40	51.20	74.00	-22.80	VERTICAL	Peak
7	2500.000	34.99	26.60	4.95	37.39	29.15	54.00	-24.85	VERTICAL	Average
8	2500.000	50.48	26.60	4.95	37.39	44.64	74.00	-29.36	VERTICAL	Peak



7.10 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3




Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar
 Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.10.2 Test Setup Diagram

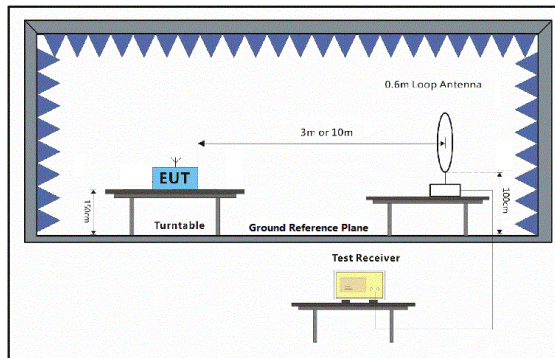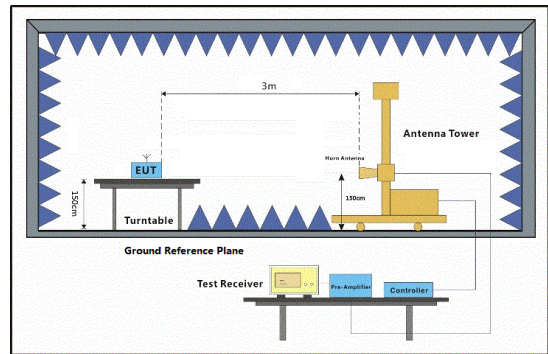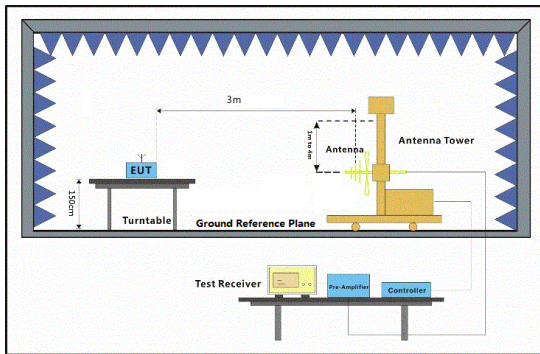

7.10.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180600322001
 Page: 37 of 60

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	31.071	25.16	12.23	0.08	21.65	15.82	40.00	-24.18	HORIZONTAL	QP
2	49.359	23.56	12.99	0.61	24.83	12.33	40.00	-27.67	HORIZONTAL	QP
3	100.934	31.71	9.66	0.85	27.17	15.05	43.50	-28.45	HORIZONTAL	QP
4	162.041	26.85	13.34	1.28	28.10	13.37	43.50	-30.13	HORIZONTAL	QP
5	896.997	28.53	23.98	2.85	27.93	27.43	46.00	-18.57	HORIZONTAL	QP

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	4820.000	40.54	30.82	6.01	36.94	40.43	54.00	-13.57	HORIZONTAL	Average
2	4820.000	49.23	30.82	6.01	36.94	49.12	74.00	-24.88	HORIZONTAL	Peak
3	6267.553	31.93	33.41	6.94	36.99	35.29	54.00	-18.71	HORIZONTAL	Average
4	6267.553	43.49	33.41	6.94	36.99	46.85	74.00	-27.15	HORIZONTAL	Peak
5	7230.150	43.87	35.50	7.35	36.93	49.79	54.00	-4.21	HORIZONTAL	Average
6	7230.150	47.46	35.50	7.35	36.93	53.38	74.00	-20.62	HORIZONTAL	Peak
7	8969.161	31.65	36.49	8.21	37.01	39.34	54.00	-14.66	HORIZONTAL	Average
8	8969.161	43.41	36.49	8.21	37.01	51.10	74.00	-22.90	HORIZONTAL	Peak
9	9640.580	30.03	37.54	8.18	37.08	38.67	54.00	-15.33	HORIZONTAL	Average
10	9640.580	42.94	37.54	8.18	37.08	51.58	74.00	-22.42	HORIZONTAL	Peak
11	12050.740	29.69	39.46	10.71	37.17	42.69	54.00	-11.31	HORIZONTAL	Average
12	12050.740	41.31	39.46	10.71	37.17	54.31	74.00	-19.69	HORIZONTAL	Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180600322001
 Page: 38 of 60

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	30.424	24.96	12.21	0.06	21.52	15.71	40.00	-24.29	VERTICAL	QP
2	47.492	22.02	12.94	0.65	24.67	10.94	40.00	-29.06	VERTICAL	QP
3	104.536	26.09	9.93	0.86	27.32	9.56	43.50	-33.94	VERTICAL	QP
4	144.335	25.98	13.15	1.09	28.15	12.07	43.50	-31.43	VERTICAL	QP
5	463.970	27.19	17.77	2.01	29.47	17.50	46.00	-28.50	VERTICAL	QP
6	881.407	27.05	23.84	2.90	28.16	25.63	46.00	-20.37	VERTICAL	QP

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3598.203	30.51	28.14	6.39	36.94	28.10	54.00	-25.90	VERTICAL	Average
2	3598.203	45.71	28.14	6.39	36.94	43.30	74.00	-30.70	VERTICAL	Peak
3	4820.962	45.46	30.82	6.01	36.94	45.35	54.00	-8.65	VERTICAL	Average
4	4820.962	49.88	30.82	6.01	36.94	49.77	74.00	-24.23	VERTICAL	Peak
5	5648.176	31.47	32.00	7.07	36.99	33.55	54.00	-20.45	VERTICAL	Average
6	5648.176	43.37	32.00	7.07	36.99	45.45	74.00	-28.55	VERTICAL	Peak
7	7229.750	46.78	35.50	7.35	36.93	52.70	54.00	-1.30	VERTICAL	Average
8	7229.750	50.74	35.50	7.35	36.93	56.66	74.00	-17.34	VERTICAL	Peak
9	9640.789	30.45	37.54	8.18	37.08	39.09	54.00	-14.91	VERTICAL	Average
10	9640.789	42.27	37.54	8.18	37.08	50.91	74.00	-23.09	VERTICAL	Peak
11	12050.450	30.96	39.46	10.71	37.17	43.96	54.00	-10.04	VERTICAL	Average
12	12050.450	41.31	39.46	10.71	37.17	54.31	74.00	-19.69	VERTICAL	Peak

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3901.516	32.20	29.30	7.56	36.91	32.15	54.00	-21.85	HORIZONTAL	Average
2	3901.516	44.61	29.30	7.56	36.91	44.56	74.00	-29.44	HORIZONTAL	Peak
3	4890.151	35.46	30.95	6.86	36.95	36.32	54.00	-17.68	HORIZONTAL	Average
4	4890.151	47.59	30.95	6.86	36.95	48.45	74.00	-25.55	HORIZONTAL	Peak
5	6602.265	32.25	34.43	7.13	36.98	36.83	54.00	-17.17	HORIZONTAL	Average
6	6602.265	44.03	34.43	7.13	36.98	48.61	74.00	-25.39	HORIZONTAL	Peak
7	7335.729	30.97	35.74	7.39	36.92	37.18	54.00	-16.82	HORIZONTAL	Average
8	7335.729	43.15	35.74	7.39	36.92	49.36	74.00	-24.64	HORIZONTAL	Peak
9	9780.240	29.97	37.74	8.37	37.09	38.99	54.00	-15.01	HORIZONTAL	Average
10	9780.240	41.90	37.74	8.37	37.09	50.92	74.00	-23.08	HORIZONTAL	Peak
11	12225.540	28.45	39.21	10.98	37.06	41.58	54.00	-12.42	HORIZONTAL	Average
12	12225.540	40.97	39.21	10.98	37.06	54.10	74.00	-19.90	HORIZONTAL	Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:middle

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3801.333	30.78	29.01	7.89	36.92	30.76	54.00	-23.24	VERTICAL	Average
2	3801.333	44.39	29.01	7.89	36.92	44.37	74.00	-29.63	VERTICAL	Peak
3	4890.151	36.32	30.95	6.86	36.95	37.18	54.00	-16.82	VERTICAL	Average
4	4890.151	47.95	30.95	6.86	36.95	48.81	74.00	-25.19	VERTICAL	Peak
5	7335.474	31.71	35.74	7.39	36.92	37.92	54.00	-16.08	VERTICAL	Average
6	7335.474	45.07	35.74	7.39	36.92	51.28	74.00	-22.72	VERTICAL	Peak
7	8368.069	28.82	36.18	8.11	36.93	36.18	54.00	-17.82	VERTICAL	Average
8	8368.069	43.88	36.18	8.11	36.93	51.24	74.00	-22.76	VERTICAL	Peak
9	9780.221	29.65	37.74	8.37	37.09	38.67	54.00	-15.33	VERTICAL	Average
10	9780.221	43.99	37.74	8.37	37.09	53.01	74.00	-20.99	VERTICAL	Peak
11	12219.850	24.92	39.21	10.98	37.06	38.05	54.00	-15.95	VERTICAL	Average
12	12219.850	39.62	39.21	10.98	37.06	52.75	74.00	-21.25	VERTICAL	Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180600322001
Page: 40 of 60

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3801.333	33.18	29.01	7.89	36.92	33.16	54.00	-20.84	HORIZONTAL	Average
2	3801.333	44.45	29.01	7.89	36.92	44.43	74.00	-29.57	HORIZONTAL	Peak
3	4954.850	49.38	31.05	7.84	36.96	51.31	54.00	-2.69	HORIZONTAL	Average
4	4959.307	51.27	31.05	7.84	36.96	53.20	74.00	-20.80	HORIZONTAL	Peak
5	5780.300	32.79	32.14	7.15	37.00	35.08	54.00	-18.92	HORIZONTAL	Average
6	5780.300	45.00	32.14	7.15	37.00	47.29	74.00	-26.71	HORIZONTAL	Peak
7	7431.420	30.15	35.92	7.43	36.92	36.58	54.00	-17.42	HORIZONTAL	Average
8	7431.420	42.80	35.92	7.43	36.92	49.23	74.00	-24.77	HORIZONTAL	Peak
9	9908.530	31.86	37.89	8.57	37.10	41.22	54.00	-12.78	HORIZONTAL	Average
10	9908.530	41.88	37.89	8.57	37.10	51.24	74.00	-22.76	HORIZONTAL	Peak
11	12385.950	28.34	38.93	11.17	36.93	41.51	54.00	-12.49	HORIZONTAL	Average
12	12385.950	40.63	38.93	11.17	36.93	53.80	74.00	-20.20	HORIZONTAL	Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	4954.307	45.26	31.05	7.84	36.96	47.19	54.00	-6.81	VERTICAL	Average
2	4954.307	50.38	31.05	7.84	36.96	52.31	74.00	-21.69	VERTICAL	Peak
3	6177.627	32.41	32.92	6.94	36.99	35.28	54.00	-18.72	VERTICAL	Average
4	6177.627	43.77	32.92	6.94	36.99	46.64	74.00	-27.36	VERTICAL	Peak
5	7432.914	44.95	35.92	7.43	36.92	51.38	54.00	-2.62	VERTICAL	Average
6	7432.914	49.42	35.92	7.43	36.92	55.85	74.00	-18.15	VERTICAL	Peak
7	9908.724	30.26	37.89	8.57	37.10	39.62	54.00	-14.38	VERTICAL	Average
8	9908.724	41.59	37.89	8.57	37.10	50.95	74.00	-23.05	VERTICAL	Peak
9	10760.540	39.18	39.50	9.78	37.13	51.33	74.00	-22.67	VERTICAL	Peak
10	10760.540	25.45	39.50	9.78	37.13	37.60	54.00	-16.40	VERTICAL	Average
11	12385.300	26.14	38.93	11.17	36.93	39.31	54.00	-14.69	VERTICAL	Average
12	12385.300	39.62	38.93	11.17	36.93	52.79	74.00	-21.21	VERTICAL	Peak




8 Appendix

8.1 Appendix 15.247

1.20 dB Bandwidth

Test Mode	Test Channel	EBW[MHz]	2/3 EBW[MHz]	Verdict
GFSK	2410	4.564	3.043	PASS
GFSK	2445	4.551	3.034	PASS
GFSK	2477	4.551	3.034	PASS



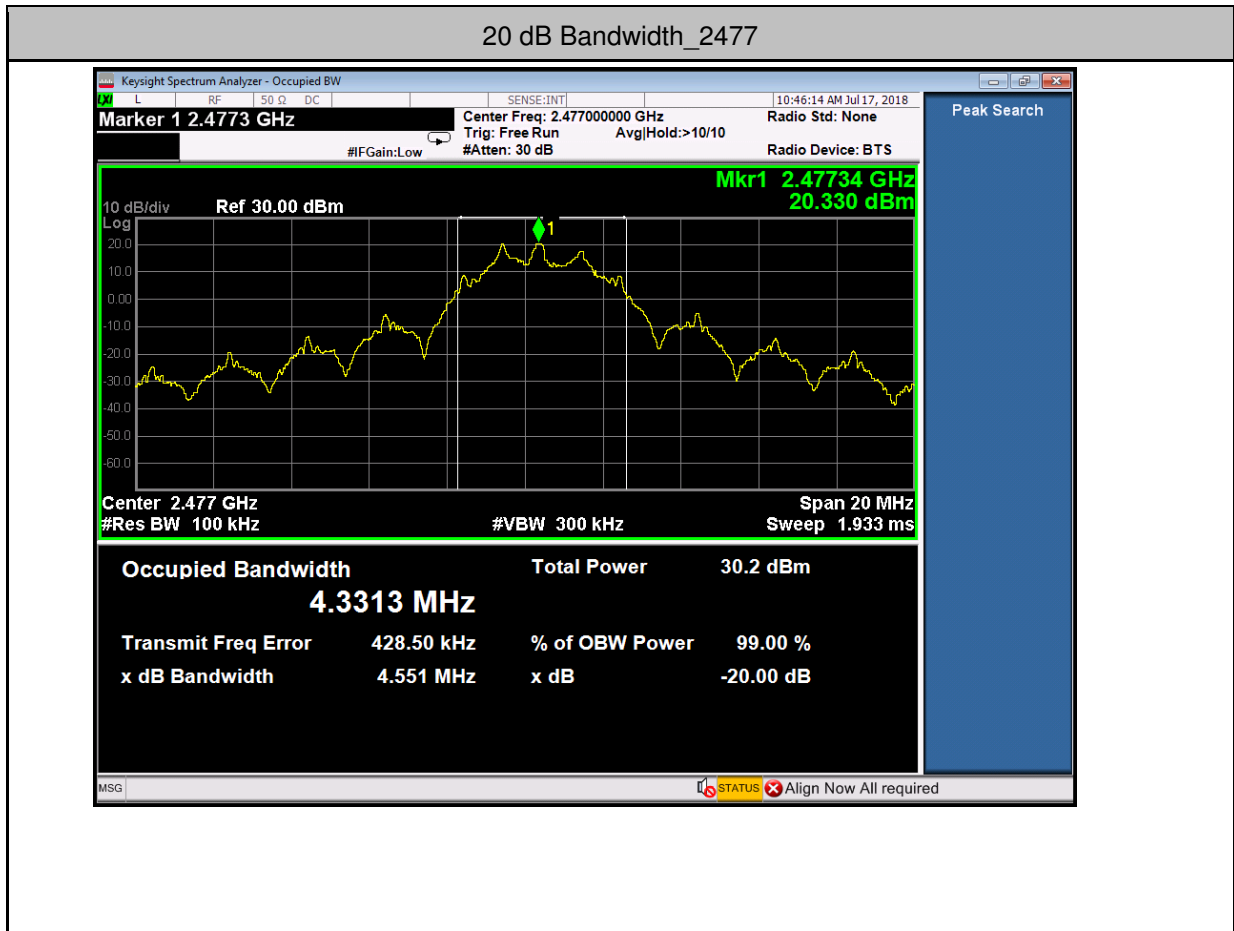


2. Conducted Peak Output Power

Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
GFSK	2410	19.858	21	PASS
GFSK	2445	20.483	21	PASS
GFSK	2477	20.597	21	PASS


TEST PLOT

Conducted Peak Output Power_2410

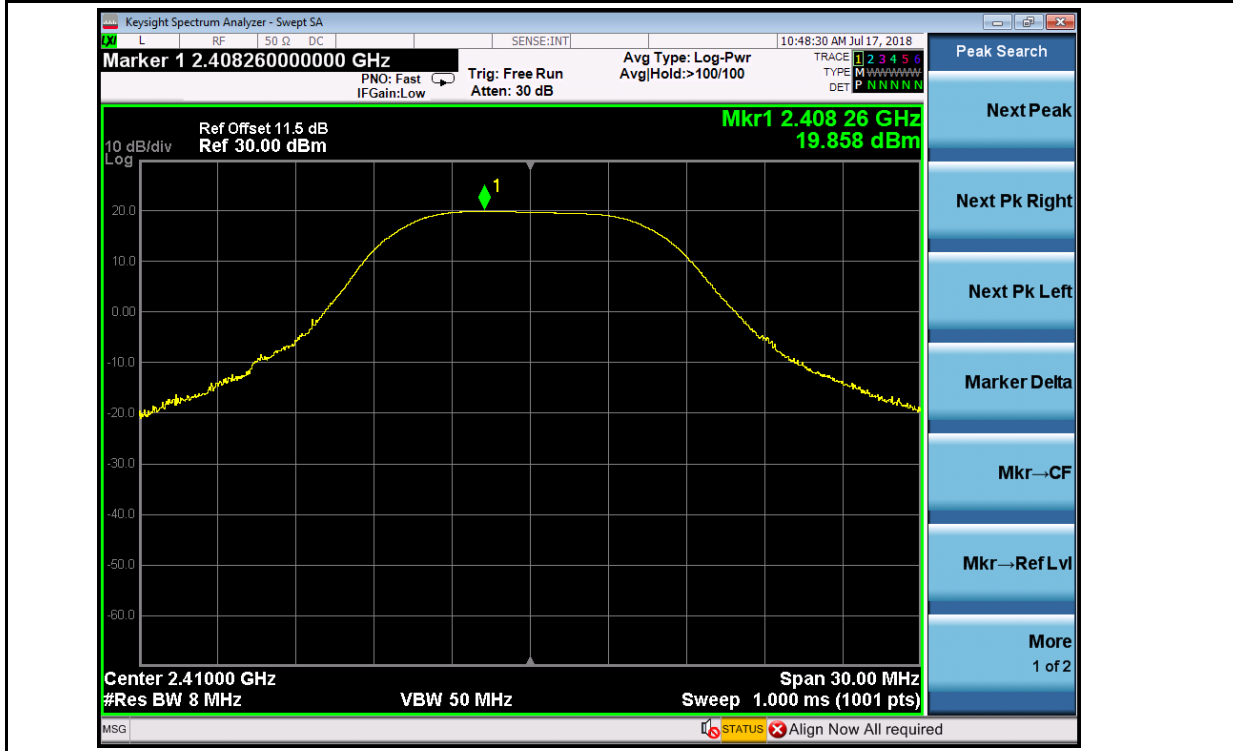

Conducted Peak Output Power_2445



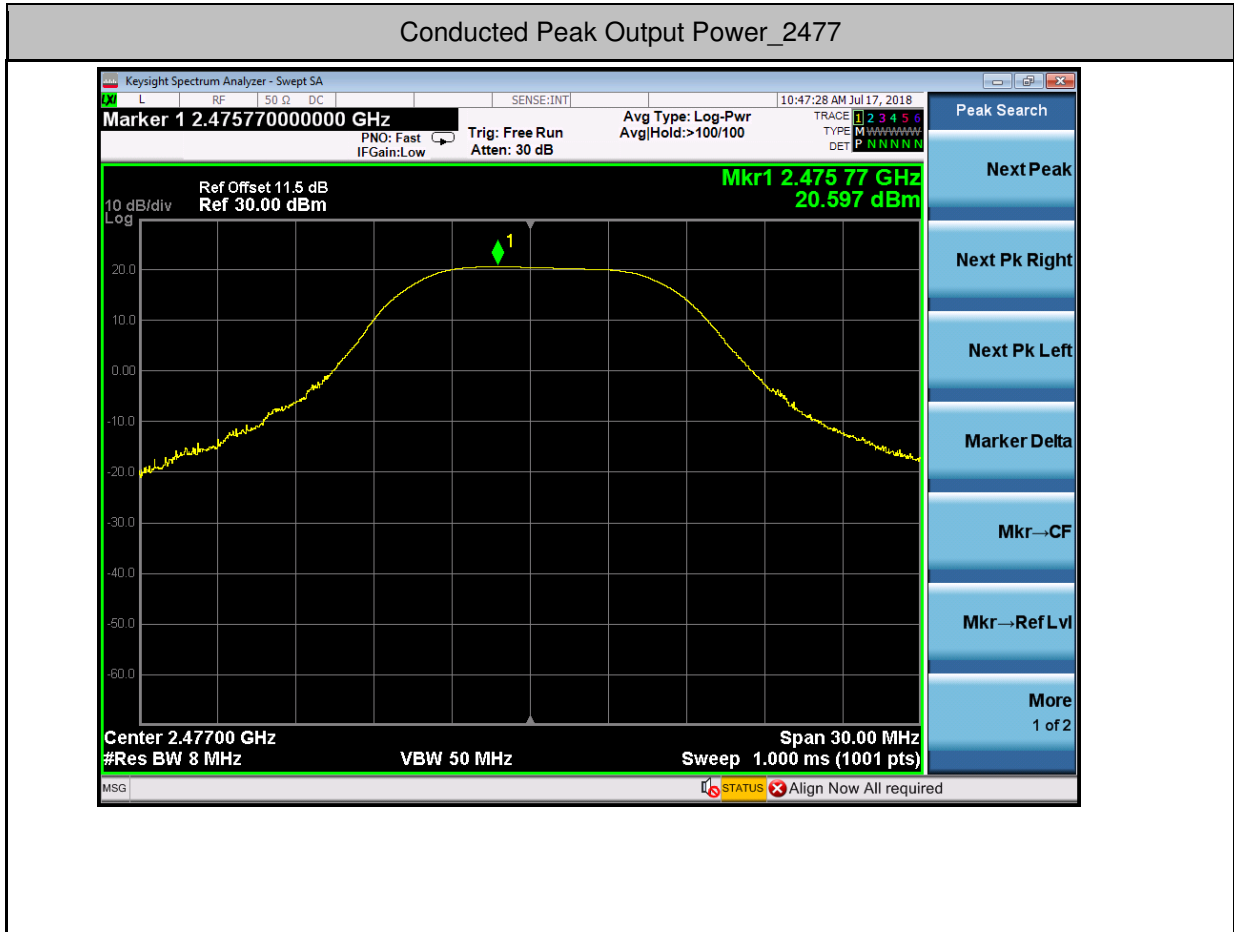


3.Carrier Frequency Separation

Test Mode	Test Channel	Result[MHz]	Limit[MHz]	Verdict
GFSK	2410	4.000	3.043	Pass
GFSK	2445	3.500	3.034	Pass
GFSK	2477	3.960	3.034	Pass





TEST PLOT

Carrier Frequency Separation_2410

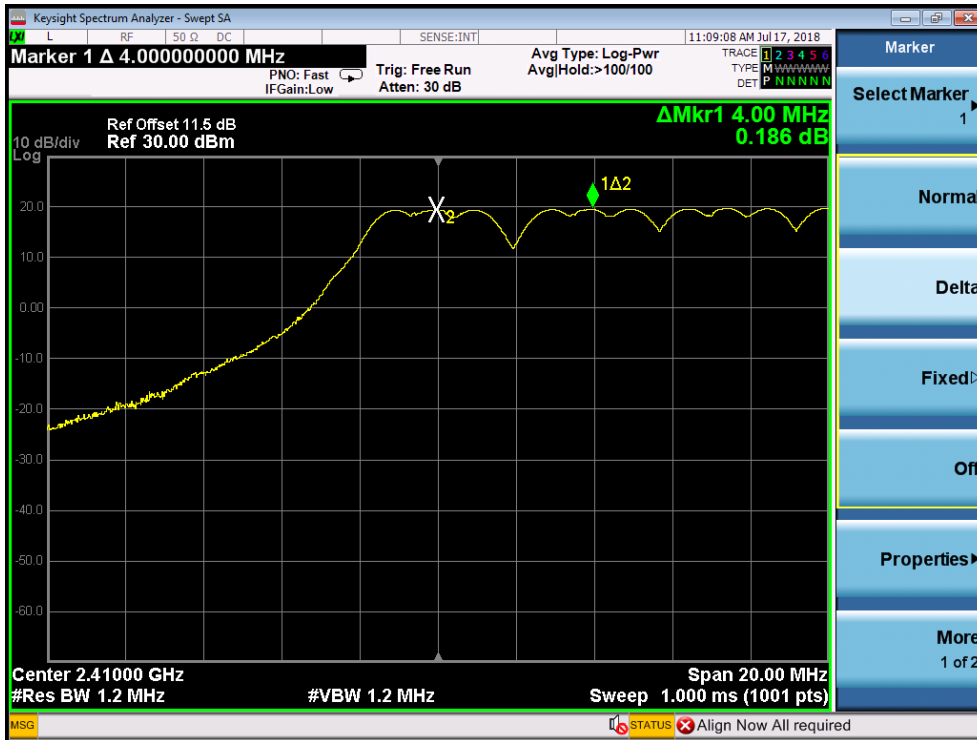



Carrier Frequency Separation_2445

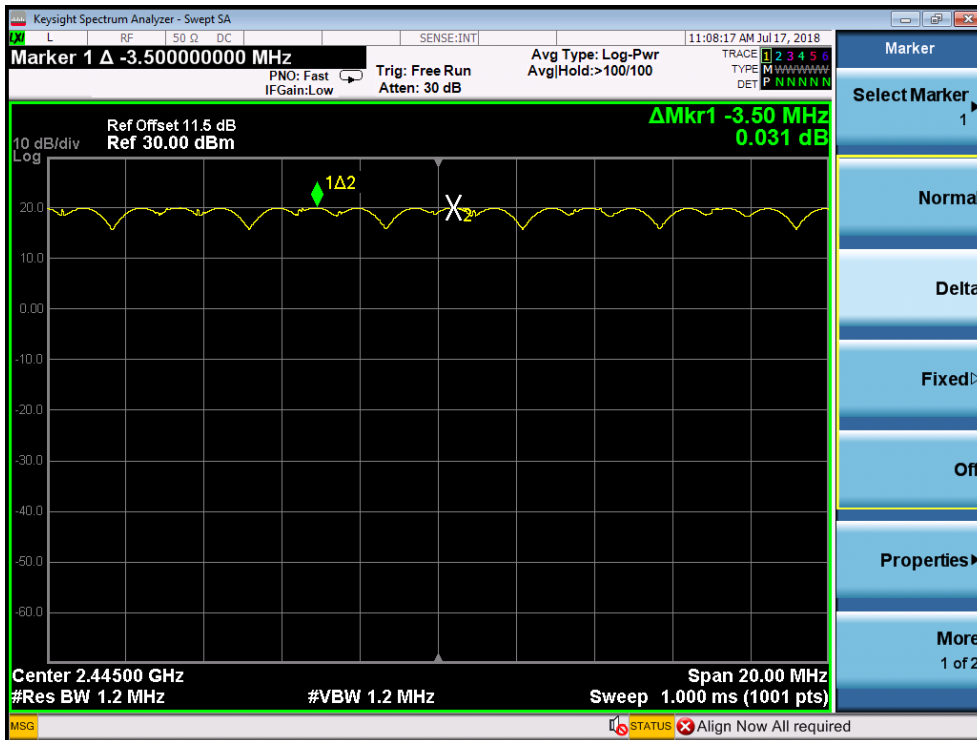


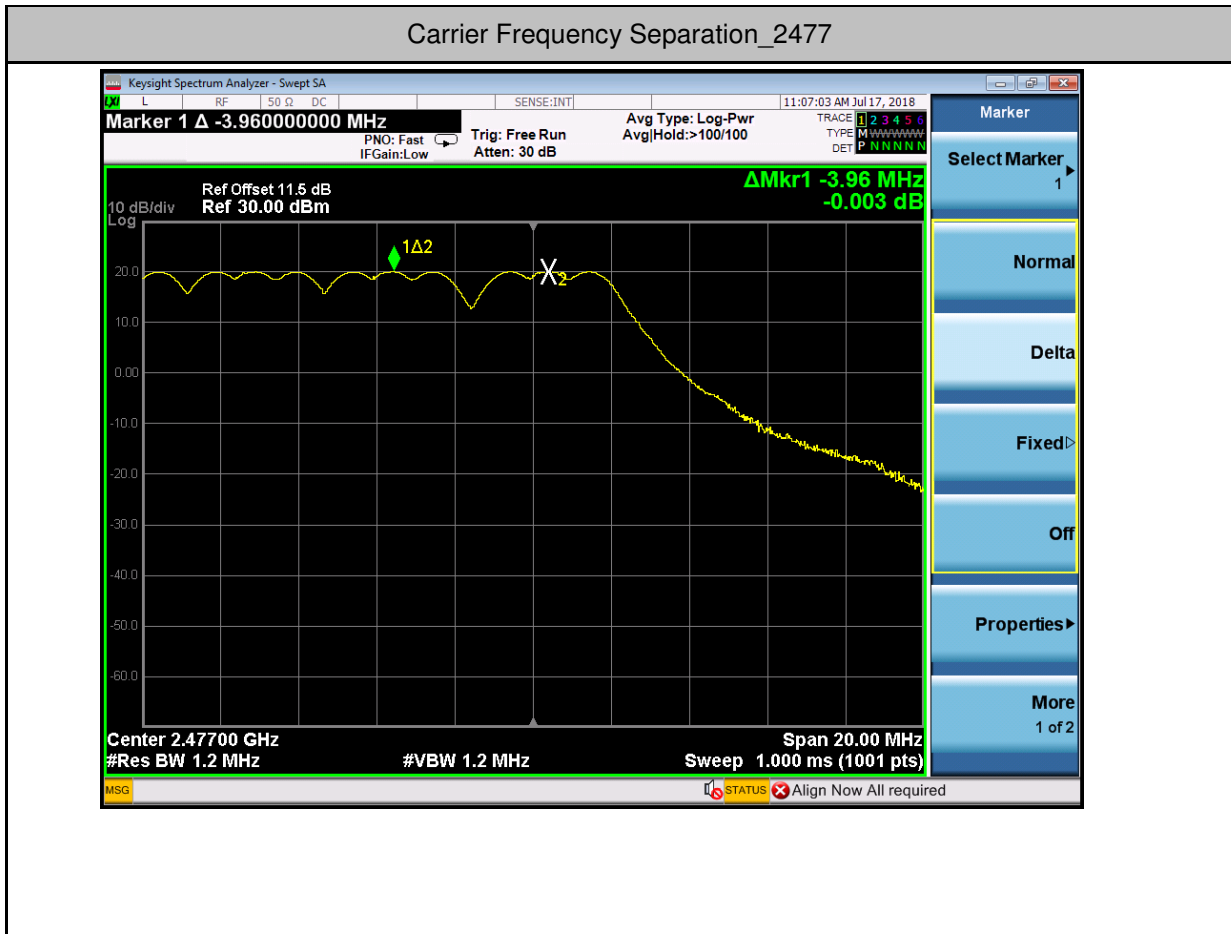


4.Dwell Time



Test Mode	Test Channel	Burst Width[ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Limit[s]	Verdict
GFSK	2410	4.202	54	0.227	0.4	Pass
GFSK	2445	4.188	56	0.235	0.4	Pass
GFSK	2477	3.985	56	0.223	0.4	Pass

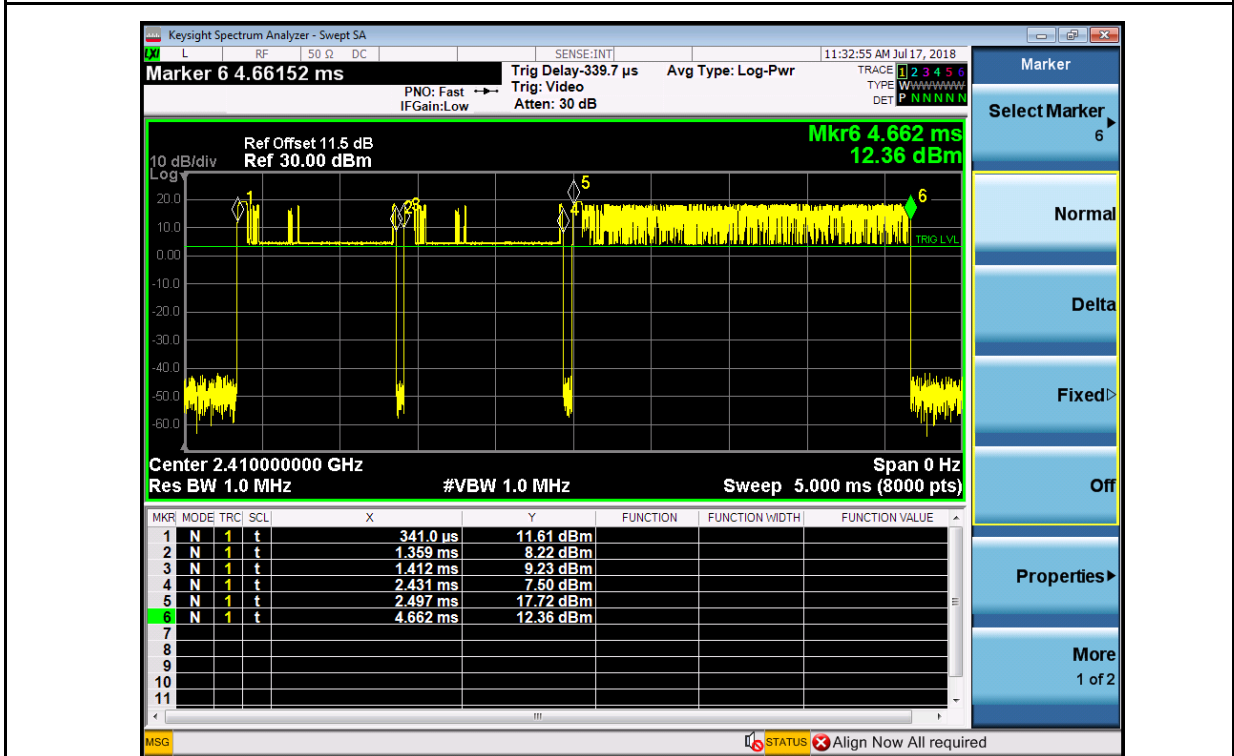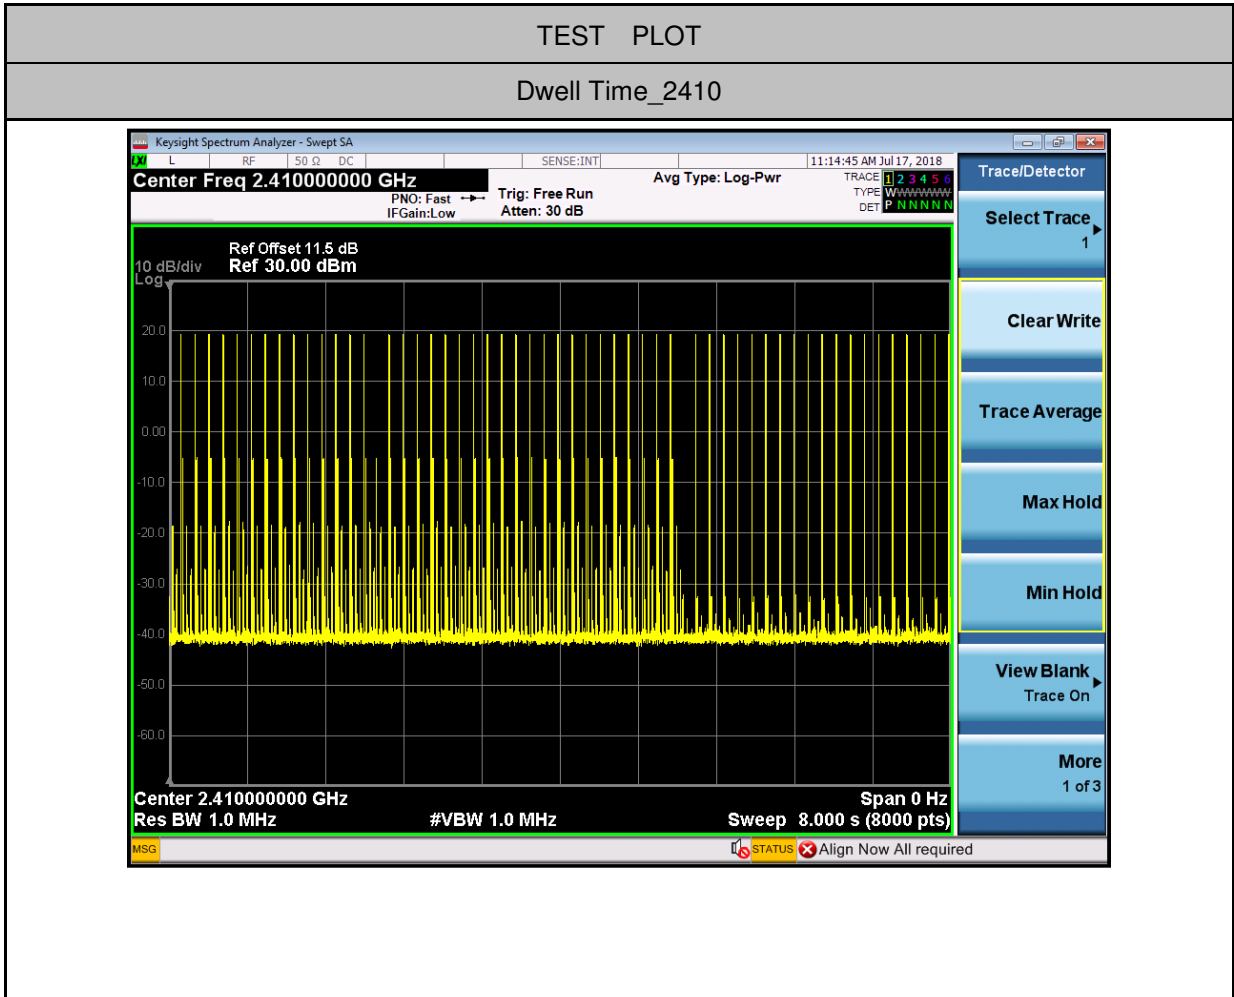

Dwell Time_2445

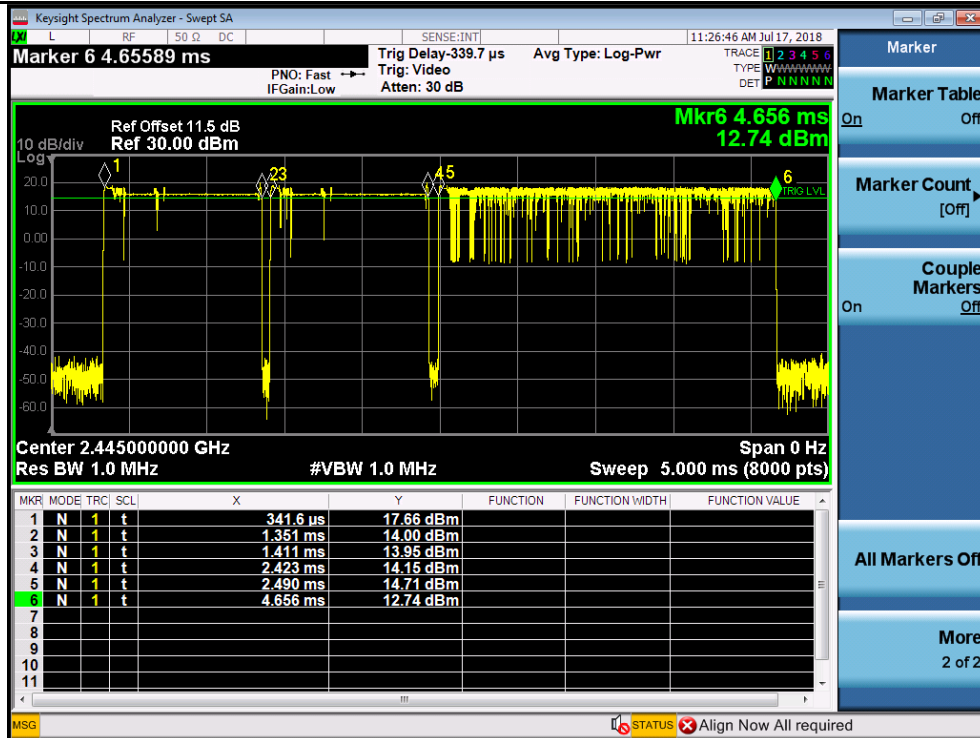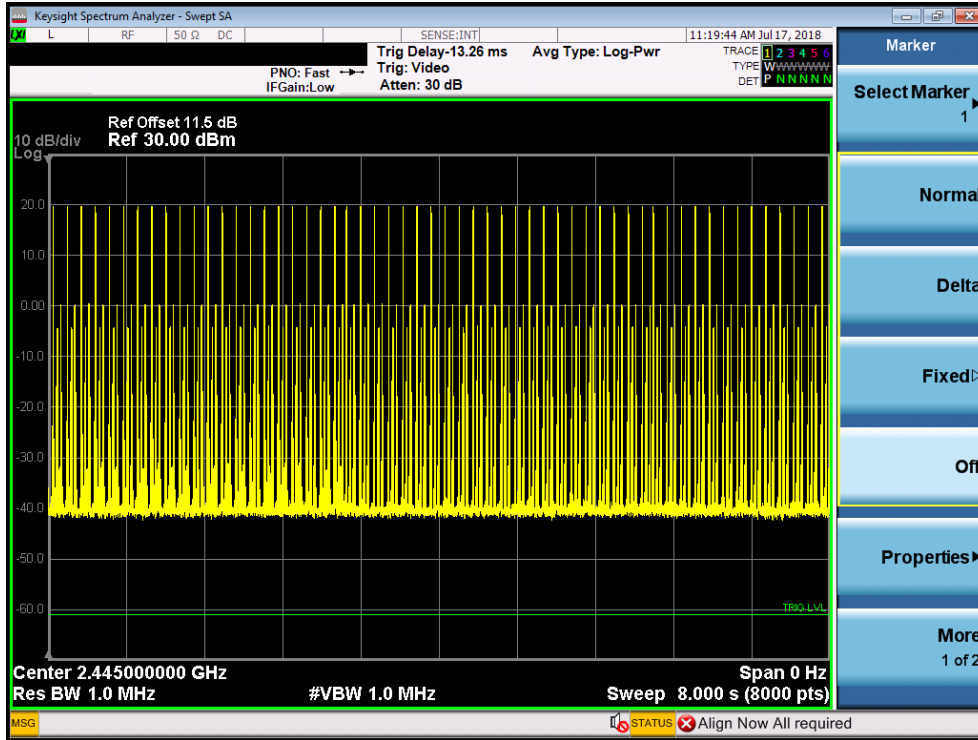

Dwell Time_2477

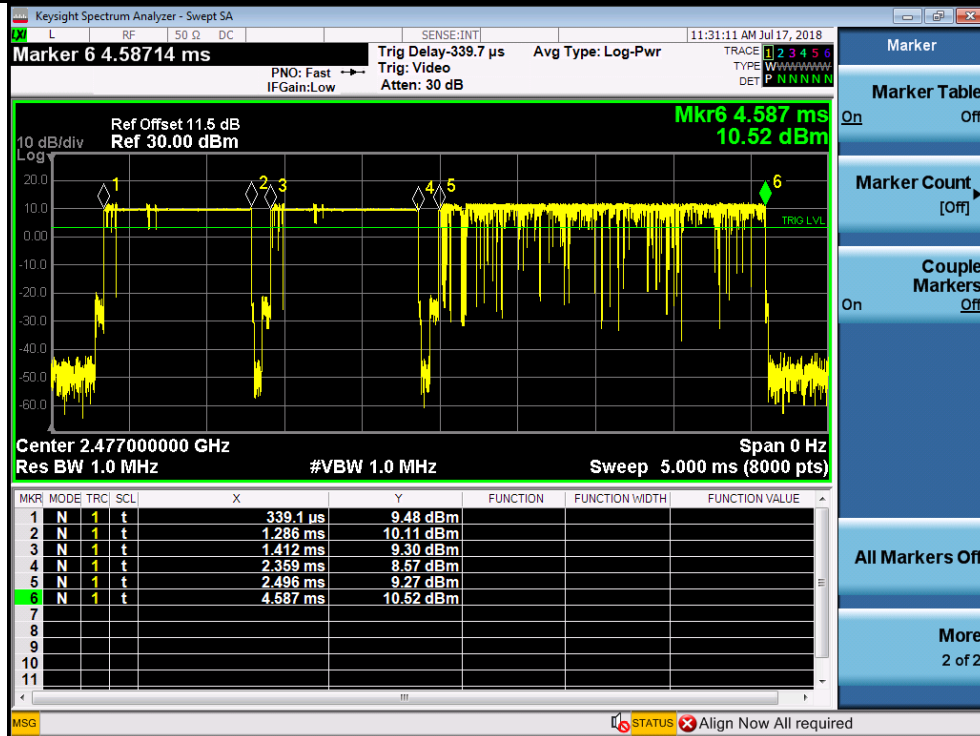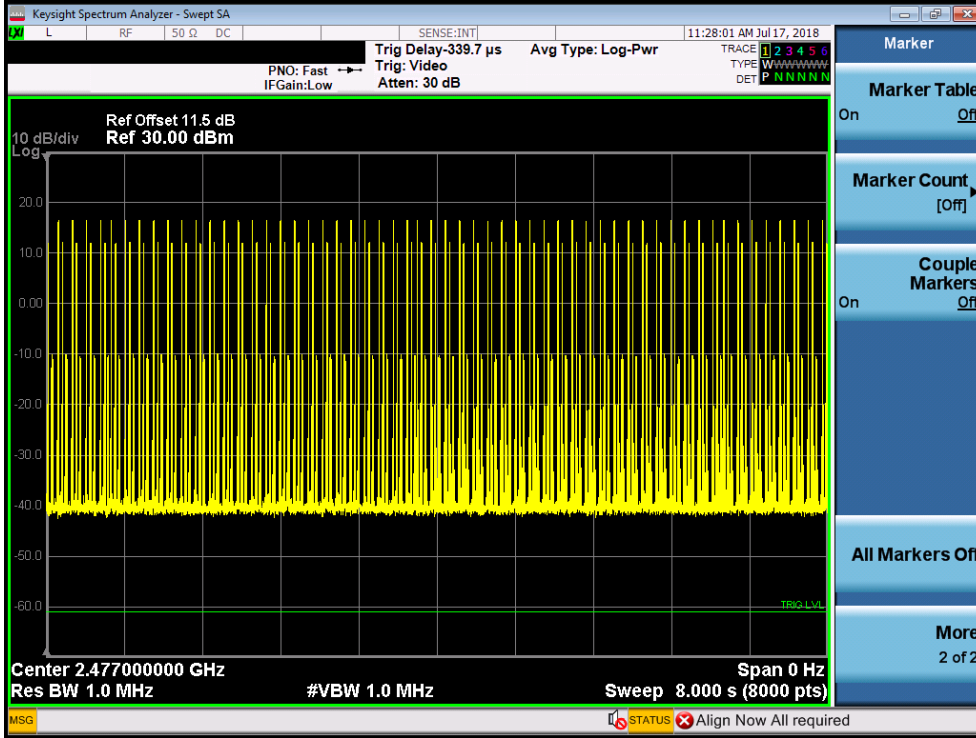


5.Hopping Channel Number

Test Mode	Test Channel	Number of Hopping Channel[N]	Limit[N]	Verdict
GFSK	Hopping	20	>=15	PASS

TEST PLOT

Hopping Channel Number

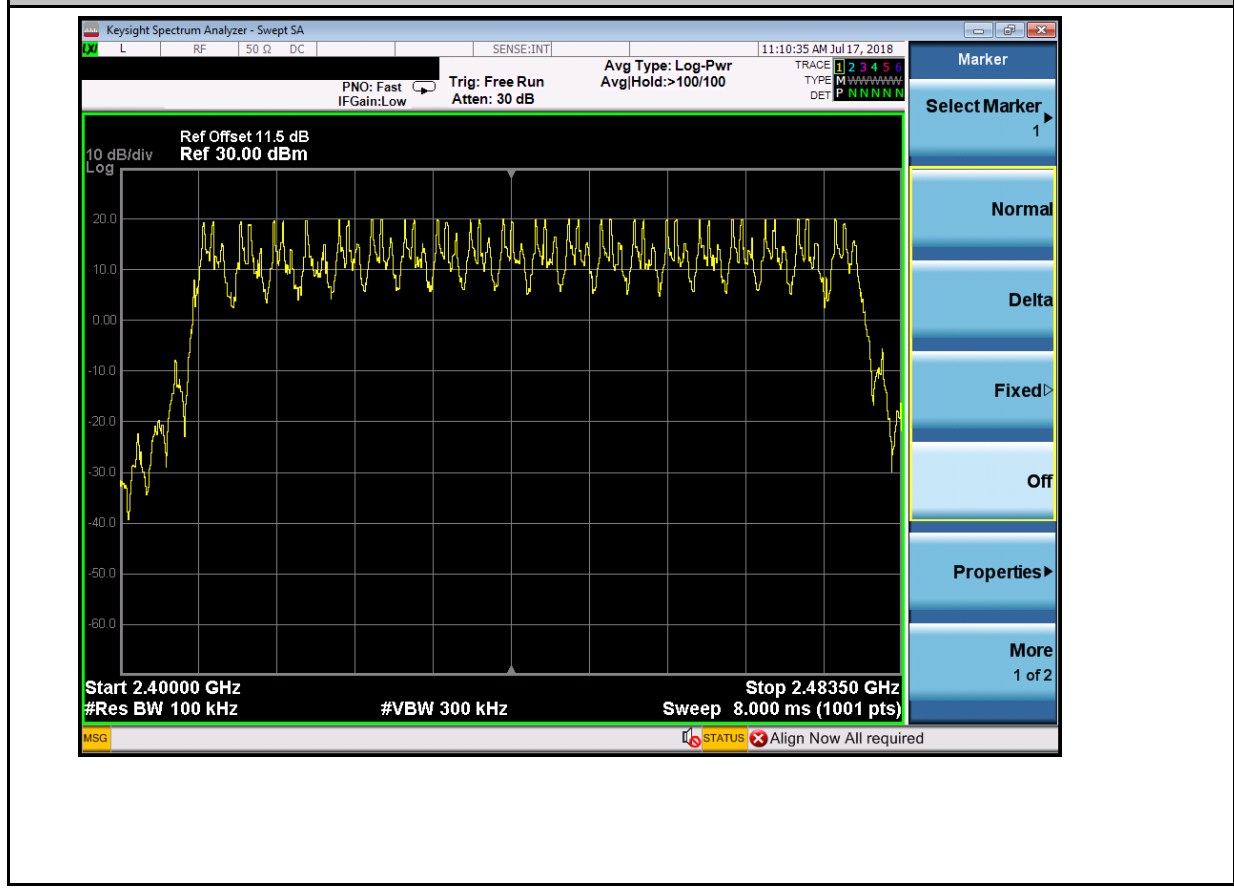


6.Band-edge for RF Conducted Emissions


Test Mode	Test Channel	Hopping	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit[dBm]	Verdict
GFSK	2410	On	19.623	-27.934	-0.38	PASS
GFSK	2410	Off	19.609	-27.943	-0.39	PASS
GFSK	2477	On	20.289	-17.511	0.29	PASS
GFSK	2477	Off	20.334	-16.940	0.33	PASS

TEST PLOT


Band-edge for RF Conducted Emissions_2410_Hopping On

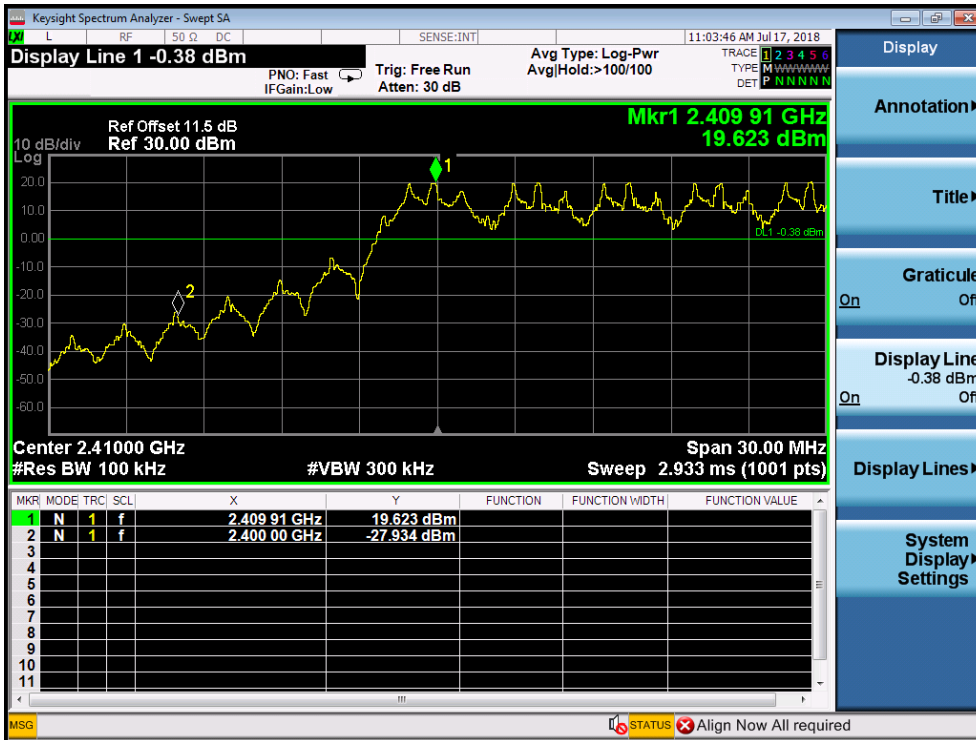


Band-edge for RF Conducted Emissions_2410_Hopping Off

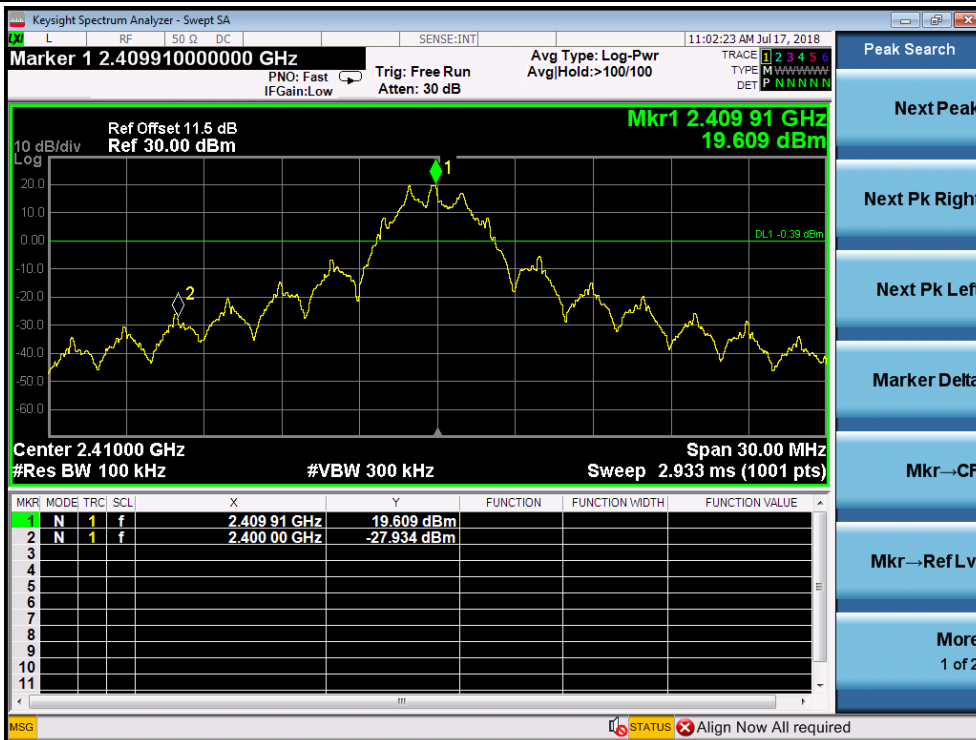

Band-edge for RF Conducted Emissions_2477_Hopping On

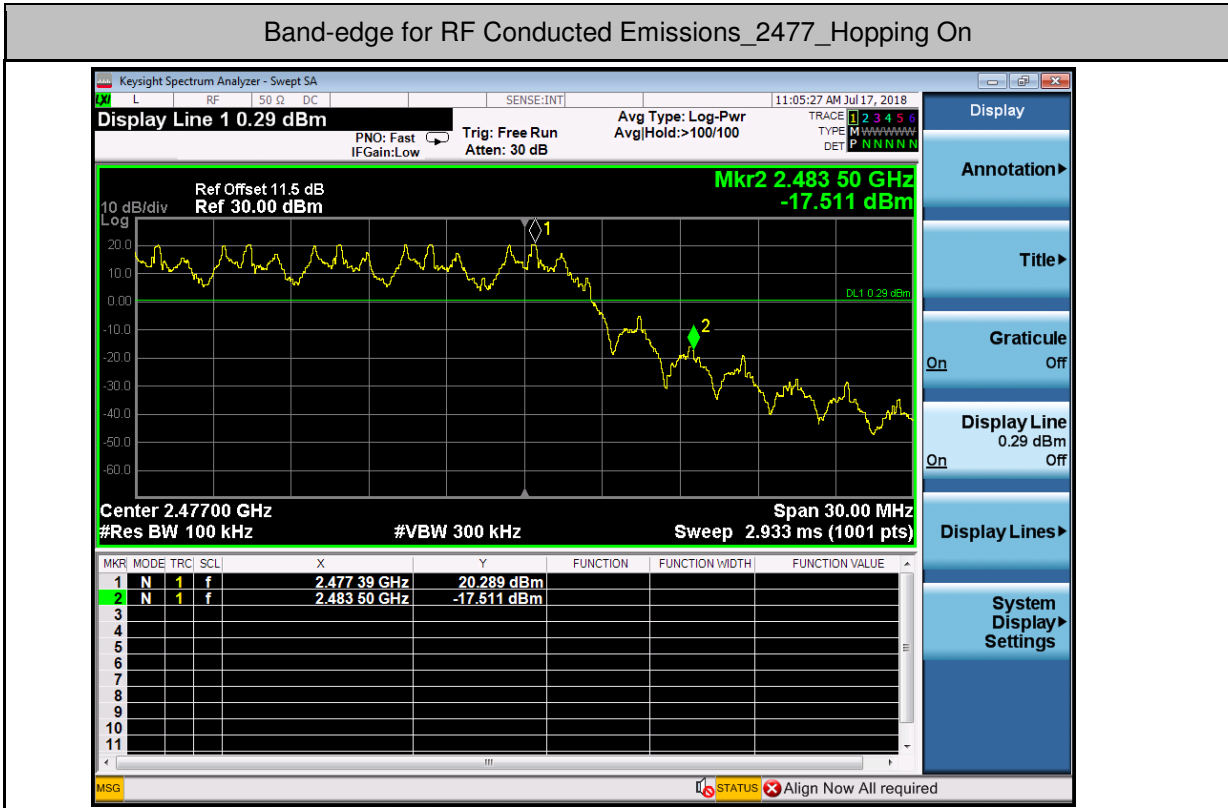

Band-edge for RF Conducted Emissions_2477_Hopping Off

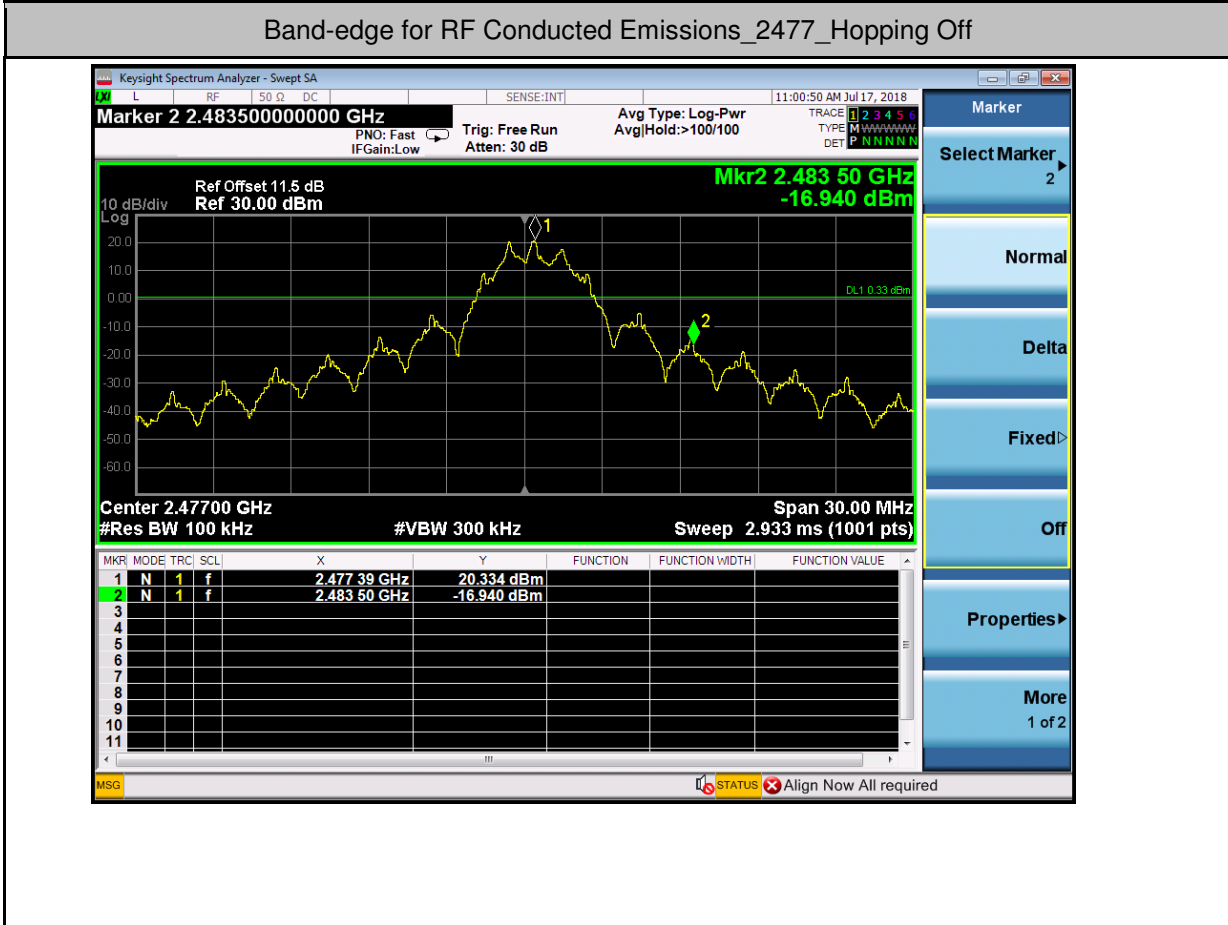


7.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
GFSK	2410	30	10000	100	300	19.618	-49.703	<-0.38	PASS
GFSK	2410	10000	25000	100	300	19.618	-42.942	<-0.38	PASS
GFSK	2445	30	10000	100	300	20.207	-49.006	<0.21	PASS
GFSK	2445	10000	25000	100	300	20.207	-43.351	<0.21	PASS
GFSK	2477	30	10000	100	300	20.299	-49.697	<0.30	PASS
GFSK	2477	10000	25000	100	300	20.299	-43.962	<0.30	PASS



CSE_2

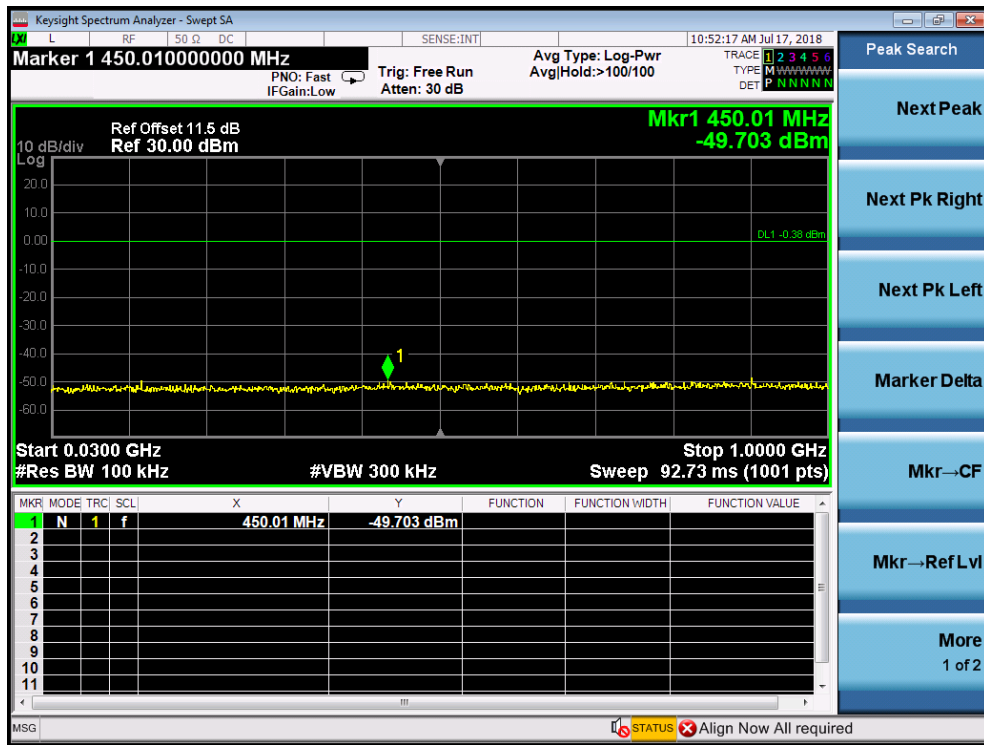


RF Conducted Spurious Emissions_2445


Pref



CSE_1

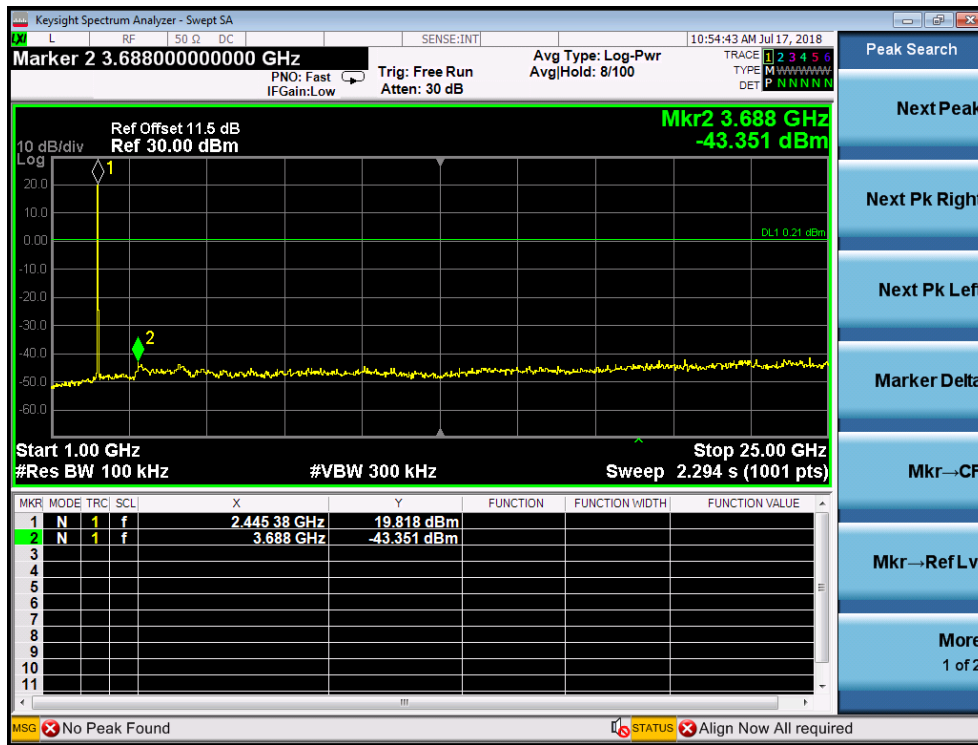


CSE_2

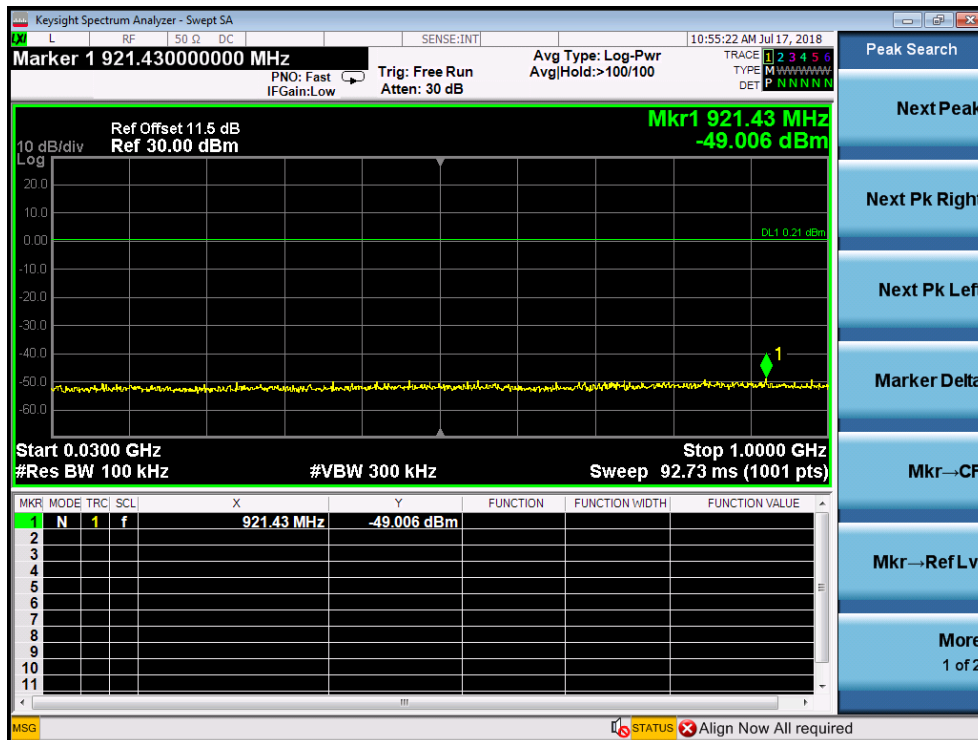


RF Conducted Spurious Emissions_2477


Pref

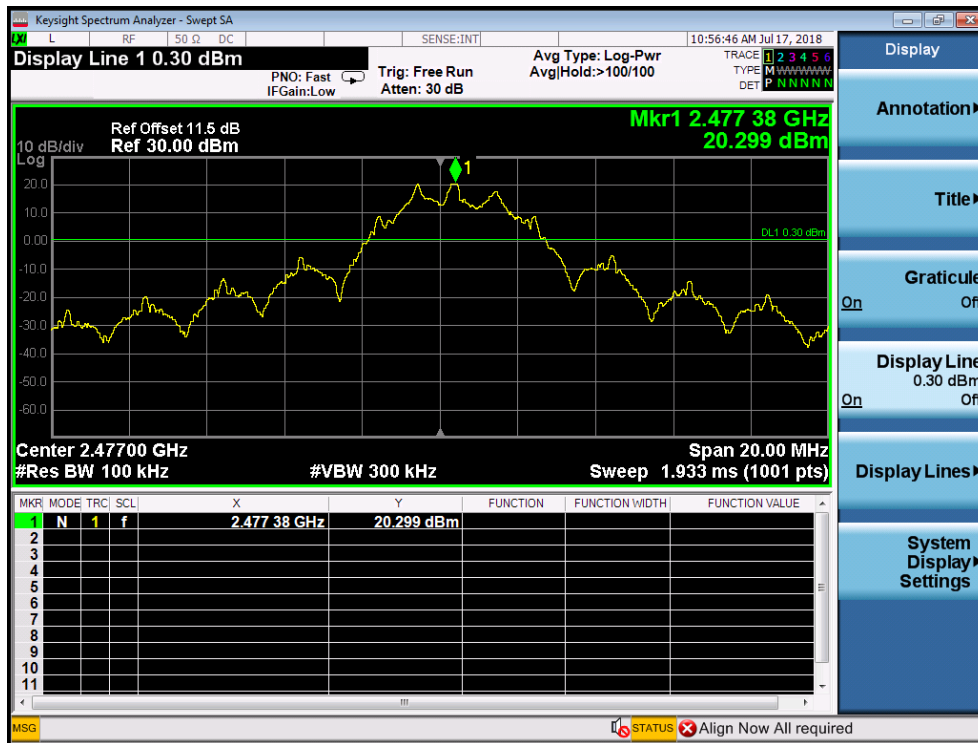

CSE_1

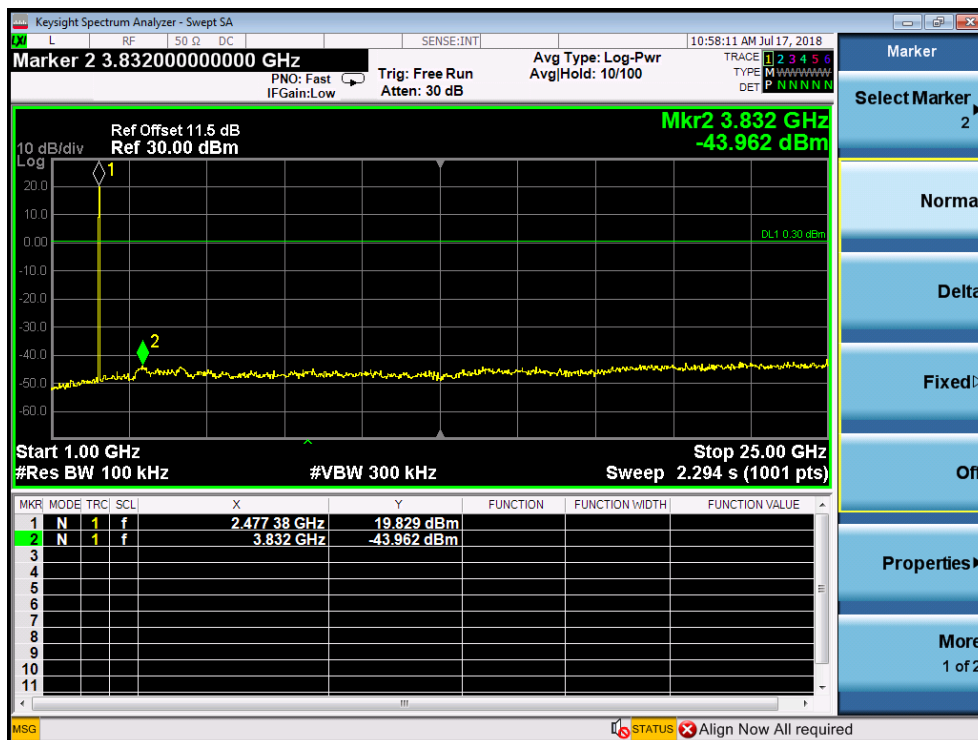

CSE_2

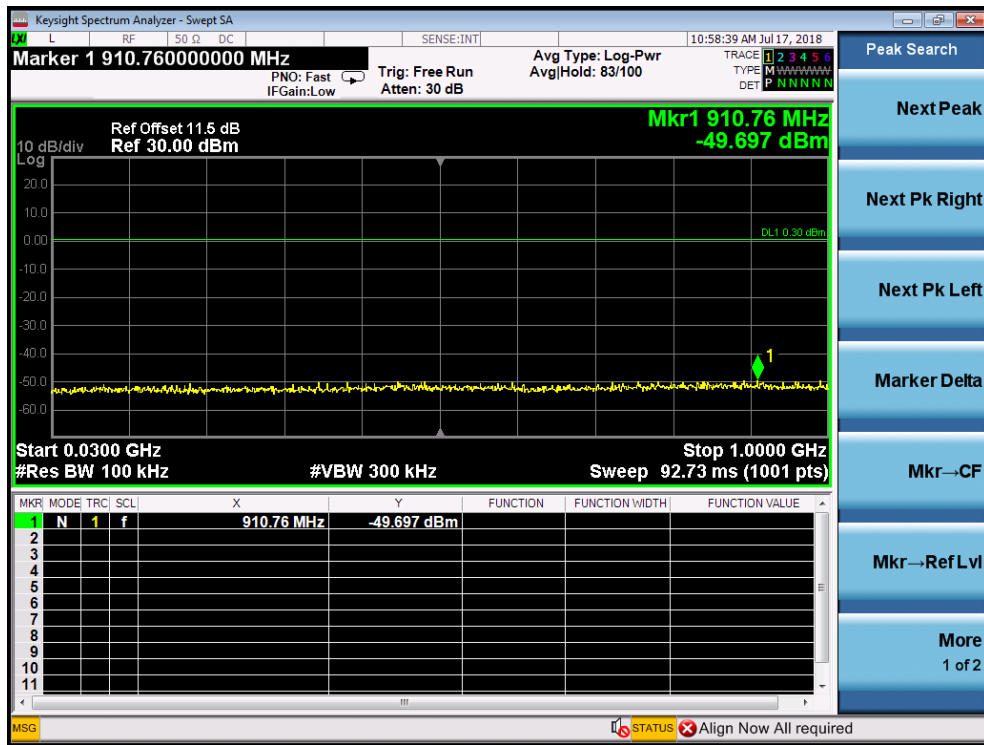

--End of Report--