

FCC PART 15.247

TEST REPORT

For

Lorex Technology Inc

250 Royal Crest Court Markham, Ontario L3R 3S1 Canada

FCC ID: UCZWL1741

Report Type: Original Report	Product Type: 7" Security Video Monitor(Monitor Unit)
Test Engineer: August He	August. He
Report Number: RSZ140805007-00	
Report Date: 2014-09-04	
Reviewed By: RF Engineer	Jimmy Xiao
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §2.1093 – RF EXPOSURE	8
APPLICABLE STANDARD	8
FCC §15.203 – ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	14
APPLICABLE STANDARD	14
MEASUREMENT UNCERTAINTY.....	14
EUT SETUP	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	15
TEST EQUIPMENT LIST AND DETAILS.....	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	16
TEST DATA	16
FCC §15.247(a) (1)-CHANNEL SEPARATION	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	24
APPLICABLE STANDARD	24

TEST PROCEDURE	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	29
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32
FCC §15.247(d) - BAND EDGES	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST DATA	35
PRODUCT SIMILARITY DECLARATION LETTER	38

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Lorex Technology Inc*'s product, model number: *LW1741 (FCC ID: UCZW1741)* (the "EUT") in this report was a *monitor unit of 7" Security Video Monitor*, which was measured approximately: 18.8 cm (L) x 13.2 cm (W) x 1.7 cm (H), rated with input voltage: DC 5.0V from adapter.

Adapter Information:

Model: Y12FE-050-2000U

Input: AC 100-240V, 50-60Hz, 0.35A

Output: DC 5.0V, 2000mA

Note: the monitor unit of model LW1741 and LW1742, LW1744 are electrically identical schematics, the only difference among them is the model name due to different combination, model LW1741 was selected for fully testing, the detailed information can be referred to the attached declaration letter that stated and guaranteed by the applicant.

** All measurement and test data in this report was gathered from production sample serial number: WC01140500001(Assigned by the applicant). The EUT supplied by the applicant was received on 2014-08-05.*

Objective

This report is prepared on behalf of *Lorex Technology Inc* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Submitted with the camera unit of a system with FCC ID: UCZMC1741

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010.

The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

FINAL

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode which was selected by manufacturer.

EUT Exercise Software

No exercise software was used.

Equipment Modifications


No modification was made to the EUT tested.

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielding Un-detachable DC Power Cable	1.9	EUT	Adapter

Block Diagram of Test Setup

For Conducted emission test at main port:

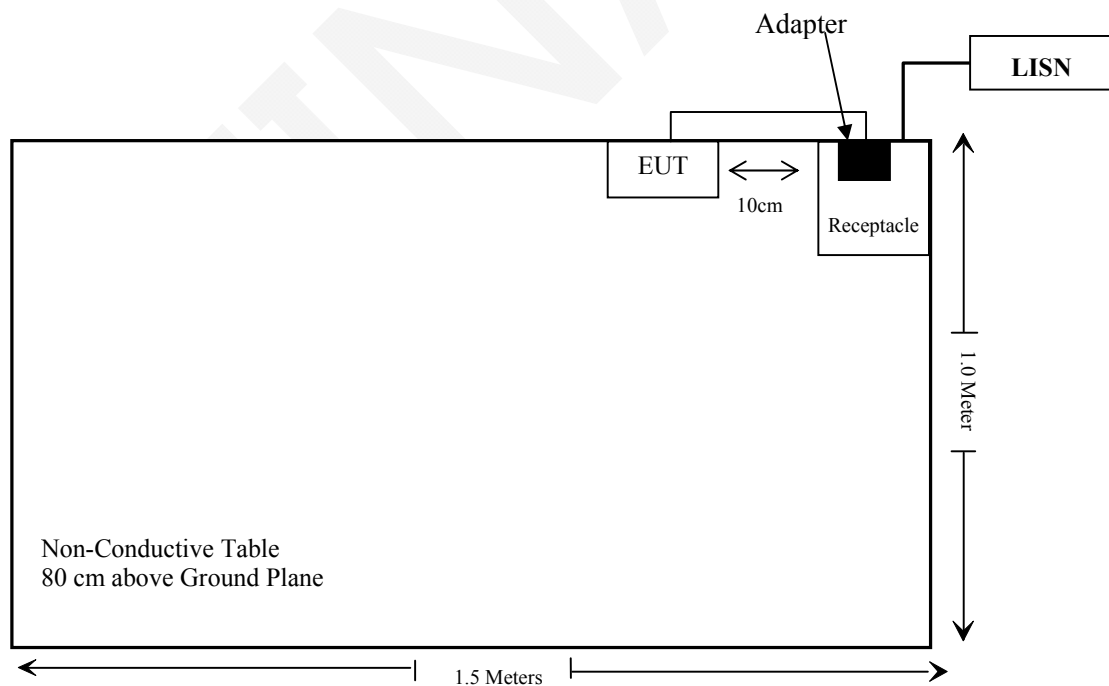

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b)(1), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The maximum conducted output power=20.07 dBm=101.62 mW at 2408.625MHz

The time-averaged maximum conducted output power=101.62 mW *Duty cycle

=101.62 mW * 0.014

=1.42 mW

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] = 1.42/5 \cdot (\sqrt{2.408625})$
= 0.44 < 3.0

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one monopole antenna arrangement, which was permanently attached and the antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR-16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

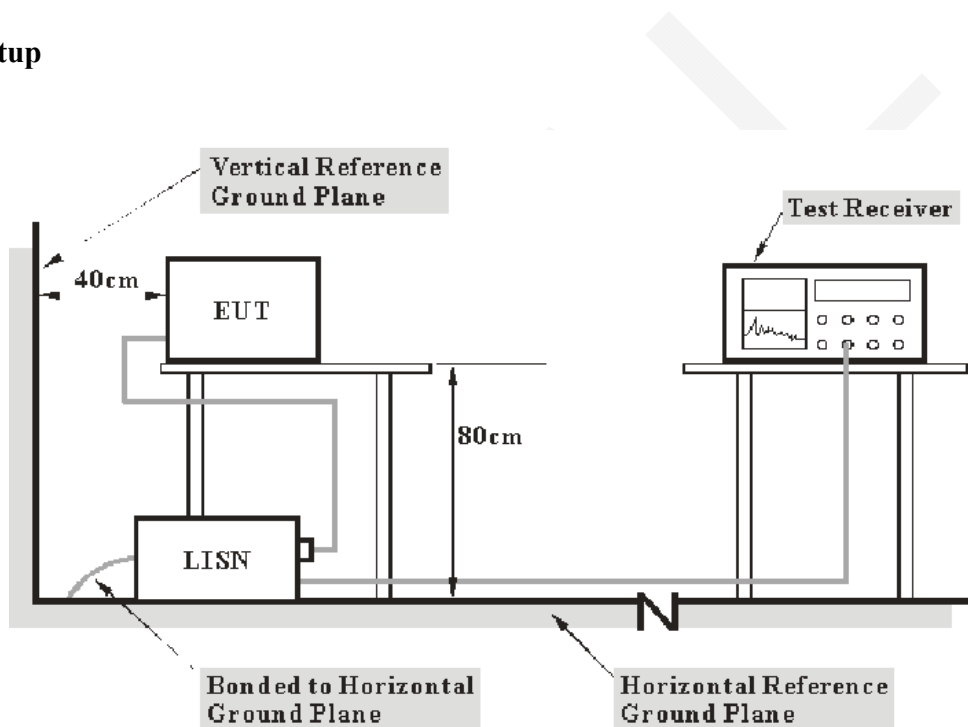

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-25	2014-09-25
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2014-05-07	2015-05-07
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2013-10-15	2014-10-15
Rohde & Schwarz	CE Test software	EMC 32	V8.53	--	--

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, the worst margin reading as bellow:

16.7 dB at 0.396090 MHz in the Neutral conducted mode

Test Data

Environmental Conditions


Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by August He on 2014-08-19.

Test Mode: Transmitting & Charging

AC 120V, 60 Hz, Line:


EMI Auto Test L

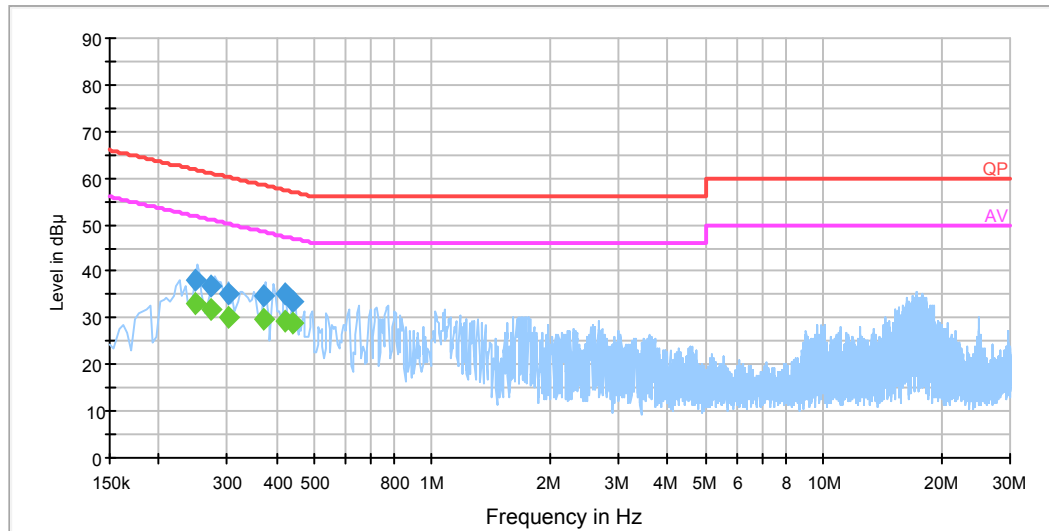

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
0.249500	38.2	19.5	61.8	23.6	QP
0.249500	33.1	19.5	51.8	18.7	Ave.
0.273500	36.9	19.5	61.0	24.1	QP
0.273500	31.8	19.5	51.0	19.2	Ave.
0.301470	35.1	19.4	60.2	25.1	QP
0.301470	30.0	19.4	50.2	20.2	Ave.
0.372390	34.5	19.5	58.4	23.9	QP
0.372390	29.8	19.5	48.4	18.6	Ave.
0.419670	35.4	19.5	57.5	22.1	QP
0.419670	29.4	19.5	47.5	18.1	Ave.
0.443310	33.4	19.6	57.0	23.6	QP
0.443310	28.8	19.6	47.0	18.2	Ave.

AC 120V, 60 Hz, Neutral:

EMI Auto Test N

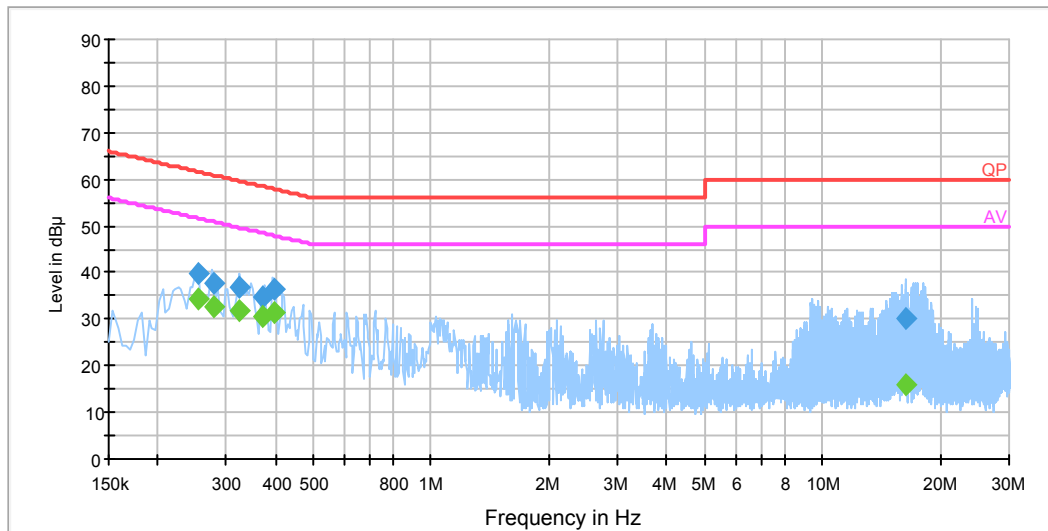

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/QP/Ave.)
0.253500	39.6	19.5	61.6	22.0	QP
0.253500	34.5	19.5	51.6	17.1	Ave.
0.277500	37.7	19.5	60.9	23.2	QP
0.277500	32.4	19.5	50.9	18.5	Ave.
0.325170	36.9	19.5	59.6	22.7	QP
0.325170	31.7	19.5	49.6	17.9	Ave.
0.372390	35.0	19.5	58.4	23.4	QP
0.372390	30.5	19.5	48.4	17.9	Ave.
0.396090	36.5	19.6	57.9	21.4	QP
0.396090	31.2	19.6	47.9	16.7	Ave.
16.364930	30.3	19.9	60.0	29.7	QP
16.364930	16.0	19.9	50.0	34.0	Ave.

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss
- 3) Margin = Limit – Corrected Amplitude

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

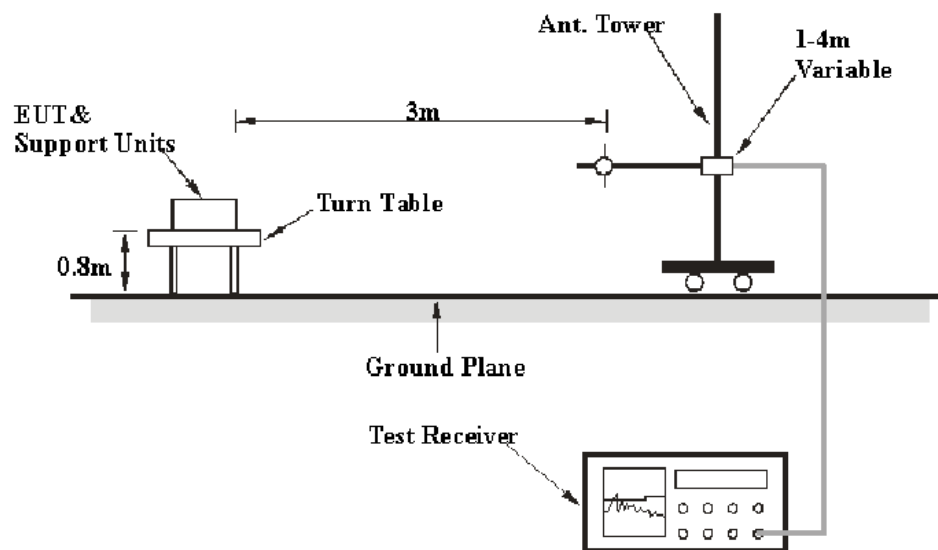

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz to 1GHz and peak and Average detection modes for frequencies above 1GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2014-05-06	2015-05-06
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-25	2014-09-25
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2014-04-23	2015-04-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2013-11-30	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2013-11-12	2014-11-12
DUCOMMUN	Pre-amplifier	ALN-22093530-01	991373-01	2014-08-03	2015-08-03
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

1.8 dB at 2484.10 MHz in the Horizontal polarization

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by August He on 2014-09-04.

Test Mode: Transmitting

30 MHz -25 GHz:

Frequency (MHz)	Receiver		Turn table Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2408.625 MHz)									
178.70	43.23	QP	199	1.2	V	-14.9	28.33	43.5	15.17
2408.625	106.95	PK	200	1.2	H	6.13	113.08	/	/
2408.625	108.47	PK	265	1.7	V	6.13	114.6	/	/
2344.22	50.83	PK	21	2.4	H	5.48	56.31	74	17.69
2344.22	25.62	Ave.	21	2.4	H	5.48	31.10	54	22.90
2388.72	64.61	PK	3	2.0	H	5.48	70.09	74	3.91
2388.72	27.88	Ave.	3	2.0	H	5.48	33.36	54	20.64
2488.03	49.86	PK	305	2.2	V	7.21	57.07	74	16.93
2488.03	35.41	Ave.	305	2.2	V	7.21	42.62	54	11.38
4817.25	34.27	PK	111	2.2	H	12.44	46.71	74	27.29
7225.88	36.13	PK	78	1.1	V	17.06	53.19	74	20.81
9634.50	35.96	PK	106	2.3	V	19.28	55.24	74	18.76
Middle Channel (2439 MHz)									
178.70	44.25	QP	259	1.9	V	-14.9	29.35	43.5	14.15
2439.00	104.48	PK	276	2.2	H	6.13	110.61	/	/
2439.00	108.27	PK	35	2.0	V	6.13	114.4	/	/
2364.05	43.28	PK	265	1.9	H	5.48	48.76	74	25.24
2364.05	24.76	Ave.	265	1.9	H	5.48	30.24	54	23.76
2389.00	53.73	PK	141	1.3	H	5.48	59.21	74	14.79
2389.00	25.52	Ave.	141	1.3	H	5.48	31.00	54	23.00
2486.38	56.86	PK	114	1.7	V	7.21	64.07	74	9.93
2486.38	27.46	Ave.	114	1.7	V	7.21	34.67	54	19.33
4878.00	40.31	PK	233	1.7	H	12.4	52.71	74	21.29
7317.00	35.58	PK	116	1.4	H	16.49	52.07	74	21.93
9756.00	34.08	PK	74	1.6	H	19.4	53.48	74	20.52

Frequency (MHz)	Receiver		Turn table Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2469.375 MHz)									
178.70	45.61	QP	68	1.0	V	-14.9	30.71	43.5	12.79
2469.375	106.95	PK	207	2.1	H	7.21	114.16	/	/
2469.375	104.74	PK	350	2.4	V	7.21	111.95	/	/
2374.10	50.69	PK	328	2.3	V	5.48	56.17	74	17.83
2374.10	21.04	Ave.	328	2.3	V	5.48	26.52	54	27.48
2484.10	64.99	PK	248	1.8	H	7.21	72.20	74	1.80
2484.10	21.40	Ave.	248	1.8	H	7.21	28.61	54	25.39
2491.36	57.46	PK	300	1.3	H	7.21	64.67	74	9.33
2491.36	20.84	Ave.	300	1.3	H	7.21	28.05	54	25.95
4938.75	35.77	PK	27	2.1	V	12.46	48.23	74	25.77
7408.13	35.04	PK	192	1.1	V	15.91	50.95	74	23.05
9877.50	35.29	PK	113	2.1	H	19.39	54.68	74	19.32

Note:

Corrected Amplitude = Corrected Factor + Reading


Corrected Factor=Antenna factor (RX) + cable loss – amplifier factor

Margin = Limit- Corr. Amplitude

Field Strength Radiated Emission Average							
Freq. (MHz)	Peak Corrected Amplitude (dBμV/m)	Polar (H/V)	Duty cycle Factor (dB)	Corrected Amplitude (dBμV/m)	FCC PART 15.247		Comment
					Limit (dBμV/m)	Margin (dB)	
Low Channel							
2408.625	113.08	H	-37.2	75.88	/	/	Fund.
2408.625	114.60	V	-37.2	77.40	/	/	Fund.
4817.25	46.71	H	-37.2	9.51	54	44.49	Harmonic
7225.88	53.19	V	-37.2	15.99	54	38.01	Harmonic
9634.50	55.24	V	-37.2	18.04	54	35.96	Harmonic
Middle Channel							
2439.00	110.61	H	-37.2	73.41	/	/	Fund.
2439.00	114.40	V	-37.2	77.20	/	/	Fund.
4878.00	52.71	H	-37.2	15.51	54	38.49	Harmonic
7317.00	52.07	H	-37.2	14.87	54	39.13	Harmonic
9756.00	53.48	H	-37.2	16.28	54	37.72	Harmonic
High Channel							
2469.375	114.16	H	-37.2	76.96	/	/	Fund.
2469.375	111.95	V	-37.2	74.75	/	/	Fund.
4938.75	48.23	V	-37.2	11.03	54	42.97	Harmonic
7408.13	50.95	V	-37.2	13.75	54	40.25	Harmonic
9877.50	54.68	H	-37.2	17.48	54	36.52	Harmonic

Note:
 $T_{on}=0.230*6ms=1.38ms$
 $T_p=100ms$
 $Duty\ Cycle = T_{on}/T_p*100\%$, Duty cycle factor = $20lg(Duty\ Cycle) = -37.2$
 $Ave. = PK+20*lg(Duty\ Cycle)$

100 ms

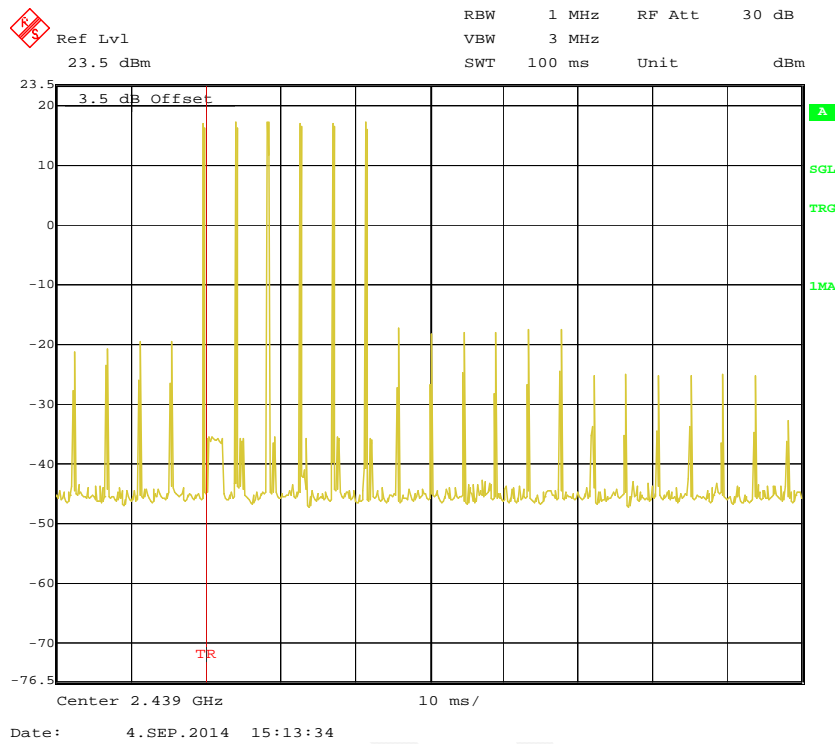

FCC §15.247(a) (1)-CHANNEL SEPARATION

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in operating mode, RBW was set at 100 kHz, VBW \geq 3RBW maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-05-31	2015-05-31

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27°C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by August He on 2014-08-29.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Channel	Channel Frequency (MHz)	Channel Separation (MHz)	\geq Limit (MHz)	Result
Low	2408.625	3.383	2.378	Pass
Adjacent	2412.000			
Middle	2439.000	3.387	2.405	
Adjacent	2442.375			
High	2469.375	3.387	2.365	
Adjacent	2466.000			

Note: limit =2/3 of 20 dB bandwidth


Low Channel

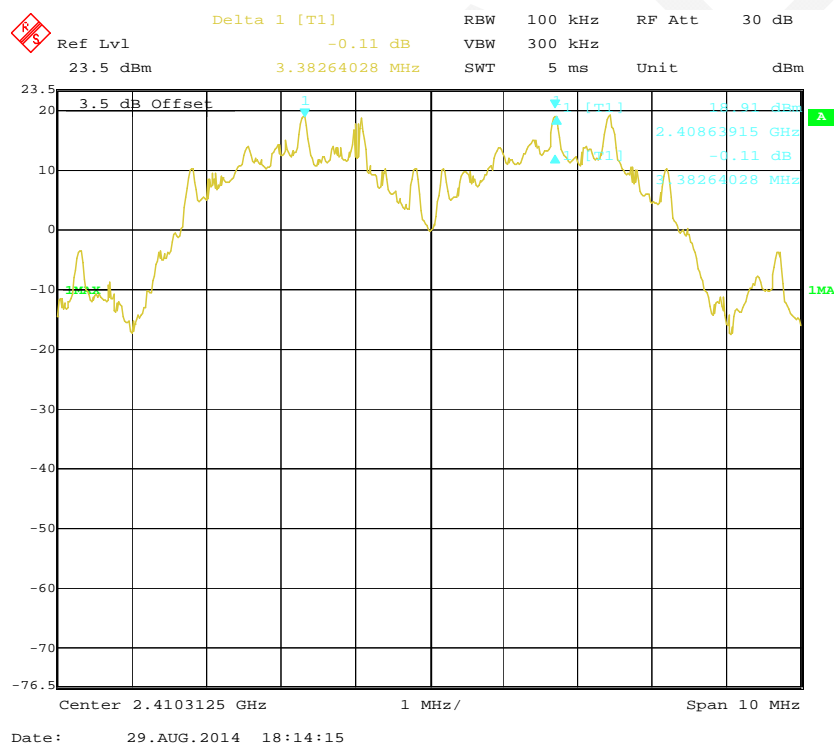

Middle Channel

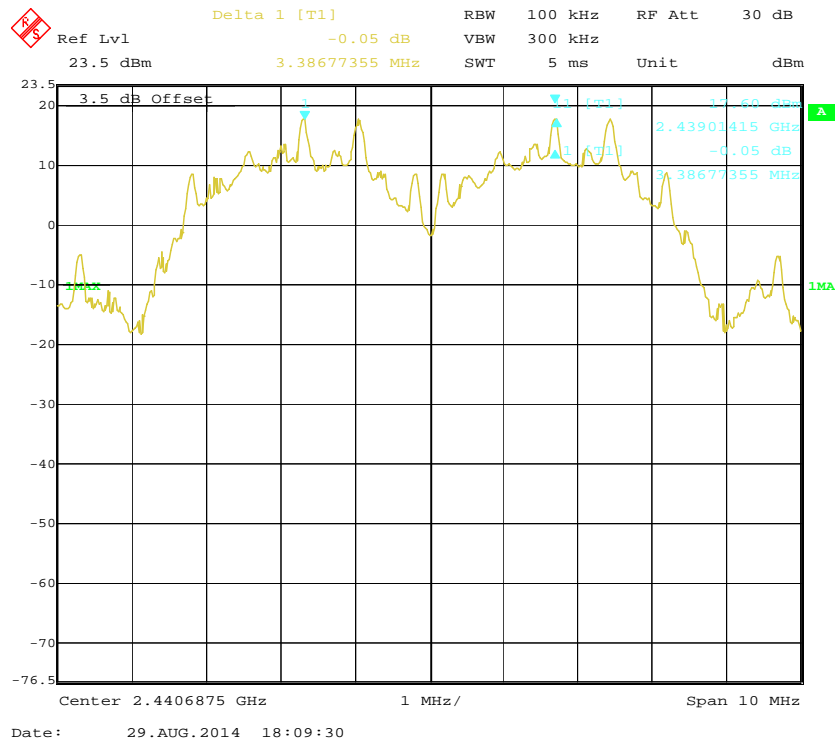

High Channel

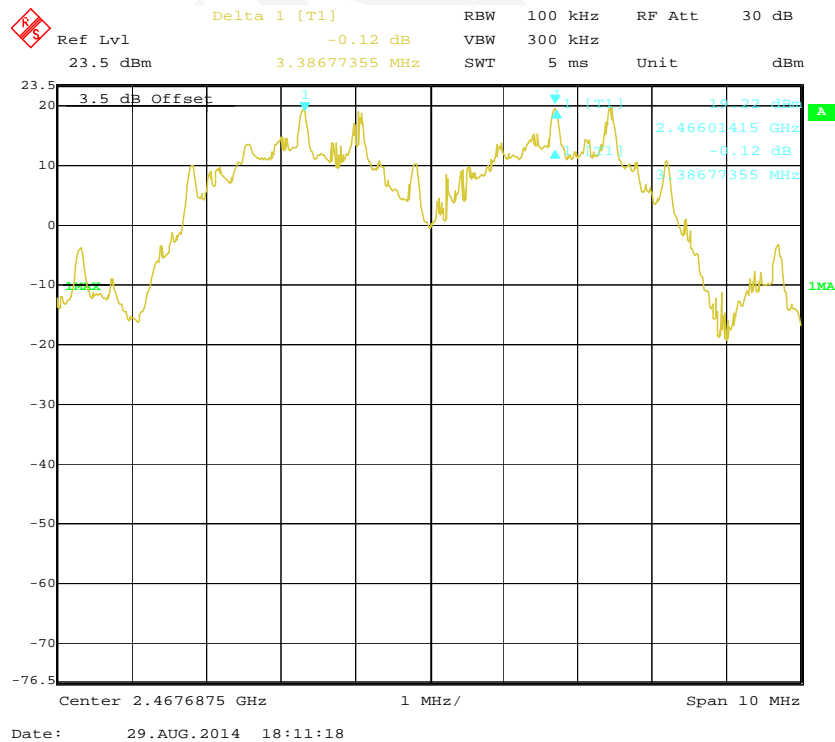

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
3. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-05-31	2015-05-31

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27 – 26 °C
Relative Humidity:	55 – 56 %
ATM Pressure:	101.0 kPa


The testing was performed by August He from 2014-08-29 to 2014-09-04.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting


Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
Low	2408.625	3.567
Middle	2439.000	3.607
High	2469.375	3.547

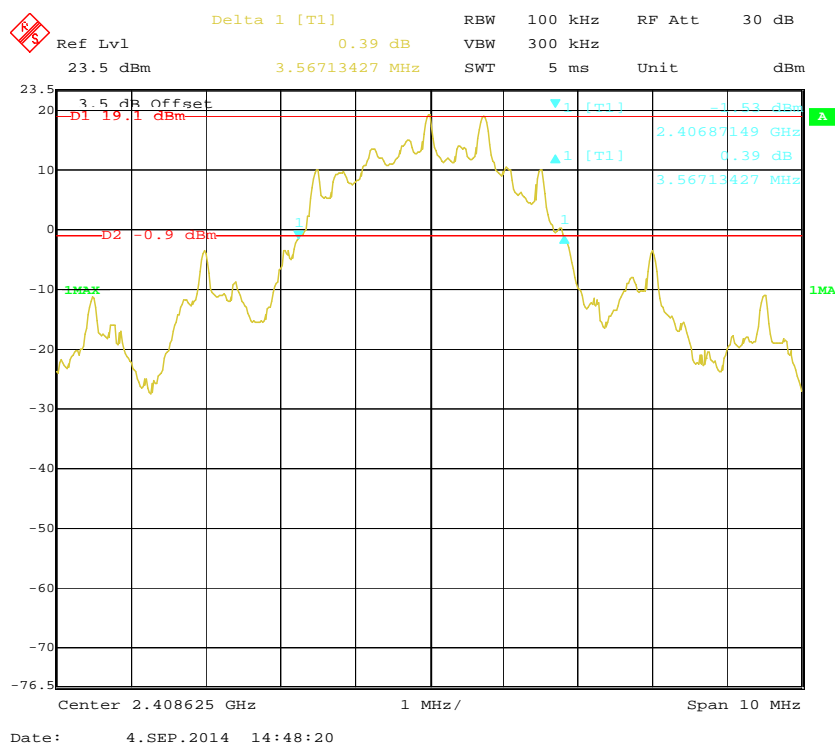Low Channel

Middle Channel

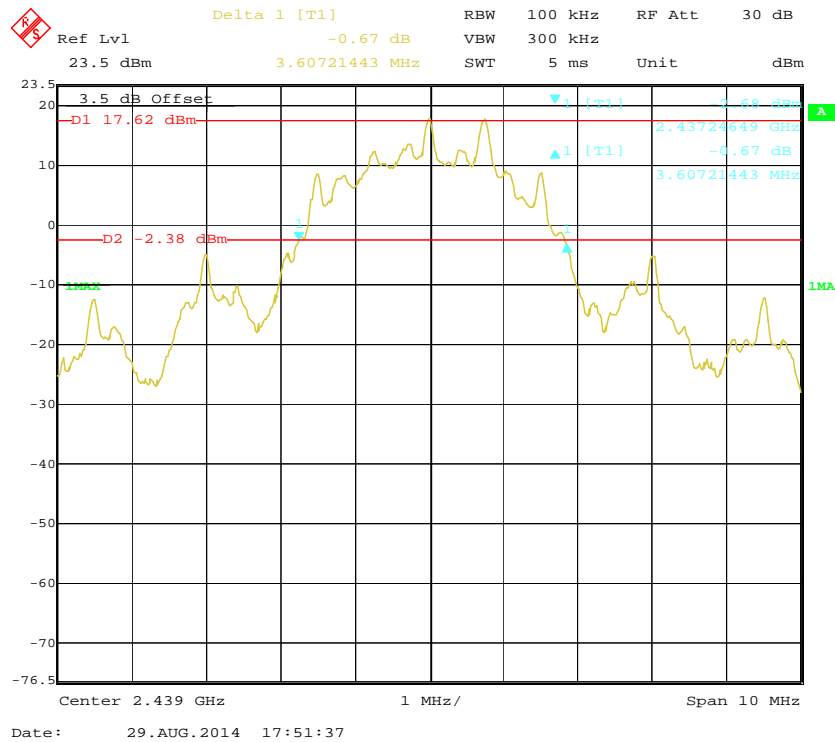

High Channel

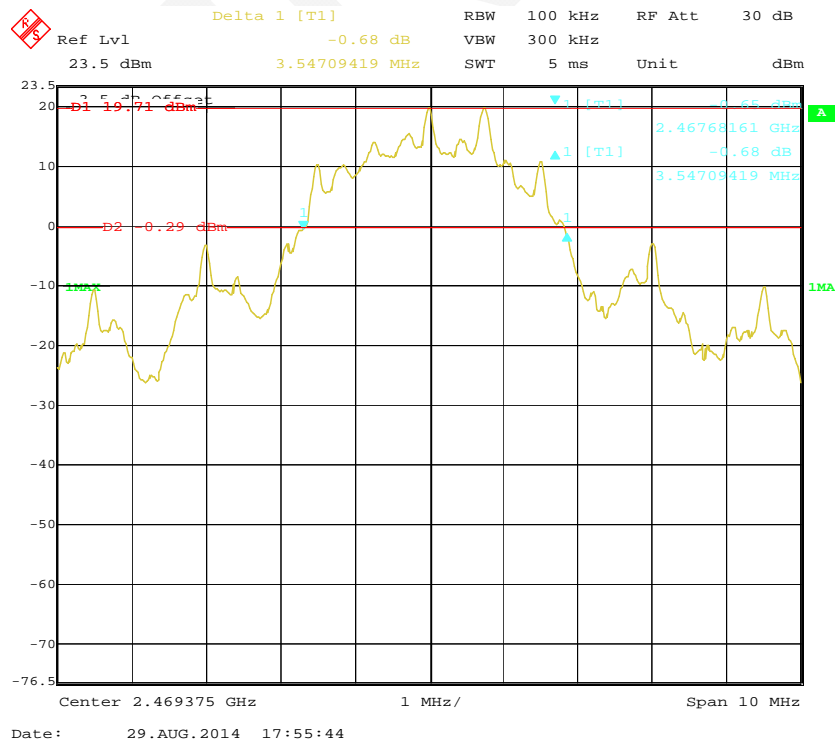

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-05-31	2015-05-31

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by August He on 2014-08-29.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.50	19	≥ 15

Number of Hopping Channels

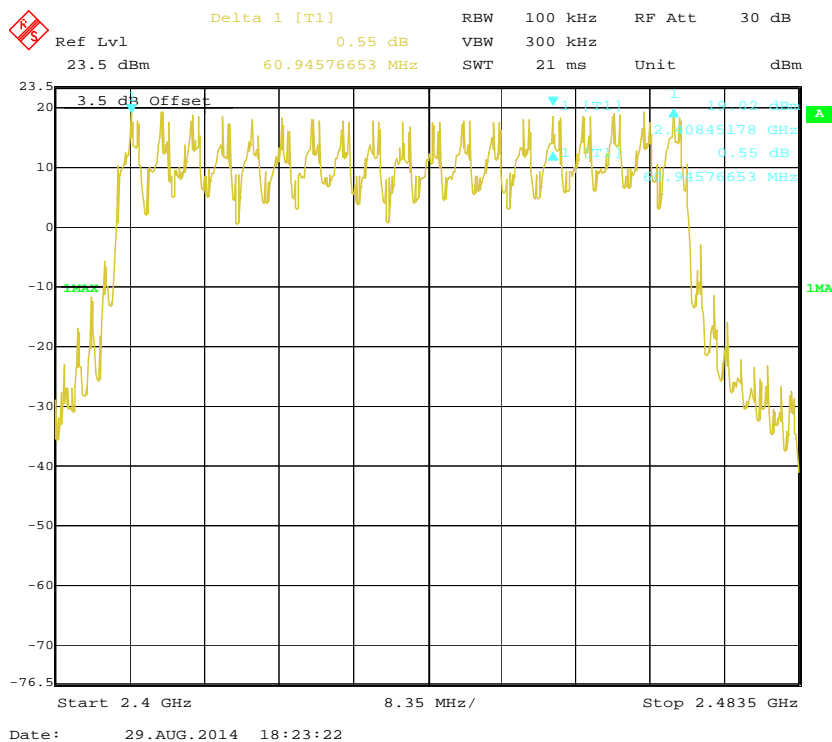

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; spectrum span was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= Pulse time (ms) * hope rate/ number of hopping channels * hopping No.*0.4 s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-05-31	2015-05-31

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by August He on 2014-08-29.


Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
Low	0.230	0.021	0.4	Pass
Middle	0.230	0.021	0.4	Pass
High	0.230	0.021	0.4	Pass
Note: Dwell time=Pulse time (ms) × (231/19) × 19*0.4 S				


Low Channel

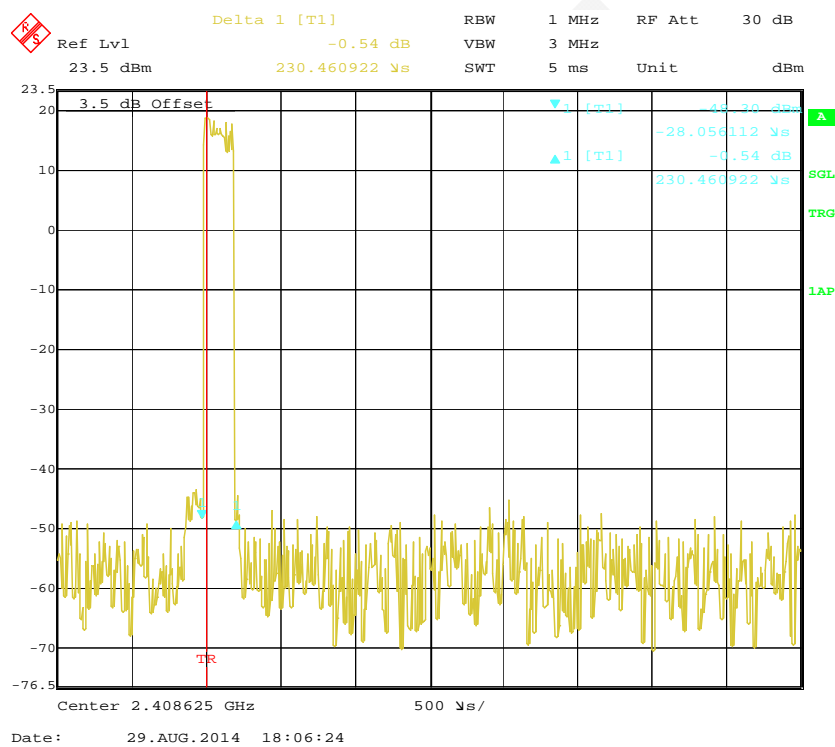

Middle Channel

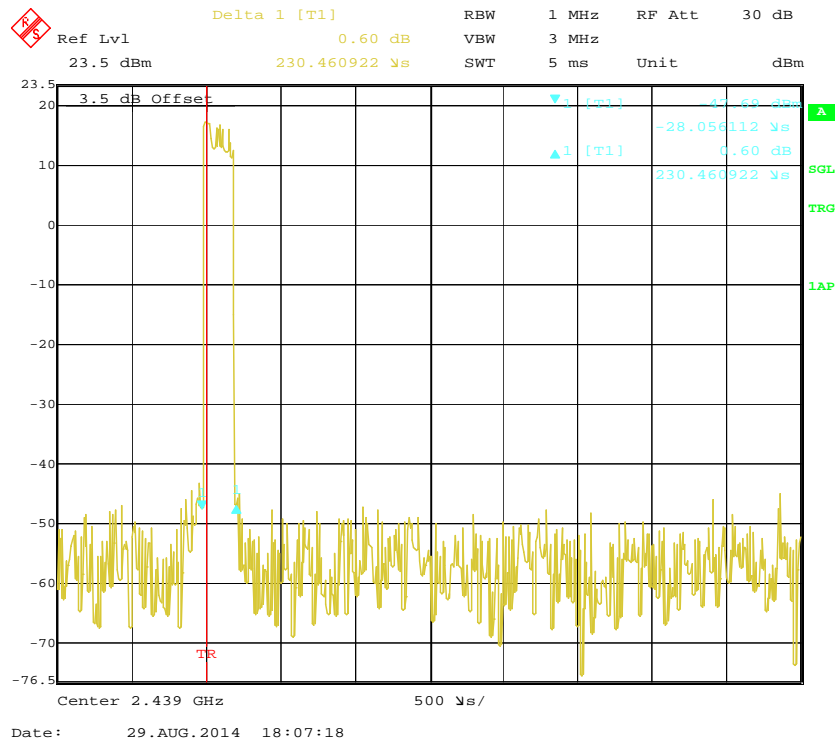

High Channel

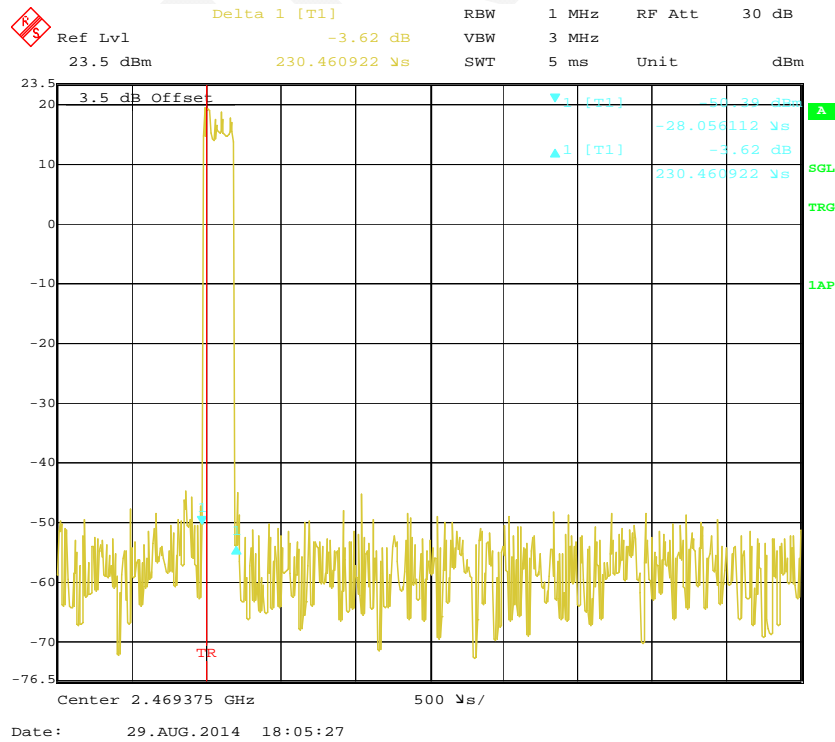

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-05-31	2015-05-31

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by August He on 2014-08-29.


Test Result: Compliance.

Test Mode: Transmitting


Channel	Channel Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
Low	2408.625	20.07	20.97
Middle	2439.000	18.35	20.97
High	2469.375	20.50	20.97

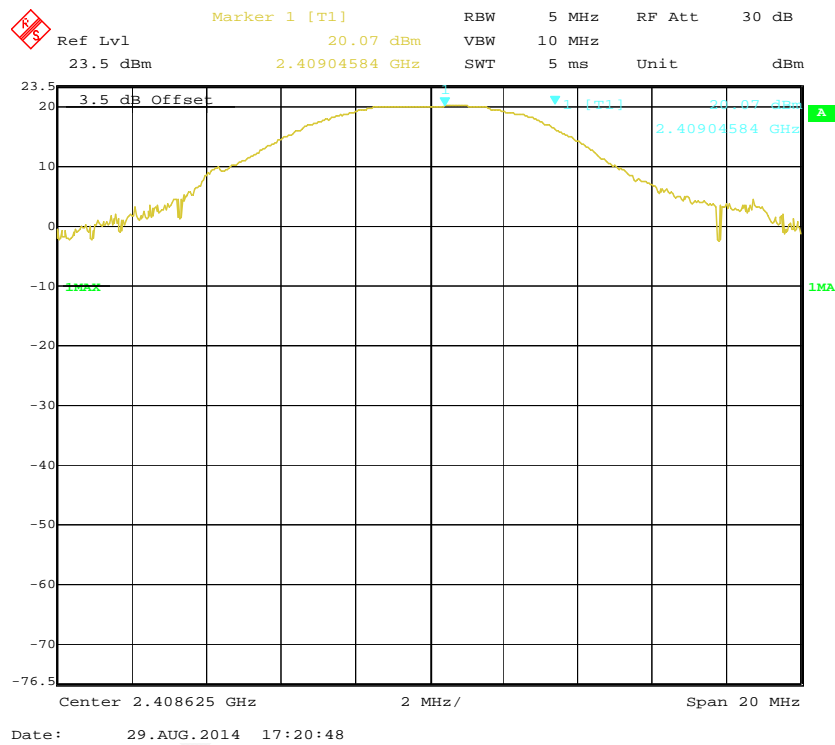Low Channel

Middle Channel

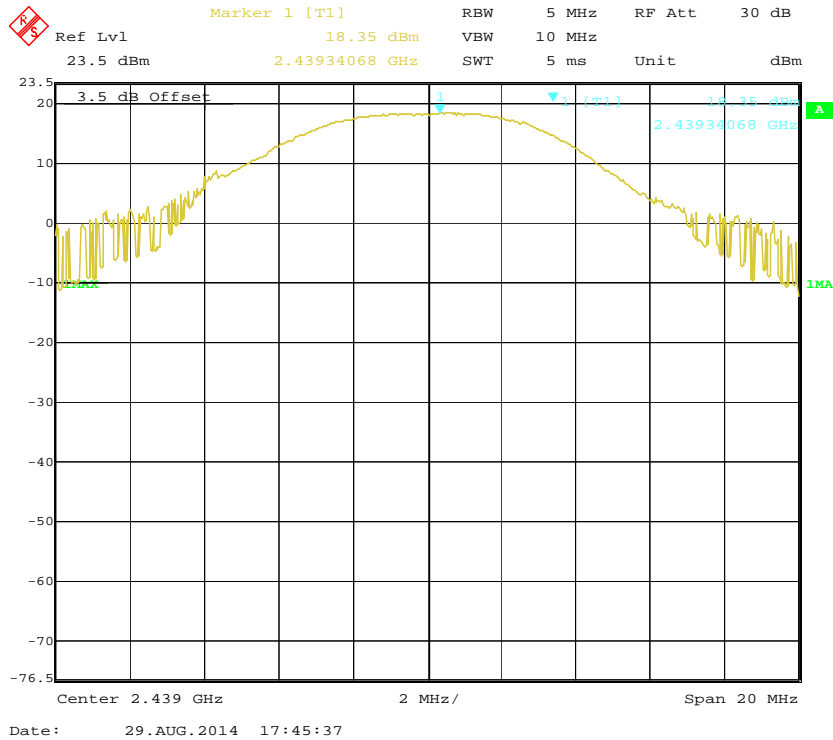

High Channel

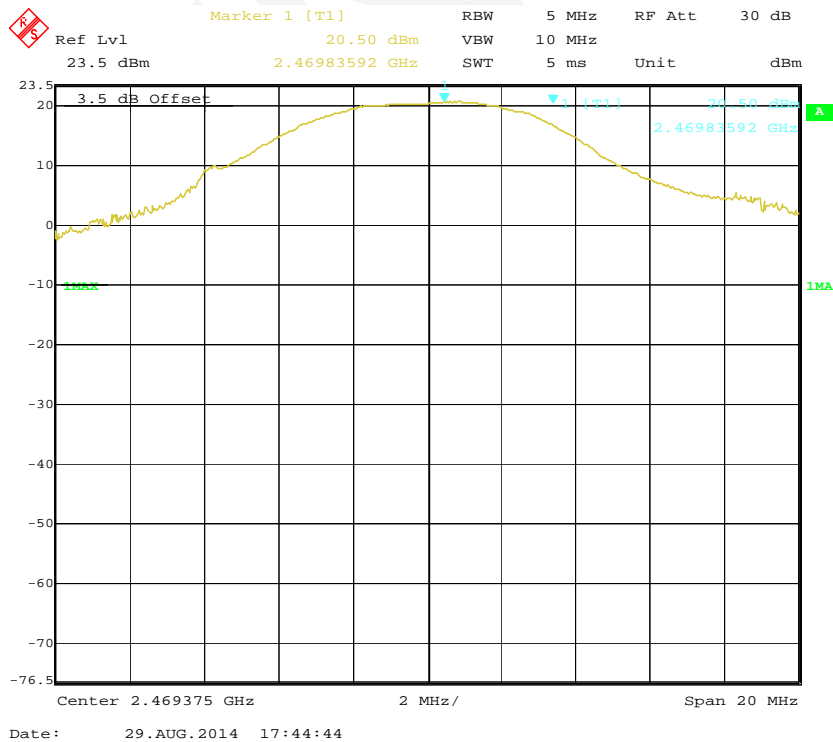

FCC §15.247(d) - BAND EDGES

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in Operating mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-05-31	2015-05-31

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56%
ATM Pressure:	101.0 kPa


The testing was performed by August He on 2014-09-04.

Test Result: Compliance.


Test Mode: Transmitting

Please refer to follow plots:

Band Edge: Left Side

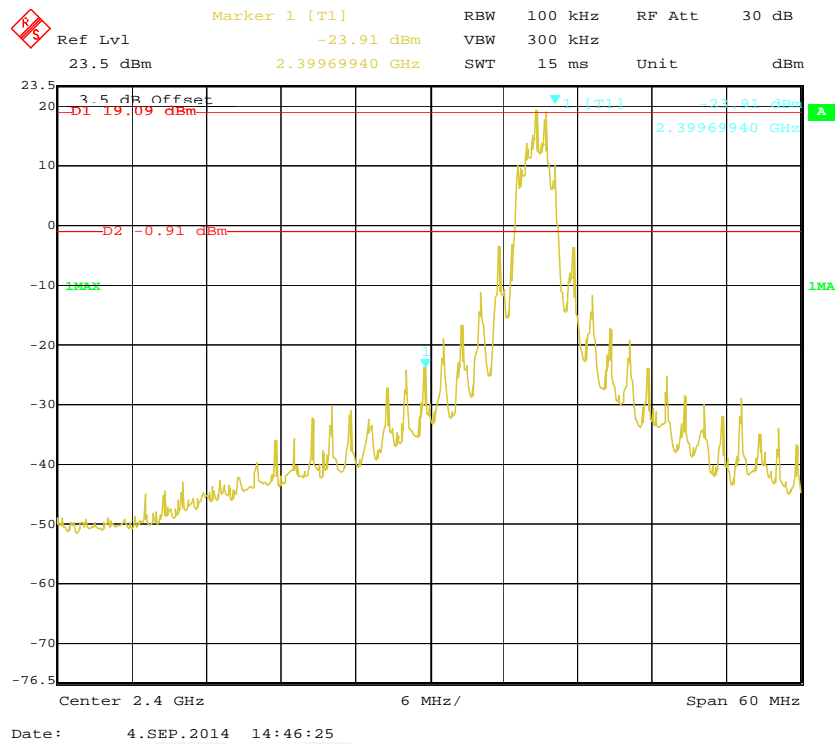

Band Edge: Right Side

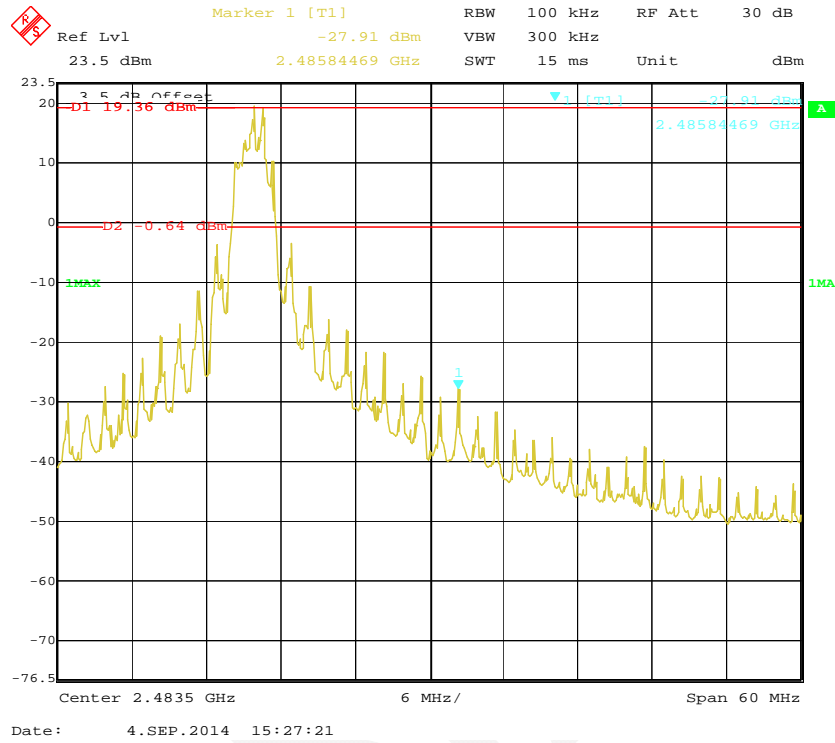

PRODUCT SIMILARITY DECLARATION LETTER

Lorex Technology Inc
250 Royal Crest Court Markham, Ontario L3R 3S1 Canada
Tel: 905 946 8589 Fax: 905 947 0138

08/19/2014

Product Similarity Declaration


To Whom It May Concern,

We, Lorex Technology Inc , hereby declare that we have a product named as 7" Security Video Monitor, (Model number: LW1741) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series models (LW1742, LW1744, LW1741) on reports and certificate, all the models are identical schematics. Only named differently due to different combination, for details as below:

Model No	Model description
LW1742	1 Monitor+2 Camera
LW1744	1 Monitor+4 Camera
LW1741	1 Monitor+1 Camera

No other changes are made to them.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

Signature: 

Niles Kanapathipillai

Director Quality Assurance

***** END OF REPORT *****