

TEST REPORT

1. Applicant

Name : Uriver Inc
Address : 3rd., Fl., Bogwang Bldg, Gaepo-dong, 1238-7
Gangnam-gu, Seoul, Korea

2. Products

Name : Tri-Band GSM Mobile Phone with Bluetooth
Model/Type : UR801, ST-1
Manufacturer : Uriver Inc

3. Test Standard

: FCC CFR 47 Part 15, Subpart B

4. Test Method

: ANSI C63.4-2003

5. Test Result

: Positive


6. Date of Application

: May 29, 2008

7. Date of Issue

: June 09, 2008

Tested by



Sung-kyu Cho

Telecommunication Team
Engineer

Approved by



Seok-Jin Kim

Telecommunication Team
Manager

The test results contained apply only to the test sample(s) supplied by the applicant, and this test report shall not be reproduced in full or in part without approval of the KTL in advance.

Korea Testing Laboratory

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1. Applicant (Client)	3
1.2. Equipment (EUT)	3
1.3. Testing Laboratory	4
2. SUMMARY OF TEST RESULTS	5
3. MEASUREMENT & RESULTS	6
3.1. AC Conducted Emissions	6
3.1.1. Test Procedure	6
3.1.2. Limits	6
3.1.3. Sample calculation	7
3.1.4. Photograph for the test configuration	7
3.1.5. Test Results	8
3.2. Radiated Spurious Emissions	11
3.2.1. Test Procedure	11
3.2.2. Limits	12
3.2.3. Sample Calculation	13
3.2.4. Photograph for the test configuration	13
3.2.5. Test Results	14
4. TEST EQUIPMENTS	15
APPENDIX.1 EUT PHOTO	16
APPENDIX.2 TEST SETUP PHOTO	17

1. GENERAL INFORMATIONS

1.1. Applicant (Client)

Name	Uriver Inc
Address	3rd., Fl., Bogwang Bldg, Gaepo-dong, 1238-7 Gangnam-gu, Seoul, Korea
Contact Person	TSJEONG
Telephone No.	+82-2-3497-8432
Facsimile No.	+82-2-579-6624
E-mail address	tsjeong@uriver.co.kr
Manufacturer Name	Uriver Inc
Manufacturer Address	3rd., Fl., Bogwang Bldg, Gaepo-dong, 1238-7 Gangnam-gu, Seoul, Korea

1.2. Equipment (EUT)

Type of equipment	PC Peripheral
Model Name	UR801, ST-1
FCC ID	UDTUR80
Weight	Less than 119 grams including standard battery
Dimension	106 x 56 x 12.9 mm
GSM 850/1900	824.2 ~ 848.8 MHz (GSM850) 1850.2 ~ 1909.8 MHz (GSM1900)
Bluetooth	2402 ~ 2480 MHz
Power Source	Li-Ion, 3.7VDC, Adaptor Input : AC 120V Output : DC 5V
Hardware Version	UR80.03.01
Software Version	UR80.01.04.01

1.3. Testing Laboratory

Testing Place	Korea Testing Labortory (KTL) 1271-12, Sa-Dong Sangnok-Gu, Ansan-si Gyunggi-Do , Korea
FCC registration number	408324
Industry Canada filing number	6298
Test Engineer	Sung-kyu Cho
Telephone number	+82 31 5000 132
Facsimile number	+82 31 5000 159
E-mail address	skcho@ktl.re.kr
Other Comments	-

2. SUMMARY OF TEST RESULTS

Testing performed for : Uriver Inc.

Equipment Under Test : Tri-Band GSM Mobile Phone with Bluetooth

Receipt of Test Sample : , 2008.05. 28

Test Start Date : , 2008. 05. 29

Test End Date : , 2008. 06. 08

The following table represents the list of measurements required under the FCC CFR47 Part 15.107 and 15.109

FCC Rules	Test Requirements	Result	Comments
15.107	AC conducted Emission	Pass	See Data sheets
15.109(a)	Radiated Emission	Pass	See Data sheets

Note 1 : Test results reported in this document relate only to the items tested

Note 2 : The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3 : Test results apply only to the item(s) tested

*** Modifications required for compliance**

No modifications were implemented by KTL.

All results in this report pertain to the un-modified sample provided to KTL.

3. Measurement & Results

3.1. AC Conducted Emissions

3.1.1. Test Procedure

Conducted emission measurements on the EUT were performed by "AC Power Line Conducted Emissions Testing" procedure as per ANSI C63.4. The EUT was set up on a wooden table 0.8 meters height, 1.0 by 1.5 meters in size, placed in the shielded enclosed with a side of wall of which constituted a vertical conducting surface of 2.2 m x 3.1 m in size to maintain 40 cm from the rear of EUT

LISN(Line Impedance Stabilization Network, ROHDE & SCHWARZ, ESH3-Z5, 50 ohm / 50 μ H) was installed and electrically boned to the conducting ground plane. The EUT was connected to the LISN using a typical power adapter.

One of two 50 ohm output terminals of the LISN was connected to the EMI Receiver (ROHDE & SCHWARZ, ESCI, 9 kHz to 3 GHz) and the other was terminated in 50 ohms. Measurements were again performed after interchanging such a connection oppositely.

The frequency range from 150 kHz to 30 MHz was examined and the remarkable frequencies were measured with Quasi-peak and Average values using the EMI receiver instrument (ROHDE & SCHWARZ, ESIB, 9 kHz to 26.5 GHz ; Detector Function ; CISPR Quasi-Peak & Average). The 6 dB bandwidth of the Receiver was set to 9 kHz

The position of connecting cables of the EUT was changed to find the worst case configuration during measurements. The maximum emission level from the EUT occurred in such configuration as shown in the following photograph.

3.1.2. Limits

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency (MHz)	Conducted Limits (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

- Decreases with the logarithm of the frequency.

3.1.3. Sample calculation


The emission level measured in decibels above one microvolt (dB μ V) was converted into microvolt (μ V) as shown in following sample calculation.

For example :

Measured Value at	0.32 MHz	36.7dB μ V @ Q-Peak mode
+ Correct factor *		9.7 dB
= Conducted Emission		46.4dB μ V


* Correct factor is adding RF cable loss and Attenuation

3.1.4. Photograph for the test configuration

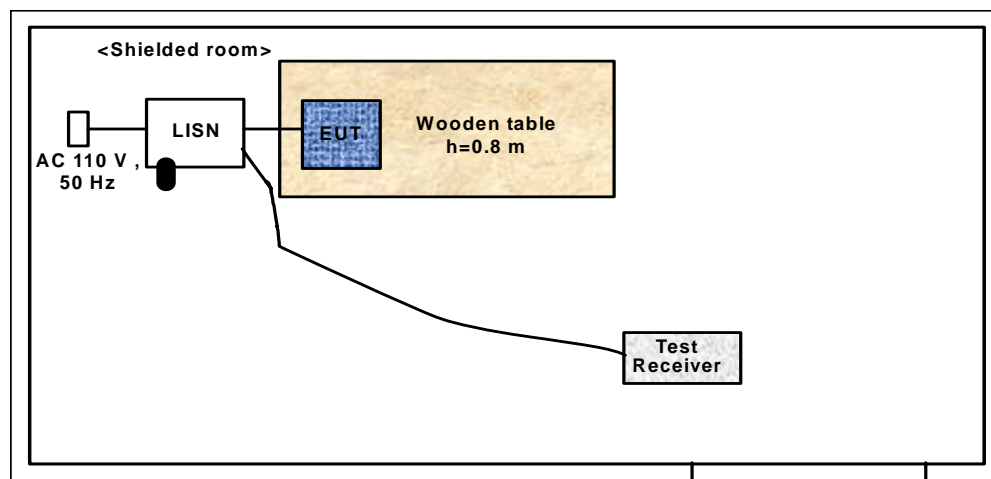

3.1.5. Test Results

Test mode : Charging mode

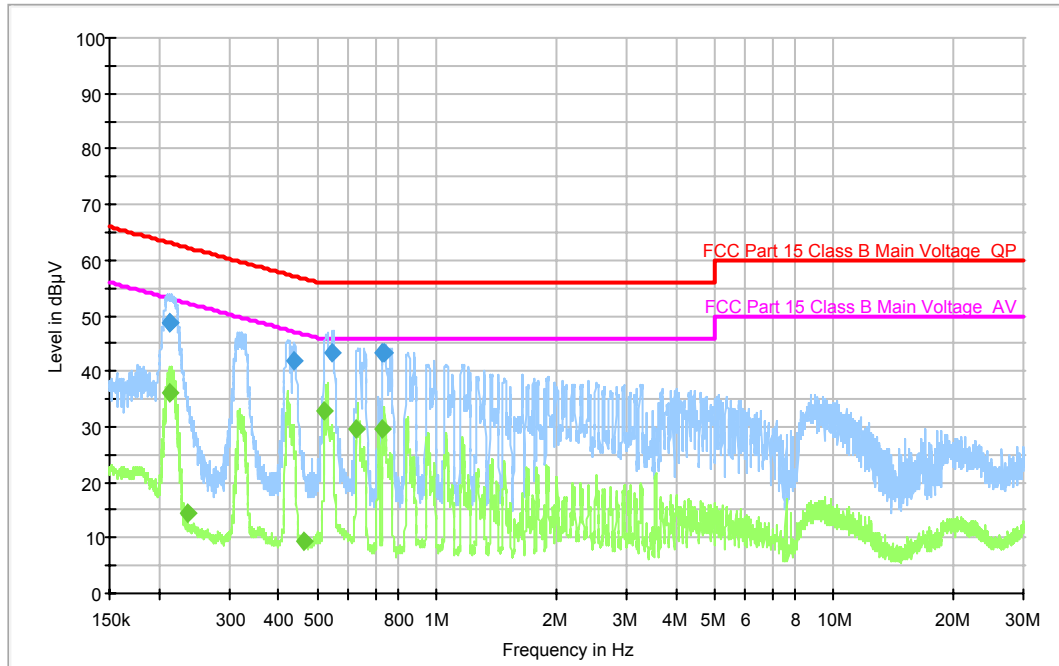


Final Measurement QuasiPeak

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.211683	48.9	L1	9.7	14.2	63.1
0.213000	48.7	L1	9.7	14.4	63.1
0.435016	41.9	L1	9.7	15.3	57.2
0.543653	43.2	L1	9.8	12.8	56.0
0.731939	43.5	L1	9.8	12.5	56.0
0.733204	43.4	L1	9.8	12.6	56.0

Final Measurement Average

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.212150	36.2	L1	9.7	16.9	53.1
0.234692	14.4	L1	9.7	37.9	52.3
0.462126	9.2	L1	9.7	37.5	46.7
0.522909	32.9	L1	9.8	13.1	46.0
0.626950	29.6	L1	9.8	16.4	46.0
0.731613	29.5	L1	9.8	16.5	46.0

Test mode : PC connection mode

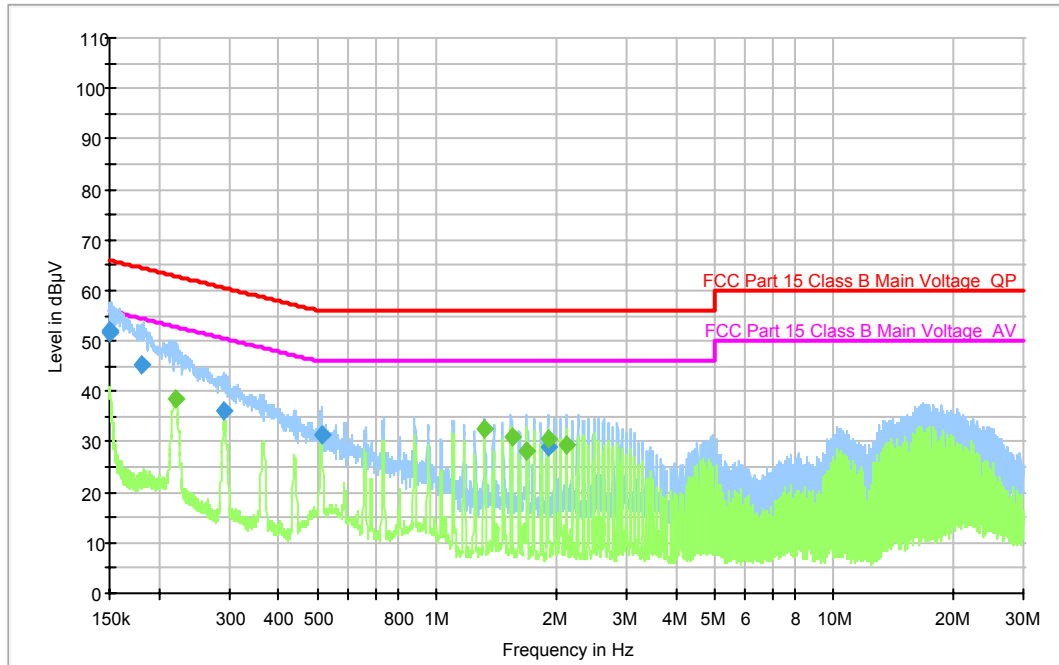


Final Measurement QuasiPeak

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.150000	52.0	L1	9.7	14.0	66.0
0.150150	51.6	N	9.7	14.4	66.0
0.180351	45.2	L1	9.7	19.3	64.5
0.291989	36.0	N	9.7	24.5	60.5
0.512715	31.2	N	9.8	24.8	56.0
1.908107	29.0	L1	10.0	27.0	56.0

Final Measurement Average

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.221251	38.5	N	9.7	14.3	52.8
1.322542	32.5	L1	9.9	13.5	46.0
1.541911	30.9	L1	9.9	15.1	46.0
1.689361	28.1	N	10.0	17.9	46.0
1.910015	30.7	L1	10.0	15.3	46.0
2.130289	29.2	L1	10.0	16.8	46.0

Test mode : GSM & Bluetooth connection mode

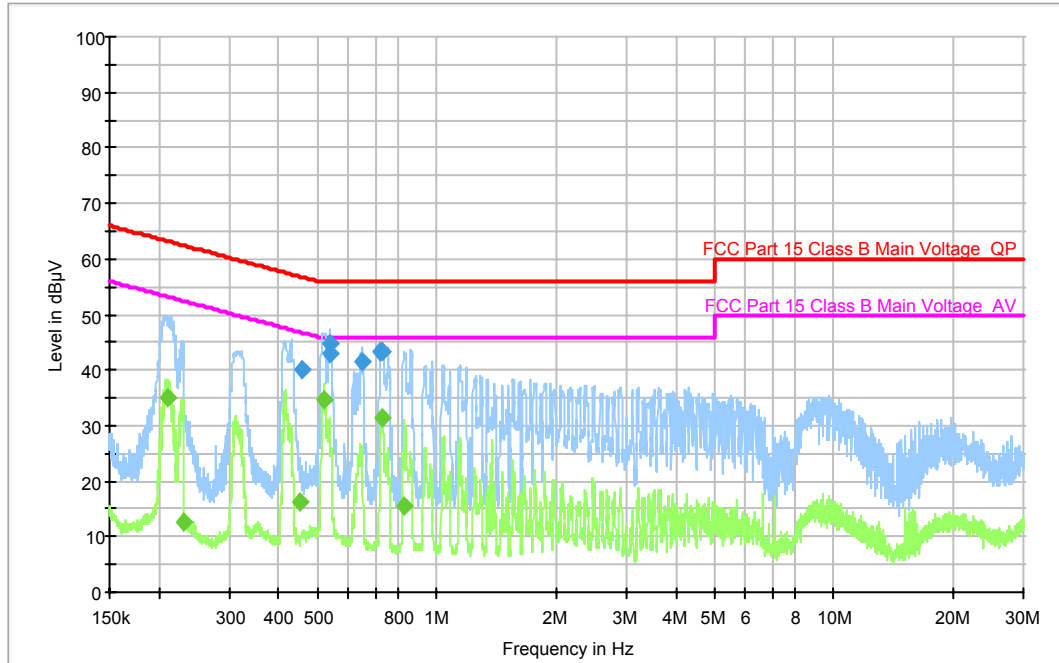

Final Measurement QuasiPeak

Frequency (MHz)	QuasiPeak (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.457209	40.1	N	9.8	16.6	56.7
0.537961	44.7	L1	9.8	11.3	56.0
0.539092	43.1	N	9.8	12.9	56.0
0.645614	41.4	L1	9.8	14.6	56.0
0.722510	43.5	L1	9.8	12.5	56.0
0.726061	43.4	L1	9.8	12.6	56.0

Final Measurement Average

Frequency (MHz)	Average (dB μ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.209846	35.1	L1	9.7	18.1	53.2
0.231003	12.8	N	9.7	39.6	52.4
0.453748	16.1	N	9.8	30.7	46.8
0.519044	34.8	L1	9.8	11.2	46.0
0.725830	31.4	L1	9.8	14.6	46.0
0.829310	15.6	N	9.9	30.4	46.0

3.2. Radiated Spurious Emissions

3.2.1. Test Procedure

3.2.1.1 Preliminary Testing for Reference

Preliminary testing was performed in a KTL absorber-lined room to determine the emission characteristics of the EUT. The EUT was placed on the wooden table which has dimensions of 0.8 meters in height, 1 meter in length and 1.5 meters in width. Receiving antenna (Biconi-Log antenna : 30 to 1000 MHz or Horn Antenna : 1 to 40 GHz) was placed at the distance of 3 meter from the EUT.

An attempt was made to maximize the emission level with the various configurations of the EUT. Emission levels from the EUT with various configurations were examined on a spectrum analyzer connected with a RF amplifier and graphed.

The emission was within the illumination area of the 3 dB beam width of the antenna so that the maximum emission from the EUT is measured.

3.2.1.2 Final Radiated Emission Test at an Absorber-Lined Room

The final measurement of radiated field strength was carried out in a KTL Absorber-Lined Room that was listed up at FCC according to the "Radiated Emissions Testing" procedure specified by ANSI C63.4.

Based on the test results in preliminary test, measurement was made in same test set up and configuration which produced maximum emission level. Receiving antenna was installed at 3-meter distance from the EUT, and was connected to an EMI receiver.

Turntable was rotated through 360 degrees and receiving antenna height was varied from 1 to 4 meters above the ground plane to read maximum emission level. Receiving antenna polarization was changed vertical and horizontal. The worst value was recorded.

If necessary, the radiated emission measurements could be performed at a closer distance than specified distance to ensure higher accuracy and their results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per Section 15.31(f).

The maximum emission level from the EUT occurred in such configuration as shown in the following photograph.

Tested in x, y, z axis and worst case results are reported

The maximum frequency range measuring with the spectrum from 30 MHz to 1 GHz is investigated with the transmitter

3.2.2. Limits

(a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field strength (Microvolts/meters)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

(b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the following :

Frequency of Emission (MHz)	Field strength (Microvolts/meters)
30 – 88	90
88 – 216	150
216 – 960	210
Above 960	300


3.2.3. Sample Calculation

The emission level measured in decibels above one microvolt ($\text{dB}\mu\text{V}$) was following sample calculation.

For example :

Measured Value at <u>48.2</u> MHz	17.6 $\text{dB}\mu\text{V}$
Antenna Factor & Cable loss	14.3 dB
- Preamplifier	0.0 dB
<hr/>	
= Radiated Emission	31.9 $\text{dB}\mu\text{V}/\text{m}$

3.2.4. Photograph for the test configuration

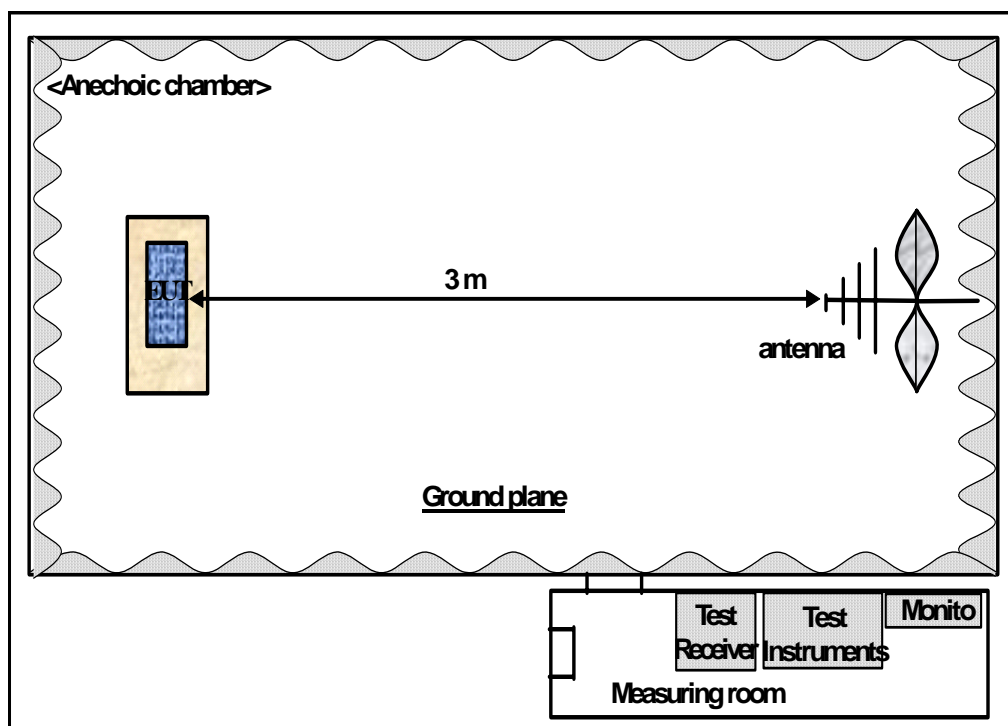

3.2.5. Test Results

3.2.5.1 Radiated Emission

Measurement mode	Radiated Emission Measurement								
Resolution Bandwidth	<input type="checkbox"/> Peak & Average (3dB Bandwidth : 1MHz for above 1GHz) <input checked="" type="checkbox"/> Quasi-Peak (6dB Bandwidth : 120kHz for below 1GHz)								
Frequency (MHz)	* D.M.	* A.P.	Measured Value (dB μ V)	* A.F. (dB)	* C.L. (dB)	* D.C.F. (dB)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	** Margin (dB)
36.00	Q	V	12.9	12.5	0.8	0	26.2	40.0	-13.8
100.26	Q	V	19.0	9.1	1.3	0	29.4	43.5	-14.1
164.46	Q	V	25.9	12.6	1.6	0	40.1	43.5	-3.4
199.74	Q	H	21.0	9.7	1.7	0	32.4	43.5	-11.1
212.34	Q	H	17.6	10.1	1.8	0	29.5	43.5	-14.0
218.58	Q	H	13.9	10.3	1.8	0	26.0	46.0	-20.0
312.54	Q	H	11.6	13.4	2.2	0	27.2	46.0	-18.8
399.66	Q	V	21.4	15.3	2.5	0	39.2	46.0	-6.8

Note

The observed EMI receiver (ESIB) & Spectrum Analyser(E4448A) noise floor level was 2.0 dB μ V. And all other emissions not reported on data were more than 25 dB below the permitted level.

* D.M. : Detect Mode (P : Peak, Q : Quasi-Peak, A : Average)
 A.P. : Antenna Polarization (H : Horizontal, V : Vertical)
 A.F. : Antenna Factor
 C.L. : Cable Loss
 A.G. : Amplifier Gain
 D.C.F. : Distance Correction Factor
 < : Less than

"--" indicates the spurious emission could not be detected due to noise limitations or ambients.

** Margin (dB) = Emission Level (dB) - Limit (dB)

4. TEST EQUIPMENTS

No.	Equipment	Manufacturer	Model	S/N	Effective Cal.Duration
1	EMI Receiver (20 Hz ~ 26.5 GHz)	R&S	ESIB	100280	08/17/2007 ~ 08/17/2008
2	Spectrum Analyzer (100 Hz ~ 26.5 GHz)	Agilent	E4407B	US41443316	12/01/2007 ~ 12/01/2008
3	Spectrum Analyzer (3 Hz ~ 50 GHz)	Agilent	E4448A	MY43360322	08/30/2007 ~ 08/30/2008
4	Pre-Amplifier (100 kHz ~ 1 GHz)	SONOMA.	310N	186270	08/25/2007 ~ 08/25/2008
5	Pre-Amplifier (0.5 GHz ~ 26.5 GHz)	Agilent	83017A	MY39500982	04/02/2008 ~ 04/02/2009
6	LISN(50 Ω , 50 μ H) (10 kHz ~ 100 MHz)	R&S	ESH3-Z5	826789009	07/05/2007 ~ 07/05/2008
7	Biconi-Log Ant. (30 MHz ~ 1000 MHz)	Schwarzbeck	VULB9168	9168-180	08/24/2007 ~ 08/24/2008
8	Horn Ant. (1 GHz ~ 18 GHz)	EMCO	3115	9012-3595	03/26/2007 ~ 03/26/2009
9	Horn Ant. (18 GHz ~ 40 GHz)	EMCO	3116	2664	03/26/2007 ~ 03/26/2009
10	Active Loop Ant. (9 kHz ~ 30 MHz)	EMCO	6502	2532	06/08/2007 ~ 06/08/2008
11	DC Power Supply	Agilent	E4356A	MY41000296	10/01/2007 ~ 10/01/2008
12	Power Meter	Agilent	E4417A	GB4129075	09/17/2007 ~ 09/17/2008
13	Bluetooth tester	anrisu	MT8852B	6K00006994	03/03/2008 ~ 03/03/2009

Appendix.1 EUT photo



Appendix.2 Test setup photo



<Radiated Emission>



<AC Conducted Emission>