



Part 24

TEST REPORT

Product Name	GSM/GPRS module
Model Name	SIM900E
Marketing Name	SIM900E
FCC ID	UDV-SIM900E
Client	Shanghai Simcom Ltd
Manufacturer	Shanghai Simcom Ltd
Date of issue	July 1 , 2013

TA Technology (Shanghai) Co., Ltd.

GENERAL SUMMARY

Reference Standard(s)	<p>FCC CFR47 Part 2 (2012) Frequency Allocations And Radio Treaty Matters; General Rules And Regulations</p> <p>FCC CFR47 Part 24E (2012) Personal Communications Services</p> <p>ANSI/TIA-603-C(2004) Land mobile FM or PM Communications Equipment Measurements and Performance Standards.</p>
Conclusion	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 2 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: Pass</p>
Comment	The test result only responds to the measured sample.

Approved by

Director

Revised by

RF Manager

Performed by

RF Engineer

TABLE OF CONTENT

1. General Information	4
1.1. Notes of the test report	4
1.2. Testing laboratory	5
1.3. Applicant Information	5
1.4. Manufacturer Information.....	5
1.5. Information of EUT.....	6
1.6. Test Date	7
2. Test Information	8
2.1. Summary of test results	8
2.2. RF Power Output	9
2.3. Effective Isotropic Radiated Power	11
2.4. Occupied Bandwidth.....	13
2.5. Band Edge Compliance	18
2.6. Frequency Stability	22
2.7. Spurious Emissions at Antenna Terminals	25
2.8 Radiates Spurious Emission	32
3. Main Test Instruments	37
ANNEX A: EUT Appearance and Test Setup.....	38
A.1 EUT Appearance	38
A.2 Test Setup.....	39

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L2264.

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 428261.

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 8510A.

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electrical report is inconsistent with the printed one, it should be subject to the latter.

1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Yang Weizhong
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: yangweizhong@ta-shanghai.com

1.3. Applicant Information

Company: Shanghai Simcom Ltd
Address: Building A, SIM Technology Building, No.633 Jinzhong Road, Changning District, Shanghai
City: Shanghai
Postal Code: /
Country: P. R. China

1.4. Manufacturer Information

Company: Shanghai Simcom Ltd
Address: Building A, SIM Technology Building, No.633 Jinzhong Road, Changning District, Shanghai
City: Shanghai
Postal Code: /
Country: P. R. China

1.5. Information of EUT

General information

Name of EUT:	GSM/GPRS module		
IMEI:	/		
Hardware Version:	V1.02		
Software Version:	SIM900 R11.0		
Device Operating Configurations:			
Operating Mode(s):	GSM1900; (tested)		
Test Modulation:	(GSM)GMSK;		
GPRS Multislot Class:	10		
Maximum E.I.R.P.	GSM 1900: 27.23 dBm		
Rated Power Supply Voltage:	3.8V		
Extreme Voltage:	Minimum: 3.6V Maximum: 4.2V		
Extreme Temperature:	Lowest: -40°C Highest: +85°C		
Test Channel: (Low - Middle - High)	512 - 661 - 810 (GSM 1900) (tested)		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8

Auxiliary equipment details

Equipment Under Test (EUT) is GSM/GPRS module. The EUT is tested GSM1900 in this report.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

1.6. Test Date

The test is performed from May 17, 2013 to June 4, 2013.

2. Test Information

2.1. Summary of test results

Number	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	24.232	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	24.238	PASS
5	Frequency Stability	2.1055 / 24.235	PASS
6	Spurious Emissions at Antenna Terminals	2.1051 / 24.238	PASS
7	Radiates Spurious Emission	2.1053 / 24.238	PASS

2.2. RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

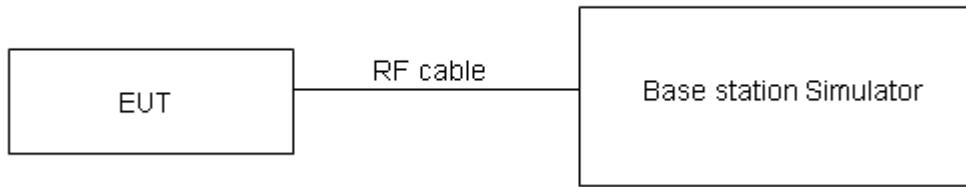

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

TA Technology (Shanghai) Co., Ltd.

Test Report

Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 10 of 39

Test Results

GSM 1900		Average Conducted Power(dBm)		
		Channel 512	Channel 661	Channel 810
		1850.2(MHz)	1880(MHz)	1909.8(MHz)
GSM	Results	29.56	29.43	29.55
GPRS (GMSK)	1TXslot	29.6	29.47	29.56
	2TXslots	29.55	29.43	29.54

Note:

- 1) The maximum RF Output Power numbers are marks in bold.
- 2) The following testing in GPRS is set to 1TXslot based on the maximum RF Output Power.

2.3. Effective Isotropic Radiated Power

Ambient condition

Temperature	Relative humidity
21°C ~25°C	40%~60%

Methods of Measurement

The measurement procedures in TIA- 603C are used.

1. The EUT was placed on a turntable with 1.5 meter height in a fully anechoic chamber.
2. The EUT was set at 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. GSM operating modes: Set RBW= 1MHz, VBW= 3MHz, RMS detector over burst;
UMTS operating modes: Set RBW= 100 KHz, VBW= 300 KHz, RMS detector over frame, and use channel power option with bandwidth=5MHz, per section 4.0 of KDB 971168 D01.
4. The table was rotated 360 degrees to determine the position of the highest radiated power.
5. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
6. Taking the record of maximum ERP/EIRP.
7. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
8. The conducted power at the terminal of the dipole antenna is measured.
9. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
10. $ERP/EIRP = Ps + Et - Es + Gs = Ps + Rt - Rs + Gs$

Ps (dBm) : Input power to substitution antenna.

Gs (dBi or dBd) : Substitution antenna Gain.

Et = Rt + AF


Es = Rs + AF

AF (dB/m) : Receive antenna factor

Rt : The highest received signal in spectrum analyzer for EUT.

Rs : The highest received signal in spectrum analyzer for substitution antenna.

Test Setup

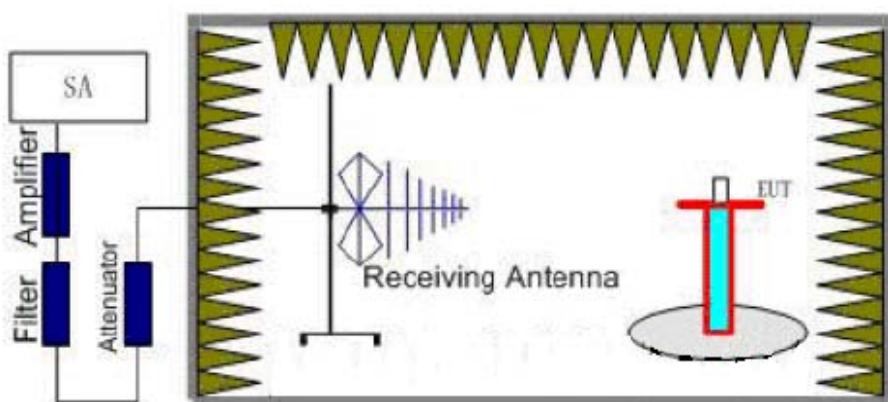

Limits

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts EIRP. Peak power" and Rule Part 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage".

Limit (EIRP)	$\leq 2 \text{ W (33 dBm)}$
--------------	-----------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

Test Results:Pass

Mode	Channel	Polarization	R _t (dBm)	R _s (dBm)	P _s (dBm)	G _s (dBd)	E.I.R.P. (dBm)
GSM 1900	512	Vertical	-29.17	-51.67	0	1.98	24.48
	661	Vertical	-28.13	-53.24	0	1.94	27.05
	810	Horizontal	-30.03	-55.03	0	2.01	27.01
GSM 1900 EGPRS(GMSK)	512	Vertical	-28.98	-51.67	0	1.98	24.67
	661	Vertical	-27.95	-53.24	0	1.94	27.23
	810	Vertical	-29.81	-55.03	0	2.01	27.23

Note: 1. EIRP= E.R.P+2.15

2.4. Occupied Bandwidth


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 3kHz, VBW is set to 10kHz for GSM 1900. 99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

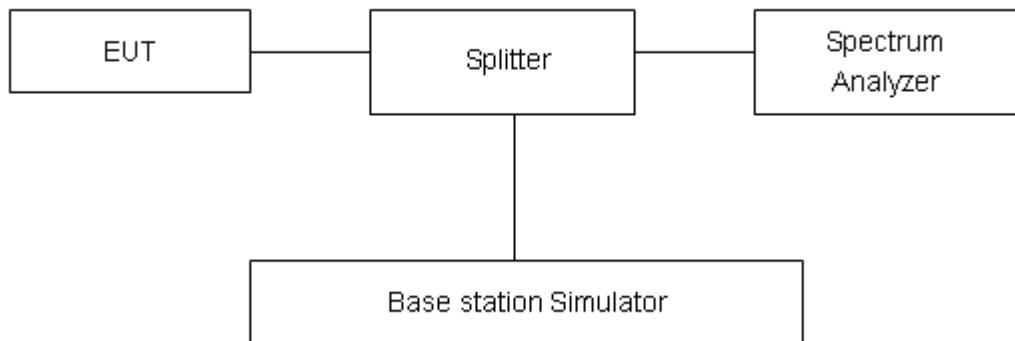

Limits


No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.

Test Result

	Channel	Frequency (MHz)	99% Power Bandwidth (kHz)	-26dBc Bandwidth(kHz)
GSM 1900	512	1850.2	247.959	312.376
	661	1880.0	245.682	307.221
	810	1909.8	249.663	309.273
GSM 1900+GPRS	512	1850.2	247.387	312.783
	661	1880.0	245.314	311.367
	810	1909.8	249.652	308.724

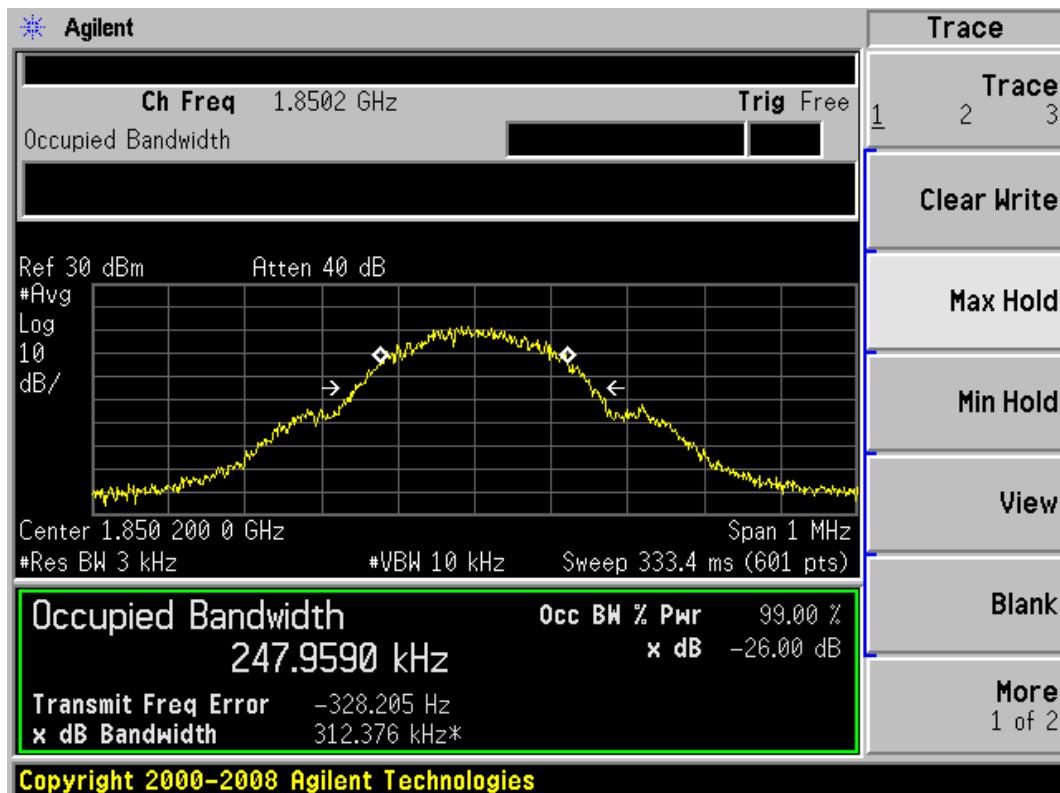

GSM1900 CH512 Occupied Bandwidth


TA Technology (Shanghai) Co., Ltd.

Test Report


Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 15 of 39

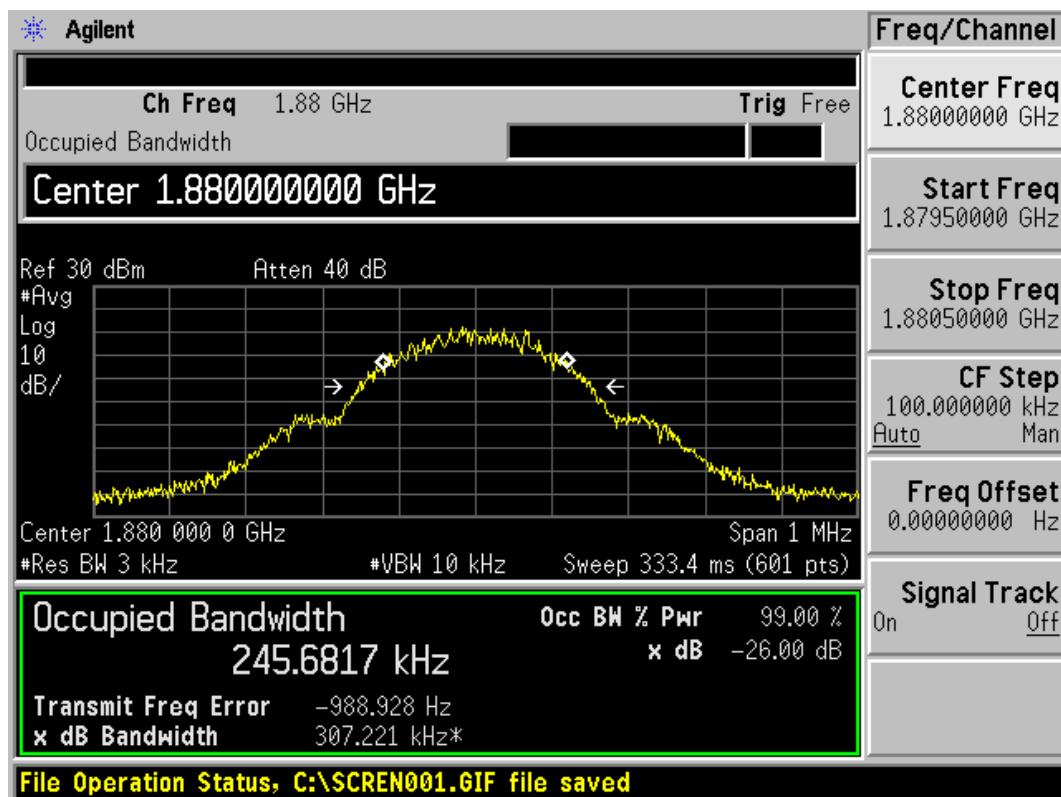

GSM 1900 CH661 Occupied Bandwidth

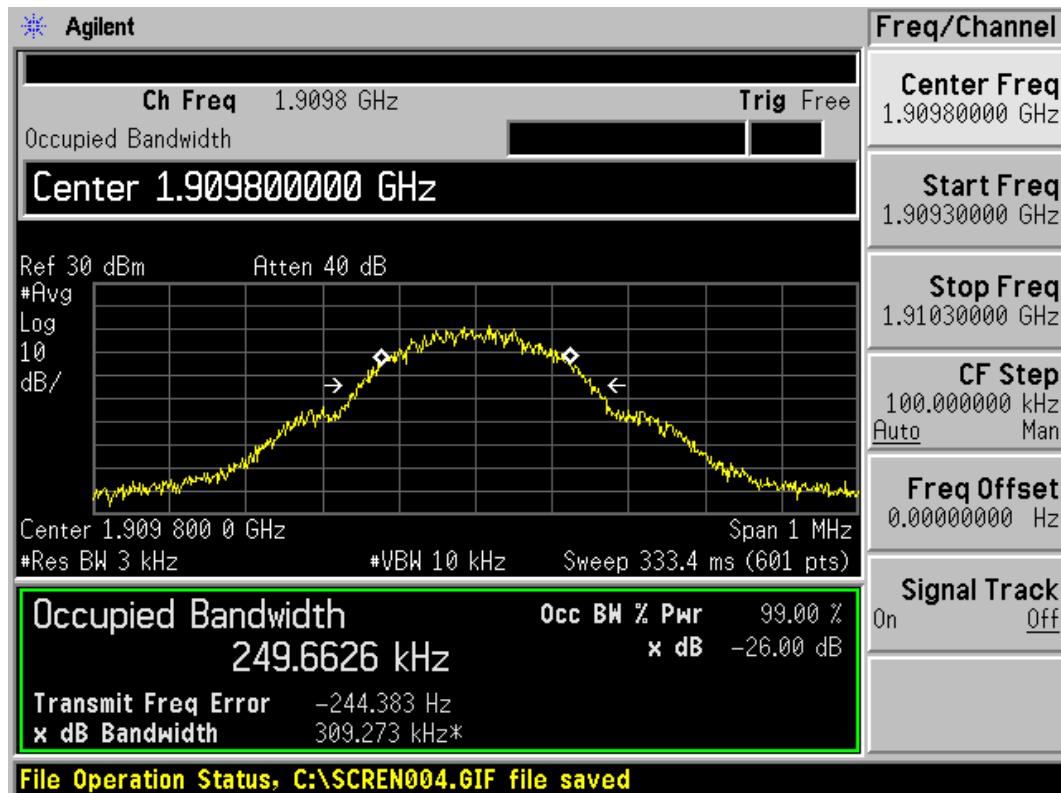

GSM 1900 CH810 Occupied Bandwidth


TA Technology (Shanghai) Co., Ltd.

Test Report

Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 16 of 39

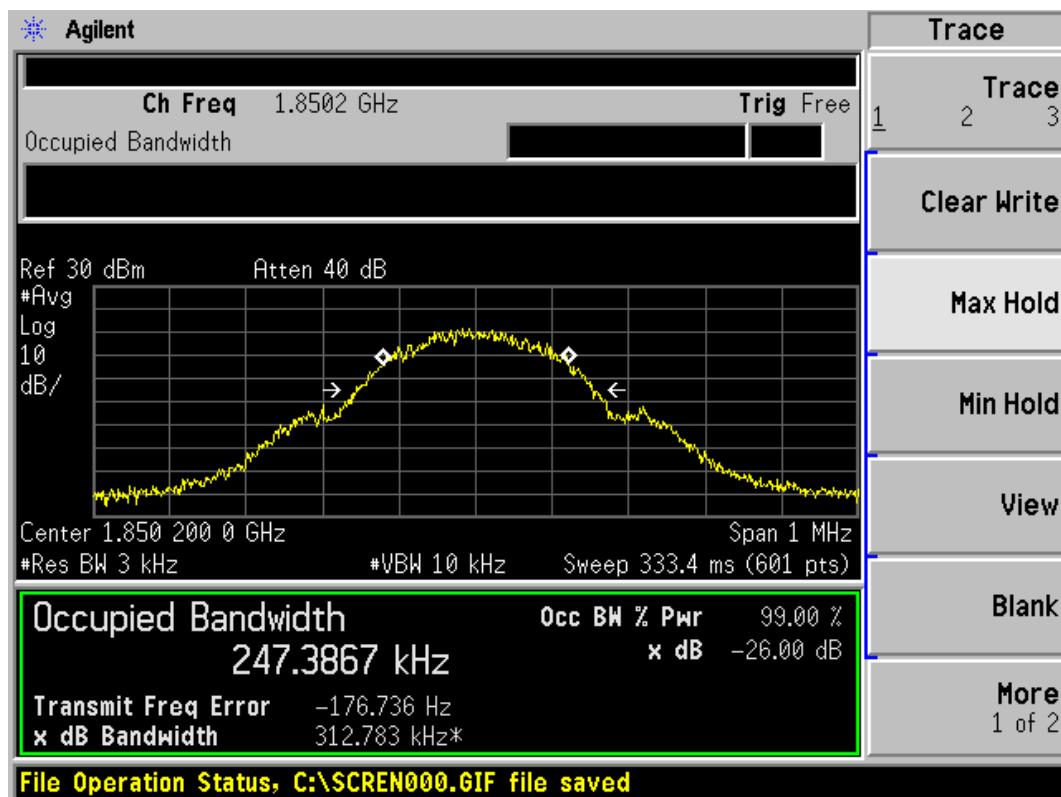

GSM1900 GPRS CH512 Occupied Bandwidth



GSM 1900 GPRS CH661 Occupied Bandwidth


TA Technology (Shanghai) Co., Ltd.

Test Report

Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 17 of 39

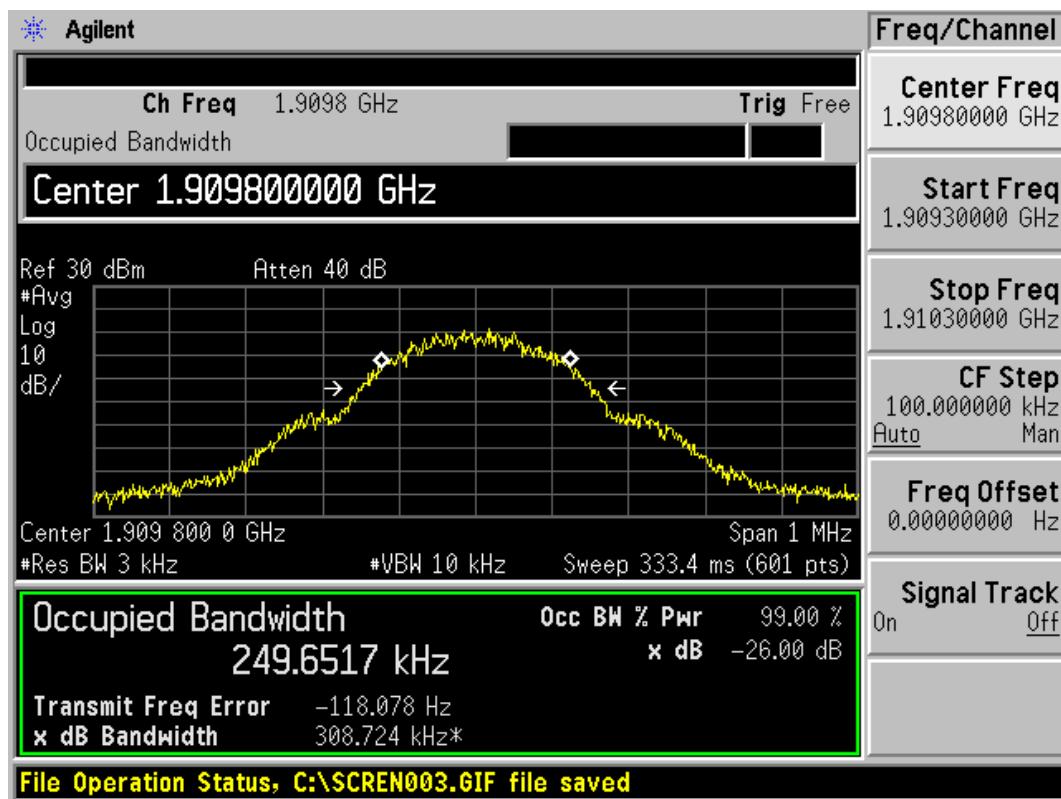

2.5. Band Edge Compliance


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 5.1kHz, VBW is set to 15kHz for GSM 1900. Spectrum analyzer plots are included on the following pages.

Test Setup

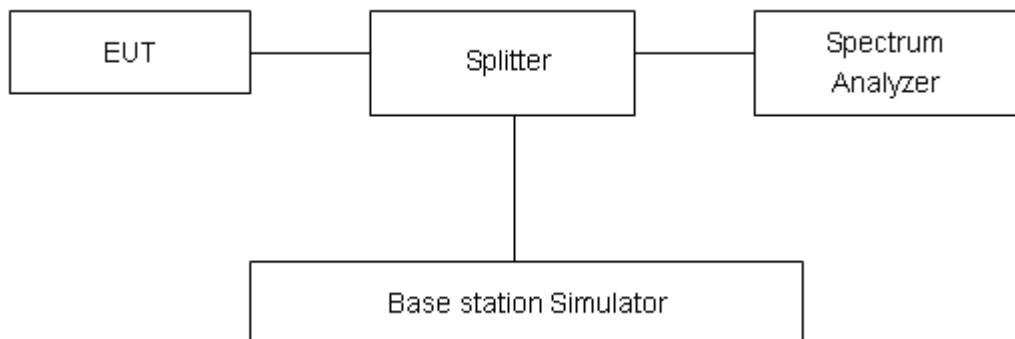

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684\text{dB}$.

TA Technology (Shanghai) Co., Ltd. Test Report


Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 19 of 39

Test Result:

	Carrier frequency (MHz)	Reference value (dBm)	Limit	Conclusion
GSM 1900	1850.0	-24.71	-13	PASS
	1910.0	-24.91	-13	PASS
GSM 1900+GPRS	1850.0	-22.44	-13	PASS
	1910.0	-26.11	-13	PASS

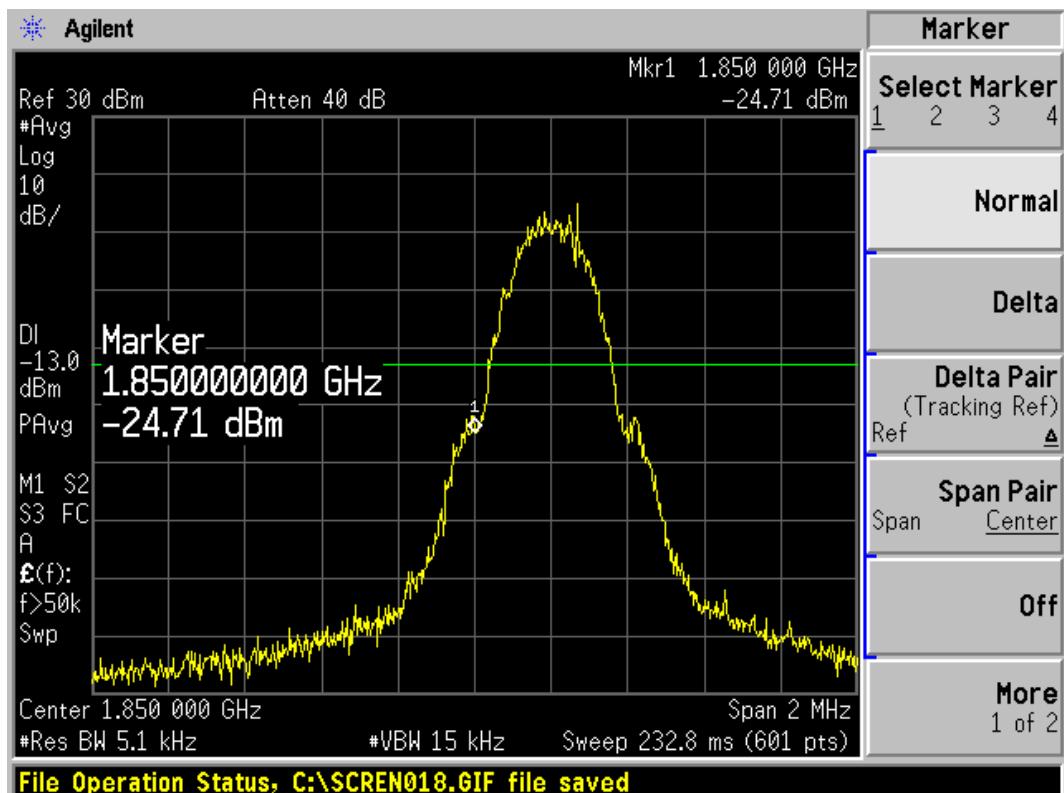


GSM 1900 512 Channel

TA Technology (Shanghai) Co., Ltd.
Test Report


Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 20 of 39

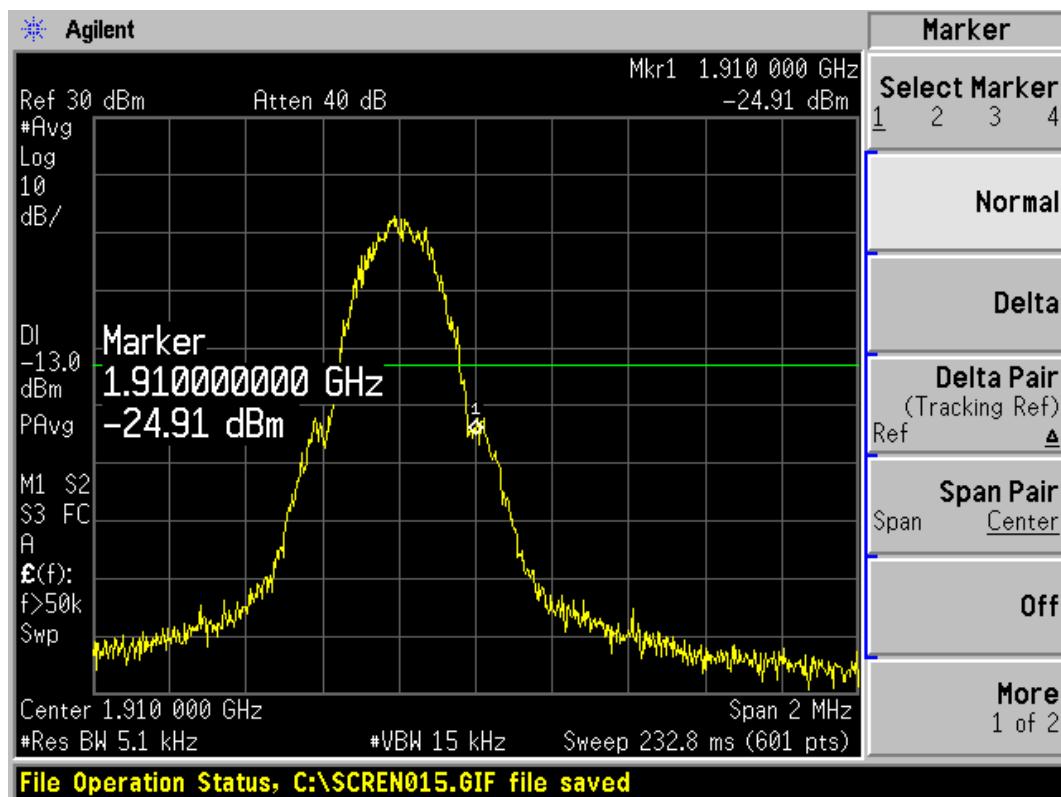

GSM1900 810 Channel

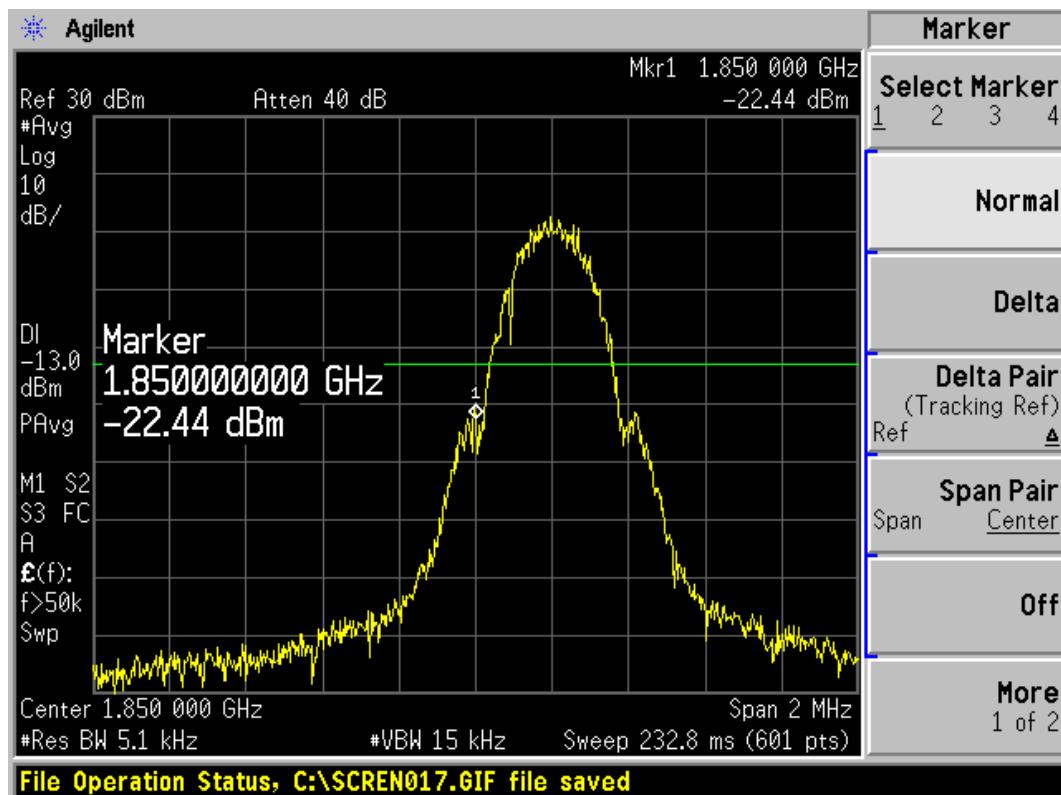


GSM 1900 GPRS 512 Channel

TA Technology (Shanghai) Co., Ltd.
Test Report

Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 21 of 39

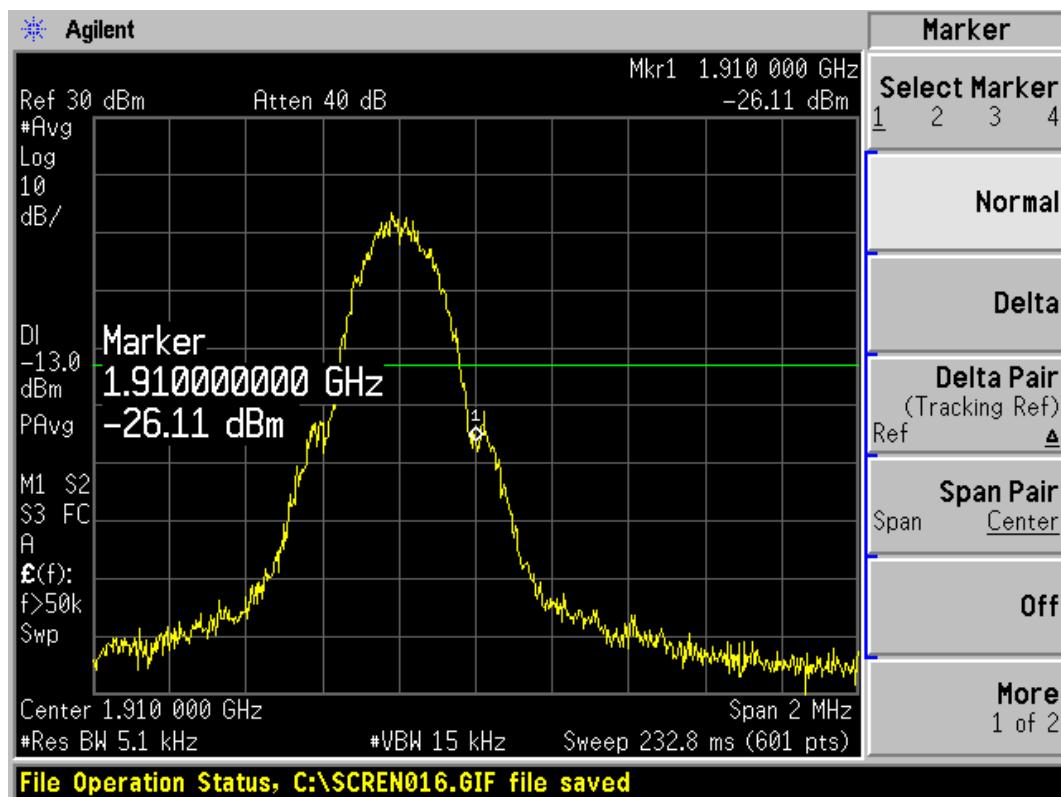

2.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.2 V, with a nominal voltage of 3.8V.

Test setup

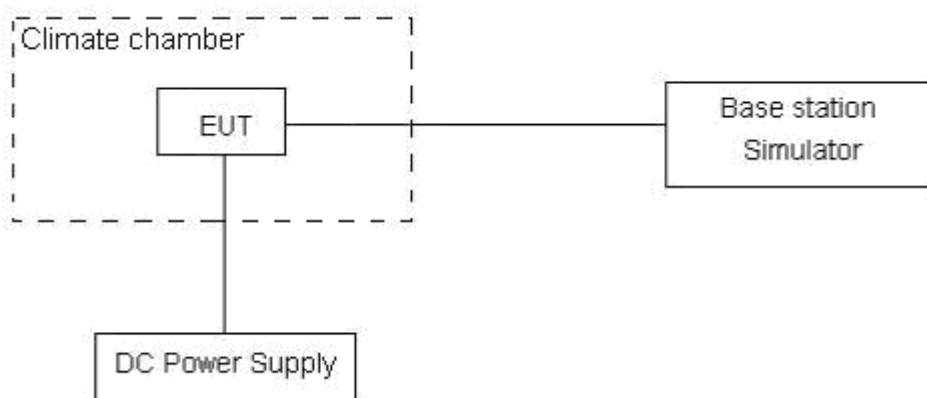

Limits

No specific frequency stability requirements in part 24.235

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01\text{ppm}$.

Test Result**GSM 1900**

Temperature (° C)	Test Results (ppm) / 3.8 V Power supply
	Channel 661
-30	-40.16
-20	-31.98
-10	-37.42
0	-37
10	-29.43
20	-35.08
30	-23.37
40	-39.51
50	-21.14

Voltage (V)	Test Results(ppm) / 20° C
	Channel 661
3.6	-24.98
3.8	-35.08
4.2	-20.37

GPRS 1900

Temperature (° C)	Test Results (ppm) / 3.8 V Power supply
	Channel 661
-30	-29.88
-20	-53.13
-10	-23.86
0	-28.82
10	-28.6
20	-33.13
30	-30.96
40	-28.5
50	-32.13

Voltage (V)	Test Results(ppm) / 20° C
	Channel 661
3.6	-32.05
3.8	-33.13
4.2	-26.13

2.7. Spurious Emissions at Antenna Terminals

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. For GSM 1900, RBW and VBW are set to 100 kHz, Sweep is set to ATUO.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

Test setup

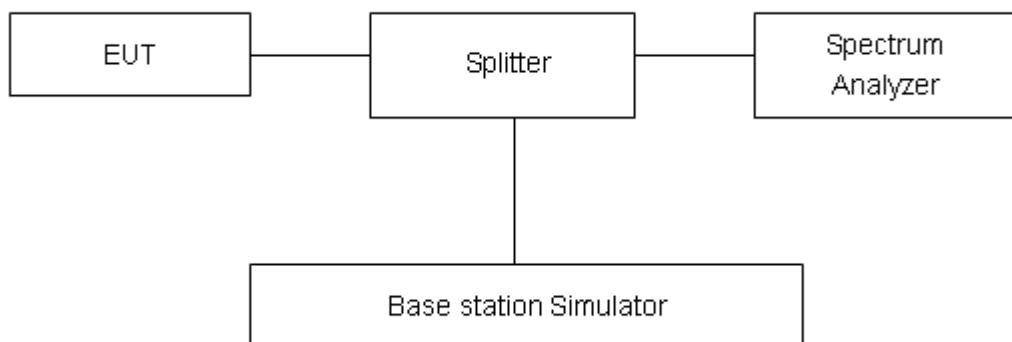

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-12.75GHz	1.407 dB


TA Technology (Shanghai) Co., Ltd.
Test Report
Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 26 of 39


Test Result

GSM 1900 CH 512

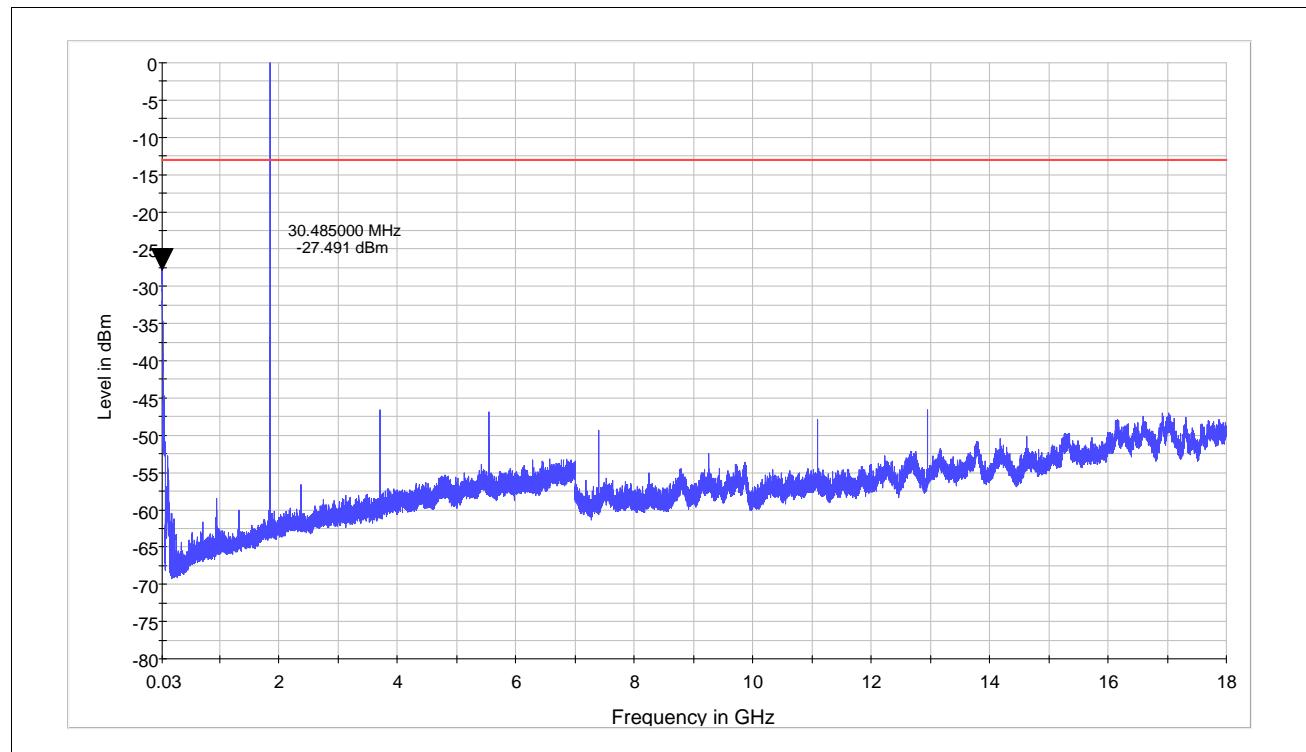

Note: The signal beyond the limit is carrier.

GSM 1900 512 Channel 30MHz~18GHz

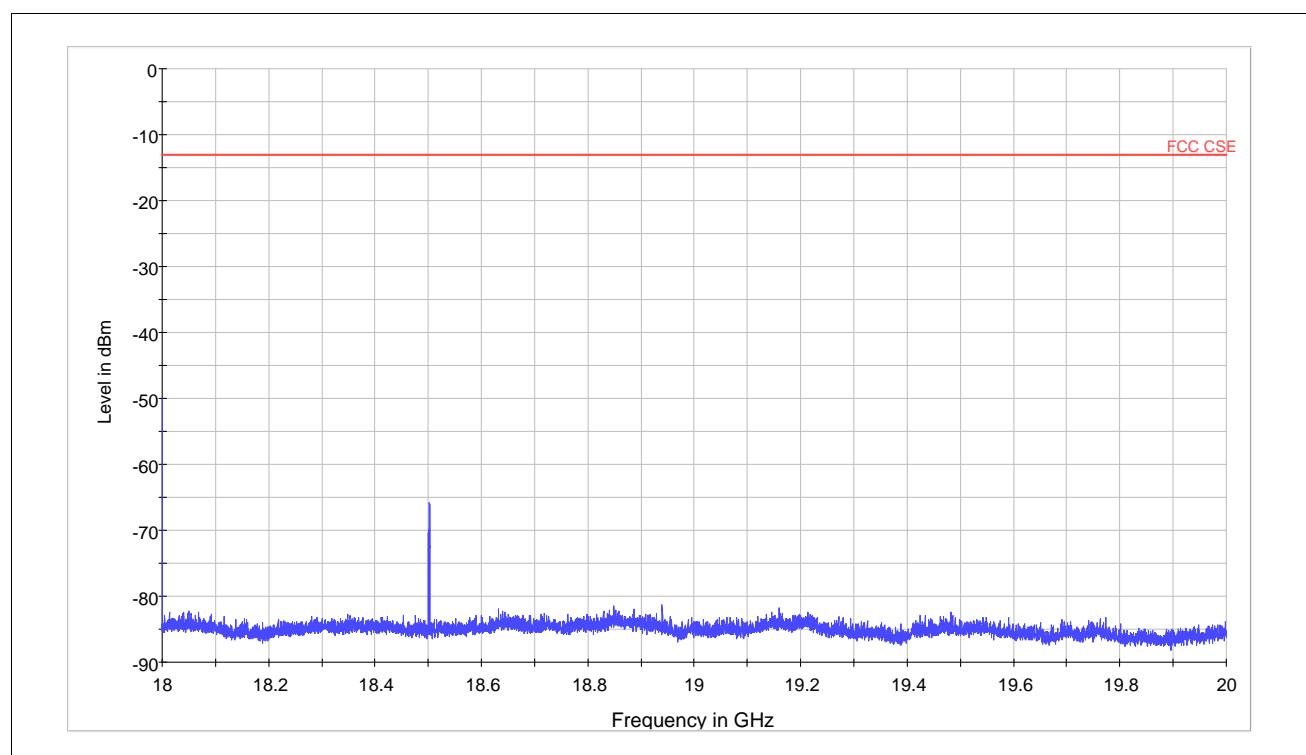

GSM 1900 512 Channel 18GHz ~20GHz

TA Technology (Shanghai) Co., Ltd.**Test Report**

Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 27 of 39

Harmonic	TX ch.512 Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
2	3700.4	N/A	-13	/
3	5550.6	N/A	-13	/
4	7400.8	N/A	-13	/
5	9251	N/A	-13	/
6	11101.2	N/A	-13	/
7	12951.4	N/A	-13	/
8	14801.6	N/A	-13	/
9	16651.8	N/A	-13	/
10	18502	N/A	-13	/


N/A: not applicable

TA Technology (Shanghai) Co., Ltd.
Test Report
Registration Num:428261

Report No.: RXA1305-0050RF02R2


Page 28 of 39

GSM 1900 CH 661

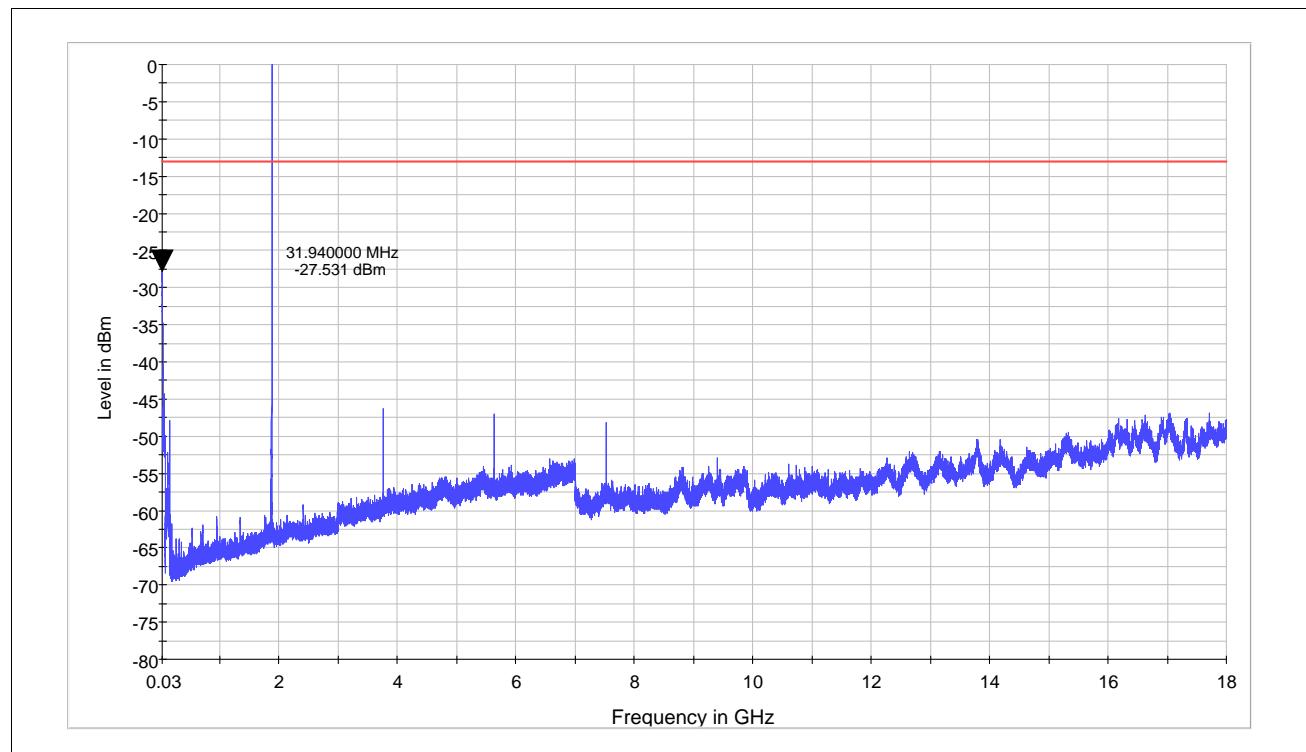

Note: The signal beyond the limit is carrier.

GSM 1900 661 Channel 30MHz~18GHz

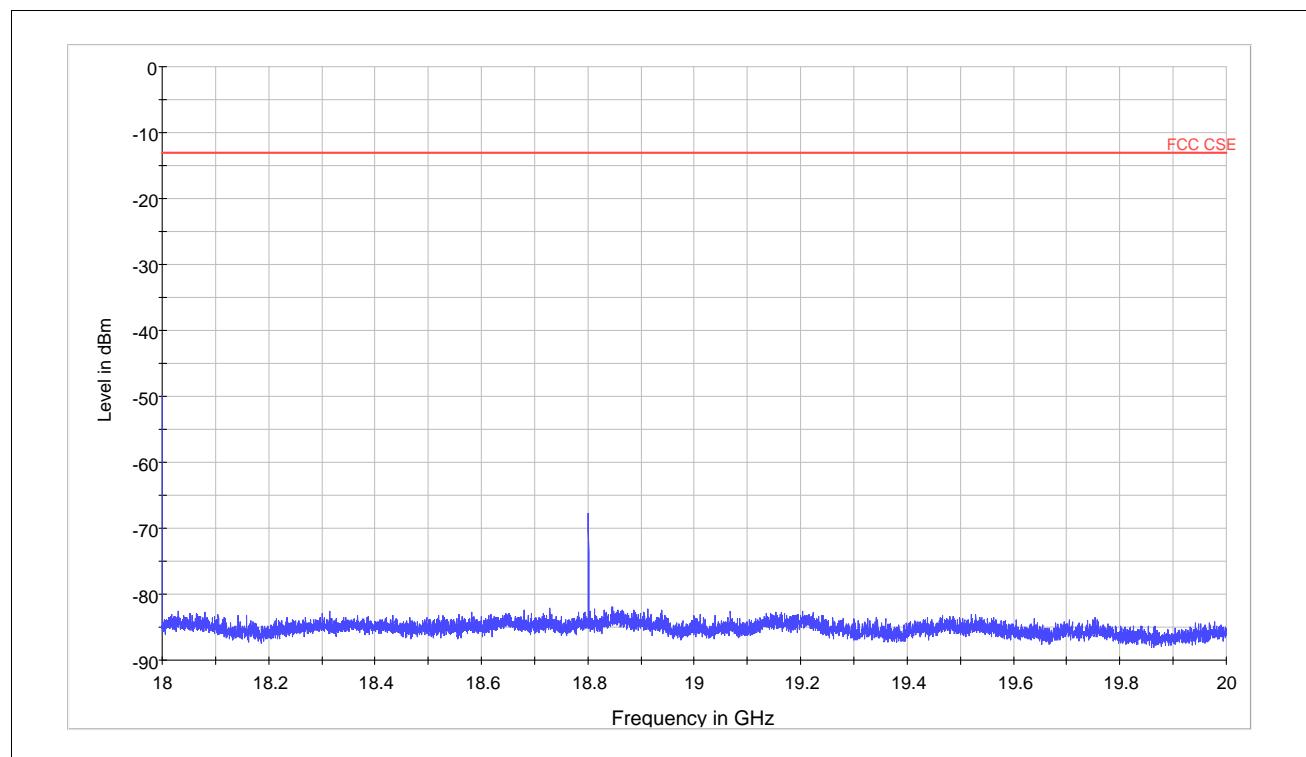

GSM 1900 661 Channel 18GHz ~20GHz

TA Technology (Shanghai) Co., Ltd.**Test Report**

Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 29 of 39

Harmonic	TX ch.661 Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
2	3760	N/A	-13	/
3	5640	N/A	-13	/
4	7520	N/A	-13	/
5	9400	N/A	-13	/
6	11280	N/A	-13	/
7	13160	N/A	-13	/
8	15040	N/A	-13	/
9	16920	N/A	-13	/
10	18800	N/A	-13	/


N/A: not applicable

TA Technology (Shanghai) Co., Ltd.
Test Report
Registration Num:428261

Report No.: RXA1305-0050RF02R2


Page 30 of 39

GSM 1900 CH 810

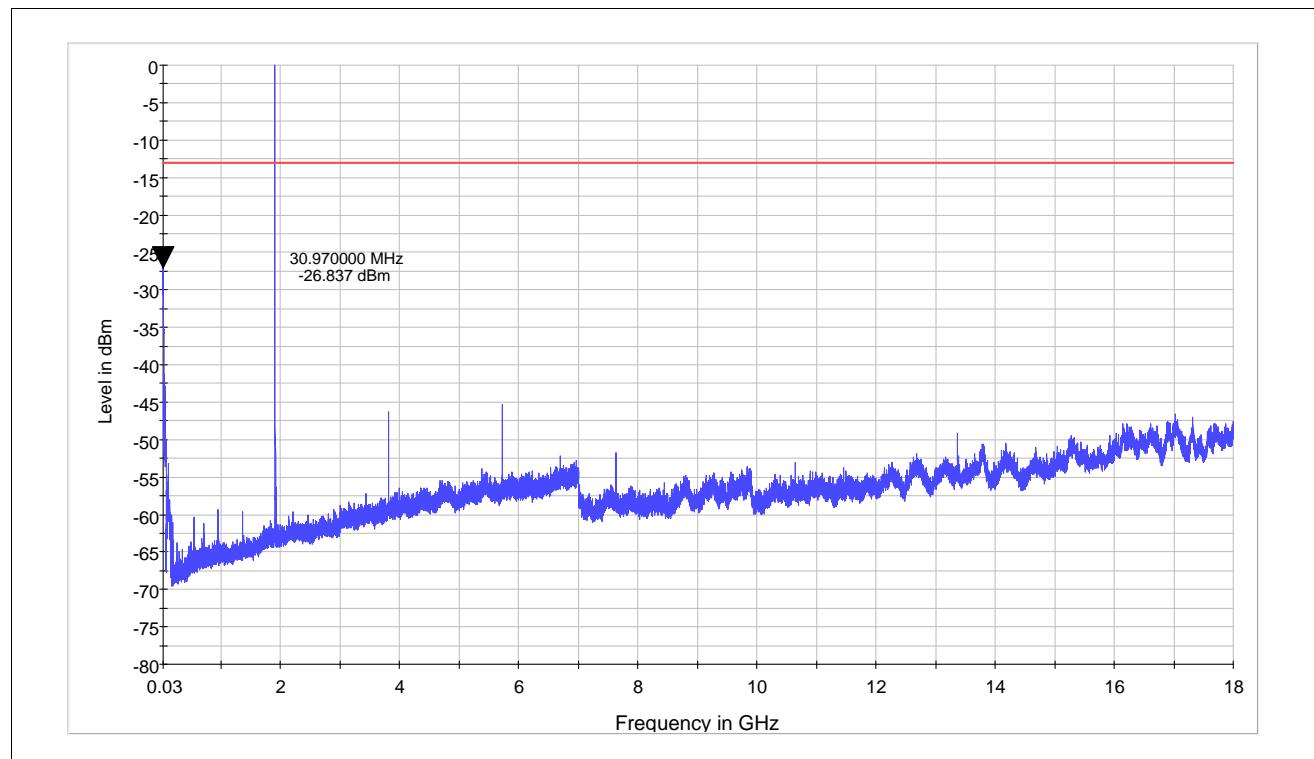

Note: The signal beyond the limit is carrier.

GSM 1900 810 Channel 30MHz~18GHz

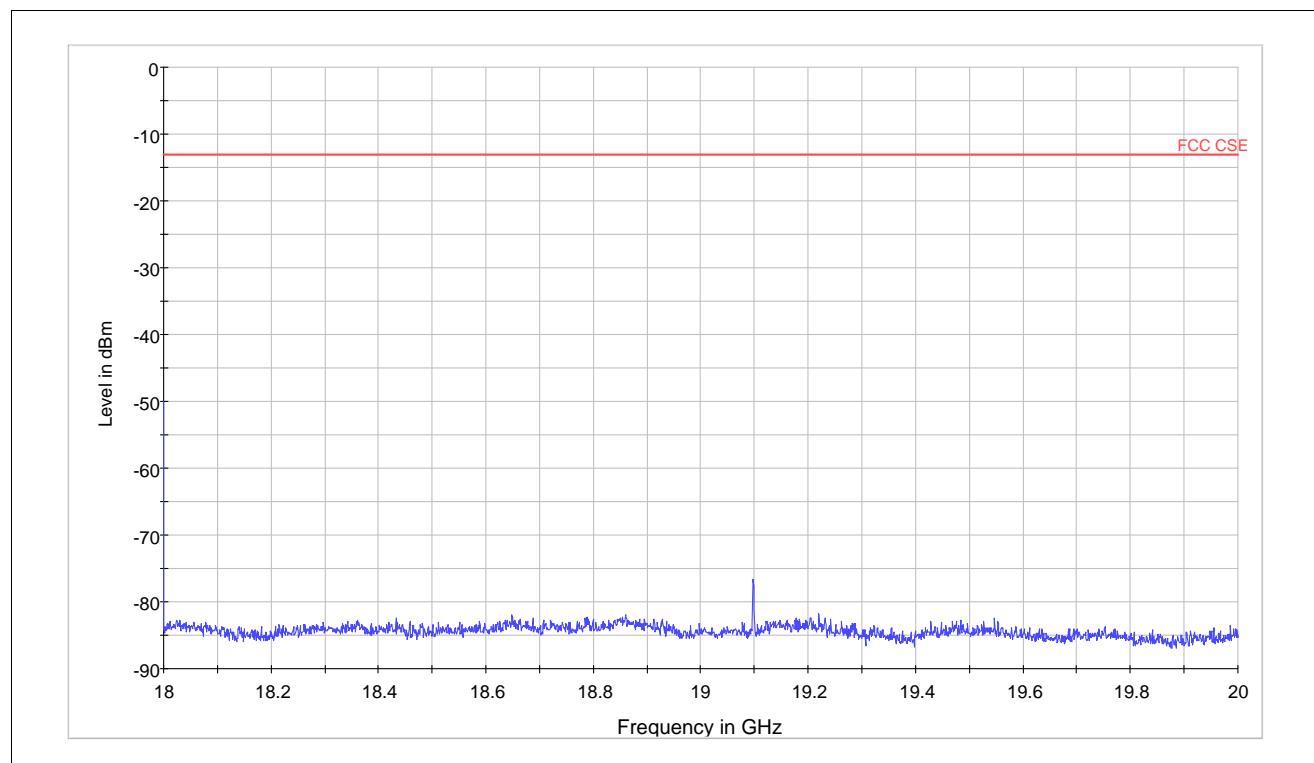

GSM 1900 810 Channel 18GHz ~20GHz

TA Technology (Shanghai) Co., Ltd.**Test Report**

Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 31 of 39

Harmonic	TX ch.810 Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)
2	3819.6	N/A	-13	/
3	5729.4	N/A	-13	/
4	7639.2	N/A	-13	/
5	9549	N/A	-13	/
6	11458.8	N/A	-13	/
7	13368.6	N/A	-13	/
8	15278.4	N/A	-13	/
9	17188.2	N/A	-13	/
10	19098	N/A	-13	/

N/A: not applicable

2.8 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The measurements procedures in TIA -603C are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment.

The procedure of Radiates Spurious Emission is as follows:


Step 1:

The measurement is carried out in the semi-anechoic chamber. EUT was placed on a 1.5 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used while RBW and VBW are both set to 3MHz. During the measurement, the highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna moved up and down over a range from 1 to 4 meters in both horizontally and vertically polarized orientations. The test setup refers to figure below.

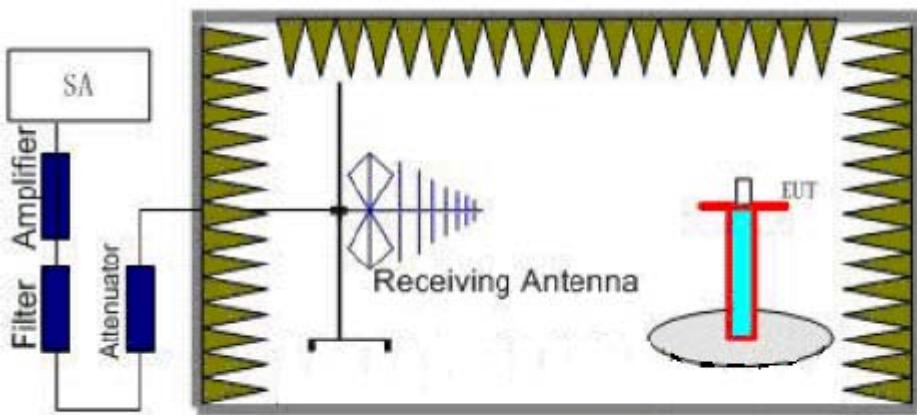

Step 2:

A dipole antenna shall be substituted in place of the EUT. The antenna will be driven by a signal generator with a adjustable S.G. applied through a Tx cable. Adjust the level of the signal generator output until the value of the receiver reach the previously recorded analyzer power level (LVL). Then The E.R.P. /E.I.R.P. of the EUT can be calculated through the level of the signal generator, Tx cable loss and the gain of the substitution antenna. The test setup refers to figure below.

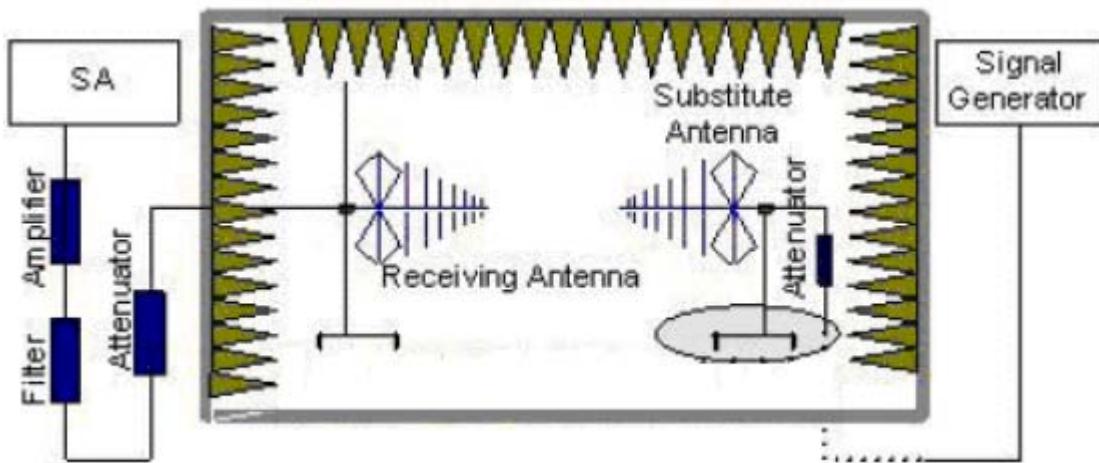

$$\text{E.R.P (peak power)} = \text{S.G.} - \text{Tx Cable loss} + \text{Substitution antenna gain} - 2.15.$$

$$\text{EIRP} = \text{E.R.P} + 2.15$$

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the antenna is vertical.

Of those disturbances below (limit – 20 dB), the mark is not required for the EUT.

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

GSM 1900 CH 512

Harmonic	TX ch.512 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3761.5	-51.98	2	10.15	-45.98	-13	32.98	0
5	9256.9	-55.5	5.2	11.35	-51.50	-13	38.5	235

TA Technology (Shanghai) Co., Ltd.**Test Report**

Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 35 of 39

GSM 1900 CH 661

Harmonic	TX ch.661 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.8	-49.76	8.9	11.05	-47.61	-13	34.61	90
3	5640.4	-57.88	2.51	11.05	-51.49	-13	38.49	180
4	7519.9	-56.63	4.2	11.15	-51.83	-13	38.83	180

TA Technology (Shanghai) Co., Ltd.**Test Report**

Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 36 of 39

GSM 1900 CH 810

Harmonic	TX ch.810 Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3819.4	-60.14	2	10.15	-54.14	-13	41.14	225
3	5926.1	-60.05	2.51	11.05	-53.66	-13	40.66	0

3. Main Test Instruments

No.	Name	Type	Manufacturer	Serial Number	Calibration Date	Valid Period
01	Base Station Simulator	CMU200	R&S	118133	2012-06-30	One year
02	Power Splitter	SHX-GF2-2-13	Hua Xiang	10120101	NA	NA
03	Spectrum Analyzer	E4445A	Agilent	MY46181146	2012-06-30	One year
04	Universal Radio Communication Tester	E5515C	Agilent	MY48367192	2012-06-30	One year
05	Signal Analyzer	FSV30	R&S	100815	2012-06-30	One year
06	Signal generator	SMB 100A	R&S	102594	2012-06-30	One year
07	EMI Test Receiver	ESCI	R&S	100948	2012-06-30	One year
08	Trilog Antenna	VUBL 9163	SCHWARZB ECK	9163-201	2010-06-20	Three years
09	Horn Antenna	HF907	R&S	100126	2012-07-01	Three years
10	Climatic Chamber	PT-30B	Re Ce	20101891	2010-09-10	Three years

*****END OF REPORT BODY*****

TA Technology (Shanghai) Co., Ltd.
Test Report


Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 38 of 39

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance

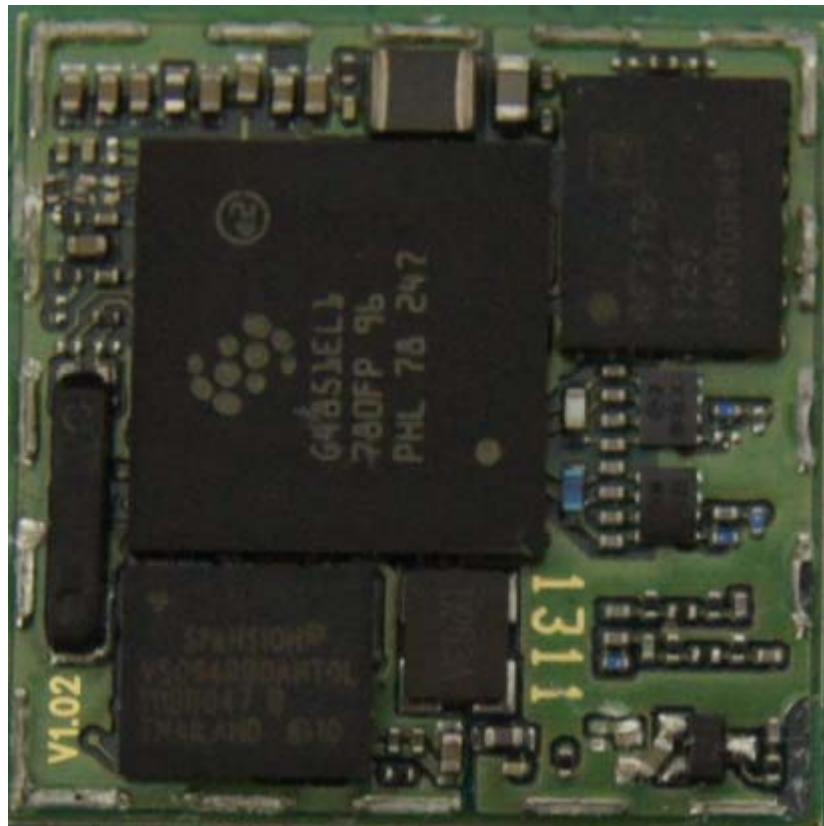

a: EUT

Picture 1 EUT and Auxiliary

TA Technology (Shanghai) Co., Ltd.
Test Report
Registration Num:428261

Report No.: RXA1305-0050RF02R2

Page 39 of 39

A.2 Test Setup



Picture 2: Radiated Spurious Emissions Test setup