


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	59%
Test Engineer	Peter Wu	Configurations	2.4GHz + 5GHz

Horizontal

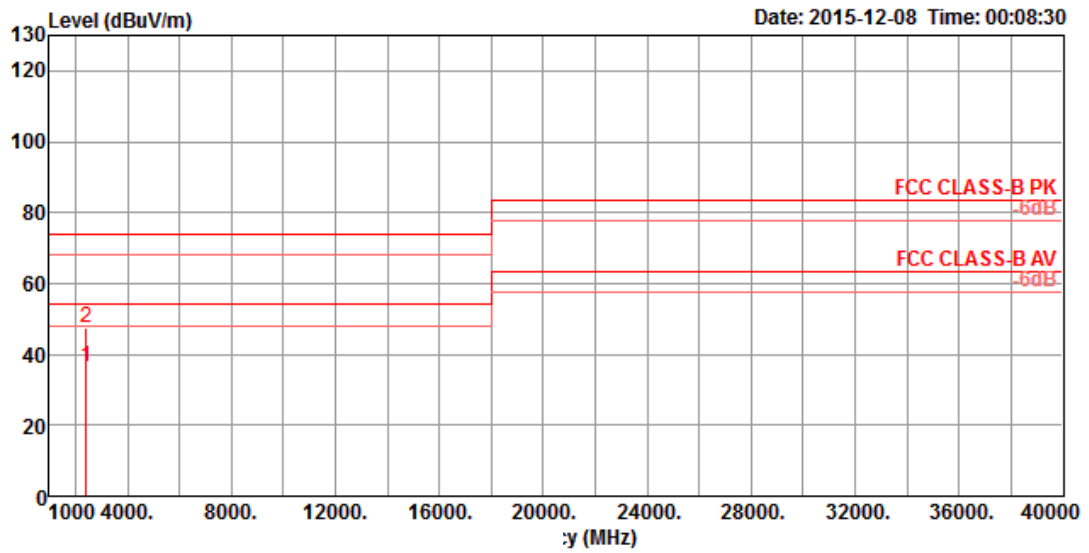

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2404.99	36.67	54.00	-17.33	39.24	5.03	27.28	34.88	100	136	Average	HORIZONTAL
2	2405.59	47.56	74.00	-26.44	50.13	5.03	27.28	34.88	100	136	Peak	HORIZONTAL

Vertical

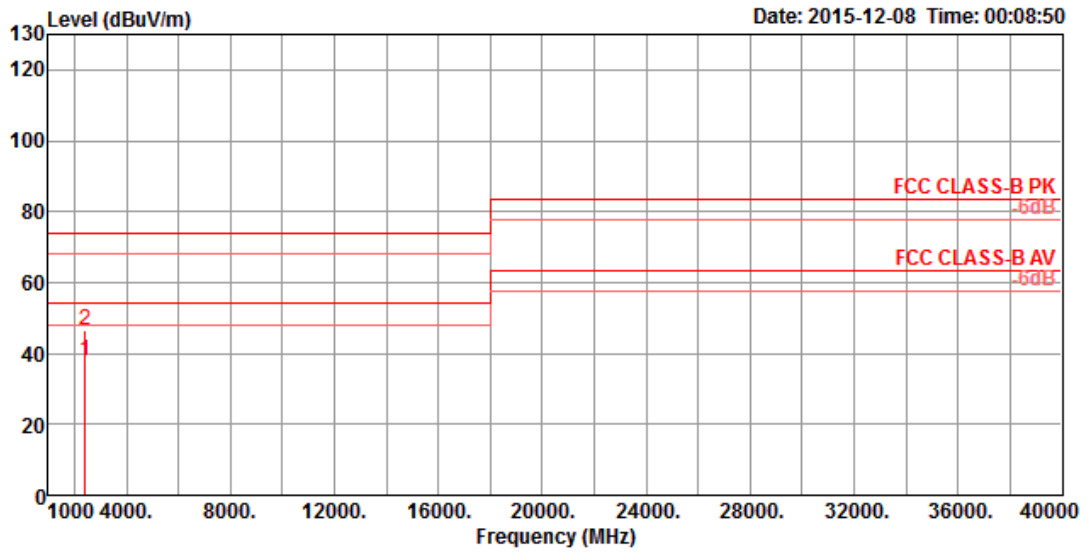

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2404.61	37.99	54.00	-16.01	40.56	5.03	27.28	34.88	100	326	Average	VERTICAL
2	2405.97	46.57	74.00	-27.43	49.14	5.03	27.28	34.88	100	326	Peak	VERTICAL