

FCC Test Report

Report No.: RF160725C02B

FCC ID: UDX-60052010

Test Model: MR33-HW

Received Date: Jul. 25, 2016

Test Date: Jul. 25 ~ Aug. 31, 2016

Issued Date: Sep. 12, 2016

Applicant: Cisco Systems, Inc.

Address: 170 West Tasman Drive, San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

| | |
|---|-----------|
| Release Control Record | 4 |
| 1 Certificate of Conformity | 5 |
| 2 Summary of Test Results | 6 |
| 2.1 Measurement Uncertainty..... | 6 |
| 2.2 Modification Record..... | 6 |
| 3 General Information | 7 |
| 3.1 General Description of EUT..... | 7 |
| 3.2 Description of Test Modes..... | 9 |
| 3.2.1 Test Mode Applicability and Tested Channel Detail..... | 10 |
| 3.3 Duty Cycle of Test Signal..... | 12 |
| 3.4 Description of Support Units..... | 15 |
| 3.4.1 Configuration of System under Test..... | 16 |
| 3.5 General Description of Applied Standards..... | 17 |
| 4 Test Types and Results | 18 |
| 4.1 Radiated Emission and Bandedge Measurement..... | 18 |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement..... | 18 |
| 4.1.2 Test Instruments..... | 19 |
| 4.1.3 Test Procedures..... | 20 |
| 4.1.4 Deviation from Test Standard..... | 20 |
| 4.1.5 Test Set Up..... | 21 |
| 4.1.6 EUT Operating Conditions..... | 21 |
| 4.1.7 Test Results..... | 22 |
| 4.2 Conducted Emission Measurement..... | 77 |
| 4.2.1 Limits of Conducted Emission Measurement..... | 77 |
| 4.2.2 Test Instruments..... | 77 |
| 4.2.3 Test Procedures..... | 78 |
| 4.2.4 Deviation from Test Standard..... | 78 |
| 4.2.5 Test Setup..... | 78 |
| 4.2.6 EUT Operating Conditions..... | 78 |
| 4.2.7 Test Results..... | 79 |
| 4.3 Transmit Power Measurement..... | 87 |
| 4.3.1 Limits of Transmit Power Measurement..... | 87 |
| 4.3.2 Test Setup..... | 87 |
| 4.3.3 Test Instruments..... | 87 |
| 4.3.4 Test Procedure..... | 88 |
| 4.3.5 Deviation from Test Standard..... | 88 |
| 4.3.6 EUT Operating Conditions..... | 88 |
| 4.3.7 Test Result..... | 89 |
| 4.4 Occupied Bandwidth Measurement..... | 102 |
| 4.4.1 Test Setup..... | 102 |
| 4.4.2 Test Instruments..... | 102 |
| 4.4.3 Test Procedure..... | 102 |
| 4.4.4 Test Result..... | 103 |
| 4.5 Peak Power Spectral Density Measurement..... | 112 |
| 4.5.1 Limits of Peak Power Spectral Density Measurement..... | 112 |
| 4.5.2 Test Setup..... | 112 |
| 4.5.3 Test Instruments..... | 112 |
| 4.5.4 Test Procedures..... | 112 |
| 4.5.5 Deviation from Test Standard..... | 112 |
| 4.5.6 EUT Operating Conditions..... | 112 |
| 4.5.7 Test Results..... | 113 |
| 4.6 Frequency Stability..... | 120 |
| 4.6.1 Limits of Frequency Stability Measurement..... | 120 |

| | |
|---|------------|
| 4.6.2 Test Setup..... | 120 |
| 4.6.3 Test Instruments | 120 |
| 4.6.4 Test Procedure | 120 |
| 4.6.5 Deviation from Test Standard | 120 |
| 4.6.6 EUT Operating Condition | 120 |
| 4.6.7 Test Results | 121 |
| 5 Pictures of Test Arrangements..... | 123 |
| Appendix – Information on the Testing Laboratories | 124 |

Release Control Record

| Issue No. | Description | Date Issued |
|--------------|------------------|---------------|
| RF160725C02B | Original release | Sep. 12, 2016 |

1 Certificate of Conformity

Product: Wireless 802.11 abgn/ac indoor AP

Brand: Cisco

Test Model: MR33-HW

Sample Status: Engineering sample

Applicant: Cisco Systems, Inc.

Test Date: Jul. 25 ~ Aug. 31, 2016

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Sep. 12, 2016
Celine Chou / Specialist

Approved by : Ken Liu , **Date:** Sep. 12, 2016
Ken Liu / Senior Manager

2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart E (Section 15.407) | | | |
|--|--|--------|--|
| FCC Clause | Test Item | Result | Remarks |
| 15.407(b)(6) | AC Power Conducted Emissions | Pass | Meet the requirement of limit. Minimum passing margin is -12.99dB at 0.15000MHz. |
| 15.407(b) (1/2/3/4(i/ii)/6) | Radiated Emissions & Band Edge Measurement | Pass | Meet the requirement of limit. Minimum passing margin is -1.1dB at 5350.00MHz. |
| 15.407(a)(1/2/3) | Max Average Transmit Power | Pass | Meet the requirement of limit. |
| --- | Occupied Bandwidth Measurement | - | Reference only. |
| 15.407(a)(1/2/3) | Peak Power Spectral Density | Pass | Meet the requirement of limit. |
| 15.407(g) | Frequency Stability | Pass | Meet the requirement of limit. |
| 15.203 | Antenna Requirement | Pass | Antenna connector is IPEX not a standard connector. |

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Frequency | Expanded Uncertainty (k=2) (\pm) |
|------------------------------------|------------------|--------------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 2.44 dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 200MHz | 3.86 dB |
| | 200MHz ~ 1000MHz | 3.87 dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 18GHz | 2.29 dB |
| | 18GHz ~ 40GHz | 2.29 dB |

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

| | |
|-----------------------|--|
| Product | Wireless 802.11 abgn/ac indoor AP |
| Brand | Cisco |
| Test Model | MR33-HW |
| Status of EUT | Engineering sample |
| Power Supply Rating | 12Vdc from adapter 48Vdc or 55Vdc from POE |
| Modulation Type | 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM |
| Modulation Technology | OFDM |
| Transfer Rate | 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps |
| Operating Frequency | 5260 ~ 5320MHz, 5500 ~ 5700MHz |
| Number of Channel | 5260 ~ 5320MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5500 ~ 5700MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 8 802.11n (HT40), 802.11ac (VHT40): 3 802.11ac (VHT80): 1 |
| Output Power | Radio 2: CDD Mode 5260 ~ 5320MHz: 193.163mW 5500 ~ 5700MHz: 192.196mW Beamforming Mode 5260 ~ 5320MHz: 135.392mW 5500 ~ 5700MHz: 134.931mW Radio 3: CDD Mode 5260 ~ 5320MHz: 63.973mW 5500 ~ 5700MHz: 45.082mW |
| Antenna Type | Refer to note |
| Antenna Connector | Refer to note |
| Accessory Device | NA |
| Data Cable Supplied | NA |

Note:

1. This report is prepared for FCC class III permissive change. The difference compared with the original report (BV ADT report no.: RF160725C02-1) is adding 5.26GHz to 5.32GHz and 5.50GHz to 5.70GHz by software.

2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

| Modulation Mode | TX Function | Beamforming | Remark |
|------------------|-------------|-------------|---------|
| 802.11a | 2TX | Not Support | Radio 2 |
| 802.11n (HT20) | 2TX | Support | |
| 802.11n (HT40) | 2TX | Support | |
| 802.11ac (VHT20) | 2TX | Support | |
| 802.11ac (VHT40) | 2TX | Support | |
| 802.11ac (VHT80) | 2TX | Support | |
| 802.11a | 1TX | Not Support | Radio 3 |
| 802.11n (HT20) | 1TX | Not Support | |
| 802.11n (HT40) | 1TX | Not Support | |
| 802.11ac (VHT20) | 1TX | Not Support | |
| 802.11ac (VHT40) | 1TX | Not Support | |
| 802.11ac (VHT80) | 1TX | Not Support | |

*The modulation and bandwidth are similar for 802.11n mode for HT20/HT40 and 802.11ac mode for VHT20/VHT40, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

* For 5GHz band, CDD mode is the worst case for final radiated emission below 1GHz and power line conducted emission tests after pretesting CDD mode and beamforming mode.

3. The EUT consumes power from the following adapter and POE. (Support unit only)

| Adapter | |
|--------------|---|
| Brand | CISCO |
| Model | KSAS0361200250HU |
| Input Power | 100-240Vac, 50/60Hz, 1.0A |
| Output Power | 12Vdc, 2.5A |
| Power Line | 1.5m cable without core attached on adapter |

| POE | |
|--------------|--|
| Brand | CISCO |
| Model | MA-INJ-4 |
| Input Power | 100-240Vac, 50/60Hz, 0.67A |
| Output Power | 55Vdc/ 0.6A |
| Power Line | 1.4m non-shielded Power cable without core |

4. The EUT with follow antennas gain is listed as table below.

| No. | Type | Connector | Gain(dBi) | | Remark |
|-----|---------|-----------|-----------|------|-----------------|
| | | | 2.4GHz | 5GHz | |
| 1 | PIFA | IPEX | 4.17 | - | Radio 1 (WLAN) |
| 2 | PIFA | IPEX | 3.74 | - | |
| 3 | PIFA | IPEX | - | 5.34 | Radio 2 (WLAN) |
| 4 | PIFA | IPEX | - | 5.71 | |
| 5 | Printed | IPEX | 5.67 | - | Radio 4 (BT LE) |
| 6 | Printed | IPEX | 4.65 | 5.50 | Radio 3 (WLAN) |

5. 2.4GHz, 5GHz and BT LE technology can transmit at same time.
6. Spurious emission of the simultaneous operation (2.4GHz, 5GHz and BT LE) has been evaluated and no non-compliance was found.
7. The EUT has disabled the 5600-5650MHz band by S/W to avoid 5600-5650MHz.

3.2 Description of Test Modes

For 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 52 | 5260 MHz | 60 | 5300 MHz |
| 56 | 5280 MHz | 64 | 5320 MHz |

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 54 | 5270 MHz | 62 | 5310 MHz |

1 channel is provided for 802.11ac (VHT80):

| Channel | Frequency |
|---------|-----------|
| 58 | 5290 MHz |

For 5500 ~ 5700MHz

8 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 100 | 5500 MHz | 116 | 5580 MHz |
| 104 | 5520 MHz | 132 | 5660 MHz |
| 108 | 5540 MHz | 136 | 5680 MHz |
| 112 | 5560 MHz | 140 | 5700 MHz |

3 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 102 | 5510 MHz | 134 | 5670 MHz |
| 110 | 5550 MHz | | |

1 channel is provided for 802.11ac (VHT80):

| Channel | Frequency |
|---------|-----------|
| 106 | 5530 MHz |

3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|-----------|-----|------|--------------------|
| | RE \geq 1G | RE $<$ 1G | PLC | APCM | |
| A | √ | √ | √ | √ | Powered by POE |
| B | - | √ | √ | - | Powered by adapter |

Where **RE \geq 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE $<$ 1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | FREQ. BAND (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | REMARK | |
|--------------------|------------------|------------------|-------------------|----------------|-----------------------|-----------------|------------------|---------------|---------------|
| A | 802.11a | 5260-5320 | 52 to 64 | 52, 60, 64 | OFDM | BPSK | 6.0 | Radio 2 (2TX) | |
| | | | 52 to 64 | 52, 60, 64 | OFDM | BPSK | 6.0 | Radio 3 (1TX) | |
| A | 802.11n (HT20) | | 52 to 64 | 52, 60, 64 | OFDM | BPSK | 6.5 | Radio 2 (2TX) | |
| | | | 52 to 64 | 52, 60, 64 | OFDM | BPSK | 6.5 | Radio 3 (1TX) | |
| A | 802.11n (HT40) | | 54 to 62 | 54, 62 | OFDM | BPSK | 13.5 | Radio 2 (2TX) | |
| | | | 54 to 62 | 54, 62 | OFDM | BPSK | 13.5 | Radio 3 (1TX) | |
| A | 802.11ac (VHT80) | | 58 | 58 | OFDM | BPSK | 58.5 | Radio 2 (2TX) | |
| | | | 58 | 58 | OFDM | BPSK | 29.3 | Radio 3 (1TX) | |
| A | 802.11a | | 5500-5700 | 100 to 140 | 100, 116, 140 | OFDM | BPSK | 6.0 | Radio 2 (2TX) |
| | | | | 100 to 140 | 100, 116, 140 | OFDM | BPSK | 6.0 | Radio 3 (1TX) |
| A | 802.11n (HT20) | 100 to 140 | | 100, 116, 140 | OFDM | BPSK | 6.5 | Radio 2 (2TX) | |
| | | 100 to 140 | | 100, 116, 140 | OFDM | BPSK | 6.5 | Radio 3 (1TX) | |
| A | 802.11n (HT40) | 102 to 134 | | 102, 110, 134 | OFDM | BPSK | 13.5 | Radio 2 (2TX) | |
| | | 102 to 134 | | 102, 110, 134 | OFDM | BPSK | 13.5 | Radio 3 (1TX) | |
| A | 802.11ac (VHT80) | 106 | | 106 | OFDM | BPSK | 58.5 | Radio 2 (2TX) | |
| | | 106 | | 106 | OFDM | BPSK | 29.3 | Radio 3 (1TX) | |

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | FREQ. BAND (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | REMARK |
|--------------------|---------|----------------------|-------------------|----------------|-----------------------|-----------------|------------------|---------------|
| A, B | 802.11a | 5260-5320, 5500-5700 | 52 to 140 | 52 | OFDM | BPSK | 6.0 | Radio 2 (2TX) |
| | | | 52 to 140 | 52 | OFDM | BPSK | 6.0 | Radio 3 (1TX) |

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | FREQ. BAND (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | REMARK |
|--------------------|---------|----------------------|-------------------|----------------|-----------------------|-----------------|------------------|---------------|
| A, B | 802.11a | 5260-5320, 5500-5700 | 52 to 140 | 52 | OFDM | BPSK | 6.0 | Radio 2 (2TX) |
| | | | 52 to 140 | 52 | OFDM | BPSK | 6.0 | Radio 3 (1TX) |

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | MODE | FREQ. BAND (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) | REMARK | |
|--------------------|------------------|------------------|-------------------|----------------|-----------------------|-----------------|------------------|---------------|---------------|
| A | 802.11a | 5260-5320 | 52 to 64 | 52, 60, 64 | OFDM | BPSK | 6.0 | Radio 2 (2TX) | |
| | | | 52 to 64 | 52, 60, 64 | OFDM | BPSK | 6.0 | Radio 3 (1TX) | |
| A | 802.11n (HT20) | | 52 to 64 | 52, 60, 64 | OFDM | BPSK | 6.5 | Radio 2 (2TX) | |
| | | | 52 to 64 | 52, 60, 64 | OFDM | BPSK | 6.5 | Radio 3 (1TX) | |
| A | 802.11n (HT40) | | 54 to 62 | 54, 62 | OFDM | BPSK | 13.5 | Radio 2 (2TX) | |
| | | | 54 to 62 | 54, 62 | OFDM | BPSK | 13.5 | Radio 3 (1TX) | |
| A | 802.11ac (VHT80) | | 58 | 58 | OFDM | BPSK | 58.5 | Radio 2 (2TX) | |
| | | | 58 | 58 | OFDM | BPSK | 29.3 | Radio 3 (1TX) | |
| A | 802.11a | | 5500-5700 | 100 to 140 | 100, 116, 140 | OFDM | BPSK | 6.0 | Radio 2 (2TX) |
| | | | | 100 to 140 | 100, 116, 140 | OFDM | BPSK | 6.0 | Radio 3 (1TX) |
| A | 802.11n (HT20) | 100 to 140 | | 100, 116, 140 | OFDM | BPSK | 6.5 | Radio 2 (2TX) | |
| | | 100 to 140 | | 100, 116, 140 | OFDM | BPSK | 6.5 | Radio 3 (1TX) | |
| A | 802.11n (HT40) | 102 to 134 | | 102, 110, 134 | OFDM | BPSK | 13.5 | Radio 2 (2TX) | |
| | | 102 to 134 | | 102, 110, 134 | OFDM | BPSK | 13.5 | Radio 3 (1TX) | |
| A | 802.11ac (VHT80) | 106 | | 106 | OFDM | BPSK | 58.5 | Radio 2 (2TX) | |
| | | 106 | | 106 | OFDM | BPSK | 29.3 | Radio 3 (1TX) | |

Test Condition:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|--------------------------|-----------------------|------------------------|
| RE≥1G | 16deg. C, 70%RH | 120Vac, 60Hz | James Yang |
| RE<1G | 19deg. C, 70%RH | 120Vac, 60Hz 55Vdc | James Yang |
| PLC | 23deg. C, 70%RH | 120Vac, 60Hz 55Vdc | Jones Chang |
| APCM | 25deg. C, 60%RH | 120Vac, 60Hz | Ted Chang Frank Liu |

3.3 Duty Cycle of Test Signal

Radio 2: CDD Mode


Duty cycle of test signal is < 98 %, duty factor is required.

802.11a: Duty cycle = $2.044/2.162 = 0.945$, Duty factor = $10 * \log(1/0.945) = 0.24$

802.11n (HT20): Duty cycle = $4.980/5.085 = 0.979$, Duty factor = $10 * \log(1/0.979) = 0.09$

802.11n (HT40): Duty cycle = $2.375/2.513 = 0.945$, Duty factor = $10 * \log(1/0.945) = 0.25$

802.11ac (VHT80): Duty cycle = $1.062/1.249 = 0.850$, Duty factor = $10 * \log(1/0.850) = 0.70$

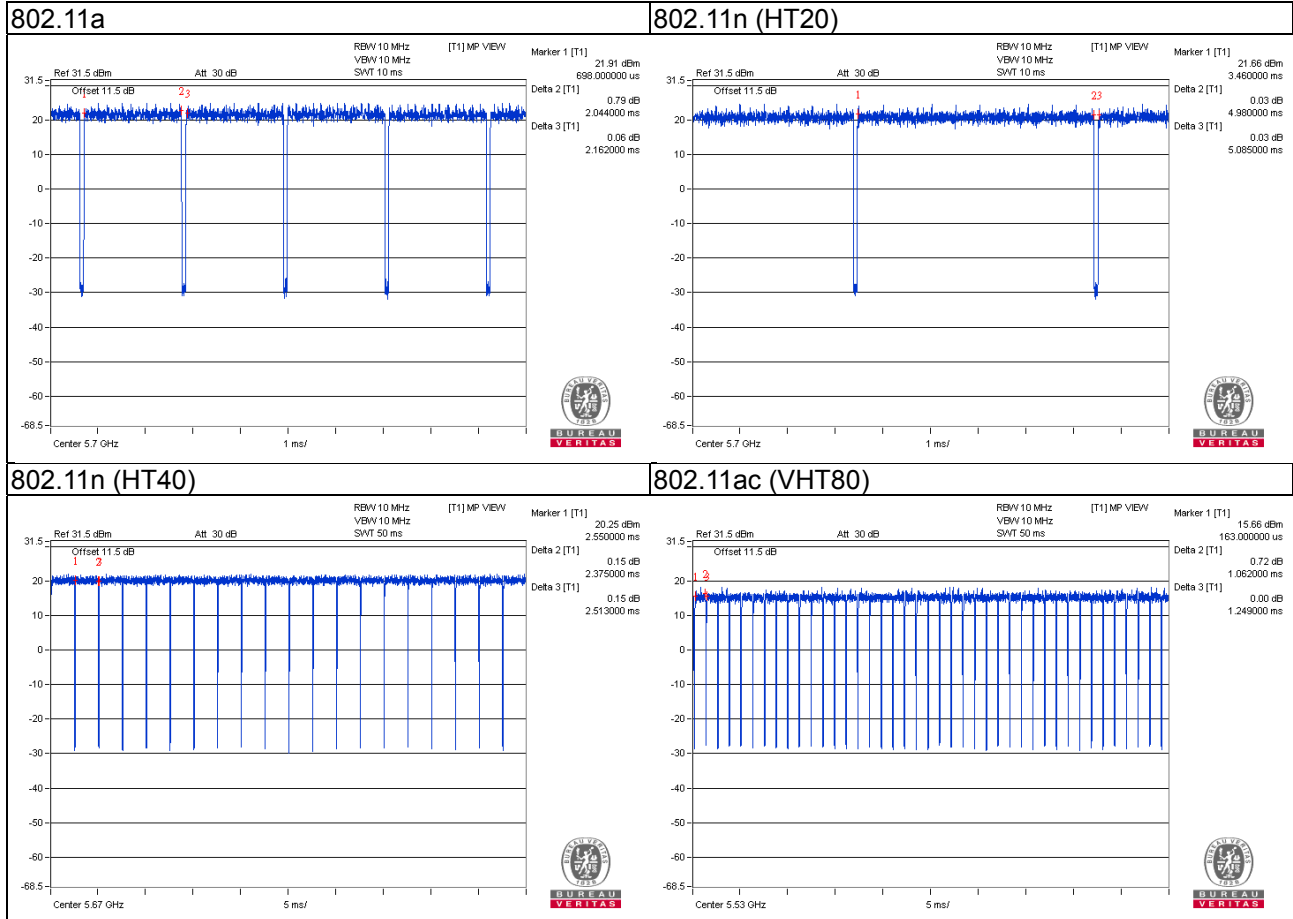

Radio 2: Beamforming Mode

802.11ac (VHT20): Duty cycle of test signal is > 98 %, duty factor is not required.


802.11ac (VHT40), 802.11ac (VHT80): Duty cycle of test signal is < 98 %, duty factor is required.

802.11ac (VHT20): Duty cycle = $4.962/5.050 = 0.983$


802.11ac (VHT40): Duty cycle = $2.375/2.500 = 0.950$, Duty factor = $10 * \log(1/0.950) = 0.22$

802.11ac (VHT80): Duty cycle = $1.120/1.217 = 0.920$, Duty factor = $10 * \log(1/0.920) = 0.36$


802.11ac (VHT20)

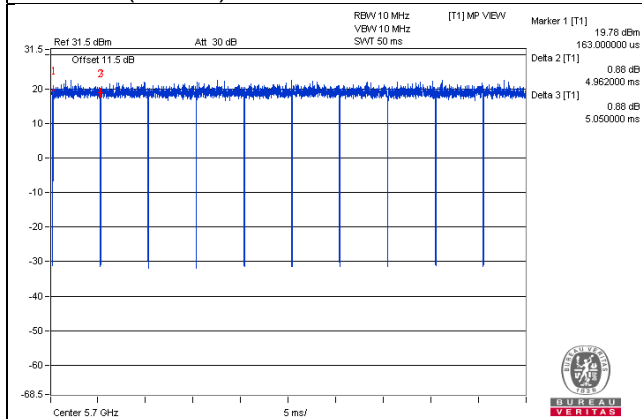

802.11ac (VHT40)

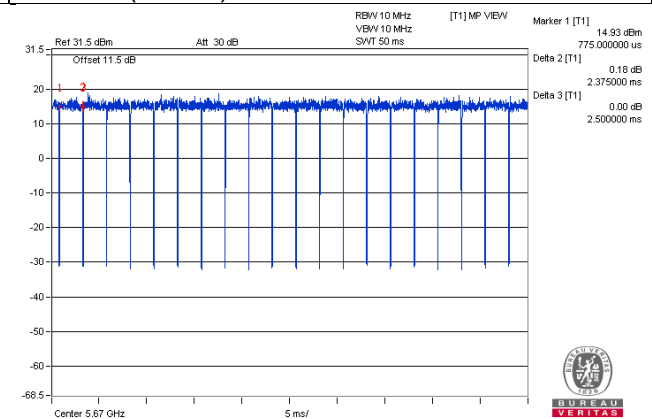

802.11ac (VHT80)

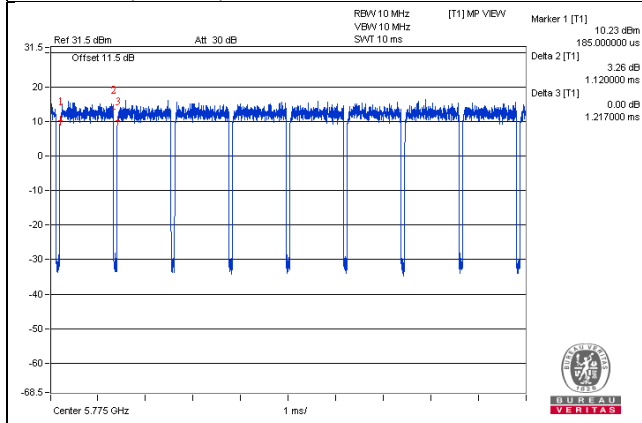

Radio 3: CDD Mode


Duty cycle of test signal is < 98 %, duty factor is required.

802.11a: Duty cycle = $2.012/2.112 = 0.953$, Duty factor = $10 * \log(1/0.953) = 0.21$

802.11n (HT20): Duty cycle = $1.887/2.012 = 0.938$, Duty factor = $10 * \log(1/0.938) = 0.28$

802.11n (HT40): Duty cycle = $0.862/1.024 = 0.842$, Duty factor = $10 * \log(1/0.842) = 0.75$

802.11ac (VHT80): Duty cycle = $0.400/0.563 = 0.710$, Duty factor = $10 * \log(1/0.710) = 1.48$

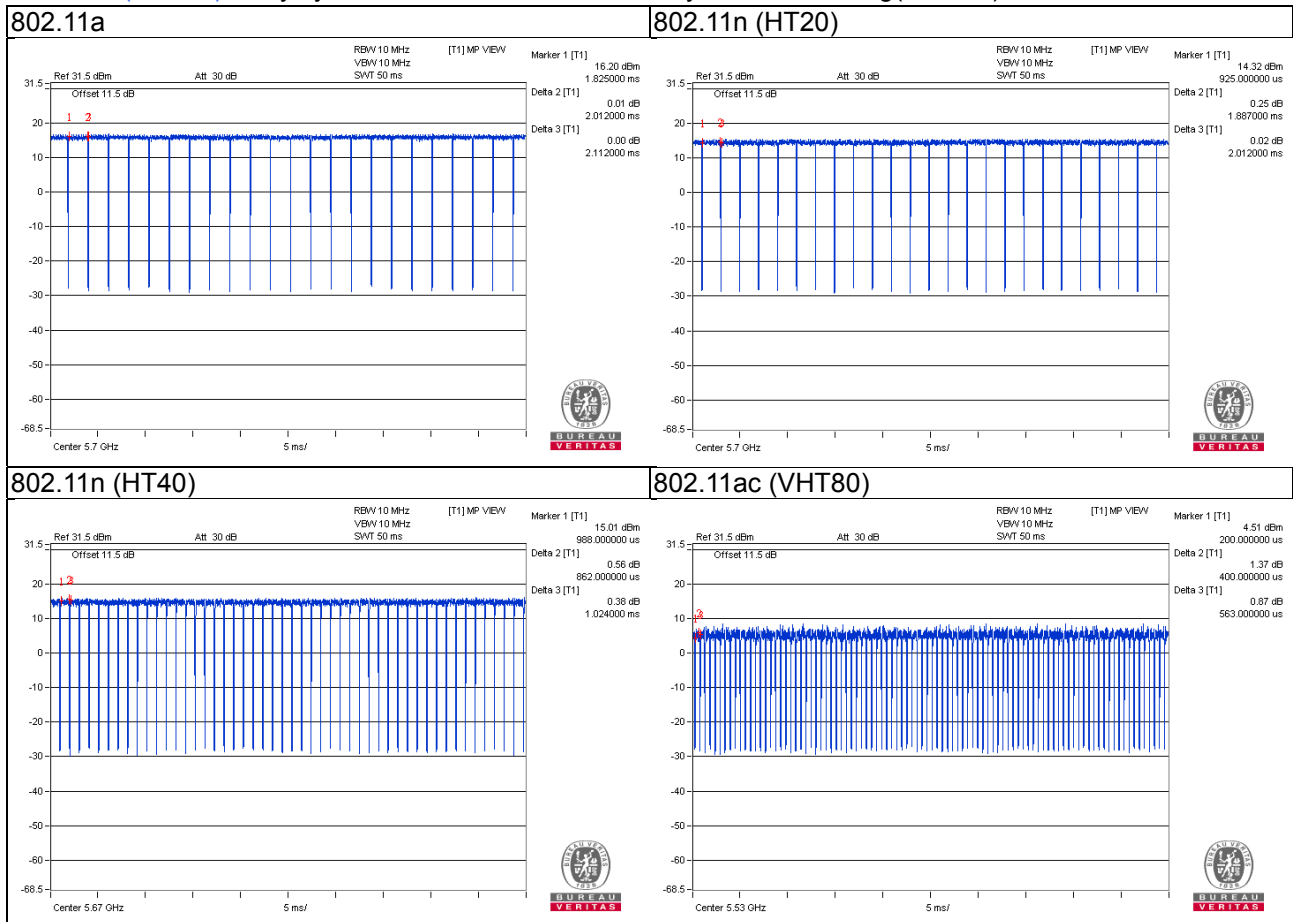

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|----------|-------|------------------|------------|------------------|--|
| A. | Notebook | DELL | E5410 | 6RP2YM1 | FCC DoC Approved | - |
| B. | Adapter | CISCO | KSAS0361200250HU | N/A | N/A | Provided by manufacturer For test mode A only |
| C. | POE | CISCO | MA-INJ-4 | N/A | N/A | Provided by manufacturer For test mode B only |


Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as communication partner to transfer data.


| ID | Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|--------------|------|------------|--------------------|--------------|-------------------------------|
| 1. | RJ45 Cable | 1 | 3 | N | 0 | Cat5e |
| 2. | Power Cable | 1 | 1.5 | N | 0 | For test mode A only |
| 3. | RJ45 Cable | 1 | 1.8 | N | 0 | Cat5e For test mode B only |

3.4.1 Configuration of System under Test

Test Mode A

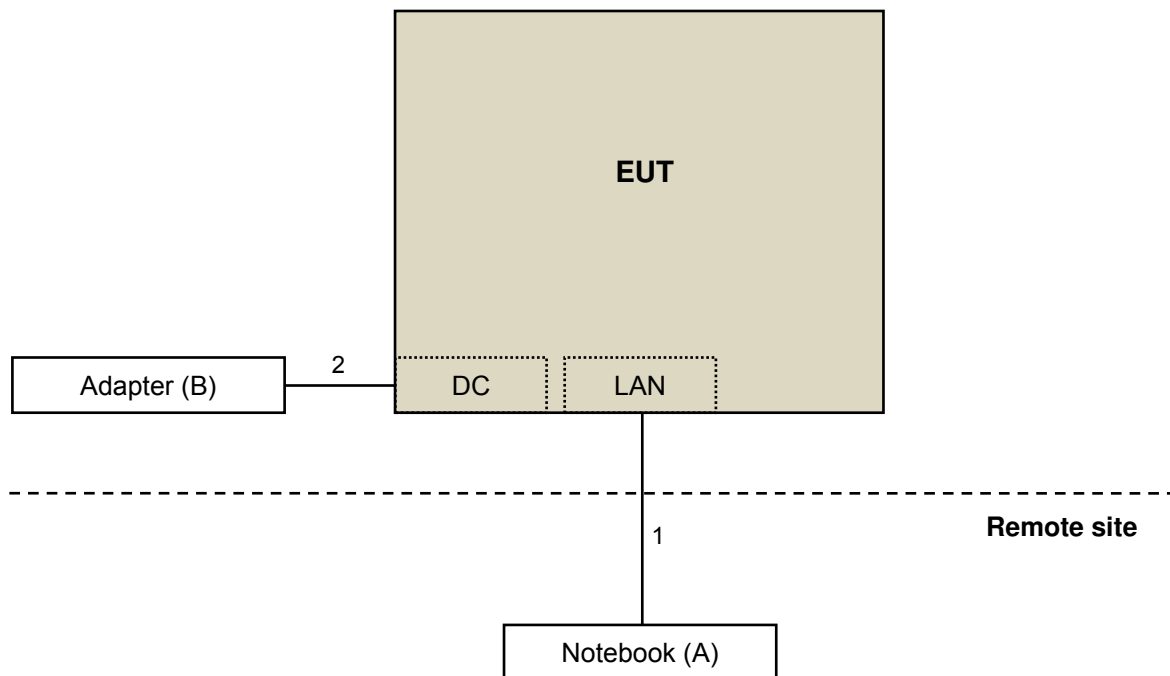

Test Mode B

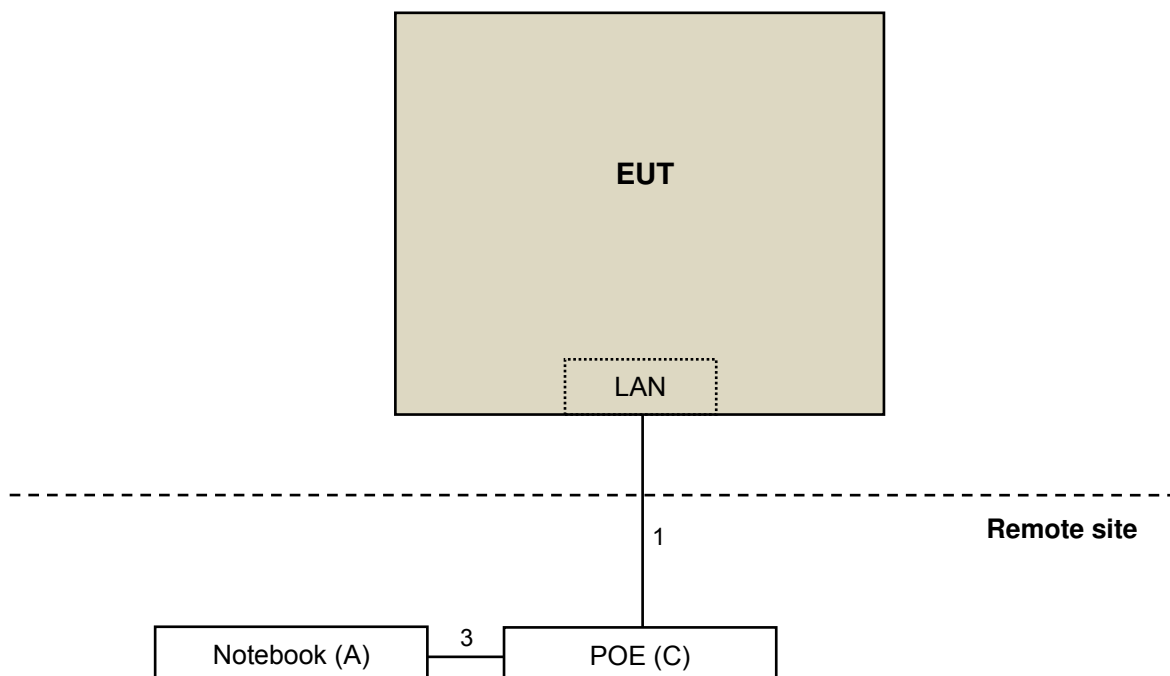

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v01r03

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

Note: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

| Applicable To | | Limit | |
|--|---|---|---|
| 789033 D02 General UNII Test Procedure New Rules v01r03 | | Field Strength at 3m | |
| | | PK:74 (dBuV/m) | AV:54 (dBuV/m) |
| Frequency Band | Applicable To | EIRP Limit | Equivalent Field Strength at 3m |
| 5150~5250 MHz | 15.407(b)(1) | PK:-27 (dBm/MHz) | PK:68.2(dBuV/m) |
| 5250~5350 MHz | 15.407(b)(2) | | |
| 5470~5725 MHz | 15.407(b)(3) | | |
| 5725~5850 MHz | <input checked="" type="checkbox"/> 15.407(b)(4)(i) | PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4} | PK: 68.2(dBuV/m) ^{*1} PK:105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK:122.2 (dBuV/m) ^{*4} |
| | <input type="checkbox"/> 15.407(b)(4)(ii) | Emission limits in section 15.247(d) | |
| ^{*1} beyond 75 MHz or more above of the band edge. | | ^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. | |
| ^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. | | ^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. | |

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

| Description & Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Due |
|---|------------------------------|--------------------------------|---------------|---------------|
| Test Receiver ROHDE & SCHWARZ | ESIB7 | 100187 | Apr. 18, 2016 | Apr. 17, 2017 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100041 | Sep. 02, 2015 | Sep. 01, 2016 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-171 | Jan. 07, 2016 | Jan. 06, 2017 |
| HORN Antenna SCHWARZBECK | 9120D | 209 | Jan. 20, 2016 | Jan. 19, 2017 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170241 | Jan. 18, 2016 | Jan. 17, 2017 |
| Preamplifier Agilent | 8447D | 2944A10738 | Oct. 18, 2015 | Oct. 17, 2016 |
| Preamplifier Agilent | 8449B | 3008A01964 | Aug. 22, 2015 | Aug. 21, 2016 |
| | | | Aug. 22, 2016 | Aug. 21, 2017 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 104 | Cable-CH3-03 (214378) | Aug. 22, 2015 | Aug. 21, 2016 |
| | | | Aug. 22, 2016 | Aug. 21, 2017 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 106 | Cable-CH3-03 (309224+12738) | Aug. 22, 2015 | Aug. 21, 2016 |
| | | | Aug. 22, 2016 | Aug. 21, 2017 |
| Software BV ADT | ADT_Radiated_ V7.6.15.9.4 | NA | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 013303 | NA | NA |
| Antenna Tower Controller BV ADT | AT100 | AT93021702 | NA | NA |
| Turn Table BV ADT | TT100 | TT93021702 | NA | NA |
| Turn Table Controller BV ADT | SC100 | SC93021702 | NA | NA |
| 26GHz ~ 40GHz Amplifier | EM26400 | 815221 | Oct. 18, 2015 | Oct. 17, 2016 |
| High Speed Peak Power Meter | ML2495A | 0824011 | Jul. 09, 2015 | Jul. 08, 2016 |
| | | | Jul. 09, 2016 | Jul. 08, 2017 |
| Power Sensor | MA2411B | 0738171 | Jul. 09, 2015 | Jul. 08, 2016 |
| | | | Jul. 09, 2016 | Jul. 08, 2017 |
| WIT Standard Temperature And Humidity Chamber | TH-4S-C | W981030 | Jun. 08, 2016 | Jun. 07, 2017 |

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

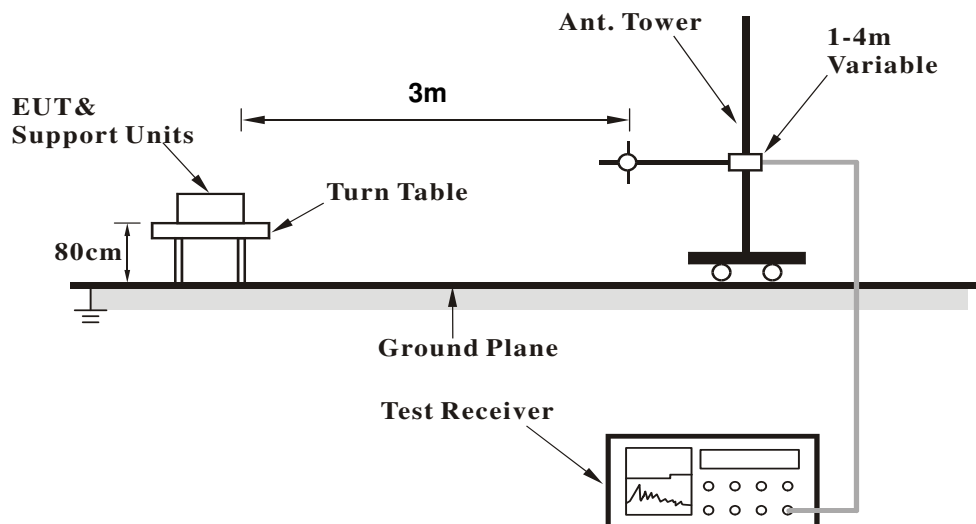

<Frequency Range above 1GHz>

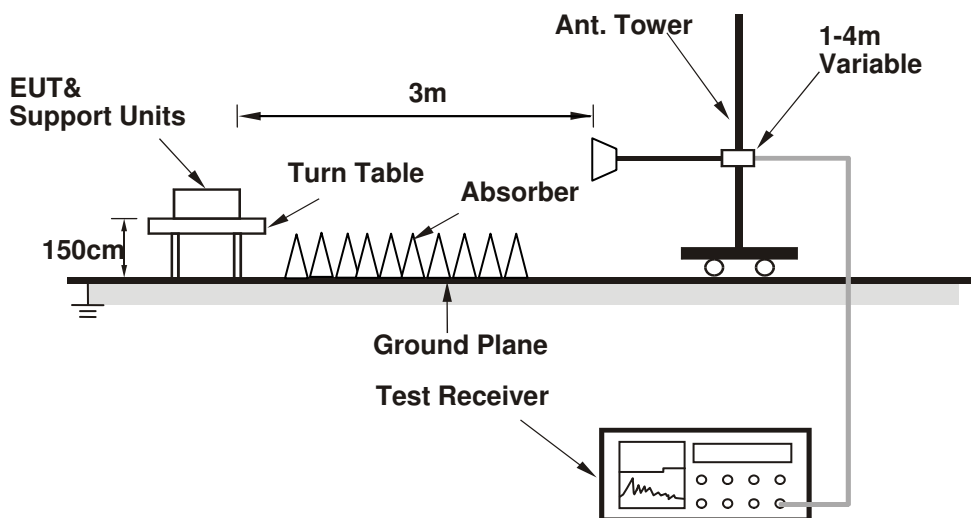

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

4.1.7 Test Results

Above 1GHz Worst-Case Data:

Radio 2: CDD Mode

802.11a

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5150.00 | 56.8 PK | 74.0 | -17.2 | 1.78 H | 211 | 50.8 | 6.0 |
| 2 | 5150.00 | 44.5 AV | 54.0 | -9.5 | 1.78 H | 211 | 38.5 | 6.0 |
| 3 | *5260.00 | 116.2 PK | | | 1.04 H | 283 | 76.6 | 39.6 |
| 4 | *5260.00 | 105.6 AV | | | 1.04 H | 283 | 66.0 | 39.6 |
| 5 | #10520.00 | 60.0 PK | 74.0 | -14.0 | 1.66 H | 332 | 41.1 | 18.9 |
| 6 | #10520.00 | 47.3 AV | 54.0 | -6.7 | 1.66 H | 332 | 28.4 | 18.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5150.00 | 56.9 PK | 74.0 | -17.1 | 2.23 V | 163 | 50.9 | 6.0 |
| 2 | 5150.00 | 43.8 AV | 54.0 | -10.2 | 2.23 V | 163 | 37.8 | 6.0 |
| 3 | *5260.00 | 117.8 PK | | | 2.38 V | 345 | 78.2 | 39.6 |
| 4 | *5260.00 | 107.2 AV | | | 2.38 V | 345 | 67.6 | 39.6 |
| 5 | #10520.00 | 60.2 PK | 74.0 | -13.8 | 1.66 V | 298 | 41.3 | 18.9 |
| 6 | #10520.00 | 47.3 AV | 54.0 | -6.7 | 1.66 V | 298 | 28.4 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|-------------------|--------------|
| CHANNEL | TX Channel 60 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5300.00 | 115.5 PK | | | 1.18 H | 283 | 75.8 | 39.7 |
| 2 | *5300.00 | 105.4 AV | | | 1.18 H | 283 | 65.7 | 39.7 |
| 3 | 10600.00 | 60.7 PK | 74.0 | -13.3 | 1.96 H | 301 | 41.8 | 18.9 |
| 4 | 10600.00 | 47.5 AV | 54.0 | -6.5 | 1.96 H | 301 | 28.6 | 18.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5300.00 | 117.9 PK | | | 2.46 V | 348 | 78.2 | 39.7 |
| 2 | *5300.00 | 107.4 AV | | | 2.46 V | 348 | 67.7 | 39.7 |
| 3 | 10600.00 | 60.0 PK | 74.0 | -14.0 | 3.01 V | 333 | 41.1 | 18.9 |
| 4 | 10600.00 | 47.7 AV | 54.0 | -6.3 | 3.01 V | 333 | 28.8 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 64 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 115.1 PK | | | 1.02 H | 283 | 75.4 | 39.7 |
| 2 | *5320.00 | 105.0 AV | | | 1.02 H | 283 | 65.3 | 39.7 |
| 3 | 5350.00 | 68.6 PK | 74.0 | -5.4 | 1.07 H | 281 | 62.1 | 6.5 |
| 4 | 5350.00 | 52.1 AV | 54.0 | -1.9 | 1.07 H | 281 | 45.6 | 6.5 |
| 5 | 10640.00 | 60.8 PK | 74.0 | -13.2 | 1.88 H | 147 | 42.0 | 18.8 |
| 6 | 10640.00 | 47.0 AV | 54.0 | -7.0 | 1.88 H | 147 | 28.2 | 18.8 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 117.0 PK | | | 2.02 V | 342 | 77.3 | 39.7 |
| 2 | *5320.00 | 106.5 AV | | | 2.02 V | 342 | 66.8 | 39.7 |
| 3 | 5350.00 | 67.7 PK | 74.0 | -6.3 | 3.06 V | 328 | 61.2 | 6.5 |
| 4 | 5350.00 | 52.7 AV | 54.0 | -1.3 | 3.06 V | 328 | 46.2 | 6.5 |
| 5 | 10640.00 | 59.8 PK | 74.0 | -14.2 | 2.55 V | 182 | 41.0 | 18.8 |
| 6 | 10640.00 | 46.7 AV | 54.0 | -7.3 | 2.55 V | 182 | 27.9 | 18.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 100 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 60.5 PK | 74.0 | -13.5 | 3.01 H | 348 | 53.6 | 6.9 |
| 2 | 5460.00 | 47.3 AV | 54.0 | -6.7 | 3.01 H | 348 | 40.4 | 6.9 |
| 3 | #5470.00 | 66.9 PK | 74.0 | -7.1 | 3.06 H | 3 | 60.0 | 6.9 |
| 4 | #5470.00 | 50.9 AV | 54.0 | -3.1 | 3.06 H | 3 | 44.0 | 6.9 |
| 5 | *5500.00 | 115.9 PK | | | 3.07 H | 4 | 75.7 | 40.2 |
| 6 | *5500.00 | 105.7 AV | | | 3.07 H | 4 | 65.5 | 40.2 |
| 7 | 11000.00 | 61.1 PK | 74.0 | -12.9 | 2.31 H | 267 | 41.2 | 19.9 |
| 8 | 11000.00 | 48.5 AV | 54.0 | -5.5 | 2.31 H | 267 | 28.6 | 19.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 63.3 PK | 74.0 | -10.7 | 2.35 V | 339 | 56.4 | 6.9 |
| 2 | 5460.00 | 47.9 AV | 54.0 | -6.1 | 2.35 V | 339 | 41.0 | 6.9 |
| 3 | #5470.00 | 69.0 PK | 74.0 | -5.0 | 2.82 V | 335 | 62.1 | 6.9 |
| 4 | #5470.00 | 52.6 AV | 54.0 | -1.4 | 2.82 V | 335 | 45.7 | 6.9 |
| 5 | *5500.00 | 117.1 PK | | | 3.05 V | 317 | 76.9 | 40.2 |
| 6 | *5500.00 | 106.8 AV | | | 3.05 V | 317 | 66.6 | 40.2 |
| 7 | 11000.00 | 61.4 PK | 74.0 | -12.6 | 1.99 V | 139 | 41.5 | 19.9 |
| 8 | 11000.00 | 48.1 AV | 54.0 | -5.9 | 1.99 V | 139 | 28.2 | 19.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 116 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 116.2 PK | | | 2.99 H | 299 | 75.9 | 40.3 |
| 2 | *5580.00 | 106.1 AV | | | 2.99 H | 299 | 65.8 | 40.3 |
| 3 | 11160.00 | 59.7 PK | 74.0 | -14.3 | 1.84 H | 119 | 40.3 | 19.4 |
| 4 | 11160.00 | 47.1 AV | 54.0 | -6.9 | 1.84 H | 119 | 27.7 | 19.4 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 116.5 PK | | | 2.40 V | 5 | 76.2 | 40.3 |
| 2 | *5580.00 | 106.1 AV | | | 2.40 V | 5 | 65.8 | 40.3 |
| 3 | 11160.00 | 59.7 PK | 74.0 | -14.3 | 2.42 V | 245 | 40.3 | 19.4 |
| 4 | 11160.00 | 47.3 AV | 54.0 | -6.7 | 2.42 V | 245 | 27.9 | 19.4 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 140 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 115.4 PK | | | 3.01 H | 302 | 75.0 | 40.4 |
| 2 | *5700.00 | 105.2 AV | | | 3.01 H | 302 | 64.8 | 40.4 |
| 3 | #5725.00 | 67.4 PK | 74.0 | -6.6 | 3.06 H | 22 | 60.0 | 7.4 |
| 4 | #5725.00 | 52.6 AV | 54.0 | -1.4 | 3.06 H | 22 | 45.2 | 7.4 |
| 5 | 11400.00 | 60.6 PK | 74.0 | -13.4 | 1.57 H | 166 | 41.8 | 18.8 |
| 6 | 11400.00 | 47.4 AV | 54.0 | -6.6 | 1.57 H | 166 | 28.6 | 18.8 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 116.0 PK | | | 2.30 V | 342 | 75.6 | 40.4 |
| 2 | *5700.00 | 105.5 AV | | | 2.30 V | 342 | 65.1 | 40.4 |
| 3 | #5725.00 | 68.6 PK | 74.0 | -5.4 | 2.60 V | 349 | 61.2 | 7.4 |
| 4 | #5725.00 | 52.7 AV | 54.0 | -1.3 | 2.60 V | 349 | 45.3 | 7.4 |
| 5 | 11400.00 | 60.5 PK | 74.0 | -13.5 | 2.43 V | 266 | 41.7 | 18.8 |
| 6 | 11400.00 | 47.4 AV | 54.0 | -6.6 | 2.43 V | 266 | 28.6 | 18.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

| | | | |
|-----------------|---------------|----------------------|---------------------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 57.2 PK | 74.0 | -16.8 | 1.59 H | 261 | 51.2 | 6.0 |
| 2 | 5150.00 | 44.8 AV | 54.0 | -9.2 | 1.59 H | 261 | 38.8 | 6.0 |
| 3 | *5260.00 | 117.6 PK | | | 1.14 H | 281 | 78.0 | 39.6 |
| 4 | *5260.00 | 106.2 AV | | | 1.14 H | 281 | 66.6 | 39.6 |
| 5 | #10520.00 | 59.8 PK | 74.0 | -14.2 | 2.68 H | 47 | 40.9 | 18.9 |
| 6 | #10520.00 | 47.2 AV | 54.0 | -6.8 | 2.68 H | 47 | 28.3 | 18.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 57.0 PK | 74.0 | -17.0 | 1.75 V | 268 | 51.0 | 6.0 |
| 2 | 5150.00 | 44.5 AV | 54.0 | -9.5 | 1.75 V | 268 | 38.5 | 6.0 |
| 3 | *5260.00 | 118.3 PK | | | 2.37 V | 345 | 78.7 | 39.6 |
| 4 | *5260.00 | 107.6 AV | | | 2.37 V | 345 | 68.0 | 39.6 |
| 5 | #10520.00 | 60.4 PK | 74.0 | -13.6 | 1.47 V | 45 | 41.5 | 18.9 |
| 6 | #10520.00 | 47.2 AV | 54.0 | -6.8 | 1.47 V | 45 | 28.3 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|-------------------|--------------|
| CHANNEL | TX Channel 60 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5300.00 | 116.6 PK | | | 1.04 H | 281 | 76.9 | 39.7 |
| 2 | *5300.00 | 105.5 AV | | | 1.04 H | 281 | 65.8 | 39.7 |
| 3 | 10600.00 | 61.5 PK | 74.0 | -12.5 | 2.87 H | 65 | 42.6 | 18.9 |
| 4 | 10600.00 | 48.4 AV | 54.0 | -5.6 | 2.87 H | 65 | 29.5 | 18.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5300.00 | 117.4 PK | | | 2.22 V | 341 | 77.7 | 39.7 |
| 2 | *5300.00 | 106.6 AV | | | 2.22 V | 341 | 66.9 | 39.7 |
| 3 | 10600.00 | 60.4 PK | 74.0 | -13.6 | 2.98 V | 301 | 41.5 | 18.9 |
| 4 | 10600.00 | 47.2 AV | 54.0 | -6.8 | 2.98 V | 301 | 28.3 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 64 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 116.0 PK | | | 1.04 H | 283 | 76.3 | 39.7 |
| 2 | *5320.00 | 104.9 AV | | | 1.04 H | 283 | 65.2 | 39.7 |
| 3 | 5350.00 | 64.3 PK | 74.0 | -9.7 | 1.13 H | 284 | 57.8 | 6.5 |
| 4 | 5350.00 | 49.2 AV | 54.0 | -4.8 | 1.13 H | 284 | 42.7 | 6.5 |
| 5 | 10640.00 | 61.1 PK | 74.0 | -12.9 | 1.47 H | 169 | 42.3 | 18.8 |
| 6 | 10640.00 | 48.0 AV | 54.0 | -6.0 | 1.47 H | 169 | 29.2 | 18.8 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 117.0 PK | | | 2.45 V | 343 | 77.3 | 39.7 |
| 2 | *5320.00 | 106.2 AV | | | 2.45 V | 343 | 66.5 | 39.7 |
| 3 | 5350.00 | 69.2 PK | 74.0 | -4.8 | 2.40 V | 352 | 62.7 | 6.5 |
| 4 | 5350.00 | 52.6 AV | 54.0 | -1.4 | 2.40 V | 352 | 46.1 | 6.5 |
| 5 | 10640.00 | 59.5 PK | 74.0 | -14.5 | 2.13 V | 246 | 40.7 | 18.8 |
| 6 | 10640.00 | 46.9 AV | 54.0 | -7.1 | 2.13 V | 246 | 28.1 | 18.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 100 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 61.1 PK | 74.0 | -12.9 | 3.00 H | 38 | 54.2 | 6.9 |
| 2 | 5460.00 | 47.4 AV | 54.0 | -6.6 | 3.00 H | 38 | 40.5 | 6.9 |
| 3 | #5470.00 | 68.6 PK | 74.0 | -5.4 | 3.17 H | 19 | 61.7 | 6.9 |
| 4 | #5470.00 | 50.8 AV | 54.0 | -3.2 | 3.17 H | 19 | 43.9 | 6.9 |
| 5 | *5500.00 | 115.4 PK | | | 3.19 H | 2 | 75.2 | 40.2 |
| 6 | *5500.00 | 105.1 AV | | | 3.19 H | 2 | 64.9 | 40.2 |
| 7 | 11000.00 | 61.1 PK | 74.0 | -12.9 | 2.11 H | 122 | 41.2 | 19.9 |
| 8 | 11000.00 | 47.7 AV | 54.0 | -6.3 | 2.11 H | 122 | 27.8 | 19.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 62.5 PK | 74.0 | -11.5 | 2.05 V | 339 | 55.6 | 6.9 |
| 2 | 5460.00 | 47.1 AV | 54.0 | -6.9 | 2.05 V | 339 | 40.2 | 6.9 |
| 3 | #5470.00 | 69.7 PK | 74.0 | -4.3 | 2.25 V | 355 | 62.8 | 6.9 |
| 4 | #5470.00 | 52.7 AV | 54.0 | -1.3 | 2.25 V | 355 | 45.8 | 6.9 |
| 5 | *5500.00 | 116.6 PK | | | 2.01 V | 339 | 76.4 | 40.2 |
| 6 | *5500.00 | 106.3 AV | | | 2.01 V | 339 | 66.1 | 40.2 |
| 7 | 11000.00 | 61.1 PK | 74.0 | -12.9 | 2.50 V | 219 | 41.2 | 19.9 |
| 8 | 11000.00 | 47.8 AV | 54.0 | -6.2 | 2.50 V | 219 | 27.9 | 19.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 116 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 115.9 PK | | | 3.39 H | 304 | 75.6 | 40.3 |
| 2 | *5580.00 | 105.2 AV | | | 3.39 H | 304 | 64.9 | 40.3 |
| 3 | 11160.00 | 59.7 PK | 74.0 | -14.3 | 2.44 H | 214 | 40.3 | 19.4 |
| 4 | 11160.00 | 47.5 AV | 54.0 | -6.5 | 2.44 H | 214 | 28.1 | 19.4 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 117.2 PK | | | 2.39 V | 335 | 76.9 | 40.3 |
| 2 | *5580.00 | 106.8 AV | | | 2.39 V | 335 | 66.5 | 40.3 |
| 3 | 11160.00 | 60.2 PK | 74.0 | -13.8 | 2.41 V | 174 | 40.8 | 19.4 |
| 4 | 11160.00 | 47.0 AV | 54.0 | -7.0 | 2.41 V | 174 | 27.6 | 19.4 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 140 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 114.5 PK | | | 3.36 H | 297 | 74.1 | 40.4 |
| 2 | *5700.00 | 103.9 AV | | | 3.36 H | 297 | 63.5 | 40.4 |
| 3 | #5725.00 | 67.8 PK | 74.0 | -6.2 | 3.21 H | 22 | 60.4 | 7.4 |
| 4 | #5725.00 | 52.8 AV | 54.0 | -1.2 | 3.21 H | 22 | 45.4 | 7.4 |
| 5 | 11400.00 | 59.9 PK | 74.0 | -14.1 | 2.21 H | 162 | 41.1 | 18.8 |
| 6 | 11400.00 | 46.9 AV | 54.0 | -7.1 | 2.21 H | 162 | 28.1 | 18.8 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 114.7 PK | | | 2.50 V | 341 | 74.3 | 40.4 |
| 2 | *5700.00 | 104.5 AV | | | 2.50 V | 341 | 64.1 | 40.4 |
| 3 | #5725.00 | 65.8 PK | 74.0 | -8.2 | 2.37 V | 352 | 58.4 | 7.4 |
| 4 | #5725.00 | 52.2 AV | 54.0 | -1.8 | 2.37 V | 352 | 44.8 | 7.4 |
| 5 | 11400.00 | 59.9 PK | 74.0 | -14.1 | 1.81 V | 234 | 41.1 | 18.8 |
| 6 | 11400.00 | 47.5 AV | 54.0 | -6.5 | 1.81 V | 234 | 28.7 | 18.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 54 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5270.00 | 112.9 PK | | | 1.02 H | 283 | 73.3 | 39.6 |
| 2 | *5270.00 | 103.9 AV | | | 1.02 H | 283 | 64.3 | 39.6 |
| 3 | 5350.00 | 61.6 PK | 74.0 | -12.4 | 1.01 H | 278 | 55.1 | 6.5 |
| 4 | 5350.00 | 47.2 AV | 54.0 | -6.8 | 1.01 H | 278 | 40.7 | 6.5 |
| 5 | #10540.00 | 61.7 PK | 74.0 | -12.3 | 1.87 H | 246 | 42.7 | 19.0 |
| 6 | #10540.00 | 47.3 AV | 54.0 | -6.7 | 1.87 H | 246 | 28.3 | 19.0 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5270.00 | 114.6 PK | | | 3.12 V | 337 | 75.0 | 39.6 |
| 2 | *5270.00 | 104.9 AV | | | 3.12 V | 337 | 65.3 | 39.6 |
| 3 | 5350.00 | 62.8 PK | 74.0 | -11.2 | 2.78 V | 339 | 56.3 | 6.5 |
| 4 | 5350.00 | 47.1 AV | 54.0 | -6.9 | 2.78 V | 339 | 40.6 | 6.5 |
| 5 | #10540.00 | 60.6 PK | 74.0 | -13.4 | 1.87 V | 240 | 41.6 | 19.0 |
| 6 | #10540.00 | 47.5 AV | 54.0 | -6.5 | 1.87 V | 240 | 28.5 | 19.0 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 62 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5310.00 | 110.6 PK | | | 1.00 H | 280 | 70.9 | 39.7 |
| 2 | *5310.00 | 101.2 AV | | | 1.00 H | 280 | 61.5 | 39.7 |
| 3 | 5350.00 | 68.3 PK | 74.0 | -5.7 | 1.12 H | 279 | 61.8 | 6.5 |
| 4 | 5350.00 | 51.7 AV | 54.0 | -2.3 | 1.12 H | 279 | 45.2 | 6.5 |
| 5 | 10620.00 | 60.5 PK | 74.0 | -13.5 | 1.67 H | 348 | 41.6 | 18.9 |
| 6 | 10620.00 | 47.4 AV | 54.0 | -6.6 | 1.67 H | 348 | 28.5 | 18.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5310.00 | 113.0 PK | | | 3.36 V | 329 | 73.3 | 39.7 |
| 2 | *5310.00 | 103.2 AV | | | 3.36 V | 329 | 63.5 | 39.7 |
| 3 | 5350.00 | 69.1 PK | 74.0 | -4.9 | 3.15 V | 322 | 62.6 | 6.5 |
| 4 | 5350.00 | 52.7 AV | 54.0 | -1.3 | 3.15 V | 322 | 46.2 | 6.5 |
| 5 | 10620.00 | 59.7 PK | 74.0 | -14.3 | 2.74 V | 125 | 40.8 | 18.9 |
| 6 | 10620.00 | 47.2 AV | 54.0 | -6.8 | 2.74 V | 125 | 28.3 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 102 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 67.3 PK | 74.0 | -6.7 | 2.67 H | 19 | 60.4 | 6.9 |
| 2 | 5460.00 | 49.4 AV | 54.0 | -4.6 | 2.67 H | 19 | 42.5 | 6.9 |
| 3 | #5470.00 | 68.0 PK | 74.0 | -6.0 | 3.31 H | 26 | 61.1 | 6.9 |
| 4 | #5470.00 | 52.2 AV | 54.0 | -1.8 | 3.31 H | 26 | 45.3 | 6.9 |
| 5 | *5510.00 | 110.2 PK | | | 2.81 H | 35 | 70.0 | 40.2 |
| 6 | *5510.00 | 101.1 AV | | | 2.81 H | 35 | 60.9 | 40.2 |
| 7 | 11020.00 | 61.6 PK | 74.0 | -12.4 | 1.98 H | 212 | 41.8 | 19.8 |
| 8 | 11020.00 | 48.2 AV | 54.0 | -5.8 | 1.98 H | 212 | 28.4 | 19.8 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 67.4 PK | 74.0 | -6.6 | 2.13 V | 354 | 60.5 | 6.9 |
| 2 | 5460.00 | 50.5 AV | 54.0 | -3.5 | 2.13 V | 354 | 43.6 | 6.9 |
| 3 | #5470.00 | 72.3 PK | 74.0 | -1.7 | 2.32 V | 339 | 65.4 | 6.9 |
| 4 | #5470.00 | 52.7 AV | 54.0 | -1.3 | 2.32 V | 339 | 45.8 | 6.9 |
| 5 | *5510.00 | 112.6 PK | | | 2.20 V | 345 | 72.4 | 40.2 |
| 6 | *5510.00 | 103.0 AV | | | 2.20 V | 345 | 62.8 | 40.2 |
| 7 | 11020.00 | 61.9 PK | 74.0 | -12.1 | 1.84 V | 271 | 42.1 | 19.8 |
| 8 | 11020.00 | 47.8 AV | 54.0 | -6.2 | 1.84 V | 271 | 28.0 | 19.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 110 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5550.00 | 113.7 PK | | | 1.97 H | 291 | 73.5 | 40.2 |
| 2 | *5550.00 | 104.4 AV | | | 1.97 H | 291 | 64.2 | 40.2 |
| 3 | 11100.00 | 60.8 PK | 74.0 | -13.2 | 1.77 H | 264 | 41.6 | 19.2 |
| 4 | 11100.00 | 47.7 AV | 54.0 | -6.3 | 1.77 H | 264 | 28.5 | 19.2 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5550.00 | 113.6 PK | | | 2.09 V | 338 | 73.4 | 40.2 |
| 2 | *5550.00 | 104.1 AV | | | 2.09 V | 338 | 63.9 | 40.2 |
| 3 | 11100.00 | 61.2 PK | 74.0 | -12.8 | 1.45 V | 158 | 42.0 | 19.2 |
| 4 | 11100.00 | 47.6 AV | 54.0 | -6.4 | 1.45 V | 158 | 28.4 | 19.2 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 134 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *5670.00 | 112.3 PK | | | 1.91 H | 294 | 72.0 | 40.3 |
| 2 | *5670.00 | 102.9 AV | | | 1.91 H | 294 | 62.6 | 40.3 |
| 3 | #5725.00 | 57.8 PK | 74.0 | -16.2 | 1.92 H | 290 | 50.4 | 7.4 |
| 4 | #5725.00 | 51.5 AV | 54.0 | -2.5 | 1.92 H | 290 | 44.1 | 7.4 |
| 5 | 11340.00 | 60.1 PK | 74.0 | -13.9 | 1.82 H | 85 | 40.9 | 19.2 |
| 6 | 11340.00 | 47.6 AV | 54.0 | -6.4 | 1.82 H | 85 | 28.4 | 19.2 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *5670.00 | 112.3 PK | | | 2.65 V | 330 | 72.0 | 40.3 |
| 2 | *5670.00 | 102.5 AV | | | 2.65 V | 330 | 62.2 | 40.3 |
| 3 | #5725.00 | 68.2 PK | 74.0 | -5.8 | 2.07 V | 339 | 60.8 | 7.4 |
| 4 | #5725.00 | 52.5 AV | 54.0 | -1.5 | 2.07 V | 339 | 45.1 | 7.4 |
| 5 | 11340.00 | 60.5 PK | 74.0 | -13.5 | 1.37 V | 264 | 41.3 | 19.2 |
| 6 | 11340.00 | 47.5 AV | 54.0 | -6.5 | 1.37 V | 264 | 28.3 | 19.2 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 58 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5290.00 | 105.6 PK | | | 1.00 H | 280 | 65.9 | 39.7 |
| 2 | *5290.00 | 95.6 AV | | | 1.00 H | 280 | 55.9 | 39.7 |
| 3 | 5350.00 | 64.4 PK | 74.0 | -9.6 | 1.75 H | 272 | 57.9 | 6.5 |
| 4 | 5350.00 | 52.0 AV | 54.0 | -2.0 | 1.75 H | 272 | 45.5 | 6.5 |
| 5 | #10580.00 | 60.8 PK | 74.0 | -13.2 | 1.66 H | 247 | 41.8 | 19.0 |
| 6 | #10580.00 | 47.8 AV | 54.0 | -6.2 | 1.66 H | 247 | 28.8 | 19.0 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5290.00 | 106.2 PK | | | 2.74 V | 341 | 66.5 | 39.7 |
| 2 | *5290.00 | 96.5 AV | | | 2.74 V | 341 | 56.8 | 39.7 |
| 3 | 5350.00 | 64.5 PK | 74.0 | -9.5 | 2.55 V | 347 | 58.0 | 6.5 |
| 4 | 5350.00 | 52.6 AV | 54.0 | -1.4 | 2.55 V | 347 | 46.1 | 6.5 |
| 5 | #10580.00 | 60.9 PK | 74.0 | -13.1 | 1.97 V | 236 | 41.9 | 19.0 |
| 6 | #10580.00 | 47.9 AV | 54.0 | -6.1 | 1.97 V | 236 | 28.9 | 19.0 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 106 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 64.1 PK | 74.0 | -9.9 | 1.31 H | 285 | 57.2 | 6.9 |
| 2 | 5460.00 | 50.0 PK | 54.0 | -4.0 | 1.31 H | 285 | 43.1 | 6.9 |
| 3 | #5470.00 | 64.4 AV | 74.0 | -9.6 | 1.31 H | 289 | 57.5 | 6.9 |
| 4 | #5470.00 | 51.3 AV | 54.0 | -2.7 | 1.31 H | 289 | 44.4 | 6.9 |
| 5 | *5530.00 | 106.8 PK | | | 1.00 H | 290 | 66.6 | 40.2 |
| 6 | *5530.00 | 97.5 AV | | | 1.00 H | 290 | 57.3 | 40.2 |
| 7 | 11060.00 | 61.2 PK | 74.0 | -12.8 | 1.66 H | 258 | 41.7 | 19.5 |
| 8 | 11060.00 | 47.8 AV | 54.0 | -6.2 | 1.66 H | 258 | 28.3 | 19.5 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 65.5 PK | 74.0 | -8.5 | 2.45 V | 350 | 58.6 | 6.9 |
| 2 | 5460.00 | 52.0 AV | 54.0 | -2.0 | 2.45 V | 350 | 45.1 | 6.9 |
| 3 | #5470.00 | 67.4 PK | 74.0 | -6.6 | 2.46 V | 341 | 60.5 | 6.9 |
| 4 | #5470.00 | 52.7 AV | 54.0 | -1.3 | 2.46 V | 341 | 45.8 | 6.9 |
| 5 | *5530.00 | 107.1 PK | | | 2.11 V | 346 | 66.9 | 40.2 |
| 6 | *5530.00 | 97.2 AV | | | 2.11 V | 346 | 57.0 | 40.2 |
| 7 | 11060.00 | 61.1 PK | 74.0 | -12.9 | 2.33 V | 278 | 41.6 | 19.5 |
| 8 | 11060.00 | 48.0 AV | 54.0 | -6.0 | 2.33 V | 278 | 28.5 | 19.5 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Radio 2: Beamforming Mode

802.11n (HT20)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 57.7 PK | 74.0 | -16.3 | 1.39 H | 259 | 51.7 | 6.0 |
| 2 | 5150.00 | 44.6 AV | 54.0 | -9.4 | 1.39 H | 259 | 38.6 | 6.0 |
| 3 | *5260.00 | 116.4 PK | | | 1.41 H | 292 | 76.8 | 39.6 |
| 4 | *5260.00 | 104.0 AV | | | 1.41 H | 292 | 64.4 | 39.6 |
| 5 | #10520.00 | 59.1 PK | 74.0 | -14.9 | 2.65 H | 129 | 40.2 | 18.9 |
| 6 | #10520.00 | 46.8 AV | 54.0 | -7.2 | 2.65 H | 129 | 27.9 | 18.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 56.3 PK | 74.0 | -17.7 | 1.58 V | 317 | 50.3 | 6.0 |
| 2 | 5150.00 | 43.4 AV | 54.0 | -10.6 | 1.58 V | 317 | 37.4 | 6.0 |
| 3 | *5260.00 | 117.8 PK | | | 2.69 V | 345 | 78.2 | 39.6 |
| 4 | *5260.00 | 105.2 AV | | | 2.69 V | 345 | 65.6 | 39.6 |
| 5 | #10520.00 | 60.0 PK | 74.0 | -14.0 | 1.29 V | 118 | 41.1 | 18.9 |
| 6 | #10520.00 | 46.5 AV | 54.0 | -7.5 | 1.29 V | 118 | 27.6 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|-------------------|--------------|
| CHANNEL | TX Channel 60 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5300.00 | 115.7 PK | | | 1.74 H | 275 | 76.0 | 39.7 |
| 2 | *5300.00 | 103.4 AV | | | 1.74 H | 275 | 63.7 | 39.7 |
| 3 | 10600.00 | 59.4 PK | 74.0 | -14.6 | 1.69 H | 221 | 40.5 | 18.9 |
| 4 | 10600.00 | 46.8 AV | 54.0 | -7.2 | 1.69 H | 221 | 27.9 | 18.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5300.00 | 117.4 PK | | | 2.67 V | 333 | 77.7 | 39.7 |
| 2 | *5300.00 | 107.1 AV | | | 2.67 V | 333 | 67.4 | 39.7 |
| 3 | 10600.00 | 59.7 PK | 74.0 | -14.3 | 2.21 V | 198 | 40.8 | 18.9 |
| 4 | 10600.00 | 46.5 AV | 54.0 | -7.5 | 2.21 V | 198 | 27.6 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 64 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 115.1 PK | | | 1.85 H | 280 | 75.4 | 39.7 |
| 2 | *5320.00 | 102.3 AV | | | 1.85 H | 280 | 62.6 | 39.7 |
| 3 | 5350.00 | 68.5 PK | 74.0 | -5.5 | 1.91 H | 284 | 62.0 | 6.5 |
| 4 | 5350.00 | 48.4 AV | 54.0 | -5.6 | 1.91 H | 284 | 41.9 | 6.5 |
| 5 | 10640.00 | 58.9 PK | 74.0 | -15.1 | 2.87 H | 204 | 40.1 | 18.8 |
| 6 | 10640.00 | 46.3 AV | 54.0 | -7.7 | 2.87 H | 204 | 27.5 | 18.8 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 114.7 PK | | | 2.95 V | 308 | 75.0 | 39.7 |
| 2 | *5320.00 | 101.9 AV | | | 2.95 V | 308 | 62.2 | 39.7 |
| 3 | 5350.00 | 66.1 PK | 74.0 | -7.9 | 2.63 V | 336 | 59.6 | 6.5 |
| 4 | 5350.00 | 48.2 AV | 54.0 | -5.8 | 2.63 V | 336 | 41.7 | 6.5 |
| 5 | 10640.00 | 58.8 PK | 74.0 | -15.2 | 1.19 V | 158 | 40.0 | 18.8 |
| 6 | 10640.00 | 46.2 AV | 54.0 | -7.8 | 1.19 V | 158 | 27.4 | 18.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 100 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 59.2 PK | 74.0 | -14.8 | 1.17 H | 288 | 52.3 | 6.9 |
| 2 | 5460.00 | 46.2 AV | 54.0 | -7.8 | 1.17 H | 288 | 39.3 | 6.9 |
| 3 | #5470.00 | 71.8 PK | 74.0 | -2.2 | 1.28 H | 279 | 64.9 | 6.9 |
| 4 | #5470.00 | 48.6 AV | 54.0 | -5.4 | 1.28 H | 279 | 41.7 | 6.9 |
| 5 | *5500.00 | 117.6 PK | | | 1.00 H | 278 | 77.4 | 40.2 |
| 6 | *5500.00 | 104.5 AV | | | 1.00 H | 278 | 64.3 | 40.2 |
| 7 | 11000.00 | 60.9 PK | 74.0 | -13.1 | 1.35 H | 164 | 41.0 | 19.9 |
| 8 | 11000.00 | 47.7 AV | 54.0 | -6.3 | 1.35 H | 164 | 27.8 | 19.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 47.4 PK | 74.0 | -26.6 | 1.77 V | 198 | 40.5 | 6.9 |
| 2 | 5460.00 | 44.7 AV | 54.0 | -9.3 | 1.77 V | 198 | 37.8 | 6.9 |
| 3 | #5470.00 | 57.6 PK | 74.0 | -16.4 | 1.82 V | 203 | 50.7 | 6.9 |
| 4 | #5470.00 | 45.2 AV | 54.0 | -8.8 | 1.82 V | 203 | 38.3 | 6.9 |
| 5 | *5500.00 | 115.7 PK | | | 2.39 V | 342 | 75.5 | 40.2 |
| 6 | *5500.00 | 103.3 AV | | | 2.39 V | 342 | 63.1 | 40.2 |
| 7 | 11000.00 | 61.1 PK | 74.0 | -12.9 | 2.36 V | 111 | 41.2 | 19.9 |
| 8 | 11000.00 | 47.8 AV | 54.0 | -6.2 | 2.36 V | 111 | 27.9 | 19.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 116 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 112.3 PK | | | 1.70 H | 297 | 72.0 | 40.3 |
| 2 | *5580.00 | 98.9 AV | | | 1.70 H | 297 | 58.6 | 40.3 |
| 3 | 11160.00 | 60.6 PK | 74.0 | -13.4 | 1.98 H | 336 | 41.2 | 19.4 |
| 4 | 11160.00 | 47.3 AV | 54.0 | -6.7 | 1.98 H | 336 | 27.9 | 19.4 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 118.7 PK | | | 2.25 V | 333 | 78.4 | 40.3 |
| 2 | *5580.00 | 106.4 AV | | | 2.25 V | 333 | 66.1 | 40.3 |
| 3 | 11160.00 | 59.9 PK | 74.0 | -14.1 | 1.69 V | 215 | 40.5 | 19.4 |
| 4 | 11160.00 | 46.8 AV | 54.0 | -7.2 | 1.69 V | 215 | 27.4 | 19.4 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 140 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 113.6 PK | | | 1.86 H | 259 | 73.2 | 40.4 |
| 2 | *5700.00 | 101.6 AV | | | 1.86 H | 259 | 61.2 | 40.4 |
| 3 | #5725.00 | 67.5 PK | 74.0 | -6.5 | 1.87 H | 296 | 60.1 | 7.4 |
| 4 | #5725.00 | 48.6 AV | 54.0 | -5.4 | 1.87 H | 296 | 41.2 | 7.4 |
| 5 | 11400.00 | 60.6 PK | 74.0 | -13.4 | 1.97 H | 95 | 41.3 | 19.3 |
| 6 | 11400.00 | 47.7 AV | 54.0 | -6.3 | 1.97 H | 95 | 28.4 | 19.3 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 114.3 PK | | | 2.34 V | 340 | 73.9 | 40.4 |
| 2 | *5700.00 | 100.8 AV | | | 2.34 V | 340 | 60.4 | 40.4 |
| 3 | #5725.00 | 72.5 PK | 74.0 | -1.5 | 2.24 V | 347 | 65.1 | 7.4 |
| 4 | #5725.00 | 50.8 AV | 54.0 | -3.2 | 2.24 V | 347 | 43.4 | 7.4 |
| 5 | 11400.00 | 60.5 PK | 74.0 | -13.5 | 2.36 V | 300 | 41.7 | 18.8 |
| 6 | 11400.00 | 47.9 AV | 54.0 | -6.1 | 2.36 V | 300 | 29.1 | 18.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

| | | | |
|-----------------|---------------|----------------------|---------------------------|
| CHANNEL | TX Channel 54 | DETECTOR FUNCTION | Peak (PK) Average (AV) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 56.9 PK | 74.0 | -17.1 | 1.69 H | 224 | 50.9 | 6.0 |
| 2 | 5150.00 | 44.5 AV | 54.0 | -9.5 | 1.69 H | 224 | 38.5 | 6.0 |
| 3 | *5270.00 | 114.7 PK | | | 1.01 H | 274 | 75.1 | 39.6 |
| 4 | *5270.00 | 102.3 AV | | | 1.01 H | 274 | 62.7 | 39.6 |
| 5 | #10540.00 | 60.1 PK | 74.0 | -13.9 | 2.69 H | 146 | 41.1 | 19.0 |
| 6 | #10540.00 | 47.1 AV | 54.0 | -6.9 | 2.69 H | 146 | 28.1 | 19.0 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 56.3 PK | 74.0 | -17.7 | 1.55 V | 239 | 50.3 | 6.0 |
| 2 | 5150.00 | 43.4 AV | 54.0 | -10.6 | 1.55 V | 239 | 37.4 | 6.0 |
| 3 | *5270.00 | 115.7 PK | | | 2.47 V | 348 | 76.1 | 39.6 |
| 4 | *5270.00 | 103.4 AV | | | 2.47 V | 348 | 63.8 | 39.6 |
| 5 | #10540.00 | 59.6 PK | 74.0 | -14.4 | 1.29 V | 224 | 40.6 | 19.0 |
| 6 | #10540.00 | 46.8 AV | 54.0 | -7.2 | 1.29 V | 224 | 27.8 | 19.0 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 62 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *5310.00 | 110.6 PK | | | 1.73 H | 285 | 70.9 | 39.7 |
| 2 | *5310.00 | 97.4 AV | | | 1.73 H | 285 | 57.7 | 39.7 |
| 3 | 5350.00 | 69.4 PK | 74.0 | -4.6 | 1.70 H | 273 | 62.9 | 6.5 |
| 4 | 5350.00 | 48.0 AV | 54.0 | -6.0 | 1.70 H | 273 | 41.5 | 6.5 |
| 5 | 10620.00 | 59.4 PK | 74.0 | -14.6 | 1.99 H | 146 | 40.5 | 18.9 |
| 6 | 10620.00 | 46.8 AV | 54.0 | -7.2 | 1.99 H | 146 | 27.9 | 18.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *5310.00 | 111.1 PK | | | 2.80 V | 332 | 71.4 | 39.7 |
| 2 | *5310.00 | 98.6 AV | | | 2.80 V | 332 | 58.9 | 39.7 |
| 3 | 5350.00 | 72.6 PK | 74.0 | -1.4 | 2.66 V | 319 | 66.1 | 6.5 |
| 4 | 5350.00 | 50.9 AV | 54.0 | -3.1 | 2.66 V | 319 | 44.4 | 6.5 |
| 5 | 10620.00 | 59.6 PK | 74.0 | -14.4 | 1.49 V | 268 | 40.7 | 18.9 |
| 6 | 10620.00 | 46.6 AV | 54.0 | -7.4 | 1.49 V | 268 | 27.7 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 102 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 63.8 PK | 74.0 | -10.2 | 2.46 H | 288 | 56.9 | 6.9 |
| 2 | 5460.00 | 45.4 AV | 54.0 | -8.6 | 2.46 H | 288 | 38.5 | 6.9 |
| 3 | #5470.00 | 71.8 PK | 74.0 | -2.2 | 2.39 H | 278 | 64.9 | 6.9 |
| 4 | #5470.00 | 45.6 AV | 54.0 | -8.4 | 2.39 H | 278 | 38.7 | 6.9 |
| 5 | *5510.00 | 108.0 PK | | | 1.90 H | 42 | 67.8 | 40.2 |
| 6 | *5510.00 | 96.3 AV | | | 1.90 H | 42 | 56.1 | 40.2 |
| 7 | 11020.00 | 60.0 PK | 74.0 | -14.0 | 1.38 H | 94 | 40.2 | 19.8 |
| 8 | 11020.00 | 46.8 AV | 54.0 | -7.2 | 1.38 H | 94 | 27.0 | 19.8 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 67.7 PK | 74.0 | -6.3 | 2.02 V | 204 | 60.8 | 6.9 |
| 2 | 5460.00 | 44.8 AV | 54.0 | -9.2 | 2.02 V | 204 | 37.9 | 6.9 |
| 3 | #5470.00 | 72.0 PK | 74.0 | -2.0 | 1.78 V | 225 | 65.1 | 6.9 |
| 4 | #5470.00 | 48.1 AV | 54.0 | -5.9 | 1.78 V | 225 | 41.2 | 6.9 |
| 5 | *5510.00 | 110.7 PK | | | 2.48 V | 342 | 70.5 | 40.2 |
| 6 | *5510.00 | 97.0 AV | | | 2.48 V | 342 | 56.8 | 40.2 |
| 7 | 11020.00 | 60.2 PK | 74.0 | -13.8 | 1.43 V | 255 | 40.4 | 19.8 |
| 8 | 11020.00 | 47.4 AV | 54.0 | -6.6 | 1.43 V | 255 | 27.6 | 19.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 110 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 68.3 PK | 74.0 | -5.7 | 1.33 H | 295 | 61.4 | 6.9 |
| 2 | #5470.00 | 46.7 AV | 54.0 | -7.3 | 1.33 H | 295 | 39.8 | 6.9 |
| 3 | *5550.00 | 113.6 PK | | | 1.33 H | 295 | 73.4 | 40.2 |
| 4 | *5550.00 | 101.6 AV | | | 1.33 H | 295 | 61.4 | 40.2 |
| 5 | 11100.00 | 59.6 PK | 74.0 | -14.4 | 1.68 H | 216 | 40.4 | 19.2 |
| 6 | 11100.00 | 46.9 AV | 54.0 | -7.1 | 1.68 H | 216 | 27.7 | 19.2 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 72.3 PK | 74.0 | -1.7 | 2.34 V | 339 | 65.4 | 6.9 |
| 2 | #5470.00 | 47.0 AV | 54.0 | -7.0 | 2.34 V | 339 | 40.1 | 6.9 |
| 3 | *5550.00 | 113.5 PK | | | 2.34 V | 339 | 73.3 | 40.2 |
| 4 | *5550.00 | 101.5 AV | | | 2.34 V | 339 | 61.3 | 40.2 |
| 5 | 11100.00 | 59.9 PK | 74.0 | -14.1 | 1.83 V | 219 | 40.7 | 19.2 |
| 6 | 11100.00 | 46.7 AV | 54.0 | -7.3 | 1.83 V | 219 | 27.5 | 19.2 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 134 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5670.00 | 113.0 PK | | | 1.74 H | 279 | 72.7 | 40.3 |
| 2 | *5670.00 | 99.7 AV | | | 1.74 H | 279 | 59.4 | 40.3 |
| 3 | #5725.00 | 72.2 PK | 74.0 | -1.8 | 1.66 H | 289 | 64.8 | 7.4 |
| 4 | #5725.00 | 46.5 AV | 54.0 | -7.5 | 1.66 H | 289 | 39.1 | 7.4 |
| 5 | 11340.00 | 59.7 PK | 74.0 | -14.3 | 1.43 H | 233 | 40.5 | 19.2 |
| 6 | 11340.00 | 47.0 AV | 54.0 | -7.0 | 1.43 H | 233 | 27.8 | 19.2 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5670.00 | 110.5 PK | | | 2.19 V | 6 | 70.2 | 40.3 |
| 2 | *5670.00 | 98.6 AV | | | 2.19 V | 6 | 58.3 | 40.3 |
| 3 | #5725.00 | 71.8 PK | 74.0 | -2.2 | 2.14 V | 338 | 64.4 | 7.4 |
| 4 | #5725.00 | 47.3 AV | 54.0 | -6.7 | 2.14 V | 338 | 39.9 | 7.4 |
| 5 | 11340.00 | 59.7 PK | 74.0 | -14.3 | 1.64 V | 53 | 40.5 | 19.2 |
| 6 | 11340.00 | 47.1 AV | 54.0 | -6.9 | 1.64 V | 53 | 27.9 | 19.2 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 58 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5290.00 | 108.0 PK | | | 1.16 H | 290 | 68.3 | 39.7 |
| 2 | *5290.00 | 96.4 AV | | | 1.16 H | 290 | 56.7 | 39.7 |
| 3 | 5350.00 | 67.8 PK | 74.0 | -6.2 | 1.08 H | 270 | 61.3 | 6.5 |
| 4 | 5350.00 | 49.3 AV | 54.0 | -4.7 | 1.08 H | 270 | 42.8 | 6.5 |
| 5 | #10580.00 | 60.7 PK | 74.0 | -13.3 | 1.69 H | 55 | 41.7 | 19.0 |
| 6 | #10580.00 | 47.0 AV | 54.0 | -7.0 | 1.69 H | 55 | 28.0 | 19.0 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5290.00 | 107.7 PK | | | 2.35 V | 343 | 68.0 | 39.7 |
| 2 | *5290.00 | 96.3 AV | | | 2.35 V | 343 | 56.6 | 39.7 |
| 3 | 5350.00 | 70.2 PK | 74.0 | -3.8 | 2.36 V | 350 | 63.7 | 6.5 |
| 4 | 5350.00 | 49.4 AV | 54.0 | -4.6 | 2.36 V | 350 | 42.9 | 6.5 |
| 5 | #10580.00 | 60.2 PK | 74.0 | -13.8 | 2.11 V | 146 | 41.2 | 19.0 |
| 6 | #10580.00 | 47.1 AV | 54.0 | -6.9 | 2.11 V | 146 | 28.1 | 19.0 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 106 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 63.6 PK | 74.0 | -10.4 | 1.20 H | 275 | 56.7 | 6.9 |
| 2 | 5460.00 | 47.6 AV | 54.0 | -6.4 | 1.20 H | 275 | 40.7 | 6.9 |
| 3 | #5470.00 | 70.0 PK | 74.0 | -4.0 | 1.12 H | 290 | 63.1 | 6.9 |
| 4 | #5470.00 | 49.2 AV | 54.0 | -4.8 | 1.12 H | 290 | 42.3 | 6.9 |
| 5 | *5530.00 | 107.0 PK | | | 1.14 H | 282 | 66.8 | 40.2 |
| 6 | *5530.00 | 95.5 AV | | | 1.14 H | 282 | 55.3 | 40.2 |
| 7 | 11060.00 | 60.4 PK | 74.0 | -13.6 | 1.44 H | 284 | 40.9 | 19.5 |
| 8 | 11060.00 | 47.3 AV | 54.0 | -6.7 | 1.44 H | 284 | 27.8 | 19.5 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 66.5 PK | 74.0 | -7.5 | 2.30 V | 341 | 59.6 | 6.9 |
| 2 | 5460.00 | 50.8 AV | 54.0 | -3.2 | 2.30 V | 341 | 43.9 | 6.9 |
| 3 | #5470.00 | 72.0 PK | 74.0 | -2.0 | 2.31 V | 335 | 65.1 | 6.9 |
| 4 | #5470.00 | 50.0 AV | 54.0 | -4.0 | 2.31 V | 335 | 43.1 | 6.9 |
| 5 | *5530.00 | 107.0 PK | | | 2.17 V | 345 | 66.8 | 40.2 |
| 6 | *5530.00 | 94.8 AV | | | 2.17 V | 345 | 54.6 | 40.2 |
| 7 | 11060.00 | 60.2 PK | 74.0 | -13.8 | 1.86 V | 221 | 40.7 | 19.5 |
| 8 | 11060.00 | 46.9 AV | 54.0 | -7.1 | 1.86 V | 221 | 27.4 | 19.5 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Radio 3: CDD Mode

802.11a

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 56.5 PK | 74.0 | -17.5 | 1.12 H | 98 | 50.5 | 6.0 |
| 2 | 5150.00 | 43.9 AV | 54.0 | -10.1 | 1.12 H | 98 | 37.9 | 6.0 |
| 3 | *5260.00 | 105.9 PK | | | 1.07 H | 104 | 66.3 | 39.6 |
| 4 | *5260.00 | 95.9 AV | | | 1.07 H | 104 | 56.3 | 39.6 |
| 5 | #10520.00 | 60.6 PK | 74.0 | -13.4 | 1.98 H | 320 | 41.7 | 18.9 |
| 6 | #10520.00 | 47.3 AV | 54.0 | -6.7 | 1.98 H | 320 | 28.4 | 18.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 57.4 PK | 74.0 | -16.6 | 2.08 V | 53 | 51.4 | 6.0 |
| 2 | 5150.00 | 44.2 AV | 54.0 | -9.8 | 2.08 V | 53 | 38.2 | 6.0 |
| 3 | *5260.00 | 114.8 PK | | | 2.24 V | 43 | 75.2 | 39.6 |
| 4 | *5260.00 | 104.6 AV | | | 2.24 V | 43 | 65.0 | 39.6 |
| 5 | #10520.00 | 61.3 PK | 74.0 | -12.7 | 1.65 V | 188 | 42.4 | 18.9 |
| 6 | #10520.00 | 47.0 AV | 54.0 | -7.0 | 1.65 V | 188 | 28.1 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|-------------------|--------------|
| CHANNEL | TX Channel 60 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5300.00 | 105.3 PK | | | 1.04 H | 106 | 65.6 | 39.7 |
| 2 | *5300.00 | 94.7 AV | | | 1.04 H | 106 | 55.0 | 39.7 |
| 3 | 10600.00 | 60.9 PK | 74.0 | -13.1 | 2.31 H | 257 | 42.0 | 18.9 |
| 4 | 10600.00 | 47.2 AV | 54.0 | -6.8 | 2.31 H | 257 | 28.3 | 18.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5300.00 | 113.9 PK | | | 1.99 V | 41 | 74.2 | 39.7 |
| 2 | *5300.00 | 103.6 AV | | | 1.99 V | 41 | 63.9 | 39.7 |
| 3 | 10600.00 | 60.6 PK | 74.0 | -13.4 | 2.01 V | 300 | 41.7 | 18.9 |
| 4 | 10600.00 | 47.3 AV | 54.0 | -6.7 | 2.01 V | 300 | 28.4 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 64 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *5320.00 | 105.0 PK | | | 1.02 H | 105 | 65.3 | 39.7 |
| 2 | *5320.00 | 94.7 AV | | | 1.02 H | 105 | 55.0 | 39.7 |
| 3 | 5350.00 | 60.1 PK | 74.0 | -13.9 | 1.01 H | 106 | 53.6 | 6.5 |
| 4 | 5350.00 | 46.5 AV | 54.0 | -7.5 | 1.01 H | 106 | 40.0 | 6.5 |
| 5 | 10640.00 | 60.8 PK | 74.0 | -13.2 | 1.65 H | 149 | 41.9 | 18.9 |
| 6 | 10640.00 | 47.0 AV | 54.0 | -7.0 | 1.65 H | 149 | 28.1 | 18.9 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *5320.00 | 113.6 PK | | | 2.04 V | 44 | 73.9 | 39.7 |
| 2 | *5320.00 | 102.9 AV | | | 2.04 V | 44 | 63.2 | 39.7 |
| 3 | 5350.00 | 65.9 PK | 74.0 | -8.1 | 2.27 V | 46 | 59.4 | 6.5 |
| 4 | 5350.00 | 52.3 AV | 54.0 | -1.7 | 2.27 V | 46 | 45.8 | 6.5 |
| 5 | 10640.00 | 60.0 PK | 74.0 | -14.0 | 2.54 V | 165 | 41.2 | 18.8 |
| 6 | 10640.00 | 47.0 AV | 54.0 | -7.0 | 2.54 V | 165 | 28.2 | 18.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 100 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 57.4 PK | 74.0 | -16.6 | 2.91 H | 31 | 50.5 | 6.9 |
| 2 | 5460.00 | 46.6 AV | 54.0 | -7.4 | 2.91 H | 31 | 39.7 | 6.9 |
| 3 | #5470.00 | 60.5 PK | 74.0 | -13.5 | 2.88 H | 30 | 53.6 | 6.9 |
| 4 | #5470.00 | 47.7 AV | 54.0 | -6.3 | 2.88 H | 30 | 40.8 | 6.9 |
| 5 | *5500.00 | 103.5 PK | | | 2.90 H | 28 | 63.3 | 40.2 |
| 6 | *5500.00 | 93.5 AV | | | 2.90 H | 28 | 53.3 | 40.2 |
| 7 | 11000.00 | 60.6 PK | 74.0 | -13.4 | 1.90 H | 349 | 40.7 | 19.9 |
| 8 | 11000.00 | 47.5 AV | 54.0 | -6.5 | 1.90 H | 349 | 27.6 | 19.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 58.3 PK | 74.0 | -15.7 | 1.69 V | 46 | 51.4 | 6.9 |
| 2 | 5460.00 | 47.1 AV | 54.0 | -6.9 | 1.69 V | 46 | 40.2 | 6.9 |
| 3 | #5470.00 | 65.6 PK | 74.0 | -8.4 | 1.50 V | 44 | 58.7 | 6.9 |
| 4 | #5470.00 | 52.3 AV | 54.0 | -1.7 | 1.50 V | 44 | 45.4 | 6.9 |
| 5 | *5500.00 | 110.8 PK | | | 1.60 V | 40 | 70.6 | 40.2 |
| 6 | *5500.00 | 100.8 AV | | | 1.60 V | 40 | 60.6 | 40.2 |
| 7 | 11000.00 | 61.2 PK | 74.0 | -12.8 | 2.12 V | 345 | 41.3 | 19.9 |
| 8 | 11000.00 | 48.5 AV | 54.0 | -5.5 | 2.12 V | 345 | 28.6 | 19.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 116 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 106.2 PK | | | 2.89 H | 27 | 65.9 | 40.3 |
| 2 | *5580.00 | 96.2 AV | | | 2.89 H | 27 | 55.9 | 40.3 |
| 3 | 11160.00 | 60.1 PK | 74.0 | -13.9 | 1.99 H | 211 | 40.7 | 19.4 |
| 4 | 11160.00 | 47.4 AV | 54.0 | -6.6 | 1.99 H | 211 | 28.0 | 19.4 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 113.4 PK | | | 1.68 V | 46 | 73.1 | 40.3 |
| 2 | *5580.00 | 103.4 AV | | | 1.68 V | 46 | 63.1 | 40.3 |
| 3 | 11160.00 | 61.5 PK | 74.0 | -12.5 | 2.12 V | 346 | 42.1 | 19.4 |
| 4 | 11160.00 | 48.4 AV | 54.0 | -5.6 | 2.12 V | 346 | 29.0 | 19.4 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 140 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 104.8 PK | | | 2.80 H | 24 | 64.4 | 40.4 |
| 2 | *5700.00 | 94.4 AV | | | 2.80 H | 24 | 54.0 | 40.4 |
| 3 | #5725.00 | 60.8 PK | 74.0 | -13.2 | 3.06 H | 25 | 53.4 | 7.4 |
| 4 | #5725.00 | 48.6 AV | 54.0 | -5.4 | 3.06 H | 25 | 41.2 | 7.4 |
| 5 | 11400.00 | 59.8 PK | 74.0 | -14.2 | 2.33 H | 339 | 41.0 | 18.8 |
| 6 | 11400.00 | 46.7 AV | 54.0 | -7.3 | 2.33 H | 339 | 27.9 | 18.8 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 111.4 PK | | | 1.43 V | 51 | 71.0 | 40.4 |
| 2 | *5700.00 | 101.5 AV | | | 1.43 V | 51 | 61.1 | 40.4 |
| 3 | #5725.00 | 67.8 PK | 74.0 | -6.2 | 1.61 V | 49 | 60.4 | 7.4 |
| 4 | #5725.00 | 52.4 AV | 54.0 | -1.6 | 1.61 V | 49 | 45.0 | 7.4 |
| 5 | 11400.00 | 60.5 PK | 74.0 | -13.5 | 2.10 V | 101 | 41.7 | 18.8 |
| 6 | 11400.00 | 47.8 AV | 54.0 | -6.2 | 2.10 V | 101 | 29.0 | 18.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT20)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 56.1 PK | 74.0 | -17.9 | 1.20 H | 99 | 50.1 | 6.0 |
| 2 | 5150.00 | 44.8 AV | 54.0 | -9.2 | 1.20 H | 99 | 38.8 | 6.0 |
| 3 | *5260.00 | 104.9 PK | | | 1.00 H | 118 | 65.3 | 39.6 |
| 4 | *5260.00 | 95.3 AV | | | 1.00 H | 118 | 55.7 | 39.6 |
| 5 | #10520.00 | 59.9 PK | 74.0 | -14.1 | 1.89 H | 298 | 41.0 | 18.9 |
| 6 | #10520.00 | 47.0 AV | 54.0 | -7.0 | 1.89 H | 298 | 28.1 | 18.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 58.5 PK | 74.0 | -15.5 | 2.04 V | 0 | 52.5 | 6.0 |
| 2 | 5150.00 | 47.1 AV | 54.0 | -6.9 | 2.04 V | 0 | 41.1 | 6.0 |
| 3 | *5260.00 | 114.9 PK | | | 2.24 V | 41 | 75.3 | 39.6 |
| 4 | *5260.00 | 104.6 AV | | | 2.24 V | 41 | 65.0 | 39.6 |
| 5 | #10520.00 | 61.4 PK | 74.0 | -12.6 | 1.66 V | 307 | 42.5 | 18.9 |
| 6 | #10520.00 | 48.4 AV | 54.0 | -5.6 | 1.66 V | 307 | 29.5 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|-------------------|--------------|
| CHANNEL | TX Channel 60 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5300.00 | 105.0 PK | | | 1.11 H | 97 | 65.3 | 39.7 |
| 2 | *5300.00 | 94.7 AV | | | 1.11 H | 97 | 55.0 | 39.7 |
| 3 | 10600.00 | 60.4 PK | 74.0 | -13.6 | 1.46 H | 210 | 41.5 | 18.9 |
| 4 | 10600.00 | 47.7 AV | 54.0 | -6.3 | 1.46 H | 210 | 28.8 | 18.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *5300.00 | 113.3 PK | | | 2.26 V | 49 | 73.6 | 39.7 |
| 2 | *5300.00 | 103.0 AV | | | 2.26 V | 49 | 63.3 | 39.7 |
| 3 | 10600.00 | 61.1 PK | 74.0 | -12.9 | 1.59 V | 345 | 42.2 | 18.9 |
| 4 | 10600.00 | 48.3 AV | 54.0 | -5.7 | 1.59 V | 345 | 29.4 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 64 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 103.7 PK | | | 1.13 H | 103 | 64.0 | 39.7 |
| 2 | *5320.00 | 93.6 AV | | | 1.13 H | 103 | 53.9 | 39.7 |
| 3 | 5350.00 | 57.0 PK | 74.0 | -17.0 | 1.20 H | 100 | 50.5 | 6.5 |
| 4 | 5350.00 | 46.2 AV | 54.0 | -7.8 | 1.20 H | 100 | 39.7 | 6.5 |
| 5 | 10640.00 | 60.2 PK | 74.0 | -13.8 | 1.60 H | 204 | 41.4 | 18.8 |
| 6 | 10640.00 | 47.1 AV | 54.0 | -6.9 | 1.60 H | 204 | 28.3 | 18.8 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5320.00 | 112.0 PK | | | 1.94 V | 41 | 72.3 | 39.7 |
| 2 | *5320.00 | 101.9 AV | | | 1.94 V | 41 | 62.2 | 39.7 |
| 3 | 5350.00 | 66.5 PK | 74.0 | -7.5 | 2.24 V | 45 | 60.0 | 6.5 |
| 4 | 5350.00 | 52.4 AV | 54.0 | -1.6 | 2.24 V | 45 | 45.9 | 6.5 |
| 5 | 10640.00 | 60.7 PK | 74.0 | -13.3 | 1.76 V | 352 | 41.9 | 18.8 |
| 6 | 10640.00 | 47.8 AV | 54.0 | -6.2 | 1.76 V | 352 | 29.0 | 18.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 100 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 56.8 PK | 74.0 | -17.2 | 2.98 H | 37 | 49.9 | 6.9 |
| 2 | 5460.00 | 45.3 AV | 54.0 | -8.7 | 2.98 H | 37 | 38.4 | 6.9 |
| 3 | #5470.00 | 57.0 PK | 74.0 | -17.0 | 2.98 H | 37 | 50.1 | 6.9 |
| 4 | #5470.00 | 46.1 AV | 54.0 | -7.9 | 2.98 H | 37 | 39.2 | 6.9 |
| 5 | *5500.00 | 102.8 PK | | | 3.06 H | 29 | 62.6 | 40.2 |
| 6 | *5500.00 | 92.8 AV | | | 3.06 H | 29 | 52.6 | 40.2 |
| 7 | 11000.00 | 60.5 PK | 74.0 | -13.5 | 2.28 H | 313 | 40.6 | 19.9 |
| 8 | 11000.00 | 47.6 AV | 54.0 | -6.4 | 2.28 H | 313 | 27.7 | 19.9 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5460.00 | 57.5 PK | 74.0 | -16.5 | 1.50 V | 66 | 50.6 | 6.9 |
| 2 | 5460.00 | 46.8 AV | 54.0 | -7.2 | 1.50 V | 66 | 39.9 | 6.9 |
| 3 | #5470.00 | 64.6 PK | 74.0 | -9.4 | 1.60 V | 47 | 57.7 | 6.9 |
| 4 | #5470.00 | 52.3 AV | 54.0 | -1.7 | 1.60 V | 47 | 45.4 | 6.9 |
| 5 | *5500.00 | 110.5 PK | | | 1.31 V | 51 | 70.3 | 40.2 |
| 6 | *5500.00 | 100.2 AV | | | 1.31 V | 51 | 60.0 | 40.2 |
| 7 | 11000.00 | 60.3 PK | 74.0 | -13.7 | 1.89 V | 312 | 41.1 | 19.2 |
| 8 | 11000.00 | 47.5 AV | 54.0 | -6.5 | 1.89 V | 312 | 28.3 | 19.2 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 116 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 105.7 PK | | | 3.06 H | 25 | 65.4 | 40.3 |
| 2 | *5580.00 | 95.3 AV | | | 3.06 H | 25 | 55.0 | 40.3 |
| 3 | 11160.00 | 61.0 PK | 74.0 | -13.0 | 2.16 H | 346 | 41.6 | 19.4 |
| 4 | 11160.00 | 48.2 AV | 54.0 | -5.8 | 2.16 H | 346 | 28.8 | 19.4 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5580.00 | 112.9 PK | | | 1.45 V | 44 | 72.6 | 40.3 |
| 2 | *5580.00 | 102.9 AV | | | 1.45 V | 44 | 62.6 | 40.3 |
| 3 | 11160.00 | 61.6 PK | 74.0 | -12.4 | 2.02 V | 337 | 42.2 | 19.4 |
| 4 | 11160.00 | 48.7 AV | 54.0 | -5.3 | 2.02 V | 337 | 29.3 | 19.4 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 140 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 103.0 PK | | | 3.01 H | 29 | 62.6 | 40.4 |
| 2 | *5700.00 | 92.9 AV | | | 3.01 H | 29 | 52.5 | 40.4 |
| 3 | #5725.00 | 62.0 PK | 74.0 | -12.0 | 2.98 H | 22 | 54.6 | 7.4 |
| 4 | #5725.00 | 49.8 AV | 54.0 | -4.2 | 2.98 H | 22 | 42.4 | 7.4 |
| 5 | 11400.00 | 59.0 PK | 74.0 | -15.0 | 1.96 H | 325 | 40.2 | 18.8 |
| 6 | 11400.00 | 45.8 AV | 54.0 | -8.2 | 1.96 H | 325 | 27.0 | 18.8 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5700.00 | 109.5 PK | | | 1.54 V | 49 | 69.1 | 40.4 |
| 2 | *5700.00 | 99.3 AV | | | 1.54 V | 49 | 58.9 | 40.4 |
| 3 | #5725.00 | 68.5 PK | 74.0 | -5.5 | 1.31 V | 54 | 61.1 | 7.4 |
| 4 | #5725.00 | 52.3 AV | 54.0 | -1.7 | 1.31 V | 54 | 44.9 | 7.4 |
| 5 | 11400.00 | 60.0 PK | 74.0 | -14.0 | 2.04 V | 341 | 41.2 | 18.8 |
| 6 | 11400.00 | 47.2 AV | 54.0 | -6.8 | 2.04 V | 341 | 28.4 | 18.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11n (HT40)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 54 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5270.00 | 102.5 PK | | | 1.09 H | 104 | 62.9 | 39.6 |
| 2 | *5270.00 | 92.2 AV | | | 1.09 H | 104 | 52.6 | 39.6 |
| 3 | 5350.00 | 58.4 PK | 74.0 | -15.6 | 1.23 H | 111 | 51.9 | 6.5 |
| 4 | 5350.00 | 45.6 AV | 54.0 | -8.4 | 1.23 H | 111 | 39.1 | 6.5 |
| 5 | #10540.00 | 60.6 PK | 74.0 | -13.4 | 1.54 H | 189 | 41.6 | 19.0 |
| 6 | #10540.00 | 47.5 AV | 54.0 | -6.5 | 1.54 H | 189 | 28.5 | 19.0 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | *5270.00 | 111.2 PK | | | 2.31 V | 42 | 71.6 | 39.6 |
| 2 | *5270.00 | 101.0 AV | | | 2.31 V | 42 | 61.4 | 39.6 |
| 3 | 5350.00 | 67.2 PK | 74.0 | -6.8 | 2.31 V | 40 | 60.7 | 6.5 |
| 4 | 5350.00 | 51.6 AV | 54.0 | -2.4 | 2.31 V | 40 | 45.1 | 6.5 |
| 5 | #10540.00 | 60.7 PK | 74.0 | -13.3 | 1.59 V | 19 | 41.7 | 19.0 |
| 6 | #10540.00 | 47.8 AV | 54.0 | -6.2 | 1.59 V | 19 | 28.8 | 19.0 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 62 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *5310.00 | 94.9 PK | | | 1.08 H | 103 | 55.2 | 39.7 |
| 2 | *5310.00 | 85.4 AV | | | 1.08 H | 103 | 45.7 | 39.7 |
| 3 | 5350.00 | 59.0 PK | 74.0 | -15.0 | 1.10 H | 123 | 52.5 | 6.5 |
| 4 | 5350.00 | 46.9 AV | 54.0 | -7.1 | 1.10 H | 123 | 40.4 | 6.5 |
| 5 | 10620.00 | 59.4 PK | 74.0 | -14.6 | 1.50 H | 200 | 40.5 | 18.9 |
| 6 | 10620.00 | 46.1 AV | 54.0 | -7.9 | 1.50 H | 200 | 27.2 | 18.9 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *5310.00 | 103.5 PK | | | 2.00 V | 44 | 63.8 | 39.7 |
| 2 | *5310.00 | 93.6 AV | | | 2.00 V | 44 | 53.9 | 39.7 |
| 3 | 5350.00 | 64.2 PK | 74.0 | -9.8 | 2.31 V | 43 | 57.7 | 6.5 |
| 4 | 5350.00 | 52.9 AV | 54.0 | -1.1 | 2.31 V | 43 | 46.4 | 6.5 |
| 5 | 10620.00 | 60.2 PK | 74.0 | -13.8 | 1.71 V | 210 | 41.3 | 18.9 |
| 6 | 10620.00 | 47.5 AV | 54.0 | -6.5 | 1.71 V | 210 | 28.6 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 102 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 57.1 PK | 74.0 | -16.9 | 2.85 H | 27 | 50.2 | 6.9 |
| 2 | 5460.00 | 46.4 AV | 54.0 | -7.6 | 2.85 H | 27 | 39.5 | 6.9 |
| 3 | #5470.00 | 59.3 PK | 74.0 | -14.7 | 2.85 H | 27 | 52.4 | 6.9 |
| 4 | #5470.00 | 47.7 AV | 54.0 | -6.3 | 2.85 H | 27 | 40.8 | 6.9 |
| 5 | *5510.00 | 96.3 PK | | | 3.05 H | 32 | 56.1 | 40.2 |
| 6 | *5510.00 | 86.3 AV | | | 3.05 H | 32 | 46.1 | 40.2 |
| 7 | 11020.00 | 60.4 PK | 74.0 | -13.6 | 2.25 H | 232 | 40.6 | 19.8 |
| 8 | 11020.00 | 47.2 AV | 54.0 | -6.8 | 2.25 H | 232 | 27.4 | 19.8 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 59.0 PK | 74.0 | -15.0 | 1.51 V | 49 | 52.1 | 6.9 |
| 2 | 5460.00 | 47.5 AV | 54.0 | -6.5 | 1.51 V | 49 | 40.6 | 6.9 |
| 3 | #5470.00 | 65.8 PK | 74.0 | -8.2 | 1.31 V | 51 | 58.9 | 6.9 |
| 4 | #5470.00 | 52.4 AV | 54.0 | -1.6 | 1.31 V | 51 | 45.5 | 6.9 |
| 5 | *5510.00 | 103.4 PK | | | 1.44 V | 52 | 63.2 | 40.2 |
| 6 | *5510.00 | 93.6 AV | | | 1.44 V | 52 | 53.4 | 40.2 |
| 7 | 11020.00 | 61.1 PK | 74.0 | -12.9 | 1.92 V | 359 | 41.3 | 19.8 |
| 8 | 11020.00 | 47.9 AV | 54.0 | -6.1 | 1.92 V | 359 | 28.1 | 19.8 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 110 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 61.2 PK | 74.0 | -12.8 | 3.20 H | 106 | 54.3 | 6.9 |
| 2 | #5470.00 | 48.0 AV | 54.0 | -6.0 | 3.20 H | 106 | 41.1 | 6.9 |
| 3 | *5550.00 | 102.5 PK | | | 3.02 H | 27 | 62.3 | 40.2 |
| 4 | *5550.00 | 92.7 AV | | | 3.02 H | 27 | 52.5 | 40.2 |
| 5 | 11100.00 | 60.7 PK | 74.0 | -13.3 | 2.56 H | 279 | 41.5 | 19.2 |
| 6 | 11100.00 | 48.0 AV | 54.0 | -6.0 | 2.56 H | 279 | 28.8 | 19.2 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | #5470.00 | 63.4 PK | 74.0 | -10.6 | 1.52 V | 356 | 56.5 | 6.9 |
| 2 | #5470.00 | 52.3 AV | 54.0 | -1.7 | 1.52 V | 356 | 45.4 | 6.9 |
| 3 | *5550.00 | 109.8 PK | | | 1.32 V | 47 | 69.6 | 40.2 |
| 4 | *5550.00 | 99.7 AV | | | 1.32 V | 47 | 59.5 | 40.2 |
| 5 | 11100.00 | 61.0 PK | 74.0 | -13.0 | 1.96 V | 279 | 41.8 | 19.2 |
| 6 | 11100.00 | 48.4 AV | 54.0 | -5.6 | 1.96 V | 279 | 29.2 | 19.2 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 134 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *5670.00 | 100.9 PK | | | 2.79 H | 33 | 60.6 | 40.3 |
| 2 | *5670.00 | 90.8 AV | | | 2.79 H | 33 | 50.5 | 40.3 |
| 3 | #5725.00 | 58.9 PK | 74.0 | -15.1 | 2.67 H | 27 | 51.5 | 7.4 |
| 4 | #5725.00 | 47.5 AV | 54.0 | -6.5 | 2.67 H | 27 | 40.1 | 7.4 |
| 5 | 11340.00 | 60.1 PK | 74.0 | -13.9 | 2.22 H | 329 | 40.6 | 19.5 |
| 6 | 11340.00 | 47.2 AV | 54.0 | -6.8 | 2.22 H | 329 | 27.7 | 19.5 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | *5670.00 | 109.0 PK | | | 1.41 V | 50 | 68.7 | 40.3 |
| 2 | *5670.00 | 98.9 AV | | | 1.41 V | 50 | 58.6 | 40.3 |
| 3 | #5725.00 | 67.6 PK | 74.0 | -6.4 | 1.46 V | 51 | 60.2 | 7.4 |
| 4 | #5725.00 | 52.3 AV | 54.0 | -1.7 | 1.46 V | 51 | 44.9 | 7.4 |
| 5 | 11340.00 | 60.1 PK | 74.0 | -13.9 | 1.89 V | 340 | 40.9 | 19.2 |
| 6 | 11340.00 | 47.2 AV | 54.0 | -6.8 | 1.89 V | 340 | 28.0 | 19.2 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 58 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 56.9 PK | 74.0 | -17.1 | 1.50 H | 100 | 50.9 | 6.0 |
| 2 | 5150.00 | 45.9 AV | 54.0 | -8.1 | 1.50 H | 100 | 39.9 | 6.0 |
| 3 | *5290.00 | 89.6 PK | | | 1.03 H | 105 | 49.9 | 39.7 |
| 4 | *5290.00 | 78.6 AV | | | 1.03 H | 105 | 38.9 | 39.7 |
| 5 | 5350.00 | 60.1 PK | 74.0 | -13.9 | 1.34 H | 145 | 53.6 | 6.5 |
| 6 | 5350.00 | 47.0 AV | 54.0 | -7.0 | 1.34 H | 145 | 40.5 | 6.5 |
| 7 | #10580.00 | 60.1 PK | 74.0 | -13.9 | 1.11 H | 0 | 41.1 | 19.0 |
| 8 | #10580.00 | 47.3 AV | 54.0 | -6.7 | 1.11 H | 0 | 28.3 | 19.0 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 5150.00 | 60.1 PK | 74.0 | -13.9 | 1.94 V | 34 | 54.1 | 6.0 |
| 2 | 5150.00 | 47.0 AV | 54.0 | -7.0 | 1.94 V | 34 | 41.0 | 6.0 |
| 3 | *5290.00 | 97.6 PK | | | 1.00 V | 39 | 57.9 | 39.7 |
| 4 | *5290.00 | 86.0 AV | | | 1.00 V | 39 | 46.3 | 39.7 |
| 5 | 5350.00 | 64.8 PK | 74.0 | -9.2 | 2.30 V | 45 | 58.3 | 6.5 |
| 6 | 5350.00 | 52.3 AV | 54.0 | -1.7 | 2.30 V | 45 | 45.8 | 6.5 |
| 7 | #10580.00 | 60.5 PK | 74.0 | -13.5 | 1.80 V | 121 | 41.5 | 19.0 |
| 8 | #10580.00 | 47.7 AV | 54.0 | -6.3 | 1.80 V | 121 | 28.7 | 19.0 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

| | | | |
|-----------------|----------------|----------------------|--------------|
| CHANNEL | TX Channel 106 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 40GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 58.9 PK | 74.0 | -15.1 | 2.84 H | 32 | 52.0 | 6.9 |
| 2 | 5460.00 | 46.2 AV | 54.0 | -7.8 | 2.84 H | 32 | 39.3 | 6.9 |
| 3 | #5470.00 | 59.9 PK | 74.0 | -14.1 | 2.87 H | 30 | 53.0 | 6.9 |
| 4 | #5470.00 | 47.3 AV | 54.0 | -6.7 | 2.87 H | 30 | 40.4 | 6.9 |
| 5 | *5530.00 | 91.2 PK | | | 2.81 H | 27 | 51.0 | 40.2 |
| 6 | *5530.00 | 79.5 AV | | | 2.81 H | 27 | 39.3 | 40.2 |
| 7 | #5725.00 | 58.5 PK | 74.0 | -15.5 | 2.53 H | 150 | 51.1 | 7.4 |
| 8 | #5725.00 | 47.3 AV | 54.0 | -6.7 | 2.53 H | 150 | 39.9 | 7.4 |
| 9 | 11060.00 | 59.8 PK | 74.0 | -14.2 | 1.64 H | 333 | 40.3 | 19.5 |
| 10 | 11060.00 | 46.6 AV | 54.0 | -7.4 | 1.64 H | 333 | 27.1 | 19.5 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 5460.00 | 61.2 PK | 74.0 | -12.8 | 1.68 V | 41 | 54.3 | 6.9 |
| 2 | 5460.00 | 47.8 AV | 54.0 | -6.2 | 1.68 V | 41 | 40.9 | 6.9 |
| 3 | #5470.00 | 64.0 PK | 74.0 | -10.0 | 1.64 V | 44 | 57.1 | 6.9 |
| 4 | #5470.00 | 52.5 AV | 54.0 | -1.5 | 1.64 V | 44 | 45.6 | 6.9 |
| 5 | *5530.00 | 98.6 PK | | | 1.26 V | 48 | 58.4 | 40.2 |
| 6 | *5530.00 | 86.7 AV | | | 1.26 V | 48 | 46.5 | 40.2 |
| 7 | #5725.00 | 60.3 PK | 74.0 | -13.7 | 1.50 V | 50 | 52.9 | 7.4 |
| 8 | #5725.00 | 48.0 AV | 54.0 | -6.0 | 1.50 V | 50 | 40.6 | 7.4 |
| 9 | 11060.00 | 59.8 PK | 74.0 | -14.2 | 2.06 V | 224 | 40.9 | 18.9 |
| 10 | 11060.00 | 46.8 AV | 54.0 | -7.2 | 2.06 V | 224 | 27.9 | 18.9 |

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Worst-Case Data:

Radio 2: CDD Mode

802.11a

| | | | |
|-----------------|---------------|----------------------|-----------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz | | |
| TEST MODE | A | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 57.12 | 30.7 QP | 40.0 | -9.3 | 1.99 H | 205 | 45.3 | -14.6 |
| 2 | 249.60 | 26.3 QP | 46.0 | -19.7 | 1.00 H | 78 | 40.3 | -14.0 |
| 3 | 374.04 | 35.0 QP | 46.0 | -11.0 | 1.00 H | 120 | 45.5 | -10.5 |
| 4 | 624.85 | 38.1 QP | 46.0 | -7.9 | 1.00 H | 134 | 42.8 | -4.7 |
| 5 | 751.23 | 40.9 QP | 46.0 | -5.1 | 1.00 H | 313 | 43.1 | -2.2 |
| 6 | 875.67 | 41.3 QP | 46.0 | -4.7 | 1.49 H | 9 | 41.4 | -0.1 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 40.48 | 37.4 QP | 40.0 | -2.6 | 1.00 V | 4 | 52.6 | -15.2 |
| 2 | 389.59 | 33.8 QP | 46.0 | -12.2 | 1.00 V | 156 | 44.0 | -10.2 |
| 3 | 500.42 | 31.4 QP | 46.0 | -14.6 | 1.99 V | 189 | 39.3 | -7.9 |
| 4 | 624.85 | 39.5 QP | 46.0 | -6.5 | 1.00 V | 7 | 44.2 | -4.7 |
| 5 | 751.23 | 37.1 QP | 46.0 | -8.9 | 1.49 V | 1 | 39.3 | -2.2 |
| 6 | 875.67 | 37.5 QP | 46.0 | -8.5 | 1.00 V | 228 | 37.6 | -0.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

| | | | |
|-----------------|---------------|----------------------|-----------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz | | |
| TEST MODE | B | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 70.73 | 30.1 QP | 40.0 | -9.9 | 1.51 H | 142 | 46.6 | -16.5 |
| 2 | 374.04 | 37.3 QP | 46.0 | -8.7 | 1.01 H | 124 | 47.8 | -10.5 |
| 3 | 500.42 | 34.3 QP | 46.0 | -11.7 | 2.00 H | 126 | 42.2 | -7.9 |
| 4 | 624.85 | 40.3 QP | 46.0 | -5.7 | 1.51 H | 139 | 45.0 | -4.7 |
| 5 | 751.23 | 40.3 QP | 46.0 | -5.7 | 1.01 H | 346 | 42.5 | -2.2 |
| 6 | 875.67 | 41.9 QP | 46.0 | -4.1 | 1.51 H | 13 | 42.0 | -0.1 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 29.90 | 36.1 QP | 40.0 | -3.9 | 1.00 V | 248 | 52.4 | -16.3 |
| 2 | 374.04 | 34.2 QP | 46.0 | -11.8 | 1.50 V | 319 | 44.7 | -10.5 |
| 3 | 494.58 | 23.4 QP | 46.0 | -22.6 | 1.00 V | 276 | 31.5 | -8.1 |
| 4 | 624.85 | 42.9 QP | 46.0 | -3.1 | 1.00 V | 7 | 47.6 | -4.7 |
| 5 | 751.23 | 36.9 QP | 46.0 | -9.1 | 1.99 V | 9 | 39.1 | -2.2 |
| 6 | 875.67 | 38.8 QP | 46.0 | -7.2 | 1.50 V | 288 | 38.9 | -0.1 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Radio 3: CDD Mode

802.11a

| | | | |
|-----------------|---------------|----------------------|-----------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz | | |
| TEST MODE | A | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 57.12 | 30.0 QP | 40.0 | -10.0 | 2.00 H | 295 | 44.6 | -14.6 |
| 2 | 125.17 | 30.4 QP | 43.5 | -13.1 | 2.00 H | 266 | 46.5 | -16.1 |
| 3 | 249.60 | 28.0 QP | 46.0 | -18.0 | 1.00 H | 258 | 42.0 | -14.0 |
| 4 | 391.54 | 39.1 QP | 46.0 | -6.9 | 2.00 H | 17 | 49.2 | -10.1 |
| 5 | 500.42 | 33.0 QP | 46.0 | -13.0 | 1.50 H | 127 | 40.9 | -7.9 |
| 6 | 729.84 | 32.0 QP | 46.0 | -14.0 | 1.00 H | 336 | 34.7 | -2.7 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 41.10 | 38.3 QP | 40.0 | -1.7 | 1.48 V | 238 | 53.4 | -15.1 |
| 2 | 154.33 | 26.2 QP | 43.5 | -17.3 | 1.49 V | 327 | 39.9 | -13.7 |
| 3 | 249.60 | 25.7 QP | 46.0 | -20.3 | 1.49 V | 156 | 39.7 | -14.0 |
| 4 | 391.54 | 42.5 QP | 46.0 | -3.5 | 1.00 V | 136 | 52.6 | -10.1 |
| 5 | 500.42 | 35.1 QP | 46.0 | -10.9 | 1.00 V | 258 | 43.0 | -7.9 |
| 6 | 939.83 | 32.6 QP | 46.0 | -13.4 | 1.49 V | 13 | 31.2 | 1.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

| | | | |
|-----------------|---------------|----------------------|-----------------|
| CHANNEL | TX Channel 52 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz | | |
| TEST MODE | B | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 125.17 | 26.5 QP | 43.5 | -17.0 | 1.49 H | 246 | 42.6 | -16.1 |
| 2 | 249.60 | 29.1 QP | 46.0 | -16.9 | 1.00 H | 99 | 43.1 | -14.0 |
| 3 | 374.04 | 37.4 QP | 46.0 | -8.6 | 1.00 H | 116 | 47.9 | -10.5 |
| 4 | 541.25 | 36.0 QP | 46.0 | -10.0 | 1.49 H | 130 | 43.2 | -7.2 |
| 5 | 722.07 | 32.1 QP | 46.0 | -13.9 | 1.00 H | 310 | 35.2 | -3.1 |
| 6 | 760.95 | 31.6 QP | 46.0 | -14.4 | 1.00 H | 4 | 33.6 | -2.0 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| 1 | 68.79 | 29.6 QP | 40.0 | -10.4 | 1.49 V | 11 | 45.8 | -16.2 |
| 2 | 249.60 | 28.8 QP | 46.0 | -17.2 | 1.99 V | 149 | 42.8 | -14.0 |
| 3 | 385.70 | 41.7 QP | 46.0 | -4.3 | 1.49 V | 299 | 52.1 | -10.4 |
| 4 | 500.42 | 39.7 QP | 46.0 | -6.3 | 1.00 V | 264 | 47.6 | -7.9 |
| 5 | 671.52 | 32.7 QP | 46.0 | -13.3 | 1.49 V | 144 | 36.8 | -4.1 |
| 6 | 854.28 | 30.5 QP | 46.0 | -15.5 | 1.49 V | 11 | 30.8 | -0.3 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) | |
|-----------------|------------------------|---------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

- Note:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

| Description & Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Due |
|---|--------------------------|----------------|---------------|---------------|
| Test Receiver ROHDE & SCHWARZ | ESCI | 100613 | Nov. 16, 2015 | Nov. 15, 2016 |
| RF signal cable (with 10dB PAD) Woken | 5D-FB | Cable-cond1-01 | Dec. 26, 2015 | Dec. 25, 2016 |
| LISN/AMN ROHDE & SCHWARZ (EUT) | ESH3-Z5 | 835239/001 | Feb. 26, 2016 | Feb. 25, 2017 |
| LISN/AMN ROHDE & SCHWARZ (Peripheral) | ESH3-Z5 | 100220 | Nov. 13, 2015 | Nov. 12, 2016 |
| Software ADT | BV ADT_Cond_ V7.3.7.3 | NA | NA | NA |

- Note:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

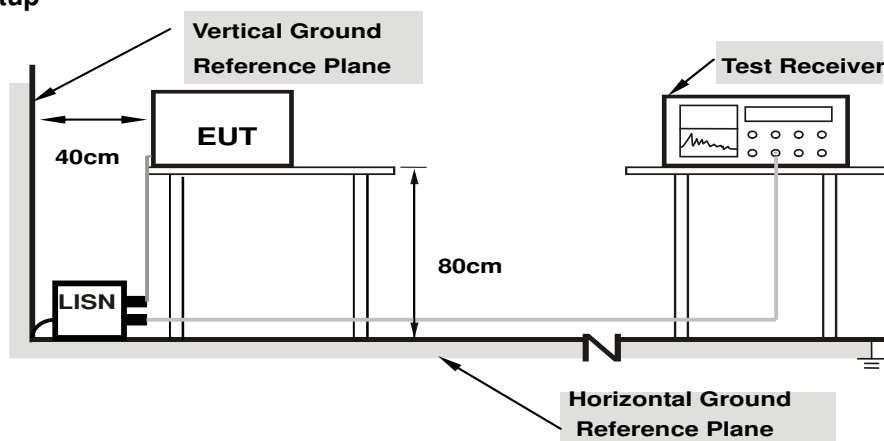

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


Radio 2: CDD Mode

| | | | |
|-----------|----------|-------------------|--------------------------------|
| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | A | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|----------------------|----------------------------|---------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.15400 | 10.08 | 37.16 | 23.96 | 47.24 | 34.04 | 65.78 |
| 2 | 0.18180 | 10.08 | 32.48 | 18.14 | 42.56 | 28.22 | 64.40 | 54.40 | -21.84 | -26.18 |
| 3 | 0.49000 | 10.19 | 20.80 | 15.84 | 30.99 | 26.03 | 56.17 | 46.17 | -25.18 | -20.14 |
| 4 | 1.46600 | 10.33 | 18.79 | 15.02 | 29.12 | 25.35 | 56.00 | 46.00 | -26.88 | -20.65 |
| 5 | 10.00200 | 10.77 | 18.30 | 12.99 | 29.07 | 23.76 | 60.00 | 50.00 | -30.93 | -26.24 |
| 6 | 24.88200 | 11.73 | 26.55 | 22.09 | 38.28 | 33.82 | 60.00 | 50.00 | -21.72 | -16.18 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

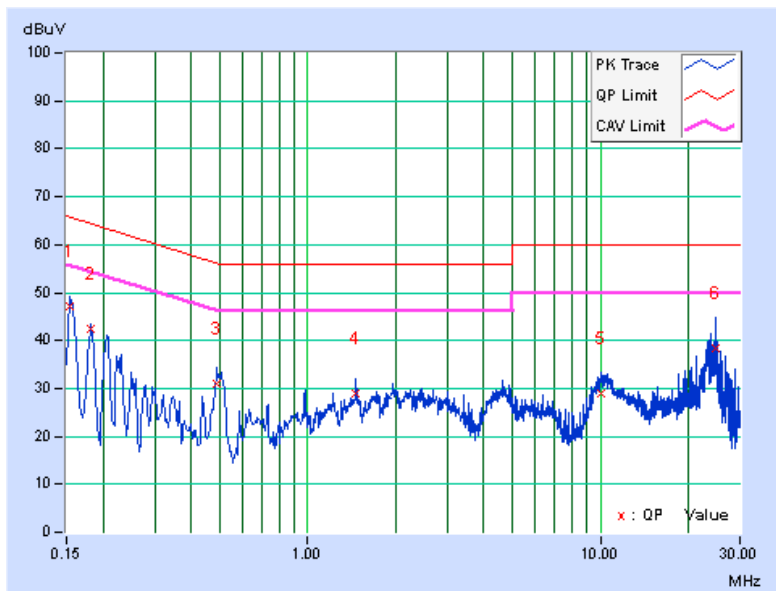


| | | | |
|-----------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | A | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|----------------------|----------------------------|---------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.15000 | 10.08 | 38.34 | 22.94 | 48.42 | 33.02 | 66.00 |
| 2 | 0.16200 | 10.08 | 36.13 | 20.38 | 46.21 | 30.46 | 65.36 | 55.36 | -19.15 | -24.90 |
| 3 | 0.19316 | 10.08 | 30.71 | 15.52 | 40.79 | 25.60 | 63.90 | 53.90 | -23.11 | -28.30 |
| 4 | 0.51800 | 10.25 | 17.55 | 12.18 | 27.80 | 22.43 | 56.00 | 46.00 | -28.20 | -23.57 |
| 5 | 10.49000 | 10.88 | 22.02 | 16.85 | 32.90 | 27.73 | 60.00 | 50.00 | -27.10 | -22.27 |
| 6 | 24.65000 | 11.90 | 24.27 | 18.50 | 36.17 | 30.40 | 60.00 | 50.00 | -23.83 | -19.60 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

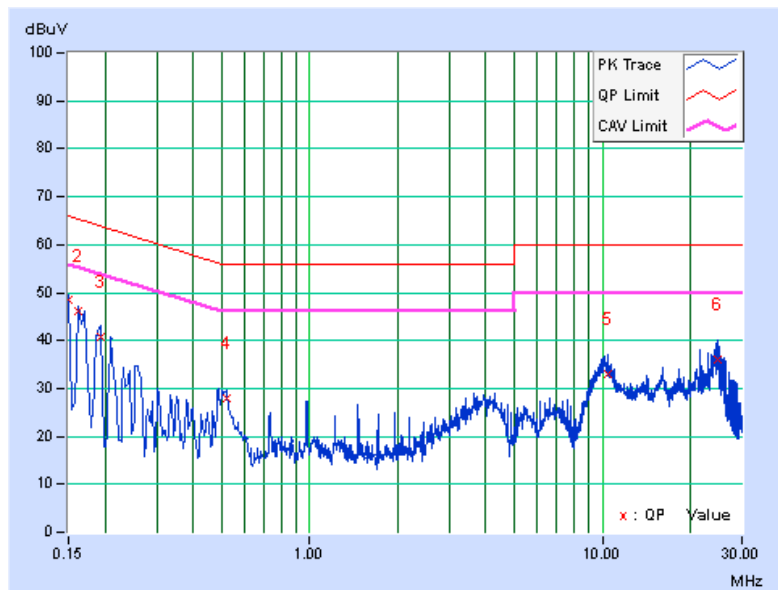


| | | | |
|-----------|----------|-------------------|--------------------------------|
| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | B | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|----------------------|----------------------------|---------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.15800 | 10.08 | 40.11 | 20.36 | 50.19 | 30.44 | 65.57 |
| 2 | 0.16843 | 10.08 | 38.78 | 21.28 | 48.86 | 31.36 | 65.04 | 55.04 | -16.18 | -23.68 |
| 3 | 0.21406 | 10.09 | 32.44 | 15.56 | 42.53 | 25.65 | 63.05 | 53.05 | -20.52 | -27.40 |
| 4 | 0.25006 | 10.10 | 29.55 | 14.48 | 39.65 | 24.58 | 61.76 | 51.76 | -22.11 | -27.18 |
| 5 | 0.61800 | 10.21 | 25.53 | 17.06 | 35.74 | 27.27 | 56.00 | 46.00 | -20.26 | -18.73 |
| 6 | 27.41800 | 11.90 | 17.40 | 11.93 | 29.30 | 23.83 | 60.00 | 50.00 | -30.70 | -26.17 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

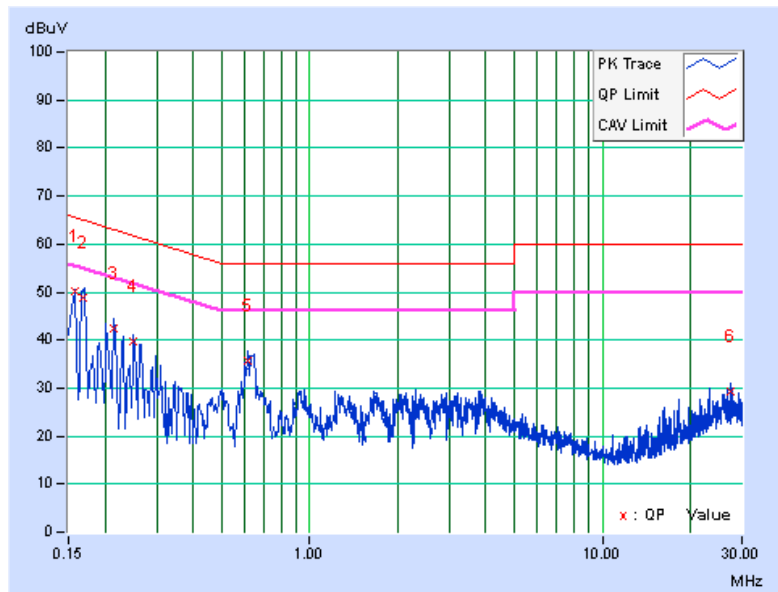


| | | | |
|-----------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | B | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|----------------------|----------------------------|---------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.16623 | 10.08 | 38.76 | 22.12 | 48.84 | 32.20 | 65.15 |
| 2 | 0.21800 | 10.09 | 32.42 | 15.40 | 42.51 | 25.49 | 62.89 | 52.89 | -20.38 | -27.40 |
| 3 | 0.31283 | 10.17 | 22.23 | 8.04 | 32.40 | 18.21 | 59.90 | 49.90 | -27.50 | -31.69 |
| 4 | 0.61800 | 10.26 | 25.72 | 17.36 | 35.98 | 27.62 | 56.00 | 46.00 | -20.02 | -18.38 |
| 5 | 1.71400 | 10.36 | 16.33 | 8.99 | 26.69 | 19.35 | 56.00 | 46.00 | -29.31 | -26.65 |
| 6 | 23.13000 | 11.79 | 16.58 | 14.21 | 28.37 | 26.00 | 60.00 | 50.00 | -31.63 | -24.00 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

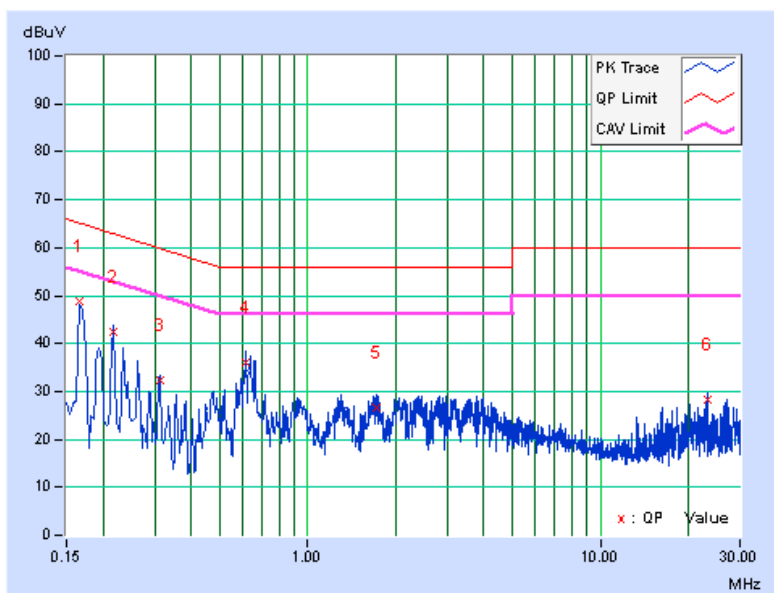


Radio 3: CDD Mode

| | | | |
|-----------|----------|-------------------|--------------------------------|
| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | A | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15687 | 10.08 | 41.16 | 21.27 | 51.24 | 31.35 | 65.63 | 55.63 | -14.39 | -24.28 |
| 2 | 0.18180 | 10.08 | 38.03 | 19.95 | 48.11 | 30.03 | 64.40 | 54.40 | -16.29 | -24.37 |
| 3 | 0.20960 | 10.08 | 35.09 | 17.37 | 45.17 | 27.45 | 63.22 | 53.22 | -18.05 | -25.77 |
| 4 | 0.27800 | 10.12 | 27.20 | 11.86 | 37.32 | 21.98 | 60.88 | 50.88 | -23.56 | -28.90 |
| 5 | 0.62221 | 10.21 | 25.74 | 17.59 | 35.95 | 27.80 | 56.00 | 46.00 | -20.05 | -18.20 |
| 6 | 24.51000 | 11.70 | 16.39 | 10.84 | 28.09 | 22.54 | 60.00 | 50.00 | -31.91 | -27.46 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

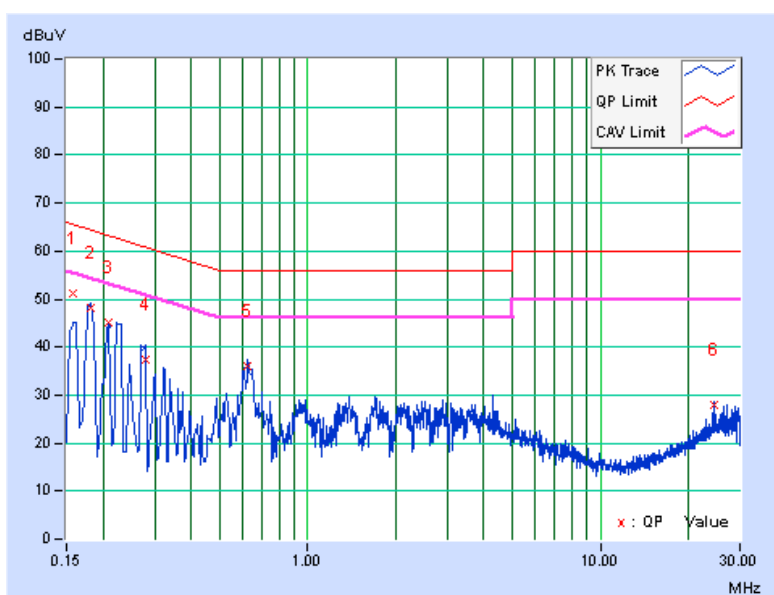


| | | | |
|-----------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | A | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|----------------------|----------------------------|----------------|-----------------------------|--------------|--------------------|--------------|----------------|--------------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.15000 | 10.08 | 42.93 | 24.36 | 53.01 | 34.44 | 66.00 |
| 2 | 0.16190 | 10.08 | 40.31 | 23.78 | 50.39 | 33.86 | 65.37 | 55.37 | -14.98 | -21.51 |
| 3 | 0.19316 | 10.08 | 36.38 | 19.18 | 46.46 | 29.26 | 63.90 | 53.90 | -17.44 | -24.64 |
| 4 | 0.22600 | 10.10 | 33.43 | 17.60 | 43.53 | 27.70 | 62.60 | 52.60 | -19.07 | -24.90 |
| 5 | 0.63046 | 10.26 | 26.65 | 18.73 | 36.91 | 28.99 | 56.00 | 46.00 | -19.09 | -17.01 |
| 6 | 2.18600 | 10.41 | 14.87 | 6.88 | 25.28 | 17.29 | 56.00 | 46.00 | -30.72 | -28.71 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

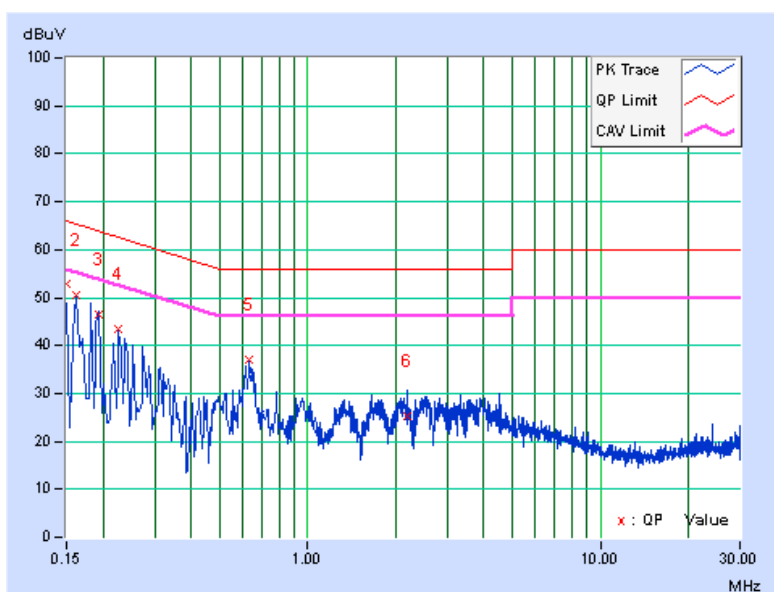


| | | | |
|-----------|----------|-------------------|--------------------------------|
| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | B | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|----------------------|----------------------------|---------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.15800 | 10.08 | 41.35 | 21.91 | 51.43 | 31.99 | 65.57 |
| 2 | 0.17801 | 10.08 | 37.87 | 20.39 | 47.95 | 30.47 | 64.58 | 54.58 | -16.63 | -24.11 |
| 3 | 0.22600 | 10.09 | 33.02 | 17.11 | 43.11 | 27.20 | 62.60 | 52.60 | -19.49 | -25.40 |
| 4 | 0.27400 | 10.11 | 28.29 | 14.15 | 38.40 | 24.26 | 61.00 | 51.00 | -22.60 | -26.74 |
| 5 | 0.63000 | 10.22 | 26.20 | 17.93 | 36.42 | 28.15 | 56.00 | 46.00 | -19.58 | -17.85 |
| 6 | 29.57000 | 12.04 | 6.89 | 1.27 | 18.93 | 13.31 | 60.00 | 50.00 | -41.07 | -36.69 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

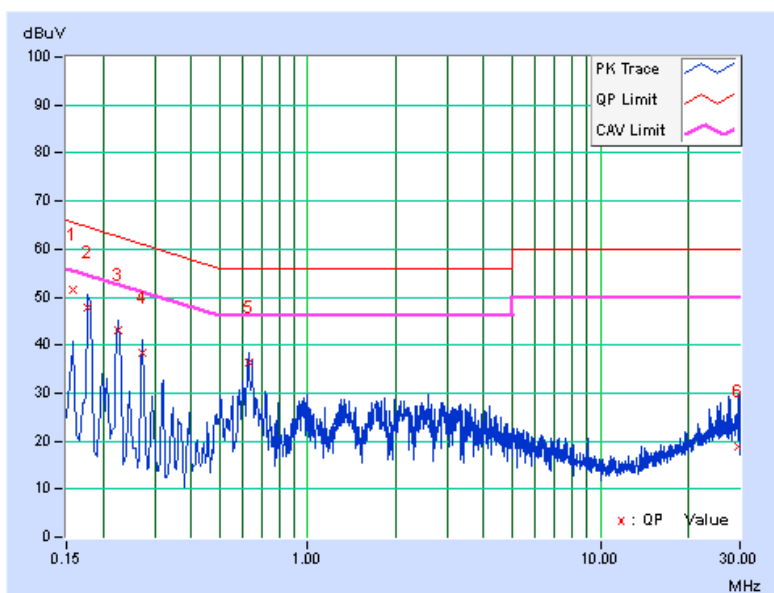


| | | | |
|-----------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | B | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|----------------------|----------------------------|---------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | 1 | 0.15400 | 10.08 | 39.33 | 21.77 | 49.41 | 31.85 | 65.78 |
| 2 | 0.17430 | 10.08 | 39.27 | 21.63 | 49.35 | 31.71 | 64.75 | 54.75 | -15.40 | -23.04 |
| 3 | 0.19800 | 10.08 | 36.24 | 19.66 | 46.32 | 29.74 | 63.69 | 53.69 | -17.37 | -23.95 |
| 4 | 0.22211 | 10.10 | 33.84 | 18.15 | 43.94 | 28.25 | 62.74 | 52.74 | -18.80 | -24.49 |
| 5 | 0.27400 | 10.14 | 29.16 | 15.31 | 39.30 | 25.45 | 61.00 | 51.00 | -21.70 | -25.55 |
| 6 | 0.62221 | 10.26 | 25.76 | 18.05 | 36.02 | 28.31 | 56.00 | 46.00 | -19.98 | -17.69 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

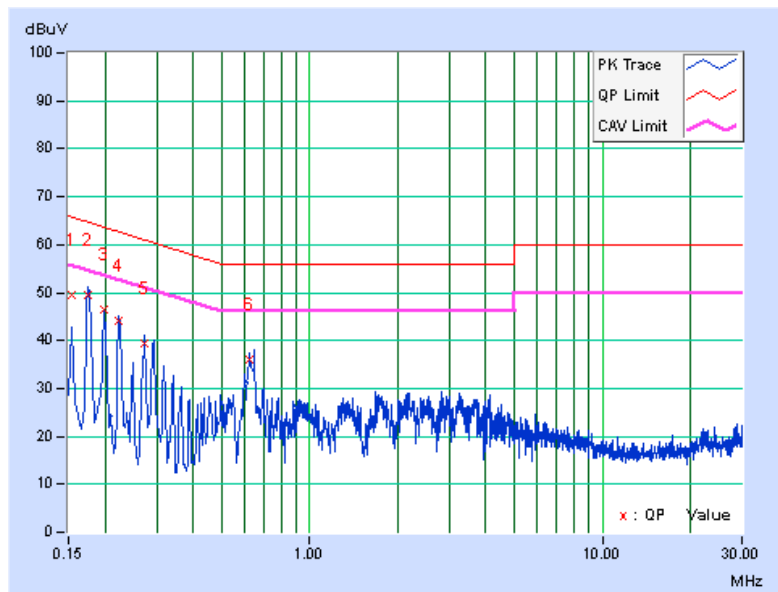

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

| Operation Band | EUT Category | | LIMIT |
|----------------|--------------|-----------------------------------|---|
| U-NII-1 | --- | Outdoor Access Point | 1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon) |
| | --- | Fixed point-to-point Access Point | 1 Watt (30 dBm) |
| | --- | Indoor Access Point | 1 Watt (30 dBm) |
| | --- | Mobile and Portable client device | 250mW (24 dBm) |
| U-NII-2A | √ | | 250mW (24 dBm) or 11 dBm+10 log B* |
| U-NII-2C | √ | | 250mW (24 dBm) or 11 dBm+10 log B* |
| U-NII-3 | --- | | 1 Watt (30 dBm) |

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.


4.3.2 Test Setup

For Power Output Measurement


802.11a, 802.11n (HT20), 802.11n (HT40)

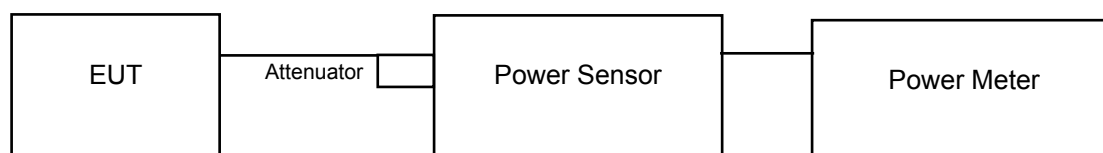

802.11ac (VHT80)



For 26dB Bandwidth



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

For 802.11a, 802.11n (HT20), 802.11n (HT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (VHT80)

- a. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- b. Set sweep trigger to "free run".
- c. Set RBW = 1 MHz.
- d. Set VBW \geq 3 MHz
- e. Number of points in sweep \geq 2 Span / RBW.
- f. Sweep time \leq (number of points in sweep) * T
- g. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- h. Detector = RMS.
- i. Trace mode = max hold.
- j. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
- k. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

For 26dB Bandwidth

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

Power Output:

Radio 2: CDD Mode

802.11a

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|-------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 52 | 5260 | 17.41 | 17.23 | 107.926 | 20.33 | 23.83 | Pass |
| 60 | 5300 | 16.85 | 17.12 | 99.940 | 20.00 | 23.83 | Pass |
| 64 | 5320 | 16.95 | 17.34 | 103.745 | 20.16 | 23.84 | Pass |
| 100 | 5500 | 17.19 | 17.55 | 109.245 | 20.38 | 23.84 | Pass |
| 116 | 5580 | 17.18 | 17.52 | 108.734 | 20.36 | 23.86 | Pass |
| 140 | 5700 | 16.79 | 17.32 | 101.704 | 20.07 | 23.84 | Pass |

Note:

Chain 0

1. $11\text{dBm} + 10\log (19.52) = 23.90 < 24\text{dBm}$
2. $11\text{dBm} + 10\log (19.45) = 23.89 < 24\text{dBm}$
3. $11\text{dBm} + 10\log (19.53) = 23.91 < 24\text{dBm}$
4. $11\text{dBm} + 10\log (19.53) = 23.91 < 24\text{dBm}$
5. $11\text{dBm} + 10\log (19.40) = 23.88 < 24\text{dBm}$
6. $11\text{dBm} + 10\log (19.42) = 23.88 < 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log (19.23) = 23.83 < 24\text{dBm}$
2. $11\text{dBm} + 10\log (19.23) = 23.83 < 24\text{dBm}$
3. $11\text{dBm} + 10\log (19.26) = 23.84 < 24\text{dBm}$
4. $11\text{dBm} + 10\log (19.24) = 23.84 < 24\text{dBm}$
5. $11\text{dBm} + 10\log (19.35) = 23.86 < 24\text{dBm}$
6. $11\text{dBm} + 10\log (19.27) = 23.84 < 24\text{dBm}$

802.11n (HT20)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|-------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 52 | 5260 | 17.30 | 17.40 | 108.657 | 20.36 | 24 | Pass |
| 60 | 5300 | 17.43 | 17.49 | 111.440 | 20.47 | 24 | Pass |
| 64 | 5320 | 16.97 | 17.46 | 105.493 | 20.23 | 24 | Pass |
| 100 | 5500 | 17.21 | 17.60 | 110.146 | 20.42 | 24 | Pass |
| 116 | 5580 | 17.14 | 17.34 | 105.961 | 20.25 | 24 | Pass |
| 140 | 5700 | 16.73 | 17.25 | 100.186 | 20.01 | 24 | Pass |

Note:

Chain 0

1. $11\text{dBm} + 10\log (20.39) = 24.09 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (20.36) = 24.09 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (20.29) = 24.07 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (20.35) = 24.09 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (20.18) = 24.05 > 24\text{dBm}$
6. $11\text{dBm} + 10\log (20.31) = 24.08 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log (20.27) = 24.07 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (20.26) = 24.07 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (20.33) = 24.08 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (20.30) = 24.07 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (20.30) = 24.07 > 24\text{dBm}$
6. $11\text{dBm} + 10\log (20.30) = 24.07 > 24\text{dBm}$

802.11n (HT40)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|-------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 54 | 5270 | 19.66 | 20.03 | 193.163 | 22.86 | 24 | Pass |
| 62 | 5310 | 17.89 | 18.01 | 124.759 | 20.96 | 24 | Pass |
| 102 | 5510 | 17.61 | 18.14 | 122.840 | 20.89 | 24 | Pass |
| 110 | 5550 | 19.49 | 20.14 | 192.196 | 22.84 | 24 | Pass |
| 134 | 5670 | 17.99 | 18.75 | 137.940 | 21.40 | 24 | Pass |

Note:

Chain 0

1. $11\text{dBm} + 10\log (40.80) = 27.11 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (40.69) = 27.09 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (40.66) = 27.09 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (40.92) = 27.12 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (40.77) = 27.10 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log (41.02) = 27.13 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (40.64) = 27.09 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (40.92) = 27.12 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (40.93) = 27.12 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (40.98) = 27.13 > 24\text{dBm}$

802.11ac (VHT80)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|----------------|-------------------------------|---------|------------------------|-------------------------|-------------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 58 | 5290 | 15.74 | 15.84 | 75.868 | 18.80 | 24 | Pass |
| 106 | 5530 | 15.98 | 16.63 | 85.654 | 19.33 | 24 | Pass |

Note:

Chain 0

1. $11\text{dBm} + 10\log (84.28) = 30.26 > 24\text{dBm}$

2. $11\text{dBm} + 10\log (83.89) = 30.24 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log (84.00) = 30.24 > 24\text{dBm}$

2. $11\text{dBm} + 10\log (83.69) = 30.23 > 24\text{dBm}$

Radio 2: Beamforming Mode

802.11n (HT20)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|-------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 52 | 5260 | 18.09 | 18.05 | 128.243 | 21.08 | 21.46 | Pass |
| 60 | 5300 | 18.11 | 18.01 | 127.955 | 21.07 | 21.46 | Pass |
| 64 | 5320 | 18.10 | 18.06 | 128.538 | 21.09 | 21.46 | Pass |
| 100 | 5500 | 18.13 | 18.12 | 129.876 | 21.14 | 21.46 | Pass |
| 116 | 5580 | 18.06 | 18.17 | 129.588 | 21.13 | 21.46 | Pass |
| 140 | 5700 | 15.56 | 16.09 | 76.619 | 18.84 | 21.46 | Pass |

* Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 8.54 \text{ dBi} > 6 \text{ dBi}$, so the power limit shall be reduced to $24 - (8.54 - 6) = 21.46 \text{ dBm}$.

Note:

Chain 0

1. $11 \text{ dBm} + 10 \log (20.35) = 24.09 > 21.46 \text{ dBm}$
2. $11 \text{ dBm} + 10 \log (20.50) = 24.12 > 21.46 \text{ dBm}$
3. $11 \text{ dBm} + 10 \log (20.39) = 24.09 > 21.46 \text{ dBm}$
4. $11 \text{ dBm} + 10 \log (20.44) = 24.10 > 21.46 \text{ dBm}$
5. $11 \text{ dBm} + 10 \log (20.45) = 24.11 > 21.46 \text{ dBm}$
6. $11 \text{ dBm} + 10 \log (20.42) = 24.10 > 21.46 \text{ dBm}$

Chain 1

1. $11 \text{ dBm} + 10 \log (20.57) = 24.13 > 21.46 \text{ dBm}$
2. $11 \text{ dBm} + 10 \log (20.55) = 24.13 > 21.46 \text{ dBm}$
3. $11 \text{ dBm} + 10 \log (20.39) = 24.09 > 21.46 \text{ dBm}$
4. $11 \text{ dBm} + 10 \log (20.52) = 24.12 > 21.46 \text{ dBm}$
5. $11 \text{ dBm} + 10 \log (20.37) = 24.09 > 21.46 \text{ dBm}$
6. $11 \text{ dBm} + 10 \log (20.30) = 24.07 > 21.46 \text{ dBm}$

802.11n (HT40)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|-------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 54 | 5270 | 18.38 | 18.23 | 135.392 | 21.32 | 21.46 | Pass |
| 62 | 5310 | 15.59 | 15.74 | 73.721 | 18.68 | 21.46 | Pass |
| 102 | 5510 | 14.82 | 15.10 | 62.698 | 17.97 | 21.46 | Pass |
| 110 | 5550 | 18.06 | 18.51 | 134.931 | 21.30 | 21.46 | Pass |
| 134 | 5670 | 14.85 | 15.53 | 66.276 | 18.21 | 21.46 | Pass |

* Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 8.54 \text{ dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24-(8.54-6) = 21.46\text{dBm}$.

Note:

Chain 0

1. $11\text{dBm} + 10\log(40.65) = 27.09 > 21.46\text{dBm}$
2. $11\text{dBm} + 10\log(40.80) = 27.11 > 21.46\text{dBm}$
3. $11\text{dBm} + 10\log(40.75) = 27.10 > 21.46\text{dBm}$
4. $11\text{dBm} + 10\log(40.62) = 27.09 > 21.46\text{dBm}$
5. $11\text{dBm} + 10\log(40.78) = 27.10 > 21.46\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(41.19) = 27.15 > 21.46\text{dBm}$
2. $11\text{dBm} + 10\log(41.00) = 27.13 > 21.46\text{dBm}$
3. $11\text{dBm} + 10\log(41.01) = 27.13 > 21.46\text{dBm}$
4. $11\text{dBm} + 10\log(40.91) = 27.12 > 21.46\text{dBm}$
5. $11\text{dBm} + 10\log(41.03) = 27.13 > 21.46\text{dBm}$

802.11ac (VHT80)

| Chan. | Freq. (MHz) | Maximum Conducted Power (dBm) | | Total Power (mW) | Total Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|-------------|-------------------------------|---------|------------------|-------------------|-------------------|-------------|
| | | Chain 0 | Chain 1 | | | | |
| 58 | 5290 | 15.36 | 15.42 | 69.190 | 18.40 | 21.46 | Pass |
| 106 | 5530 | 14.42 | 14.93 | 58.786 | 17.69 | 21.46 | Pass |

* Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 8.54 \text{ dBi} > 6\text{dBi}$, so the power limit shall be reduced to $24-(8.54-6) = 21.46\text{dBm}$.

Note:

Chain 0

1. $11\text{dBm} + 10\log(83.14) = 30.20 > 21.46\text{dBm}$
2. $11\text{dBm} + 10\log(83.37) = 30.21 > 21.46\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(83.13) = 30.20 > 21.46\text{dBm}$
2. $11\text{dBm} + 10\log(84.32) = 30.26 > 21.46\text{dBm}$

Radio 3: CDD Mode

802.11a

| Chan. | Freq. (MHz) | Maximum Conducted Power (mW) | Maximum Conducted Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|-------------|------------------------------|-------------------------------|-------------------|-------------|
| 52 | 5260 | 59.704 | 17.76 | 24 | Pass |
| 60 | 5300 | 63.973 | 18.06 | 24 | Pass |
| 64 | 5320 | 59.156 | 17.72 | 24 | Pass |
| 100 | 5500 | 28.510 | 14.55 | 24 | Pass |
| 116 | 5580 | 45.082 | 16.54 | 24 | Pass |
| 140 | 5700 | 19.454 | 12.89 | 24 | Pass |

Note:

1. $11\text{dBm} + 10\log (37.73) = 26.77 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (36.02) = 26.57 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (34.26) = 26.35 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (30.56) = 25.85 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (41.44) = 27.17 > 24\text{dBm}$
6. $11\text{dBm} + 10\log (25.93) = 25.14 > 24\text{dBm}$

802.11n (HT20)

| Chan. | Freq. (MHz) | Maximum Conducted Power (mW) | Maximum Conducted Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|-------------|------------------------------|-------------------------------|-------------------|-------------|
| 52 | 5260 | 56.234 | 17.50 | 24 | Pass |
| 60 | 5300 | 57.677 | 17.61 | 24 | Pass |
| 64 | 5320 | 51.168 | 17.09 | 24 | Pass |
| 100 | 5500 | 25.942 | 14.14 | 24 | Pass |
| 116 | 5580 | 43.954 | 16.43 | 24 | Pass |
| 140 | 5700 | 13.490 | 11.30 | 24 | Pass |

Note:

1. $11\text{dBm} + 10\log (40.67) = 27.09 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (39.47) = 26.96 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (32.84) = 26.16 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (29.30) = 25.67 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (45.27) = 27.56 > 24\text{dBm}$
6. $11\text{dBm} + 10\log (27.30) = 25.36 > 24\text{dBm}$

802.11n (HT40)

| Chan. | Freq. (MHz) | Maximum Conducted Power (mW) | Maximum Conducted Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|-------------|------------------------------|-------------------------------|-------------------|-------------|
| 54 | 5270 | 56.885 | 17.55 | 24 | Pass |
| 62 | 5310 | 13.614 | 11.34 | 24 | Pass |
| 102 | 5510 | 10.789 | 10.33 | 24 | Pass |
| 110 | 5550 | 42.855 | 16.32 | 24 | Pass |
| 134 | 5670 | 24.378 | 13.87 | 24 | Pass |

Note:

1. $11\text{dBm} + 10\log (79.00) = 29.98 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (52.26) = 28.18 > 24\text{dBm}$
3. $11\text{dBm} + 10\log (52.32) = 28.19 > 24\text{dBm}$
4. $11\text{dBm} + 10\log (81.21) = 30.10 > 24\text{dBm}$
5. $11\text{dBm} + 10\log (59.19) = 28.72 > 24\text{dBm}$

802.11ac (VHT80)

| Chan. | Freq. (MHz) | Maximum Conducted Power (mW) | Maximum Conducted Power (dBm) | Power Limit (dBm) | Pass / Fail |
|-------|-------------|------------------------------|-------------------------------|-------------------|-------------|
| 58 | 5290 | 4.426 | 6.46 | 24 | Pass |
| 106 | 5530 | 4.955 | 6.95 | 24 | Pass |

Note:

1. $11\text{dBm} + 10\log (101.80) = 31.08 > 24\text{dBm}$
2. $11\text{dBm} + 10\log (102.37) = 31.10 > 24\text{dBm}$

26dB Bandwidth:

Radio 2: CDD Mode

802.11a

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | | Pass / Fail |
|-------|-------------|-----------------------|---------|-------------|
| | | Chain 0 | Chain 1 | |
| 52 | 5260 | 19.52 | 19.23 | Pass |
| 60 | 5300 | 19.45 | 19.23 | Pass |
| 64 | 5320 | 19.53 | 19.26 | Pass |
| 100 | 5500 | 19.53 | 19.24 | Pass |
| 116 | 5580 | 19.40 | 19.35 | Pass |
| 140 | 5700 | 19.42 | 19.27 | Pass |

802.11n (HT20)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | | Pass / Fail |
|-------|-------------|-----------------------|---------|-------------|
| | | Chain 0 | Chain 1 | |
| 52 | 5260 | 20.39 | 20.27 | Pass |
| 60 | 5300 | 20.36 | 20.26 | Pass |
| 64 | 5320 | 20.29 | 20.33 | Pass |
| 100 | 5500 | 20.35 | 20.30 | Pass |
| 116 | 5580 | 20.18 | 20.30 | Pass |
| 140 | 5700 | 20.31 | 20.30 | Pass |





802.11n (HT40)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | | Pass / Fail |
|-------|-------------|-----------------------|---------|-------------|
| | | Chain 0 | Chain 1 | |
| 54 | 5270 | 40.80 | 41.02 | Pass |
| 62 | 5310 | 40.69 | 40.64 | Pass |
| 102 | 5510 | 40.66 | 40.92 | Pass |
| 110 | 5550 | 40.92 | 40.93 | Pass |
| 134 | 5670 | 40.77 | 40.98 | Pass |

802.11ac (VHT80)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | | Pass / Fail |
|-------|-------------|-----------------------|---------|-------------|
| | | Chain 0 | Chain 1 | |
| 58 | 5290 | 84.28 | 84.00 | Pass |
| 106 | 5530 | 83.89 | 83.69 | Pass |

Spectrum Plot of Worst Value

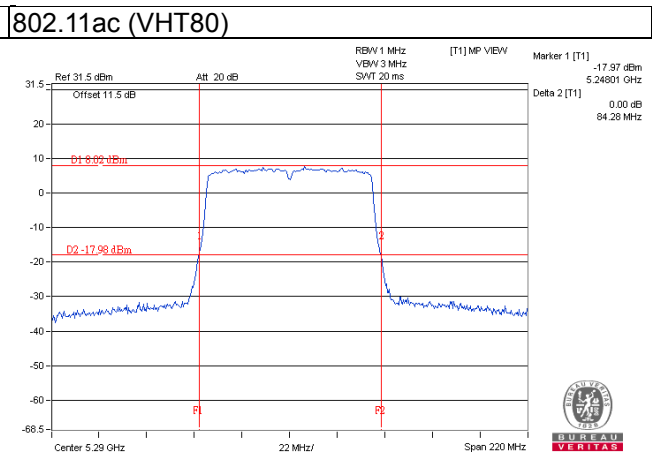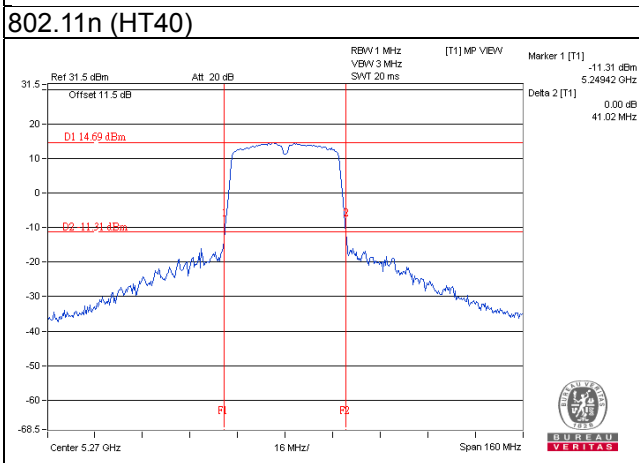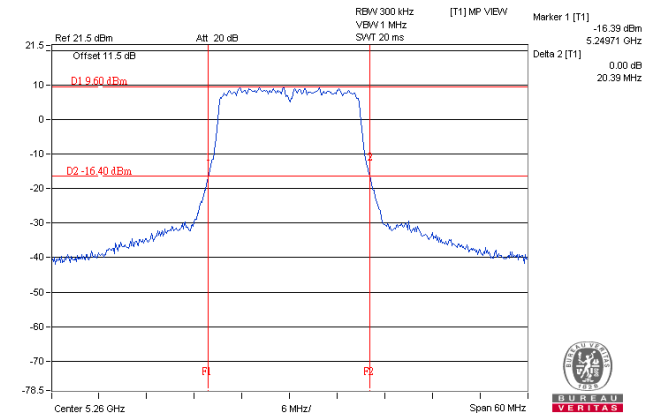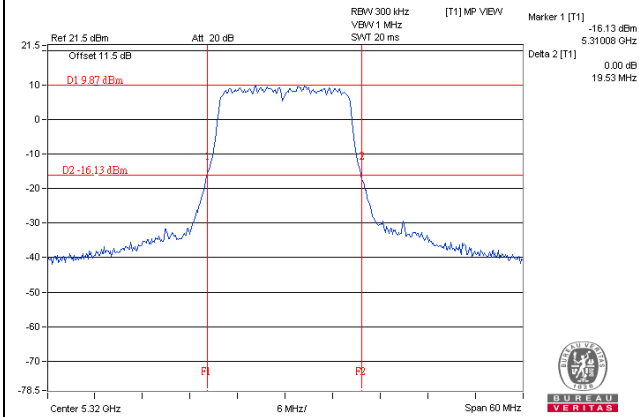

Radio 2: Beamforming Mode

802.11n (HT20)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | | Pass / Fail |
|-------|-------------|-----------------------|---------|-------------|
| | | Chain 0 | Chain 1 | |
| 52 | 5260 | 20.35 | 20.57 | Pass |
| 60 | 5300 | 20.50 | 20.55 | Pass |
| 64 | 5320 | 20.39 | 20.39 | Pass |
| 100 | 5500 | 20.44 | 20.52 | Pass |
| 116 | 5580 | 20.45 | 20.37 | Pass |
| 140 | 5700 | 20.42 | 20.30 | Pass |

802.11n (HT40)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | | Pass / Fail |
|-------|-------------|-----------------------|---------|-------------|
| | | Chain 0 | Chain 1 | |
| 54 | 5270 | 40.65 | 41.19 | Pass |
| 62 | 5310 | 40.80 | 41.00 | Pass |
| 102 | 5510 | 40.75 | 41.01 | Pass |
| 110 | 5550 | 40.62 | 40.91 | Pass |
| 134 | 5670 | 40.78 | 41.03 | Pass |



802.11ac (VHT80)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | | Pass / Fail |
|-------|-------------|-----------------------|---------|-------------|
| | | Chain 0 | Chain 1 | |
| 58 | 5290 | 83.14 | 83.13 | Pass |
| 106 | 5530 | 83.37 | 84.32 | Pass |


Spectrum Plot of Worst Value

802.11n (HT20)

802.11n (HT40)

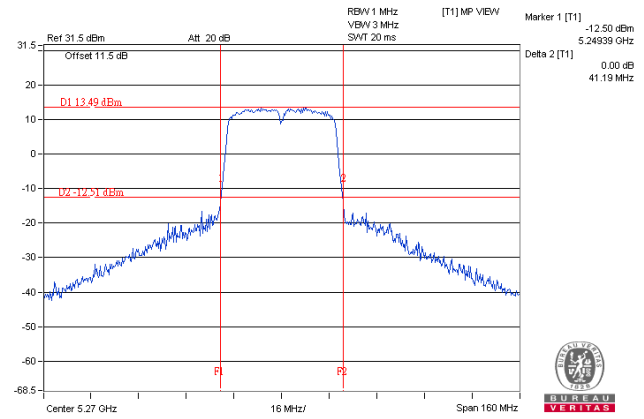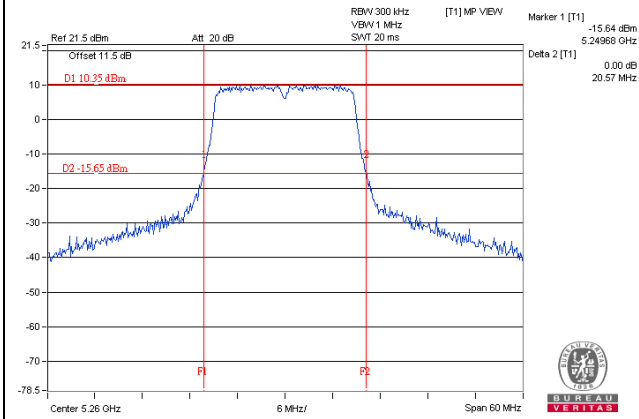

802.11ac (VHT80)

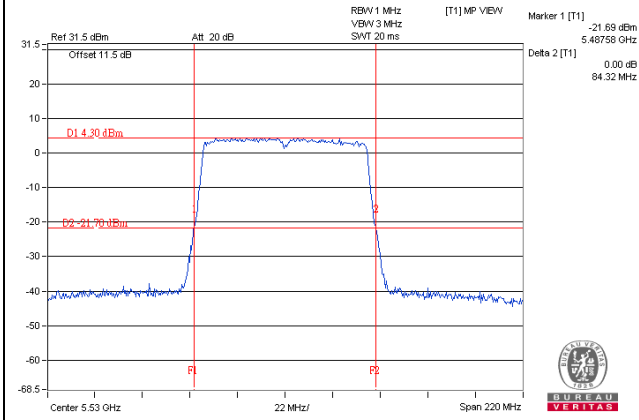

Radio 3: CDD Mode

802.11a

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | Pass / Fail |
|-------|-------------|-----------------------|-------------|
| 52 | 5260 | 37.73 | Pass |
| 60 | 5300 | 36.02 | Pass |
| 64 | 5320 | 34.26 | Pass |
| 100 | 5500 | 30.56 | Pass |
| 116 | 5580 | 41.44 | Pass |
| 140 | 5700 | 25.93 | Pass |

802.11n (HT20)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | Pass / Fail |
|-------|-------------|-----------------------|-------------|
| 52 | 5260 | 40.67 | Pass |
| 60 | 5300 | 39.47 | Pass |
| 64 | 5320 | 32.84 | Pass |
| 100 | 5500 | 29.30 | Pass |
| 116 | 5580 | 45.27 | Pass |
| 140 | 5700 | 27.30 | Pass |





802.11n (HT40)

| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | Pass / Fail |
|-------|-------------|-----------------------|-------------|
| 54 | 5270 | 79.00 | Pass |
| 62 | 5310 | 52.26 | Pass |
| 102 | 5510 | 52.32 | Pass |
| 110 | 5550 | 81.21 | Pass |
| 134 | 5670 | 59.19 | Pass |

802.11ac (VHT80)


| Chan. | Freq. (MHz) | 26dBc Bandwidth (MHz) | Pass / Fail |
|-------|-------------|-----------------------|-------------|
| 58 | 5290 | 101.80 | Pass |
| 106 | 5530 | 102.37 | Pass |

Spectrum Plot of Worst Value

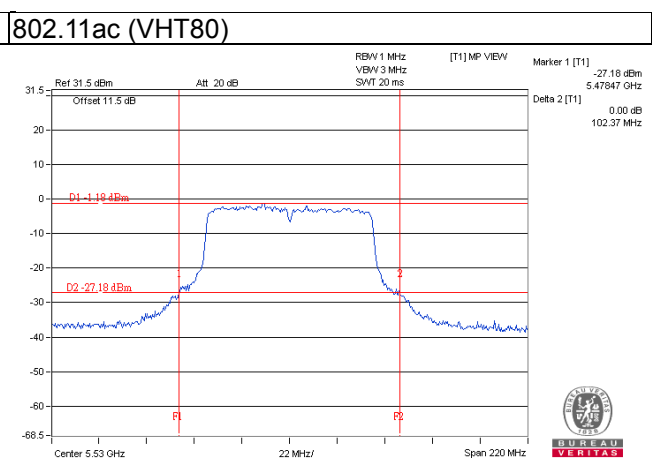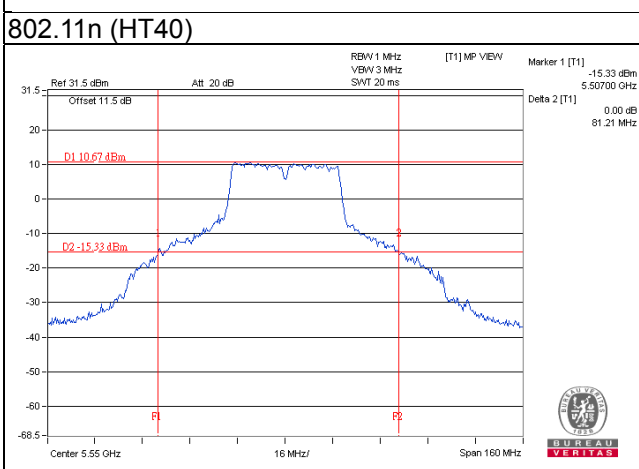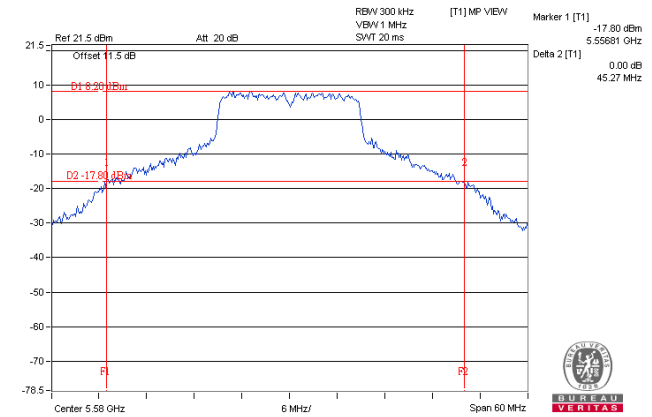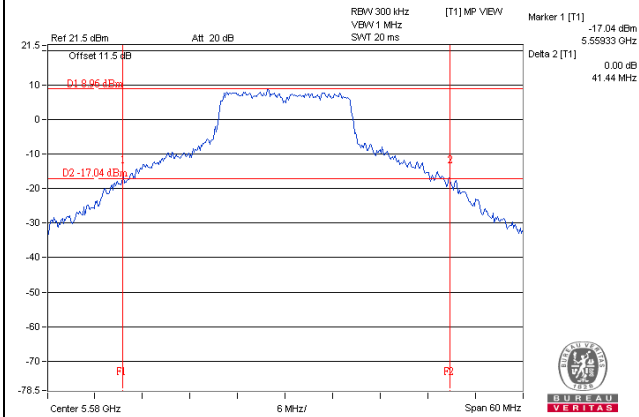

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sample. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Result

Radio 2: CDD Mode

802.11a

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|-------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 52 | 5260 | 16.44 | 16.44 |
| 60 | 5300 | 16.44 | 16.44 |
| 64 | 5320 | 16.44 | 16.44 |
| 100 | 5500 | 16.44 | 16.44 |
| 116 | 5580 | 16.44 | 16.44 |
| 140 | 5700 | 16.56 | 16.44 |

802.11n (HT20)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|-------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 52 | 5260 | 17.64 | 17.64 |
| 60 | 5300 | 17.64 | 17.52 |
| 64 | 5320 | 17.64 | 17.64 |
| 100 | 5500 | 17.52 | 17.64 |
| 116 | 5580 | 17.52 | 17.76 |
| 140 | 5700 | 17.64 | 17.64 |

802.11n (HT40)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|-------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 54 | 5270 | 36.12 | 36.12 |
| 62 | 5310 | 36.12 | 36.12 |
| 102 | 5510 | 36.12 | 36.12 |
| 110 | 5550 | 36.12 | 36.12 |
| 134 | 5670 | 36.12 | 36.12 |



802.11ac (VHT80)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|-------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 58 | 5290 | 75.84 | 75.84 |
| 106 | 5530 | 75.84 | 75.84 |

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

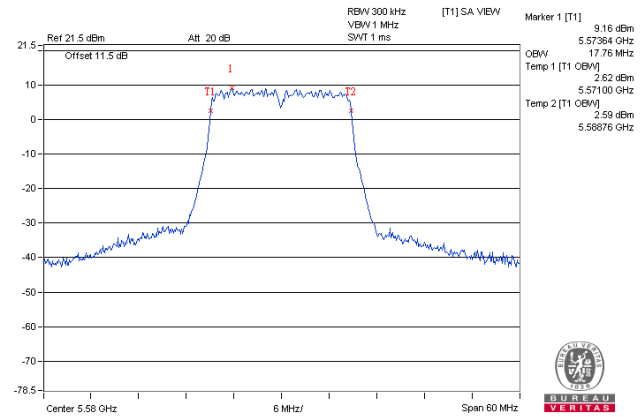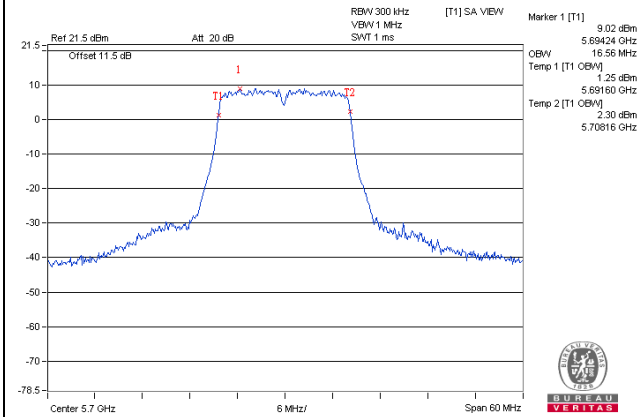

802.11n (HT40)

802.11ac (VHT80)

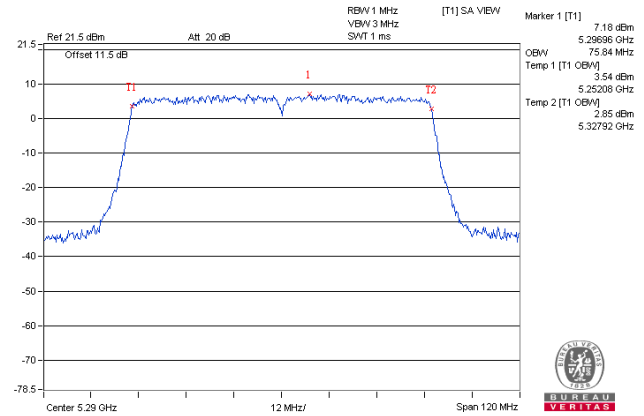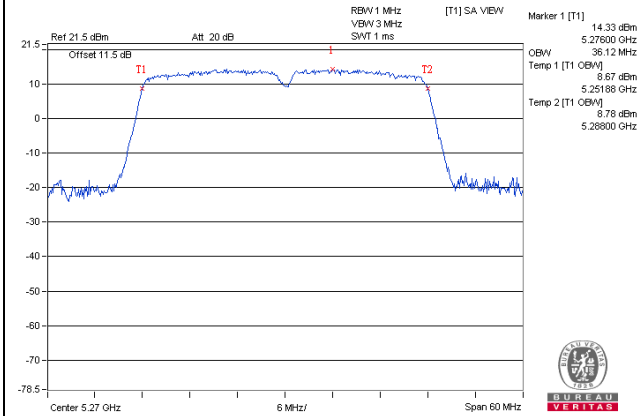

Radio 2: Beamforming Mode

802.11n (HT20)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|-------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 52 | 5260 | 18.76 | 18.76 |
| 60 | 5300 | 18.64 | 18.76 |
| 64 | 5320 | 18.76 | 18.76 |
| 100 | 5500 | 18.76 | 18.76 |
| 116 | 5580 | 18.76 | 18.76 |
| 140 | 5700 | 18.76 | 18.76 |

802.11n (HT40)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|-------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 54 | 5270 | 36.36 | 36.24 |
| 62 | 5310 | 36.36 | 36.24 |
| 102 | 5510 | 36.12 | 36.24 |
| 110 | 5550 | 36.24 | 36.36 |
| 134 | 5670 | 36.24 | 36.24 |



802.11ac (VHT80)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) | |
|-------|-------------|--------------------------|---------|
| | | Chain 0 | Chain 1 |
| 58 | 5290 | 75.84 | 75.84 |
| 106 | 5530 | 75.84 | 75.84 |


Spectrum Plot of Worst Value

802.11n (HT20)

802.11n (HT40)

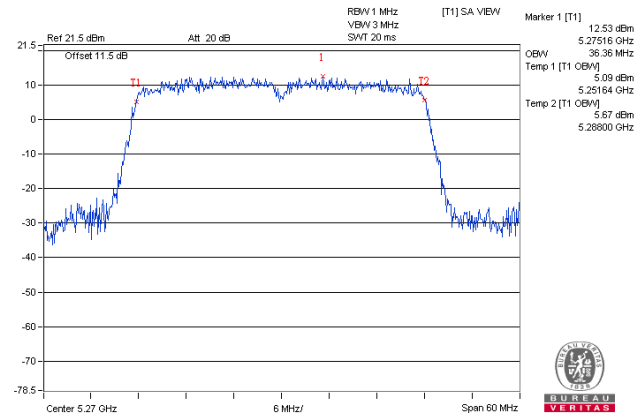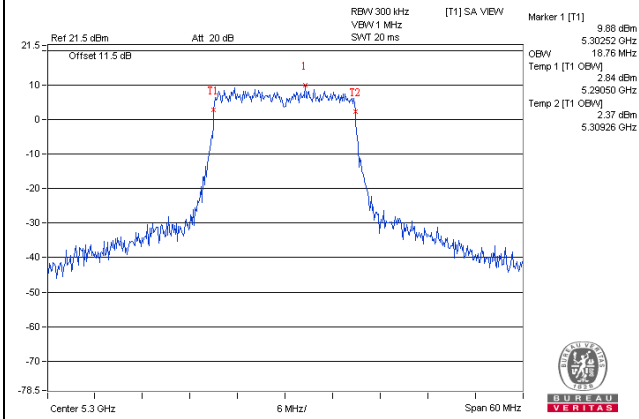

802.11ac (VHT80)

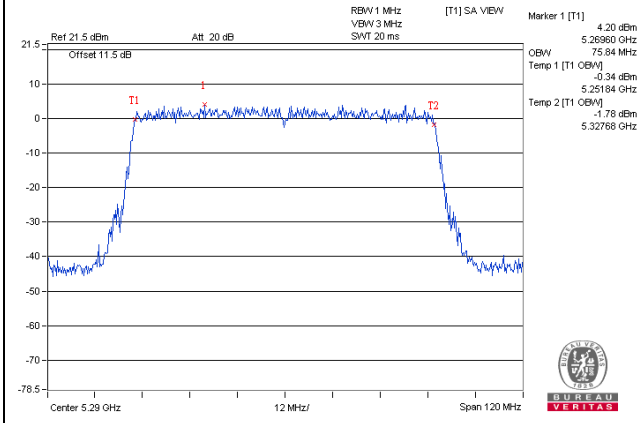

Radio 3: CDD Mode

802.11a

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) |
|-------|-------------|--------------------------|
| 52 | 5260 | 22.56 (Note) |
| 60 | 5300 | 21.36 |
| 64 | 5320 | 19.92 |
| 100 | 5500 | 18.00 |
| 116 | 5580 | 25.68 |
| 140 | 5700 | 17.16 |

Note: Refer to next page for spectral power density plot

802.11n (HT20)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) |
|-------|-------------|--------------------------|
| 52 | 5260 | 21.00 (Note) |
| 60 | 5300 | 21.96 |
| 64 | 5320 | 19.56 |
| 100 | 5500 | 18.60 |
| 116 | 5580 | 25.92 |
| 140 | 5700 | 18.12 |

Note: Refer to next page for spectral power density plot





802.11n (HT40)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) |
|-------|-------------|--------------------------|
| 54 | 5270 | 38.52 |
| 62 | 5310 | 37.32 |
| 102 | 5510 | 37.32 |
| 110 | 5550 | 39.12 |
| 134 | 5670 | 37.80 |



802.11ac (VHT80)

| Chan. | Freq. (MHz) | Occupied Bandwidth (MHz) |
|-------|-------------|--------------------------|
| 58 | 5290 | 76.32 |
| 106 | 5530 | 76.56 |

Spectrum Plot of Worst Value

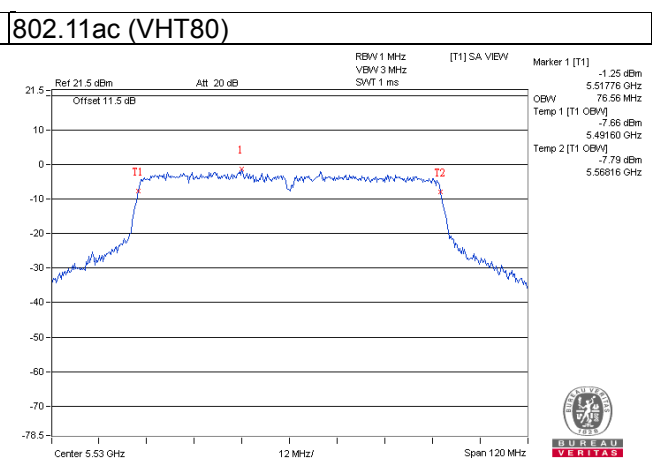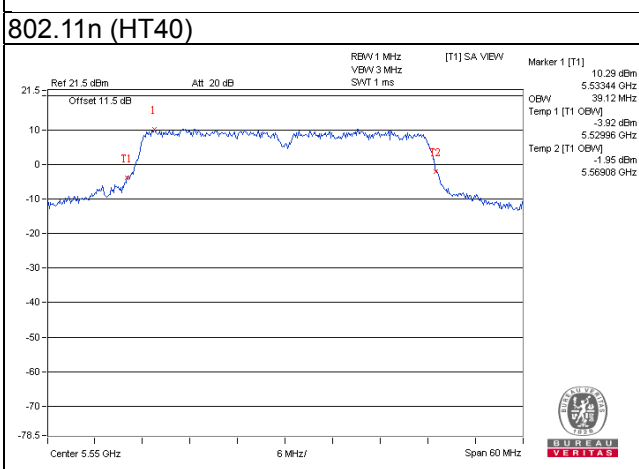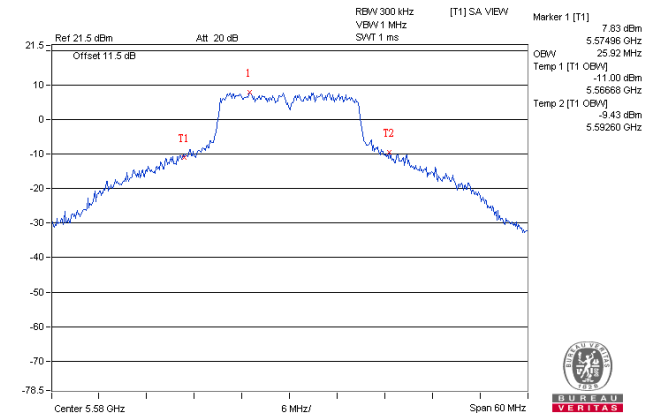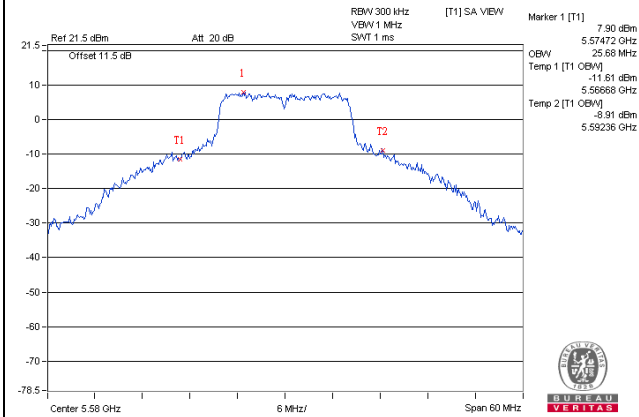

The spectral power density for operation within the band 5150-5250 MHz.

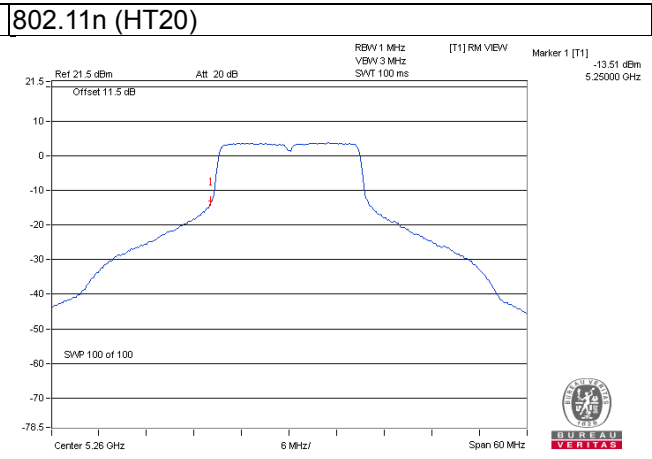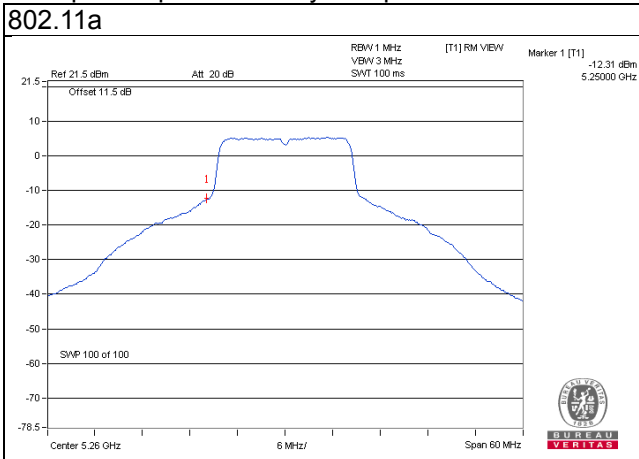

EUT MAXIMUM CONDUCTED POWER

Radio 2: CDD Mode

802.11a

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 107.926 | 20.33 |
| 5470~5725 | 109.245 | 20.38 |

802.11n (HT20)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 111.440 | 20.47 |
| 5470~5725 | 110.146 | 20.42 |

802.11n (HT40)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 193.163 | 22.86 |
| 5470~5725 | 192.196 | 22.84 |

802.11ac (VHT80)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 75.868 | 18.80 |
| 5470~5725 | 85.654 | 19.33 |

Radio 2: Beamforming Mode

802.11n (HT20)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 128.538 | 21.09 |
| 5470~5725 | 129.876 | 21.14 |

802.11n (HT40)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 135.392 | 21.32 |
| 5470~5725 | 134.931 | 21.30 |

802.11ac (VHT80)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 69.190 | 18.40 |
| 5470~5725 | 58.786 | 17.69 |

Radio 3: CDD Mode

802.11a

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 63.973 | 18.06 |
| 5470~5725 | 45.082 | 16.54 |

802.11n (HT20)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 57.677 | 17.61 |
| 5470~5725 | 43.954 | 16.43 |

802.11n (HT40)

| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 56.885 | 17.55 |
| 5470~5725 | 42.855 | 16.32 |

802.11ac (VHT80)


| Frequency Band (MHz) | Max. Power | |
|----------------------|-------------------|--------------------|
| | Output Power (mW) | Output Power (dBm) |
| 5250~5350 | 4.426 | 6.46 |
| 5470~5725 | 4.955 | 6.95 |

4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

| Operation Band | EUT Category | | LIMIT |
|----------------|--------------|-----------------------------------|---------------|
| U-NII-1 | --- | Outdoor Access Point | 17dBm/ MHz |
| | --- | Fixed point-to-point Access Point | |
| | --- | Indoor Access Point | |
| | --- | Mobile and Portable client device | 11dBm/ MHz |
| U-NII-2A | √ | | 11dBm/ MHz |
| U-NII-2C | √ | | 11dBm/ MHz |
| U-NII-3 | --- | | 30dBm/ 500kHz |

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

Using method SA-1, Duty cycle >98%:

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value

Using method SA-2, Duty cycle <98%

- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- Sweep time = auto, trigger set to “free run”.
- Trace average at least 100 traces in power averaging mode.
- Record the max value and add 10 log (1/duty cycle)

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as Item 4.3.6.

4.5.7 Test Results

Radio 2: CDD Mode

802.11a

| Chan. | Freq. (MHz) | PSD (dBm) | | Total PSD w/o duty factor (dBm) | Duty factor | Total PSD with duty factor (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|-----------|---------|---------------------------------|-------------|----------------------------------|------------------|-------------|
| | | Chain 0 | Chain 1 | | | | | |
| 52 | 5260 | 5.12 | 4.90 | 8.03 | 0.24 | 8.27 | 8.46 | Pass |
| 60 | 5300 | 4.39 | 4.64 | 7.53 | 0.24 | 7.77 | 8.46 | Pass |
| 64 | 5320 | 4.53 | 4.77 | 7.67 | 0.24 | 7.91 | 8.46 | Pass |
| 100 | 5500 | 4.34 | 5.08 | 7.74 | 0.24 | 7.98 | 8.46 | Pass |
| 116 | 5580 | 4.33 | 5.04 | 7.72 | 0.24 | 7.96 | 8.46 | Pass |
| 140 | 5700 | 4.12 | 5.08 | 7.64 | 0.24 | 7.88 | 8.46 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 8.54 \text{ dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11 - (8.54 - 6) = 8.46\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

| Chan. | Freq. (MHz) | PSD (dBm) | | Total PSD w/o duty factor (dBm) | Duty factor | Total PSD with duty factor (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|-----------|---------|---------------------------------|-------------|----------------------------------|------------------|-------------|
| | | Chain 0 | Chain 1 | | | | | |
| 52 | 5260 | 4.79 | 4.94 | 7.88 | 0.09 | 7.97 | 8.46 | Pass |
| 60 | 5300 | 4.75 | 5.22 | 8.00 | 0.09 | 8.09 | 8.46 | Pass |
| 64 | 5320 | 4.83 | 5.26 | 8.06 | 0.09 | 8.15 | 8.46 | Pass |
| 100 | 5500 | 4.36 | 4.93 | 7.67 | 0.09 | 7.76 | 8.46 | Pass |
| 116 | 5580 | 4.21 | 4.64 | 7.44 | 0.09 | 7.53 | 8.46 | Pass |
| 140 | 5700 | 4.00 | 4.49 | 7.26 | 0.09 | 7.35 | 8.46 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 8.54 \text{ dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11 - (8.54 - 6) = 8.46\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

| Chan. | Freq. (MHz) | PSD (dBm) | | Total PSD w/o duty factor (dBm) | Duty factor | Total PSD with duty factor (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|-----------|---------|---------------------------------|-------------|----------------------------------|------------------|-------------|
| | | Chain 0 | Chain 1 | | | | | |
| 54 | 5270 | 4.44 | 4.52 | 7.49 | 0.25 | 7.74 | 8.46 | Pass |
| 62 | 5310 | 2.65 | 2.86 | 5.76 | 0.25 | 6.01 | 8.46 | Pass |
| 102 | 5510 | 1.55 | 2.07 | 4.82 | 0.25 | 5.07 | 8.46 | Pass |
| 110 | 5550 | 3.39 | 3.95 | 6.68 | 0.25 | 6.93 | 8.46 | Pass |
| 134 | 5670 | 2.32 | 2.94 | 5.65 | 0.25 | 5.90 | 8.46 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 8.54 \text{ dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11-(8.54-6) = 8.46\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

| Chan. | Freq. (MHz) | PSD (dBm) | | Total PSD w/o duty factor (dBm) | Duty factor | Total PSD with duty factor (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|-----------|---------|---------------------------------|-------------|----------------------------------|------------------|-------------|
| | | Chain 0 | Chain 1 | | | | | |
| 58 | 5290 | -3.02 | -2.95 | 0.02 | 0.70 | 0.72 | 8.46 | Pass |
| 106 | 5530 | -3.46 | -2.91 | -0.17 | 0.70 | 0.53 | 8.46 | Pass |



Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 8.54 \text{ dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11-(8.54-6) = 8.46\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value



802.11a / Chain 0 / CH 52

802.11n (HT20) / Chain 1 / CH 64

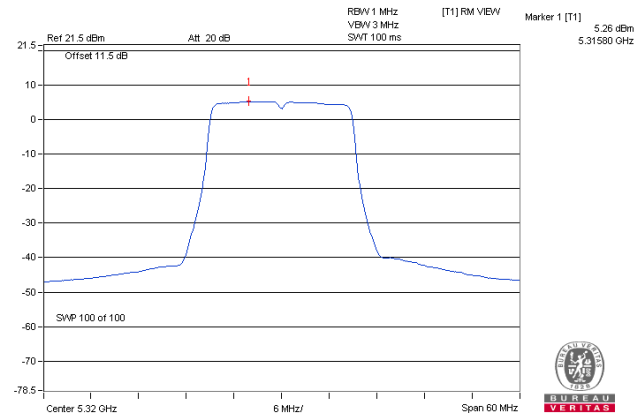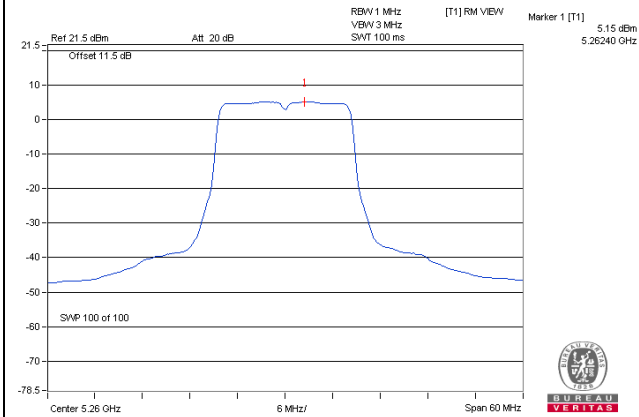

802.11n (HT40) / Chain 1 / CH 54

802.11ac (VHT80) / Chain 1 / CH 106

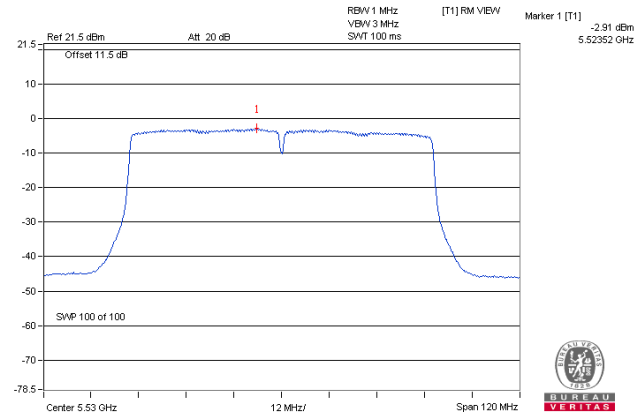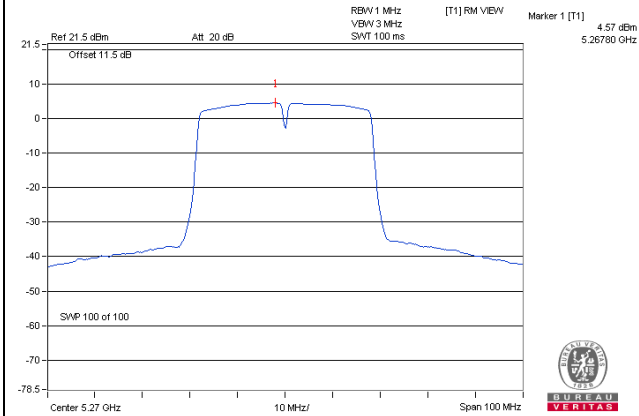

Radio 2: Beamforming Mode

802.11n (HT20)

| Chan. | Freq. (MHz) | PSD (dBm) | | Total PSD (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|-----------|---------|-----------------|------------------|-------------|
| | | Chain 0 | Chain 1 | | | |
| 52 | 5260 | 5.36 | 4.93 | 8.16 | 8.46 | Pass |
| 60 | 5300 | 5.30 | 4.87 | 8.10 | 8.46 | Pass |
| 64 | 5320 | 4.36 | 3.88 | 7.14 | 8.46 | Pass |
| 100 | 5500 | 3.15 | 3.71 | 6.45 | 8.46 | Pass |
| 116 | 5580 | 4.52 | 4.02 | 7.29 | 8.46 | Pass |
| 140 | 5700 | 1.37 | 1.51 | 4.45 | 8.46 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 8.54 \text{ dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11-(8.54-6) = 8.46\text{dBm}$.

802.11n (HT40)

| Chan. | Freq. (MHz) | PSD (dBm) | | Total PSD w/o duty factor (dBm) | Duty factor | Total PSD with duty factor (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|-----------|---------|---------------------------------|-------------|----------------------------------|------------------|-------------|
| | | Chain 0 | Chain 1 | | | | | |
| 54 | 5270 | 2.61 | 2.21 | 5.43 | 0.22 | 5.65 | 8.46 | Pass |
| 62 | 5310 | -1.34 | -1.60 | 1.54 | 0.22 | 1.76 | 8.46 | Pass |
| 102 | 5510 | -3.02 | -3.11 | -0.05 | 0.22 | 0.17 | 8.46 | Pass |
| 110 | 5550 | 1.04 | 1.17 | 4.12 | 0.22 | 4.34 | 8.46 | Pass |
| 134 | 5670 | -2.18 | -2.24 | 0.8 | 0.22 | 1.02 | 8.46 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 8.54 \text{ dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $11-(8.54-6) = 8.46\text{dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.



802.11ac (VHT80)

| Chan. | Freq. (MHz) | PSD (dBm) | | Total PSD w/o duty factor (dBm) | Duty factor | Total PSD with duty factor (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|-----------|---------|---------------------------------|-------------|----------------------------------|------------------|-------------|
| | | Chain 0 | Chain 1 | | | | | |
| 58 | 5290 | -6.16 | -5.47 | -2.79 | 0.36 | -2.43 | 8.46 | Pass |
| 106 | 5530 | -5.67 | -6.71 | -3.15 | 0.36 | -2.79 | 8.46 | Pass |

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2/2] = 8.54 \text{ dBi} > 6 \text{ dBi}$, so the power density limit shall be reduced to $11 - (8.54 - 6) = 8.46 \text{ dBm}$.
- Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value

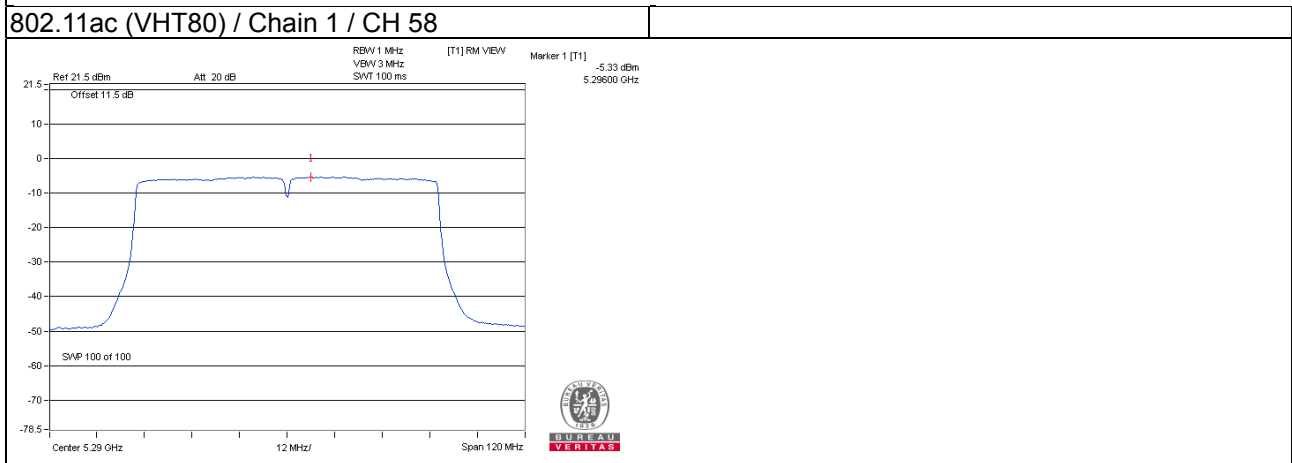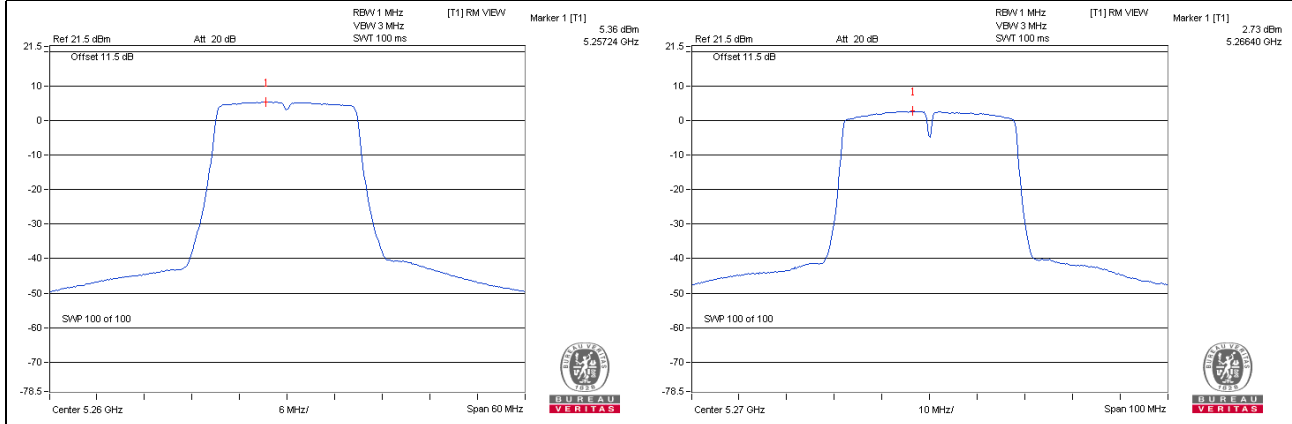

Radio 3: CDD Mode

802.11a

| Chan. | Freq. (MHz) | PSD w/o duty factor (dBm) | Duty factor | PSD with duty factor (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|---------------------------|-------------|----------------------------|------------------|-------------|
| 52 | 5260 | 5.31 | 0.21 | 5.52 | 11 | Pass |
| 60 | 5300 | 5.34 | 0.21 | 5.55 | 11 | Pass |
| 64 | 5320 | 4.39 | 0.21 | 4.60 | 11 | Pass |
| 100 | 5500 | 1.70 | 0.21 | 1.91 | 11 | Pass |
| 116 | 5580 | 3.85 | 0.21 | 4.06 | 11 | Pass |
| 140 | 5700 | 0.25 | 0.21 | 0.46 | 11 | Pass |

Note: Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

| Chan. | Freq. (MHz) | PSD w/o duty factor (dBm) | Duty factor | PSD with duty factor (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|---------------------------|-------------|----------------------------|------------------|-------------|
| 52 | 5260 | 3.81 | 0.28 | 4.09 | 11 | Pass |
| 60 | 5300 | 5.13 | 0.28 | 5.41 | 11 | Pass |
| 64 | 5320 | 3.78 | 0.28 | 4.06 | 11 | Pass |
| 100 | 5500 | 0.90 | 0.28 | 1.18 | 11 | Pass |
| 116 | 5580 | 3.38 | 0.28 | 3.66 | 11 | Pass |
| 140 | 5700 | -1.63 | 0.28 | -1.35 | 11 | Pass |

Note: Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)

| Chan. | Freq. (MHz) | PSD w/o duty factor (dBm) | Duty factor | PSD with duty factor (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|---------------------------|-------------|----------------------------|------------------|-------------|
| 54 | 5270 | 1.72 | 0.75 | 2.47 | 11 | Pass |
| 62 | 5310 | -5.09 | 0.75 | -4.34 | 11 | Pass |
| 102 | 5510 | -6.25 | 0.75 | -5.50 | 11 | Pass |
| 110 | 5550 | -0.05 | 0.75 | 0.70 | 11 | Pass |
| 134 | 5670 | -2.06 | 0.75 | -1.31 | 11 | Pass |

Note: Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)



| Chan. | Freq. (MHz) | PSD w/o duty factor (dBm) | Duty factor | PSD with duty factor (dBm) | Max. Limit (dBm) | Pass / Fail |
|-------|-------------|---------------------------|-------------|----------------------------|------------------|-------------|
| 58 | 5290 | -12.59 | 1.48 | -11.11 | 11 | Pass |
| 106 | 5530 | -13.00 | 1.48 | -11.52 | 11 | Pass |

Note: Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value



802.11a

802.11n (HT20)

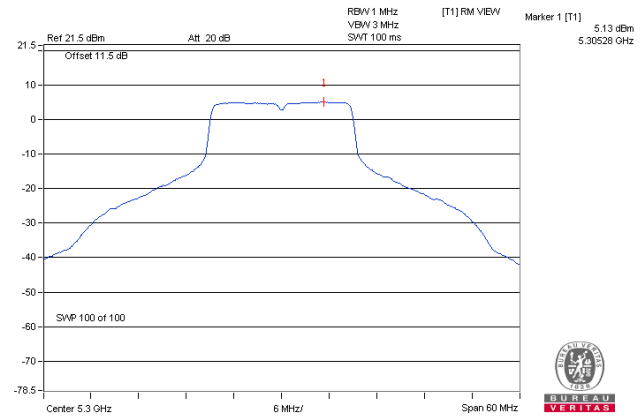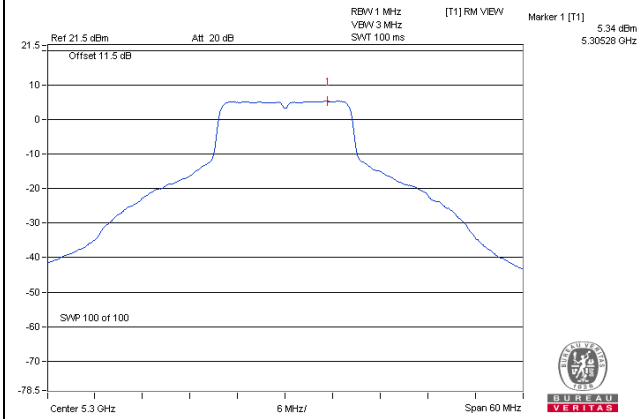

802.11n (HT40)

802.11ac (VHT80)

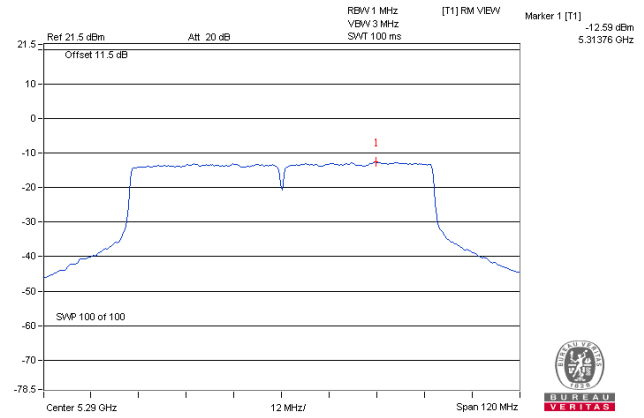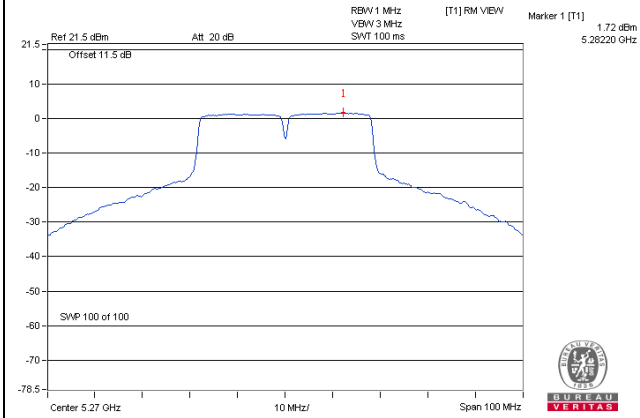


4.6 Frequency Stability

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

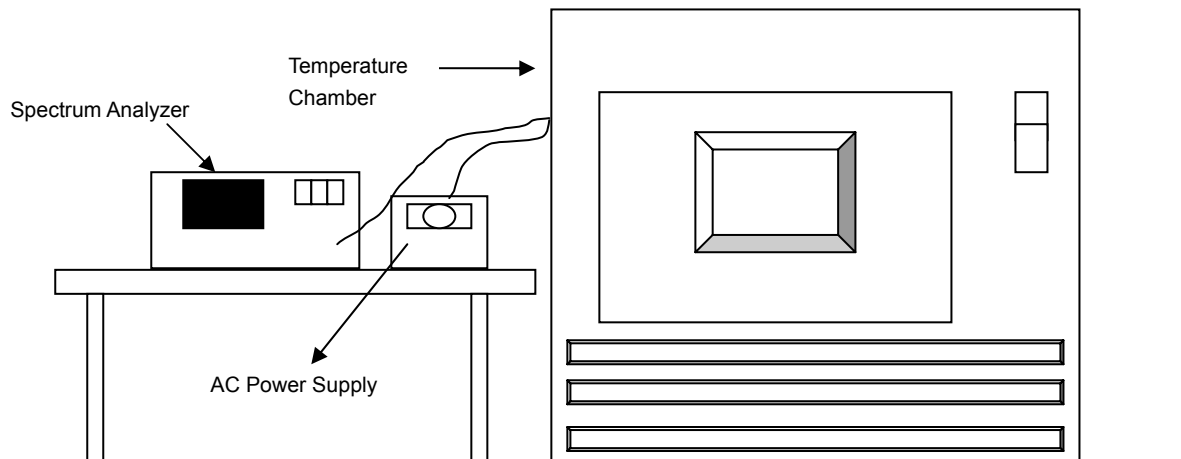

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Radio 2: CDD Mode

| Frequency Stability Versus Temp. | | | | | | | | | |
|----------------------------------|--------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|---------------------|
| Operating Frequency: 5580MHz | | | | | | | | | |
| Temp. (°C) | Power Supply (Vac) | 0 Minute | | 2 Minute | | 5 Minute | | 10 Minute | |
| | | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) |
| 50 | 120 | 5580.0175 | 0.00031 | 5580.015 | 0.00027 | 5580.017 | 0.00030 | 5580.0167 | 0.00030 |
| 40 | 120 | 5579.9764 | -0.00042 | 5579.9773 | -0.00041 | 5579.9739 | -0.00047 | 5579.9773 | -0.00041 |
| 30 | 120 | 5580.0014 | 0.00003 | 5579.9998 | 0.00000 | 5580.0015 | 0.00003 | 5579.9987 | -0.00002 |
| 20 | 120 | 5579.9909 | -0.00016 | 5579.9872 | -0.00023 | 5579.9889 | -0.00020 | 5579.9898 | -0.00018 |
| 10 | 120 | 5579.9789 | -0.00038 | 5579.9766 | -0.00042 | 5579.9815 | -0.00033 | 5579.9793 | -0.00037 |
| 0 | 120 | 5579.9977 | -0.00004 | 5579.9988 | -0.00002 | 5579.9998 | 0.00000 | 5579.9972 | -0.00005 |
| -10 | 120 | 5579.9904 | -0.00017 | 5579.9909 | -0.00016 | 5579.9919 | -0.00015 | 5579.9911 | -0.00016 |
| -20 | 120 | 5579.9807 | -0.00035 | 5579.977 | -0.00041 | 5579.9813 | -0.00034 | 5579.9774 | -0.00041 |
| -30 | 120 | 5580.0149 | 0.00027 | 5580.0119 | 0.00021 | 5580.0113 | 0.00020 | 5580.0151 | 0.00027 |

| Frequency Stability Versus Voltage | | | | | | | | | |
|------------------------------------|--------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|---------------------|
| Operating Frequency: 5580MHz | | | | | | | | | |
| Temp. (°C) | Power Supply (Vac) | 0 Minute | | 2 Minute | | 5 Minute | | 10 Minute | |
| | | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) |
| 20 | 138 | 5579.9901 | -0.00018 | 5579.9862 | -0.00025 | 5579.9879 | -0.00022 | 5579.9898 | -0.00018 |
| | 120 | 5579.9909 | -0.00016 | 5579.9872 | -0.00023 | 5579.9889 | -0.00020 | 5579.9898 | -0.00018 |
| | 102 | 5579.991 | -0.00016 | 5579.9879 | -0.00022 | 5579.9889 | -0.00020 | 5579.99 | -0.00018 |

Radio 3: CDD Mode

| Frequency Stability Versus Temp. | | | | | | | | | |
|----------------------------------|--------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|---------------------|
| Operating Frequency: 5580MHz | | | | | | | | | |
| Temp. (°C) | Power Supply (Vac) | 0 Minute | | 2 Minute | | 5 Minute | | 10 Minute | |
| | | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) |
| 50 | 120 | 5580.02 | 0.00036 | 5580.0186 | 0.00033 | 5580.0185 | 0.00033 | 5580.0212 | 0.00038 |
| 40 | 120 | 5579.9932 | -0.00012 | 5579.9944 | -0.00010 | 5579.9917 | -0.00015 | 5579.9945 | -0.00010 |
| 30 | 120 | 5580.0278 | 0.00050 | 5580.0264 | 0.00047 | 5580.0275 | 0.00049 | 5580.0265 | 0.00047 |
| 20 | 120 | 5580.0051 | 0.00009 | 5580.0033 | 0.00006 | 5580.0043 | 0.00008 | 5580.0031 | 0.00006 |
| 10 | 120 | 5580.0207 | 0.00037 | 5580.0227 | 0.00041 | 5580.0239 | 0.00043 | 5580.0221 | 0.00040 |
| 0 | 120 | 5579.9799 | -0.00036 | 5579.9802 | -0.00035 | 5579.979 | -0.00038 | 5579.9803 | -0.00035 |
| -10 | 120 | 5579.9747 | -0.00045 | 5579.9763 | -0.00042 | 5579.9773 | -0.00041 | 5579.9775 | -0.00040 |
| -20 | 120 | 5580.0154 | 0.00028 | 5580.0149 | 0.00027 | 5580.0176 | 0.00032 | 5580.0169 | 0.00030 |
| -30 | 120 | 5579.9795 | -0.00037 | 5579.9808 | -0.00034 | 5579.9804 | -0.00035 | 5579.9833 | -0.00030 |

| Frequency Stability Versus Voltage | | | | | | | | | |
|------------------------------------|--------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|---------------------|-------------------------|---------------------|
| Operating Frequency: 5580MHz | | | | | | | | | |
| Temp. (°C) | Power Supply (Vac) | 0 Minute | | 2 Minute | | 5 Minute | | 10 Minute | |
| | | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) | Measured Frequency(MHz) | Frequency Drift (%) |
| 20 | 138 | 5580.0059 | 0.00011 | 5580.0033 | 0.00006 | 5580.0052 | 0.00009 | 5580.0021 | 0.00004 |
| | 120 | 5580.0051 | 0.00009 | 5580.0033 | 0.00006 | 5580.0043 | 0.00008 | 5580.0031 | 0.00006 |
| | 102 | 5580.004 | 0.00007 | 5580.0036 | 0.00006 | 5580.0048 | 0.00009 | 5580.0021 | 0.00004 |

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---