

**COMPLIANCE WORLDWIDE INC.
TEST REPORT 275-19R1**

In Accordance with the Requirements of

**Federal Communications Commission 47 CFR Part 15.250, Subpart C
Wideband Systems within the band 5925 to 7250 MHz**

**ISED RSS-220, Issue 1 (March 2009) + Amendment 1 (July 2018)
Devices Using Ultra-Wideband (UWB) Technology**

Issued to

**iRobot Corporation
8 Crosby Drive
Bedford, MA 01730**


For the

**Terra™ t7 Robot Mower
RLA-Y1**

FCC ID: UFERLA-Y1


**Report Issued on August 2, 2019
Revision R1 Issued on August 7, 2019**

Tested By



Larry K. Stillings

Reviewed By



Brian F. Breault

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

Table of Contents

1. Scope.....	3
2. Product Details	3
2.1. Manufacturer	3
2.2. Model Number.....	3
2.3. Serial Number	3
2.4. Description	3
2.5. Power Source.....	3
2.6. Hardware Revision.....	3
2.7. Software Revision	3
2.8. Modulation Type.....	3
2.9. Operating Frequency	3
2.10. EMC Modifications	3
3. Product Configuration	3
3.1. Operational Characteristics & Software	3
3.2. Cables	3
3.3. EUT Hardware	4
3.4. Support Equipment	4
3.5. Test Setup	4
4. Measurements Parameters	5
4.1. Measurement Equipment Used to Perform Test	5
4.2. Measurement & Equipment Setup	6
4.3. Measurement Procedure	6
4.4. Measurement Uncertainty.....	6
5. Measurement Summary	7
6. Measurement Data	8
6.1. Antenna Requirement	8
6.2. Operational Requirements	8
6.3. UWB Bandwidth	9
6.4. Spurious Radiated Emissions	10
6.5. Radiated Emissions in GPS Bands.....	23
6.6. RMS Power in a 1 MHz Bandwidth.....	28
6.7. Peak Emissions in a 50 MHz Bandwidth	30
6.8. Conducted Emissions Test Setup.....	32
6.9. Conducted Emissions Results	33
6.10. 99% Emissions Bandwidth.....	35
6.11. Public Exposure to Radio Frequency Energy Levels.....	36
7. Test Site Description	38
8. Test Images	39
8.1. Spurious and Harmonic Emissions - 10 kHz to 1 GHz Front.....	39
8.2. Spurious and Harmonic Emissions - 10 kHz to 30 MHz Rear	40
8.3. Spurious and Harmonic Emissions - 30 MHz to 1 GHz Rear	41
8.4. Spurious and Harmonic Emissions - 1 to 18 GHz Front	42
8.5. Spurious and Harmonic Emissions - 1 to 18 GHz Rear.....	43
8.6. Spurious and Harmonic Emissions - 18 to 40 GHz Side	44
8.7. Frequency Stability Setup	45
8.9. Conducted Emissions Test Setup.....	47

1. Scope

This test report certifies that the iRobot Corporation Terra™ t7 RLA-Y1 as tested, meets the FCC Part 15.250, Subpart C and ISED RSS-220 requirements. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required. Revision R1 updates the RF Exposure exhibit.

2. Product Details

- 2.1. Manufacturer:** iRobot Corporation
- 2.2. Product Name:** Terra™ t7
- 2.3. Model Number:** RLA-Y1
- 2.4. Serial Number:** EP1-573
- 2.5. Description:** The Terra RLA-Y1 is an autonomous robotic lawn mower.
- 2.6. Power Source:** 36 Volt Rechargeable Battery
- 2.7. Hardware Revision:** N/A
- 2.8. Software Revision:** Navigation 0.5.2
- 2.9. Modulation Type:** Pulse Modulation, Frequency Hopping
- 2.10. Operating Frequency:** CH 5 – 6.49 GHz Nominal
- 2.11. EMC Modifications:** None

3. Product Configuration

3.1 Operational Characteristics & Software

Hardware Setup:

Install the batteries within the unit. Using a laptop and serial cable the unit was programmed to transmit a typical waveform used for communication in “continuous” mode (back to back mode).

3.2. Cables

Cable Type	Length	Shield	From	To
None				

3. Product Configuration (cont.)


3.3. EUT Hardware

Manufacturer	Model/Part # / Options	Serial Number	Input Volts	Freq (Hz)	Description/Function
iRobot	RLA-Y1	EP1-573	36	DC	Battery
iRobot	AXD-Y1				BLE/WiFi Module: FCC ID: UFEAXD-Y1

3.4. Support Equipment

Manufacturer	Model/Part #	Serial Number	Description
None			

3.5. Test Setup Diagram

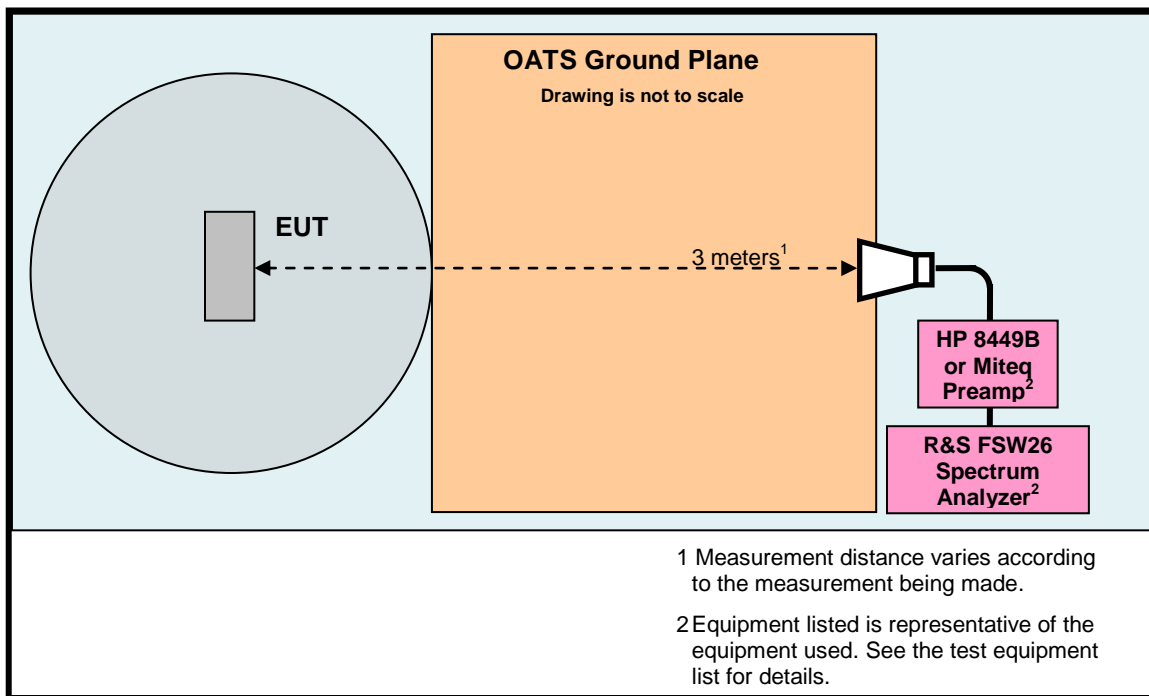

4. Measurements Parameters

4.1. Measurement Equipment Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due	Interval
EMI Receiver 9 kHz to 7 GHz	Rohde & Schwarz	ESR7	101156	9/10/2020	2 Years
Spectrum Analyzer 9 kHz to 40 GHz	Rohde & Schwarz	FSV40	100899	9/10/2020	2 Years
Spectrum Analyzer 10 Hz to 40 GHz	Rohde & Schwarz	FSVR40	100909	5/3/2020	3 Years
Spectrum Analyzer 3 Hz to 26.5 GHz	Rohde & Schwarz	FSW26	102044	9/13/2020	2 Years
Bilog Antenna 30 to 2000 MHz	Com-Power	AC-220	25509	2/13/2022	3 Years
Loop Antenna 9 kHz to 30 MHz	EMCO	6512	9309-1139	10/26/2019	3 Years
Preamplifier 100 MHz to 7 GHz	Miteq	AFS3-00100200-10-15P-4	988773	4/17/2020	2 Years
Preamplifier 100 MHz to 18 GHz	Miteq	AMF-7D-00101800-30-10P	1953081	4/16/2020	2 Years
Preamplifier 2 to 12 GHz	JCA	JCA48-4111B1	7087S	4/17/2020	2 Years
Preamplifier 1 to 26.5 GHz	Hewlett Packard	8449B	3008A01323	9/11/2020	2 Years
Preamplifier 18 to 40 GHz	Miteq	JSD42-21004200-40-5P	649199/649219	11/1/2019	1 Year
Horn Antenna 1 to 18 GHz	ETS-Lindgren	3117	00143292	3/21/2022	3 Years
Horn Antenna 18-40 GHz	Com Power	AH-840	101032	10/9/2020	2 Years
High Pass Filter 8 to 18 GHz	Micro-Tronics	HPM50107	G036	7/20/2019	1 Year
2.4 GHz Band Pass Filter	Micro-Tronics	BRM50702	150	1/23/2019	1 Year
Barometer	Control Company	4195	Cal ID# 236	4/3/2020	2 Years

¹ ESR7 Firmware revision: V3.36, SP2 Date installed: 11/02/2017 Previous V3.36, installed 05/16/2017.
² FSV40 Firmware revision: V2.30 SP4, Date installed: 05/04/2016 Previous V2.30 SP1, installed 10/22/2014.
³ FSVR40 Firmware revision: V2.23 SP1, Date installed: 08/19/2016 Previous V2.23, installed 10/20/2014.
⁴ FSW26 Firmware revision: V2.80, Date installed: 10/28/2017 Previous V2.61, installed 04/04/2017.

4. Measurements Parameters (continued)

4.2. Measurement & Equipment Setup

Test Dates:	5/14/2019, 6/25/2019, 7/8/2019, 7/9/2019, 8/1/2019
Test Engineers:	Brian Breault, Larry Stillings
Normal Site Temperature (15 - 35°C):	21.6
Relative Humidity (20 -75%RH):	35
Frequency Range:	30 kHz to 40 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	200 Hz – 10 kHz to 150 kHz
	9 kHz – 10 to 30 MHz
	120 kHz - 30 MHz to 1 GHz
EMI Receiver Avg Bandwidth:	1 MHz - Above 1 GHz
	300 Hz – 10 kHz to 150 kHz
	30 kHz – 10 to 30 MHz
Detector Function:	300 kHz - 30 MHz to 1 GHz
	3 MHz - Above 1 GHz
	Peak, Quasi-Peak, RMS & CISPR Average

4.3. Measurement Procedure

Test measurements were made in accordance FCC Parts 15.209, 15.250 Subpart C and ISED RSS-220, Issue 1 & A1.

The test methods used to generate the data is this test report is in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

4.4. Measurement Uncertainty

The following uncertainties are expressed for an expansion/coverage factor of K=2.

RF Frequency (out of band)	$\pm 1 \times 10^{-8}$
Radiated Emission of Transmitter to 100 GHz	± 4.55 dB
Radiated Emission of Receiver	± 4.55 dB
Temperature	$\pm 0.91^{\circ}$ C
Humidity	$\pm 5\%$

5. Measurements Summary

Test Requirement	FCC Rule Requirement	ISED Rule Requirement	Test Report Section	Result	Comment
Antenna Requirement	15.203	RSS-220 5.1 (b)	6.1	Compliant	
Operational Requirements	15.250 (a)	RSS-220	6.2	Compliant	
Wideband Bandwidth	15.250 (b)	RSS-220 2 RSS-220 5.1	6.3	Compliant	
Spurious Radiated Emissions	15.250 (d) (1) 15.209	RSS-220 3.4	6.4	Compliant	
Radiated Emissions in GPS Bands	15.250 (d) (2)	RSS-220 5.3.1 (e)	6.5	Compliant	
RMS Power in a 1 MHz Bandwidth	15.250 (d) (1)	RSS-220 5.3.1 (d)	6.6	Compliant	
Peak Emissions in a 50 MHz Bandwidth	15.250 (d) (3)	RSS-220 5.3.1 (g)	6.7	Compliant	
Conducted Emissions	15.207	RSS-GEN	6.8 6.9	Compliant	
99% Emission Bandwidth	N/A	RSS-GEN 6.7	6.10	Compliant	
Radio Frequency Exposure	FCC OET Bulletin 65 1.1307 (b) (1)	RSS-102, Issue 5	6.11	Compliant	

6. Measurement Data

6.1. Antenna Requirement (15.203, RSS-220 5.1 (b))

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply

Result: The antenna utilized by the device under test uses an on board u.fl connector to connect to the antenna.

6.2. Operational Requirements of the Device under Test (15.250 (a), RSS-220)

Requirement: The -10 dB bandwidth of a device operating under the provisions of this section must be contained within the 5925 to 7250 MHz band under all conditions of operation including the effects from stepped frequency, frequency hopping or other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

Result: Compliant

6.2.1 Frequency Stability over Temperature

Marker	Temp °C	Measured Frequency (MHz)	-10 dB Band Edges		15.250 Frequency Band		Result
			Lower	Upper	F _{MIN} (MHz)	F _{MAX} (MHz)	
-	OATS	6439.1	6282.2	6738.8	5925	7250	Compliant
-	Ambient	6552.0	6454.0	6649.9	5925	7250	Compliant
1	-20	6568.4	6459.0	6677.8	5925	7250	Compliant
2	-10	6395.6	6332.2	6459.0	5925	7250	Compliant
3	0	6493.5	6332.2	6654.8	5925	7250	Compliant
4	+10	6493.5	6333.2	6653.8	5925	7250	Compliant
5	+20	6489.6	6332.2	6646.9	5925	7250	Compliant
6	+30	6481.6	6333.2	6629.9	5925	7250	Compliant
7	+40	6484.1	6340.2	6627.9	5925	7250	Compliant
8	+50	6483.1	6337.2	6628.9	5925	7250	Compliant

6. Measurement Data (continued)

6.3. Wideband Bandwidth (15.250 (b), RSS-220 2, 5.1)

Requirement: The -10 dB bandwidth of the fundamental emission shall be at least 50 MHz.


Result: Compliant

6.3.1. Measurement Data – Values in GHz

f_M	The highest emission peak	6.5669
f_L	10 dB below the highest peak	6.2822
f_H	10 dB above the highest peak	6.7388
Bandwidth	Calculated: ($f_H - f_L$)	0.4565

6.3.2. Measurement Plot of 10 dB frequencies

275-19 iRobot Terra t7 AoA

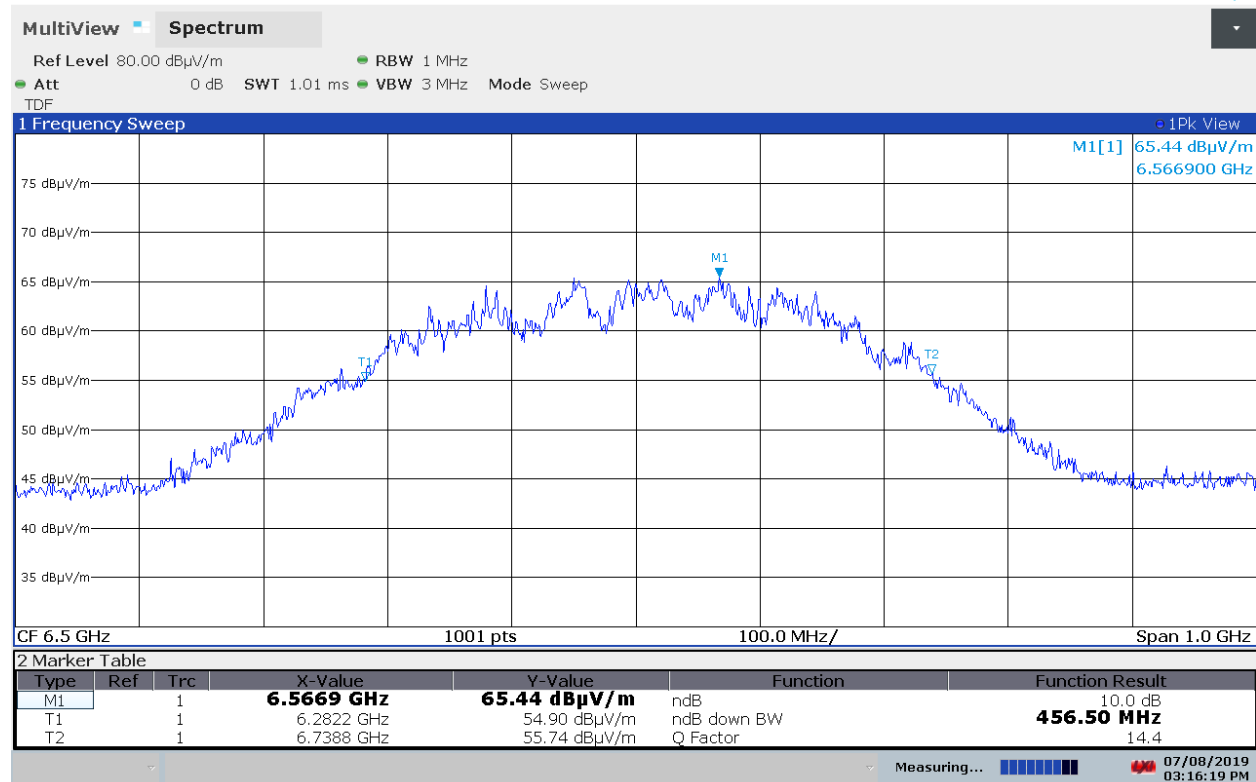

03:16:19 PM 07/08/2019

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (1), 15.209, RSS-220 3.4)

Requirement: The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dBμV/m)
960 - 1610	-75.3	19.9
1610 - 1990	-63.3	31.9
1990 - 3100	-61.3	33.9
3100 – 5925	-51.3	43.9
5925 – 7250	-41.3	53.9
7250 – 10,600	-51.3	43.9
Above 10,600	-61.3	33.9

Spurious Radiated Emissions (RSS-220 5.3.1 (d))

Requirement: The radiated emissions at or below 960 MHz from a device shall not exceed the limits in Section 3.4. The radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dBμV/m)
960 - 1610	-75.3	19.9
1610 – 4750	-70.0	25.2
4750 – 10,600	-41.3	53.9
Above 10,600	-61.3	33.9

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (1), 15.209, RSS-220 3.4 continued)

Radiated Emissions Field Strength Limits at 3 Meters (Section 15.250 (d),15.209)

Frequency (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
0.009 to 0.490	2,400/F	128.5 to 93.8
0.490 to 1.705	24,000/F	73.8 to 63
1.705 - 30	30	69.5
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
960 - 40,000	500	54

Test Notes: Refer to Section 4.1 for the test equipment used.

Frequency Range:	30 kHz to 40 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	200 Hz – 10 kHz to 150 kHz 9 kHz – 150 kHz to 30 MHz 120 kHz - 30 MHz to 1 GHz 1 MHz - Above 1 GHz
EMI Receiver Avg Bandwidth (minimum):	300 Hz – 10 kHz to 150 kHz 30 kHz – 150 kHz to 30 MHz 300 kHz - 30 MHz to 1 GHz 3 MHz - Above 1 GHz
Detector Function:	Peak, Quasi-Peak & Average

Note: The narrow band spikes in the frequency range of 960 MHz to 1.610 GHz are due to the digital circuitry and subjected to the spurious emissions limit in Part 15.209 of 500 µV / m at 3 meters or 54 dBµV / m.


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.1 Parallel Measurement Antenna – 30 to 150 kHz

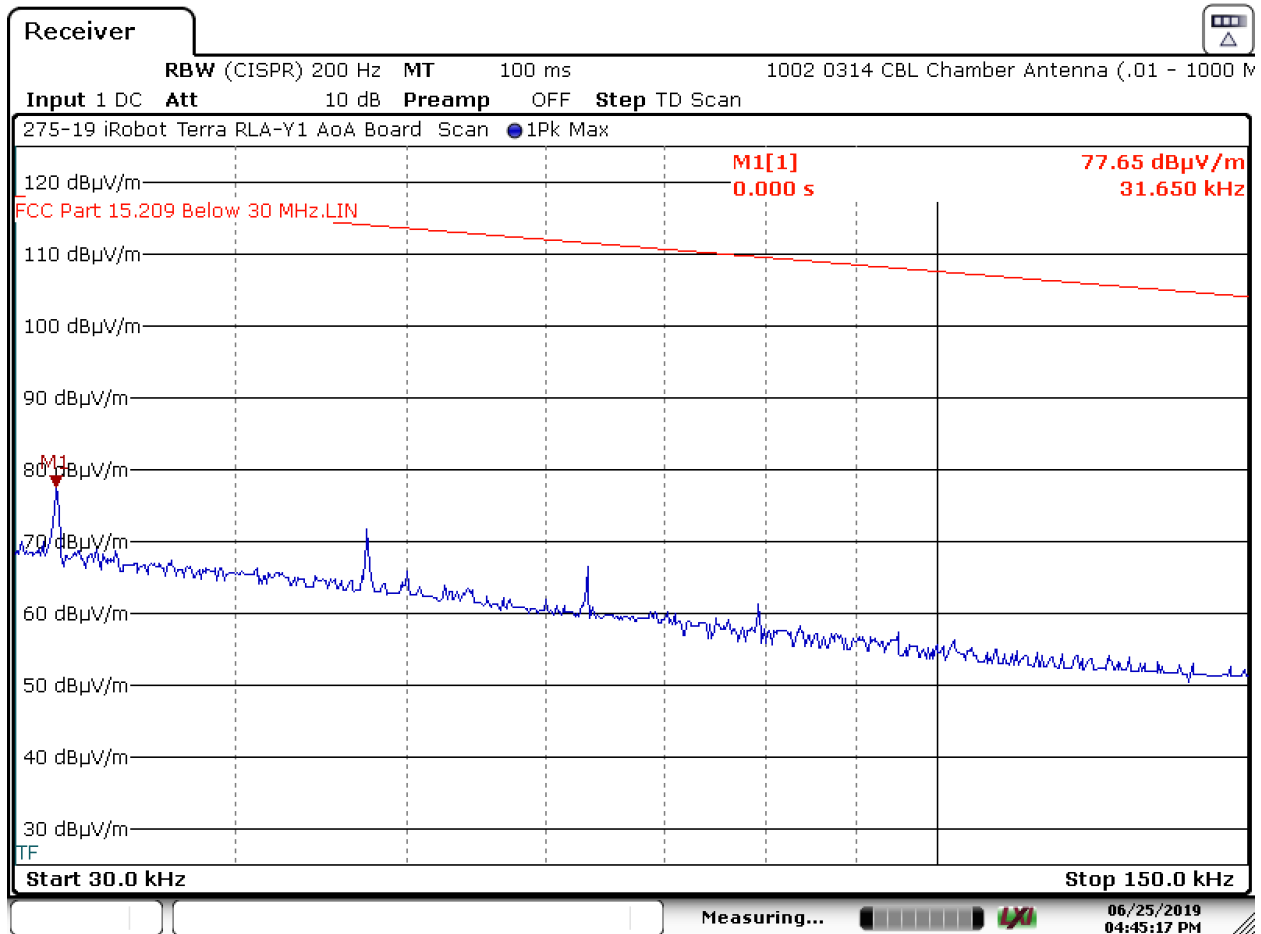

Date: 25.JUN.2019 16:45:17


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.2 Perpendicular Measurement Antenna – 30 to 150 kHz

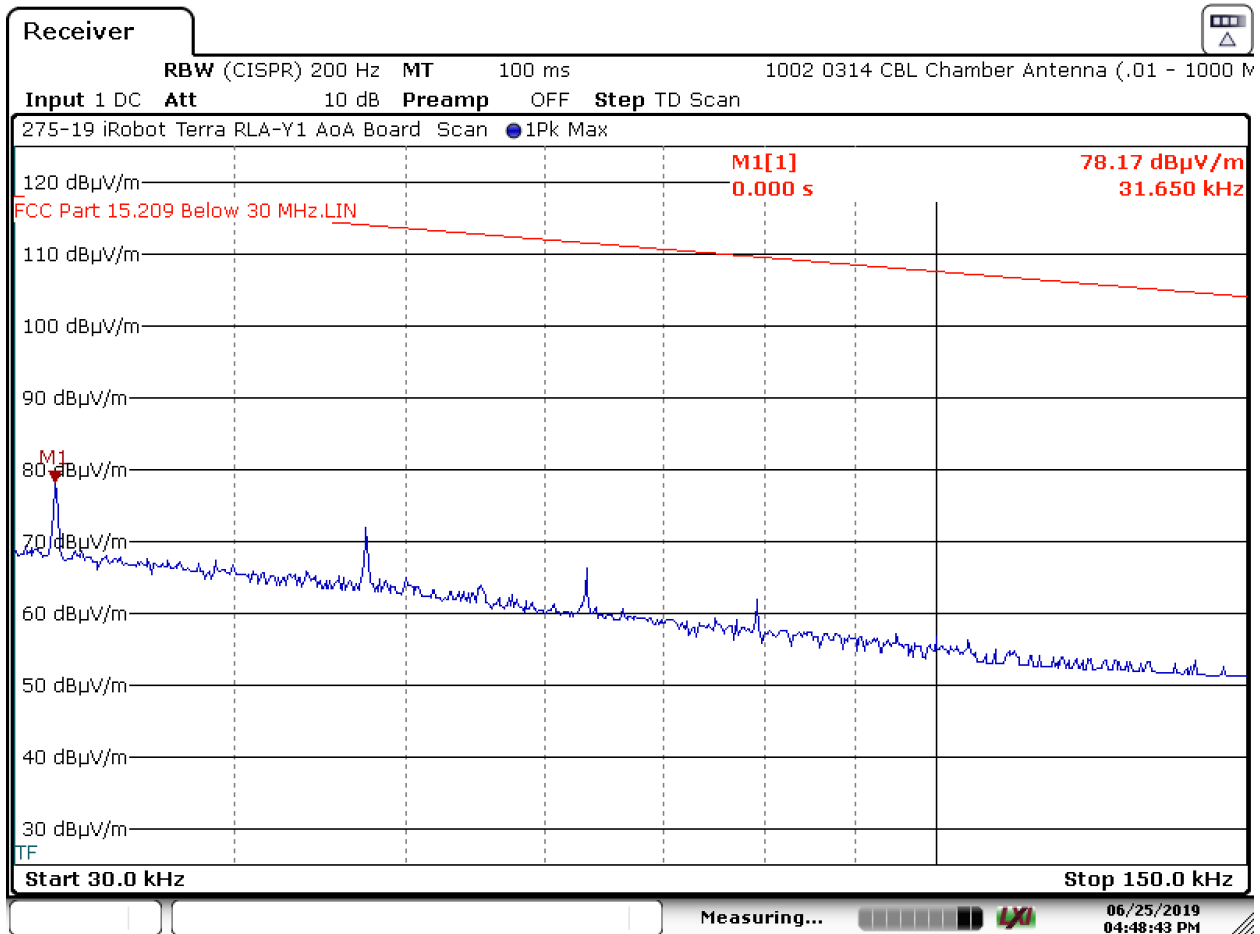

Date: 25.JUN.2019 16:48:42


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.3 Ground Parallel Measurement Antenna – 30 to 150 kHz

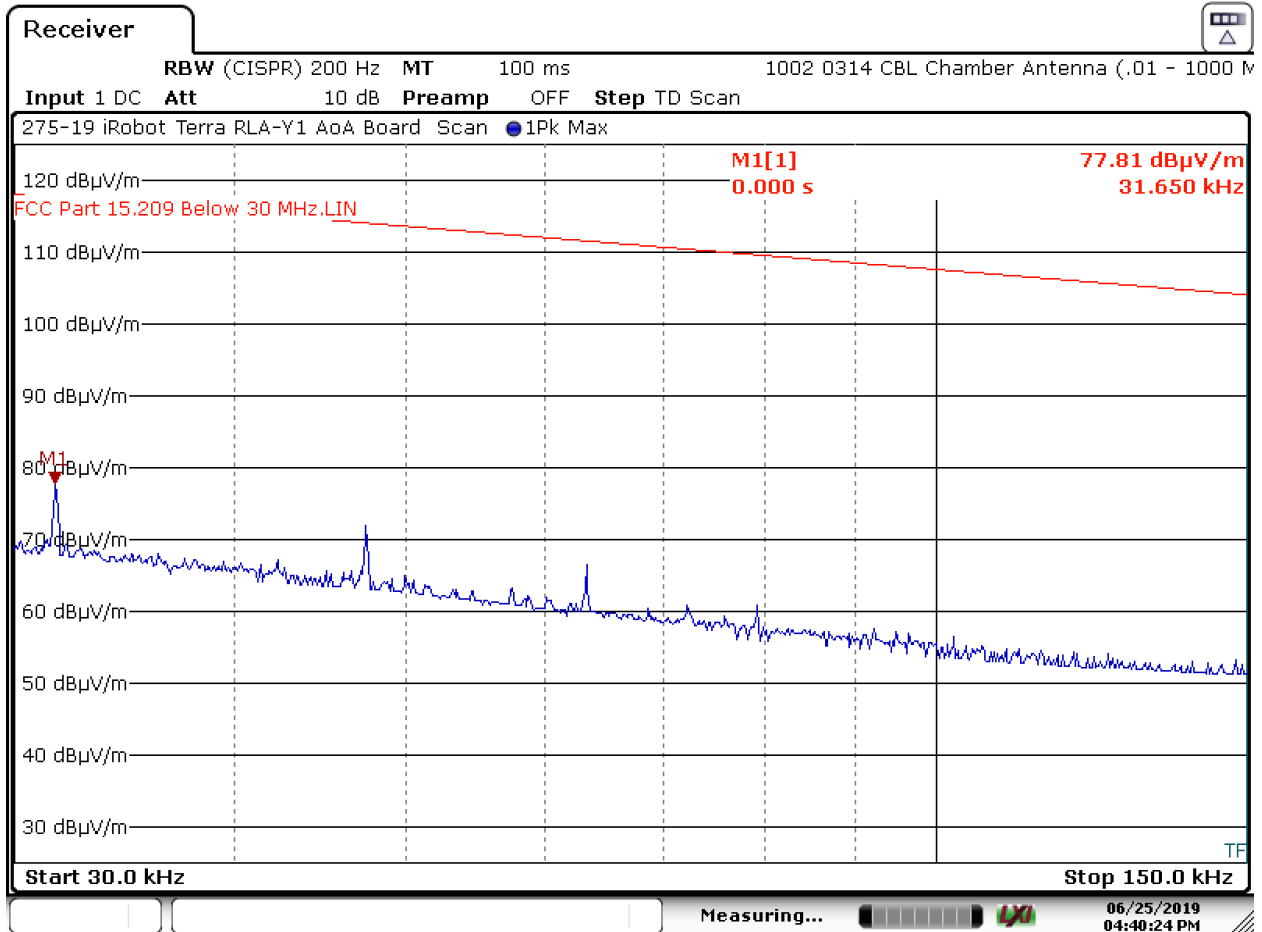

Date: 25.JUN.2019 16:40:24


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.4 Parallel Measurement Antenna – 150 kHz to 30 MHz

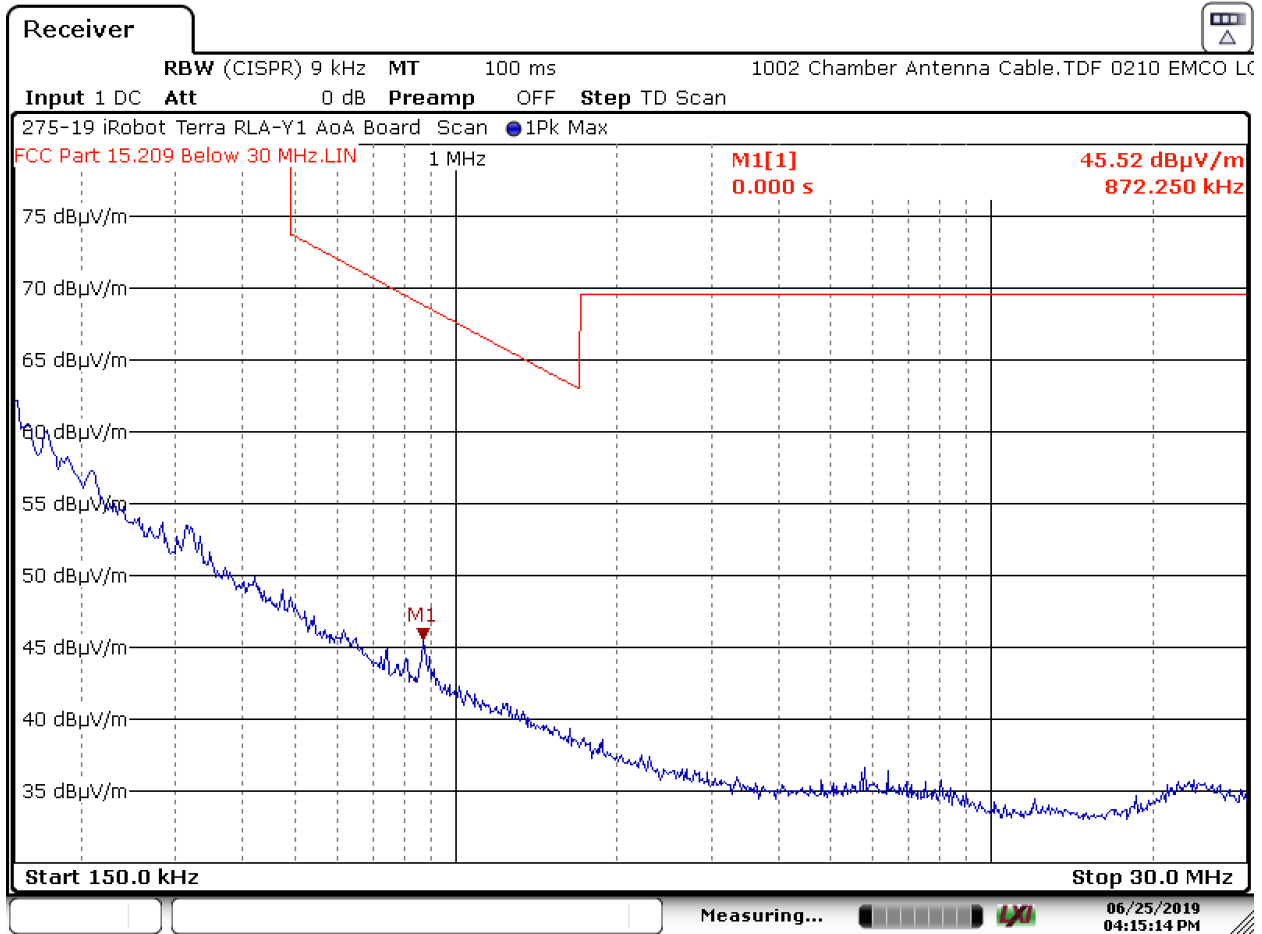

Date: 25.JUN.2019 16:15:14


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.5 Perpendicular Measurement Antenna – 150 kHz to 30 MHz

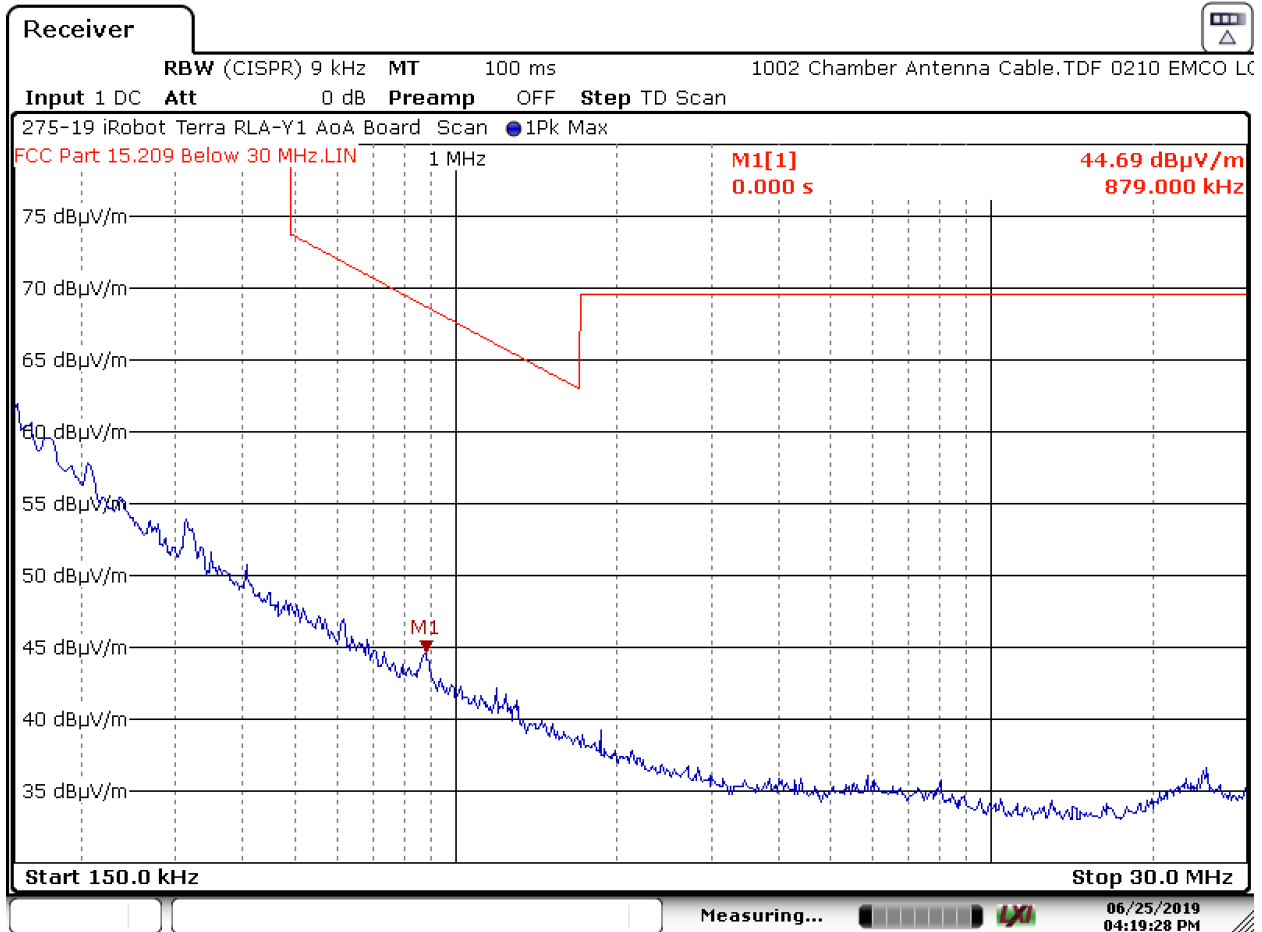

Date: 25.JUN.2019 16:19:27


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.6 Ground Parallel Measurement Antenna – 150 kHz to 30 MHz

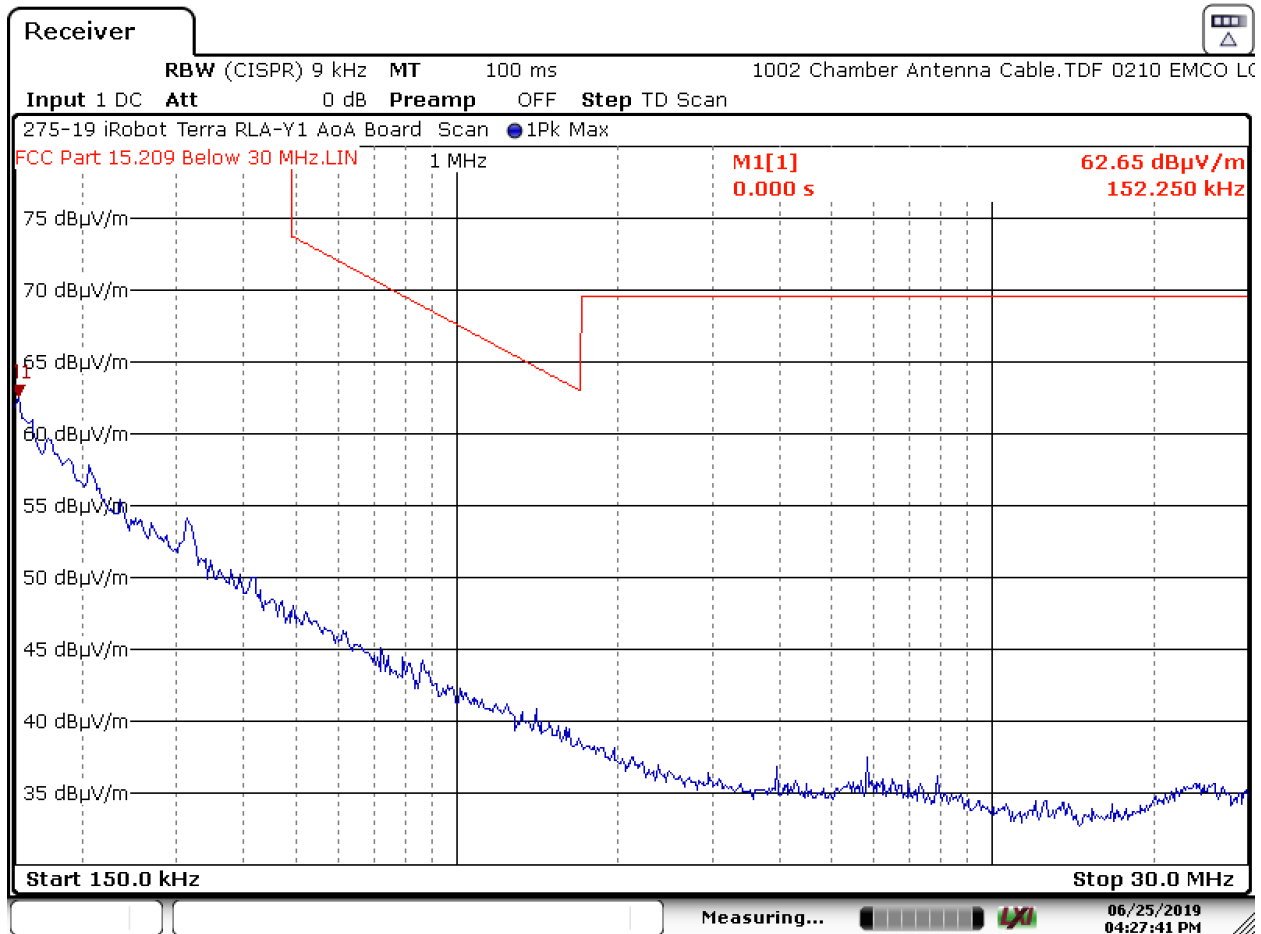

Date: 25.JUN.2019 16:27:41


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber.

6.4.1.7 Horizontal Polarity – 30 to 960 MHz

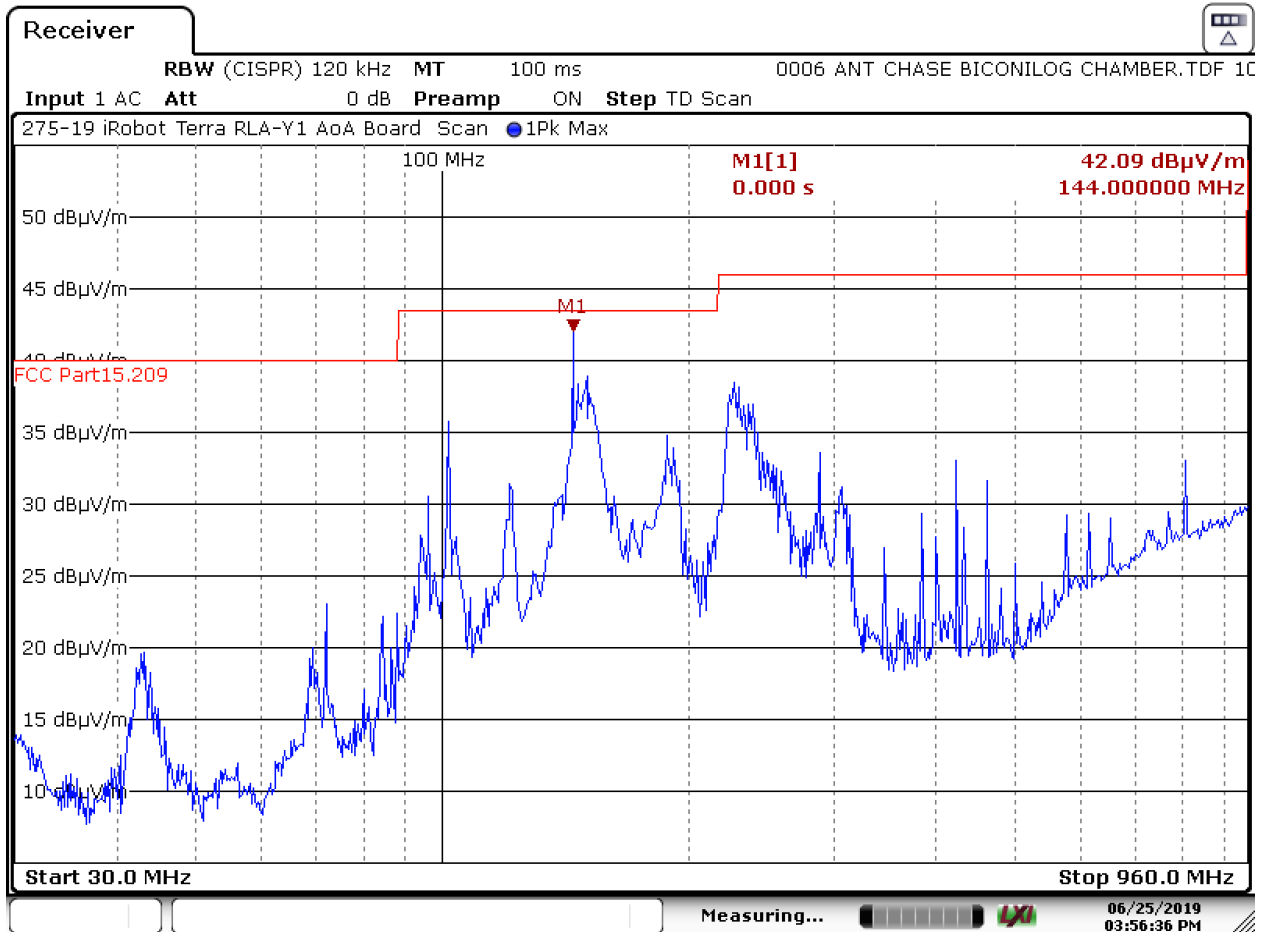

Date: 25.JUN.2019 15:56:36


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209, RSS-220 3.4 continued)

6.4.1. 30 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber.

6.4.1.8 Vertical Polarity – 30 to 960 MHz

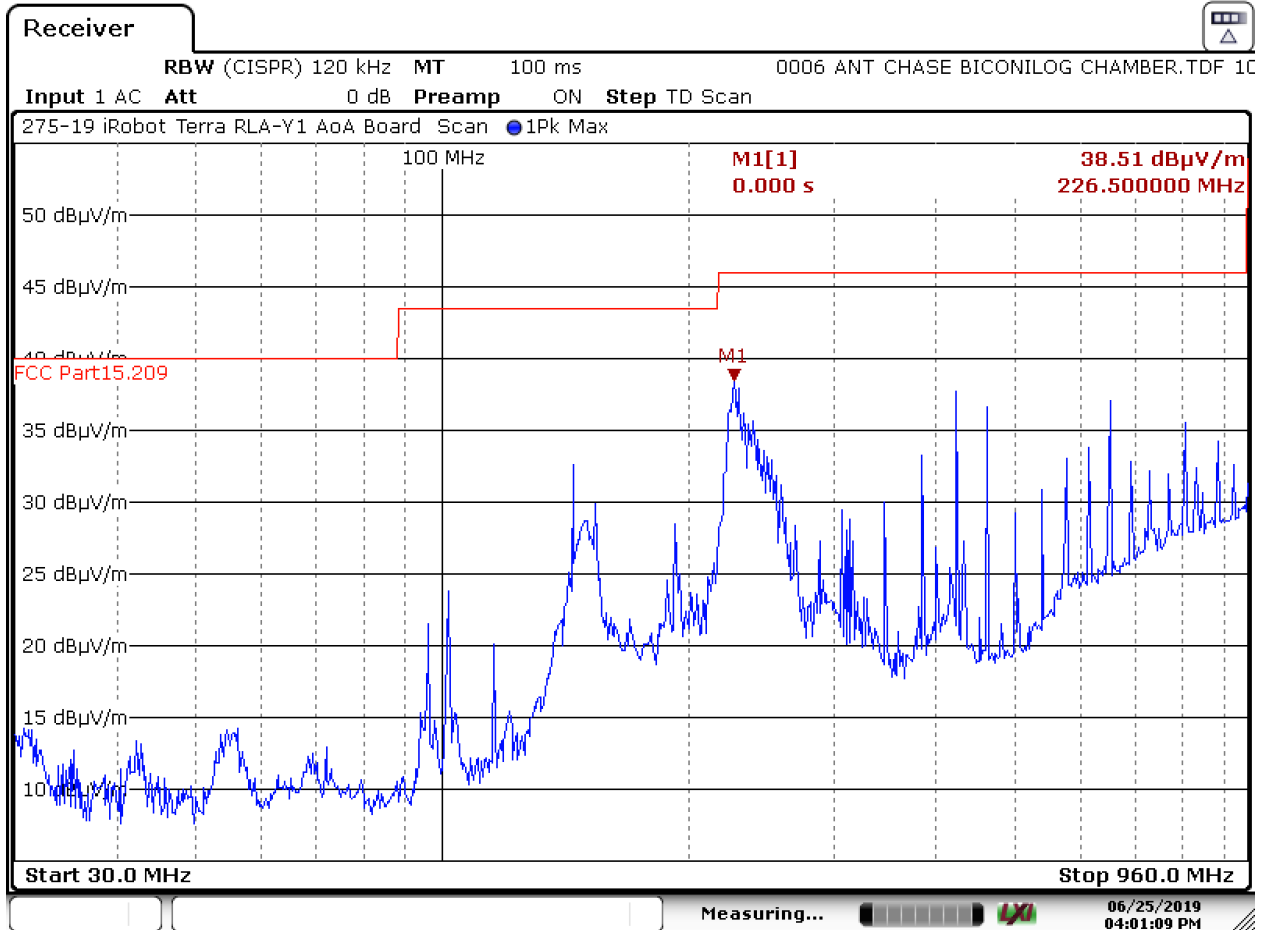


Date: 25.JUN.2019 16:01:08

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (1), RSS-220 5.3.1(d))

6.4.2. 960 MHz to 8 GHz Horizontal at 1 Meter (Directional 16M PRF)

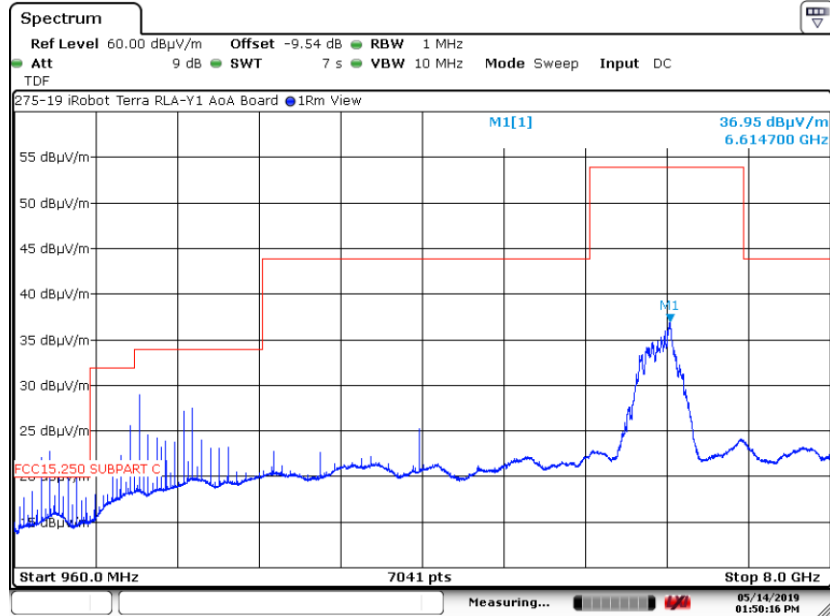

Date: 14.MAY.2019 13:50:15

6.4.3. 960 MHz to 8 GHz Vertical at 1 Meter (Directional 16M PRF)

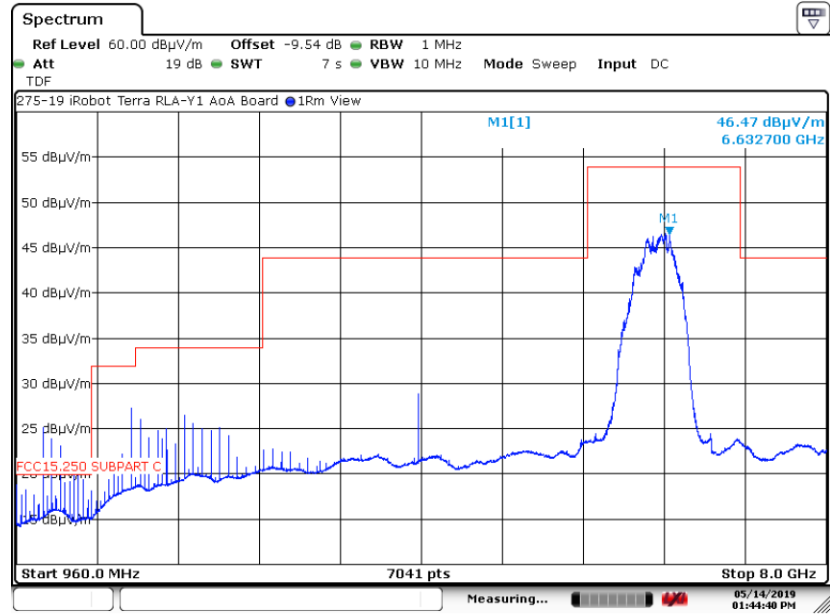


Date: 14.MAY.2019 13:44:39

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (1), RSS-220 5.3.1 (d) continued)

6.4.4. 8 to 18 GHz Horizontal at 1 Meter

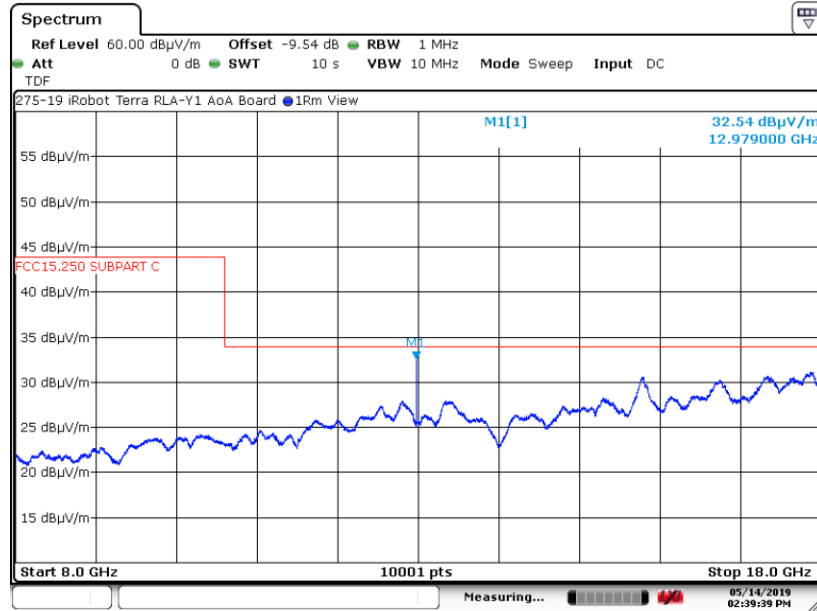

Date: 14.MAY.2019 14:39:38

6.4.5. 8 to 18 GHz Vertical at 1 Meter

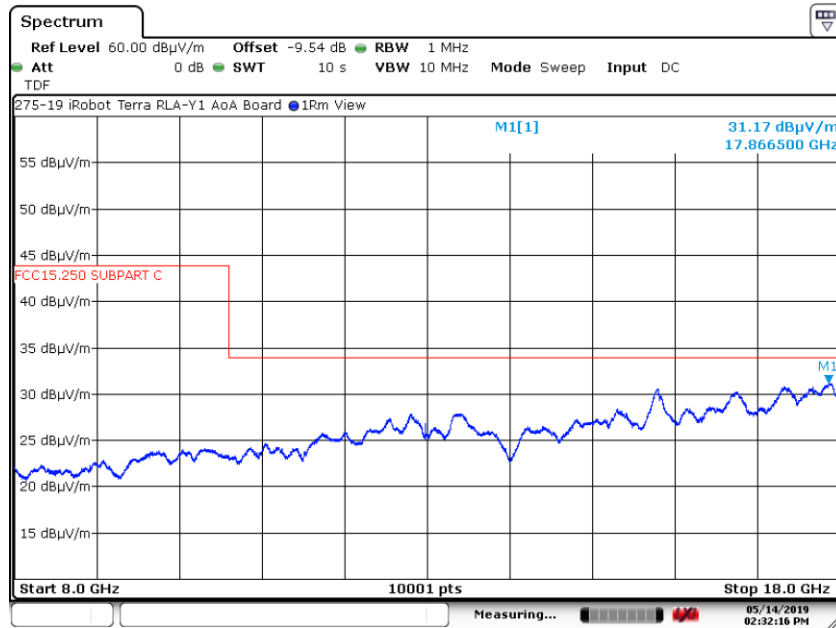


Date: 14.MAY.2019 14:32:15

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (1), RSS-220 5.3.1 (d) continued)

6.4.6. 18 to 40 GHz Horizontal at 0.3 Meter

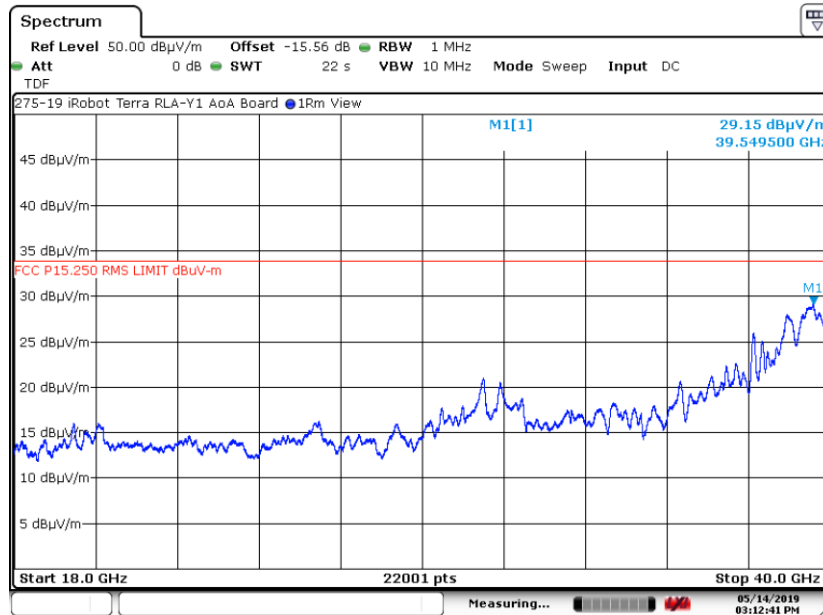

Date: 14.MAY.2019 15:12:40

6.4.7. 18 to 40 GHz Vertical at 0.3 Meter

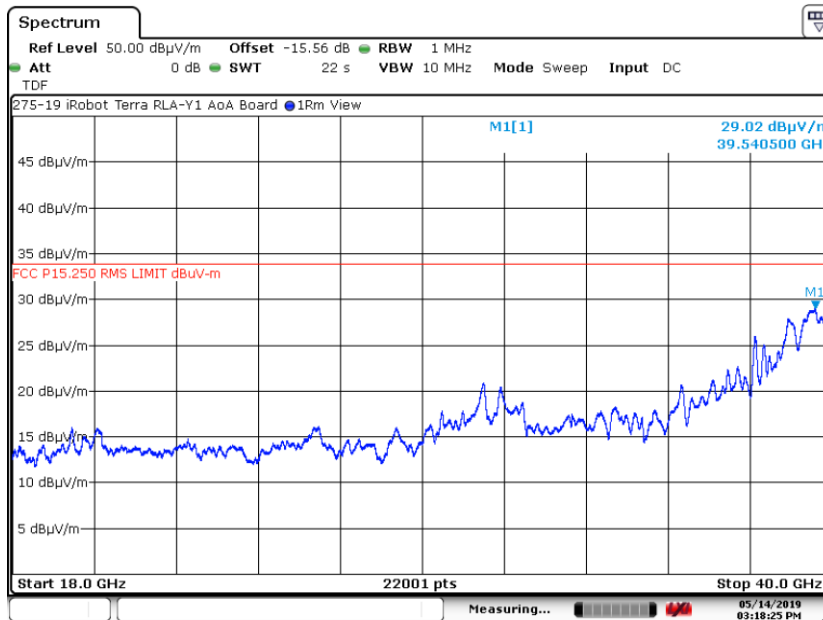

Date: 14.MAY.2019 15:18:24

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions (RSS-220 5.3.1 (d) continued)

Requirement: The radiated emissions at or below 960 MHz from a device shall not exceed the limits in Section 3.4. The radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time.

The EIRP in terms of dBm, can be converted to a field strength, in dBµV/m at 3 Meters by adding 95.2.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dBµV/m)
960 - 1610	-75.3	19.9
1610 – 4750	-70.0	25.2
4750 – 10,600	-41.3	53.9
Above 10,600	-61.3	33.9

Frequency Range: 960 MHz to 8 GHz
 Measurement Distance: 1 Meter
 EMI Receiver IF Bandwidth: 1 MHz
 EMI Receiver Avg Bandwidth 10 MHz
 Detector Function: RMS 1 mS Average as defined in Annex Section 4(b)

Notes: Measurements made from 960 MHz to 8 GHz were made in a semi-anechoic chamber at 1 Meter using a -9.54 dB distance offset was programmed into the spectrum analyzer.

Measurement data above 8 GHz for Channel 5 is provided in plots 6.4.8 to 6.4.13 on the previous pages.

The narrow band spikes in the frequency range of 960 MHz to 4.75 GHz are due to the digital circuitry and subjected to the spurious emissions limit of 500 µV / m at 3 meters or 54 dBµV / m.

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions (RSS-220 5.3.1 (d)) continued)

6.5.1. 960 MHz to 8 GHz Horizontal at 1 Meter



Date: 14.MAY.2019 13:50:59

6.5.2. 960 MHz to 8 GHz Vertical at 1 Meter

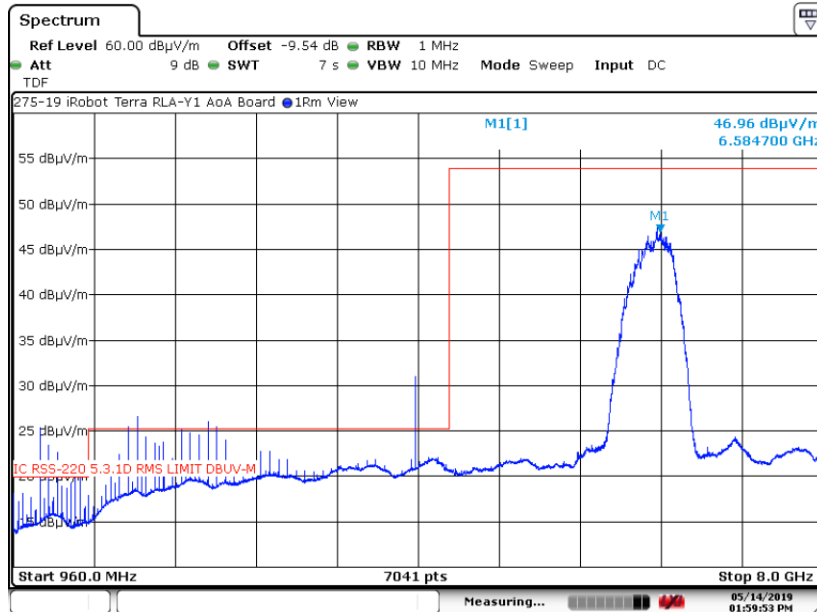

Date: 14.MAY.2019 13:59:52

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions in GPS Bands (15.250 (d) (2), RSS-220 5.3.1 (e))

Requirement: In addition to the radiated emission limits specified in the table in paragraph (d) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dBμV/m)
1164 - 1240	-85.3	9.9
1559 - 1610	-85.3	9.9

6.5.1. Measurement & Equipment Setup

EMI Receiver IF Bandwidth: 1 kHz
 EMI Receiver Avg Bandwidth: 10 kHz
 Detector Function: RMS

6.5.2. Test Procedure

Test measurements were made in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

6.5.3. 1164 to 1240 MHz & 1559 to 1610 MHz

There were no broadband emissions related to the UWB transmitter. Measured signals were narrowband and related to the microprocessor / clocks and do not fall under the requirements of this section. At 3 Meters the -85.3 dBm limit is converted to a field strength limit of 9.9 dBuV/m using a distance correction factor of 95.2.

A distance correction factor of -9.54 dB was entered into the analyzer as an offset since the measurements were made at 1 meter.


The narrow band spikes in the frequency ranges of 1164 to 1240 MHz and 1559 to 1610 MHz are due to the digital circuitry and subjected to the spurious emissions limit in Part 15.209 of 500 μV / m at 3 meters or 54 dBμV / m.

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions in GPS Bands (15.250 (d) (2), RSS-220 5.3.1 (e))


6.5.2 1164 to 1240 MHz Band

6.5.2.1 Horizontal Measurement Polarity 1164 to 1240 MHz

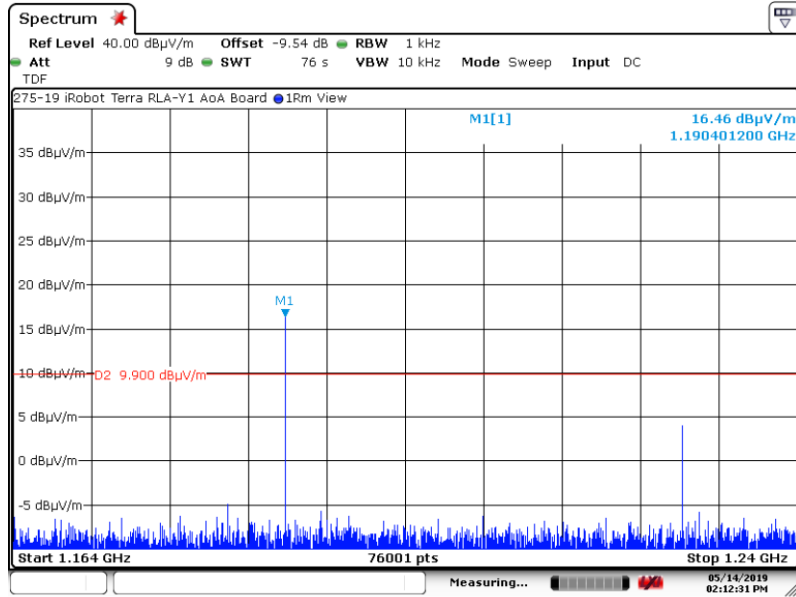

Date: 14.MAY.2019 14:12:30

6.5.2.2 Vertical Measurement Polarity 1164 to 1240 MHz

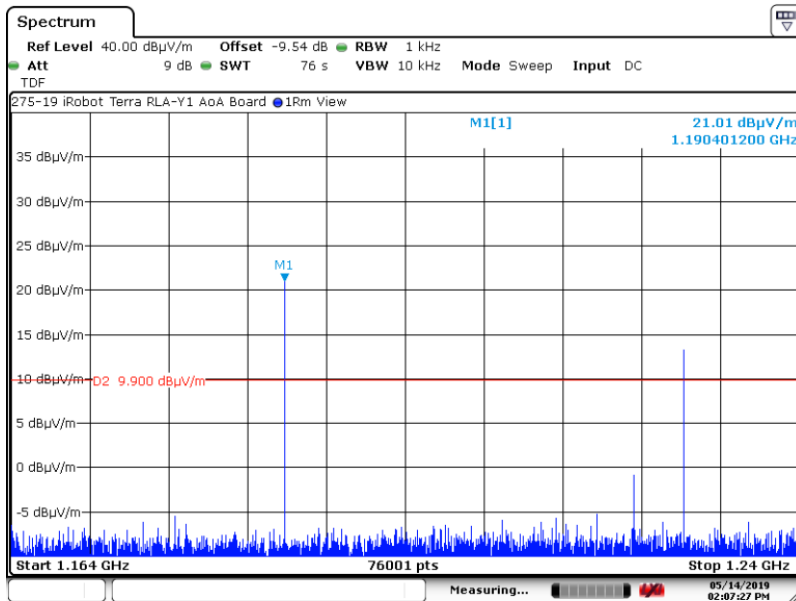


Date: 14.MAY.2019 14:07:26

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions in GPS Bands (15.250 (d) (2), RSS-220 5.3.1 (e))


6.5.3 1559 to 1610 MHz Band

6.5.3.1 Horizontal Measurement Polarity 1559 to 1610 MHz

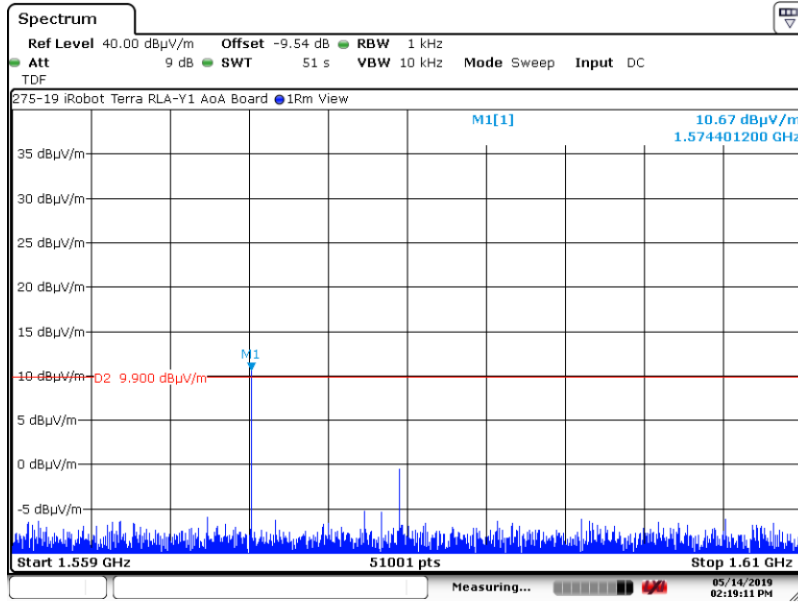

Date: 14.MAY.2019 14:19:11

6.5.3.2 Vertical Measurement Polarity 1559 to 1610 MHz

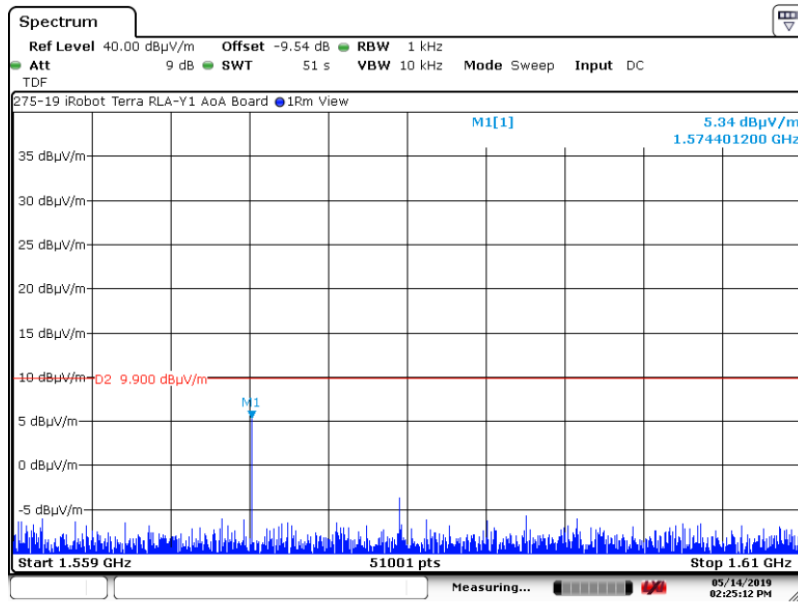

Date: 14.MAY.2019 14:25:11

6. Measurement Data (continued)

6.6. RMS Power in a 1 MHz Bandwidth (15.250 (d) (1), RSS-220 5.3.1 (d))

Requirement: The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

The RMS average measurement is based on the use of a spectrum analyzer with a resolution bandwidth of 1 MHz, an RMS detector, and a 1 millisecond or less averaging time.

The EIRP in terms of dBm, can be converted to a field strength, in dB μ V/m at 3 Meters by adding 95.2.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
5925 - 7250	-41.3	53.9

Frequency Range: 6 to 7 GHz
 Measurement Distance: 3 Meters
 EMI Receiver IF Bandwidth: 1 MHz
 EMI Receiver Avg Bandwidth: 10 MHz
 Detector Function: RMS 1 mS Average

6. Measurement Data (continued)

6.6. RMS Power in a 1 MHz Bandwidth (15.250 (d) (1), RSS-220 5.3.1 (d))

Requirement: The limit for operation in the 5925 to 7250 MHz band is -41.3 dBm EIRP.

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBμV/m)	(dBμV/m)	(dB)	H/V	cm	Deg	
6.510	50.50	53.90	-3.40	V	194	58	Compliant

Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Pre-amplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log(d_{meas}) - 104.7$; $d_{meas} = 3$
 $EIRP (dBm) = E_{meas} (dBμV/m) - 95.2$

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
6.510	-44.70	-41.30	-3.40	V	194	58	Compliant

6.6.1. Plot of RMS Power at 3 Meters (Directional 16M PRF)



03:02:48 PM 07/08/2019

6. Measurement Data (continued)

6.7. Peak Emissions in a 50 MHz Bandwidth (15.250 (d) (3), RSS-220 5.3.1 (g))

Requirement: There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.

The EIRP in terms of dBm, can be converted to a field strength, in dB μ V/m at 3 Meters by adding 95.2.

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
5925 - 7250	0	95.2

Frequency Range: 6 to 7 GHz
 Measurement Distance: 3 Meters
 EMI Receiver IF Bandwidth: 50 MHz
 EMI Receiver Avg Bandwidth: 80 MHz
 Detector Function: Peak, Max Held

6. Measurement Data (continued)

6.7. Peak Emissions in a 50 MHz Bandwidth (15.250 (d) (3), RSS-220 5.3.1 (g))

Requirement: There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBμV/m)	(dBμV/m)	(dB)	H/V	cm	Deg	
6.491	89.40	95.20	-5.80	V	194	58	Compliant


Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log(d_{meas}) - 104.7$; $d_{meas} = 3$

$EIRP (dBm) = E_{meas} (dBμV/m) - 95.2$

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
6.491	-5.80	0.00	-5.80	V	194	58	Compliant

6.7.1 Plot of Peak Power at 3 Meters

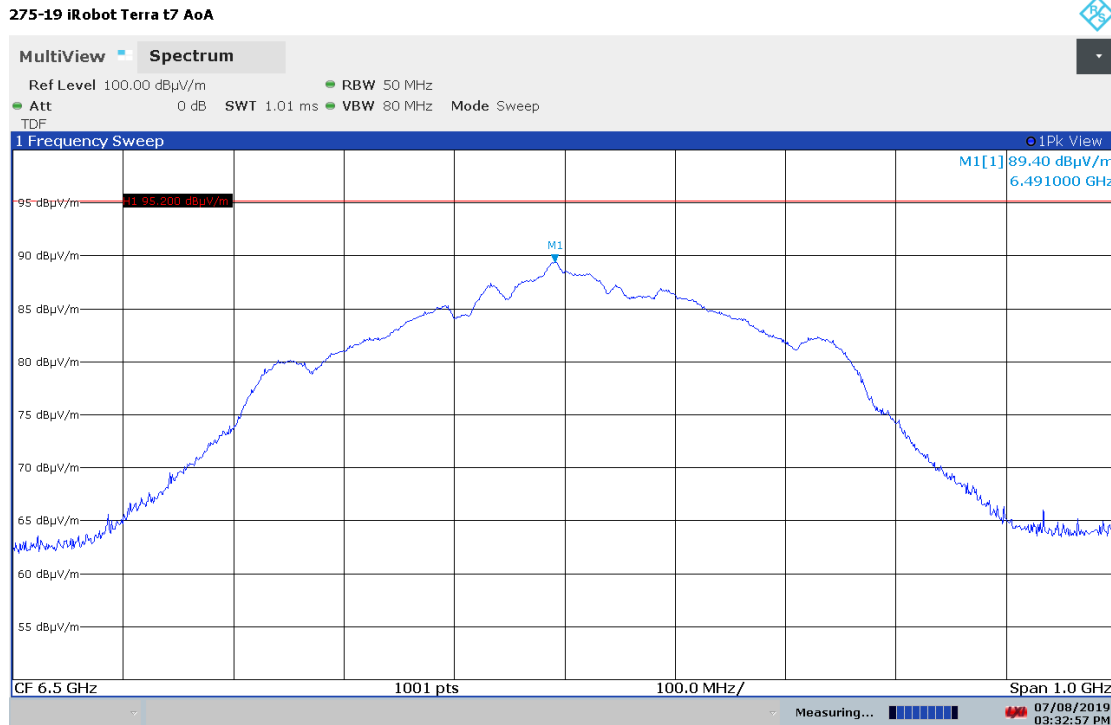

03:32:57 PM 07/08/2019

6. Measurement Data (continued)

6.8 Conducted Emissions Test Setup

6.8.1. Regulatory Limit: FCC Part 15.207, RSS-Gen

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

6.8.2 Measurement Equipment and Software Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due
EMI Receiver	Hewlett Packard	8546A	3330A00115	9/12/2020
RF Filter Section	Hewlett Packard	85460A	3325A00121	9/12/2020
EMI Receiver	Rohde & Schwarz	ESR7	101156	9/10/2020
LISN	EMCO	3825/2	9109-1860	9/10/2019
Manufacturer	Software Description		Title/Model #	Rev.
Compliance Worldwide	Test Report Generation Software		Test Report Generator	1.0

6.8.3. Measurement & Equipment Setup

Test Date: 8/1/2019

Test Engineer: Mark R. McSweeney

Site Temperature (°C): 22.2

Relative Humidity (%RH): 45.3

Frequency Range: 0.15 MHz to 30 MHz

EMI Receiver IF Bandwidth: 9 kHz

EMI Receiver Avg Bandwidth: 30 kHz

Detector Functions: Peak, Quasi-Peak. & Average

6.8.4. Test Procedure

Test measurements were made in accordance with ANSI C63.4-2014, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.


6. Measurement Data (continued)

6.9 Conducted Emissions Test Results

6.9.1. 120 Volts, 60 Hz Phase

Test No.: 275-19, 120 Volts, 60 Hz Phase

FCC, Class B

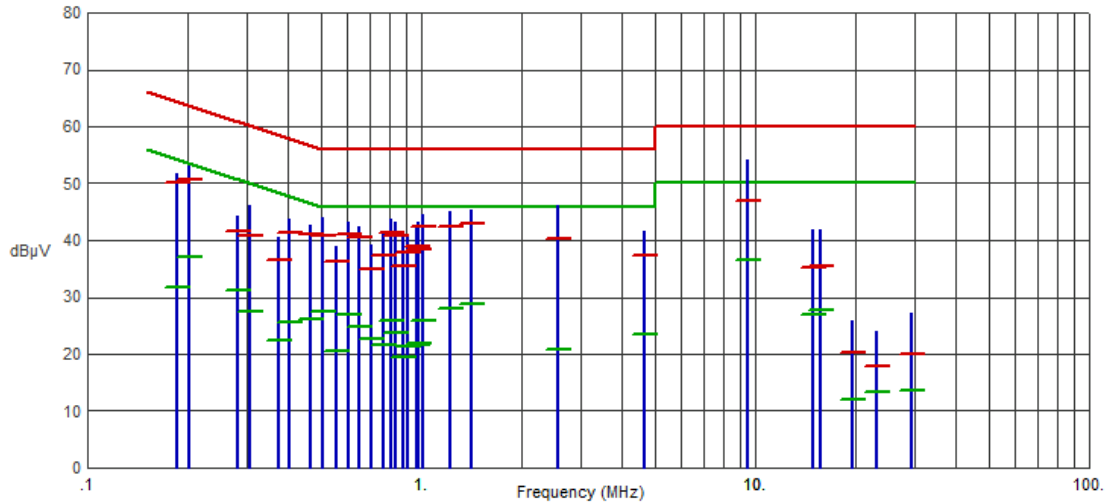

Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
.1860	51.81	50.09	64.21	-14.12	31.73	54.21	-22.48	
.2018	53.16	50.60	63.54	-12.94	37.19	53.54	-16.35	
.2805	44.32	41.69	60.80	-19.11	31.20	50.80	-19.60	
.3053	46.17	40.89	60.10	-19.21	27.42	50.10	-22.68	
.3728	40.62	36.52	58.44	-21.92	22.37	48.44	-26.07	
.4043	43.68	41.24	57.76	-16.52	25.48	47.76	-22.28	
.4650	42.60	41.10	56.60	-15.50	26.07	46.60	-20.53	
.5055	43.88	40.79	56.00	-15.21	27.51	46.00	-18.49	
.5573	38.96	36.30	56.00	-19.70	20.64	46.00	-25.36	
.6068	43.28	41.16	56.00	-14.84	26.89	46.00	-19.11	
.6540	42.52	40.45	56.00	-15.55	24.92	46.00	-21.08	
.7103	39.26	34.94	56.00	-21.06	22.60	46.00	-23.40	
.7733	41.41	37.41	56.00	-18.59	21.68	46.00	-24.32	
.8093	43.82	41.21	56.00	-14.79	25.82	46.00	-20.18	
.8385	43.23	40.82	56.00	-15.18	23.71	46.00	-22.29	
.8835	40.68	35.53	56.00	-20.47	19.54	46.00	-26.46	
.9105	40.55	37.91	56.00	-18.09	21.35	46.00	-24.65	
.9645	42.27	38.93	56.00	-17.07	21.48	46.00	-24.52	
.9825	43.19	38.52	56.00	-17.48	21.85	46.00	-24.15	
1.0118	44.63	42.27	56.00	-13.73	25.81	46.00	-20.19	
1.2143	45.16	42.31	56.00	-13.69	27.92	46.00	-18.08	
1.4145	45.43	43.01	56.00	-12.99	28.85	46.00	-17.15	
2.5755	46.06	40.31	56.00	-15.69	20.82	46.00	-25.18	
4.6703	41.69	37.23	56.00	-18.77	23.38	46.00	-22.62	
9.4988	54.18	46.92	60.00	-13.08	36.61	50.00	-13.39	
14.9528	41.97	35.18	60.00	-24.82	26.95	50.00	-23.05	
15.6615	41.76	35.59	60.00	-24.41	27.67	50.00	-22.33	
19.5788	25.78	20.16	60.00	-39.84	11.95	50.00	-38.05	
23.1315	24.04	17.83	60.00	-42.17	13.22	50.00	-36.78	
29.5035	27.09	20.12	60.00	-39.88	13.69	50.00	-36.31	


6. Measurement Data (continued)

6.9. Conducted Emissions Test Results (continued)

6.9.2. 120 Volts, 60 Hz Neutral

Test No.: 275-19, 120 Volts, 60 Hz Neutral

FCC, Class B

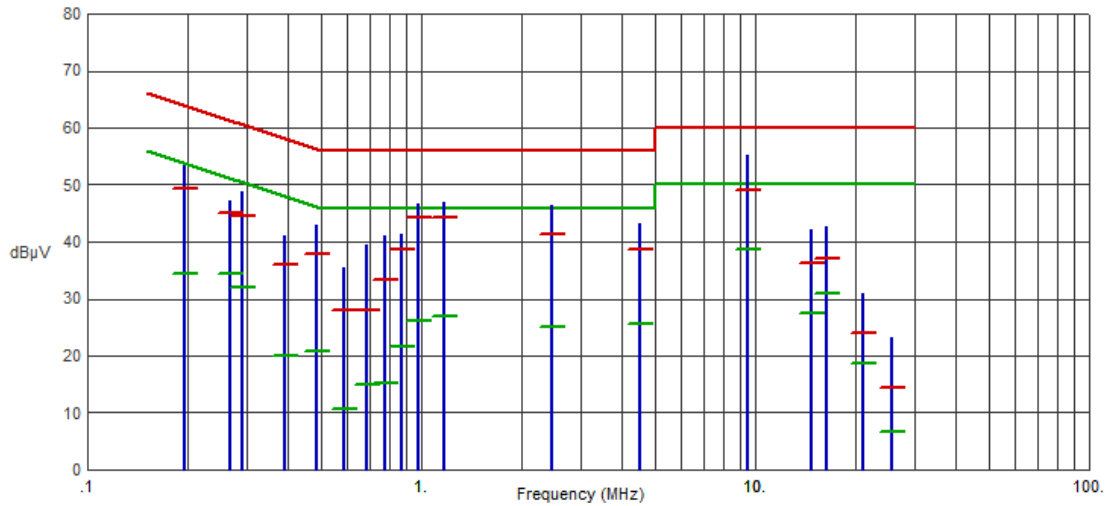

Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
.1950	53.44	49.41	63.82	-14.41	34.29	53.82	-19.53	
.2670	47.18	45.07	61.21	-16.14	34.40	51.21	-16.81	
.2918	48.90	44.58	60.47	-15.89	32.01	50.47	-18.46	
.3908	41.05	36.04	58.05	-22.01	19.91	48.05	-28.14	
.4875	42.89	37.88	56.21	-18.33	20.85	46.21	-25.36	
.5865	35.46	27.98	56.00	-28.02	10.74	46.00	-35.26	
.6833	39.56	28.05	56.00	-27.95	14.88	46.00	-31.12	
.7800	40.95	33.34	56.00	-22.66	15.22	46.00	-30.78	
.8768	41.25	38.61	56.00	-17.39	21.72	46.00	-24.28	
.9758	46.69	44.23	56.00	-11.77	26.03	46.00	-19.97	
1.1715	46.88	44.14	56.00	-11.86	26.81	46.00	-19.19	
2.4698	46.32	41.21	56.00	-14.79	25.01	46.00	-20.99	
4.5060	43.24	38.78	56.00	-17.22	25.47	46.00	-20.53	
9.4605	55.08	48.94	60.00	-11.06	38.61	50.00	-11.39	
14.7818	42.04	36.27	60.00	-23.73	27.54	50.00	-22.46	
16.3500	42.79	37.03	60.00	-22.97	30.80	50.00	-19.20	
20.9760	30.90	23.87	60.00	-36.13	18.65	50.00	-31.35	
25.5368	23.27	14.29	60.00	-45.71	6.63	50.00	-43.37	

6. Measurement Data (continued)


6.10. 99% Emission Bandwidth (RSS-GEN 6.7)

Requirement: The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs RSS-Gen, Section 6.7.

Test Note: The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.

6.10.1 Plot of 99% Emission Bandwidth

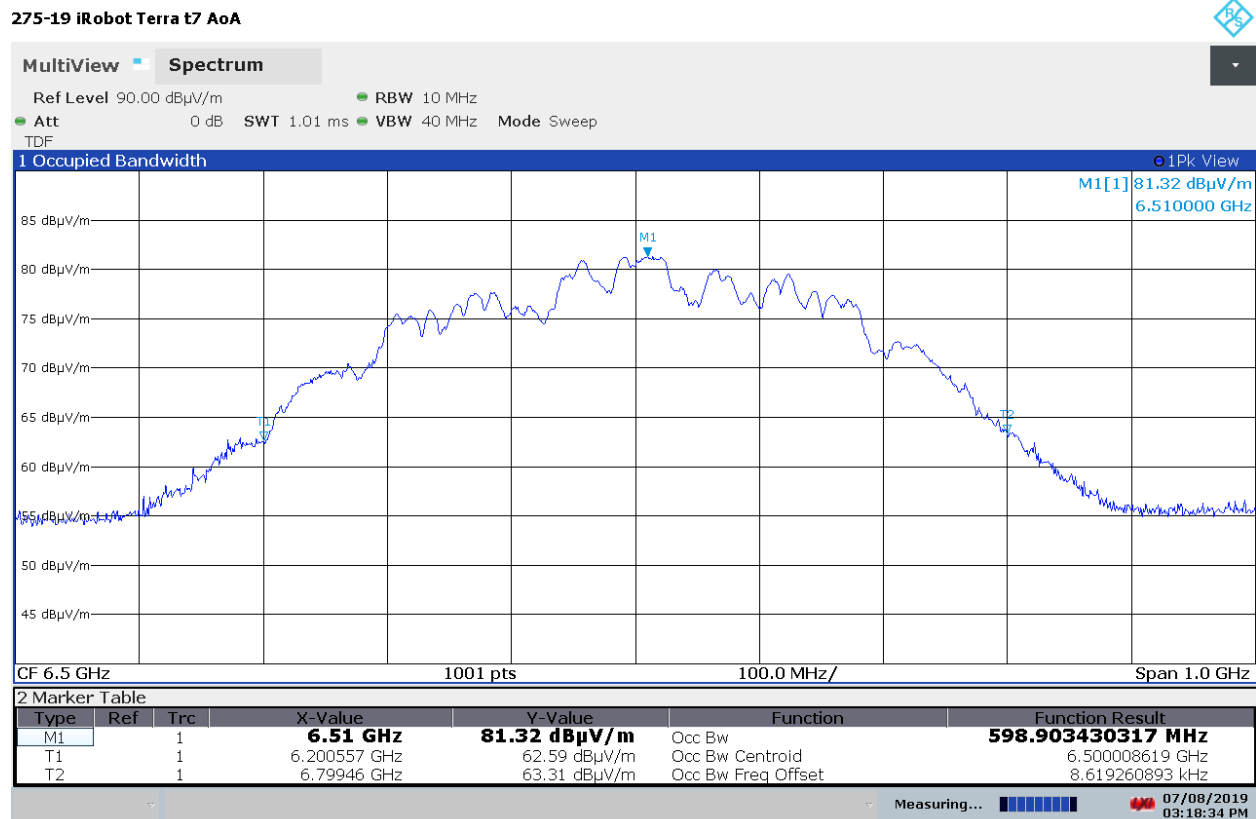

03:18:34 PM 07/08/2019

6. Measurement Data (continued)

6.11. Public Exposure to Radio Frequency Energy Levels (1.1307 (b)(1))

6.11.1 RF Exposure for devices that operate above 6 GHz

Requirements: 2.1093(b): A portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.

2.1093 (d): Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified 47 CFR 1.1310. Measurements and calculations to demonstrate compliance with MPE Field strength or power density limits for device operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (B): Limits for General Population/Uncontrolled Exposure for devices that operate between 1500 to 100,000 MHz is 1.0 mW/cm² using a 30 minute averaging time.

ISED RSS-102, Issue 5, Section 3: Devices operating above 6 GHz regardless of the separation distance shall undergo an RF Exposure evaluation using IEEE C95.3.

ISED RSS-102 Section 4 Table 4 RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment) above 6000 MHz the limit is 10 W/m² using an averaging time of 6 minutes.

Center Frequency (GHz)	MPE Distance (cm)	DUT Output Power (dBm)	DUT Antenna Gain (dBi)	Power Density		FCC Limit (mW/cm ²)	ISED Limit (W/m ²)
				(mW/cm ²)	(W/m ²)		
	(1)	(2)	(3)	(4)		(5)	(6)
6.492	5	-5.80	0.0	0.0008372	0.0083724	1	10

$$PD = \frac{OP + AG}{(4 \times \pi \times d^2)}$$

1. Reference CFR 2.1093(b): For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 5 centimeters of the body of the user.
2. Measured Peak Power at 3 Meters from Section 6.7 of this test report.
3. Antenna Gain included in the measured values of Section 6.7
4. Power density is calculated from field strength measurement and antenna gain.
5. Reference CFR 1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (B): Limits for General Population/Uncontrolled Exposure.
6. Reference IC RSS-102 Section 4 Table 4 RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment) above 6000 MHz the limit is 10 W/m²

6. Measurement Data (continued)

6.11. Public Exposure to Radio Frequency Energy Levels (1.1307 (b)(1))

6.11.2 RF Exposure for devices with simultaneous operation

Requirements: For devices that contain multiple transmitters that may operate simultaneously an RF Exposure evaluation for that simultaneous transmission shall be performed.

The EUT contains an WB transmitter operating at ~ 6.5 GHz, and a BLE/WiFi Module operating in the 2.4 GHz and 5 GHz bands under FCC ID: UFEAXD-Y1. Using the worst case data for the UWB and WiFi radios an estimation of RF Exposure at 5 cm has been calculated in the table below. The BLE and 2.4 GHz WiFi share the same antenna and the 2.4 GHz and 5 GHz radios cannot be operated simultaneously as described in the modular filing.

Worse Case for the 2.4 GHz Radio was 802.11n-HT20 Mode of operation at 2.412 MHz.

Center Frequency (GHz)	MPE Distance (cm)	DUT Peak Output Power (dBm)	DUT Antenna Gain (dBi)	Power Density		FCC Limit (mW/cm ²)	ISED Limit (W/m ²)
				(mW/cm ²)	(W/m ²)		
	(1)	(2)	(3)	(4)		(5)	(6)
6.491	5	-5.80	0.0	0.0008372	0.0083724	1	10
2.412	20	17.50	3.2	0.0231063	0.2310629	1	10
			SUM	0.0239435	0.2394353	1	10

Worse Case for the 5 GHz Radio was 802.11n-HT20 Mode of operation at 5.500 MHz.

Center Frequency (GHz)	MPE Distance (cm)	DUT Peak Output Power (dBm)	DUT Antenna Gain (dBi)	Power Density		FCC Limit (mW/cm ²)	ISED Limit (W/m ²)
				(mW/cm ²)	(W/m ²)		
	(1)	(2)	(3)	(4)		(5)	(6)
6.491	5	-5.80	0.0	0.0008372	0.0083724	1	10
5.500	20	17.50	3.51	0.0251033	0.2510326	1	10
			SUM	0.0259405	0.2594050	1	10

7. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with the Federal Communications Commission (FCC) and Industry Canada standards. Through our American Association for Laboratory Accreditation (A2LA) ISO Guide 17025:2005 Accreditation our test sites are designated with the FCC (designation number **US1091**), Industry Canada (file number **IC 3023A-1**) and VCCI (Member number 3168) under registration number A-0274.

Compliance Worldwide is also designated as a Phase 1 CAB under APEC-MRA (US0132) for Australia/New Zealand AS/NZS CISPR 22, Chinese-Taipei (Taiwan) BSMI CNS 13438 and Korea (RRA) KN 11, KN 13, KN 14-1, KN 22, KN 32, KN 61000-6-3, KN 61000-6-4.

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane. A second conducted emissions site is also located in the basement of the OATS site with a 2.3 x 2.5 meter ground plane and a 2.4 x 2.4 meter vertical wall.

Both sites are designed to test products or systems 1.5 meters W x 1.5 meters L x 2.0 meters H, floor standing or table top.

8. Test Images

8.1. Spurious and Harmonic Emissions – 30 kHz to 1 GHz Front



8. Test Images

8.2. Spurious and Harmonic Emissions – 30 kHz to 30 MHz Rear



8. Test Images

8.3. Spurious and Harmonic Emissions – 30 MHz to 1 GHz Rear



8. Test Images

8.4. Spurious and Harmonic Emissions – 1 to 18 GHz Front



8. Test Images

8.5. Spurious and Harmonic Emissions – 1 to 18 GHz Rear



8. Test Images

8.6. Spurious and Harmonic Emissions – 18 to 40 GHz Side




8. Test Images

8.7. Frequency Stability (Setup)



8. Test Images

8.8. Frequency Stability (Setup)

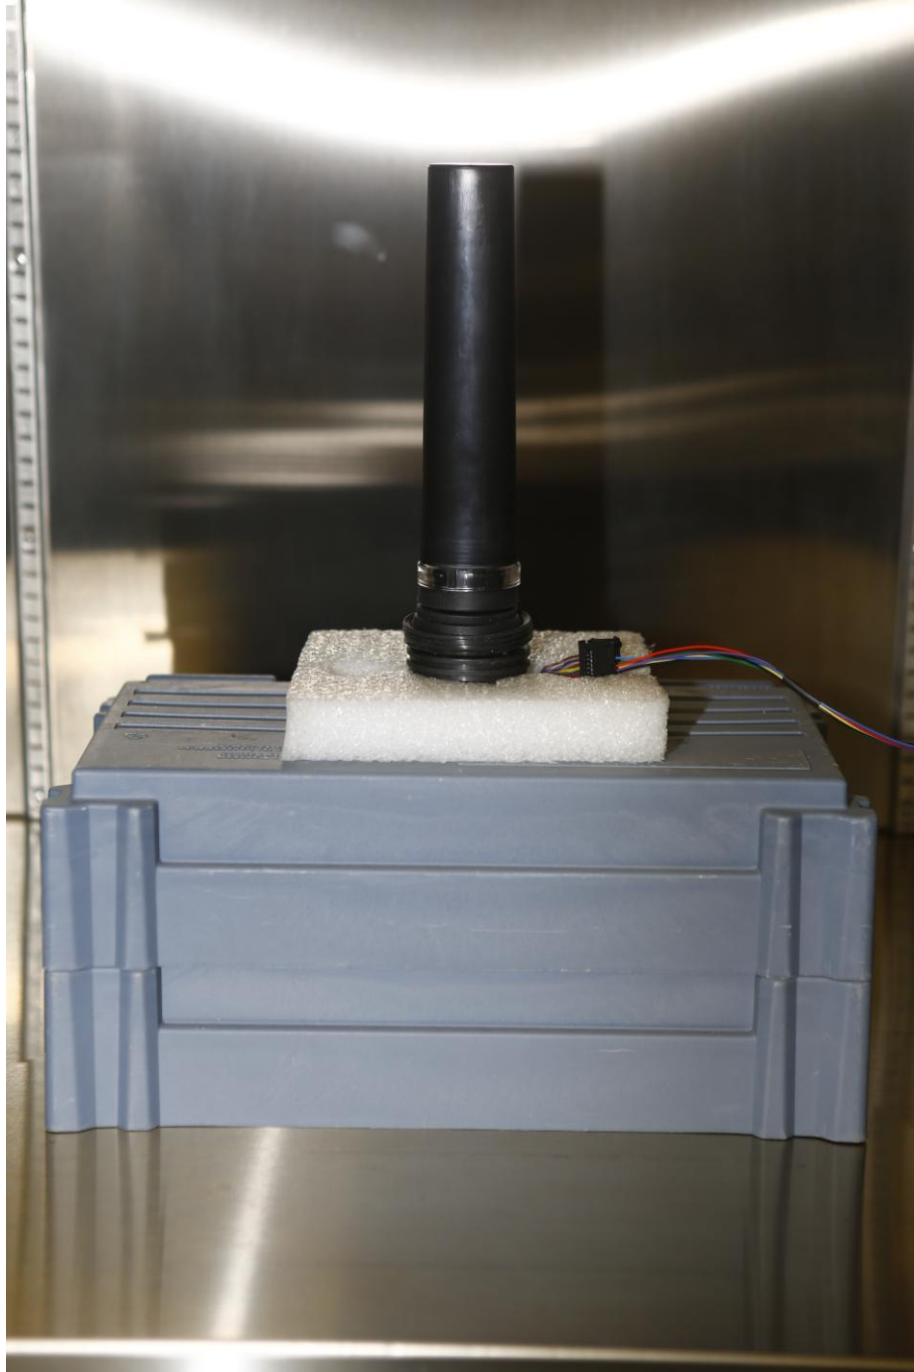

8. Test Images (continued)

8.9. Conducted Emissions, Front View



Test Number: 275-19R1

Issue Date: 8/7/2019

8. Test Images (continued)

8.10. Conducted Emissions, Rear View

