


注記

- シール印刷、裏面ステッカーの事。
- 材質：アルミ蒸着PET#100、表面ラミネート#25加工のこと。
- XXXXXXの部分は6桁のアラビア数字の連番とし、  
開始番号は発注時に指定するものとする。

一般寸法許容差 ± mm

を 超え	以下	1	2	3	4
-	4	0.05	0.1	0.2	0.3
4	16	0.07	0.15	0.3	0.5
16	32	0.1	0.2	0.4	0.7
32	120	0.2	0.4	0.6	1.2
120	300	0.4	0.8	1.2	2.0
300	-	0.8	1.6	2.5	4.0

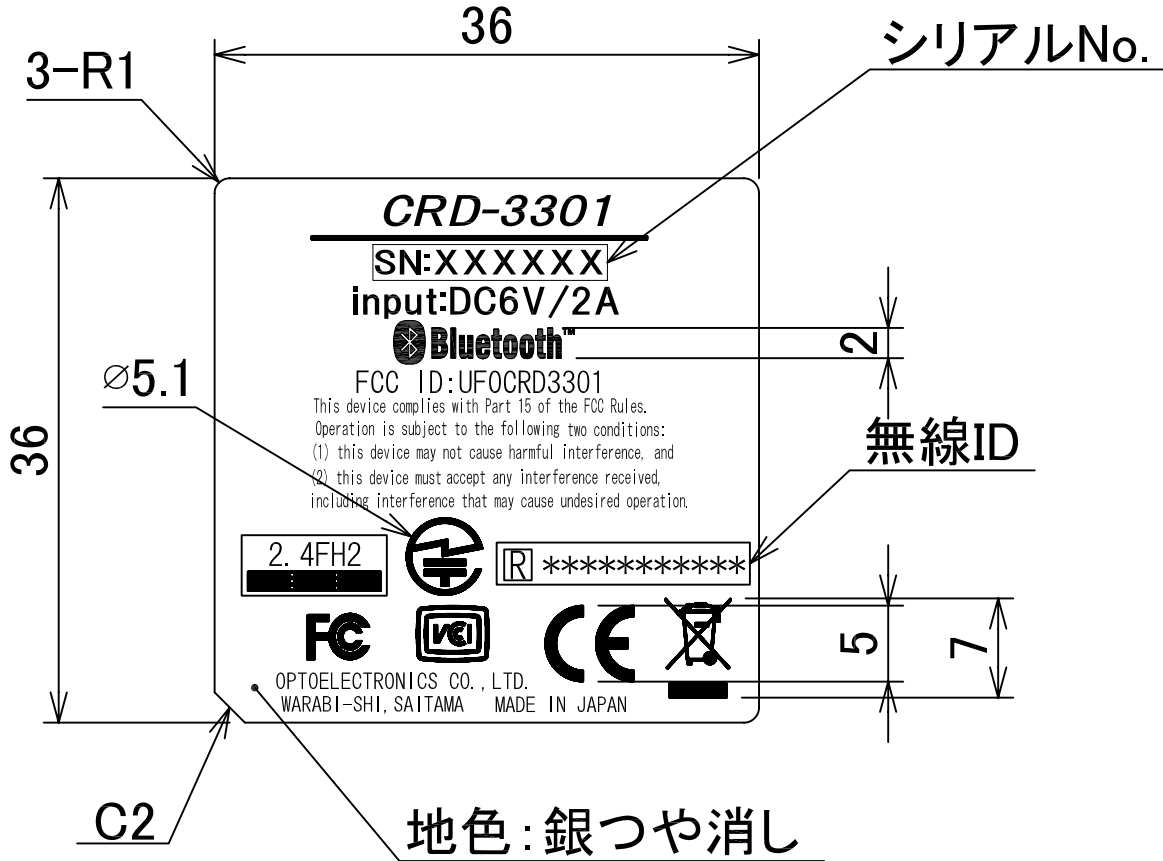


GREEN PRODUCT 下記有害物質を含有しない事

- 水銀
- 鉛
- 六価クロム
- カドミウム(PVCの着色等にも使用される場合有り)
- PBB(臭素系難燃材)
- PBDE(臭素系難燃材)

重量:1g未満

△x					MATERIAL 注記.1, 注記.2	FINISH 印刷色: 黒	3RD ANGLE PROJECTION	<b>OPTOELECTRONICS</b>
△x					DATE 08.09.30	SCALE 2/1	UNIT	PART NAME
△x					DESIGNED BY	CHECKED BY	APPROVED BY	MODEL NAME LABEL
△x					予・実装G '08.09.30 高橋	予・実装G '08.09.30 堀口	予・実装G '08.09.30 基	DRAWING NO.
	DATE	REVISE	NAME	APPRV	CRD33017100-0-00			

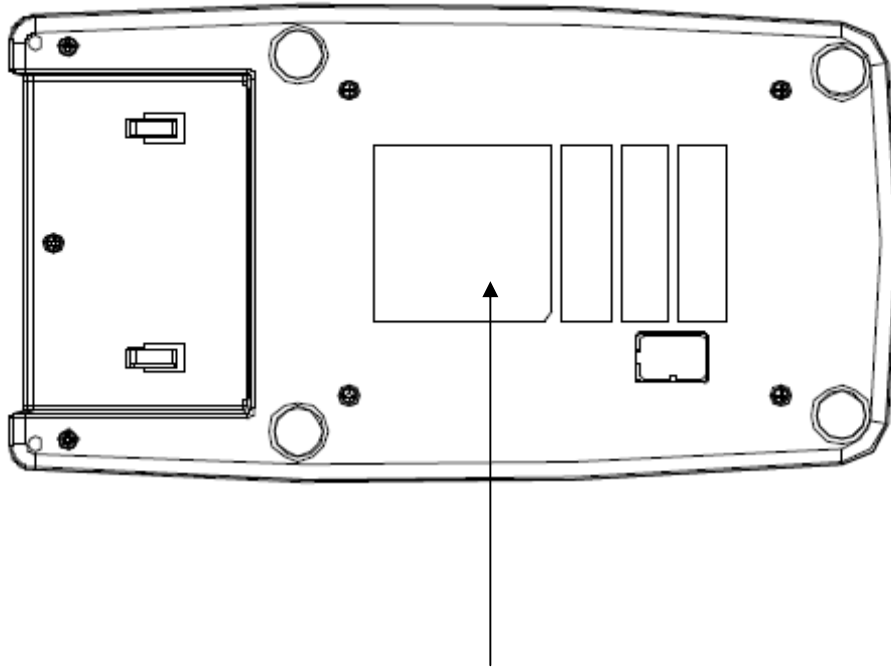

**CRD-3301**  
SN:XXXXXX  
Input:DC6V/2A  
  
FCC ID:UF0CRD3301  
This device complies with Part 15 of the FCC Rules.  
Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) this device must accept any interference received,  
including interference that may cause undesired operation.

2.4FH2   \*\*\*\*\*

OPTOELECTRONICS CO., LTD.  
WAKU-5H1, SAITAMA MADE IN JAPAN