

**Advanced  
Compliance Laboratory**

210 Cougar Court  
Hillsborough, NJ 08844  
Tel: (908) 927 9288  
Fax: (908) 927 0728

---

## **Electromagnetic Emission Compliance Test Report**



**Equipment Under Test  
(EUT)** GPR

**Model** AM200

**Applicant** IDS GeoRadar srl

**In Accordance With** FCC Part 15, Subpart F  
Industry Canada RSS-220 (Issue 1/2009)

**Tested by** Advanced Compliance Laboratory, Inc.  
210 Cougar Court  
Hillsborough, New Jersey 08844

**Authorized by** Wei Li  
Lab Manager

Signature

**Date** February 12, 2020

**AC Lab Report  
Number** 0048-200127-02



Lab Code:200101-0

**The test result in this report is supported and  
covered by the NVLAP accreditation.**

Table of Contents

Section 1. Summary of Test Results .....3

Section 2. General Equipment & Test Configuration .....6

Section 3. Test Methodology & Facilities .....8

Section 4. Measurement Data .....9

Section 5. FCC ID Labeling .....44

Section 6. Setup Photos .....45

Section 7. EUT Photos .....47

## Section 1. Summary of Test Results

Manufacturer: IDS GeoRadar srl  
Product Name: GPR

Model/Parts No. : AM200 Part No. 906198

S/N: 020-20-00002

General: **All measurements are traceable to national standards**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15, Sub Part F and Industry Canada RSS-220 (Issue 1/2009).

☐ New Submission

☐ Production Unit

☐ Class I Permissive Change

☒ Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

“See Summary of Test Data”



**NVLAP LAB CODE: 200101-0**

Advanced Compliance Laboratory, Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Advanced Compliance Laboratory, Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

## Summary of Test Data

| Compliance Requirement                                                | FCC & IC Rule Part                                  | Test No.<br>in<br>Section 4 | Result   |
|-----------------------------------------------------------------------|-----------------------------------------------------|-----------------------------|----------|
| <b>Cross Reference</b>                                                | 15.505 &RSS-GEN                                     | 1                           | Complies |
| <b>Marketing of UWB Equipment</b>                                     | 15.507 &RSS-GEN                                     | 2                           | Complies |
| <b>Pulse Repetition Frequency(PRF)</b>                                | 15.509 &RSS-220 6.2                                 | 3                           | Complies |
| <b>UWB Bandwidth</b>                                                  | 15.509(a) &RSS-220<br>6.2.1(a)                      | 4                           | Complies |
| <b>General Operational<br/>Requirements for LF Imaging<br/>System</b> | 15.509(b) &RSS-220 6                                | 5                           | Complies |
| <b>Spurious Radiated<br/>Emissions≤960MHz</b>                         | 15.509(d) 15.209<br>&RSS-220 3.4, 6.2(c),<br>6.2(d) | 6                           | Complies |
| <b>Spurious Radiated<br/>Emissions&gt;960MHz</b>                      | 15.509(d) 15.209<br>&RSS-220 3.4, 6.2(c),<br>6.2(d) | 7                           | Complies |
| <b>Radiated Emissions in<br/>GPS Bands</b>                            | 15.509(e) 15.209 &RSS-<br>220 6.2(e)                | 8                           | Complies |
| <b>Highest Radiated Emission at f<sub>M</sub></b>                     | 15.509(f) 15.209 &RSS-<br>220 6.2(g)                | 9                           | Complies |
| <b>Technical Requirements<br/>Applicable to All UWB Devices</b>       | 15.521                                              | 10                          | Complies |
| <b>Coordination Requirement</b>                                       | 15.525                                              | 11                          | N/A      |
| <b>Antenna Requirement</b>                                            | 15.203/204 &RSS-GEN<br>7.1.4                        | 12                          | Complies |
| <b>Radio Frequency Exposure</b>                                       | FCC OET Bulletin 65<br>&RSS-GEN                     | 13                          | N/A      |
| <b>Conducted Emissions</b>                                            | 15.507 &RSS-GEN                                     | 14                          | *        |
| <b>Transmission Duration</b>                                          | 15.509(c)                                           | 15                          | **       |

\* NOT APPLICABLE to the EUT as it is a battery-powered device;

\*\* NOT APPLICABLE to the EUT as it is not a handheld device.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

|                                    | Prob. Dist. | Uncertainty(dB) | Uncertainty(dB) | Uncertainty(dB) |
|------------------------------------|-------------|-----------------|-----------------|-----------------|
|                                    |             | 30-1000MHz      | 1-6.5GHz        | Conducted       |
| Combined Std.<br>Uncertainty $u_c$ | norm.       | $\pm 2.36$      | $\pm 2.99$      | $\pm 1.83$      |



Wei Li  
Lab Manager  
Advanced Compliance Lab

Date: February 12, 2020

## Section 2. General Equipment & Test Configuration

### 2.1. EUT Specification

|                                             |                                                                                                                                                                           |                    |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| <b>EUT</b>                                  | GPR Model No. AM200 manufactured by IDS GeoRadar srl is an ultra-wide band ground penetrating radar (GPR) intended for geophysical surveying and non-destructive testing. |                    |
| <b>Supply Voltage</b>                       | 12.0 VDC, provided by Lithium Ion Rechargeable Battery                                                                                                                    |                    |
| <b>Operating Frequency</b>                  |                                                                                                                                                                           | 126.1MHz -826.0MHz |
| <b>-10dB UWB Bandwidth</b>                  | 699.9 MHz                                                                                                                                                                 |                    |
| <b>Modulation Type</b>                      | 100KHz Pulse Repetition Frequency (PRF)                                                                                                                                   |                    |
| <b>Peak Emissions in a 50 MHz Bandwidth</b> | Max. peak emissions is under 1GHz                                                                                                                                         |                    |
| <b>Antenna</b>                              | Dipole Antenna                                                                                                                                                            |                    |
| <b>Hardware Version (Model No.)</b>         | AM200                                                                                                                                                                     |                    |
| <b>Software Version</b>                     | 01.01.001                                                                                                                                                                 |                    |

### 2.2. Description of Operation

The system performs time domain reflectometry by radiating a radio frequency impulse with a repetition frequency of 100KHz from a transmitting dipole (TX dipole). Transitions between materials exhibiting different wave impedance through which the electromagnetic wave travels cause the wave to be reflected. These reflections are received by the receiving dipole (RX dipole) and sampled by the instrument. Results may be displayed in real time on the system screen and recorded on an internal solid state disk

drive for later analysis. In the field, the system is powered from a removable rechargeable battery.


### 2.3. System Diagram

See Attachment provided by Applicant.

### 2.4. General EUT Setup

The EUT is operated in continuous transmission mode with the antennas permanently mounted in an all in one plastic housing with the controlling electronics and battery.

All measurements shall be made at room temperature and at nominal DC input voltage (provided by a battery). The EUT is placed directly on the dry sand with no ground plane under it.

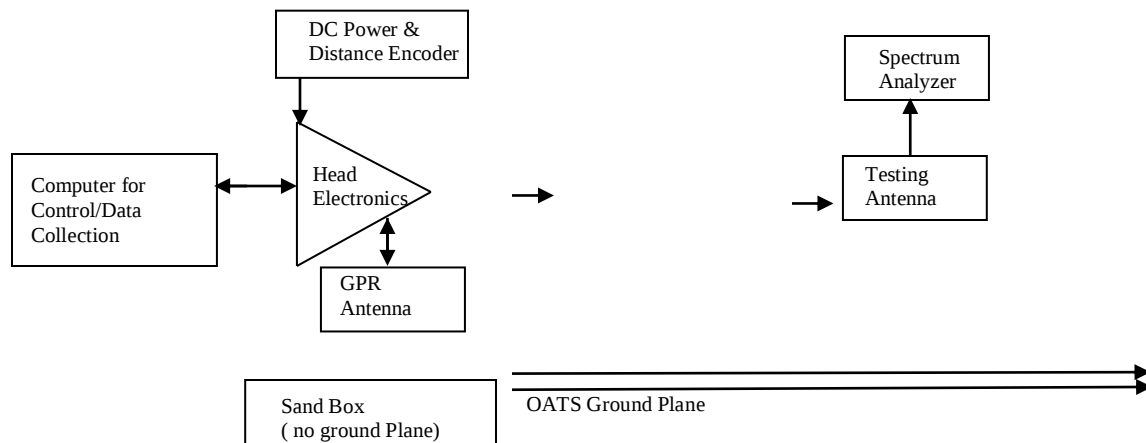

### 2.5. Operational Frequency channel(s) for testing:

- Clock on PCB : 50MHz
- Antenna center frequencies: 200MHz

## Section 3. Test Methodology & Facilities

### 3.1 Measurement Procedure

The tests documented in this report were performed in accordance with ANSI C63.4 /C63.10, FCC CFR 47 Part 2 & 15, Industry Canada RSS-220 (Issue 1/2009) & FCC Order, ET Docket No. 980153(FCC02-08). Test procedure described in FCC “KDB 393764, UWB Compliance Measurements” is used in this report. The test methods used to generate the data in this test report is in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

In accordance with ANSI C63.10:2013, Section 10.2.2, the device under test was placed on a bed of dry sand and rotated through 16 azimuth angles (Clause 5.4) to determine which produced the highest emission relative to the limit. The azimuth that produced the highest emission relative to the limit was used for all radiated emission measurements.

### 3.2. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at Hillsborough, New Jersey, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, “Radio Interference Measuring Apparatus and Measurement Methods”.

This site is accepted by FCC to perform measurements under Part 15 or 18 (Registration # 90601, MRA designation No. US5347) and also designated by IC as “ site IC 3130A”. ACL is accredited by NVLAP, Laboratory Code 200101-0. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

### 3.3. Test and Measurement Equipment

The following test and measurement equipment was utilized for the tests documented in this report:

| Manufacture     | Model   | Serial No. | Description                        | Cal Due<br>dd/mm/<br>yy |
|-----------------|---------|------------|------------------------------------|-------------------------|
| Hewlett-Packard | HP8546A | 3448A00290 | EMI Receiver                       | 25/09/20                |
| Agilent         | E4440A  | US40420700 | 3Hz-26.5GHz Spectrum Analyzer      | 17/06/20                |
| EMCO            | 3104C   | 9307-4396  | 20-300MHz Biconical Antenna        | 15/10/20                |
| EMCO            | 3146    | 9008-2860  | 200-1000MHz Log-Periodic Antenna   | 15/10/20                |
| EMCO            | 3115    | 4945       | Double Ridge Guide Horn Antenna    | 12/06/21                |
| Narda           | BW-10W5 | 3037       | 10dB , 5W in-line Power Attenuator | 15/01/21                |
| Belden          | 9913    | ACL23      | RF 18'Coxial Cable                 | 15/01/21                |

All Test Equipment Used is Calibrated, Traceable to NIST Standards. 2 Year Interval.

## Section 4. Measurement Data

Test No.1

|                      |                        |                       |                            |
|----------------------|------------------------|-----------------------|----------------------------|
| <b>Name of Test:</b> | <i>Cross Reference</i> | <b>Test Standard:</b> | <i>15.505 &amp;RSS-GEN</i> |
| <b>Tested By:</b>    | WEI LI                 | <b>Test Date:</b>     | 01/27/2020-02/12/2020      |

**Minimum** 15.505(a)

**Standard:** Equipment under test complies with all the relevant and applicable requirements of Subpart A, Subpart B and Section 15.201 through 15.204 and Section 15.207 of Subpart C. 15.505(b)  
The Digital circuitry portion of the EUT has been tested and verified to comply with 47 CFR Part 15, subpart B.

**Method of Measurement:** a) Except where specifically stated otherwise within this subpart, the provisions of Subparts A and B and of Sections 15.201 through 15.204 and Section 15.207 of Subpart C of this part apply to unlicensed UWB intentional radiators. The provisions of Sections 15.35(c) and 15.205 do not apply to devices operated under this subpart. The provisions of Footnote US 246 to the Table of Frequency Allocations contained in Section 2.106 of this chapter do not apply to devices operated under this subpart.

b) The requirements of Subpart F apply only to the radio transmitter, i.e., the intentional radiator, contained in the UWB device. Other aspects of the operation of a UWB device may be subject to requirements contained elsewhere in this chapter. In particular, a UWB device that contains digital circuitry not directly associated with the operation of the transmitter also is subject to the requirements for unintentional radiators in Subpart B of this chapter. Similarly, an associated receiver that operates (tunes) within the frequency range 30 MHz to 960 MHz is subject to the requirements in Subpart B of this chapter.

**Test Result:**

**Complies**

**Test Data:**

**Data and Plots**

|                        |                |
|------------------------|----------------|
| <b>Project Number:</b> | 0048-200127-02 |
| <b>EUT:</b>            | AM200          |
| <b>S/N:</b>            | 020-20-00001   |
| <b>Tested By:</b>      | David Tu       |
| <b>Temperature:</b>    | 65° F          |
| <b>Humidity:</b>       | 30%            |

***Spurious Radiated Emissions from Digital Circuitry (RF off) complies with FCC Part 15.109 (Class A), measured per ANSI C63.4 standard setup.***

| Freq. (MHz) | H,V | Height (m) | Angle (degree) | SA* Reading (dBuV/m) | Refer to Part 15.109 3m Limit (dBuV/m) | Margin (dB) | Result |
|-------------|-----|------------|----------------|----------------------|----------------------------------------|-------------|--------|
| 78.8        | H   | 1.8        | 090            | 20.5                 | 39.1                                   | -18.6       | Pass   |
| 87.0        | H   | 1.8        | 090            | 21.7                 | 39.1                                   | -17.4       | Pass   |
| 99.7        | H   | 1.8        | 045            | 25.3                 | 43.5                                   | -18.2       | Pass   |
| 103.1       | H   | 1.6        | 090            | 28.4                 | 43.5                                   | -15.1       | Pass   |
| 107.8       | H   | 1.6        | 045            | 27.2                 | 43.5                                   | -16.3       | Pass   |
| 142.6       | H   | 1.0        | 135            | 28.3                 | 43.5                                   | -15.2       | Pass   |
| 144.8       | H   | 1.0        | 135            | 28.8                 | 43.5                                   | -14.8       | Pass   |
| 250         | H   | 1.0        | 090            | 20.8                 | 46.4                                   | -25.6       | Pass   |
| 264         | H   | 1.0        | 045            | 20.2                 | 46.4                                   | -26.2       | Pass   |
| 300         | H   | 1.0        | 135            | 26.5                 | 46.4                                   | -19.9       | Pass   |
| 350         | H   | 1.0        | 090            | 18.3                 | 46.4                                   | -28.1       | Pass   |
| 400         | H   | 1.1        | 135            | 18.2                 | 46.4                                   | -28.3       | Pass   |
| 700         | H   | 1.2        | 180            | 24.0                 | 46.4                                   | -22.4       | Pass   |
| 726         | H   | 1.2        | 180            | 23.9                 | 46.4                                   | -22.5       | Pass   |
| 850         | H   | 1.1        | 235            | 30.8                 | 46.4                                   | -15.6       | Pass   |
| 900         | H   | 1.1        | 235            | 26.3                 | 46.4                                   | -20.1       | Pass   |
| 1090        | H   | 1.1        | 235            | 31.5                 | 49.5                                   | -18.0       | Pass   |
| 1350        | H   | 1.1        | 180            | 31.3                 | 49.5                                   | -18.2       | Pass   |
| 1400        | H   | 1.1        | 180            | 31.4                 | 49.5                                   | -18.1       | Pass   |
| 78.8        | V   | 1.1        | 180            | 27.5                 | 39.1                                   | -11.6       | Pass   |
| 87          | V   | 1.1        | 235            | 28.7                 | 39.1                                   | -10.4       | Pass   |
| 99.7        | V   | 1.1        | 235            | 32.3                 | 43.5                                   | -11.2       | Pass   |
| 103.1       | V   | 1.1        | 180            | 35.4                 | 43.5                                   | -8.1        | Pass   |
| 142.6       | V   | 1.1        | 180            | 35.3                 | 43.5                                   | -8.2        | Pass   |
| 144.8       | V   | 1.1        | 180            | 35.8                 | 43.5                                   | -7.8        | Pass   |
| 204         | V   | 1.1        | 235            | 29.3                 | 43.5                                   | -14.2       | Pass   |

|      |   |     |     |      |      |       |      |
|------|---|-----|-----|------|------|-------|------|
| 234  | V | 1.1 | 180 | 38.1 | 49.5 | -11.4 | Pass |
| 258  | V | 1.1 | 180 | 37.8 | 49.5 | -11.7 | Pass |
| 300  | V | 1.1 | 235 | 39.7 | 49.5 | -9.8  | Pass |
| 500  | V | 1.1 | 180 | 23.3 | 46.4 | -23.1 | 23.3 |
| 600  | V | 1.1 | 180 | 17.2 | 46.4 | -29.2 | 17.2 |
| 700  | V | 1.1 | 180 | 25.8 | 46.4 | -20.6 | 25.8 |
| 755  | V | 1.1 | 235 | 23.0 | 46.4 | -23.4 | 23.0 |
| 848  | V | 1.1 | 180 | 24.6 | 46.4 | -21.8 | 24.6 |
| 1400 | V | 1.1 | 180 | 24.1 | 46.4 | -22.4 | 24.1 |
| 1450 | V | 1.1 | 180 | 24.6 | 46.4 | -21.8 | 24.6 |

\*Quasi-peak reading. For emissions that have peak values close to ( or over) the specification limit (if any) will be also measured in the quasi-peak or average mode to determine the compliance.

Test No.2

|                      |                                          |                       |                                   |
|----------------------|------------------------------------------|-----------------------|-----------------------------------|
| <b>Name of Test:</b> | <b><i>Marketing of UWB Equipment</i></b> | <b>Test Standard:</b> | <b><i>15.507 &amp;RSS-GEN</i></b> |
| <b>Tested By:</b>    | WEI LI                                   | <b>Test Date:</b>     | 01/27/2020-02/12/2020             |

**Minimum** 15.507/ 2.909

**Standard:** The responsible party is properly informed about the responsible for ensuring that the equipment is marketed only to eligible parties, and provide correct information on the customers and users.  
(See Important note for the US customers of the Installation Guide and User Manual)

**Method of Measurement:** In some cases, the operation of UWB devices is limited to specific parties, e.g., law enforcement, fire and rescue organizations operating under the auspices of a state or local government. The marketing of UWB devices must be directed solely to parties eligible to operate the equipment. The responsible party, as defined in Section 2.909 of this chapter, is responsible for ensuring that the equipment is marketed only to eligible parties. Marketing of the equipment in any other manner may be considered grounds for revocation of the grant of certification issued for the equipment.

**Test Result:**

**Complies**

**Test Data:**

**NA**

Test No.3

|                      |                                                |                       |                                          |
|----------------------|------------------------------------------------|-----------------------|------------------------------------------|
| <b>Name of Test:</b> | <b><i>Pulse Repetition Frequency (PRF)</i></b> | <b>Test Standard:</b> | <b><i>15.509(d) &amp;RSS-220 6.2</i></b> |
| <b>Tested By:</b>    | WEI LI                                         | <b>Test Date:</b>     | 01/27/2020-02/12/2020                    |

**Minimum** Definition:  
**Standard:** Pulse Repetition Frequency (PRF) is the trigger repetition frequency.

PRF declared by applicant: Total 100KHz

**Method of** Tested at 3-meter OATS per ANSI C63.4  
**Measurement:** Spectrum Analyzer Settings:  
RBW: 30KHz  
VBW:  $\geq$ RBW  
Detector: Peak  
Span: As required  
Sweep: Auto

**Test Result:**

**Complies**

**Test Data:**

**PRF =100KHz**

Test No.4

|                      |                      |                       |                                                  |
|----------------------|----------------------|-----------------------|--------------------------------------------------|
| <b>Name of Test:</b> | <i>UWB Bandwidth</i> | <b>Test Standard:</b> | <i>15.509(a) 15.503(a) &amp;RSS-220 6.2.1(a)</i> |
| <b>Tested By:</b>    | WEI LI               | <b>Test Date:</b>     | 01/27/2020-02/12/2020                            |

**Minimum  
Standard:**

Definition:

The bandwidth of a UWB emission is defined by the points on the emission spectrum where the amplitude is 10 dB below the maximum emission amplitude (i.e., the -10 dB points), as based on the complete transmission system including the antenna. The upper boundary is designated  $f_H$  and the lower boundary is designated  $f_L$ . The frequency at which the highest radiated emission occurs is designated  $f_M$ . The center frequency  $f_C$ , equals  $(f_H + f_L) / 2$ . The fractional bandwidth equals  $2 * (f_H - f_L) / (f_H + f_L)$ .

In cases where the measured emission spectrum contains multiple (more than two) -10 dB points, the outermost points define the bandwidth (i.e., the widest bandwidth is assumed).

Limits:

The UWB bandwidth of an imaging system operating under the provisions of this section must be below 10.6 GHz.

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Method of Measurement:</b> | <p>Tested at 3-meter OATS per ANSI C63.4</p> <p>Spectrum Analyzer Settings:</p> <p>RBW: 1MHz</p> <p>VBW: 3MHz</p> <p>Detector: Peak</p> <p>Span: As required ( to display a full spectrum of the RF emission)</p> <p>Sweep: Auto</p> <p>Test Procedure:</p> <p>1) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.</p> <p>2) Measure the Highest radiated emission at <math>f_M</math> as described in the test No. 9.</p> <p>3) Recorded the upper and lower frequency that are at the side of the band bounded by the points at 10 dB below the highest radiated UWB emission level. Measuring the bandwidth of a UWB device using a radiated test set-up, it is imperative that appropriate adjustments be made to the measured amplitude levels to account for the frequency-dependent components of the measurement system (e.g., antenna gain or factor, pre-amplifier gain, cable loss, etc). Since UWB emissions can have bandwidths several GHz wide, these frequency-dependent characteristics can vary dramatically over the fundamental emission. According to the nature of the broadband emission characteristics, significant care must be taken to capture the true spectrum of emission, extremely narrow sweep widths is recommended.</p> <p>4) The UWB bandwidth is the different of the upper and lower frequency recorded.</p> |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

**Test Result:**      **Complies**

**Test Data:**      **Data and Plots**

Measurement Data (Values in MHz):

|               |                                         |       |
|---------------|-----------------------------------------|-------|
| $f_M$         | The highest emission peak               | 268.0 |
| $f_L$         | 10 dB below the highest peak            | 126.1 |
| $f_H$         | 10 dB above the highest peak            | 826.0 |
| $f_C$         | Calculated: $(f_H + f_L)/2$             | 476.1 |
| Bandwidth     | Calculated: $(f_H - f_L)$               | 699.9 |
| Fractional BW | Calculated: $2*(f_H - f_L)/(f_H + f_L)$ | 1.477 |

Note: The Fraction Bandwidth is also greater than 0.2.

Measurement Plots:

|                        |                |
|------------------------|----------------|
| <b>Project Number:</b> | 0048-200127-02 |
| <b>EUT:</b>            | AM200          |
| <b>S/N:</b>            | 020-20-00001   |
| <b>Tested By:</b>      | Wei Li         |
| <b>Temperature:</b>    | 65 °F          |
| <b>Humidity:</b>       | 30%            |

|                       |                                             |
|-----------------------|---------------------------------------------|
| <b>Section:</b>       | UWB Bandwidth                               |
| <b>Plot Name:</b>     | 10dB UWB Bandwidth in Anechoic Chamber_Peak |
| <b>Configuration:</b> | Stand alone, Continue operation             |




MARKER  
268.0 MHz  
65.63 dB $\mu$ V/m

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 268.0 MHz  
65.63 dB $\mu$ V/m

LOG REF 82.0 dB $\mu$ V/m

10  
dB/  
#ATN  
0 dB


DL  
55.6  
dB $\mu$ V/m  
VA SB  
SC FC  
ACORR

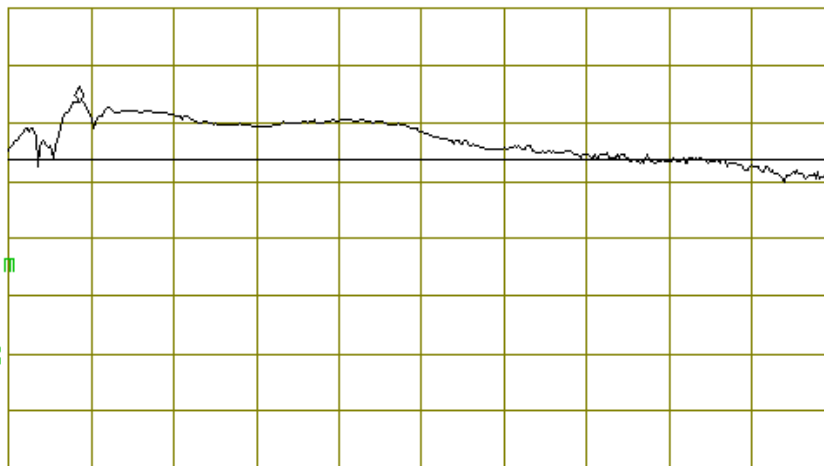

START 200.0 MHz STOP 1.0000 GHz  
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 20.0 msec

|                        |                |
|------------------------|----------------|
| <b>Project Number:</b> | 0048-200127-02 |
| <b>EUT:</b>            | AM200          |
| <b>S/N:</b>            | 020-20-00001   |
| <b>Tested By:</b>      | Wei Li         |
| <b>Temperature:</b>    | 65° F          |
| <b>Humidity:</b>       | 30%            |

|                       |                                              |
|-----------------------|----------------------------------------------|
| <b>Section:</b>       | UWB Bandwidth                                |
| <b>Plot Name:</b>     | 10dB UWB Bandwidth in Anechoic Chamber_Below |
| <b>Configuration:</b> | Stand alone, Continue operation              |

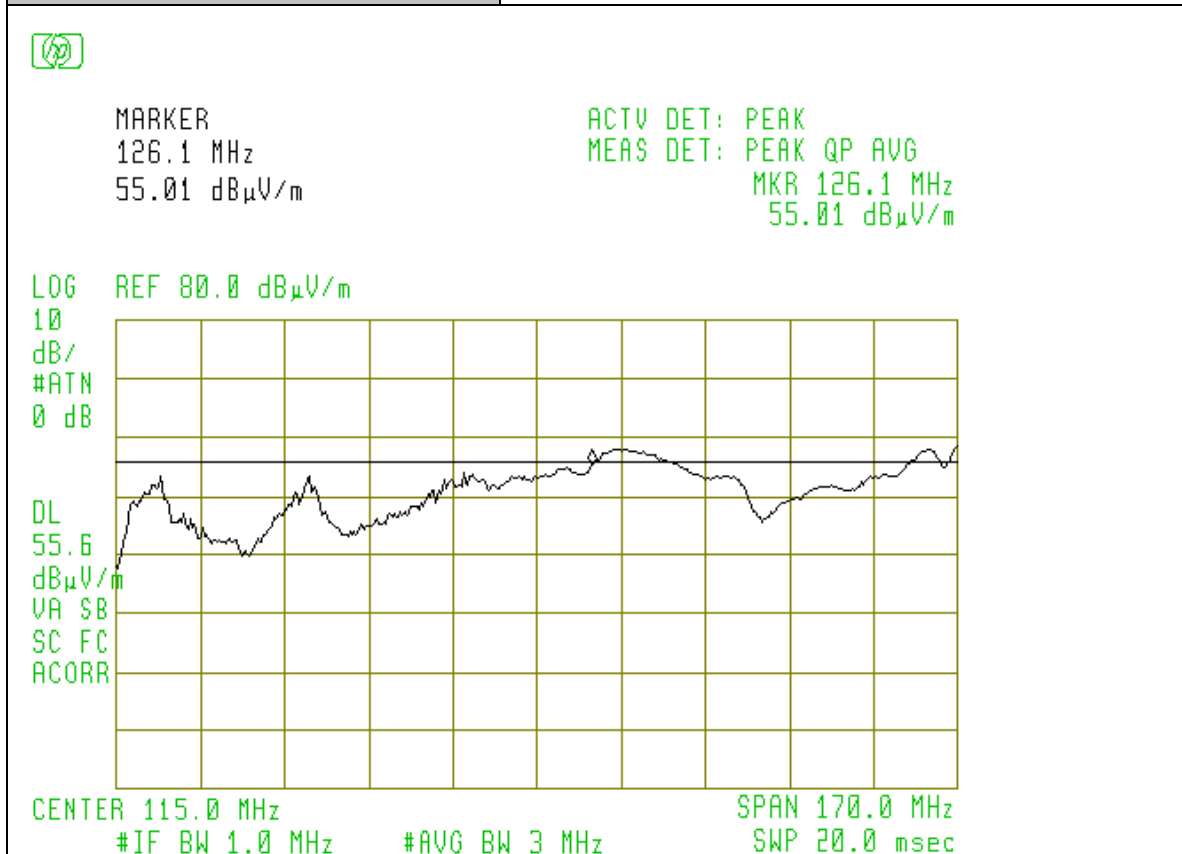

|                        |                |
|------------------------|----------------|
| <b>Project Number:</b> | 0048-200127-02 |
| <b>EUT:</b>            | AM200          |
| <b>S/N:</b>            | 020-20-00001   |
| <b>Tested By:</b>      | Wei Li         |
| <b>Temperature:</b>    | 65°F           |
| <b>Humidity:</b>       | 30%            |

|                       |                                              |
|-----------------------|----------------------------------------------|
| <b>Section:</b>       | UWB Bandwidth                                |
| <b>Plot Name:</b>     | 10dB UWB Bandwidth in Anechoic Chamber_above |
| <b>Configuration:</b> | Stand alone, Continue operation              |




MARKER  
826.0 MHz  
54.86 dBμV/m

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 826.0 MHz  
54.86 dBμV/m

LOG REF 82.0 dBμV/m

10  
dB/  
#ATN  
0 dB

DL  
55.6  
dBμV/m  
VA SB  
SC FC  
ACORR

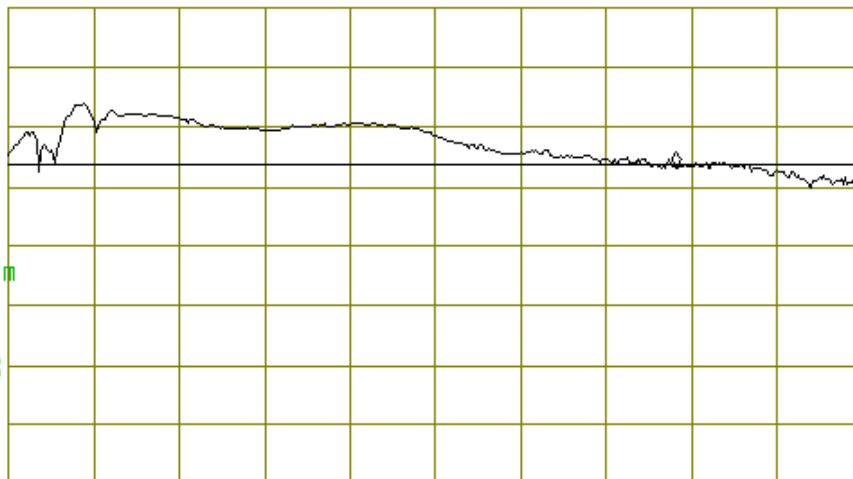

START 200.0 MHz STOP 1.0000 GHz  
#IF BW 1.0 MHz #AVG BW 3 MHz SWP 20.0 msec

Test No.5

|                      |                                                         |                       |                                        |
|----------------------|---------------------------------------------------------|-----------------------|----------------------------------------|
| <b>Name of Test:</b> | <b><i>General Operational Requirements for LFIS</i></b> | <b>Test Standard:</b> | <b><i>15.509(b) &amp;RSS-220 6</i></b> |
| <b>Tested By:</b>    | WEI LI                                                  | <b>Test Date:</b>     | 01/27/2020-02/12/2020                  |

**Minimum** 15.509(b) &RSS-220 6

**Standard:** Operation under the provisions of this section is limited to GPRs and wall imaging systems operated for the purposes with law enforcement, fire fighting, emergency rescue, scientific research, commercial mining, or construction.

**Method of Measurement:** The manufacturer Shall state that the device under test complies with the requirements outlined in section FCC Part 15.509 (b).

**Test Result:**

**Complies**

**Test Data:**

**NA**

Test No.6

|                      |                                                                           |                       |                                                                  |
|----------------------|---------------------------------------------------------------------------|-----------------------|------------------------------------------------------------------|
| <b>Name of Test:</b> | <b><i>Spurious Radiated Emissions <math>\leq 960\text{MHz}</math></i></b> | <b>Test Standard:</b> | <b><i>15.509(d) 15.209 &amp; RSS-220 3.4, 6.2(c), 6.2(d)</i></b> |
| <b>Tested By:</b>    | David Tu                                                                  | <b>Test Date:</b>     | 01/27/2020-02/12/2020                                            |

**Minimum** Definition:

**Standard:** The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209.

Limits:

| Frequency<br>(MHz) | Field Strengths<br>Limits<br>(dB $\mu$ V/m) | Measuring RBW<br>kHz | Distance<br>(meters) |
|--------------------|---------------------------------------------|----------------------|----------------------|
| 0.009-0.490        | 67,6-20*Logf(kHz)                           | 1                    | 300                  |
| 0.490-1.705        | 87,6-20*Logf(kHz)                           | 9                    | 30                   |
| 1.705-30           | 29,5                                        | 9                    | 30                   |
| 30-88              | 40,0                                        | 120                  | 3                    |
| 88-216             | 43,5                                        | 120                  | 3                    |
| 216-960            | 46,0                                        | 120                  | 3                    |

**Method of Measurement:** Tested at 3-meter OATS per ANSI C63.4  
Spectrum Analyzer Settings:  
RBW: 120KHz  
VBW:  $\geq 3 \times$  RBW  
Detector: Quasi-Peak  
Span: As required  
Sweep: Auto

Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane ( $0^\circ$  degree position)
- 2) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to peak with a bandwidth of 120 kHz during monitoring the frequency range below 960 MHz.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded. At each of the frequencies where a field strength was recorded the final measurement was performed with a Quasi-Peak detector.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 was repeated.
- 9) The EUT was rotating from  $0^\circ$  to  $360^\circ$  degrees with  $45^\circ$  step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

**Test Result:**

**Complies**

**Test Data:**

**Data**

|                        |                |
|------------------------|----------------|
| <b>Project Number:</b> | 0048-200127-02 |
| <b>EUT:</b>            | AM200          |
| <b>S/N:</b>            | 020-20-00001   |
| <b>Tested By:</b>      | David Tu       |
| <b>Temperature:</b>    | 65° F          |
| <b>Humidity:</b>       | 30%            |

Worst Case Scenario: the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

- EUT Position (angle) : 45 ° interval.
- Antenna Polarization : Horizontal & Vertical; Antenna Height : 1-4m

| Freq.*<br>(MHz) | H,V | SA QP<br>Reading<br>(dBuV/<br>m) | Height<br>(m) | Angle<br>(degree) | Refer to<br>Part 15.209<br>3m Limit<br>(dBuV/m) | Margin<br>(dB) | Result |
|-----------------|-----|----------------------------------|---------------|-------------------|-------------------------------------------------|----------------|--------|
| 149.9           | H   | 38.5                             | 1.8           | 235               | 43.5                                            | -5.0           | Pass   |
| 168.1           | H   | 40.8                             | 1.8           | 270               | 43.5                                            | -2.7           | Pass   |
| 171.5           | H   | 40.1                             | 1.6           | 270               | 43.5                                            | -3.4           | Pass   |
| 226.7           | H   | 39.6                             | 1.0           | 180               | 43.5                                            | -3.9           | Pass   |
| 242.7           | H   | 40.7                             | 1.0           | 090               | 46.0                                            | -5.3           | Pass   |
| 329.3           | H   | 36.7                             | 1.0           | 090               | 46.0                                            | -9.3           | Pass   |
| 400.0           | H   | 36.8                             | 1.0           | 090               | 46.0                                            | -9.2           | Pass   |
| 517.3           | H   | 37.4                             | 1.0           | 180               | 46.0                                            | -8.6           | Pass   |
| 789.3           | H   | 40.2                             | 1.0           | 180               | 46.0                                            | -5.8           | Pass   |
| 121.8           | V   | 37.8                             | 1.2           | 090               | 43.5                                            | -5.7           | Pass   |
| 135.8           | V   | 38.9                             | 1.2           | 090               | 43.5                                            | -4.6           | Pass   |
| 151.6           | V   | 39.7                             | 1.1           | 235               | 43.5                                            | -3.8           | Pass   |
| 254.7           | V   | 40.5                             | 1.1           | 235               | 43.5                                            | -3.0           | Pass   |
| 305.3           | V   | 37.7                             | 1.1           | 135               | 43.5                                            | -5.8           | Pass   |
| 346.7           | V   | 36.8                             | 1.1           | 135               | 46.0                                            | -9.2           | Pass   |
| 400.0           | V   | 37.9                             | 1.1           | 235               | 46.0                                            | -8.1           | Pass   |
| 514.3           | V   | 37.7                             | 1.1           | 235               | 46.0                                            | -8.3           | Pass   |
| 844.4           | V   | 39.3                             | 1.1           | 135               | 46.0                                            | -6.7           | Pass   |

\*Emissions from Digital circuitry (identified in Test No.1 for FCC Part 15 B) excluded.

\*\*Quasi-Peak Readings

Test No.7

|                      |                                                      |                       |                                                                 |
|----------------------|------------------------------------------------------|-----------------------|-----------------------------------------------------------------|
| <b>Name of Test:</b> | <b><i>Spurious Radiated Emissions &gt;960MHz</i></b> | <b>Test Standard:</b> | <b><i>15.509(d) 15.209 &amp;RSS-220 3.4, 6.2(c), 6.2(d)</i></b> |
| <b>Tested By:</b>    | David Tu                                             | <b>Test Date:</b>     | 01/27/2020-02/12/2020                                           |

**Minimum Definition:**  
**Standard:** The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz.

Limits:

| Frequency<br>(MHz) | EIRP<br>@ 3 meters<br>(1 MHz BW)<br>(dBm) | Field strength<br>@ 3 meters<br>(1 MHz BW)<br>(dBμV/m) | Field strength<br>@ 1 meters<br>(1 MHz BW)<br>(dBμV/m) |
|--------------------|-------------------------------------------|--------------------------------------------------------|--------------------------------------------------------|
| 960-1610           | -                                         | 29,9                                                   | 39,4                                                   |
| 1610-1990          | -                                         | 41,9                                                   | 51,4                                                   |
| 1990-3100          | -                                         | 43,9                                                   | 53,4                                                   |
| 3100-10600         | -                                         | 53,9                                                   | 63,4                                                   |
| Above 10600        | -                                         | 43,9                                                   | 53,9                                                   |

Remark: The limits were converted from EIRP to field strength at 3 and 1 meter according to FCC 15.503(k).

**Method of Measurement:** Tested at 3-meter OATS per ANSI C63.4  
Spectrum Analyzer Settings:  
RBW: 1MHz  
VBW:  $\geq 3 \times$  RBW  
Detector: RMS Average Detector  
Span: As required  
Sweep: Auto

Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane ( $0^\circ$  degree position)
- 2) The receiving antenna is placed at 1 meter away from the EUT and it is pointed in the direction of the radiating head with an inclination of  $-10^\circ$  to find the highest emission.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to RMS with a bandwidth of 1 MHz during monitoring the frequency range above 960 MHz.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 were repeated.
- 9) The EUT was rotating from  $0^\circ$  to  $360^\circ$  degrees with  $45^\circ$  step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

**Test Result:**

**Complies**

**Test Data:**

**Data**

|                        |                |
|------------------------|----------------|
| <b>Project Number:</b> | 0048-200127-02 |
| <b>EUT:</b>            | AM200          |
| <b>S/N:</b>            | 020-20-00001   |
| <b>Tested By:</b>      | David Tu       |
| <b>Temperature:</b>    | 65° F          |
| <b>Humidity:</b>       | 30%            |

Worst Case Scenario: the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

- EUT Position (angle) : 45 ° interval.
- Antenna Polarization : Horizontal & Vertical; Antenna Height: 1m-4m.

| Freq.*<br>(MHz) | H,V | SA**<br>Average<br>Reading<br>@1m<br>(dBuV/m) | Height<br>(m) | Angle<br>(degree) | Refer to<br>15.509(d)<br>15.209 & RSS-<br>220 3.4, 6.2(c),<br>6.2(d) Limit<br>(dBuV/m) | Margin<br>(dB) | Result |
|-----------------|-----|-----------------------------------------------|---------------|-------------------|----------------------------------------------------------------------------------------|----------------|--------|
| 1007.0          | H   | 35.99                                         | 1.1           | 000               | 39.4                                                                                   | -3.41          | Pass   |
| 1150.5          | H   | 32.56                                         | 1.1           | 000               | 39.4                                                                                   | -6.84          | Pass   |
| 1200.5          | H   | 32.05                                         | 1.1           | 180               | 39.4                                                                                   | -7.35          | Pass   |
| 1215.0          | H   | 31.67                                         | 1.1           | 180               | 39.4                                                                                   | -7.73          | Pass   |
| 1512.5          | H   | 32.83                                         | 1.1           | 000               | 39.4                                                                                   | -6.57          | Pass   |
| 1600.0          | H   | 32.15                                         | 1.1           | 000               | 39.4                                                                                   | -7.25          | Pass   |
| 1710.0          | H   | 34.16                                         | 1.1           | 180               | 39.4                                                                                   | -5.24          | Pass   |
| 1004.5          | V   | 38.33                                         | 1.1           | 135               | 39.4                                                                                   | -1.07          | Pass   |
| 1167.5          | V   | 36.33                                         | 1.1           | 135               | 39.4                                                                                   | -3.07          | Pass   |
| 1200.0          | V   | 35.73                                         | 1.1           | 235               | 39.4                                                                                   | -3.67          | Pass   |
| 1312.5          | V   | 36.21                                         | 1.1           | 235               | 39.4                                                                                   | -3.19          | Pass   |
| 1377.5          | V   | 36.70                                         | 1.1           | 135               | 39.4                                                                                   | -2.70          | Pass   |
| 1400.5          | V   | 35.25                                         | 1.1           | 135               | 39.4                                                                                   | -4.15          | Pass   |

**NOTE:**

\* Emissions from Digital circuitry (identified in Test No.1 for FCC Part 15B) are excluded.

\*\*SA (Spectrum Analyzer) Reading Setup: Average Reading for above 960MHz; 1m/3m distance factor applied if needed.

Test No.8

|                      |                                               |                       |                                                     |
|----------------------|-----------------------------------------------|-----------------------|-----------------------------------------------------|
| <b>Name of Test:</b> | <b><i>Radiated Emissions in GPS Bands</i></b> | <b>Test Standard:</b> | <b><i>15.509(e) 15.209 &amp; RSS-220 6.2(e)</i></b> |
| <b>Tested By:</b>    | David Tu                                      | <b>Test Date:</b>     | 01/27/2020-02/12/2020                               |

**Minimum Standard:** Definition:  
In addition to the radiated emission limits specified for frequency above 960 MHz, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz in the GPS frequency bands.

Limits:

| Frequency<br>(MHz) | EIRP<br>@ 3<br>meters<br>(1 MHz<br>BW)<br>(dBm) | Field<br>strength<br>@ 3 meters<br>(1 MHz<br>BW)<br>(dBμV/m) | Field<br>strength<br>@ 1 meters<br>(1 MHz<br>BW)<br>(dBμV/m) |
|--------------------|-------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------|
| 1164-1240          | -75.3                                           | 19.9                                                         | 29.4                                                         |
| 1559-1610          | -75.3                                           | 19.9                                                         | 29.4                                                         |

Remark: The limits were converted from EIRP to field strength at 3 and 1 meter according to FCC 15.503(k).

**Method of Measurement:** Tested at 3-meter OATS per ANSI C63.4  
Spectrum Analyzer Settings:  
RBW: 1KHz  
VBW: >3xRBW  
Detector: RMS Average Detector  
Span: As required  
Sweep: Auto

Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position)
- 2) The receiving antenna is placed at 1 meter away from the EUT and it is pointed in the direction of the radiating head with an inclination of -10° to find the highest emission.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to RMS during monitoring the frequency range above 960 MHz.
- 5) Upon detection of a suspect emission signal, its amplitude and frequency were noted.
- 6) It is recommended to demodulate the received signals for suitable discrimination of the ambient emission from the EUT emission.
- 7) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded.
- 8) The receiving antenna was positioned in vertical polarization and the steps 2 to 6 were repeated.
- 9) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 10) All the worst case combination field strength emissions founded of each EUT position and antenna polarization was recorded in the following table and compared with the applicable limits.

**Test Result:**

**Complies**

**Test Data:**

**Data and Plot**


|                        |                |
|------------------------|----------------|
| <b>Project Number:</b> | 0048-200127-02 |
| <b>EUT:</b>            | AM200          |
| <b>S/N:</b>            | 020-20-00001   |
| <b>Tested By:</b>      | David Tu       |
| <b>Temperature:</b>    | 65° F          |
| <b>Humidity:</b>       | 30%            |

Worst Case Scenario: All maximum Field strength emissions were found at the following test set-up conditions:

| Freq. (MHz) | H,V | SA Reading (dBuV/m) | Height (m) | Angle (degree) | 1m Limit (dBuV/m) | Margin (dB) | Result |
|-------------|-----|---------------------|------------|----------------|-------------------|-------------|--------|
| 1168.56     | H   | 10.76               | 1.0        | 180            | 29.4              | -18.64      | Pass   |
| 1179.07     | H   | 10.54               | 1.0        | 180            | 29.4              | -18.86      | Pass   |
| 1227.97     | H   | 11.07               | 1.0        | 000            | 29.4              | -18.33      | Pass   |
| 1233.67     | H   | 11.85               | 1.0        | 000            | 29.4              | -17.55      | Pass   |
| 1561.04     | H   | 10.49               | 1.0        | 000            | 29.4              | -18.91      | Pass   |
| 1563.51     | H   | 10.19               | 1.0        | 180            | 29.4              | -19.21      | Pass   |
| 1567.33     | H   | 10.21               | 1.0        | 180            | 29.4              | -19.19      | Pass   |
| 1582.21     | H   | 9.25                | 1.0        | 000            | 29.4              | -20.15      | Pass   |
| 1167.17     | V   | 9.90                | 1.0        | 090            | 29.4              | -19.5       | Pass   |
| 1183.76     | V   | 9.98                | 1.0        | 090            | 29.4              | -19.42      | Pass   |
| 1197.57     | V   | 9.99                | 1.0        | 135            | 29.4              | -19.41      | Pass   |
| 1219.86     | V   | 9.92                | 1.0        | 135            | 29.4              | -19.48      | Pass   |
| 1562.83     | V   | 7.22                | 1.0        | 135            | 29.4              | -22.18      | Pass   |
| 1568.01     | V   | 8.16                | 1.0        | 090            | 29.4              | -21.24      | Pass   |
| 1574.39     | V   | 7.95                | 1.0        | 090            | 29.4              | -21.45      | Pass   |
| 1585.10     | V   | 7.50                | 1.0        | 090            | 29.4              | -21.9       | Pass   |


There were no broadband emissions related to the UWB transmitter. Measured signals were narrowband and related to the microprocessor / clocks and do not fall under the requirements of this section.

|                        |                                                                   |
|------------------------|-------------------------------------------------------------------|
| <b>Project Number:</b> | 0048-200127-02                                                    |
| <b>EUT:</b>            | AM200                                                             |
| <b>S/N:</b>            | 020-20-00001                                                      |
| <b>Tested By:</b>      | Wei Li                                                            |
| <b>Temperature:</b>    | 65°F                                                              |
| <b>Humidity:</b>       | 30%                                                               |
| <b>Section:</b>        | <i>Radiated Emissions in GPS Bands</i>                            |
| <b>Plot Name:</b>      | <b>Radiated Emissions in 1164-1240MHz<br/>Band<br/>H Polarity</b> |
| <b>Configuration:</b>  | Stand alone, Continue operation                                   |

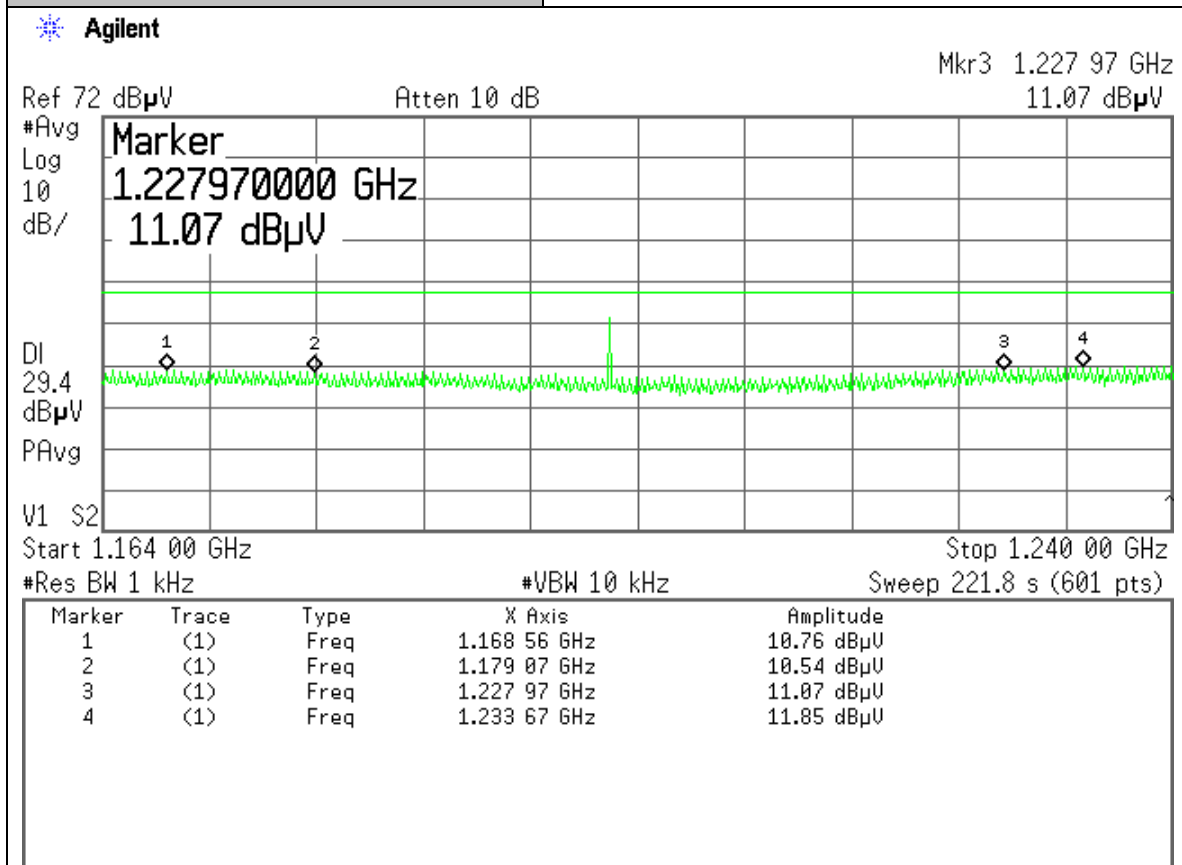


|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| <b>Project Number:</b> | 0048-200127-02                                                |
| <b>EUT:</b>            | AM200                                                         |
| <b>S/N:</b>            | 020-20-00001                                                  |
| <b>Tested By:</b>      | Wei Li                                                        |
| <b>Temperature:</b>    | 65° F                                                         |
| <b>Humidity:</b>       | 30%                                                           |
| <b>Section:</b>        | <i>Radiated Emissions in GPS Bands</i>                        |
| <b>Plot Name:</b>      | <b>Radiated Emissions in 1164-1240MHz Band<br/>V Polarity</b> |
| <b>Configuration:</b>  | Stand alone, Continue operation                               |

Agilent

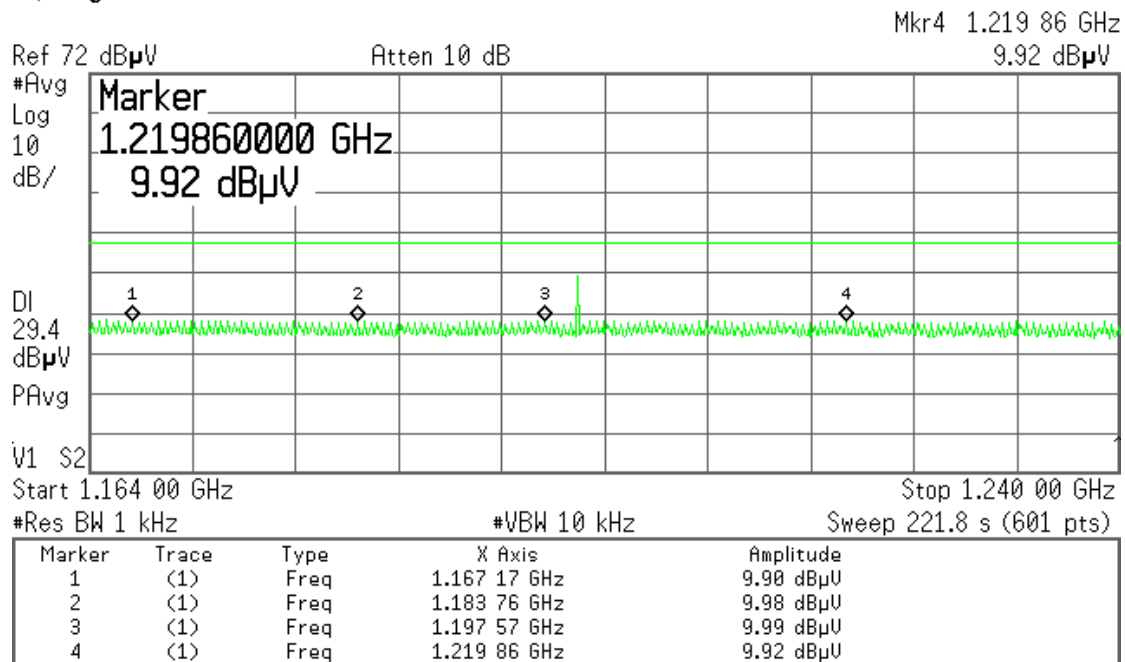

|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| <b>Project Number:</b> | 0048-200127-02                                                |
| <b>EUT:</b>            | AM200                                                         |
| <b>S/N:</b>            | 020-20-00001                                                  |
| <b>Tested By:</b>      | Wei Li                                                        |
| <b>Temperature:</b>    | 65° F                                                         |
| <b>Humidity:</b>       | 30%                                                           |
| <b>Section:</b>        | <i>Radiated Emissions in GPS Bands</i>                        |
| <b>Plot Name:</b>      | <b>Radiated Emissions in 1559-1610MHz Band<br/>H Polarity</b> |
| <b>Configuration:</b>  | Stand alone, Continue operation                               |


 **Agilent**

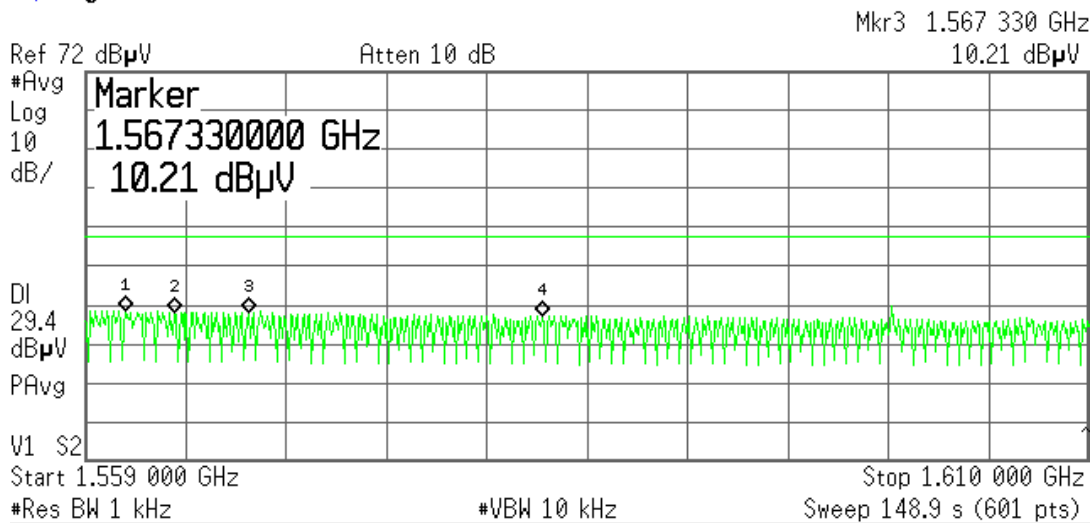

| Marker | Trace | Type | X Axis        | Amplitude  |
|--------|-------|------|---------------|------------|
| 1      | (1)   | Freq | 1.561 040 GHz | 10.49 dBμV |
| 2      | (1)   | Freq | 1.563 505 GHz | 10.19 dBμV |
| 3      | (1)   | Freq | 1.567 330 GHz | 10.21 dBμV |
| 4      | (1)   | Freq | 1.582 205 GHz | 9.25 dBμV  |

|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| <b>Project Number:</b> | 0048-200127-02                                                |
| <b>EUT:</b>            | AM200                                                         |
| <b>S/N:</b>            | 020-20-00001                                                  |
| <b>Tested By:</b>      | Wei Li                                                        |
| <b>Temperature:</b>    | 65 °F                                                         |
| <b>Humidity:</b>       | 30%                                                           |
| <b>Section:</b>        | <i>Radiated Emissions in GPS Bands</i>                        |
| <b>Plot Name:</b>      | <b>Radiated Emissions in 1559-1610MHz Band<br/>V Polarity</b> |
| <b>Configuration:</b>  | Stand alone, Continue operation                               |

 **Agilent**

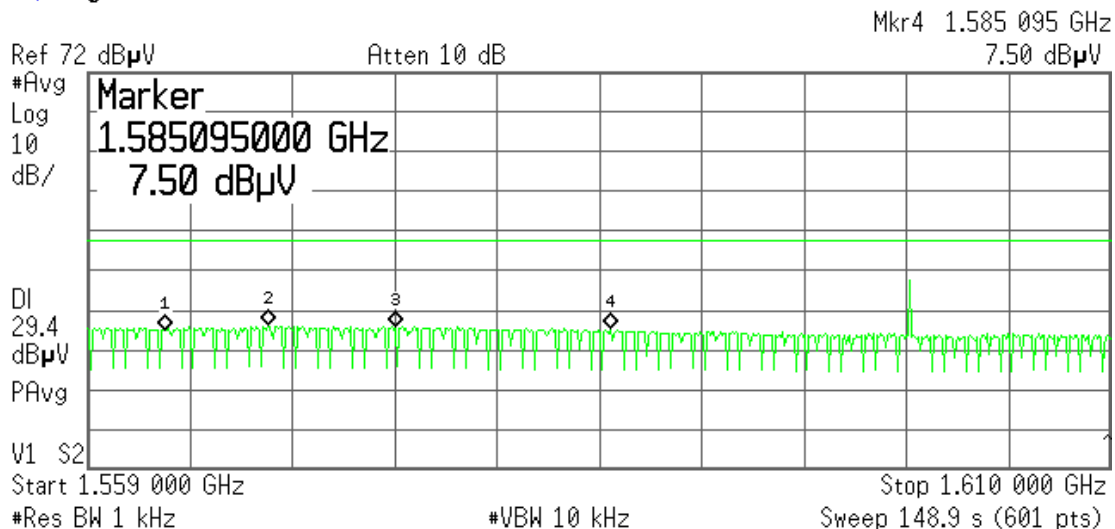

| Marker | Trace | Type | X Axis        | Amplitude |
|--------|-------|------|---------------|-----------|
| 1      | (1)   | Freq | 1.562 825 GHz | 7.22 dBμV |
| 2      | (1)   | Freq | 1.568 010 GHz | 8.16 dBμV |
| 3      | (1)   | Freq | 1.574 385 GHz | 7.95 dBμV |
| 4      | (1)   | Freq | 1.585 095 GHz | 7.50 dBμV |

Test No.9

|                      |                                                           |                       |                                              |
|----------------------|-----------------------------------------------------------|-----------------------|----------------------------------------------|
| <b>Name of Test:</b> | <b><i>Highest Radiated Emission at <math>f</math></i></b> | <b>Test Standard:</b> | <b>15.509(f) 15.209 &amp; RSS-220 6.2(g)</b> |
| <b>Tested By:</b>    | David Tu                                                  | <b>Test Date:</b>     | 01/27/2020-02/12/2020                        |

**Minimum** Definition:

**Standard:** For UWB devices where the frequency at which the highest radiated emission occurs,  $f_M$ , is above 960 MHz, there is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on  $f_M$ .

Limits:

The peak emission level contained within a 50 MHz bandwidth centered on  $f_M$  must be limited to a maximum of 0 dBm EIRP.

| EIRP limit<br><br>(dBm) | Field strength limit<br>@ 3 meters<br>for 50MHz<br>RBW<br>(dBuV/m) | Field strength limit<br>@ 3 meters (measured<br>with 1 MHz RBW)<br>(dBuV/m) |
|-------------------------|--------------------------------------------------------------------|-----------------------------------------------------------------------------|
| 0                       | 95.2                                                               | 61.23                                                                       |

The limits were converted from EIRP to field strength at 3 meter according to FCC 15.503(k).

As the measurement was employed with a 1 MHz resolution bandwidth the applicable limit is adjusted with a  $20\log(1/50)$  dB factor.

$20 \log (1/50)\text{dBm} = -33.97 \text{ dBm}$ . And  $-33.97 \text{ dBm} = 61.23 \text{ dBuV/m}$ .

**Method of** Tested at 3-meter OATS per ANSI C63.4  
**Measurement:** Spectrum Analyzer Settings:  
RBW: 1MHz  
VBW:  $\geq 3 \times$  RBW  
Detector: Peak  
Span: As required  
Sweep: Auto

Test Procedure:

- 1) The EUT was placed on sandpit area filled with dry sand initially placed in front of the ground plane (0° degree position).
- 2) The receiving antenna which varied from 1 to 4 m to find the highest emission is positioned 3 m away from the EUT.
- 3) The receiving antenna was positioned in horizontal polarization.
- 4) The measurements were made with the detector set to peak with a bandwidth of 1 MHz during monitoring the frequency range inside the UWB of the EUT.
- 5) At the worst case combination of the EUT operating mode and antenna height, the field strength measure was recorded.
- 6) The receiving antenna was positioned in vertical polarization and the steps 4 to 6 were repeated.
- 7) The EUT was rotating from 0° to 360° degrees with 45° step increment and the steps 4 to 7 was repeated.
- 8) Record the peak emission from the EUT.

**Test Result:**

**Complies**

**Test Data:**

|                        |                |
|------------------------|----------------|
| <b>Project Number:</b> | 0048-200127-02 |
| <b>EUT:</b>            | AM200          |
| <b>S/N:</b>            | 020-20-00001   |
| <b>Tested By:</b>      | David Tu       |
| <b>Temperature:</b>    | 65° F          |
| <b>Humidity:</b>       | 30%            |

Worst Case Scenario: The maximum peak level of emission is found at the following test set-up conditions:

| Freq. (MHz) | H,V | SA Peak Reading At 1 meter (dBuV/m) | RBW  | Reading corrected for 3 meter (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Result |
|-------------|-----|-------------------------------------|------|----------------------------------------|----------------|-------------|--------|
| 1004        | H   | 47.9                                | 1MHz | 38.4**                                 | 61.23          | -22.83      | Pass   |
| 168.1       | H   |                                     | 1MHz | 50.0                                   | N/A            |             |        |

\* measured at 1m due to low signal level.

\*\* Converted to dBm with 50MHz RBW: -40dBm.

Test No.10

|                      |                                                                            |                       |                       |
|----------------------|----------------------------------------------------------------------------|-----------------------|-----------------------|
| <b>Name of Test:</b> | <b><i>Technical Requirements<br/>Applicable to ALL UWB<br/>Devices</i></b> | <b>Test Standard:</b> | <b>15.521</b>         |
| <b>Tested By:</b>    | WEI LI                                                                     | <b>Test Date:</b>     | 01/27/2020-02/12/2020 |

**Requirement**   **Description**

|           |                                                                                                                      |
|-----------|----------------------------------------------------------------------------------------------------------------------|
| 15.521(a) | The EUT is not employed for the operation of toys, operation onboard an aircraft, ship and satellite.                |
| 15.521(b) | Permanent attached antenna, no External radio frequency power amplifiers and antenna modifications are permitted.    |
| 15.521(c) | The Digital circuitry portion of the EUT has been tested and verified to comply with 47 CFR Part 15, subpart B.      |
| 15.521(d) | Considered                                                                                                           |
| 15.521(e) | The $f_M$ , frequency at which the highest radiated emission occurs is contained within the measured UWB bandwidth.  |
| 15.521(f) | The EUT is not intended to detection of tags or the transfer or data or voice information.                           |
| 15.521(g) | Considered                                                                                                           |
| 15.521(h) | Considered                                                                                                           |
| 15.521(i) | Prohibition in Sections 2.201(f) and 15.5(d) of this chapter against Class B (damped wave) emissions is not applied. |
| 15.521(j) | Battery operating device not connected to AC power lines.                                                            |
| 15.521(a) | The EUT is not employed for the operation of toys, operation onboard an aircraft, ship and satellite.                |

**Test Result:**

**Complies**

**Test Data:**

**NA**

Test No.11

|                      |                                        |                       |                       |
|----------------------|----------------------------------------|-----------------------|-----------------------|
| <b>Name of Test:</b> | <b><i>Coordination Requirement</i></b> | <b>Test Standard:</b> | <b>15.525</b>         |
| <b>Tested By:</b>    | Wei Li                                 | <b>Test Date:</b>     | 01/27/2020-02/12/2020 |

**Minimum Standard:** The responsible party is properly informed about the required coordination requirement and provide correct information to the customers and users about their specific care and legislative obligations.

(See Important note for the US customers of the Installation Guide and User Manual)

**Method of Measurement:** (a) UWB imaging systems require coordination through the FCC before the equipment may be used. The operator shall comply with any constraints on equipment usage resulting from this coordination.

(b) The users of UWB imaging devices shall supply operational areas to the FCC Office of Engineering and Technology, which shall coordinate this information with the Federal Government through the National Telecommunications and Information Administration.

(c) The manufacturers, or their authorized sales agents, must inform purchasers and users of their systems of the requirement to undertake detailed coordination of operational areas with the FCC prior to the equipment being operated.

(d) Users of authorized, coordinated UWB systems may transfer them to other qualified users and to different locations upon coordination of change of ownership or location to the FCC and coordination with existing authorized operations.

(e) The FCC/NTIA coordination report shall identify those geographical areas within which the operation of an imaging system requires additional coordination or within which the operation of an imaging system is prohibited.

(f) The coordination of routine UWB operations shall not take longer than 15 business days from the receipt of the coordination request by NTIA.

**Test Result:**

**Test Data:** NA

|                      |                            |                       |                                           |
|----------------------|----------------------------|-----------------------|-------------------------------------------|
| <b>Name of Test:</b> | <i>Antenna Requirement</i> | <b>Test Standard:</b> | <i>15.203/204 &amp;RSS-<br/>GEN 7.1.4</i> |
| <b>Tested By:</b>    | WEI LI                     | <b>Test Date:</b>     |                                           |

**Method of Measurement:** The antenna utilized by the device under test is an internal, non user replaceable unit.

**Test Data:** NA

Test No.13

|                      |                                        |                       |                                                |
|----------------------|----------------------------------------|-----------------------|------------------------------------------------|
| <b>Name of Test:</b> | <b><i>Radio Frequency Exposure</i></b> | <b>Test Standard:</b> | <b><i>FCC OET Bulletin 65 &amp;RSS-GEN</i></b> |
| <b>Tested By:</b>    | WEI LI                                 | <b>Test Date:</b>     | 01/27/2020-02/12/2020                          |

**Minimum Standard:** Public Exposure to Radio Frequency Energy Levels (1.1307 (b)(1)) Limits:

From §1.1310 Table 1 (B),  
for Public  $S = 1.0 \text{ mW/cm}^2$   
for Professional,  $S = 5.0 \text{ mW/cm}^2$

**Method of Measurement:**

$$d = 0.282 * 10^{((P + G) / 20) / \sqrt{S}} \quad \text{Equation (1)}$$

$$S = 0.0795 * 10^{((P + G)/10) / d^2} \quad \text{Equation (2)}$$

where  
 $d$  = MPE distance in cm  
 $P$  = Power in dBm  
 $G$  = Antenna Gain in dBi  
 $S$  = Power Density Limit in  $\text{mW/cm}^2$

Equation (1) and the measured peak power is used to calculate the MPE distance.  
Equation (2) and the measured peak power is used to calculate the Power density.

**Test Result:**

**Test Data:** NA

**Calculation:**

For this EUT, max emission level is under the limit set in Section 15.209. No RF hazard need to be concerned.

- Reference CFR 1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (B): Limits for General Population/Uncontrolled Exposure

Test No.14

|                      |                                   |                       |                                   |
|----------------------|-----------------------------------|-----------------------|-----------------------------------|
| <b>Name of Test:</b> | <b><i>Conducted Emissions</i></b> | <b>Test Standard:</b> | <b><i>15.507 &amp;RSS-GEN</i></b> |
| <b>Tested By:</b>    | -                                 | <b>Test Date:</b>     | -                                 |

**Minimum Standard:** 15.507 &RSS-GEN  
Limit

| <b>Frequency Range (MHz)</b>                     | <b>Limits (dBμV)</b> |                |
|--------------------------------------------------|----------------------|----------------|
|                                                  | <b>Quasi-Peak</b>    | <b>Average</b> |
| 0.15 to 0.50                                     | 66 to 56*            | 56 to 46*      |
| 0.50 to 5.0                                      | 56                   | 46             |
| 5.0 to 30.0                                      | 60                   | 50             |
| * Decreases with the logarithm of the frequency. |                      |                |

**Method of Measurement:** Test measurements were made in accordance with ANSI C63.4-2003, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.

Spectrum Analyzer Setting:  
Frequency Range: 150KHz to 30MHz  
RBW: 9KHz  
VBW: 30KHz  
Detector: Peak/QP/Average

**Test Result:** **NA**  
(The EUT is only powered via a lithium-ion battery which is remotely recharged)

**Test Data:** **NA**

Test No.15

|                      |                                     |                       |                         |
|----------------------|-------------------------------------|-----------------------|-------------------------|
| <b>Name of Test:</b> | <b><i>Transmission Duration</i></b> | <b>Test Standard:</b> | <b><i>15.509(c)</i></b> |
| <b>Tested By:</b>    | -                                   | <b>Test Date:</b>     | -                       |

**Minimum** 15.509 (c)

**Standard:** A GPR that is designed to be operated while being hand held and a wall imaging system shall contain a manually operated switch that causes the transmitter to cease operation within 10 seconds of being released by the operator. In lieu of a switch located on the imaging system, it is permissible to operate an imaging system by remote control provided the imaging system ceases transmission within 10 seconds of the remote switch being released by the operator.

**Method of** NA  
**Measurement:**

**Test Result:** NA

**Test Data:** NA