


Occupied bandwidth data – In/out bandwidth

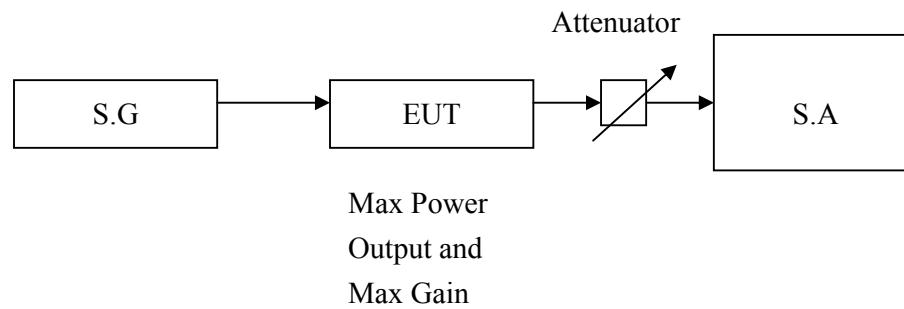

Test Procedure:

1. Measured directly the input GSM signal from the signal generator and recorded in a plot in Black color .
2. The EUT was connected respectively to the spectrum analyzer and the signal generator.
3. An attenuator which had a equivalent loss amount same as the amplified gain of EUT was inserted ahead of the EUT as above figure.
4. Set the EUT maximum gain and output power.
5. Measured the output GSM signal and recorded in a plot in Blue color ..

Test Results for Occupied bandwidth data – In/out bandwidth:

