

Test of Wavion WBSn-2450 Wireless LAN Access
Point

To: FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: WAVI01-U1 Rev C



TEST REPORT

FROM



Test of Wavion WBSn-2450-O/-S Wireless LAN Access Point

to

To FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: WAVI01-U1 Rev C

Note: this report contains data with regard to the 2400 to 2483.5 MHz and 5725 to 5850 MHz operational modes of the Wavion WBSn-2450 wireless LAN access point.

This report supersedes: WAVI01-U1 Rev B

Applicant: Wavion Ltd
15 Hamada Street
Yoqneam Illit
Israel 20692

Product Function: Wireless LAN Access Point

Copy No: pdf Issue Date: 14th March 2012

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.

440 Boulder Court, Suite 200

Pleasanton, CA 94566 USA

Phone: +1 (925) 462-0304

Fax: +1 (925) 462-0306

www.micomlabs.com



TEST CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 3 of 331

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
TESTING ACCREDITATION	5
RECOGNITION	6
PRODUCT CERTIFICATION	7
1. TEST RESULT CERTIFICATE	9
2. REFERENCES AND MEASUREMENT UNCERTAINTY	10
2.1. Normative References	10
2.2. Test and Uncertainty Procedures	11
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
3.1. Technical Details	12
3.2. Scope of Test Program	13
3.3. Equipment Model(s) and Serial Number(s)	16
3.4. Antenna Details	16
3.5. Cabling and I/O Ports	17
3.6. Test Configurations	17
3.7. Equipment Modifications	19
3.8. Deviations from the Test Standard	19
3.9. Subcontracted Testing or Third Party Data	19
4. TEST SUMMARY	20
5. TEST RESULTS	22
5.1. Device Characteristics	22
5.1.1. 6 dB and 99 % Bandwidth	22
5.1.2. Peak Output Power	91
5.1.3. Peak Power Spectral Density	104
5.1.4. Maximum Permissible Exposure	173
5.1.5. Conducted Spurious Emissions	174
5.1.6. Radiated Emissions	251
5.1.7. AC Wireline Conducted Emissions (150 kHz – 30 MHz)	321
6. PHOTOGRAPHS	324
6.1. Conducted Test Setup	324
6.2. Radiated Test Setup > 1 GHz	325
7. TEST EQUIPMENT DETAILS	330

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 5 of 331

ACCREDITATION, LISTINGS & RECOGNITION

TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 6 of 331

RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	210
	VCCI	--	--	No. 2959
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 7 of 331

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

World Class Accreditation

Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system for a Telecommunications Certification Body (TCB) meeting FCC (U.S.), Japan (MIC), and IC (Canada) requirements.



Presented this 24th day of June 2010.



President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to March 31, 2012
Revised January 20, 2012

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

USA Telecommunication Certification Body (TCB) - TCB Identifier – US0159

Industry Canada Certification Body - CAB Identifier – US0159

European Notified Body - Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB) - RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 8 of 331

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	9 th March 2012	Initial release.
Rev B	12 th March 2012	Removing typo's and updating Section 5.1.3 "Peak power spectral density" margin for 2.4 GHz, HT-40 operational mode.
Rev C	14 th March 2012	Removal of typo's

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 9 of 331

1. TEST RESULT CERTIFICATE

Manufacturer:	Wavion Ltd 15 Hamada Street Yoqneam Illit Israel 20692	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	802.11a/b/g/n Wireless LAN Access Point	Telephone:	+1 925 462 0304
Model:	WBSn-2450-O/-S	Fax:	+1 925 462 0306
S/N's:	1153R00131565, 1206R00144608, 1153R00131566		
Test Date(s):	5th July to 9th March 2012	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.247 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:



TEST CERTIFICATE #2381.01



Graeme Grieve
Quality Manager MiCOM Labs,

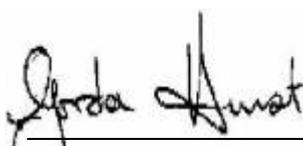

Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 10 of 331

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
i.	FCC 47 CFR Part 15, Subpart C	2010	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES Subpart C—Intentional Radiators
ii.	RSS-210 Annex 8	2010	Radio Standards Specification 210, Issue 8, Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
iii.	FCC OET KDB 662911	4 th April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
iv.	DA 00-705	2000	FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" released March 30, 2000
v.	RSS-GEN	2010	Radio Standards Specification-Gen, Issue 3, General Requirements and Information for the Certification of Radiocommunication Equipment
vi.	FCC 47 CFR Part 15, Subpart B	2010	47 CFR Part 15, SubPart B; Unintentional Radiators
vii.	ICES-003	2004	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard Digital Apparatus; Issue 4
viii.	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ix.	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
x.	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
xi.	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
xii.	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
xiii.	A2LA	9th June 2010	Reference to A2LA Accreditation Status – A2LA Advertising Policy

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 11 of 331

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 12 of 331

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description														
Purpose:	Test of the Wavion WBSn-2450-O/-S Wireless LAN Access Point to FCC Part 15.247 and Industry Canada RSS-210 regulations.														
Applicant:	Wavion Ltd 15 Hamada Street Yoqneam Illit, Israel 20692														
Manufacturer:	As applicant.														
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA														
Test report reference number:	WAVI01-U1 Rev C														
Date EUT received:	5 th July 2012														
Standard(s) applied:	FCC 47 CFR Part 15.247 & IC RSS-210														
Dates of test (from - to):	5th July to 9th March 2012														
No of Units Tested:	3 (2 * Conducted, 1 * Radiated)														
Type of Equipment:	802.11a/b/g/n Wireless Access Point, 3x3 Spatial Multiplexing MIMO configuration														
Manufacturers Trade Name:	Wireless Access Point														
Model(s):	WBSn-2450-O/-S														
Location for use:	Indoor/Outdoor														
Declared Frequency Range(s):	2400 - 2483.5 MHz; 5725 - 5850 MHz														
Software Release	NART														
Type of Modulation:	Per 802.11 –CCK, BPSK, QPSK, DSSS, OFDM														
Declared Nominal Average Output Power:	<table border="1"> <thead> <tr> <th>2.4 GHz</th> <th>5.8 GHz</th> </tr> </thead> <tbody> <tr> <td>802.11b: +28 dBm</td> <td>802.11a: +28 dBm</td> </tr> <tr> <td>802.11g:Leg. +28 dBm</td> <td>802,11 n HT-20: +28 dBm</td> </tr> <tr> <td>802.11 n HT-20: +28 dBm</td> <td>802.11n HT-40: +28 dBm</td> </tr> <tr> <td>802.11 n HT-40: +28 dBm</td> <td></td> </tr> </tbody> </table>	2.4 GHz	5.8 GHz	802.11b: +28 dBm	802.11a: +28 dBm	802.11g:Leg. +28 dBm	802,11 n HT-20: +28 dBm	802.11 n HT-20: +28 dBm	802.11n HT-40: +28 dBm	802.11 n HT-40: +28 dBm					
2.4 GHz	5.8 GHz														
802.11b: +28 dBm	802.11a: +28 dBm														
802.11g:Leg. +28 dBm	802,11 n HT-20: +28 dBm														
802.11 n HT-20: +28 dBm	802.11n HT-40: +28 dBm														
802.11 n HT-40: +28 dBm															
EUT Modes of Operation:	Legacy 802.11a/b/g, 802.11n HT-20, HT-40														
Transmit/Receive Operation:	Time Division Duplex														
Rated Input Voltage and Current:	POE 55 Vdc														
Operating Temperature Range:	Declared range -40° to +55°C														
ITU Emission Designator:	<table border="1"> <tbody> <tr> <td>2400 – 2483.5 MHz 802.11b</td> <td>17M2G1D</td> </tr> <tr> <td>2400 – 2483.5 MHz 802.11g</td> <td>27M9D1D</td> </tr> <tr> <td>2400 – 2483.5 MHz 802.11n – HT-20</td> <td>27M8D1D</td> </tr> <tr> <td>2400 – 2483.5 MHz 802.11n – HT-40</td> <td>51M3D1D</td> </tr> <tr> <td>5725 – 5850 MHz 802.11a</td> <td>34M5D1D</td> </tr> <tr> <td>5725 – 5850 MHz 802.11n – HT-20</td> <td>35M3D1D</td> </tr> <tr> <td>5725 – 5850 MHz 802.11n – HT-40</td> <td>69M9D1D</td> </tr> </tbody> </table>	2400 – 2483.5 MHz 802.11b	17M2G1D	2400 – 2483.5 MHz 802.11g	27M9D1D	2400 – 2483.5 MHz 802.11n – HT-20	27M8D1D	2400 – 2483.5 MHz 802.11n – HT-40	51M3D1D	5725 – 5850 MHz 802.11a	34M5D1D	5725 – 5850 MHz 802.11n – HT-20	35M3D1D	5725 – 5850 MHz 802.11n – HT-40	69M9D1D
2400 – 2483.5 MHz 802.11b	17M2G1D														
2400 – 2483.5 MHz 802.11g	27M9D1D														
2400 – 2483.5 MHz 802.11n – HT-20	27M8D1D														
2400 – 2483.5 MHz 802.11n – HT-40	51M3D1D														
5725 – 5850 MHz 802.11a	34M5D1D														
5725 – 5850 MHz 802.11n – HT-20	35M3D1D														
5725 – 5850 MHz 802.11n – HT-40	69M9D1D														
Frequency Stability:	±20 ppm max														
Equipment Dimensions:	38cm x 14cm x 43.5cm (Excluding Antenna's)														
Weight:	3.75 Kg														
Primary function of equipment:	Outdoor WiFi.														

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.2. Scope of Test Program


The scope of the test program was to test the Wavion WBSn-2450-O/-S Wireless LAN Access Point 3x3 Spatial Multiplexing MIMO configurations in the frequency ranges 2400 - 2483.5 MHz and 5725 – 5850 MHz for compliance against FCC 47 CFR Part 15.247 and Industry Canada RSS-210 specifications.

Models	Manufacturers Statement of Model Differences
WBSn-2450 Series	
WBSn-2450-S	Integral 3 directional dual band 120 degree sector antennas (SL/SR/V polarization)
WBSn-2450-O	3 omni-directional antennas (V polarization with vertical or mechanically tilted antennas, N-type) dual band Omni antenna:

As model differences were restricted to antenna types model WBSn-2450-O was chosen to prove compliance.

Selected Test Suite

- Left: WBSn-2450-S: Dual band sector antenna
- Right: WBSn-2450-O: Dual band Omni-directional antenna

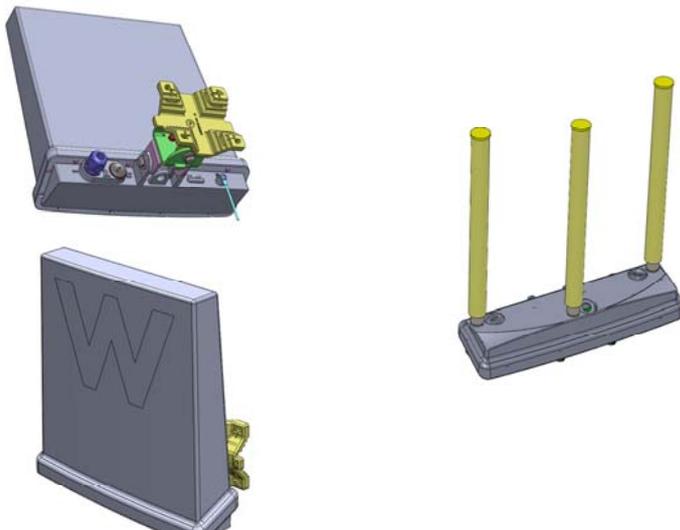


Wavion Ltd
WBSn-2450-O/-S 802.11 a/b/g/n Wireless Access Point



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Wavion Ltd
WBSn-2450-O/-S 802.11 a/b/g/n Wireless Access Point

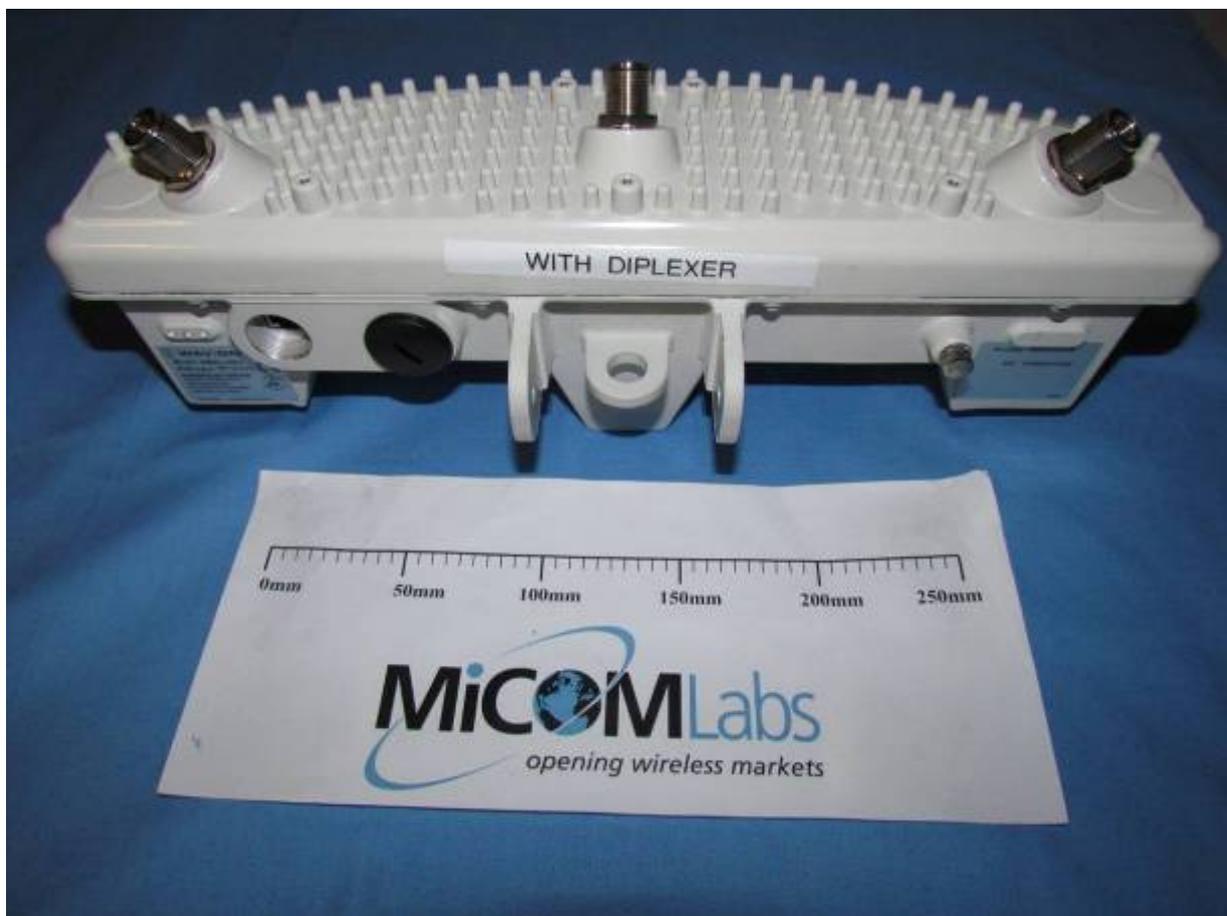

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 16 of 331

3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11a/b/g/n Wireless Access Point	Wavion	WBSn-2450-O	1153R00131565
EUT	802.11a/b/g/n Wireless Access Point	Wavion	WBSn-2450-O	1206R00144608
EUT	802.11a/b/g/n Wireless Access Point	Wavion	WBSn-2450-S	1153R00131566
Support	POE	PhiHong	POE61U-560DG	--
Support	Laptop PC	IBM	Thinkpad	None

3.4. Antenna Details

Antenna Type:	Manufacturer	Model No.	Type	Gain (dBi)	Frequency Range (MHz)
External	MTI Wireless Edge Ltd	MT-952021	Omni	7.4	2400 – 2483.5
Integral	Self	None	Sector	12.0	2400 – 2483.5
External	MTI Wireless Edge Ltd	MT-952021	Omni	8.5	4,900 - 5,900
Integral	Self	None	Sector	14.0	4,900 - 5,900

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 1 x 10/100/1000 Ethernet, includes POE (+55 Vdc)

3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Operational Mode(s) (802.11a/b/g/n)	Variant	Data Rate with Highest Power	Frequencies (MHz)
b	Legacy	1 MBit/s	2,412
g	Legacy	6 MBit/s	2,437
n	HT-20	6.5 (MCS 0)	2,462
	HT-40	13.5 (MCS 0)	2,422 2,437 2,452
a	Legacy	6 MBit/s	5,745
n	HT-20	6.5 (MCS 0)	5,785
	HT-40	13.5 (MCS 0)	5,825 5,755 5,795

Legacy – data rates for 802.11abg products

Results for the above configurations are provided in this report.



Antenna Test Configurations for Radiated Emissions

Results for the following configurations are provided in this report.

2,400 – 2483.5 MHz

5,725 – 5850 MHz

15.247	
802.11b	b SE 2412
	b SE 2437
	b SE 2462
	BE b 2390
	BE b 2483.5
802.11g	g SE 2412
	g SE 2437
	g SE 2462
	BE g 2390
	BE g 2483.5
802.11n HT-20	n HT-20 SE 2412
	n HT-20 SE 2437
	n HT-20 SE 2462
	BE n HT-20 2390
	BE n HT-20 2483.5
802.11n HT-40	n HT-40 SE 2422
	n HT-40 SE 2437
	n HT-40 SE 2452
	BE n HT-40 2390
	BE n HT-40 2483.5

15.247	
802.11a	a SE 5745
	a SE 5785
	a SE 5825
	BE a 5460
802.11n HT-20	n HT-20 SE 5745
	n HT-20 SE 5785
	n HT-20 SE 5825
	BE HT-20 5460
802.11n HT-40	n HT-40 SE 5755
	n HT-40 SE 5785
	n HT-40 SE 5815
	BE HT-40 5460

KEY;-

SE – Spurious Emission
BE – Band-Edge



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 19 of 331

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

NONE

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.9. Subcontracted Testing or Third Party Data

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(a)(2) A8.2(1) 4.4	6 dB and 99 % Bandwidths	≥500 kHz	Conducted	Complies	5.1.1
15.247(b)(3) 15.31(e) A8.4(4)	Peak Output Power Voltage Variation	Shall not exceed 1W Variation of supply voltage 85 % -115 %	Conducted	Complies	5.1.2
15.247(e) A8.2	Peak Power Spectral Density	Shall not be greater than +8 dBm in any 3 kHz band	Conducted	Complies	5.1.3
15.247(i) 5.5	Maximum Permissible Exposure	Exposure to radio frequency energy levels	Conducted	Complies	5.1.4
15.247(d) 15.205 / 15.209 A8.5 2.2 4.7	Spurious Emissions	The radiated emission in any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density	Conducted	Complies	5.1.5

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**, **Industry Canada RSS-210**, and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(d) 15.205 / 15.209 A8.5 2.2 2.6 4.7	Radiated Emissions	Restricted Bands	Radiated	Complies	5.1.6
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.6.1
	Radiated Band Edge	Band-edge results Peak Emissions		Complies	5.1.6.2.
	Receiver Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.6.3
Industry Canada only RSS-Gen §4.10, §6					
15.205 / 15.209 2.2	Radiated Spurious Emissions	Emissions <1 GHz (30M-1 GHz)	Radiated	Complies	5.1.6.4
15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies	5.1.7

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 23 of 331

Measurement Results for 6 dB Operational Bandwidth(s) Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 802.11b Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11b	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	0 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
2412.000	9.218	10.180	10.180	--	500	0.5	-8.718000
2437.000	10.100	10.180	11.142	--			-9.600000
2462.000	10.100	10.581	10.180	--			-9.600000

99% Bandwidth


Test Frequency	99 % Bandwidth					
	MHz					
MHz	a	b	c	d		
2412.000	15.150	14.990	15.311	--		
2437.000	14.589	14.108	14.910	--		
2462.000	15.711	15.070	17.234	--		

Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,412 MHz 802.11b Legacy 6 dB and 99% Bandwidth

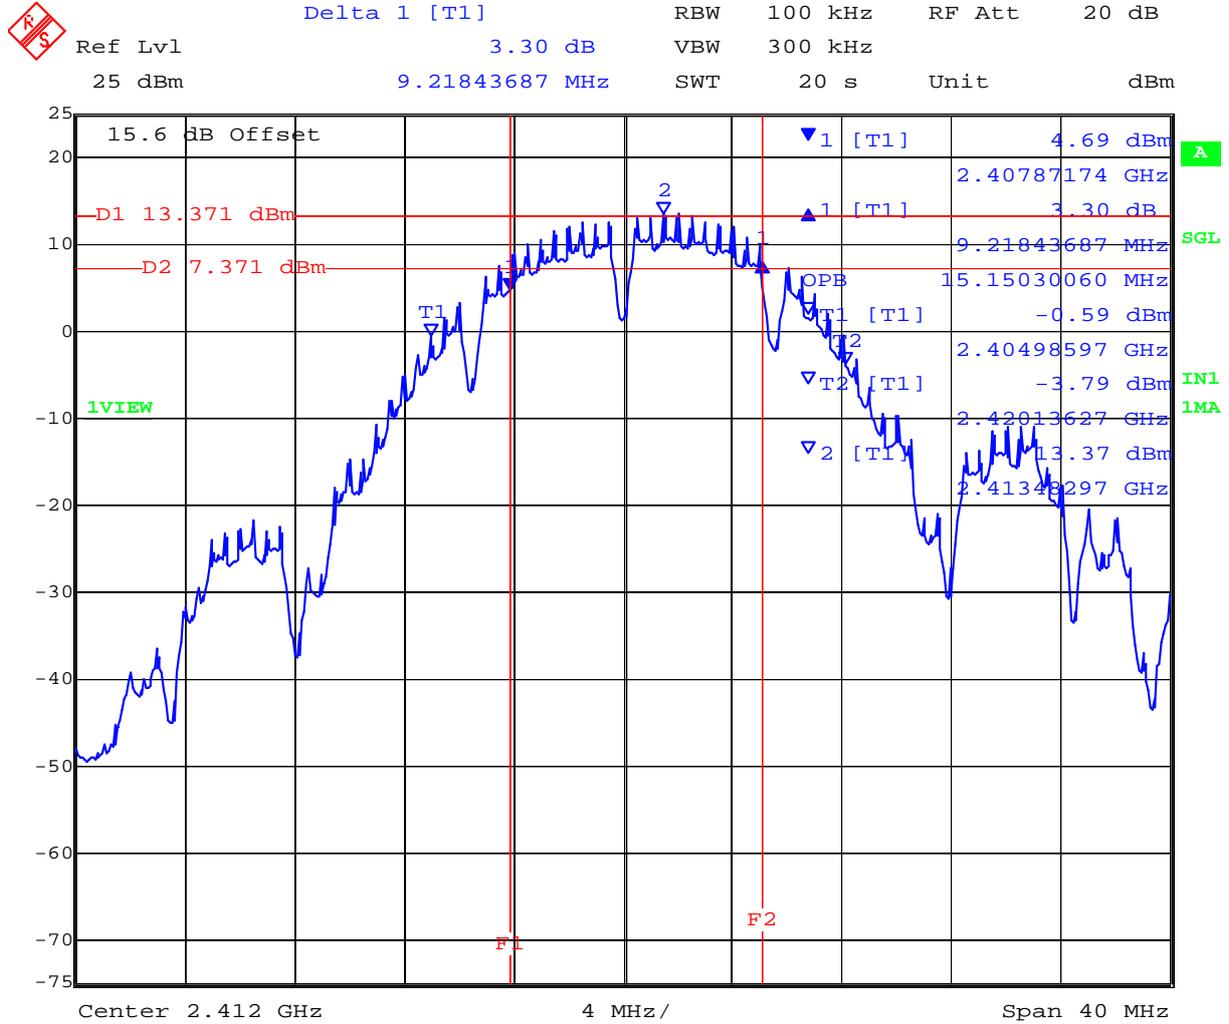


Date: 29.FEB.2012 12:59:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,412 MHz 802.11b Legacy 6 dB and 99% Bandwidth

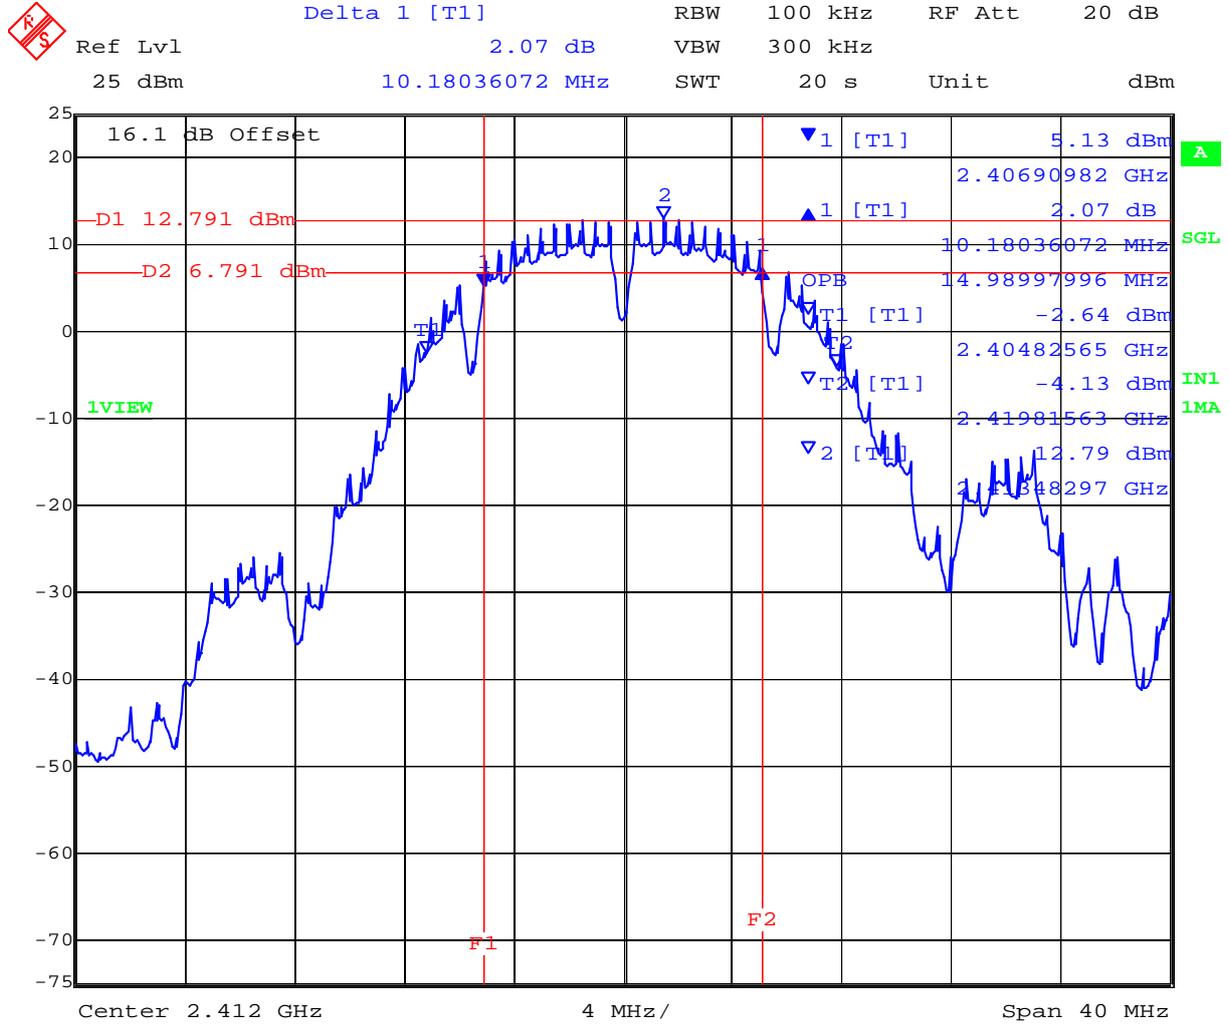


Date: 29.FEB.2012 13:00:20

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,412 MHz 802.11b Legacy 6 dB and 99% Bandwidth

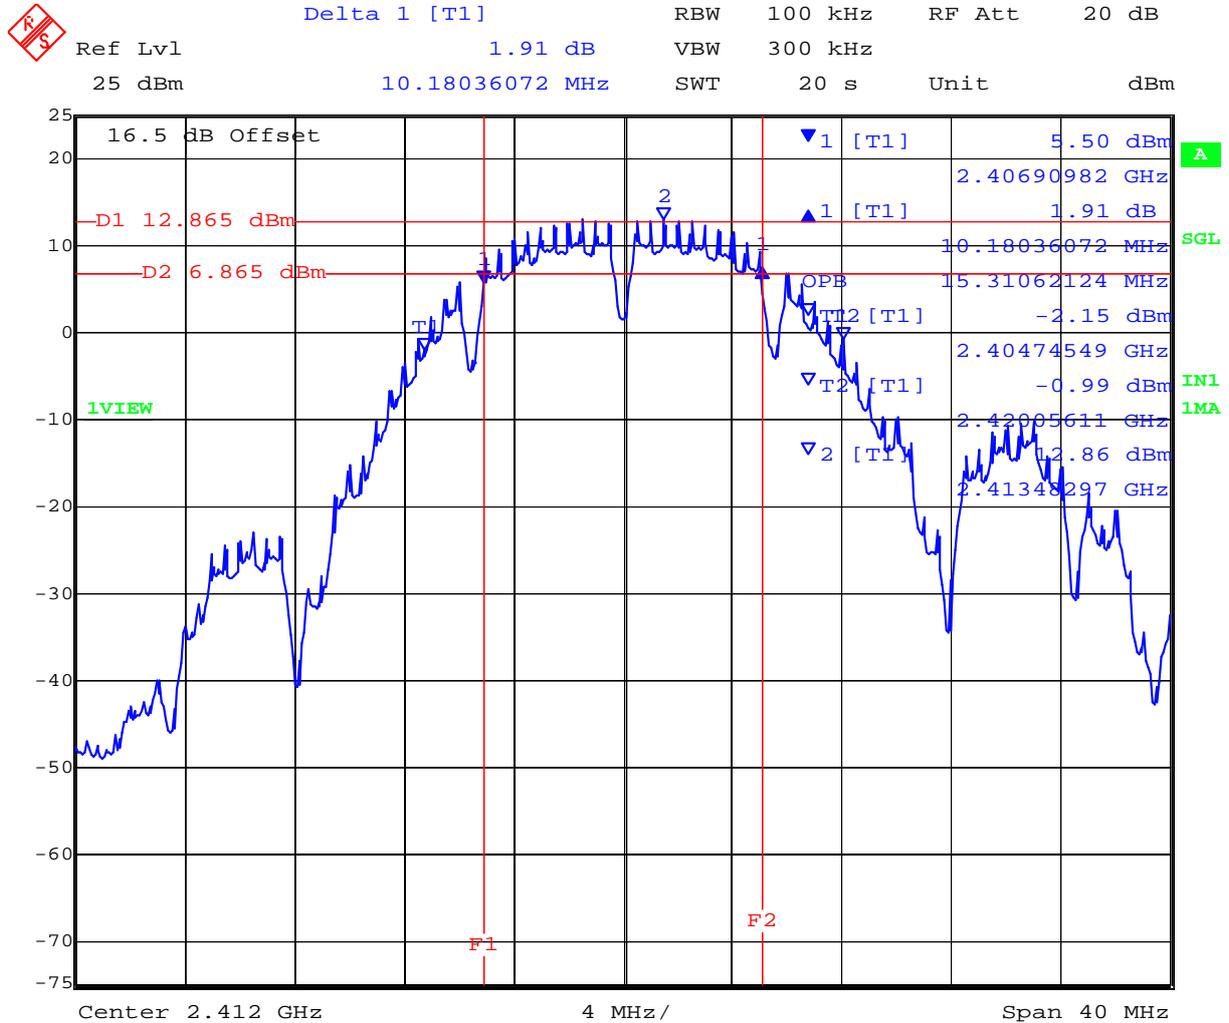


Date: 29.FEB.2012 13:01:22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,437 MHz 802.11b Legacy 6 dB and 99% Bandwidth

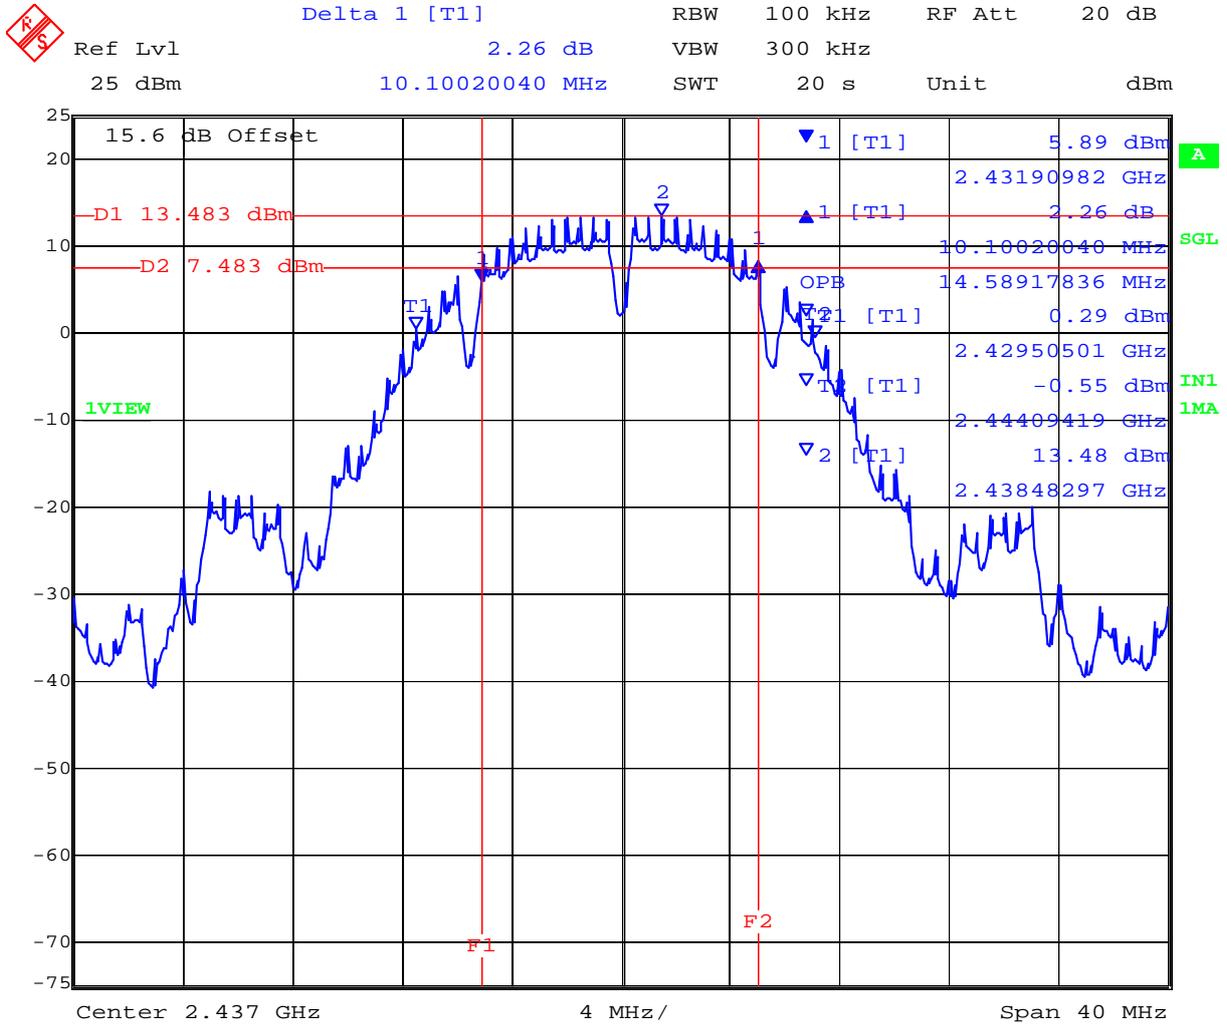

Date: 29.FEB.2012 13:36:18


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,437 MHz 802.11b Legacy 6 dB and 99% Bandwidth



Delta 1 [T1] RBW 100 kHz RF Att 20 dB
Ref Lvl 2.16 dB VBW 300 kHz
25 dBm 10.18036072 MHz SWT 20 s Unit dBm

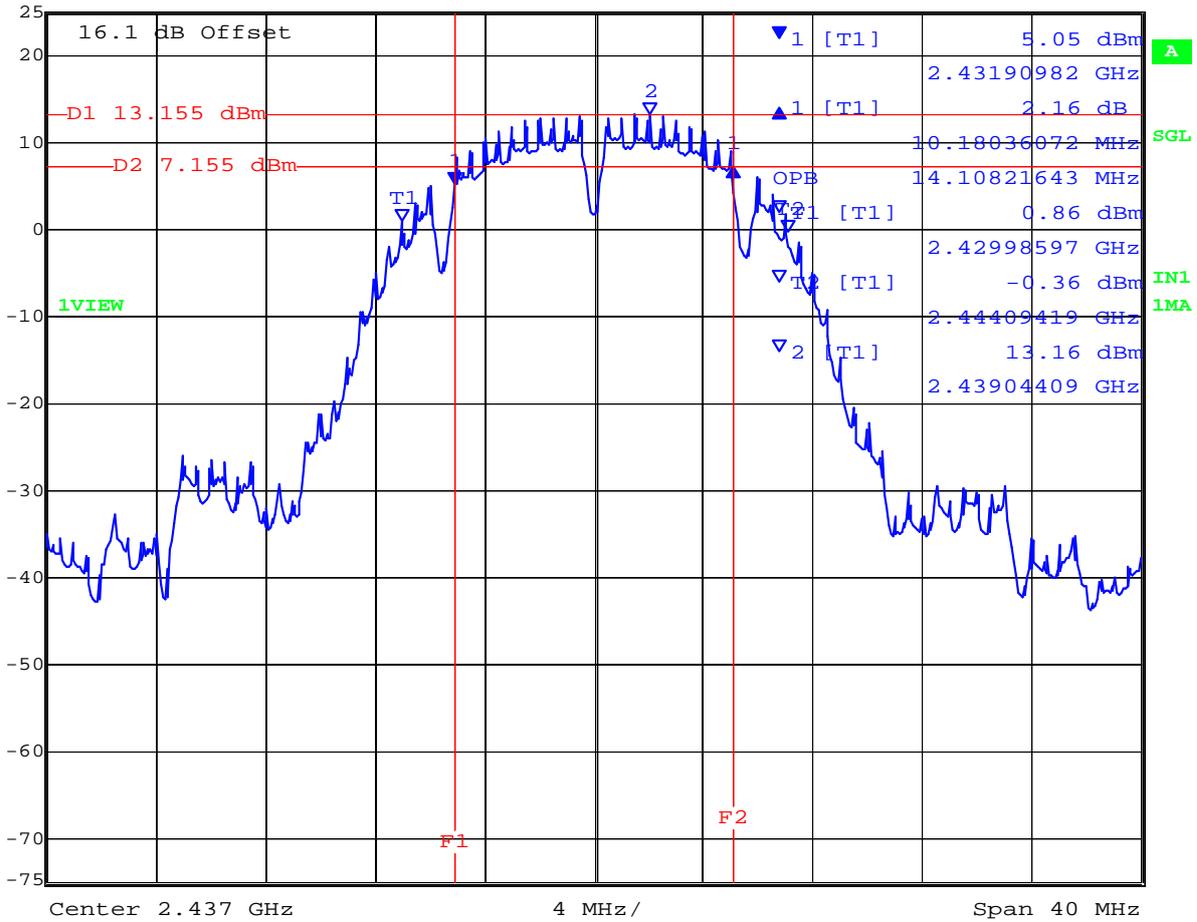


Date: 29.FEB.2012 13:37:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,437 MHz 802.11b Legacy 6 dB and 99% Bandwidth

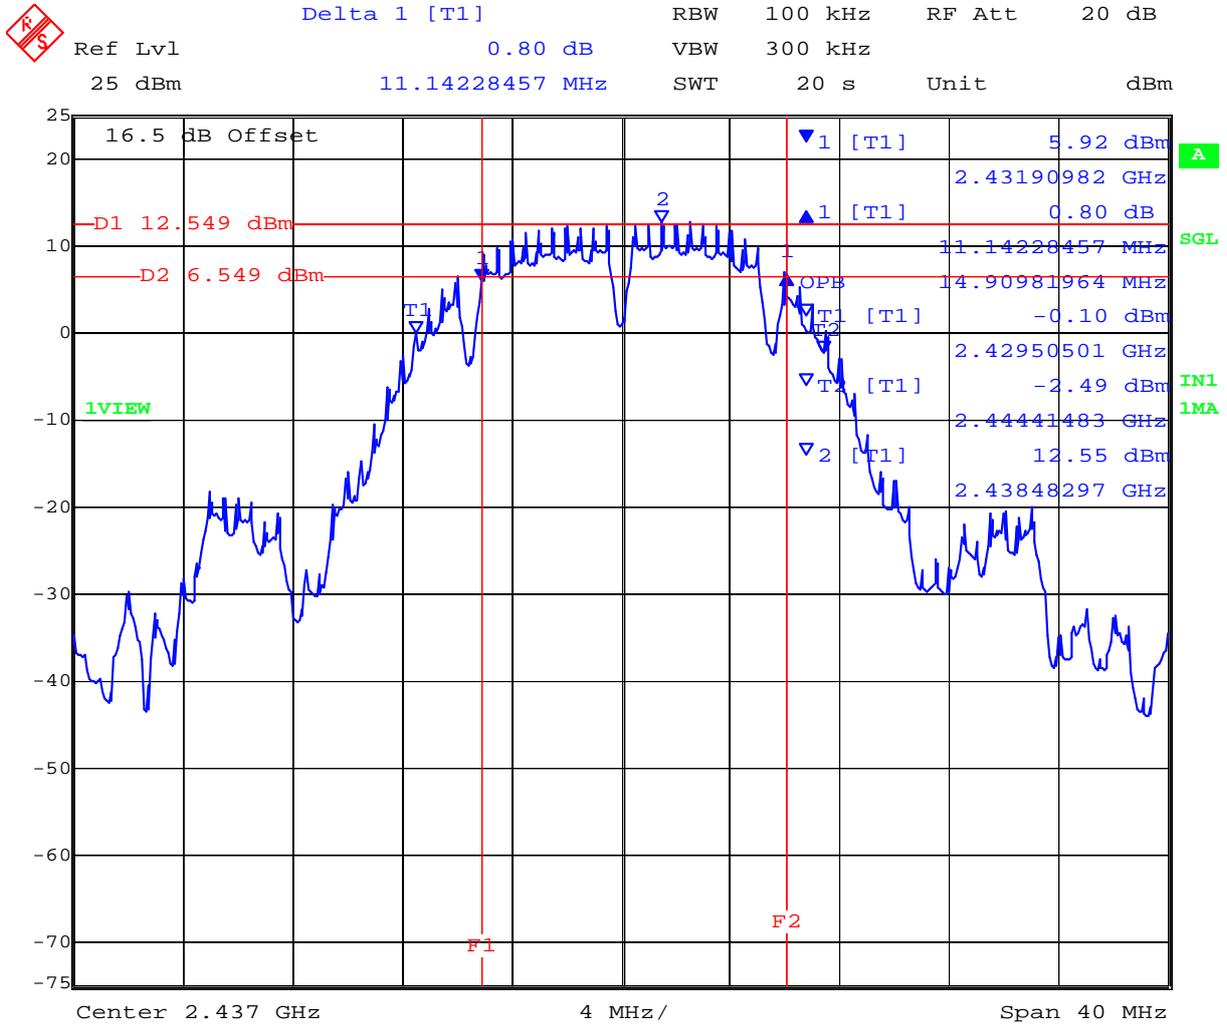


Date: 29.FEB.2012 13:38:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,462 MHz 802.11b Legacy 6 dB and 99% Bandwidth

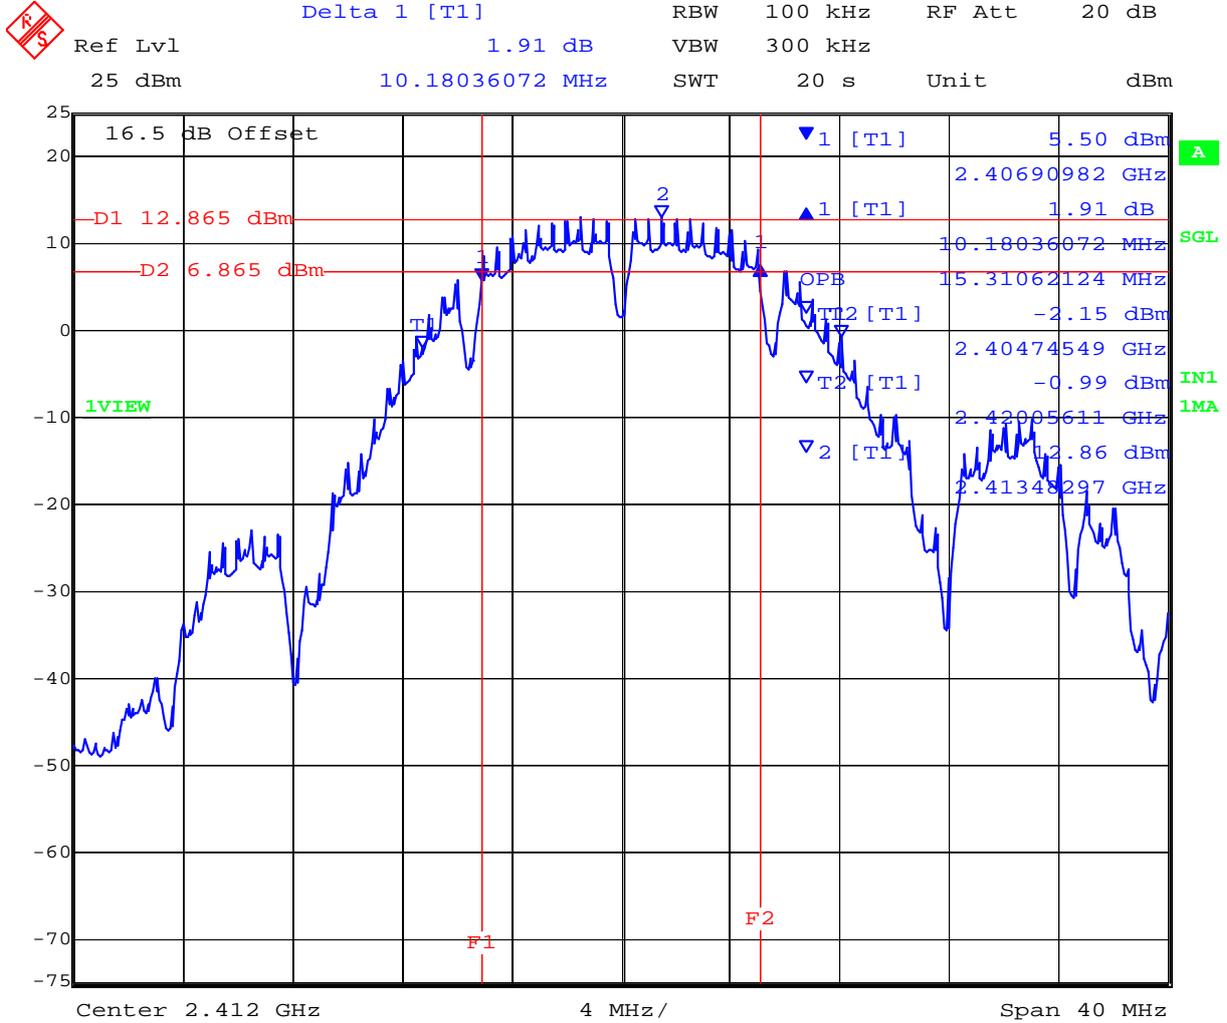


Date: 29.FEB.2012 13:01:22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,462 MHz 802.11b Legacy 6 dB and 99% Bandwidth

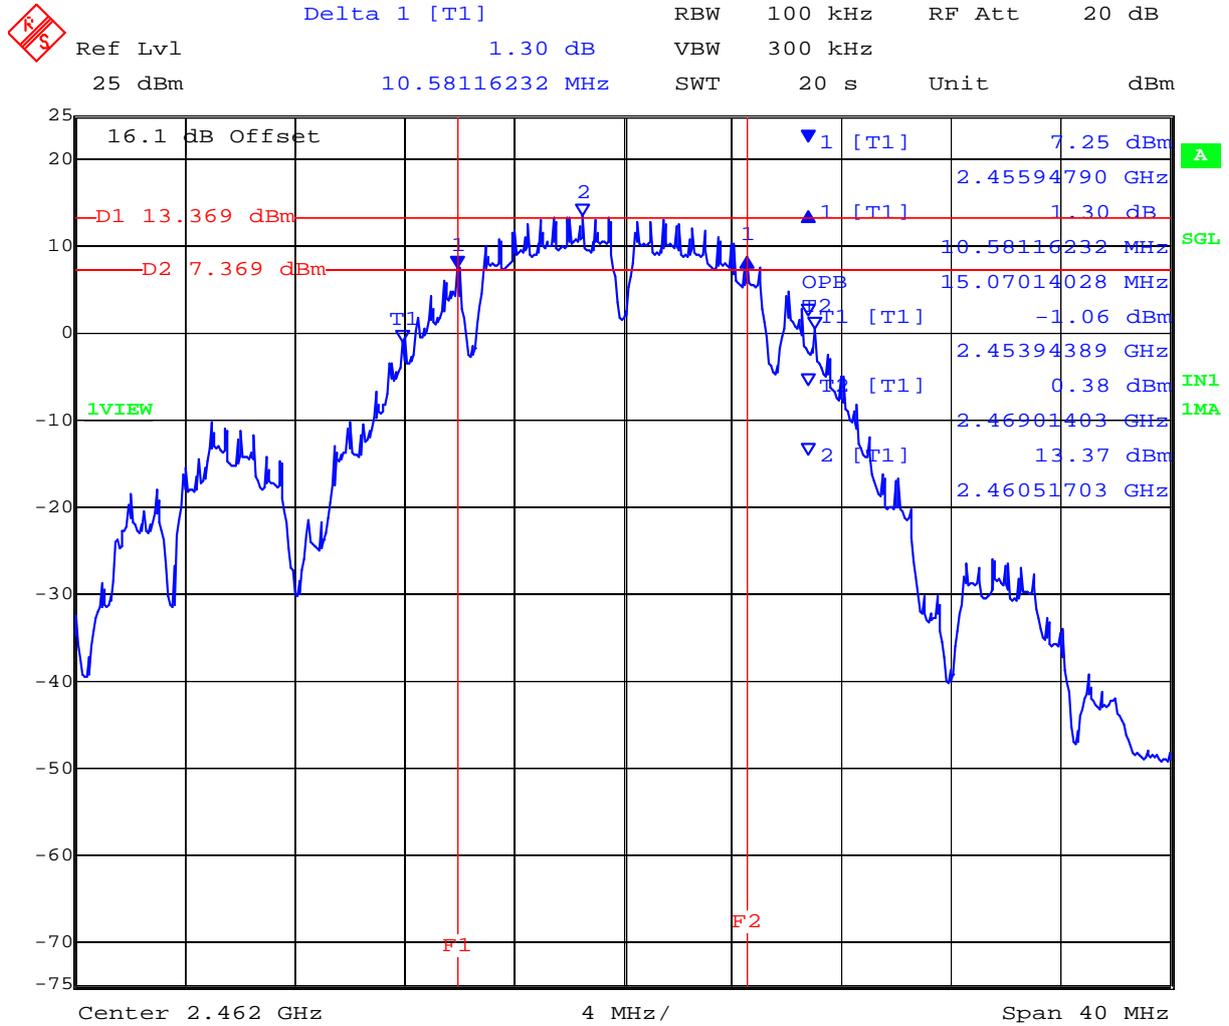


Date: 29.FEB.2012 14:06:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,462 MHz 802.11b Legacy 6 dB and 99% Bandwidth

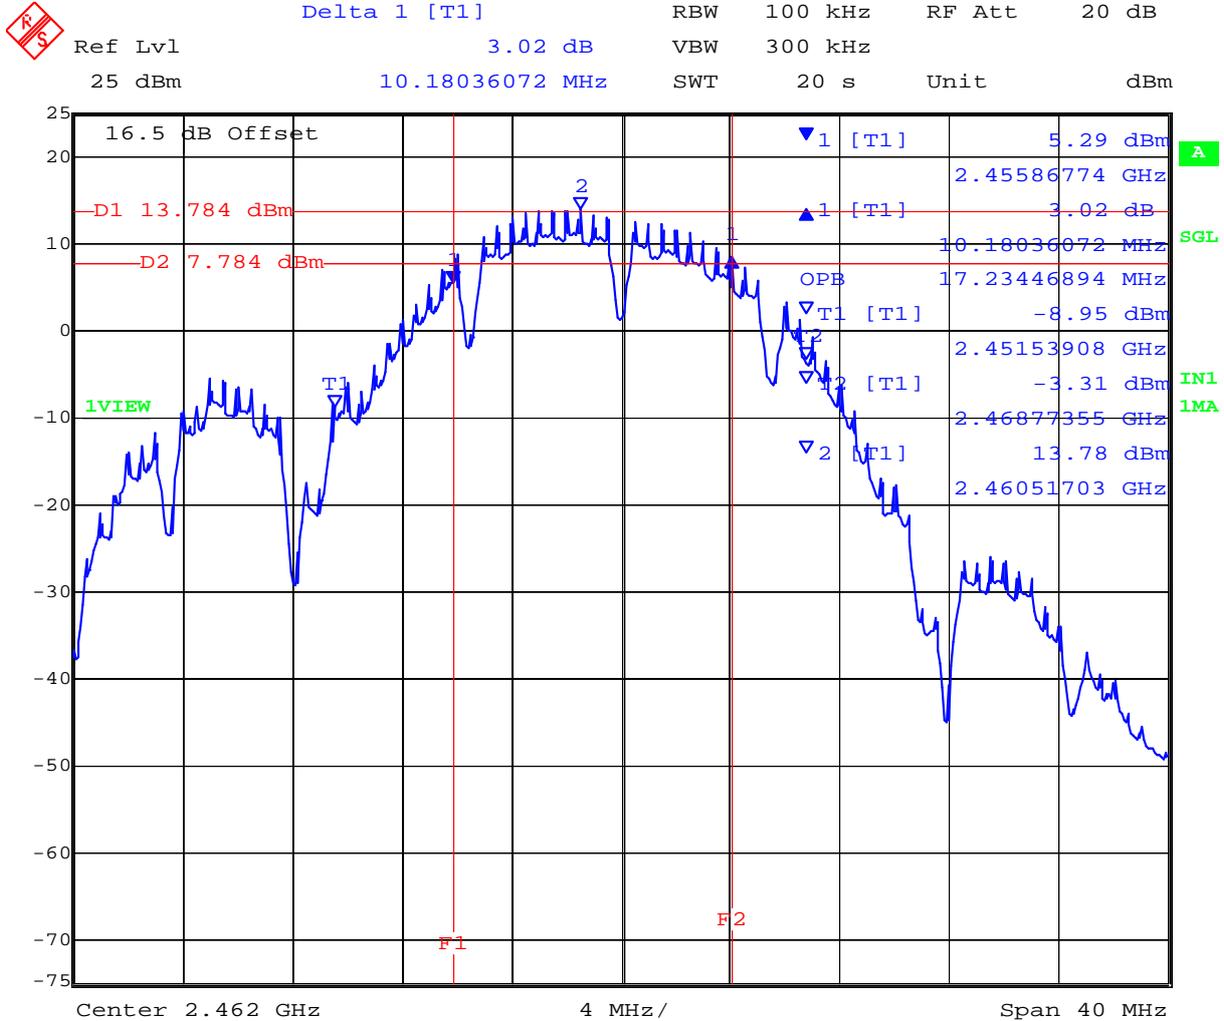

Date: 29.FEB.2012 14:07:26

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 33 of 331

TABLE OF RESULTS – 802.11g Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11b	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	0 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
2412.000	16.032	16.513	16.513	--	500	0.5	-15.532000
2437.000	16.593	16.593	16.673	--			-16.093000
2462.000	16.433	16.273	14.669	--			-14.169000

99% Bandwidth

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
2412.000	24.850	24.369	25.491	--			
2437.000	27.896	23.968	27.174	--			
2462.000	24.208	24.529	25.331	--			


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 34 of 331

PORT A 2,412 MHz 802.11g Legacy 6 dB and 99% Bandwidth

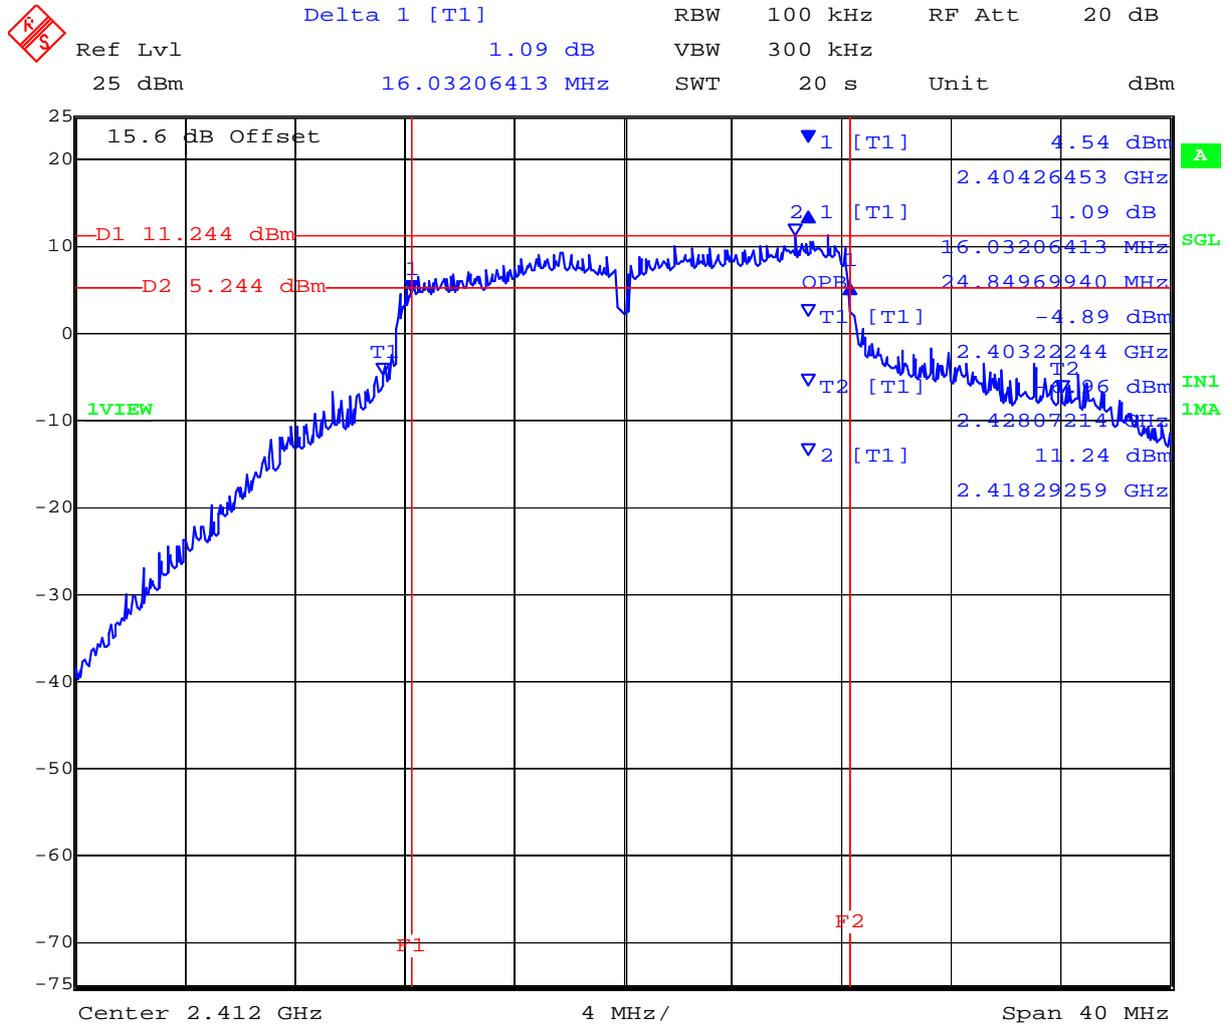


Date: 29.FEB.2012 11:16:54

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,412 MHz 802.11g Legacy 6 dB and 99% Bandwidth

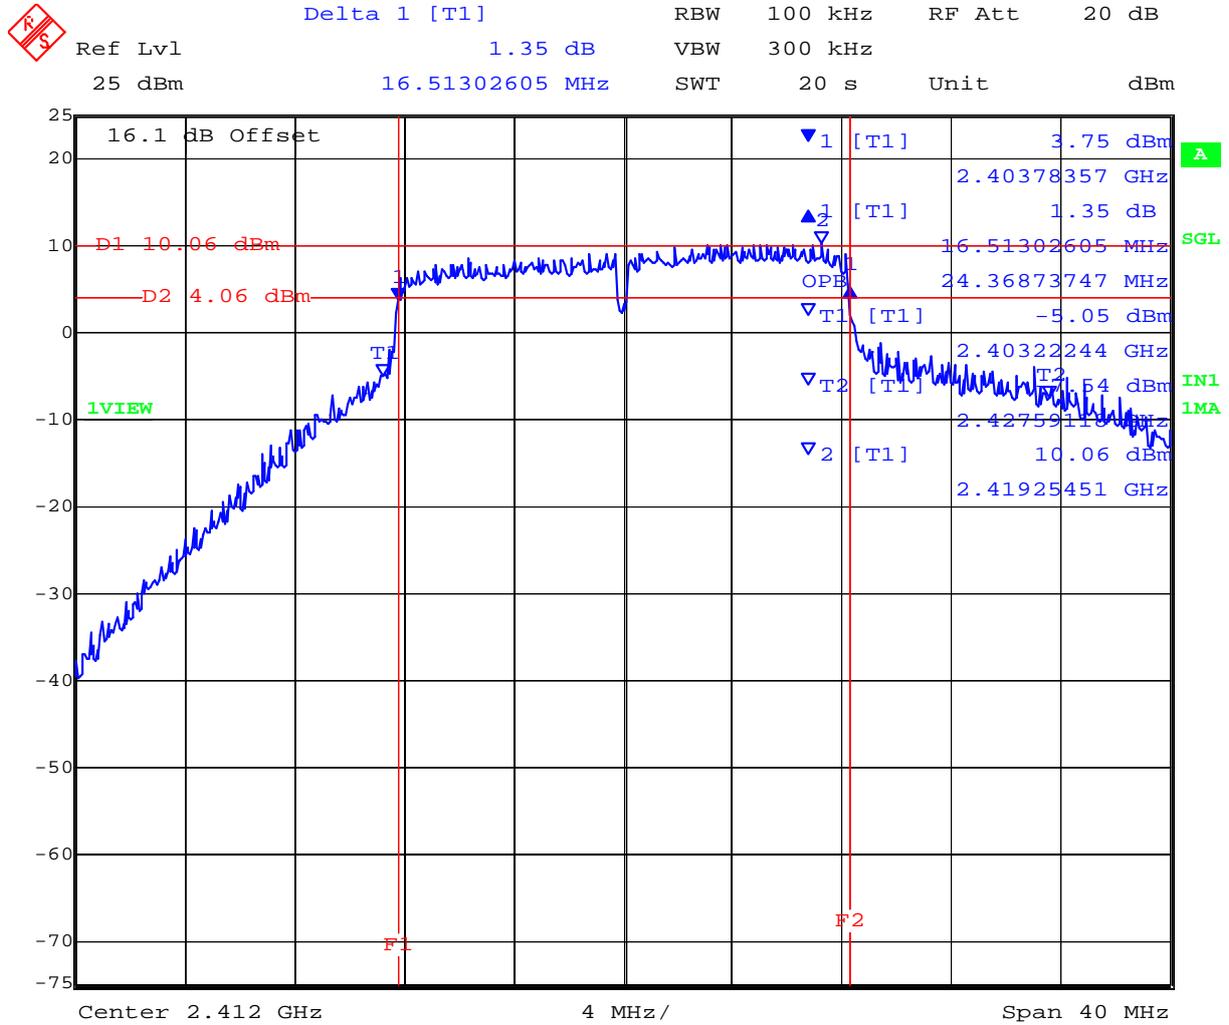


Date: 29.FEB.2012 11:17:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,412 MHz 802.11g Legacy 6 dB and 99% Bandwidth

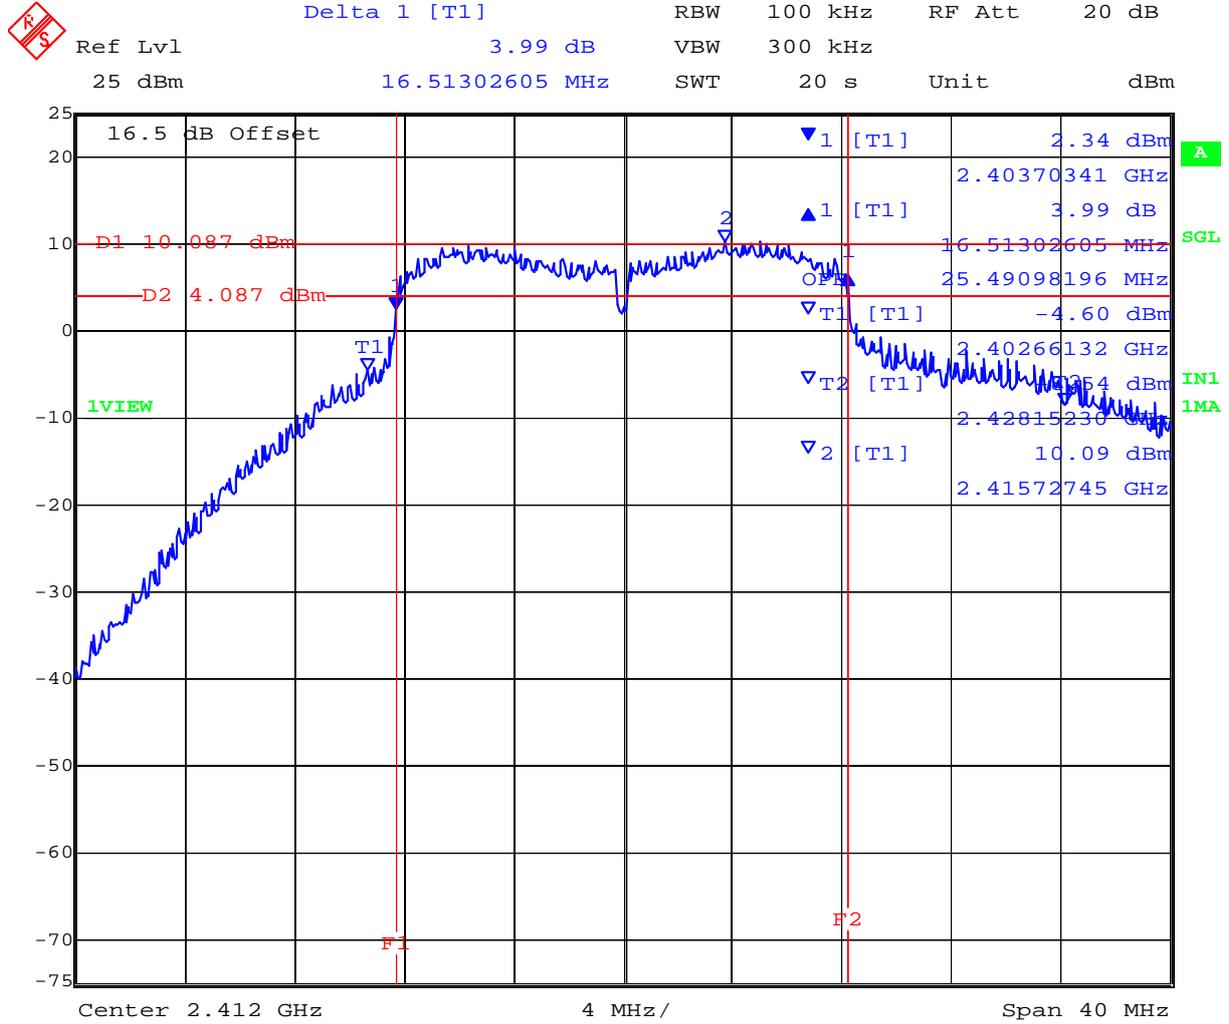


Date: 29.FEB.2012 11:19:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,437 MHz 802.11g Legacy 6 dB and 99% Bandwidth

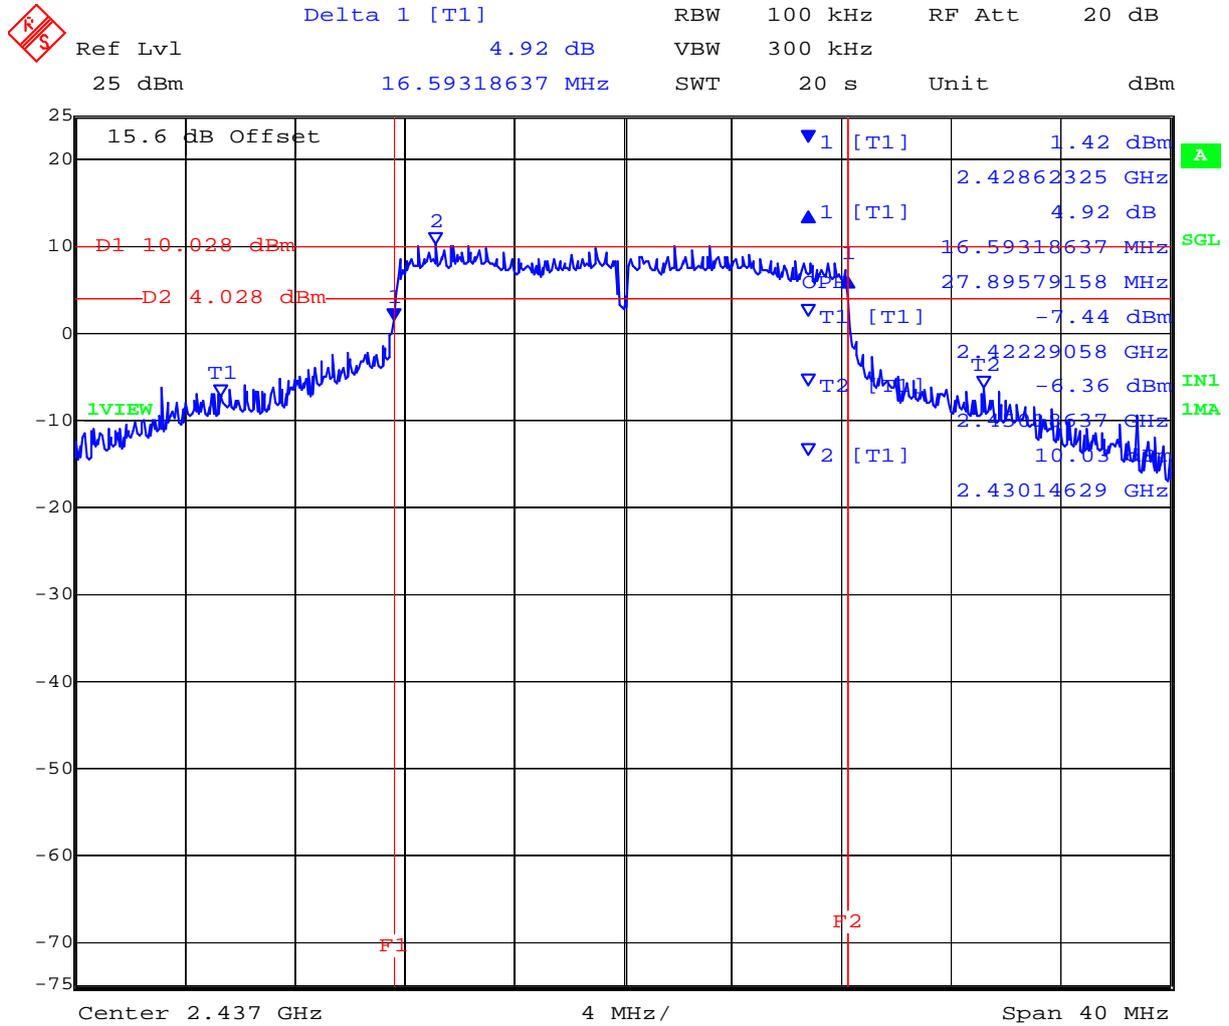


Date: 29.FEB.2012 11:52:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,437 MHz 802.11g Legacy 6 dB and 99% Bandwidth

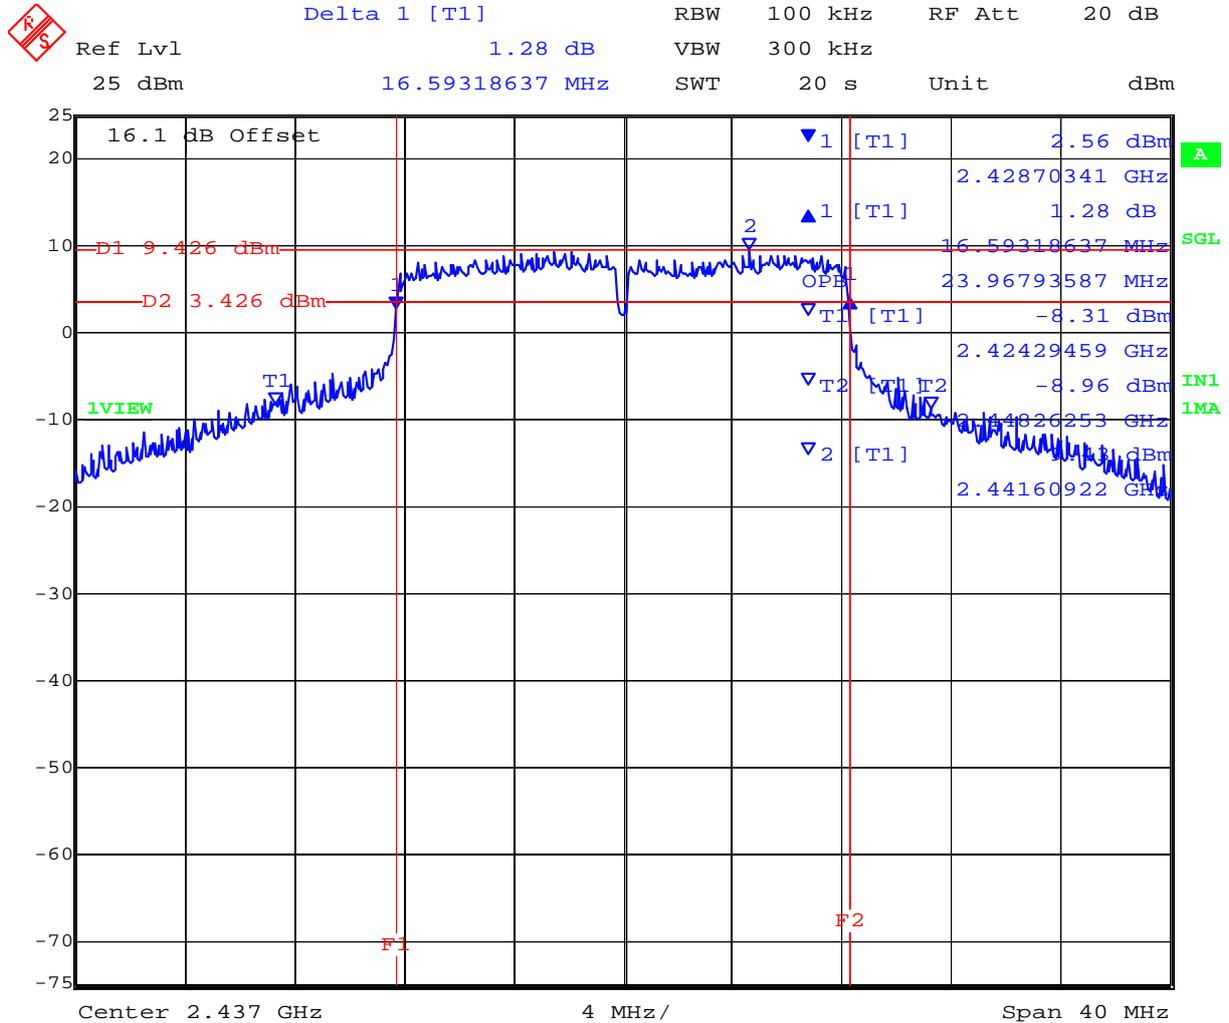


Date: 29.FEB.2012 11:53:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,437 MHz 802.11g Legacy 6 dB and 99% Bandwidth

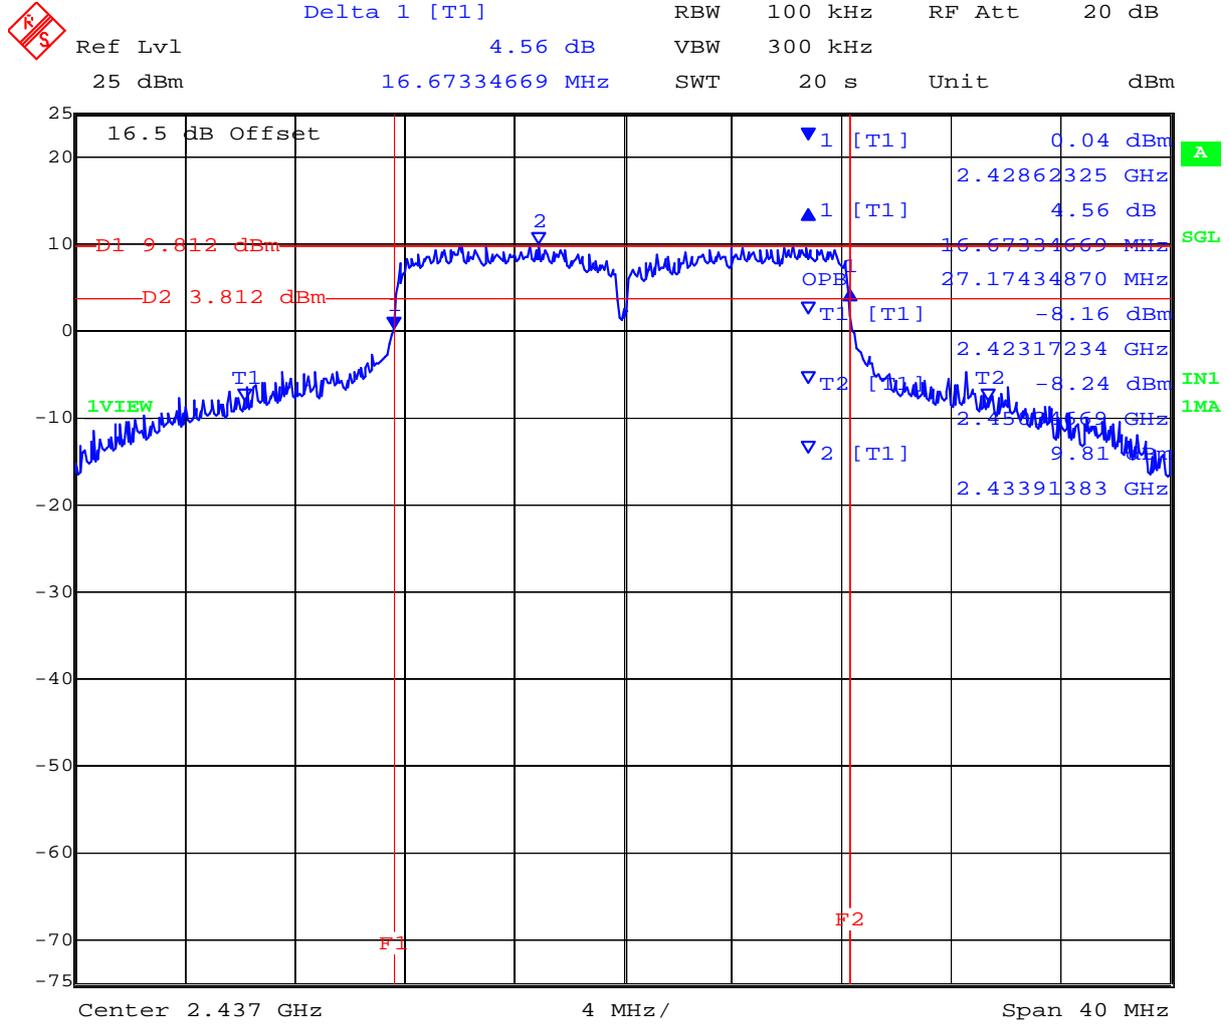


Date: 29.FEB.2012 11:54:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,462 MHz 802.11g Legacy 6 dB and 99% Bandwidth

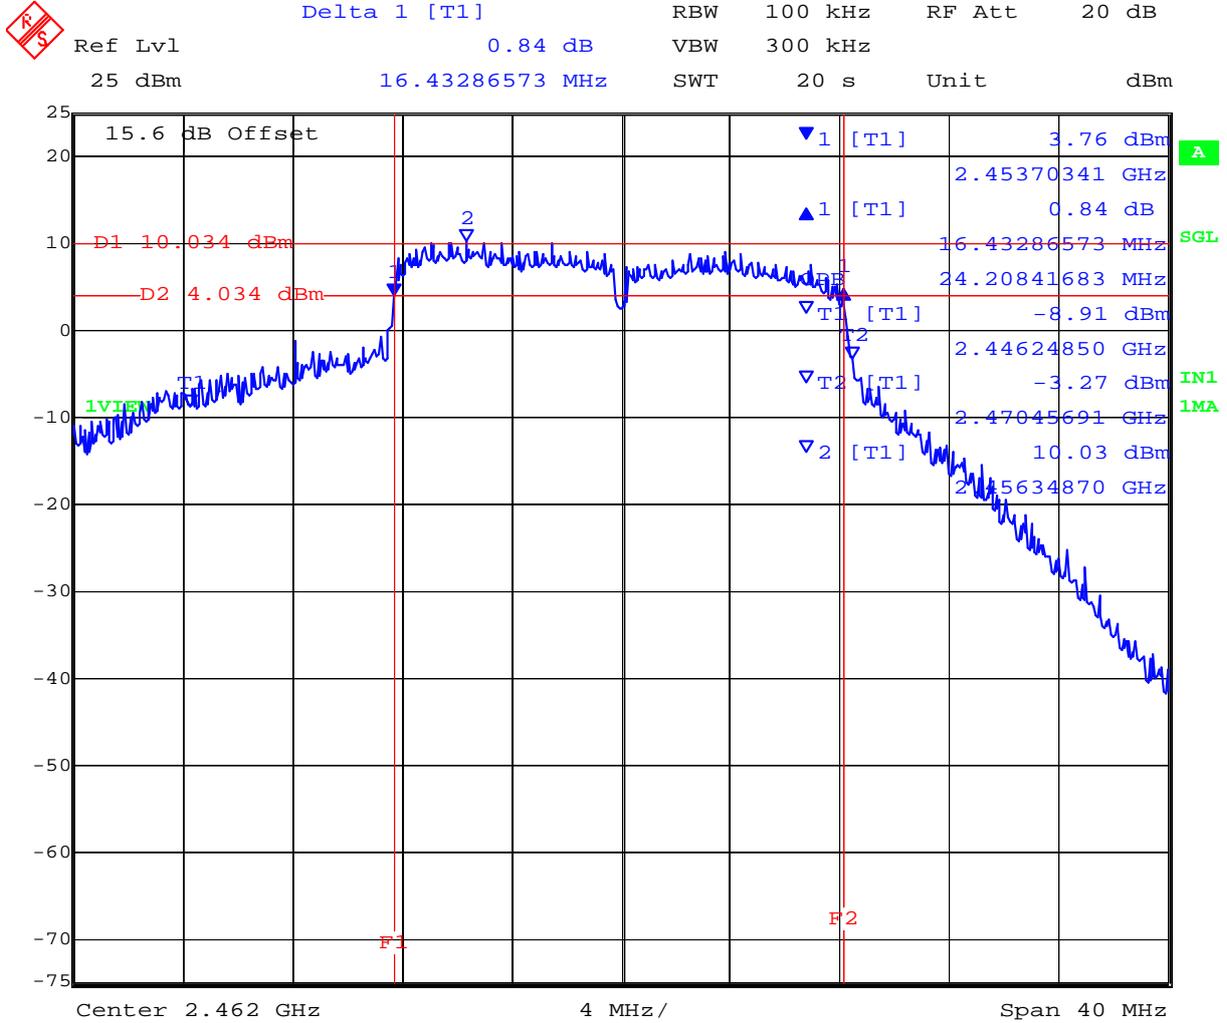


Date: 29.FEB.2012 12:23:59

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,462 MHz 802.11g Legacy 6 dB and 99% Bandwidth

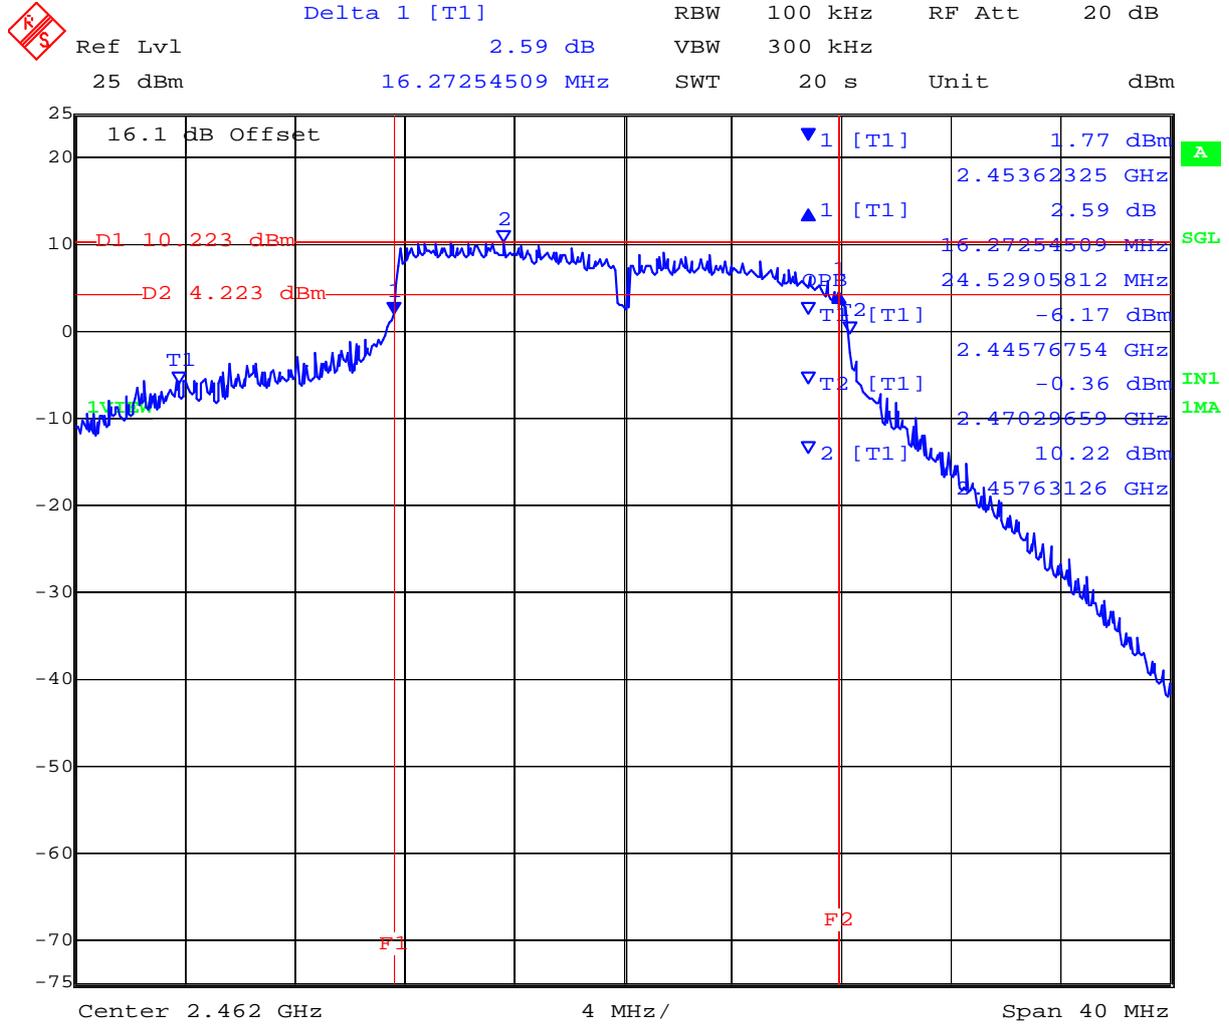


Date: 29.FEB.2012 12:25:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,462 MHz 802.11g Legacy 6 dB and 99% Bandwidth

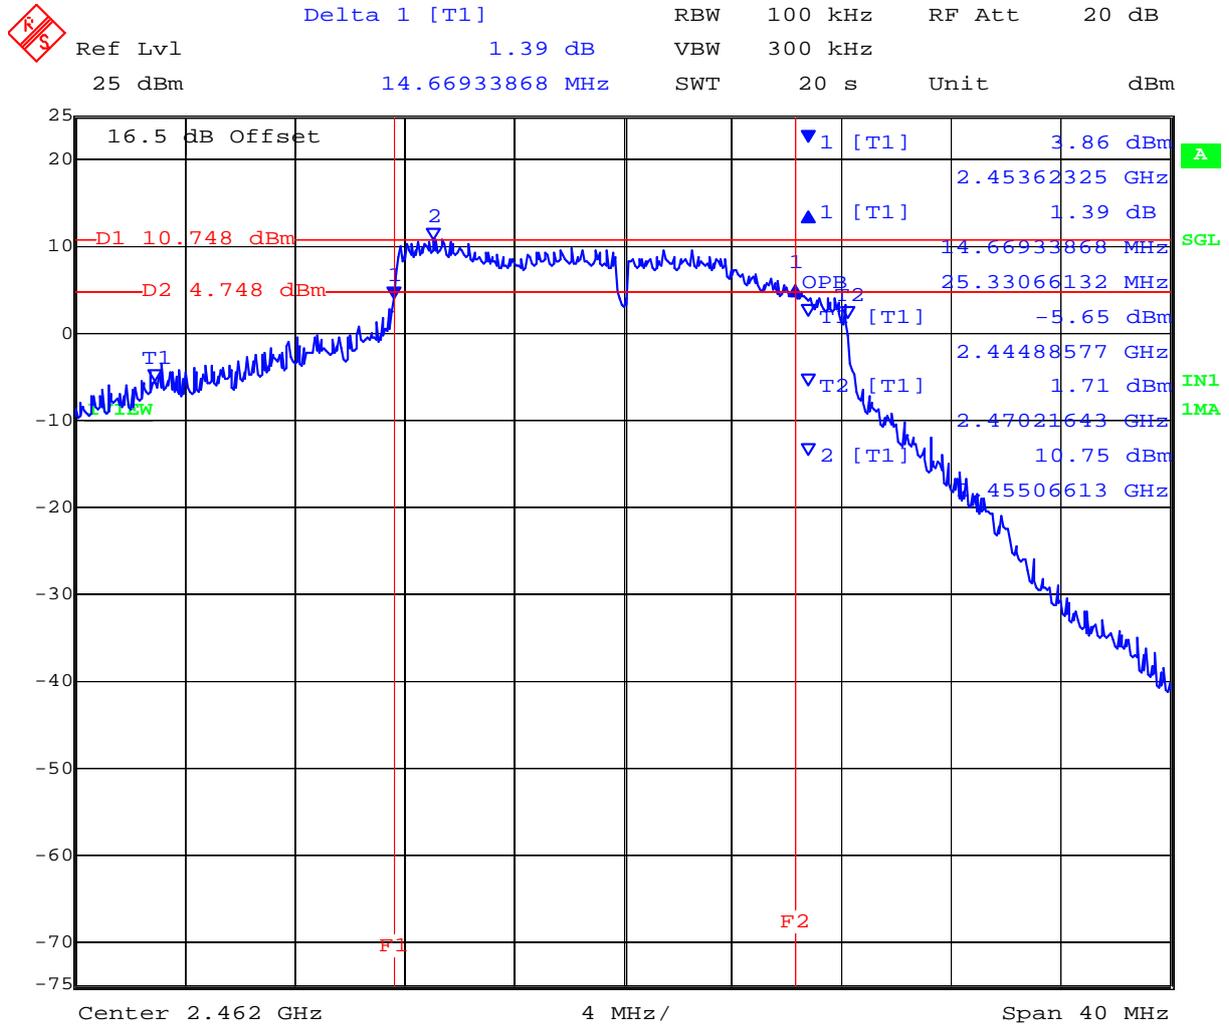

Date: 29.FEB.2012 12:26:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 43 of 331

TABLE OF RESULTS – 802.11n HT-20 Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	0 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
2412.000	17.154000	17.796000	17.876000	--	500	0.5	-16.654000
2437.000	17.876000	17.796000	17.876000	--			-17.296000
2462.000	17.796000	17.154000	16.513000	--			-16.013000

99% Bandwidth


Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
2412.000	24.850000	24.609000	26.212000	--			
2437.000	27.816000	24.369000	27.655000	--			
2462.000	24.609000	25.651000	25.972000	--			

Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,412 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

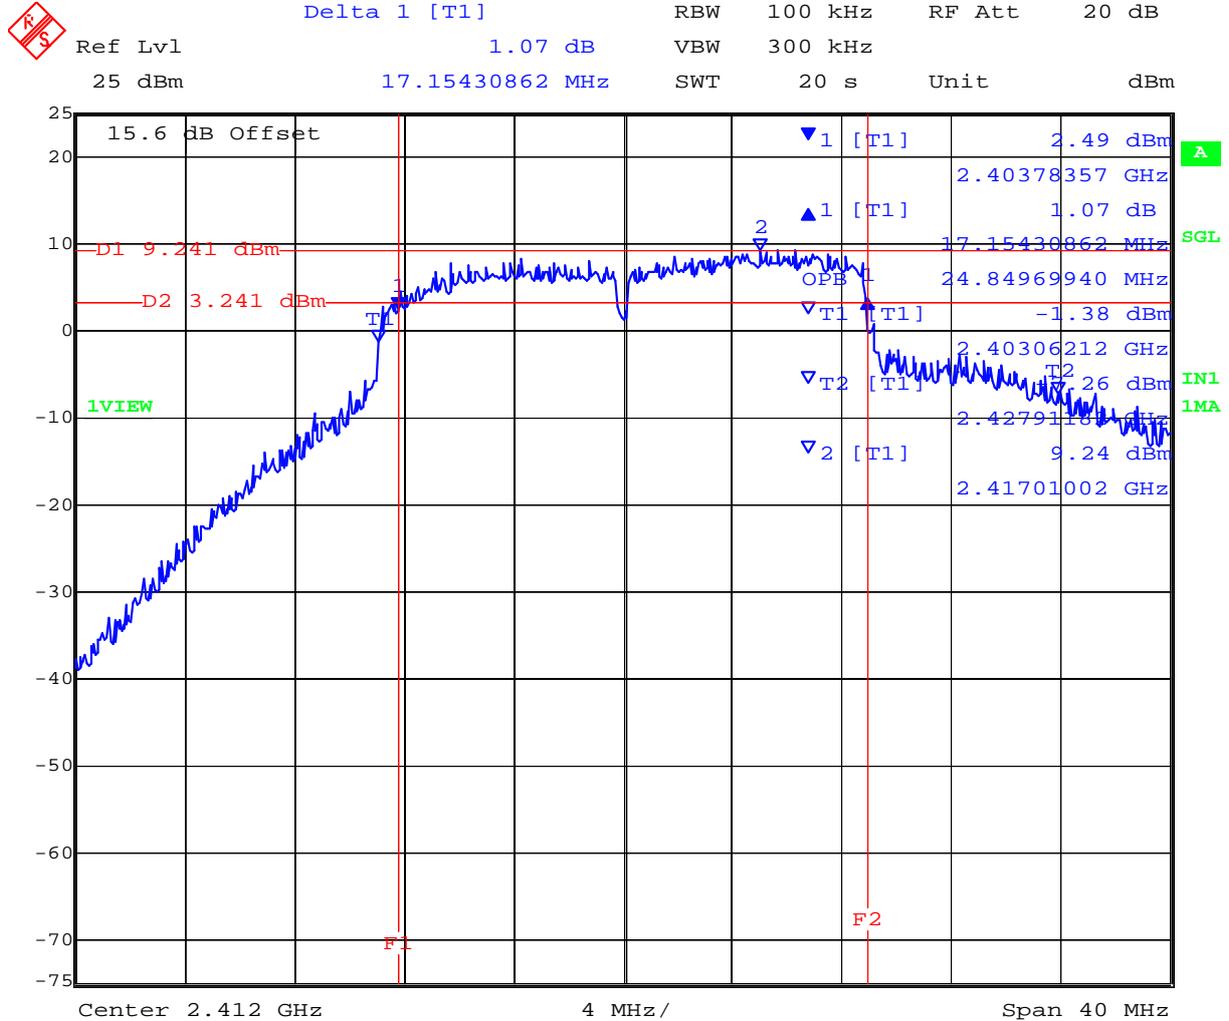


Date: 29.FEB.2012 15:16:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,412 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

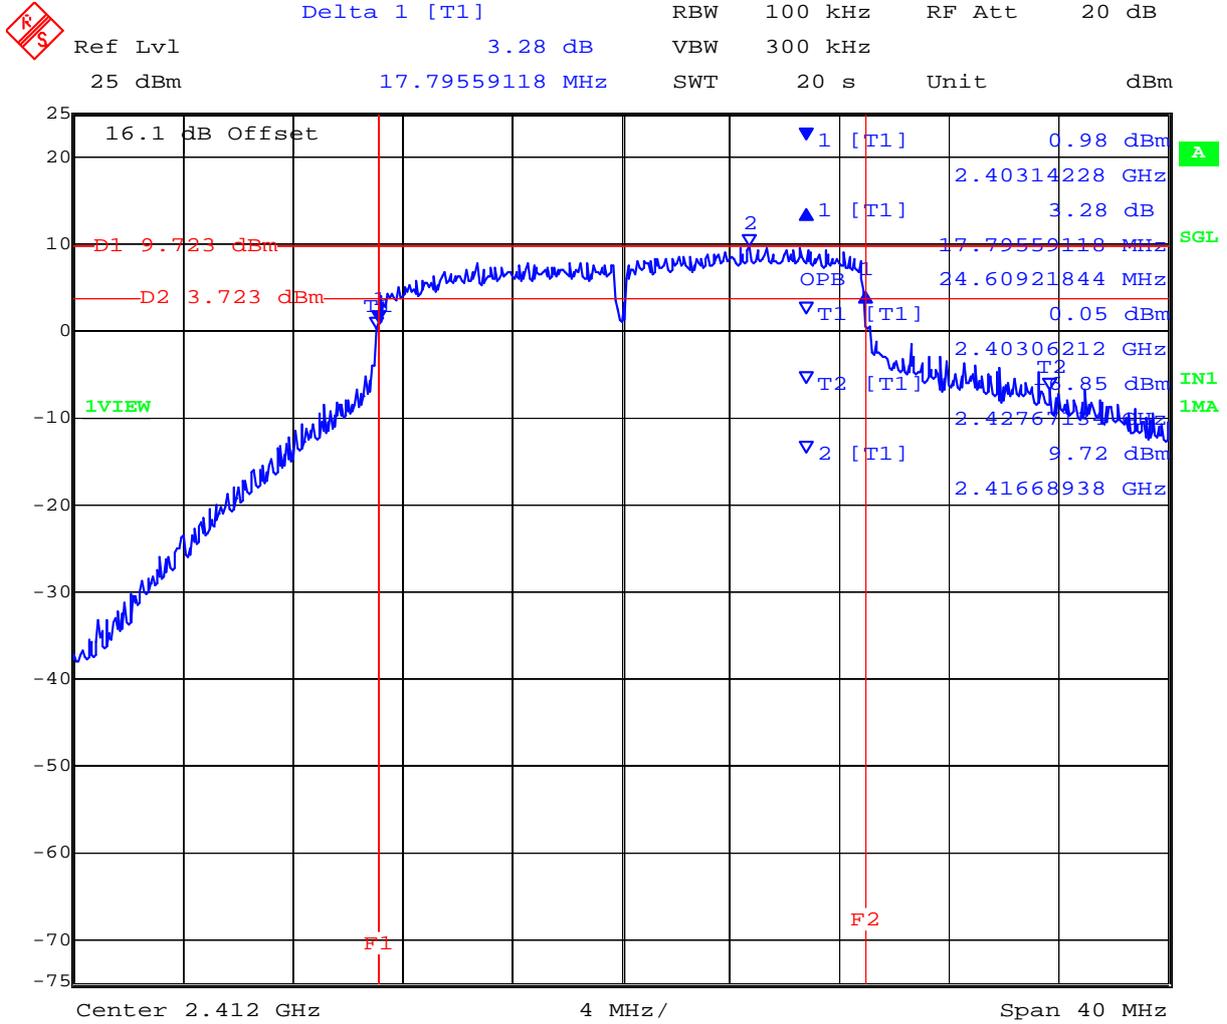


Date: 29.FEB.2012 15:17:47

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,412 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

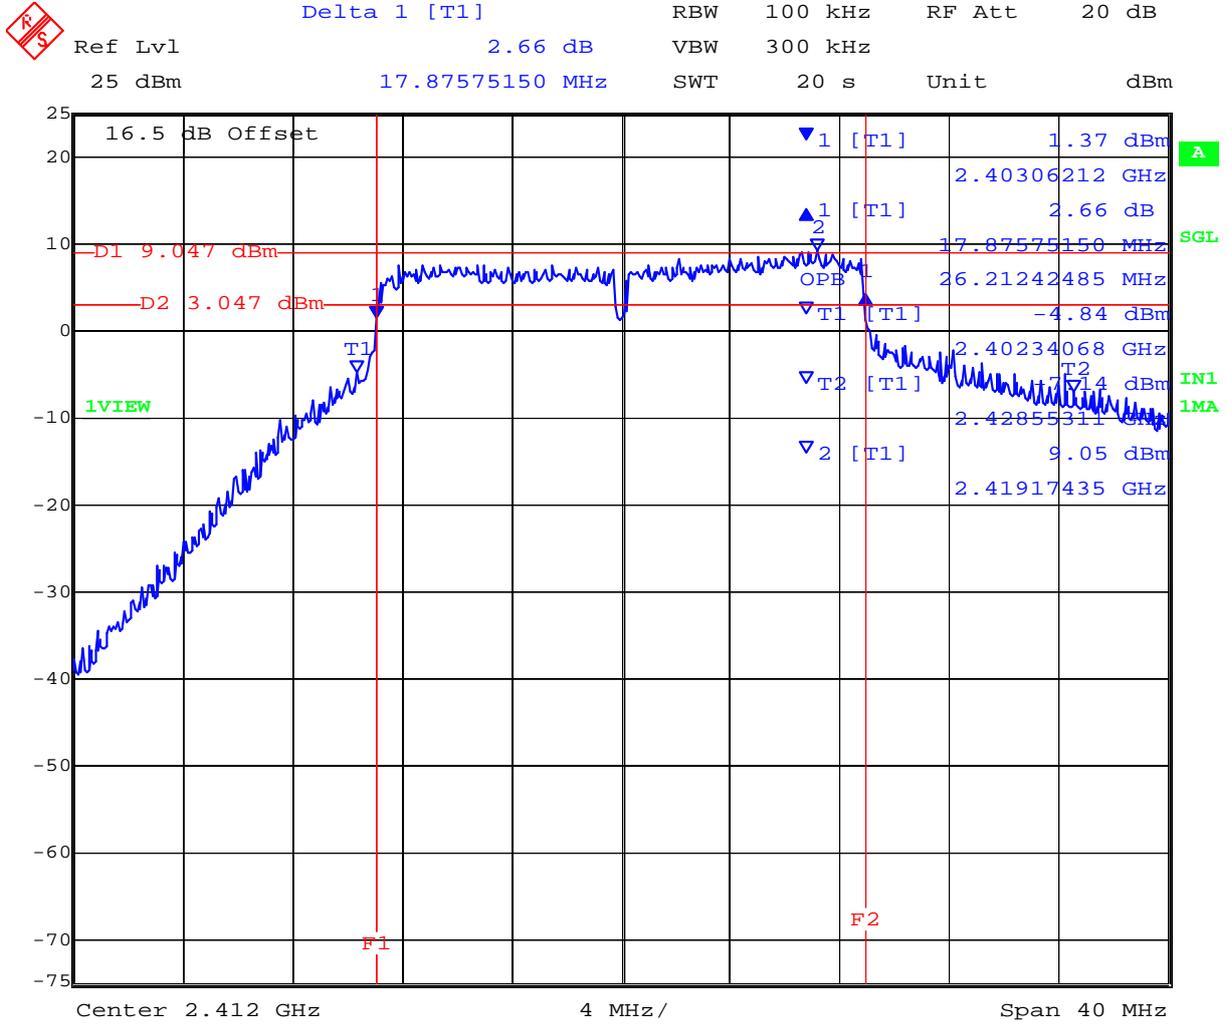


Date: 29.FEB.2012 15:18:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,437 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

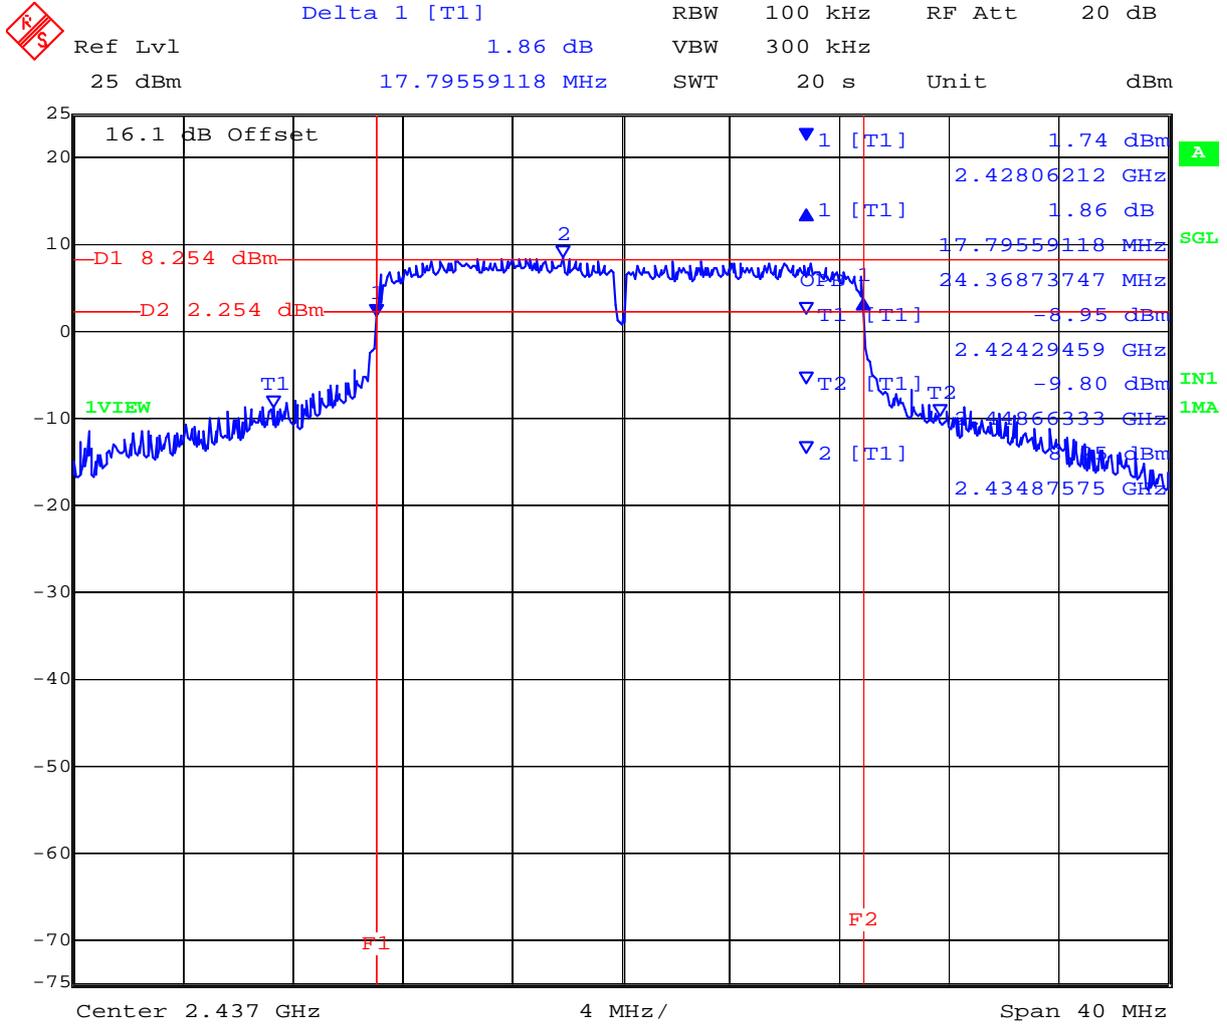

Date: 29.FEB.2012 15:30:57


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,437 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth



Delta 1 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl 0.45 dB VBW 300 kHz
 25 dBm 17.87575150 MHz SWT 20 s Unit dBm

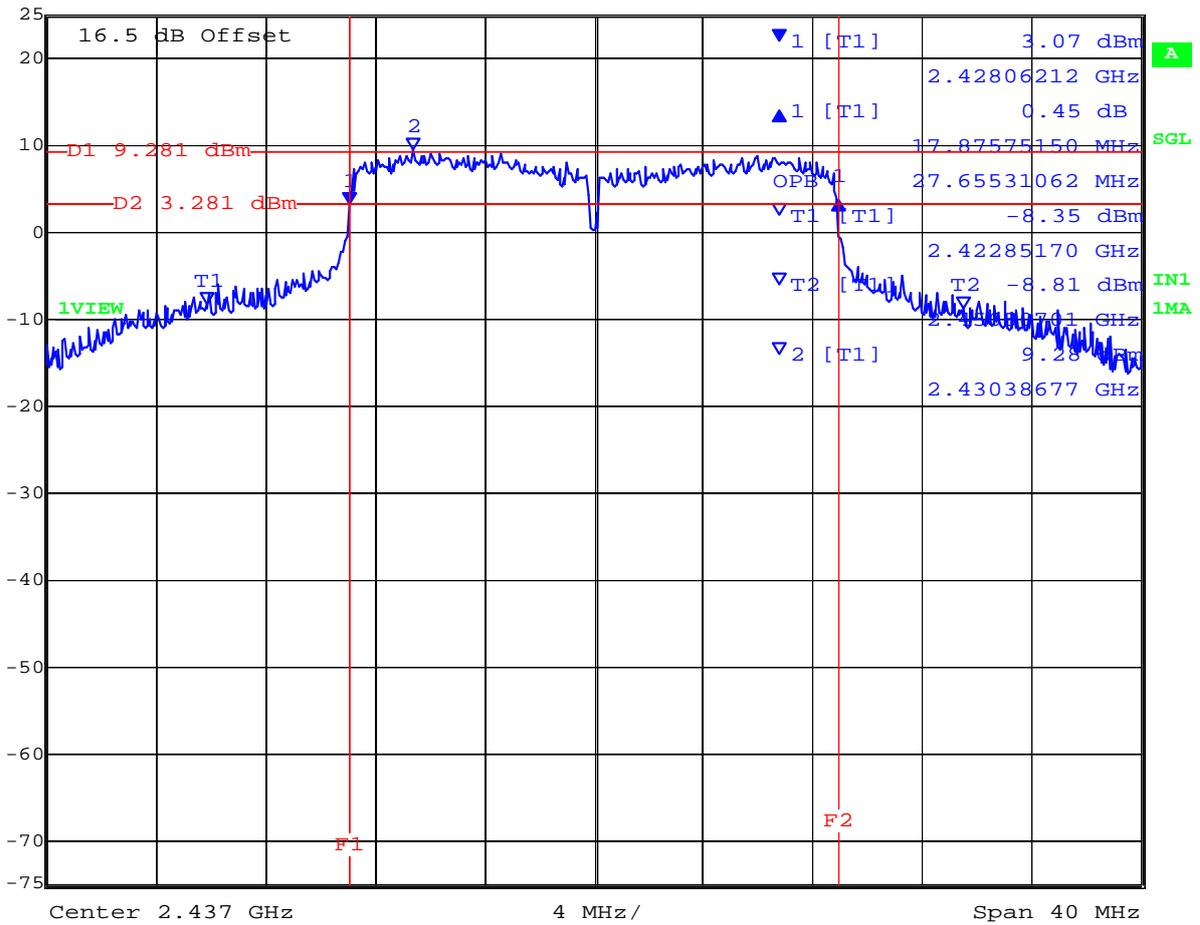


Date: 29.FEB.2012 15:32:00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,462 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

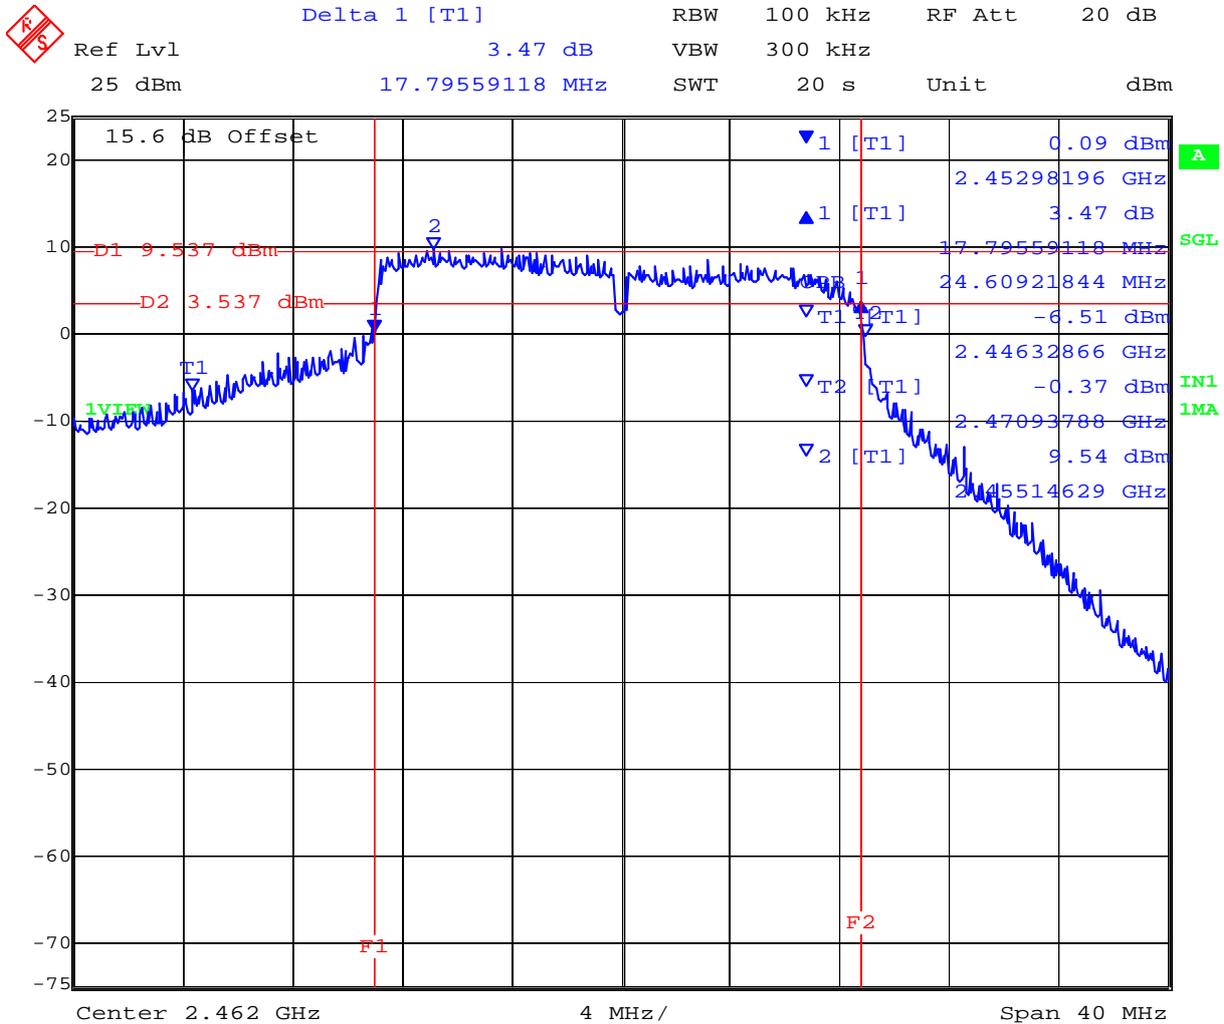


Date: 29.FEB.2012 15:58:44

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,462 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

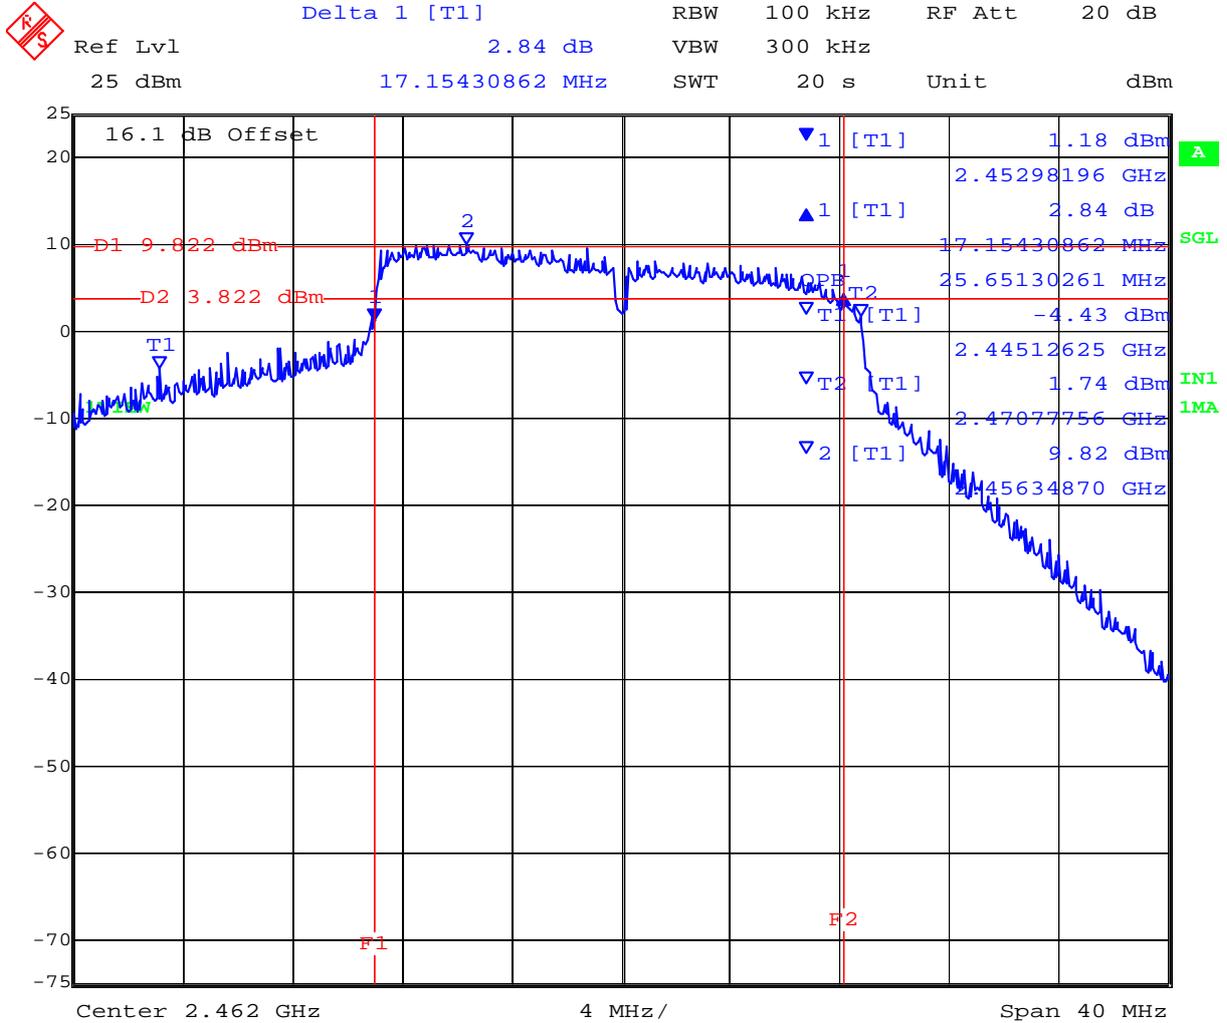


Date: 29.FEB.2012 15:59:50

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,462 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

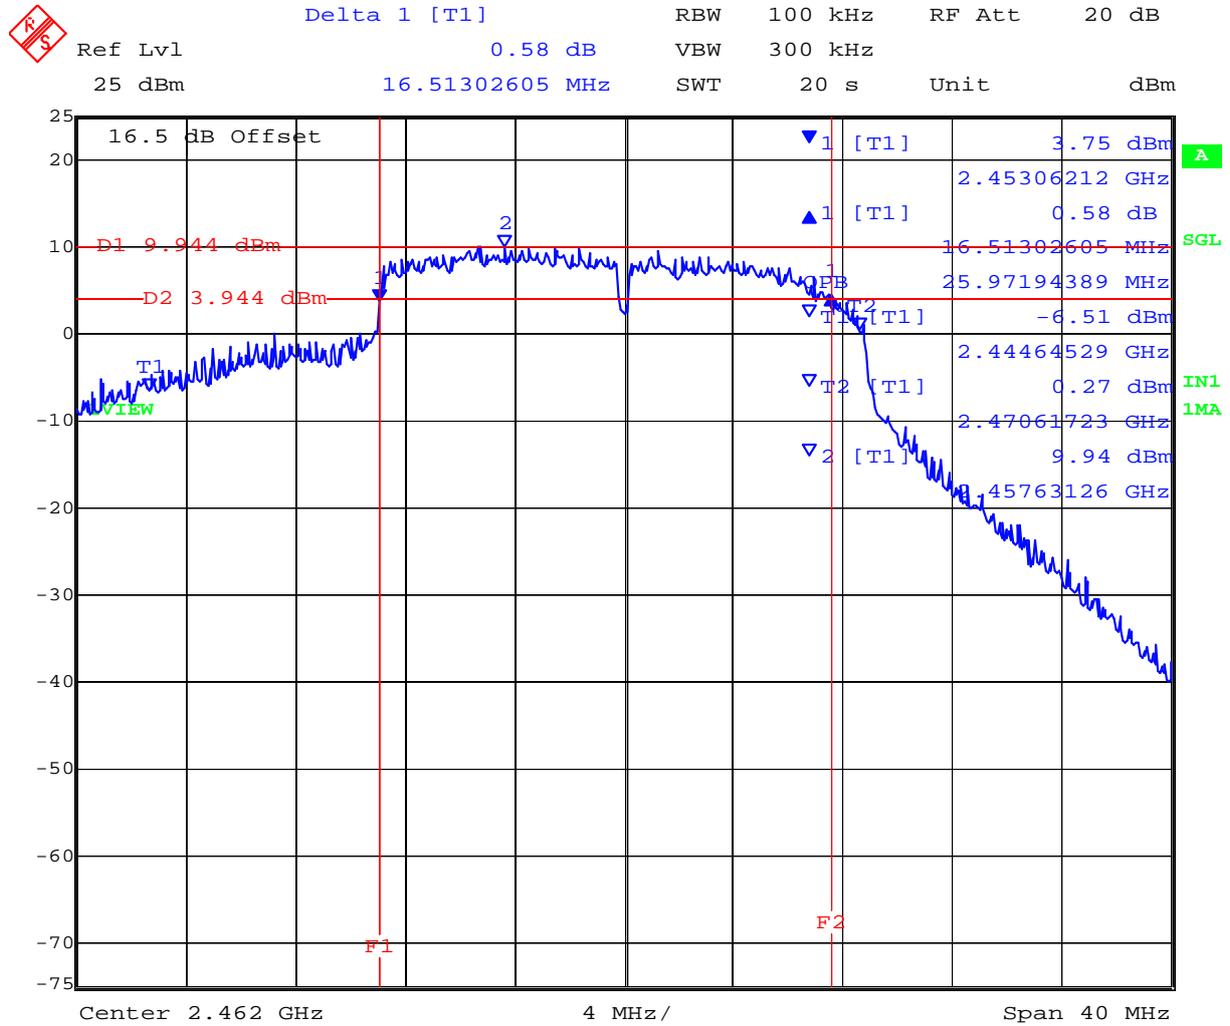

Date: 29.FEB.2012 16:00:54

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



TABLE OF RESULTS – 802.11n HT-40 Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	0 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
2422.000	34.469000	36.232000	36.713000	--	500	0.5	-33.969000
2437.000	36.553000	36.553000	36.874000	--			-36.053000
2452.000	35.912000	34.790000	34.629000	--			-34.129000

99% Bandwidth


Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
2422.000	51.303000	49.699000	47.134000	--			
2437.000	50.982000	45.371000	45.210000	--			
2452.000	49.699000	47.776000	48.737000	--			

Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,422 MHz 802.11n HT-40 Legacy 6 dB and 99% Bandwidth

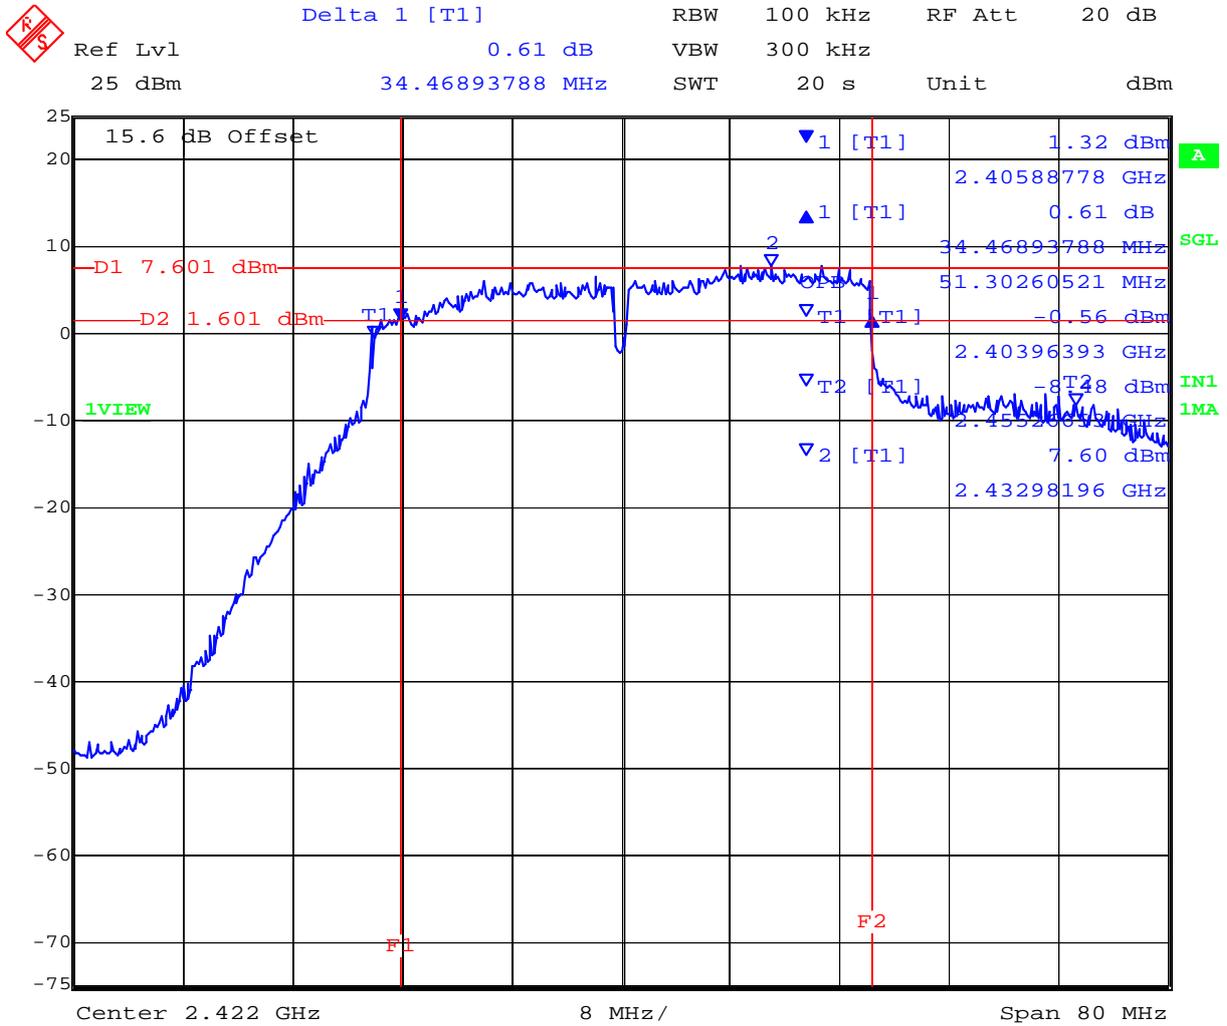


Date: 29.FEB.2012 16:46:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,422 MHz 802.11n HT-40 Legacy 6 dB and 99% Bandwidth

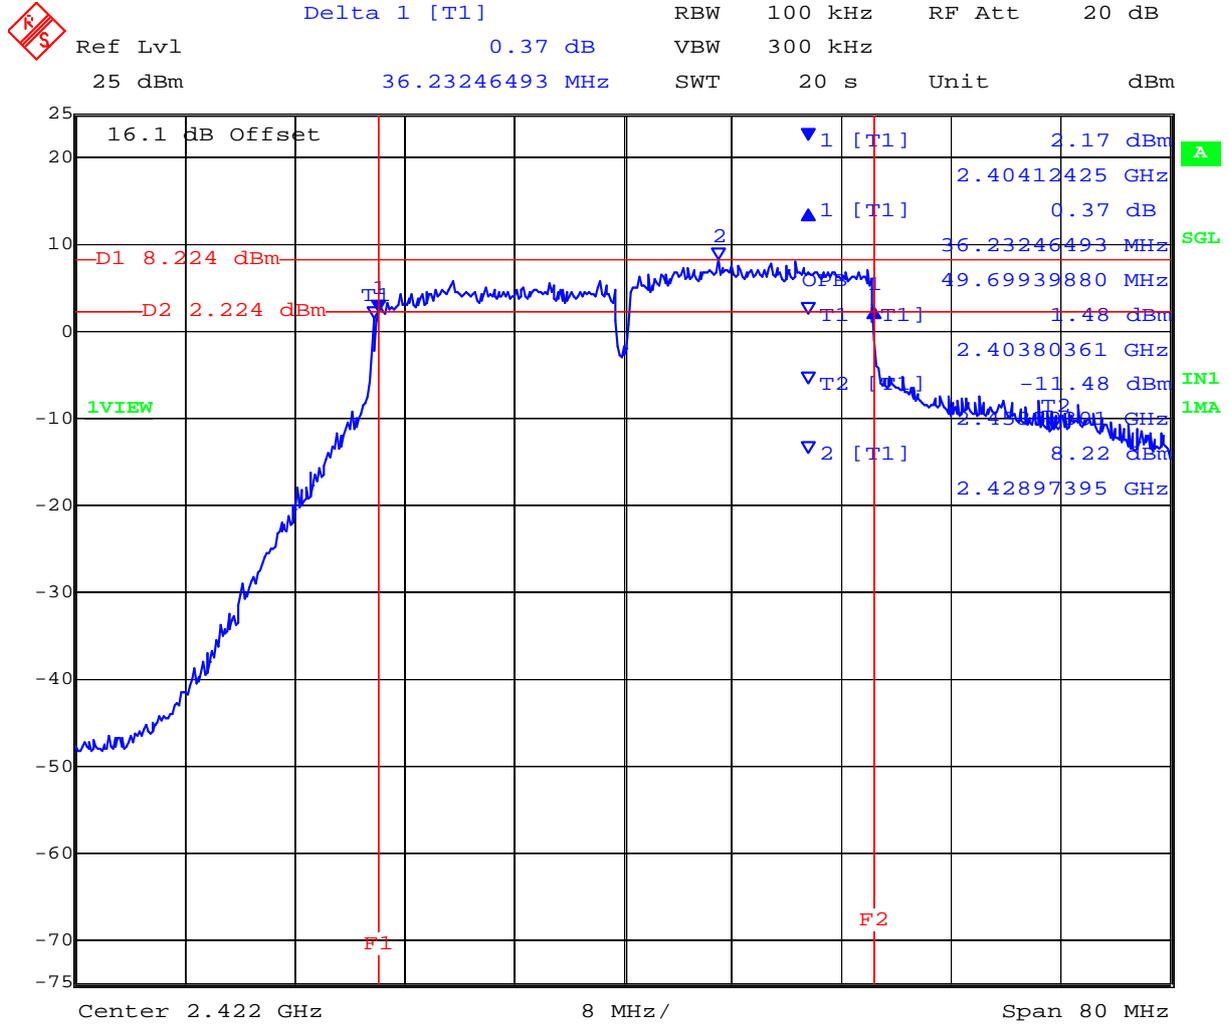

Date: 29.FEB.2012 16:47:12


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,422 MHz 802.11n HT-40 Legacy 6 dB and 99% Bandwidth



Delta 1 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl 4.64 dB VBW 300 kHz
 25 dBm 36.87374750 MHz SWT 20 s Unit dBm

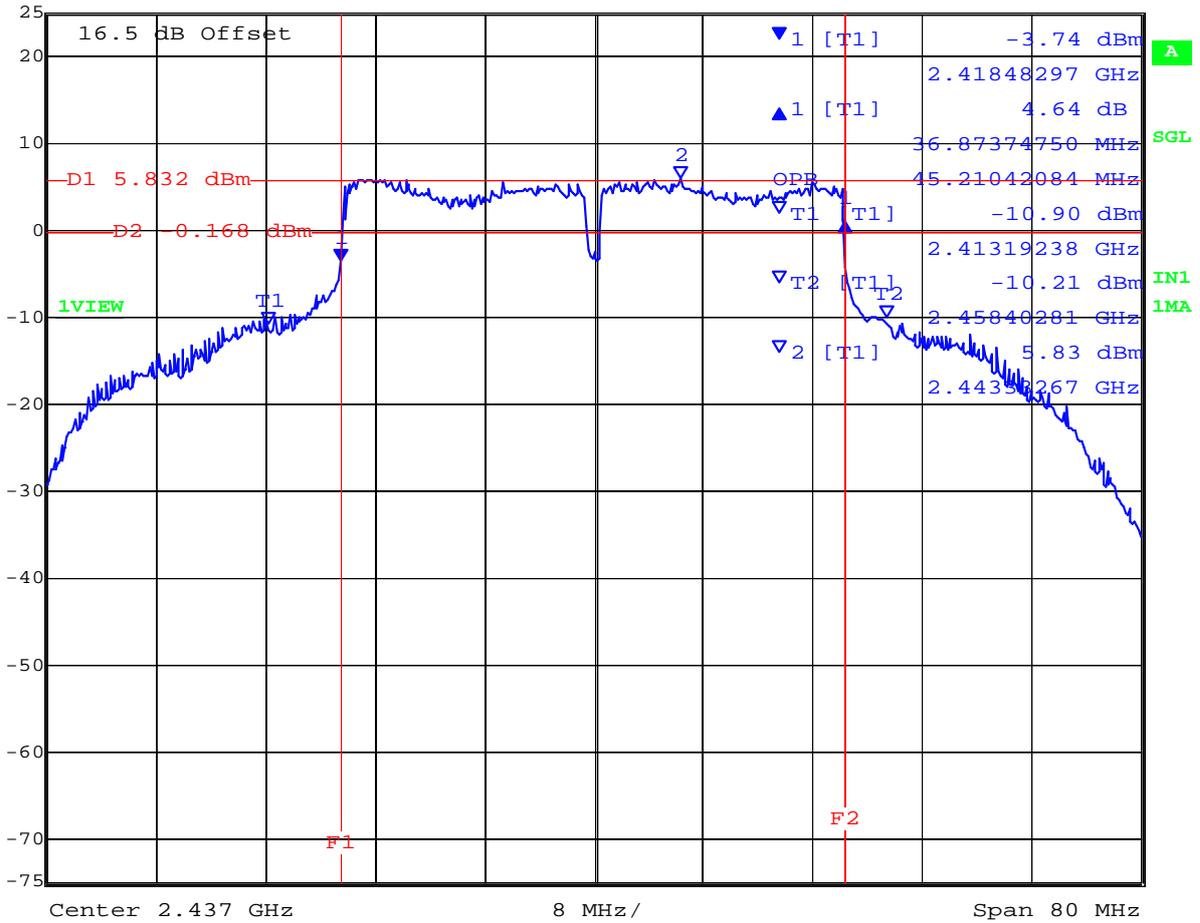


Date: 29.FEB.2012 17:20:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,437 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

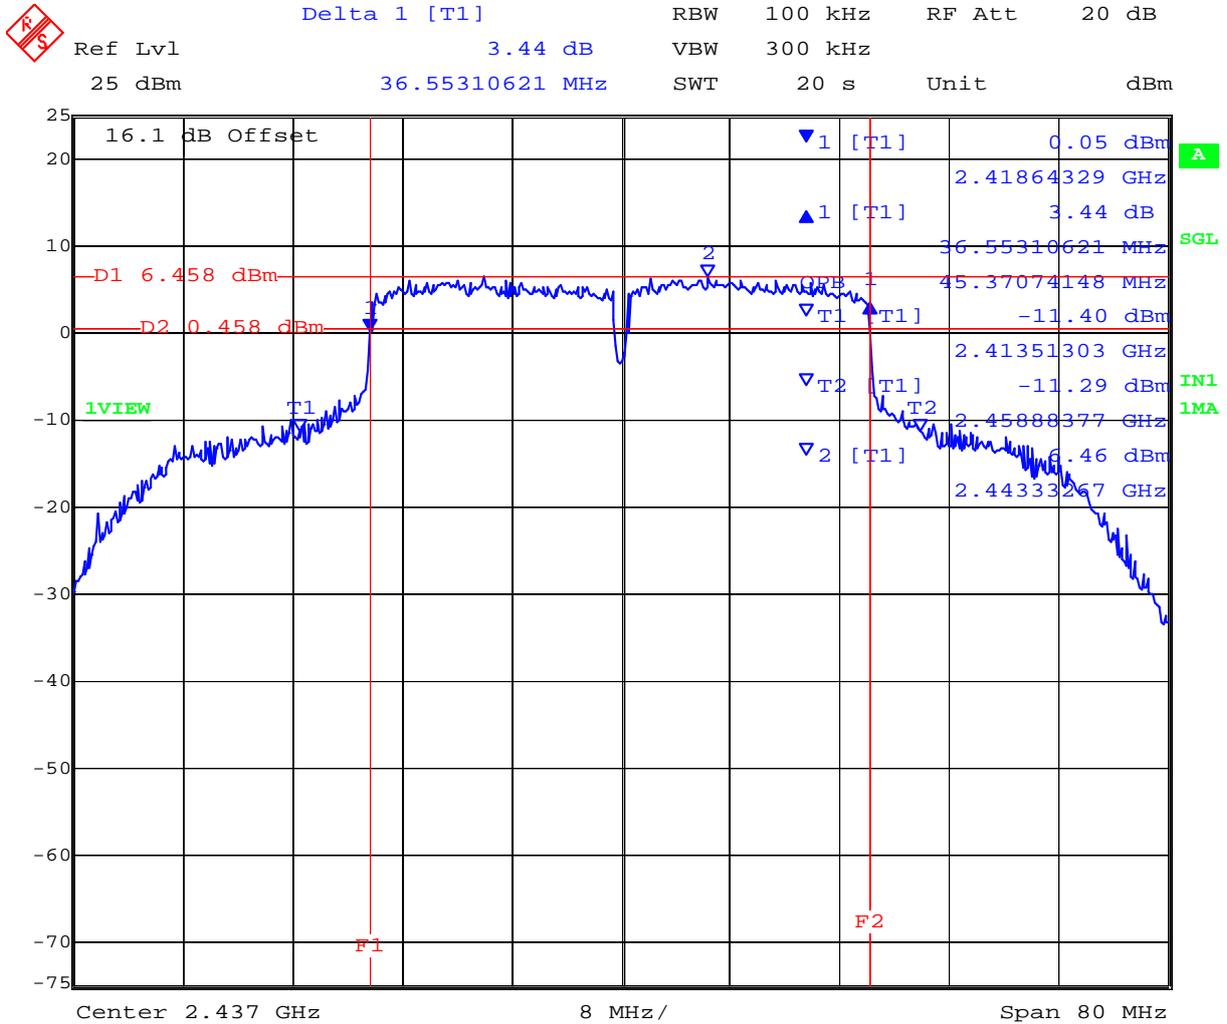


Date: 29.FEB.2012 17:19:53

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,437 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

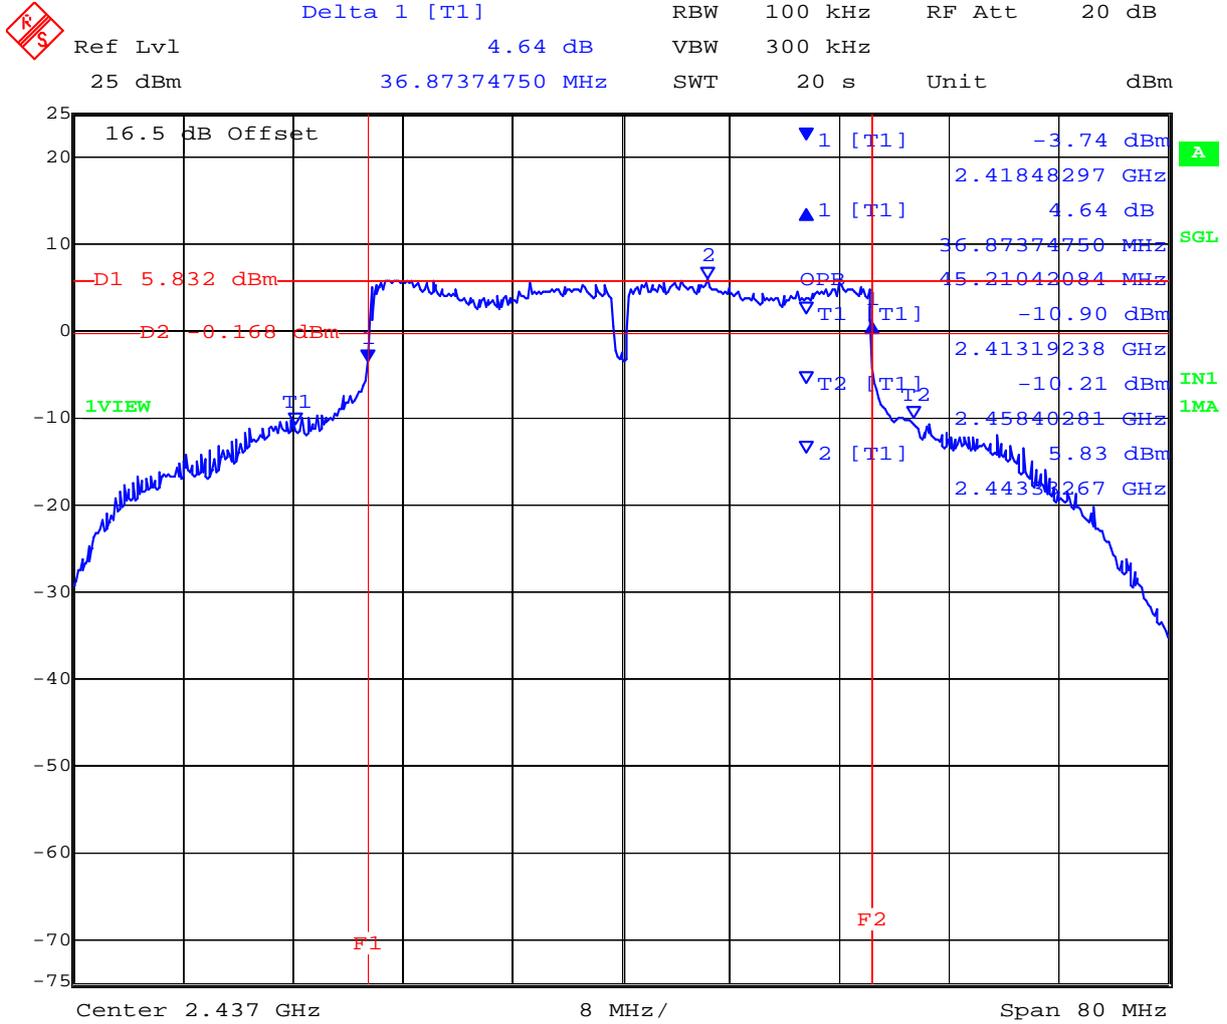


Date: 29.FEB.2012 17:20:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,452 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

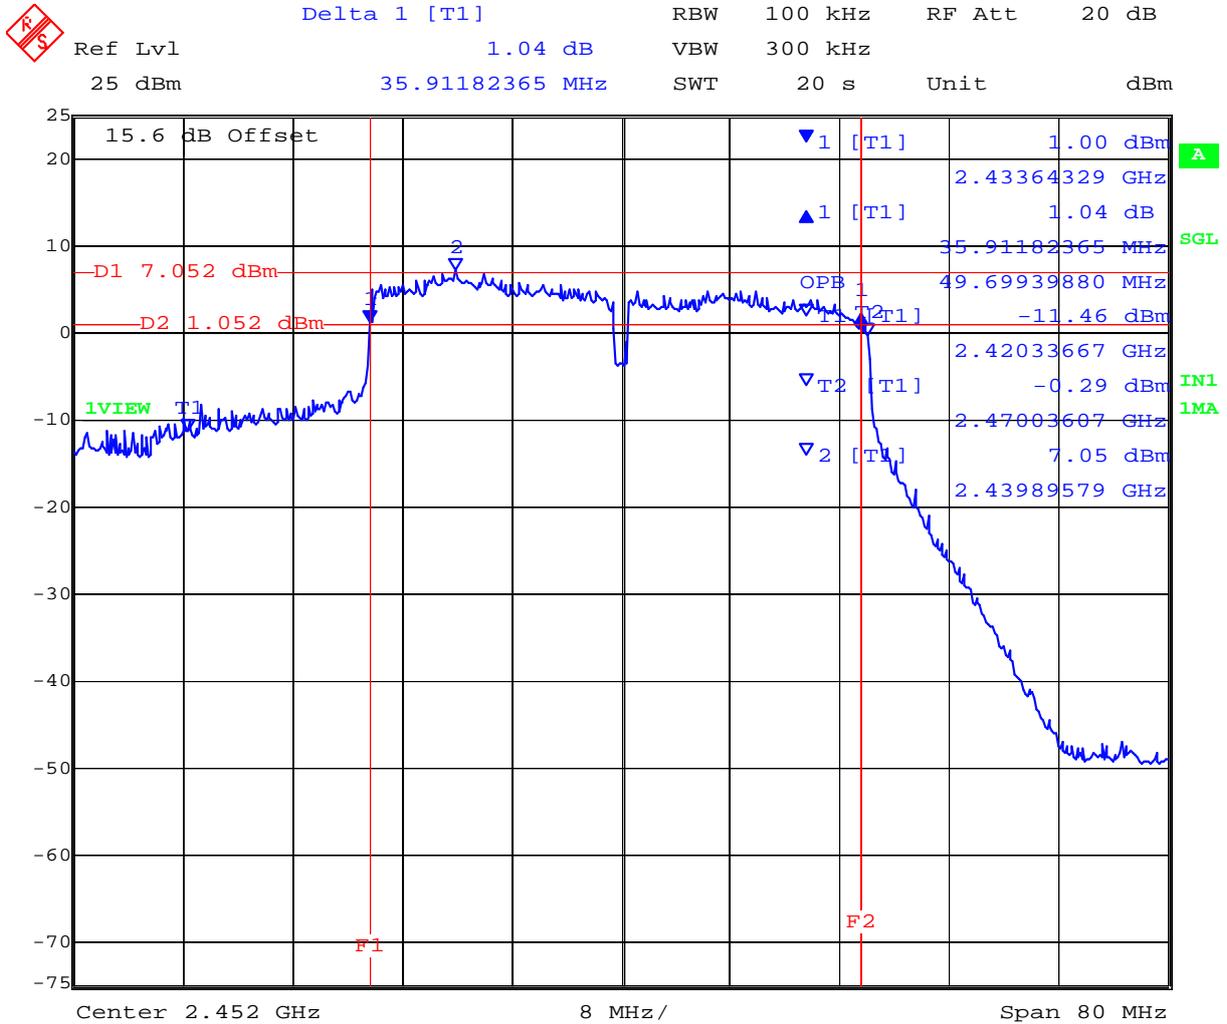

Date: 29.FEB.2012 17:49:07


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,452 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth



Delta 1 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl 5.31 dB VBW 300 kHz
 25 dBm 34.78957916 MHz SWT 20 s Unit dBm

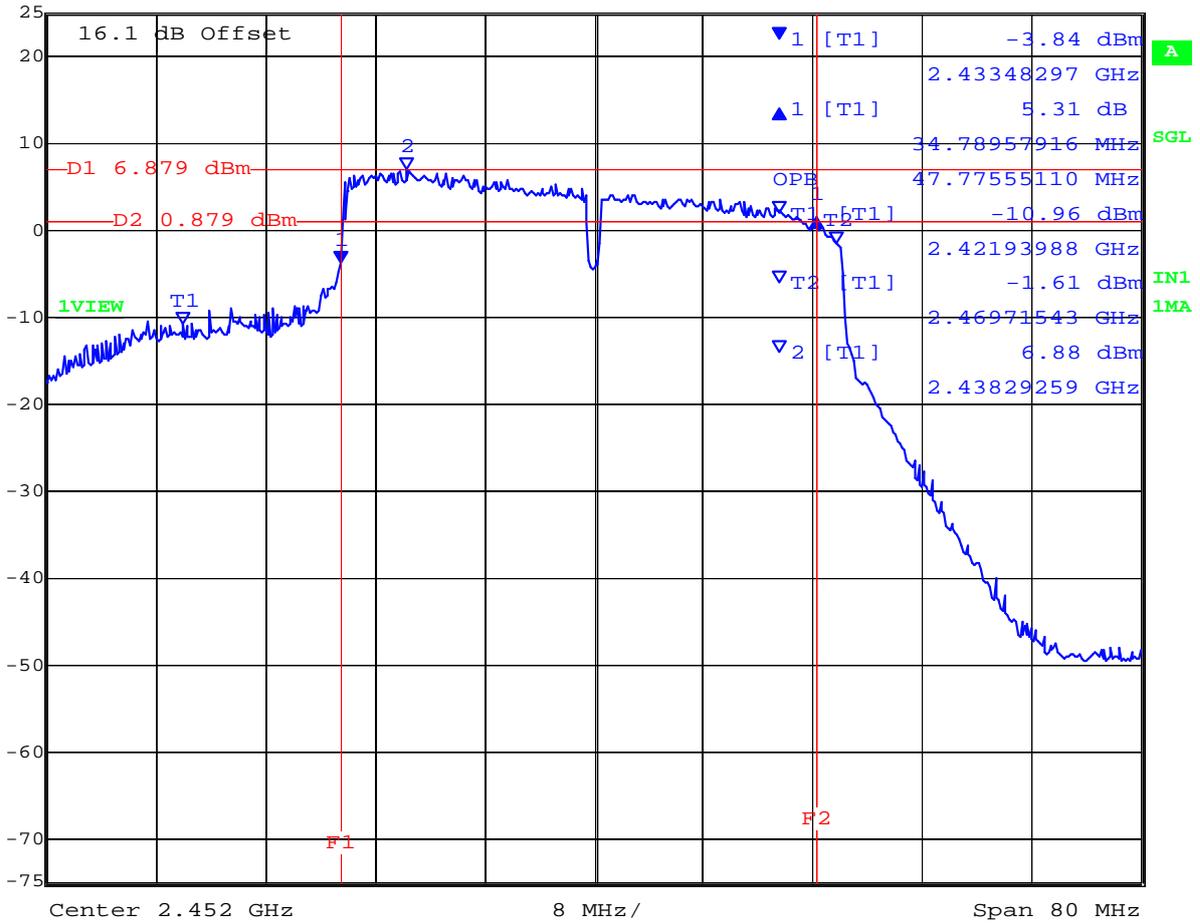

Date: 29.FEB.2012 17:50:13


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,452 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth



Delta 1 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl 4.20 dB VBW 300 kHz
 25 dBm 34.62925852 MHz SWT 20 s Unit dBm

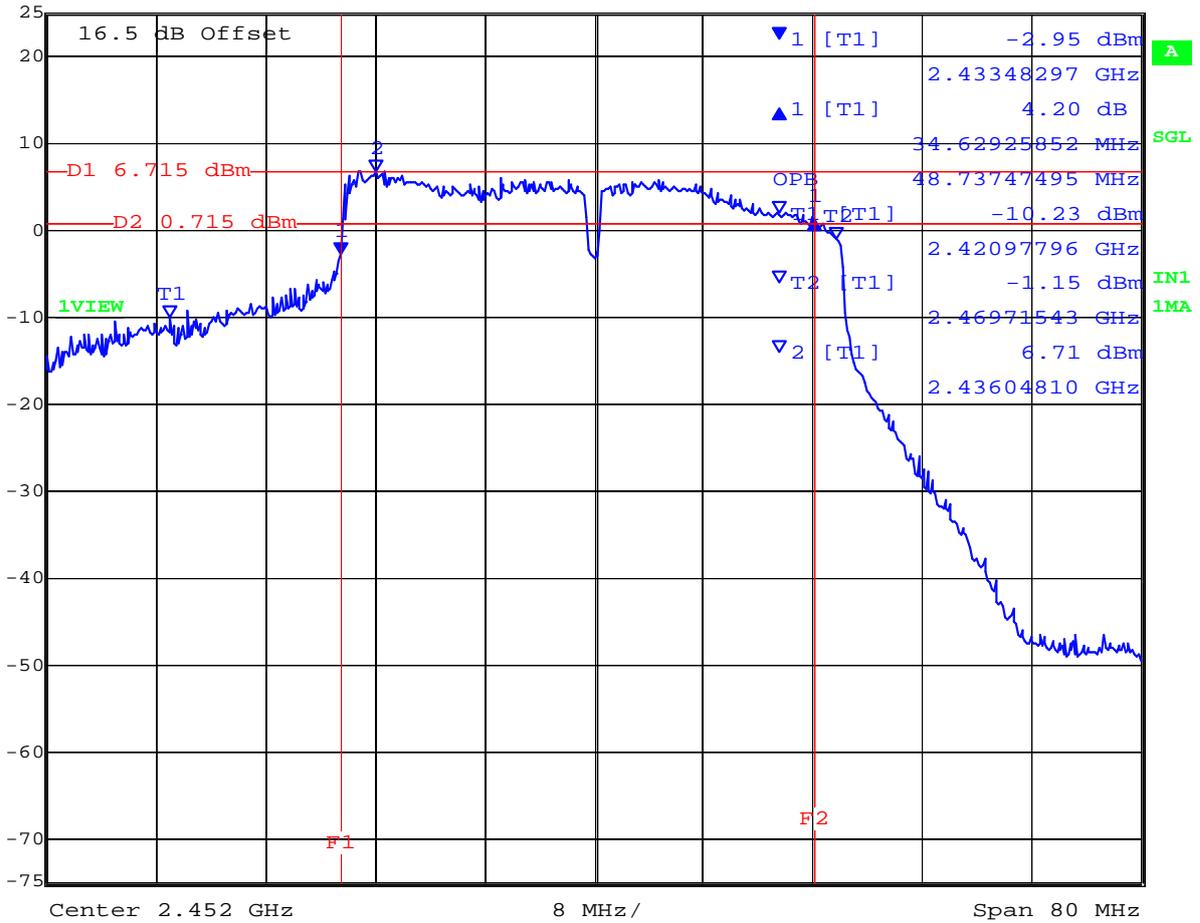

Date: 29.FEB.2012 17:51:16

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 63 of 331

TABLE OF RESULTS – 802.11a - Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	0 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
5745.000	16.673000	16.673000	16.673000	--	500	0.5	-16.173000
5785.000	16.673000	16.673000	16.673000	--			-16.173000
5825.000	16.673000	16.914000	16.593000	--			-16.093000

99% Bandwidth


Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5745.000	28.537000	31.743000	29.579000	--			
5785.000	33.587000	34.549000	33.026000	--			
5825.000	34.389000	34.389000	33.667000	--			

Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,745 MHz 802.11a Legacy 6 dB and 99% Bandwidth

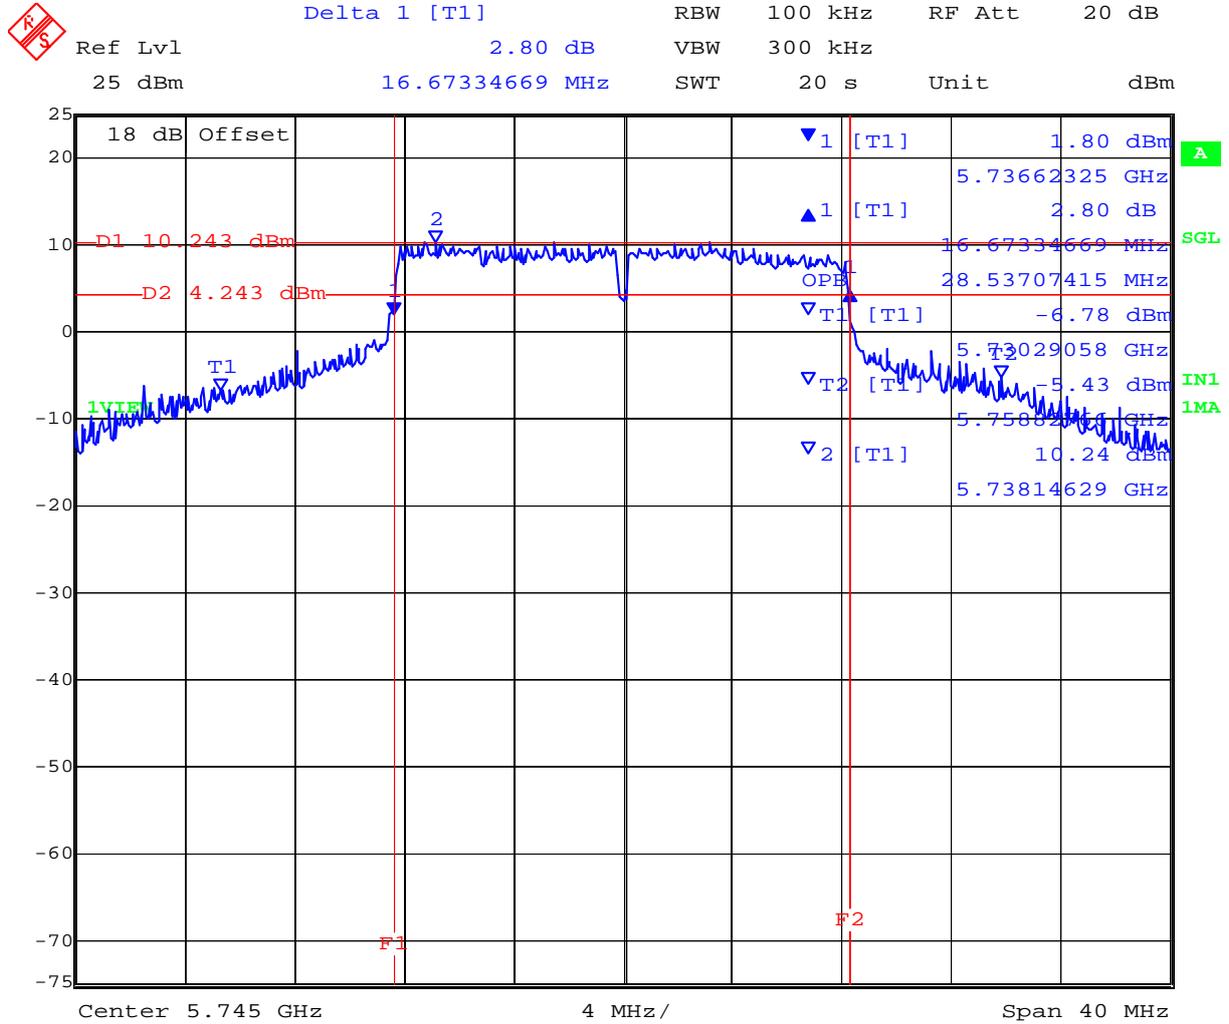


Date: 28.FEB.2012 11:50:34

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 5,745 MHz 802.11a Legacy 6 dB and 99% Bandwidth

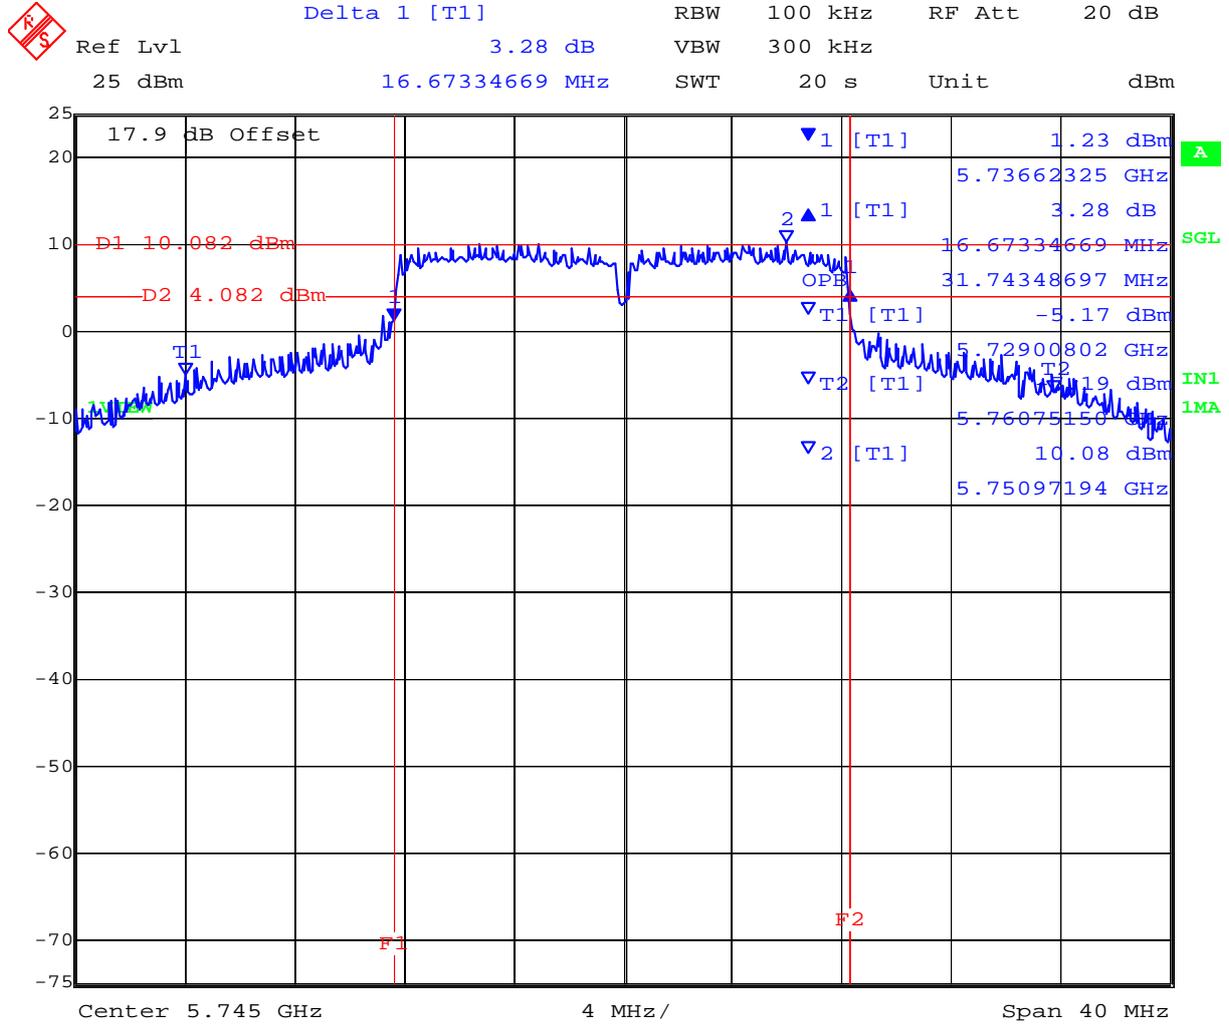


Date: 28.FEB.2012 11:51:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,745 MHz 802.11a Legacy 6 dB and 99% Bandwidth

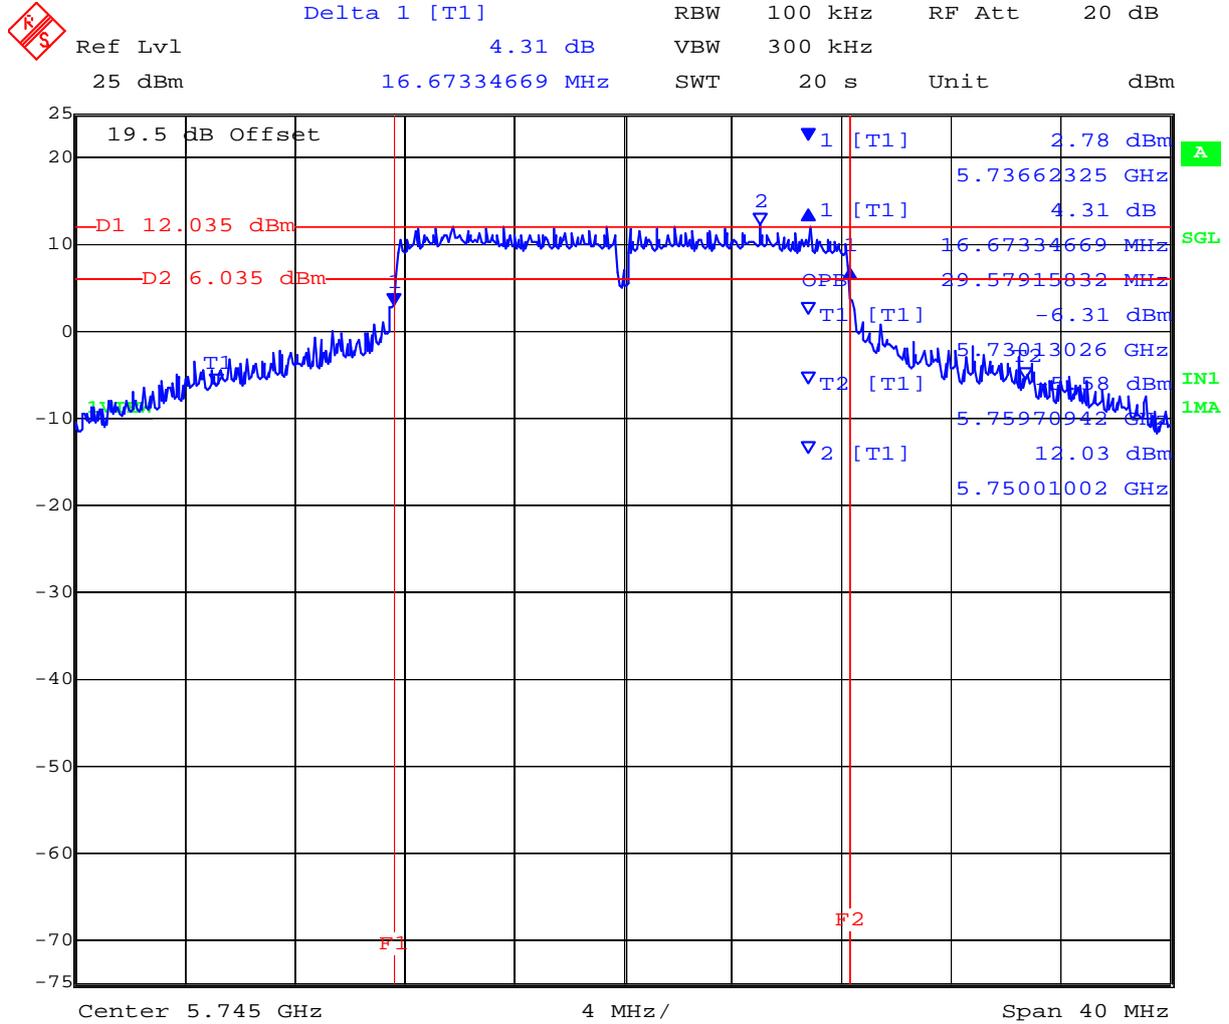


Date: 28.FEB.2012 11:52:48

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,785 MHz 802.11a Legacy 6 dB and 99% Bandwidth

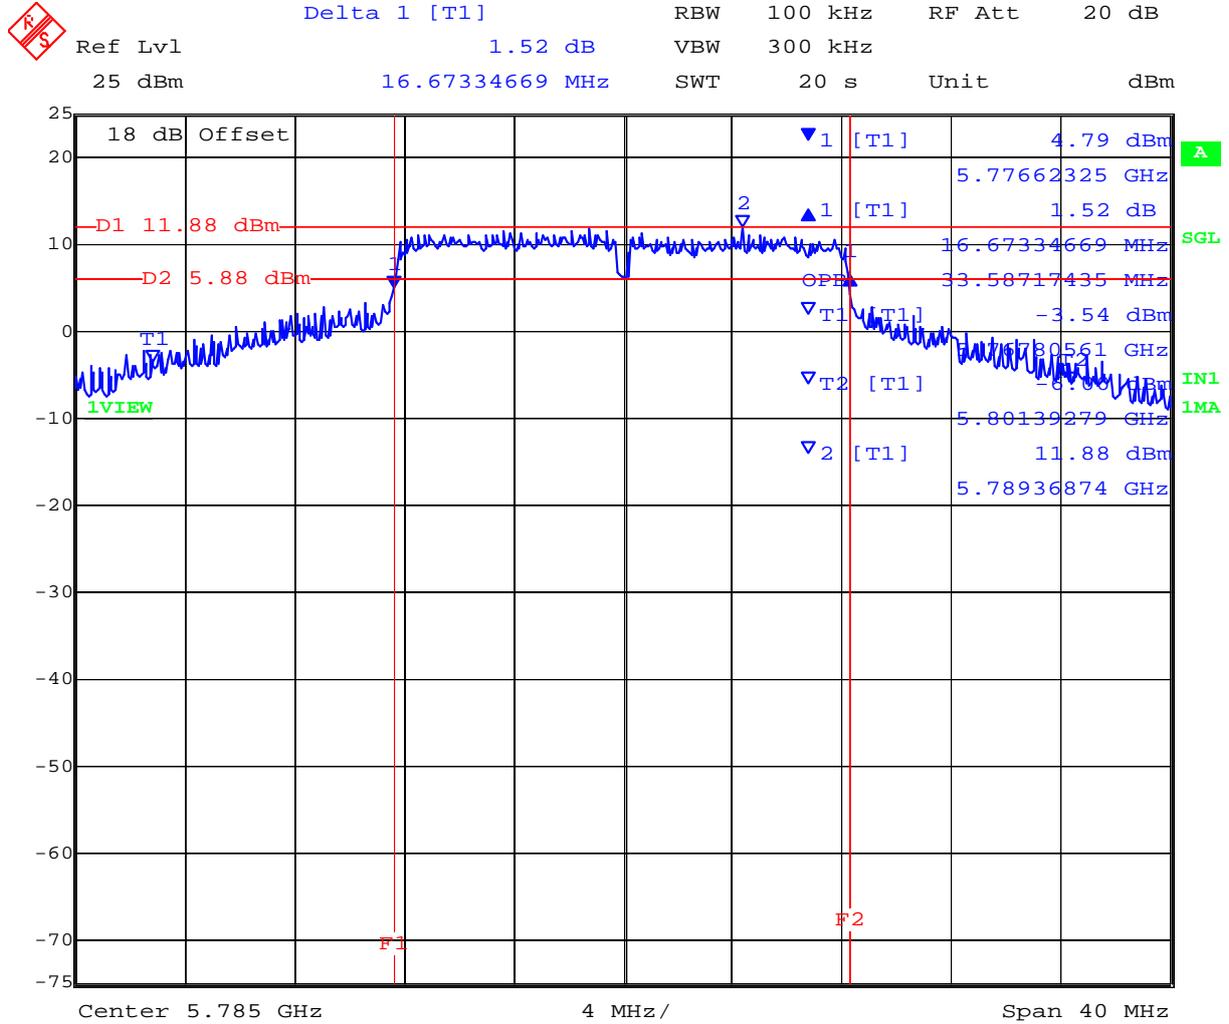


Date: 28.FEB.2012 12:24:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 5,785 MHz 802.11a Legacy 6 dB and 99% Bandwidth

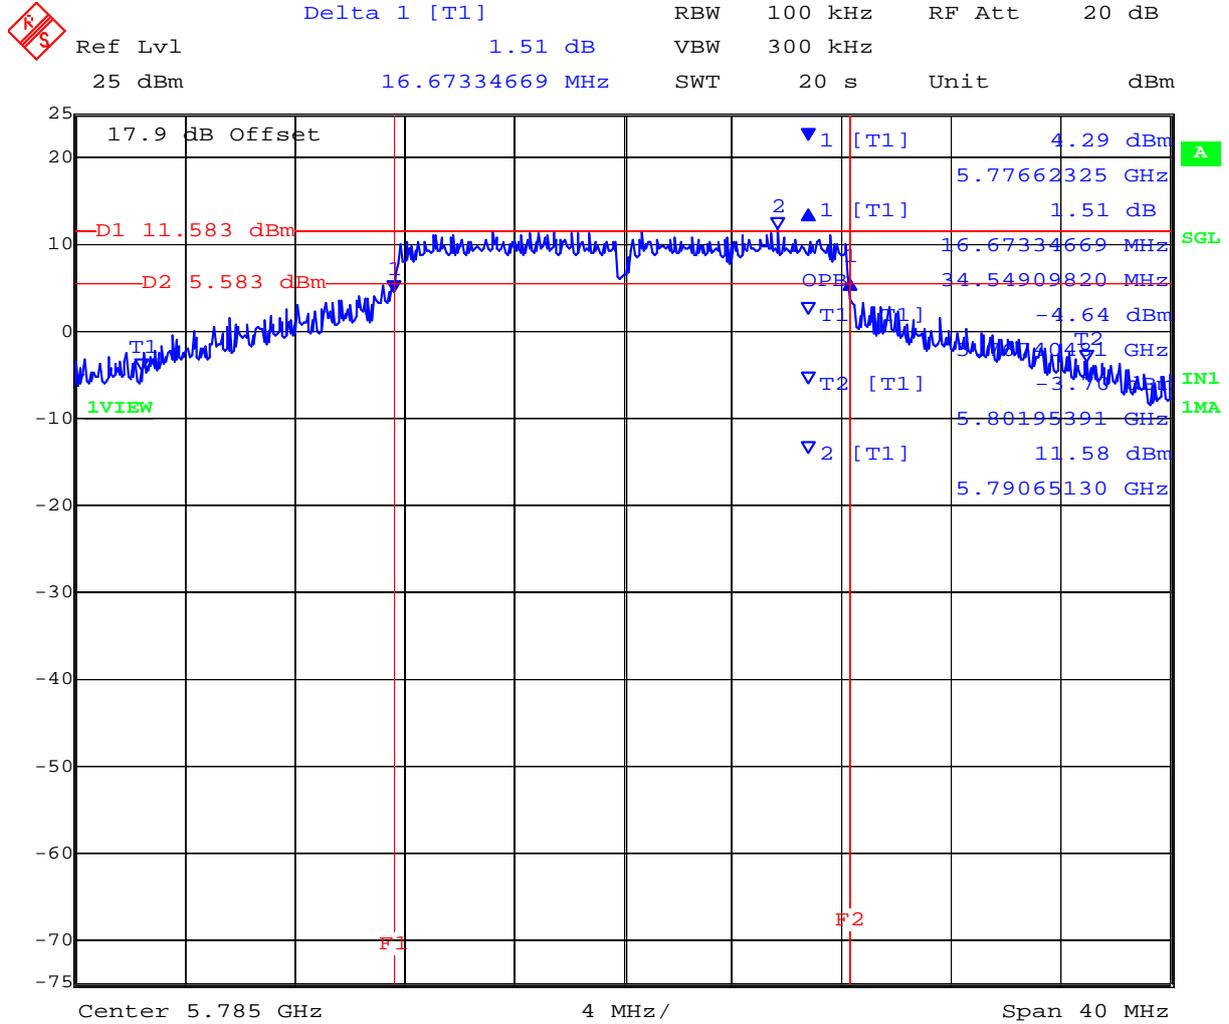


Date: 28.FEB.2012 12:25:10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,785 MHz 802.11a Legacy 6 dB and 99% Bandwidth

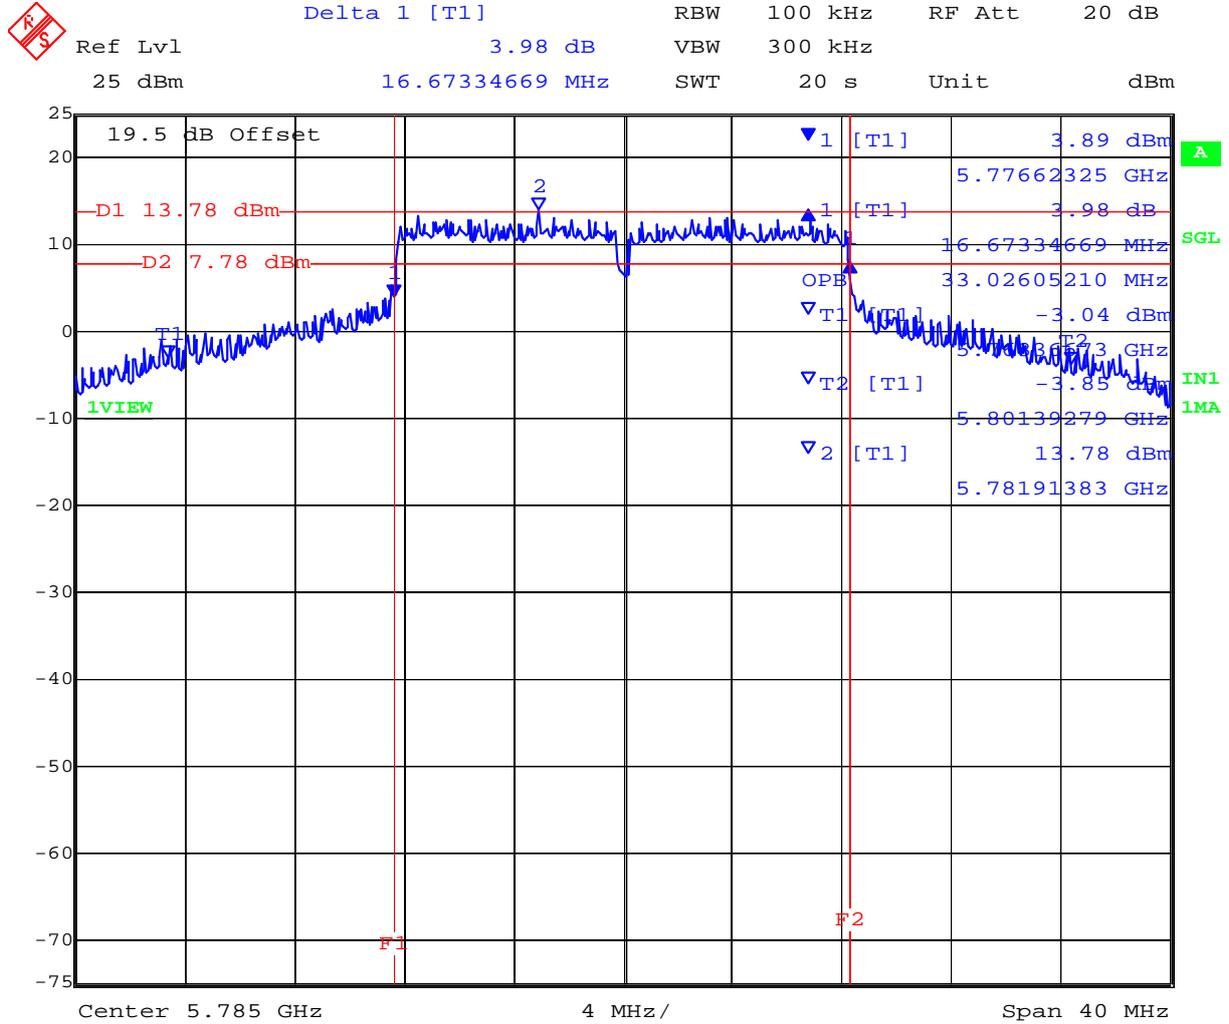


Date: 28.FEB.2012 12:26:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,825 MHz 802.11a Legacy 6 dB and 99% Bandwidth

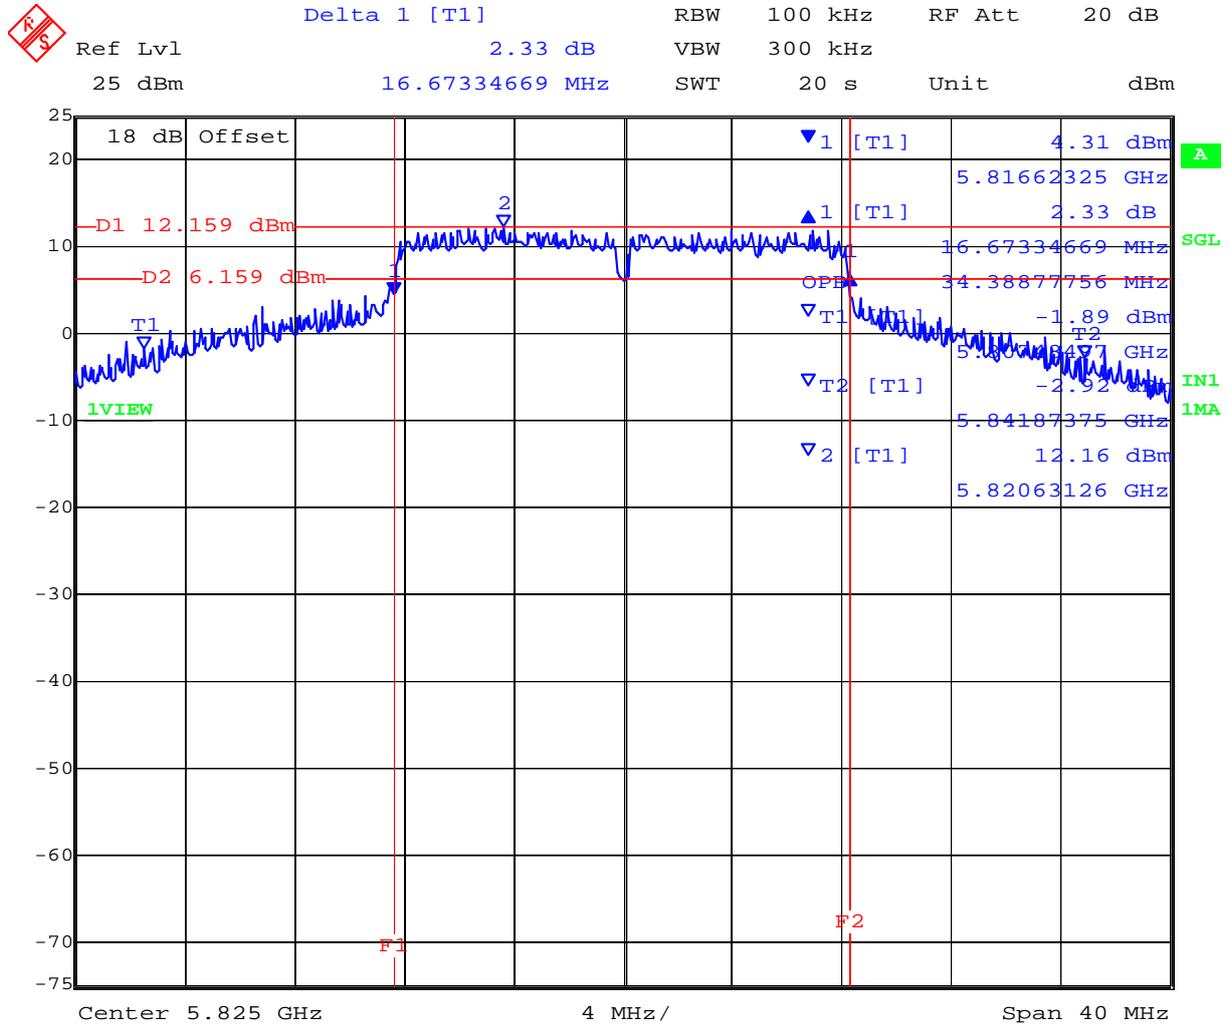


Date: 28.FEB.2012 12:54:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 5,825 MHz 802.11a Legacy 6 dB and 99% Bandwidth

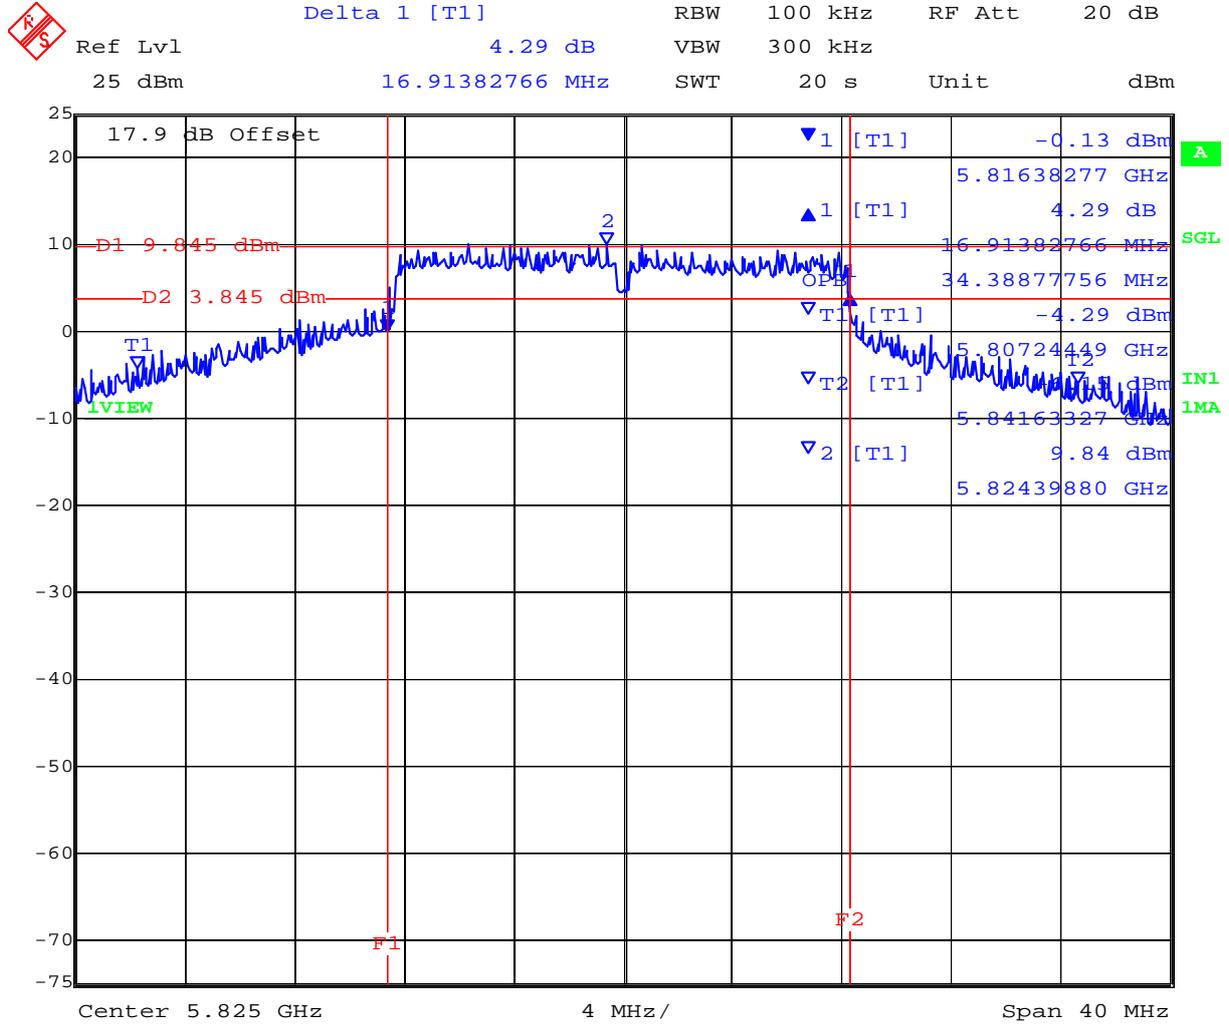


Date: 28.FEB.2012 12:55:34

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,825 MHz 802.11a Legacy 6 dB and 99% Bandwidth

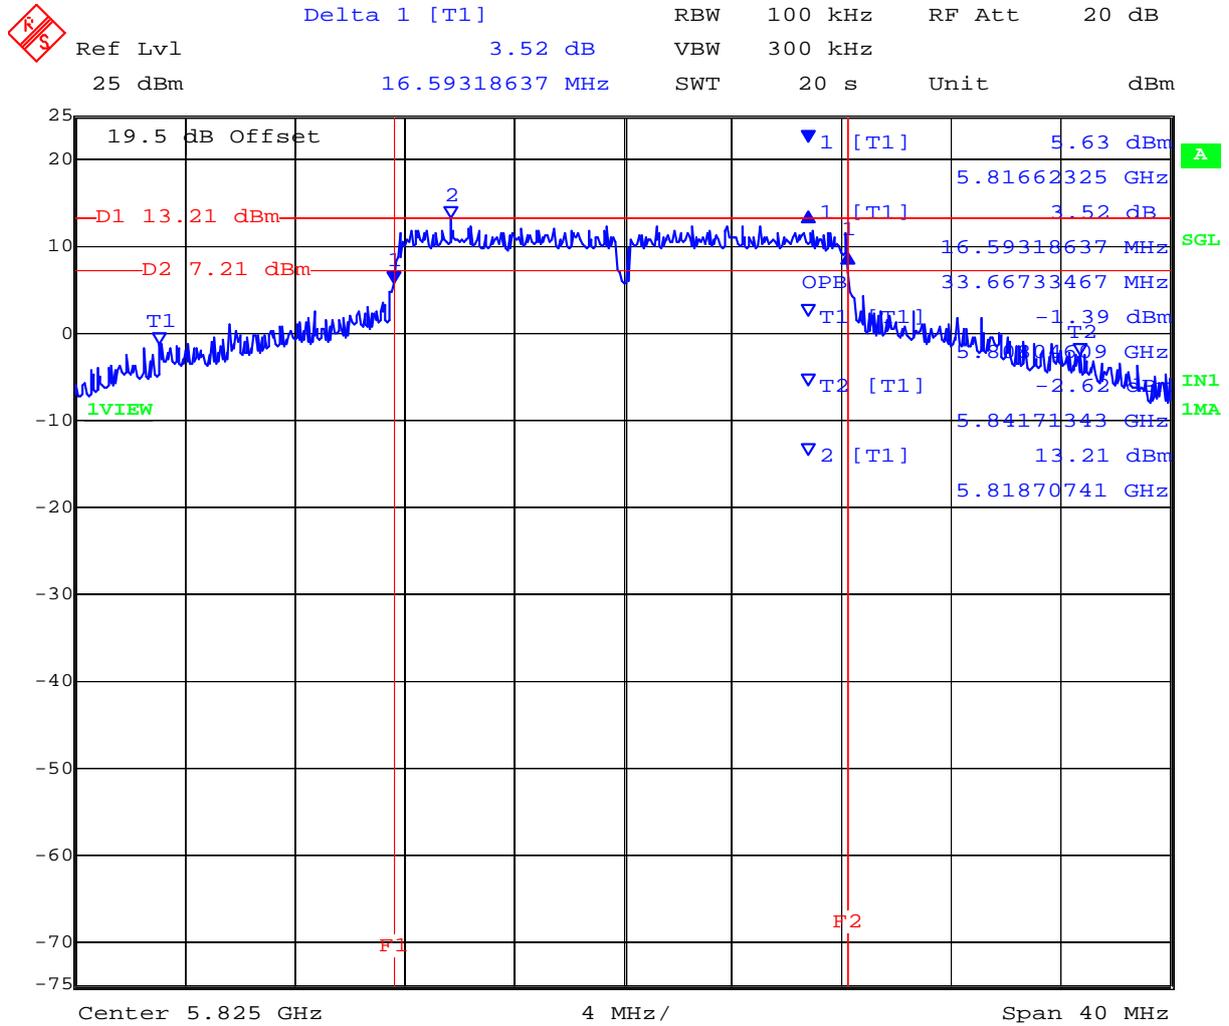

Date: 28.FEB.2012 12:56:39

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 73 of 331

TABLE OF RESULTS – 802.11n HT-20

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variants:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	0 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
5745.000	17.956000	17.956000	17.956000	--	500	0.5	-17.456000
5785.000	17.876000	18.116000	17.876000	--			-17.376000
5825.000	17.956000	17.876000	17.956000	--			-17.376000

99% Bandwidth


Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5745.000	28.938000	31.663000	29.178000	--			
5785.000	34.309000	35.271000	33.587000	--			
5825.000	33.828000	34.148000	33.106000	--			

Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,745 MHz 802.11n HT-20 6 dB and 99% Bandwidth

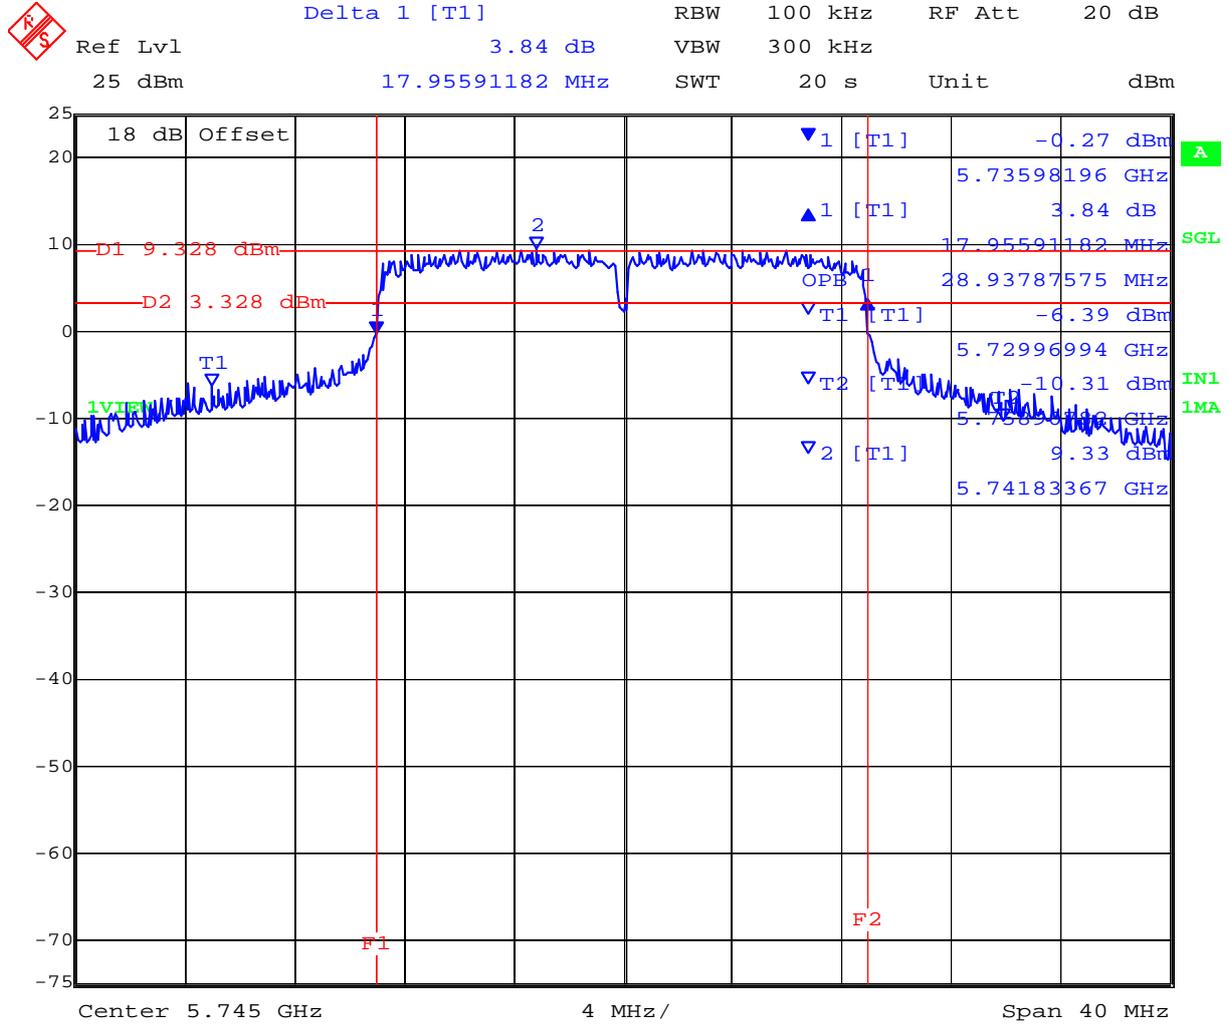


Date: 28.FEB.2012 13:36:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 5,745 MHz 802.11n HT-20 6 dB and 99% Bandwidth

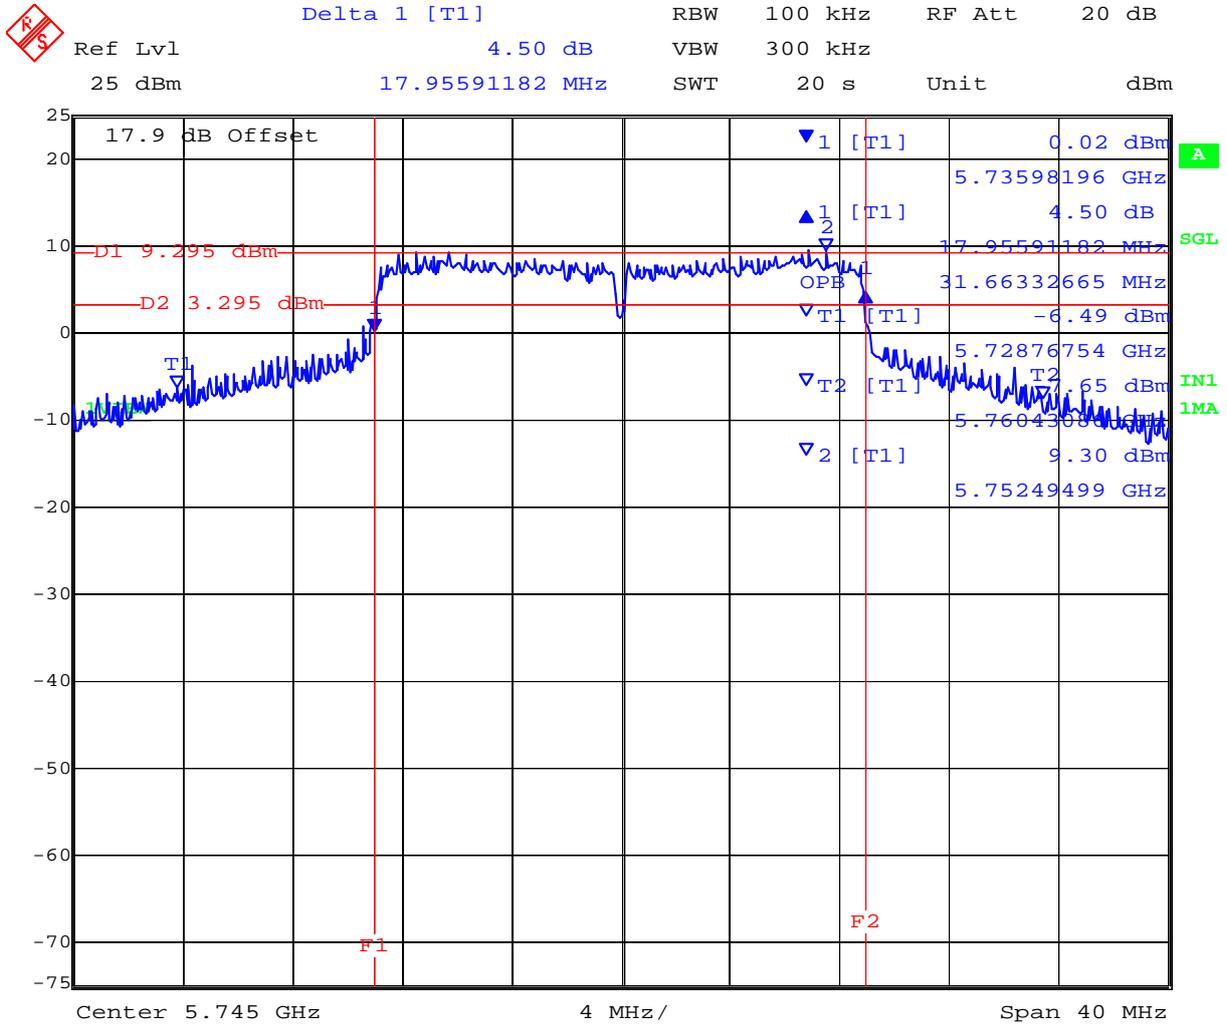


Date: 28.FEB.2012 13:37:19

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,745 MHz 802.11n HT-20 6 dB and 99% Bandwidth

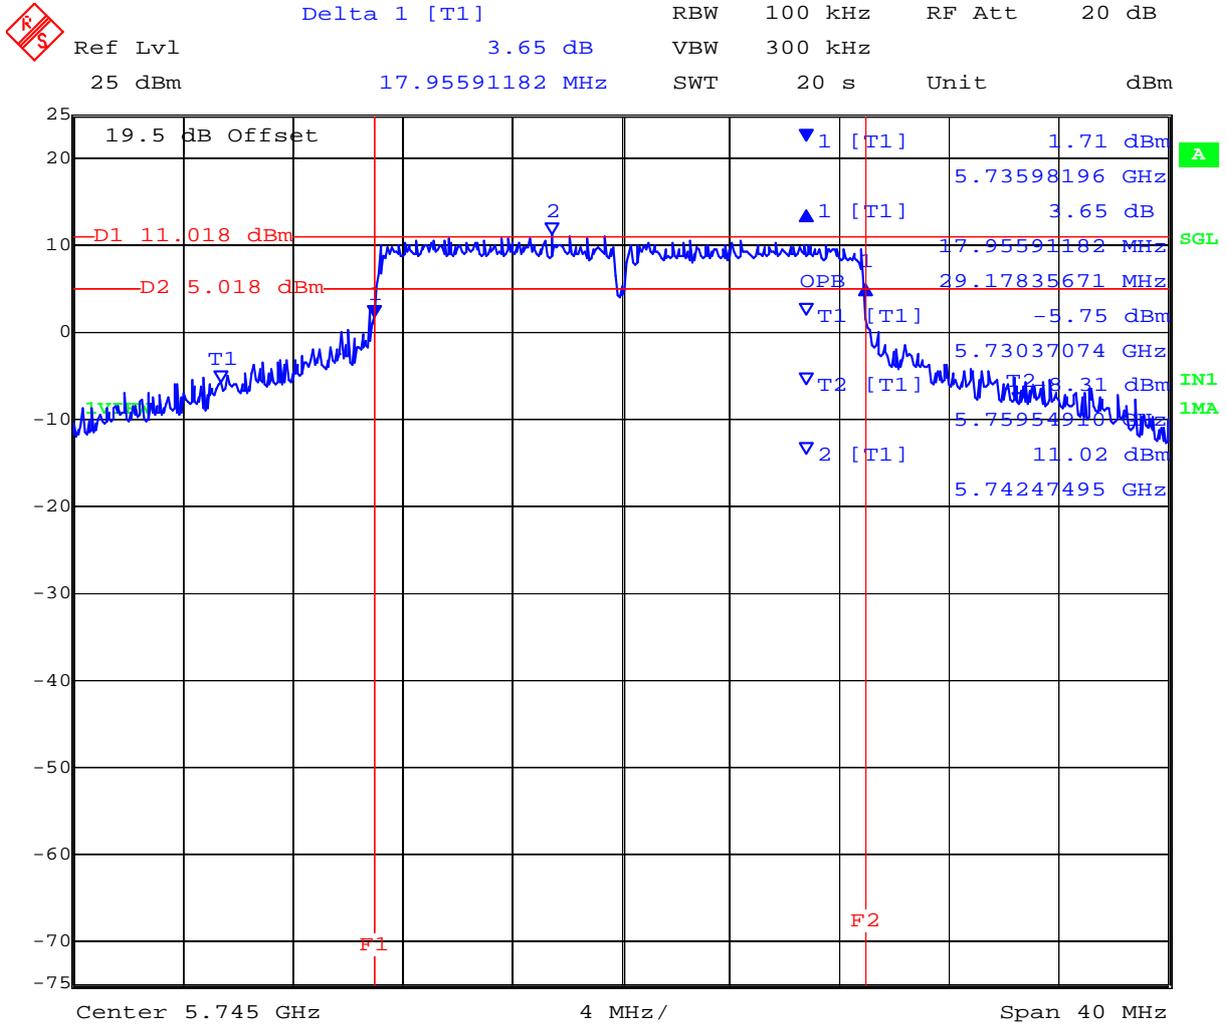


Date: 28.FEB.2012 13:38:24

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,785 MHz 802.11n HT-20 6 dB and 99% Bandwidth

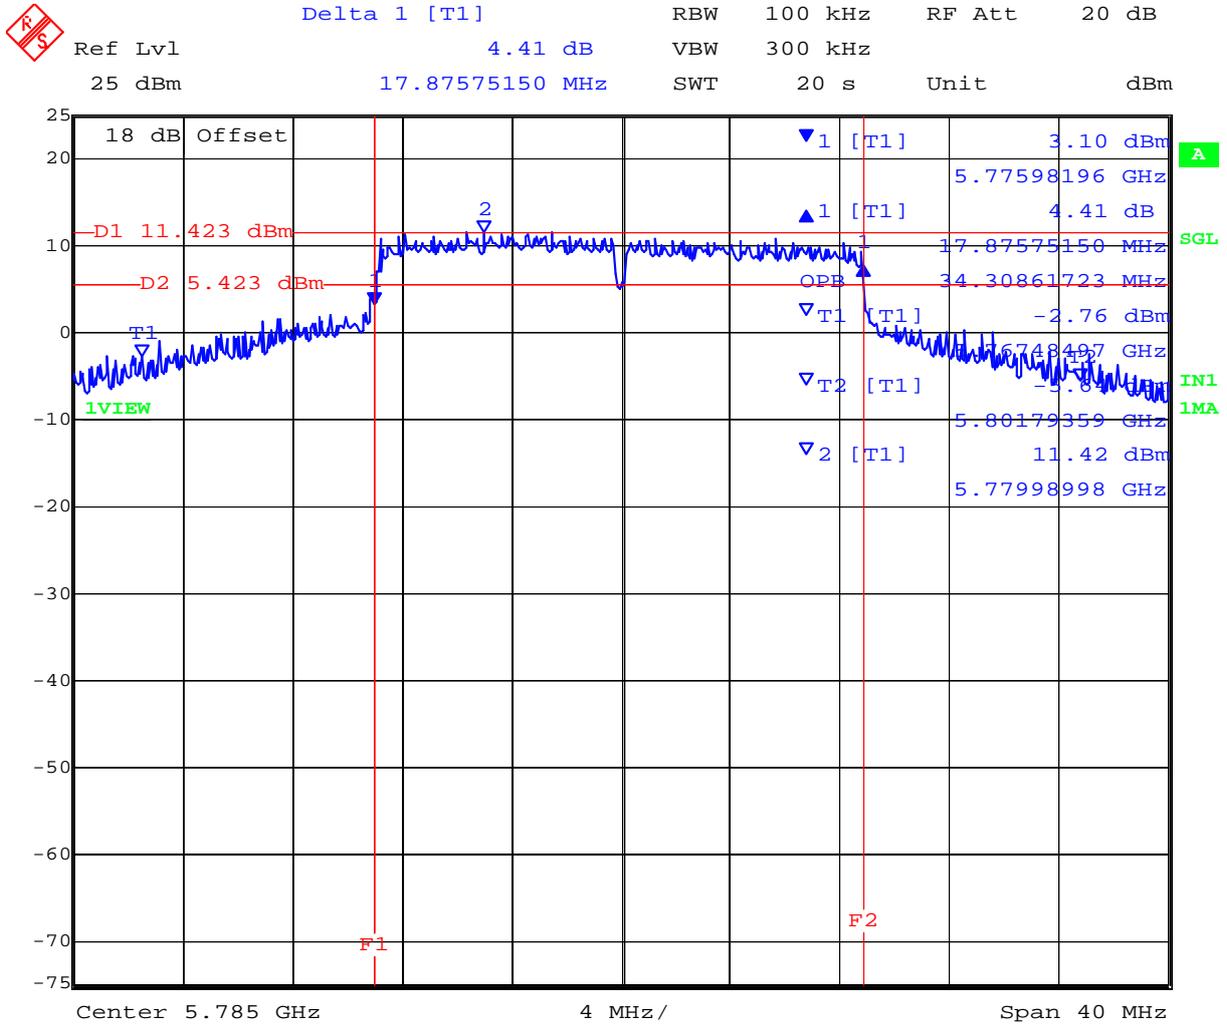


Date: 28.FEB.2012 14:10:57

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 5,785 MHz 802.11n HT-20 6 dB and 99% Bandwidth

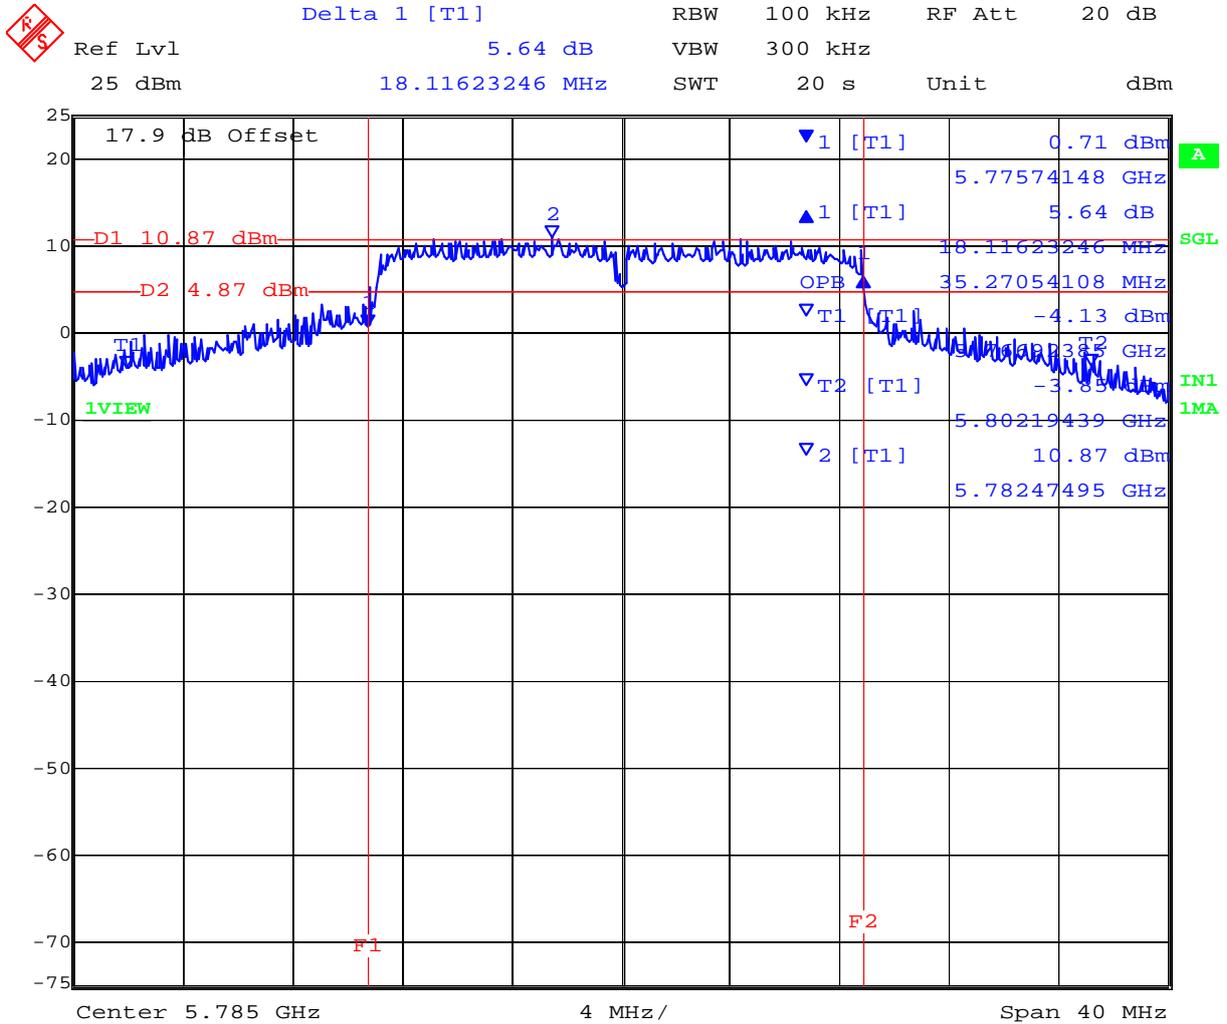


Date: 28.FEB.2012 14:12:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,785 MHz 802.11n HT-20 6 dB and 99% Bandwidth

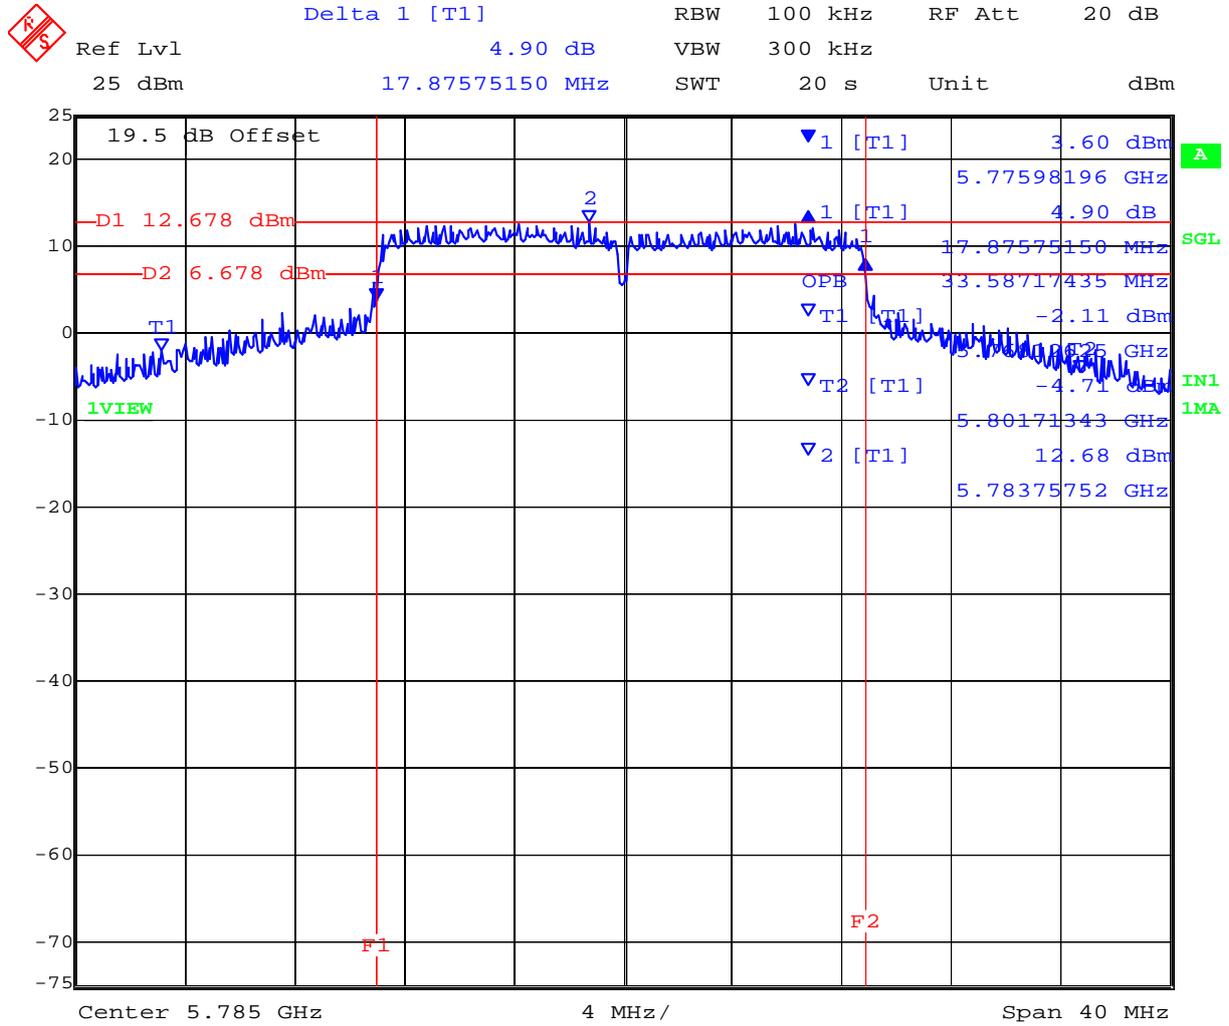


Date: 28.FEB.2012 14:13:10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,825 MHz 802.11n HT-20 6 dB and 99% Bandwidth

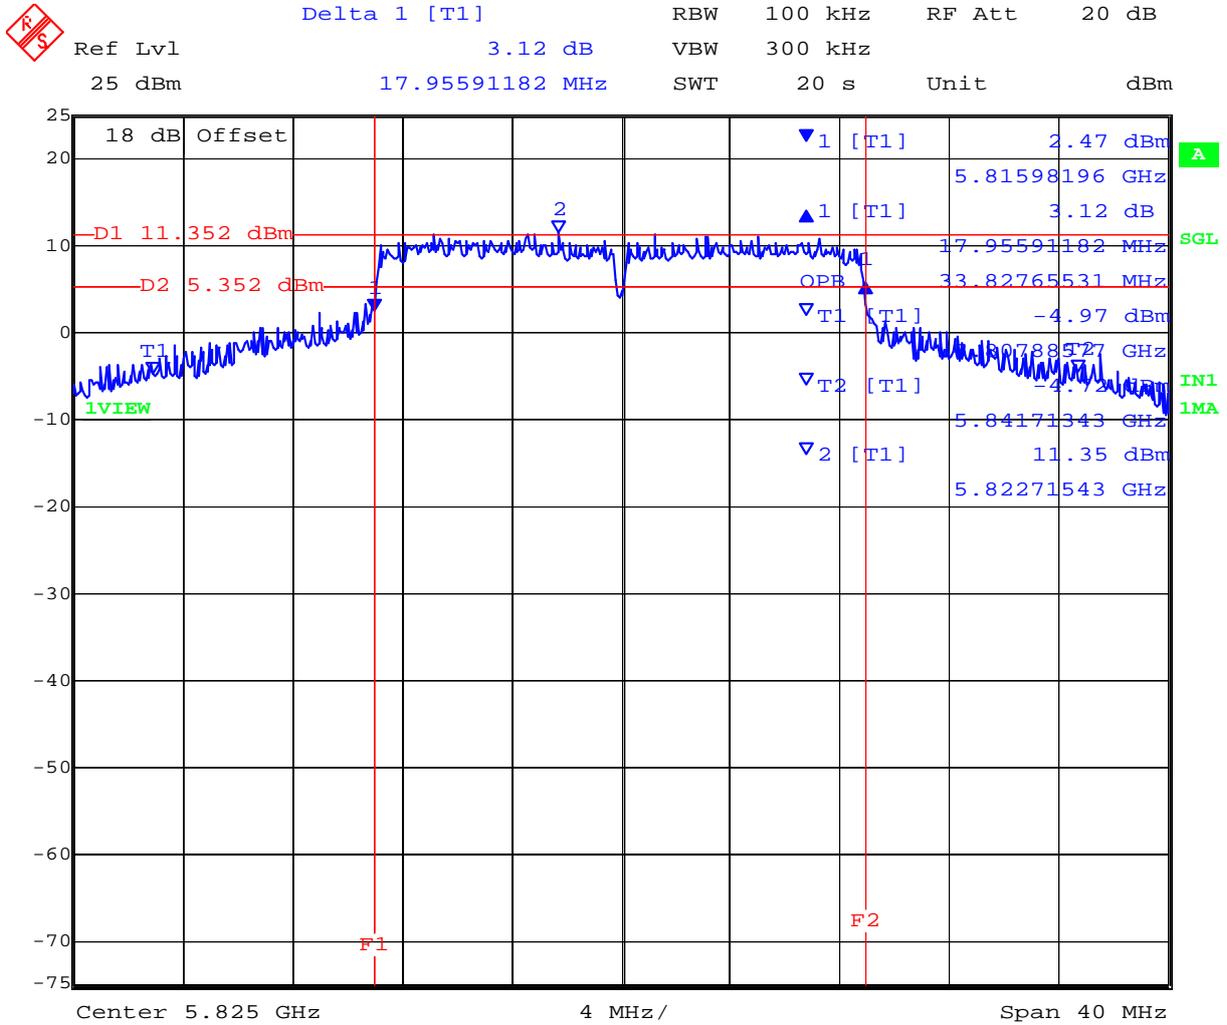


Date: 28.FEB.2012 14:48:07

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 5,825 MHz 802.11n HT-20 6 dB and 99% Bandwidth

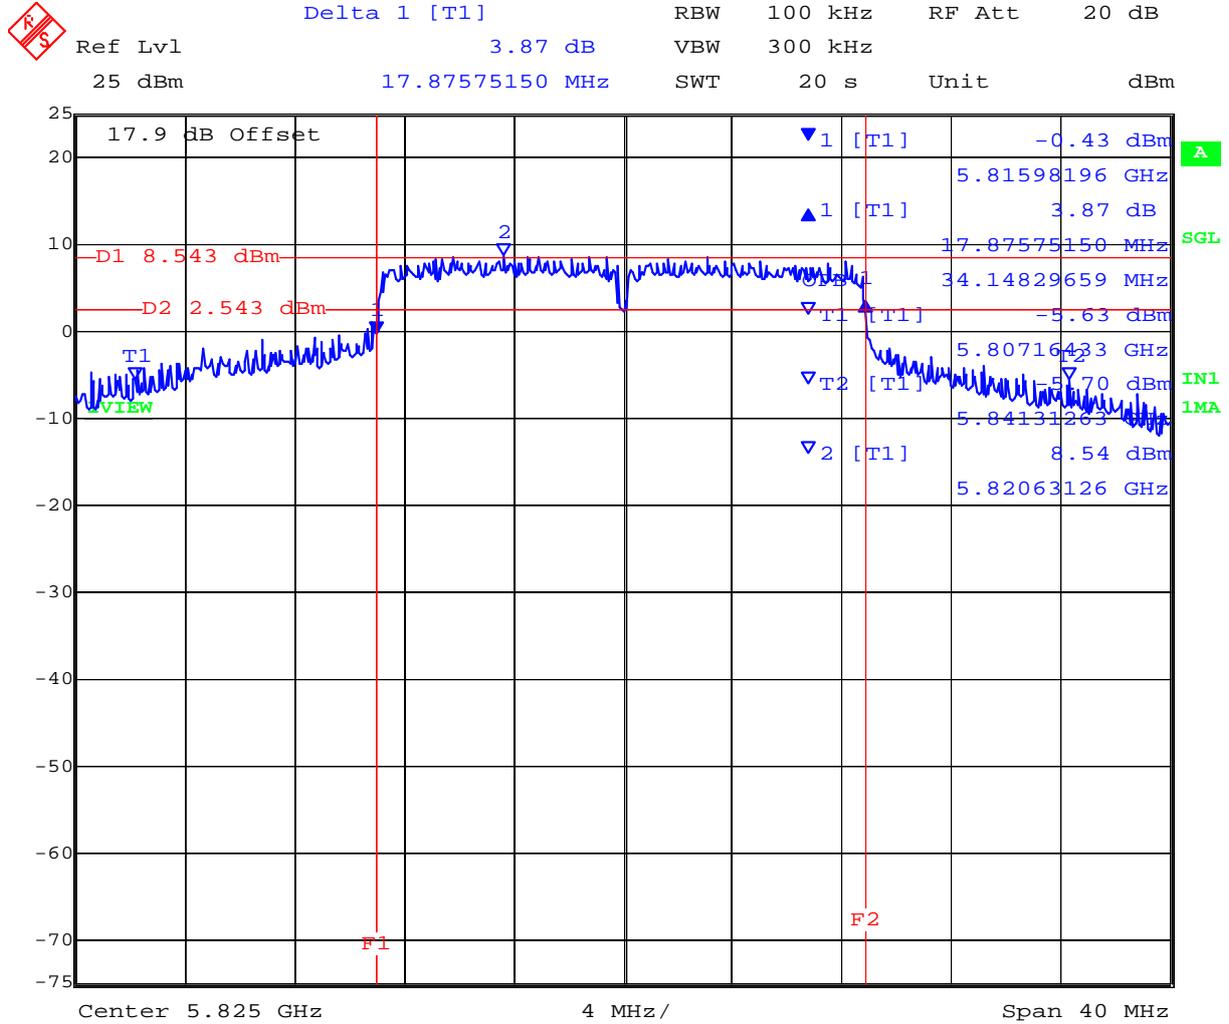


Date: 28.FEB.2012 14:49:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,825 MHz 802.11n HT-20 6 dB and 99% Bandwidth

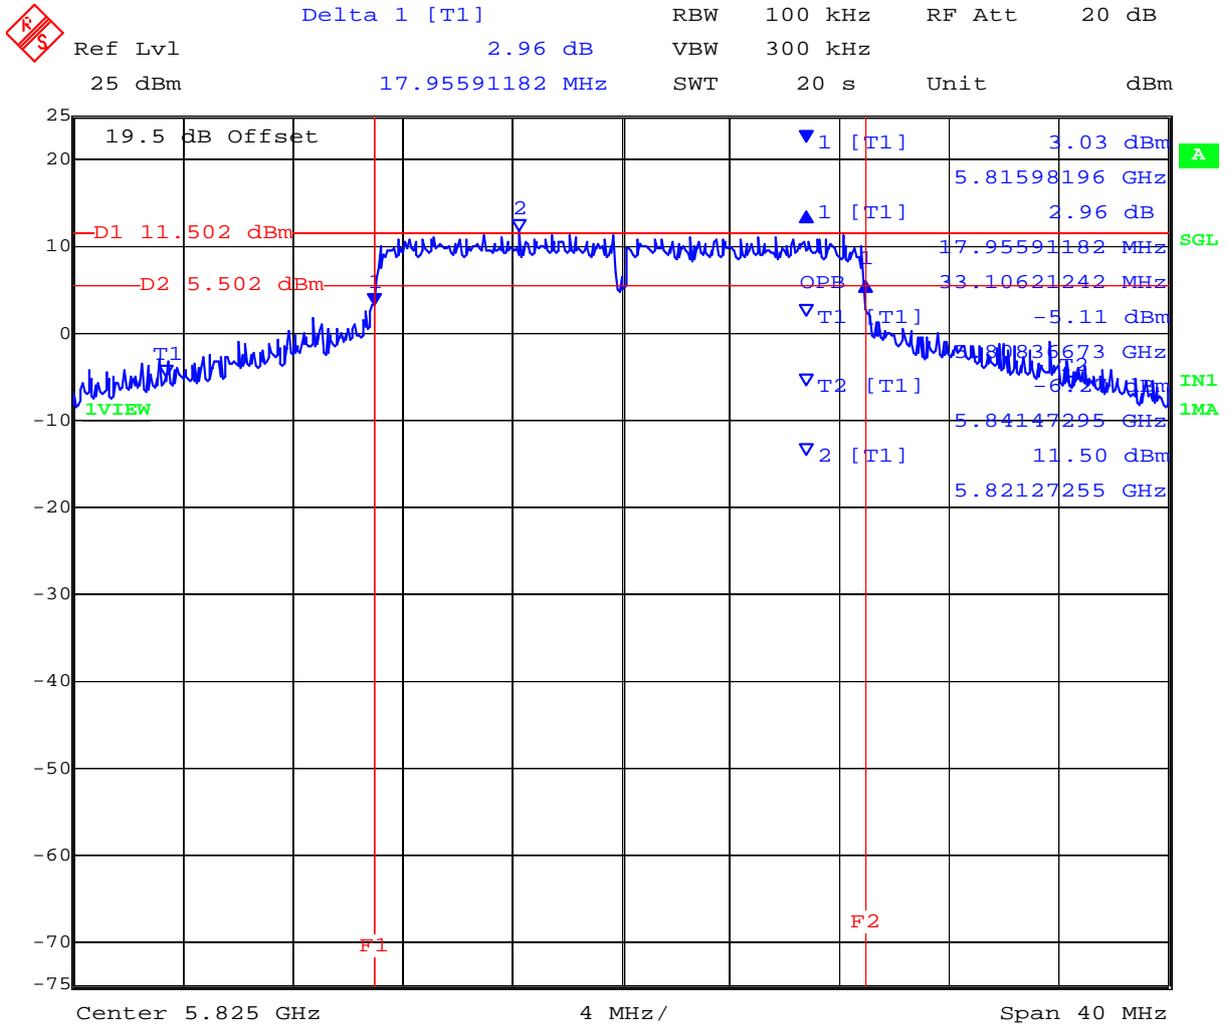

Date: 28.FEB.2012 14:50:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 83 of 331

TABLE OF RESULTS – 802.11n - HT-40

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	0 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz				kHz	MHz	
MHz	a	b	c	d			
5755.000	36.713000	36.713000	36.713000	--	500	0.5	-36.213000
5795.000	36.713000	36.713000	36.713000	--			-36.213000

99% Bandwidth


Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5755.000	39.599000	54.830000	42.966000	--			
5795.000	69.098000	69.900000	67.976000	--			

Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORTA 5,755 MHz 802.11n HT-40 6 dB and 99% Bandwidth

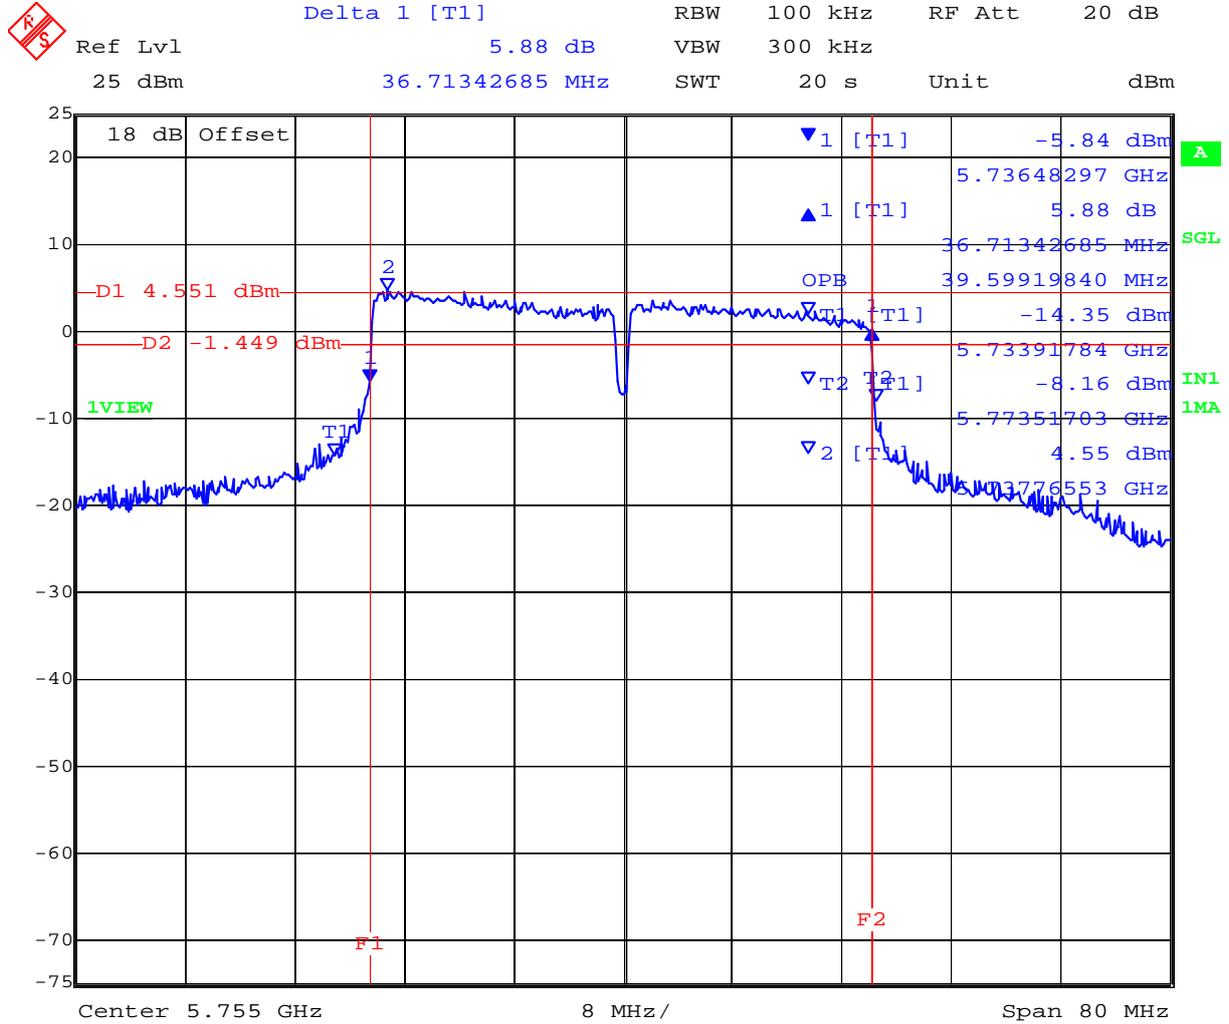


Date: 28.FEB.2012 15:43:48

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORTB 5,755 MHz 802.11n HT-40 6 dB and 99% Bandwidth

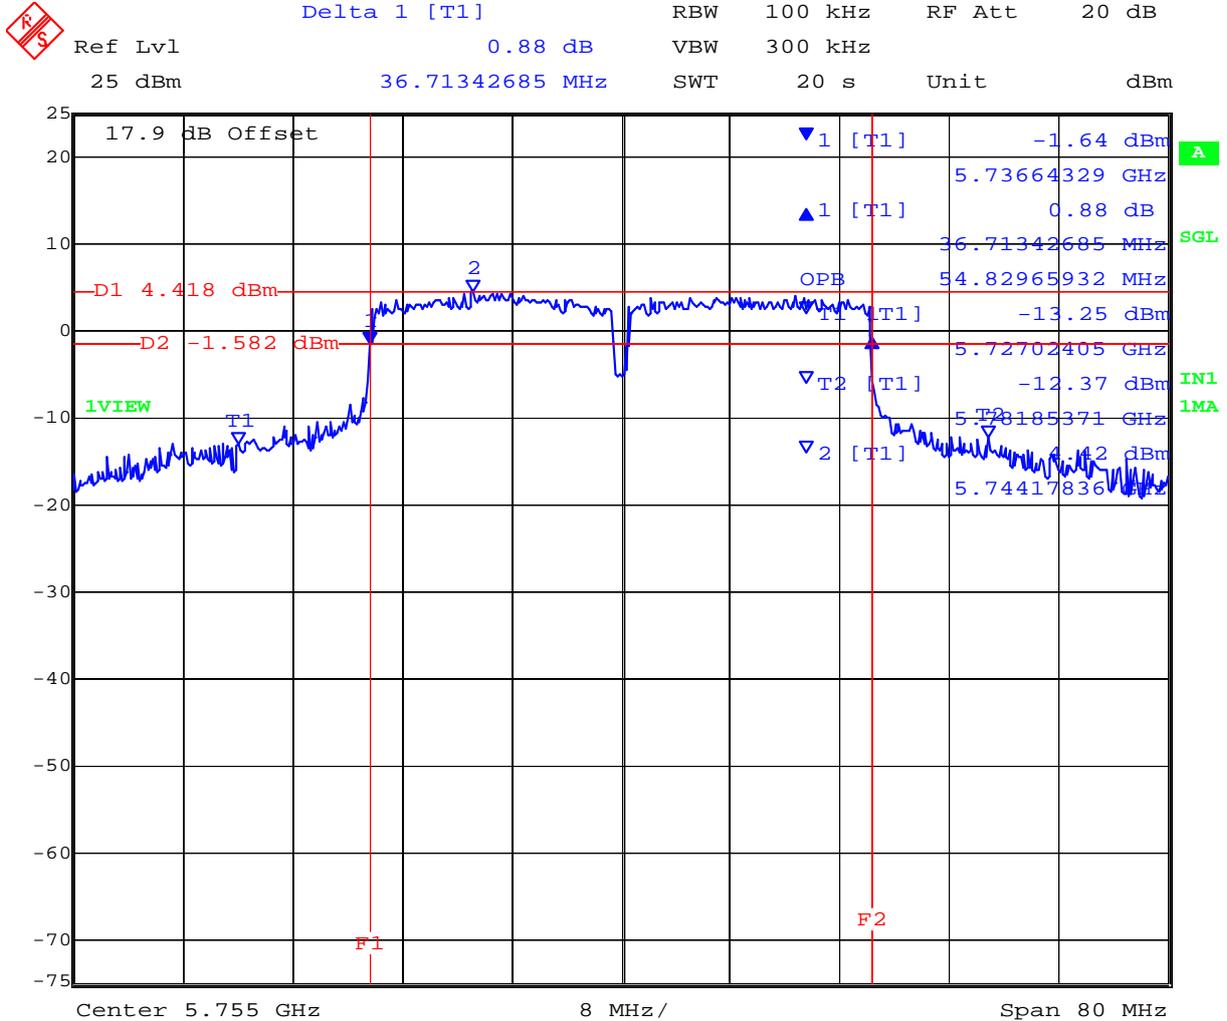


Date: 28.FEB.2012 15:44:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,755 MHz 802.11n HT-40 6 dB and 99% Bandwidth

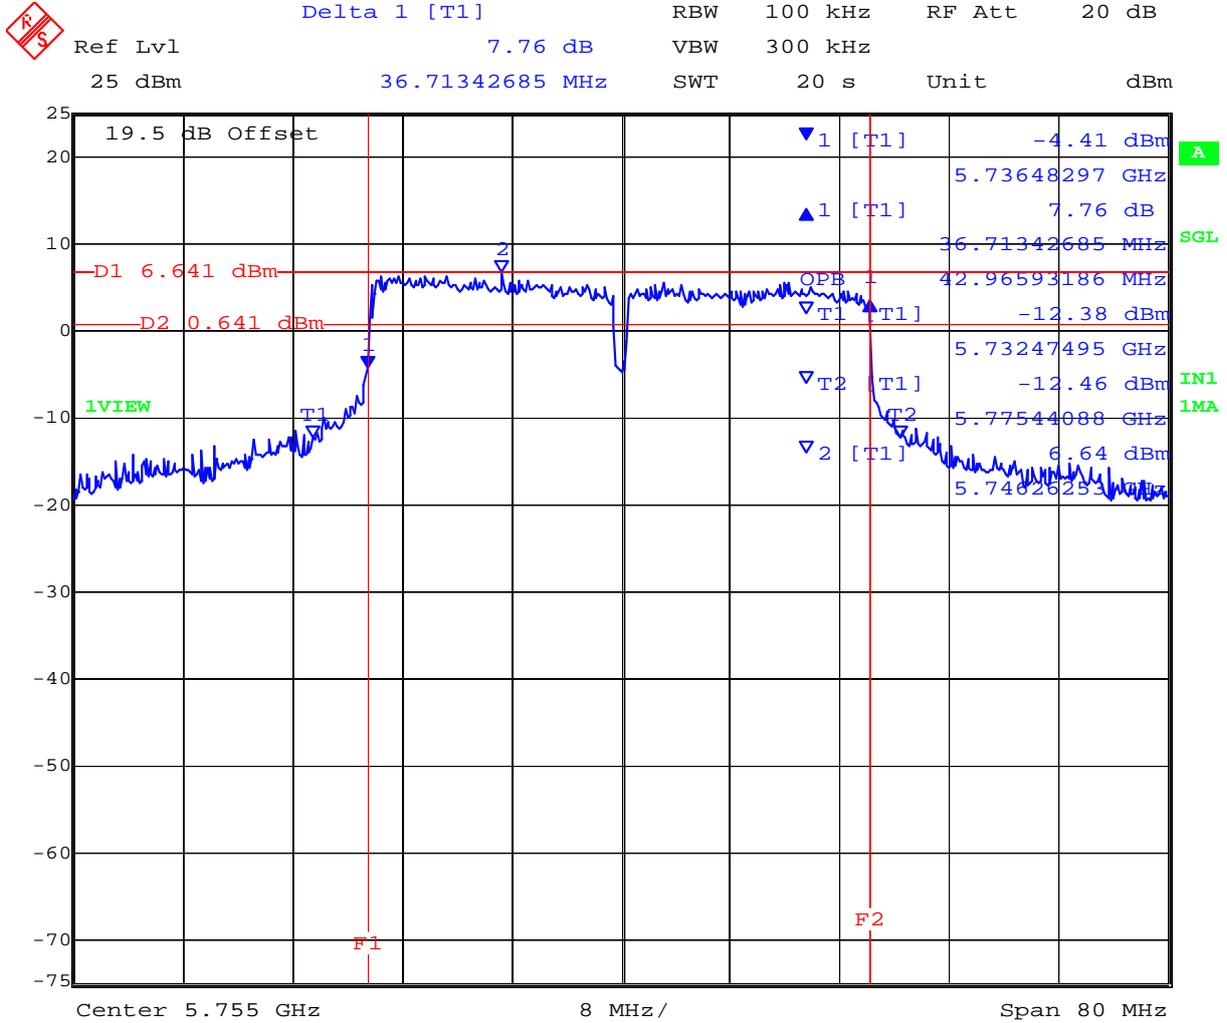

Date: 28.FEB.2012 15:45:58


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,795 MHz 802.11n HT-40 6 dB and 99% Bandwidth



Delta 1 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl 4.00 dB VBW 300 kHz
 25 dBm 36.71342685 MHz SWT 20 s Unit dBm

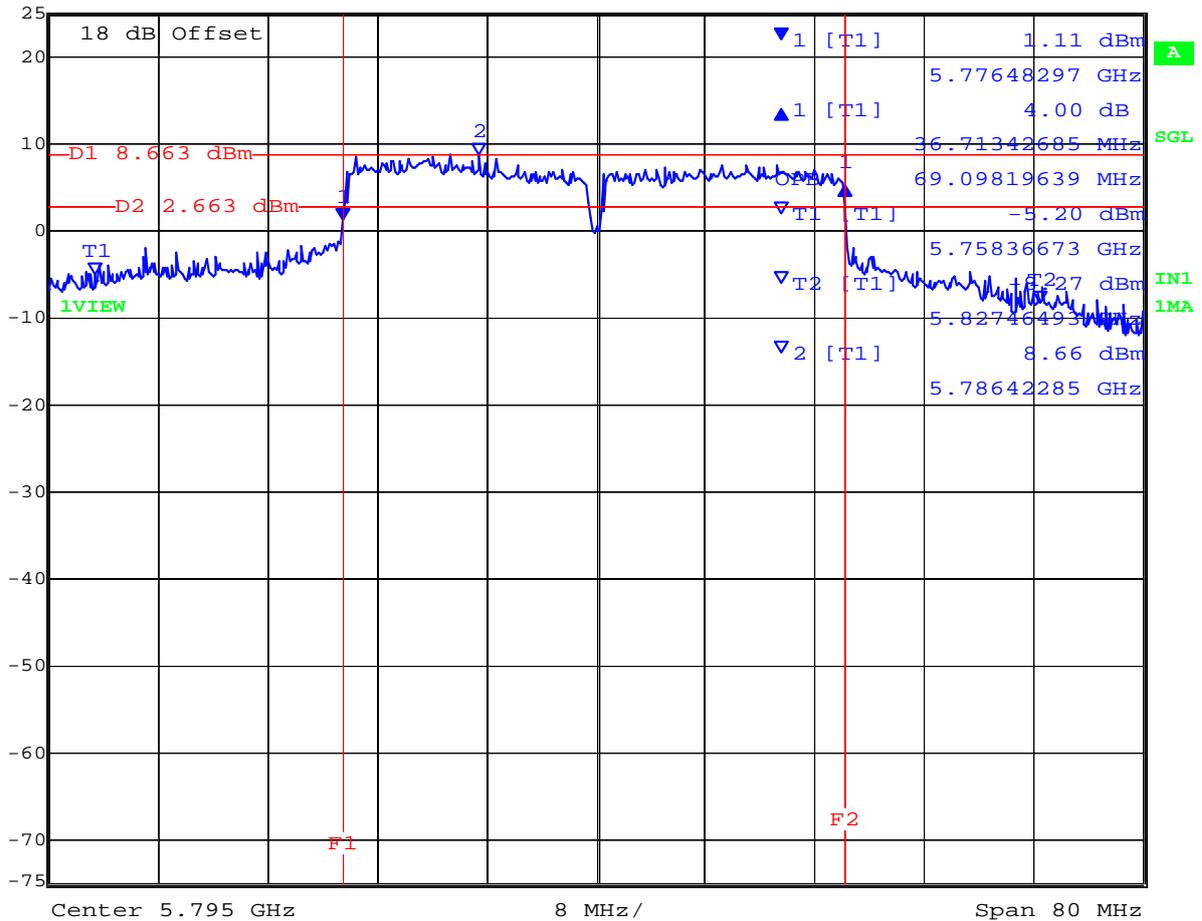


Date: 28.FEB.2012 16:17:03

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 5,795 MHz 802.11n HT-40 6 dB and 99% Bandwidth

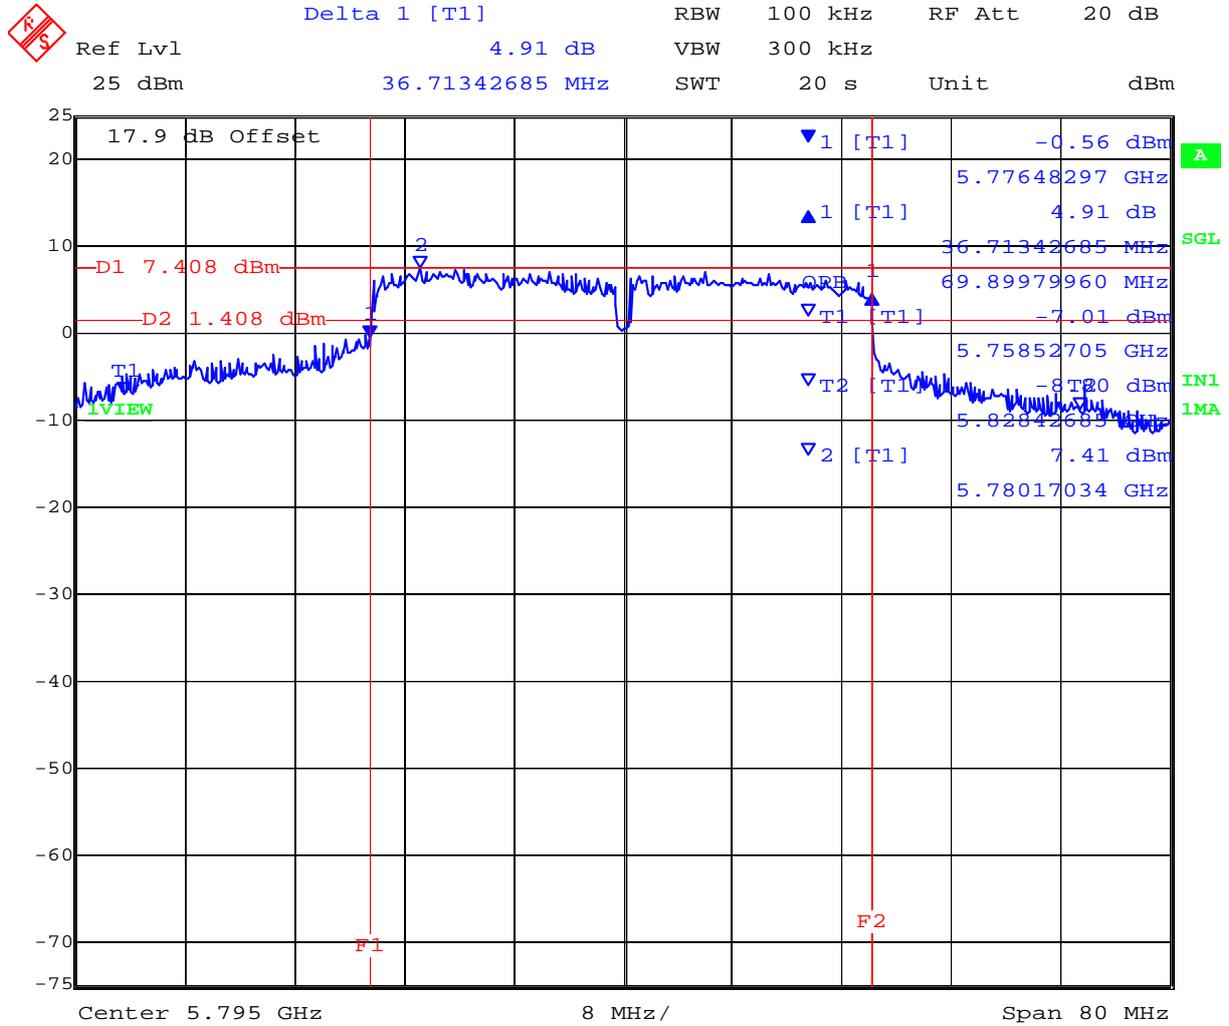


Date: 28.FEB.2012 16:18:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,795 MHz 802.11n HT-40 6 dB and 99% Bandwidth

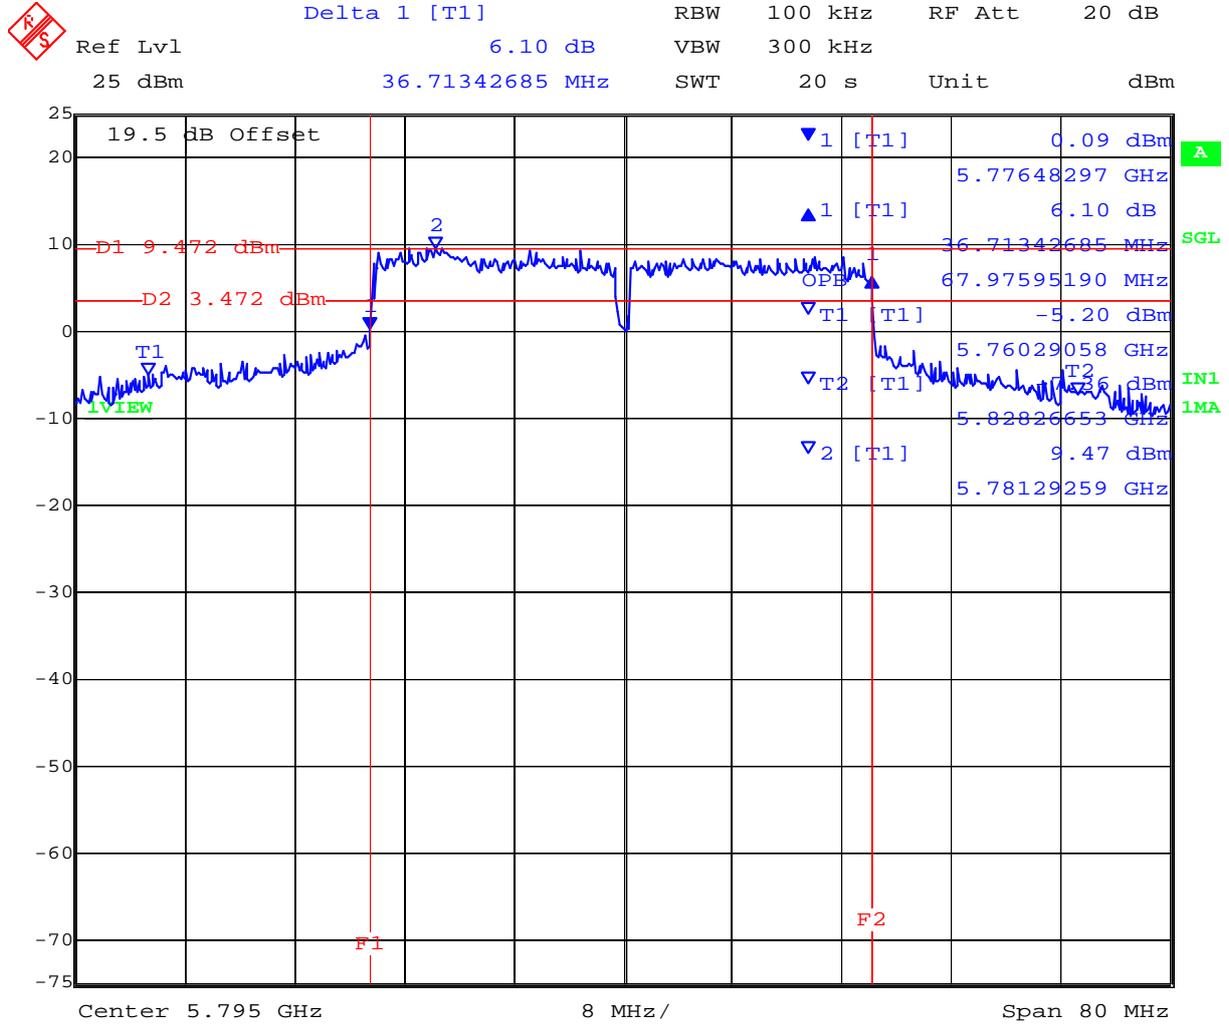

Date: 28.FEB.2012 16:19:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 90 of 331

Specification

Limits

§15.247 (a)(2) & RSS-210 §A8.2(1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

§ IC RSS-Gen 4.4.1 Occupied Bandwidth When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

§ IC RSS-Gen 4.4.2 6 dB Bandwidth Where indicated, the 6 dB bandwidth is measured at the points when the spectral density of the signal is 6 dB down from the in-band spectral density of the modulated signal, with the transmitter modulated by a representative signal.

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	±2.81 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.2. Peak Output Power

FCC, Part 15 Subpart C §15.247(b)(3), §15.31(e)
Industry Canada RSS-210 §A8.4(4)

Test Procedure

The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure peak power. The resolution filter bandwidth was set to 6 dB, peak detector selected and the analyzer built-in power function was used to measure peak power over the 99 % bandwidth.

Test Measurement Set up

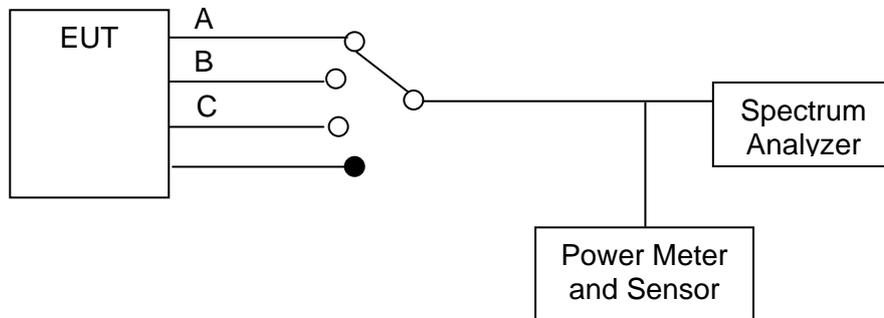

Measurement set up for Transmitter Peak Output Power

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power

EIRP Calculated Power = $A + G + 10 \log (1/x)$ dBm

A = Total Power [$10 \log_{10} (10^{a/10} + 10^{b/10} + 10^{c/10})$], G = Antenna Gain,
x = Duty Cycle

NOTE: KDB 662911 was implemented for In-band power measurements. The measure and sum technique was implemented in all cases.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 92 of 331

5.1.2.1. Limits Peak Output Power

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(3) For systems using digital modulation in the 2400–2483.5 MHz, and band: 1 Watt. As an alternative to a peak power measurement, compliance with the 1 Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the *maximum conducted output power* is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c), if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (b)(3)(i) of this section, excludes the use of point-to-multipoint systems, omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 93 of 331

(ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (c)(1)(i) of this section, excludes the use of point-to-multipoint systems, omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient evidence is presented, e.g., due to shading of the array or coherence loss in the beam-forming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 94 of 331

WBSn-2450 - 802.11a/b/g/n Wireless Access Point, 3x3 Spatial Multiplexing MIMO configuration

2.4 GHz Operation

Antenna	Gain (dBi)	Maximum Total Conducted Peak Power (dBm)	
		Total	Per Chain
OMNI	7.4	+28.0	+23.23
SECTOR	12.0	+26.4	+21.63

Per chain value = Maximum Total Conducted Peak Power – 4.77 dB

5.8 GHz Operation

Antenna	Gain (dBi)	Maximum Total Conducted Peak Power (dBm)	
		Total	Per Chain
OMNI	8.5	+30.0	+25.23
SECTOR	14.0	+30.0	+25.23

Per chain value = Maximum Total Conducted Peak Power – 4.77 dB

Power Reduction Required

It was found that power reduction was required on some operational modes. The following matrix takes this criteria into consideration and reports both individual chain power and total summed power for the reduced levels where required.

Output power measurements were performed on the OMNI (N-Type connector) device. Assumption: both the OMNI and SECTOR (integral antenna) power settings were identical.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.2.2. 2.4 GHz 802.11b

**TABLE OF RESULTS – 802.11b – Legacy
OMNI ANTENNA MEASUREMENT RESULTS**

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11b	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	7.4 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2412	21.68	21.44	21.59	--	N/A	26.34	28.00	-1.66
2437	22.01	21.55	21.45	--	N/A	26.45	28.00	-1.55
2462	21.24	21.40	21.27	--	N/A	26.08	28.00	-1.92

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

SECTOR ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11b	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	12 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2412	19.71	20.17	19.11	--	N/A	24.46	26.40	-1.94
2437	21.04	21.23	20.53	--	N/A	25.71	26.40	-0.69
2462	20.60	21.43	20.69	--	N/A	25.69	26.40	-0.71

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.2.3. 2.4 GHz 802.11g

TABLE OF RESULTS – 802.11g – Legacy OMNI ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11g	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	7.4 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2412	20.85	20.95	20.83	--	N/A	25.65	28.00	-2.35
2437	20.97	20.94	21.53	--	N/A	25.93	28.00	-2.07
2462	20.73	20.98	21.03	--	N/A	25.69	28.00	-2.31

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

SECTOR ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11g	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	12 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2412	20.84	21.14	20.68	--	N/A	25.66	26.40	-0.74
2437	21.23	21.16	20.70	--	N/A	25.81	26.40	-0.59
2462	21.01	21.13	20.96	--	N/A	25.81	26.40	-0.59

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.2.4. 2.4 GHz 802.11n HT-20

TABLE OF RESULTS – 802.11n – HT-20
OMNI ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	7.4 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2412	20.82	20.95	20.55	--	N/A	25.55	28.00	-2.45
2437	21.17	20.94	21.21	--	N/A	25.88	28.00	-2.12
2462	21.08	21.74	21.36	--	N/A	26.17	28.00	-1.83

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

SECTOR ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	12 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2412	20.81	21.16	20.55	--	N/A	25.62	26.40	-0.78
2437	21.21	20.95	20.64	--	N/A	25.71	26.40	-0.69
2462	20.11	20.48	20.12	--	N/A	25.01	26.40	-1.39

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.2.5. 2.4 GHz 802.11n HT-40

TABLE OF RESULTS – 802.11n – HT-40 OMNI ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	7.4 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2422	22.18	21.86	22.16	--	N/A	26.84	28.00	-1.16
2437	21.74	21.75	21.27	--	N/A	26.36	28.00	-1.64
2452	21.10	20.87	21.00	--	N/A	25.76	28.00	-2.24

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

SECTOR ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	12 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
2422	21.51	20.78	21.22	--	N/A	25.95	26.40	-0.45
2437	21.45	21.04	21.11	--	N/A	25.97	26.40	-0.43
2452	20.64	20.93	20.36	--	N/A	25.42	26.40	-0.98

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.2.6. 5.8 GHz 802.11a

**TABLE OF RESULTS – 802.11a – Legacy
OMNI ANTENNA MEASUREMENT RESULTS**

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	8.5 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5745	21.77	21.24	23.16	--	N/A	26.91	30.00	-3.09
5785	22.94	22.30	24.20	--	N/A	27.99	30.00	-2.01
5825	23.17	20.64	23.61	--	N/A	27.43	30.00	-2.57

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

SECTOR ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	14 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5745	21.34	21.10	23.24	--	N/A	26.77	30.00	-3.23
5785	22.29	21.93	23.69	--	N/A	27.48	30.00	-2.52
5825	22.48	20.16	23.19	--	N/A	26.89	30.00	-3.11

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.2.7. 5.8 GHz 802.11n HT-20

TABLE OF RESULTS – 802.11n – HT-20 OMNI ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	8.5 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5745	20.70	20.30	22.15	--	N/A	25.90	30.00	-4.10
5785	22.89	22.21	24.14	--	N/A	27.93	30.00	-2.07
5825	22.95	20.30	23.20	--	N/A	27.10	30.00	-2.90

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

SECTOR ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	14 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5745	20.70	20.30	22.15	--	N/A	25.90	30.00	-4.10
5785	22.15	22.11	23.57	--	N/A	27.44	30.00	-2.56
5825	22.37	20.36	22.71	--	N/A	26.70	30.00	-3.30

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.2.8. 5.8 GHz 802.11n HT-40

**TABLE OF RESULTS – 802.11n – HT-40
OMNI ANTENNA MEASUREMENT RESULTS**

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	8.5 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5755	17.70	18.57	19.57	--	N/A	23.45	30.00	-6.55
5795	22.97	21.91	23.97	--	N/A	27.80	30.00	-2.20

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

SECTOR ANTENNA MEASUREMENT RESULTS

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	14 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)				Combined	Calculated		
MHz	a	b	c	d				
5755	17.70	18.57	19.57	--	N/A	23.45	30.00	-6.55
5795	22.42	21.76	23.69	--	N/A	27.47	30.00	-2.53

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 102 of 331

Specification

Limits

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1.0 watt.

15.247 (b) (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.247 (c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

§15.31 (e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

§ RSS-210 A8.4(4) For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands the maximum peak conducted power shall not exceed 1 watt.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 103 of 331

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	± 1.33 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.3. Peak Power Spectral Density

FCC, Part 15 Subpart C §15.247(e)
Industry Canada RSS-210 §A8.2

Test Procedure

The transmitter output was connected to a spectrum analyzer and the maximum level in a 3 kHz bandwidth was measured. A peak value was found over the full emission bandwidth and the frequency span reduced to obtain enhanced resolution. Sweep time \geq span / 3 kHz with video averaging turned off. The Peak Power Spectral Density is the highest level found across the emission in a 3 kHz resolution bandwidth.

Test Measurement Set up

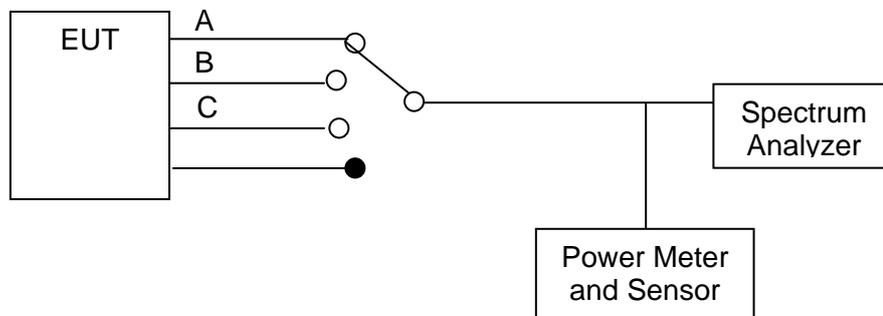

Measurement set up for Peak Power Spectral Density

Measurement Results for Peak Power Spectral Density

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power

NOTE: KDB 662911 was implemented for In-band power spectral density (PSD) measurements. Option (2) Measure and add 10 log (N) dB was implemented



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 105 of 331

Peak Power Spectral Density

TABLE OF RESULTS – 802.11b

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11b	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:			
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Σ Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2412	1.43	0.61	2.05	--	4.77	6.82	3.23	-1.18
2437	1.16	0.71	0.72	--	4.77	5.93	3.23	-2.07
2462	0.33	0.75	0.38	--	4.77	5.52	3.23	-2.48

Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------

NOTE: above margin is calculated from the highest Power Density returned from Chain A or B or C


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 106 of 331

PORT A 2,412 MHz 802.11b - Peak Power Spectral Density

 **Marker 1 [T1]** RBW 3 kHz RF Att 20 dB
Ref Lvl 1.43 dBm VBW 10 kHz
25 dBm 2.41366834 GHz SWT 350 s Unit dBm

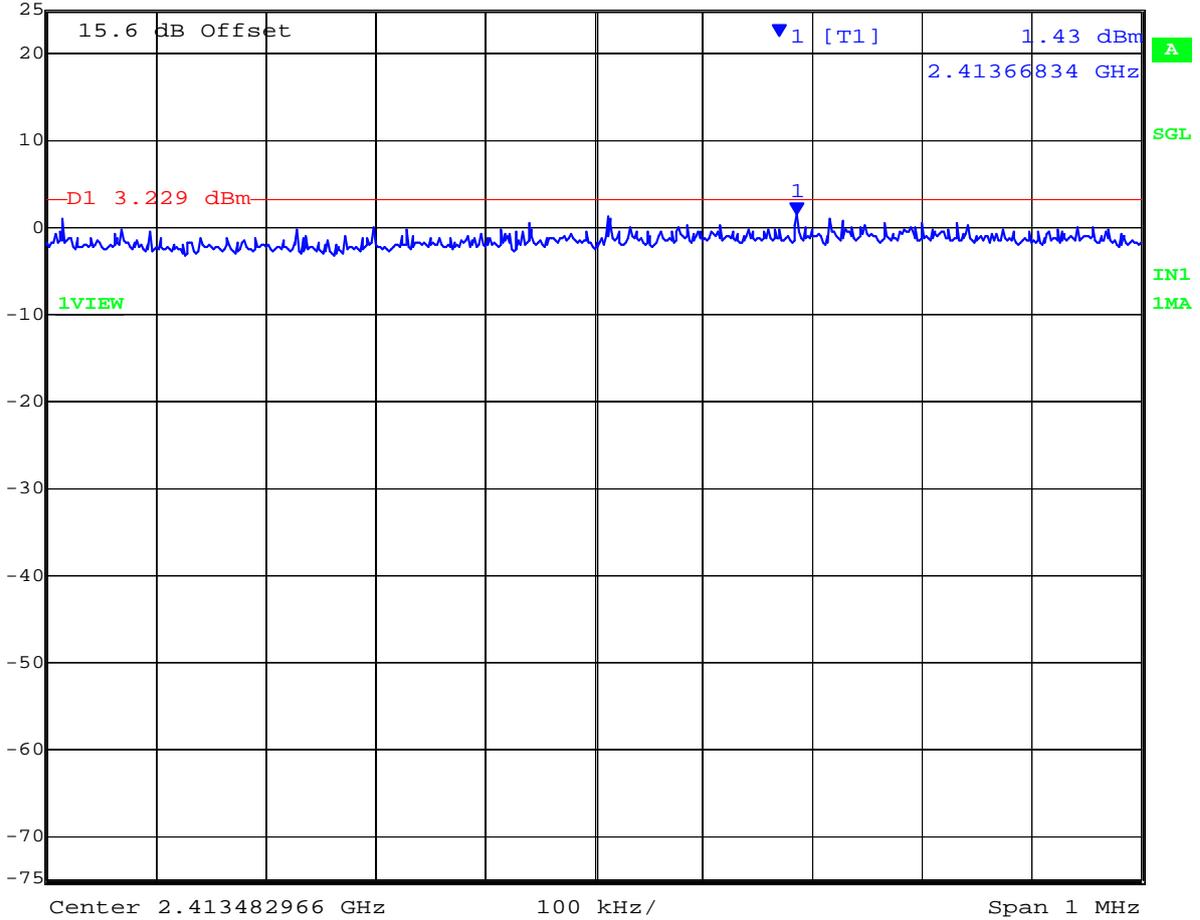

Date: 29.FEB.2012 18:55:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 107 of 331

PORT B 2,412 MHz 802.11b - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl 0.61 dBm VBW 10 kHz
25 dBm 2.41366834 GHz SWT 350 s Unit dBm

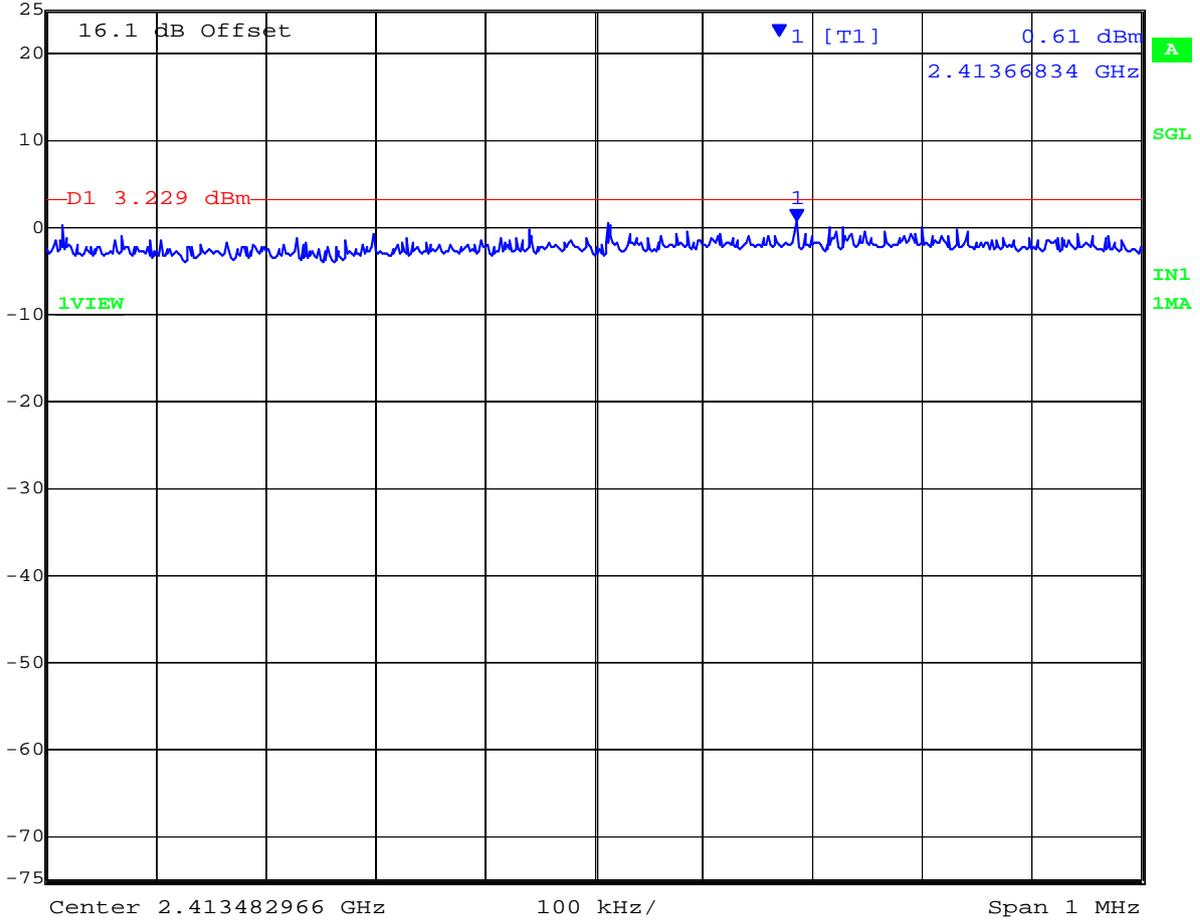

Date: 29.FEB.2012 19:01:37


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 108 of 331

PORT C 2,412 MHz 802.11b - Peak Power Spectral Density

 **Marker 1 [T1]** RBW 3 kHz RF Att 20 dB
Ref Lvl 2.05 dBm VBW 10 kHz
25 dBm 2.41399299 GHz SWT 350 s Unit dBm

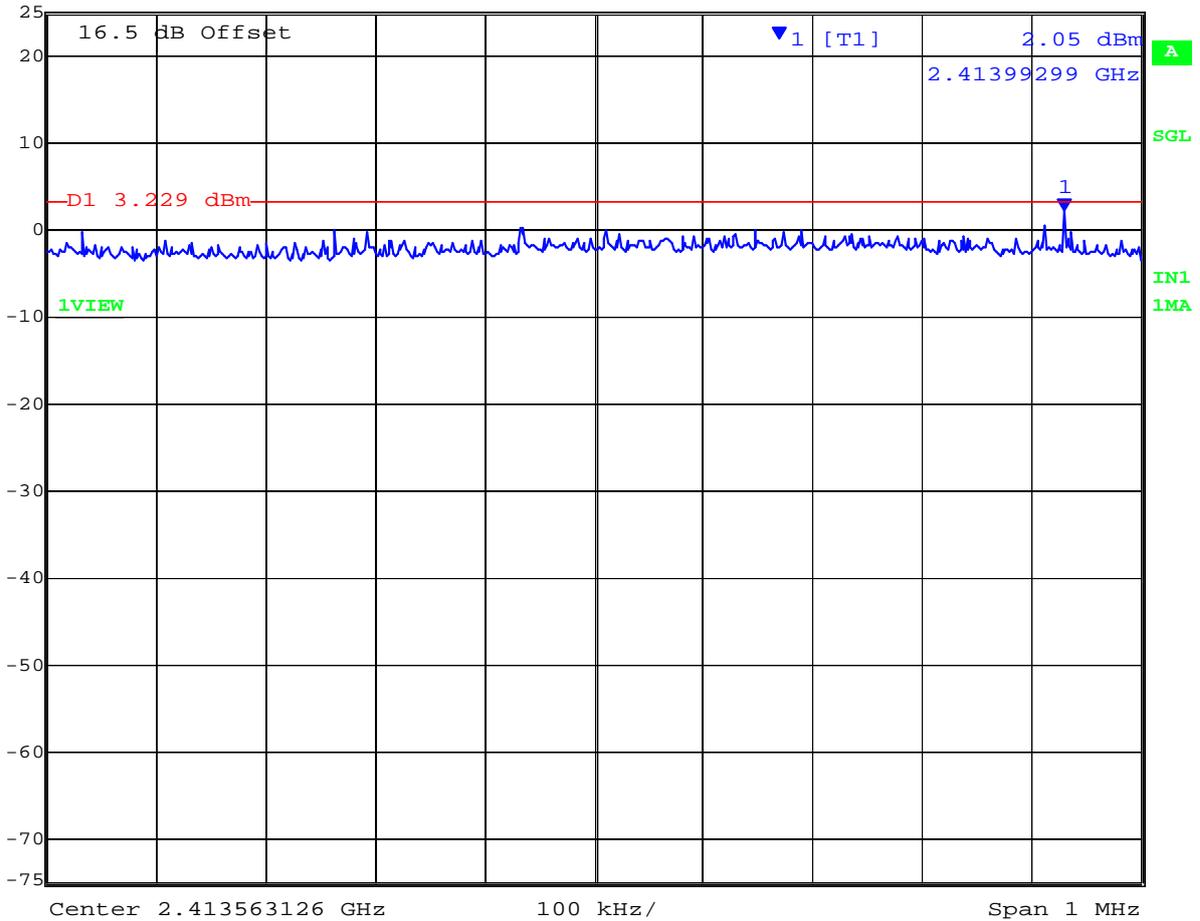


Date: 29.FEB.2012 19:08:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,437 MHz 802.11b - Peak Power Spectral Density

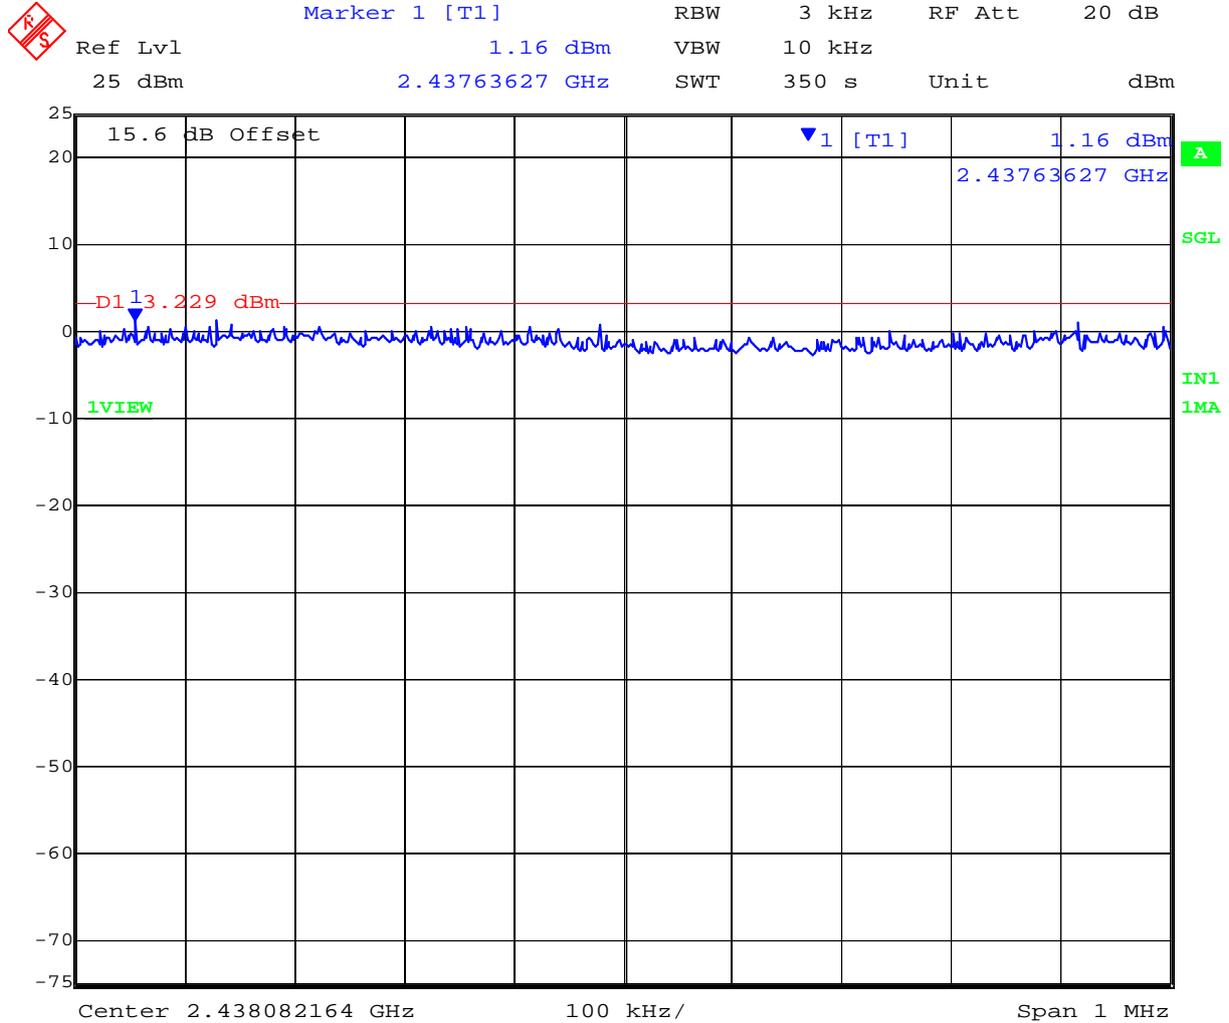


Date: 29.FEB.2012 13:45:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 110 of 331

PORT B 2,437 MHz 802.11b - Peak Power Spectral Density

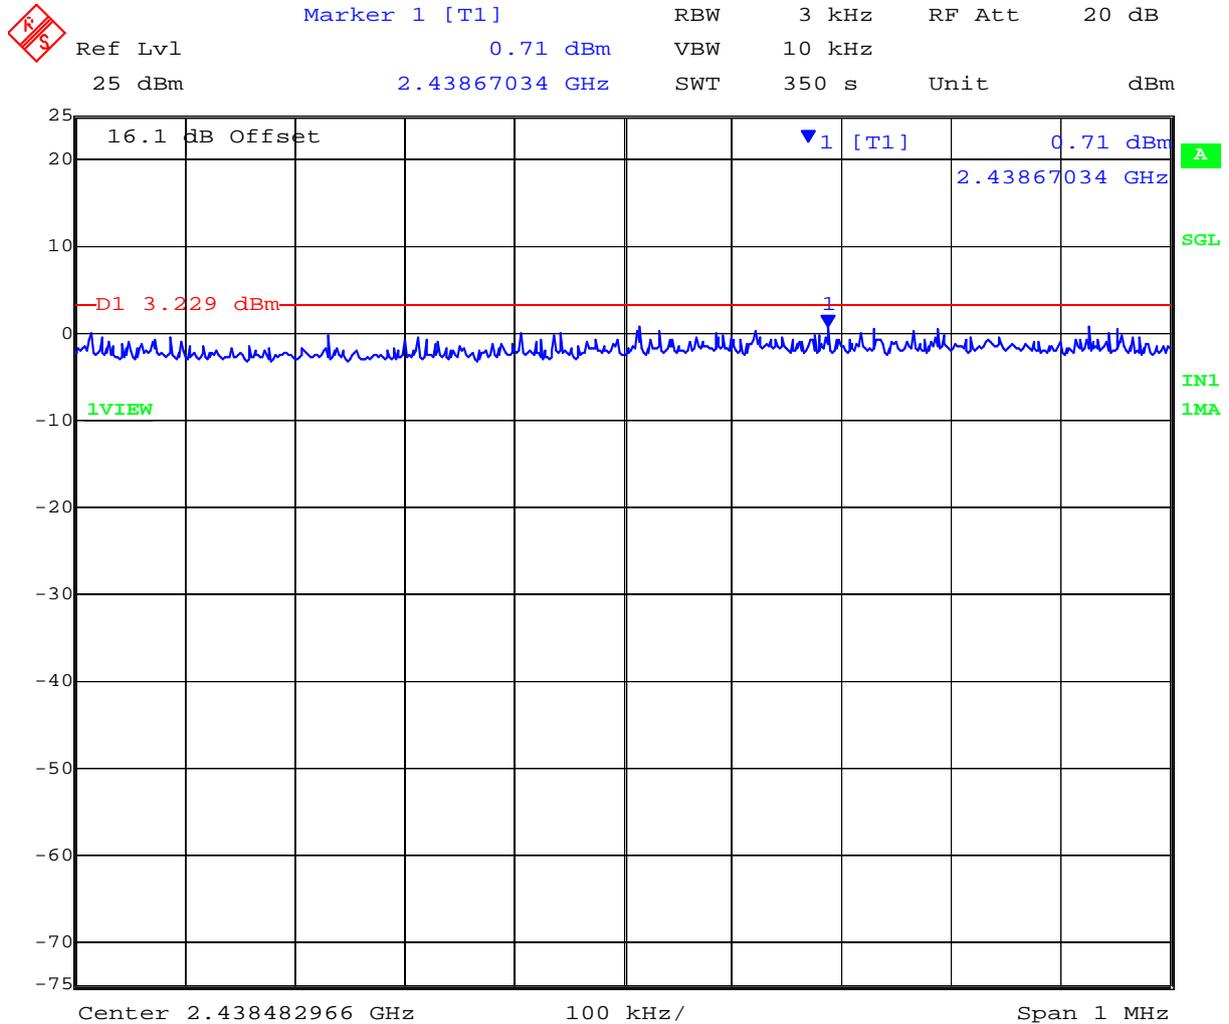


Date: 29.FEB.2012 13:51:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 111 of 331

PORT C 2,437 MHz 802.11b - Peak Power Spectral Density

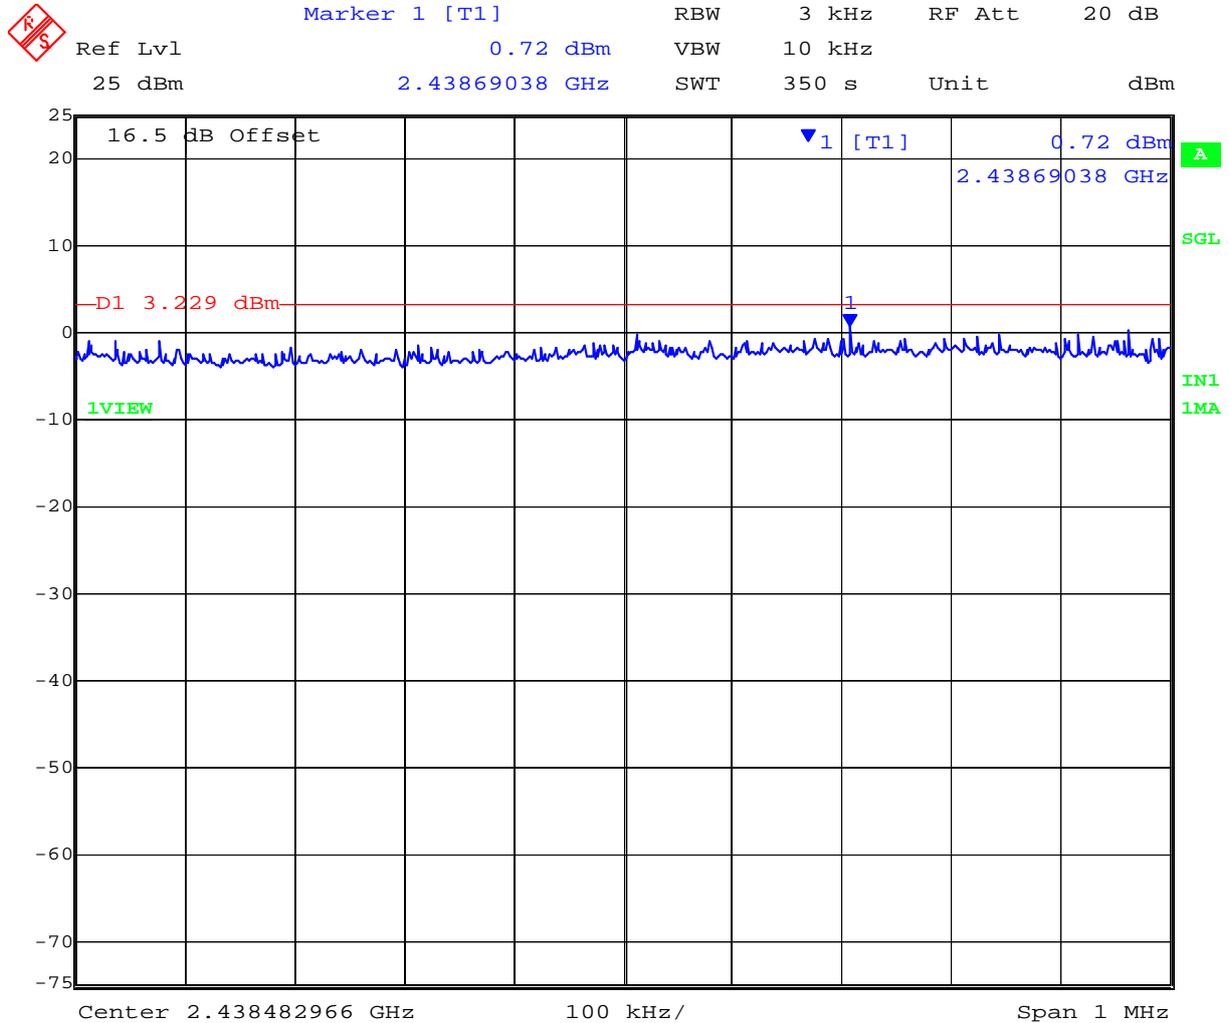


Date: 29.FEB.2012 13:58:02

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 112 of 331

PORT A 2,462 MHz 802.11b - Peak Power Spectral Density

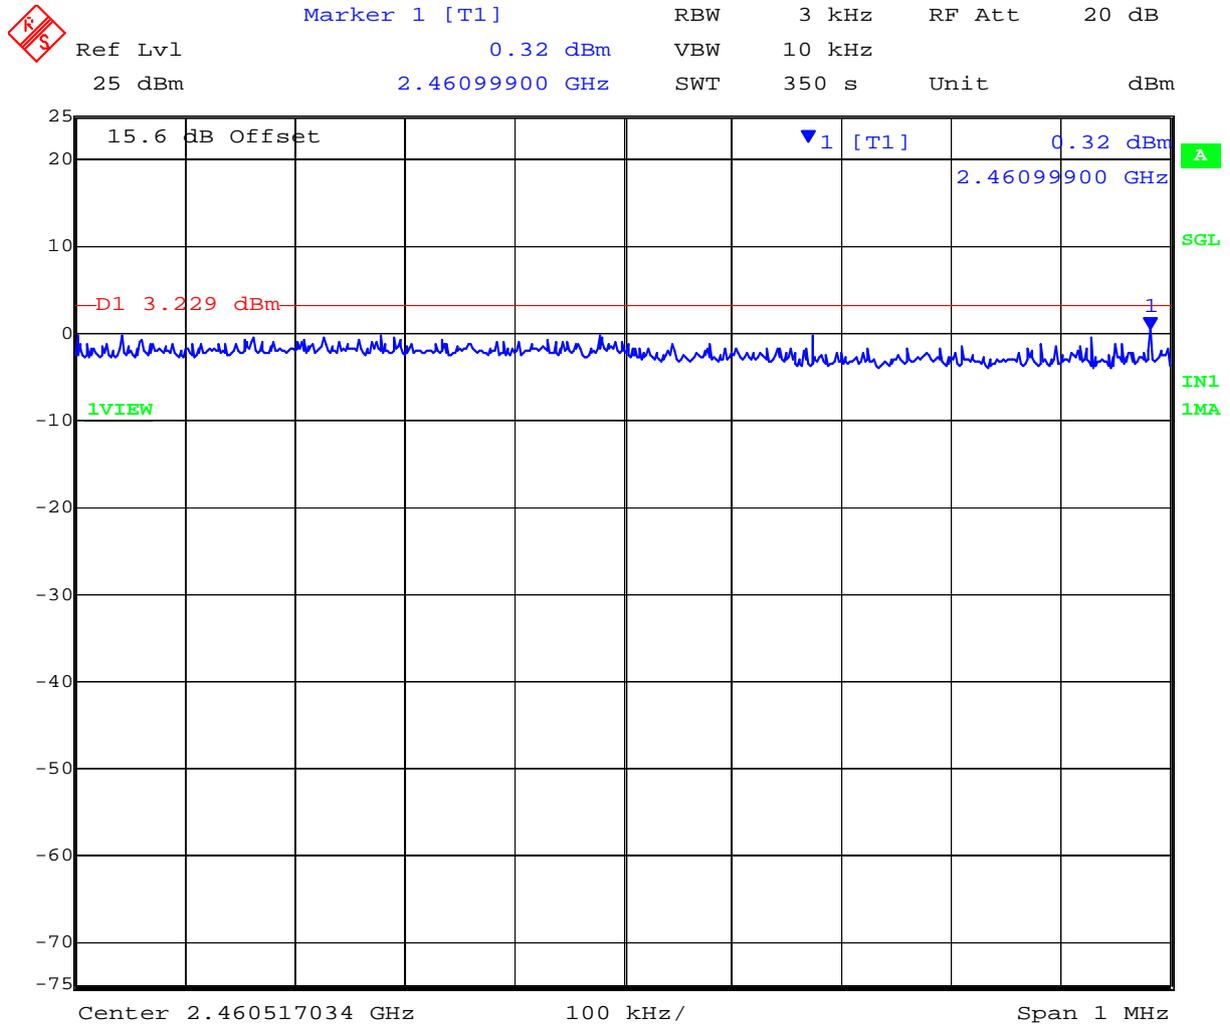


Date: 29.FEB.2012 19:15:47

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 113 of 331

PORT B 2,462 MHz 802.11b - Peak Power Spectral Density

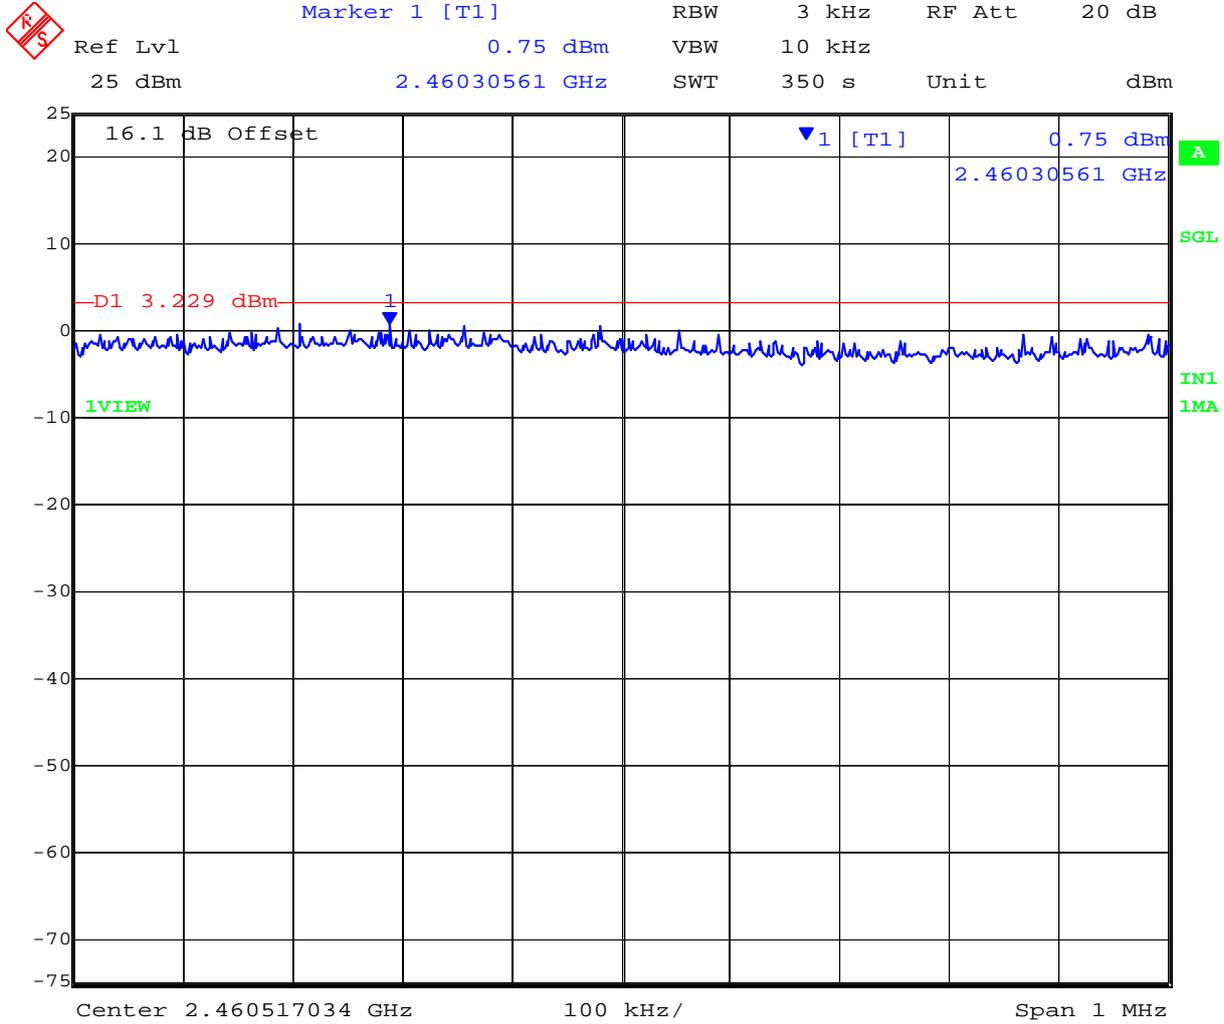

Date: 29.FEB.2012 19:22:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 114 of 331

PORT C 2,462 MHz 802.11b - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl 0.38 dBm VBW 10 kHz
25 dBm 2.46099900 GHz SWT 350 s Unit dBm

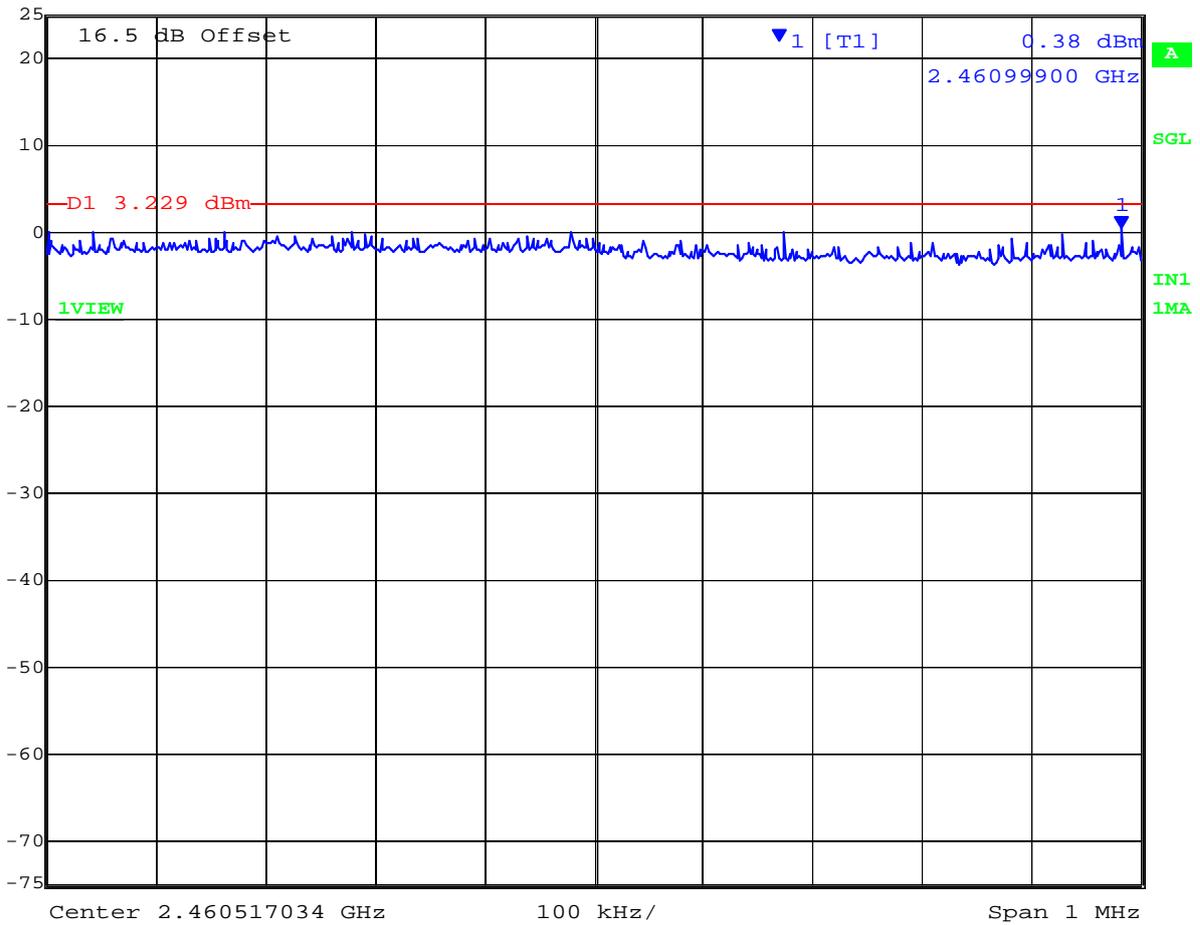

Date: 29.FEB.2012 19:28:48

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 115 of 331

Peak Power Spectral Density

TABLE OF RESULTS – 802.11g Legacy

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11g	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:			
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Σ Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2412	0.48	-0.80	-0.86	--	4.77	5.25	3.23	-2.75
2437	-0.73	-2.21	-0.41	--	4.77	4.36	3.23	-3.64
2462	-0.98	-0.82	0.06	--	4.77	4.84	3.23	-3.17

Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------


NOTE: above margin is calculated from the highest Power Density returned from Chain A or B or C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 116 of 331

PORT A 2,412 MHz 802.11g Legacy - Peak Power Spectral Density

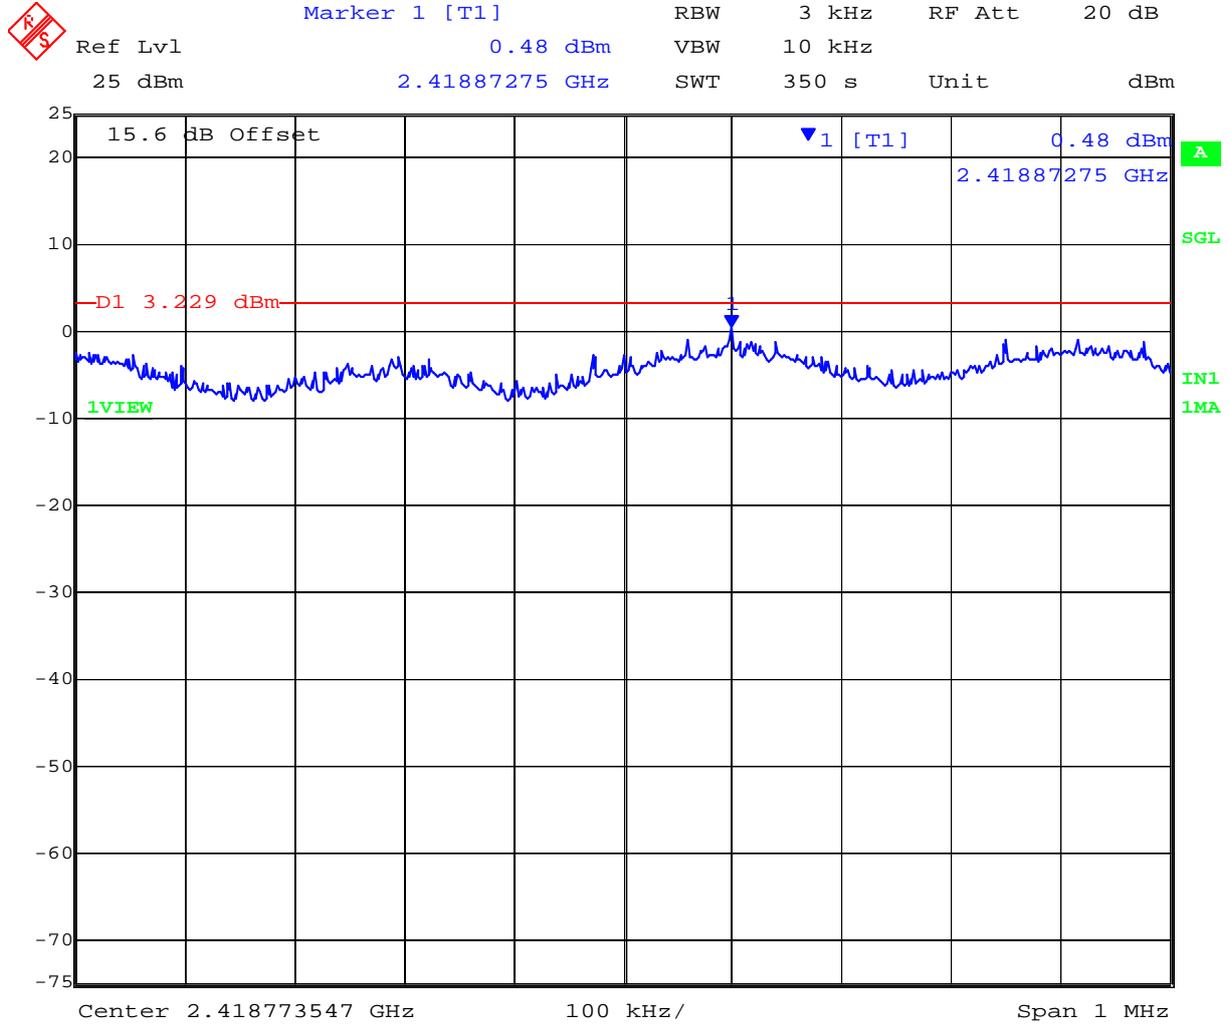


Date: 29.FEB.2012 11:29:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 117 of 331


PORT B 2,412 MHz 802.11g Legacy - Peak Power Spectral Density

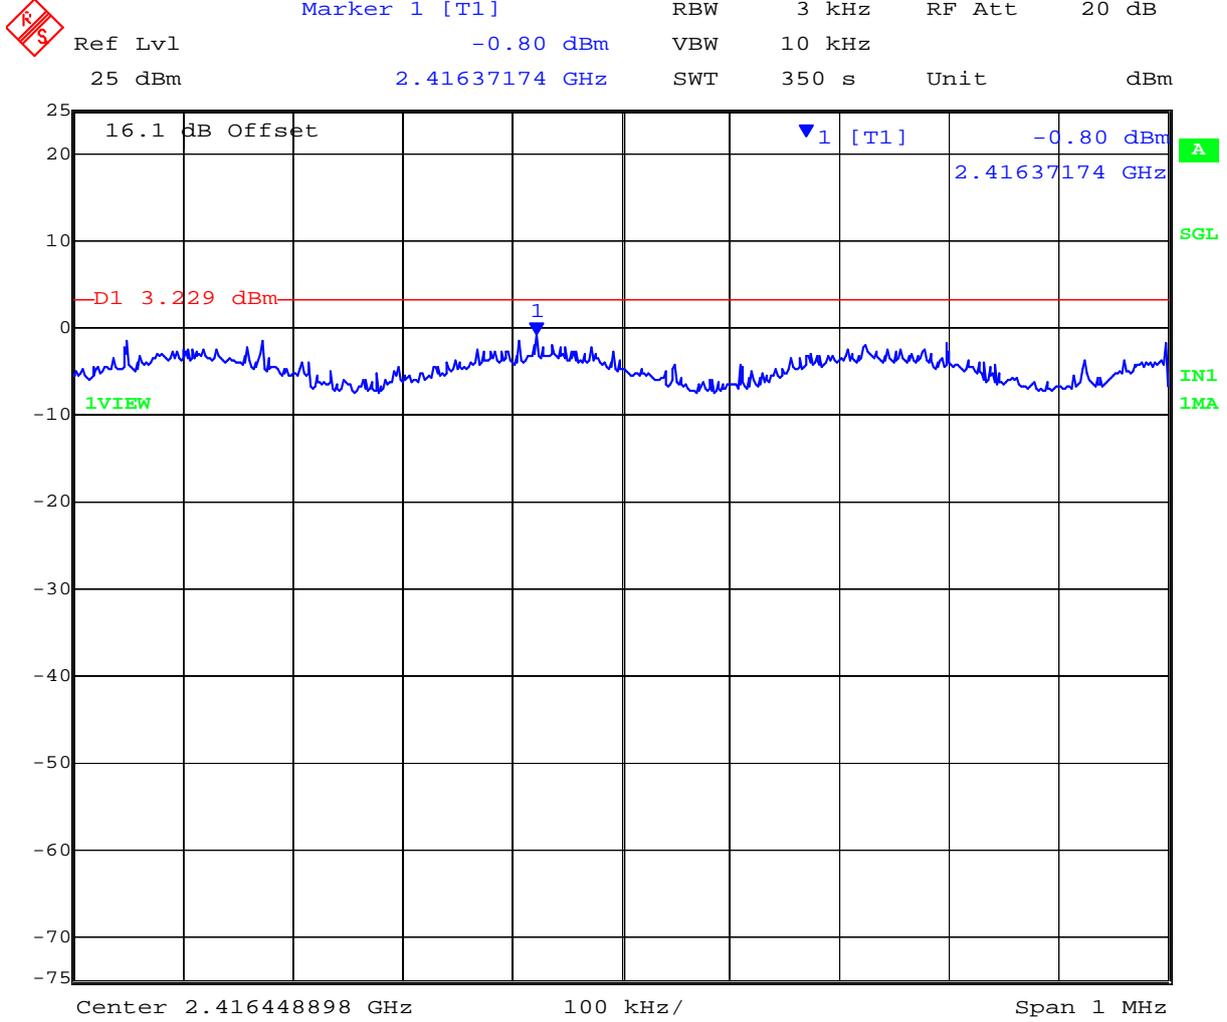

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,412 MHz 802.11g Legacy - Peak Power Spectral Density

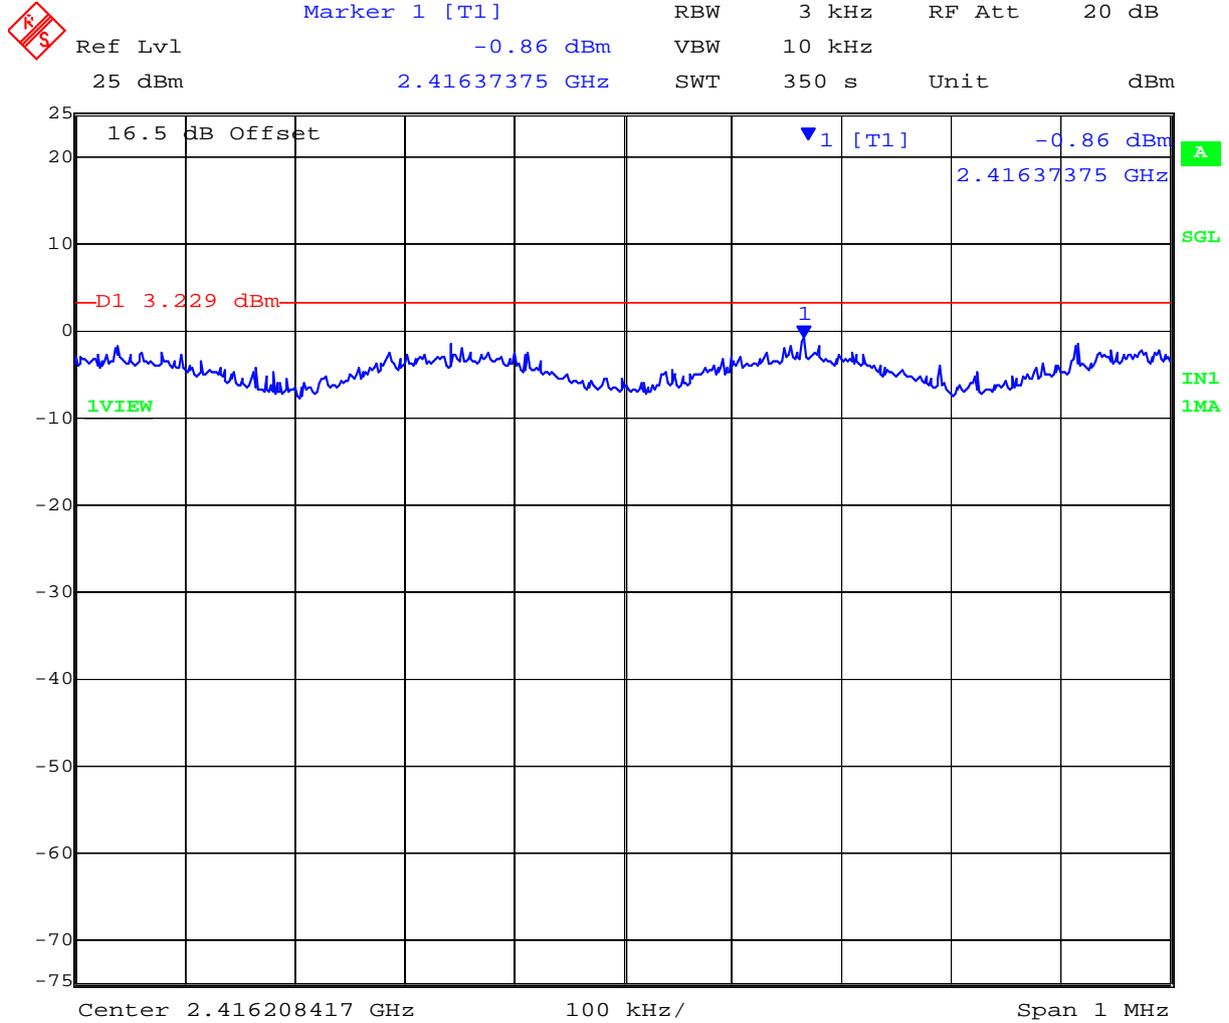


Date: 29.FEB.2012 11:42:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,437 MHz 802.11g Legacy - Peak Power Spectral Density

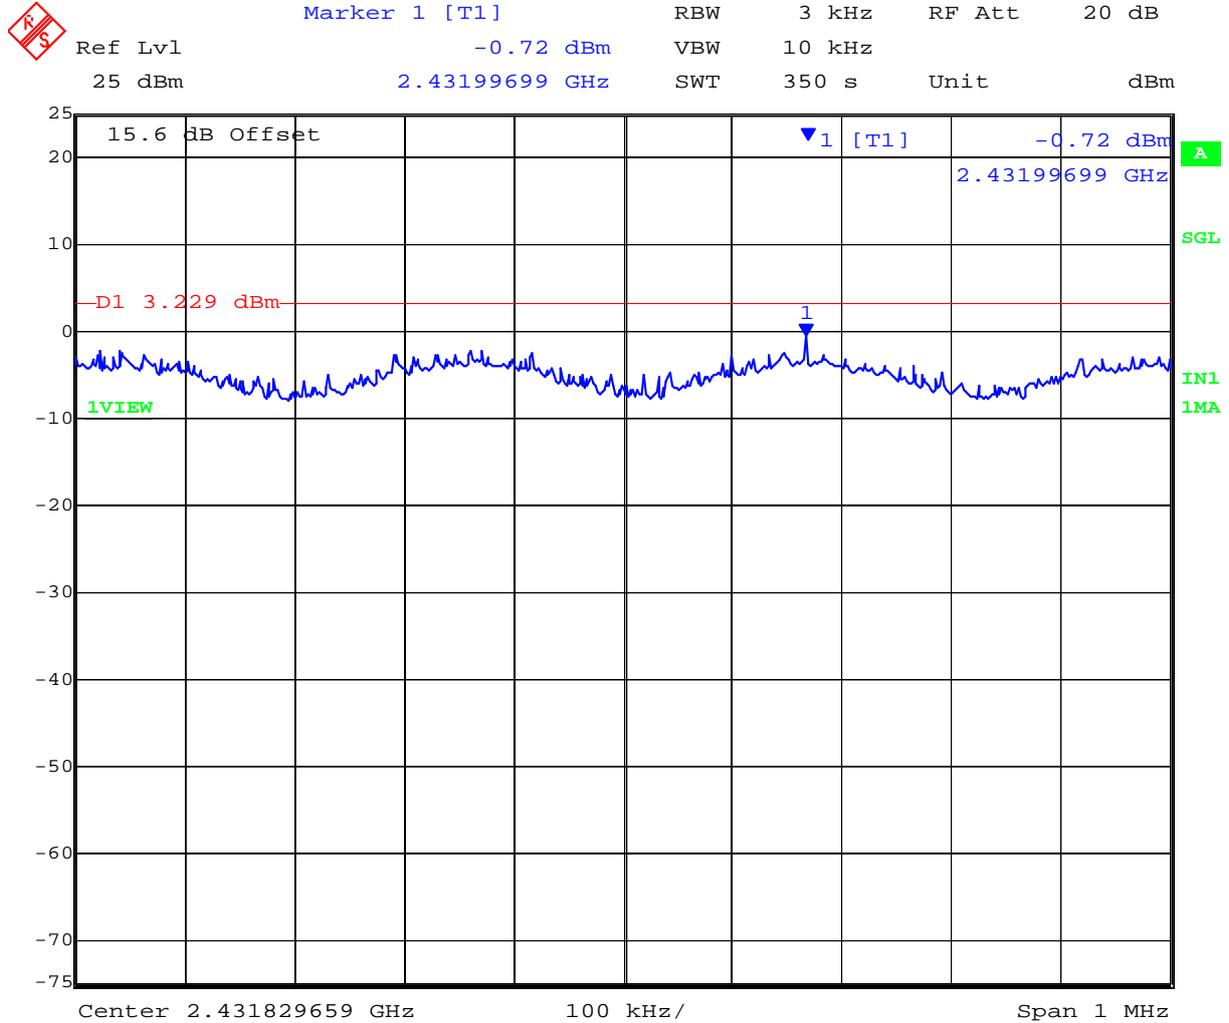


Date: 29.FEB.2012 12:01:04

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,437 MHz 802.11g Legacy - Peak Power Spectral Density

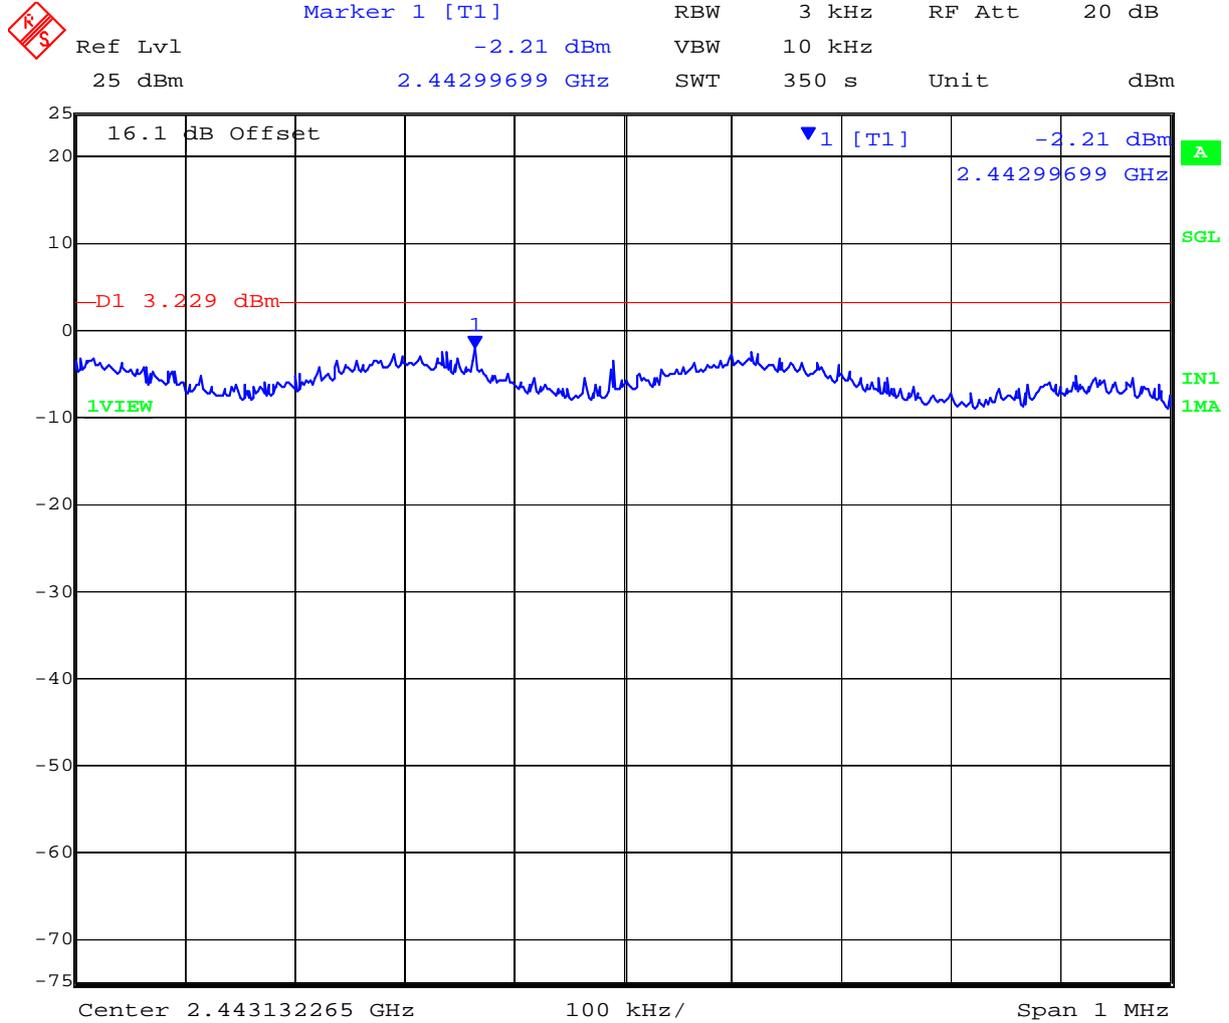


Date: 29.FEB.2012 12:07:36

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 121 of 331

PORT C 2,437 MHz 802.11g Legacy - Peak Power Spectral Density

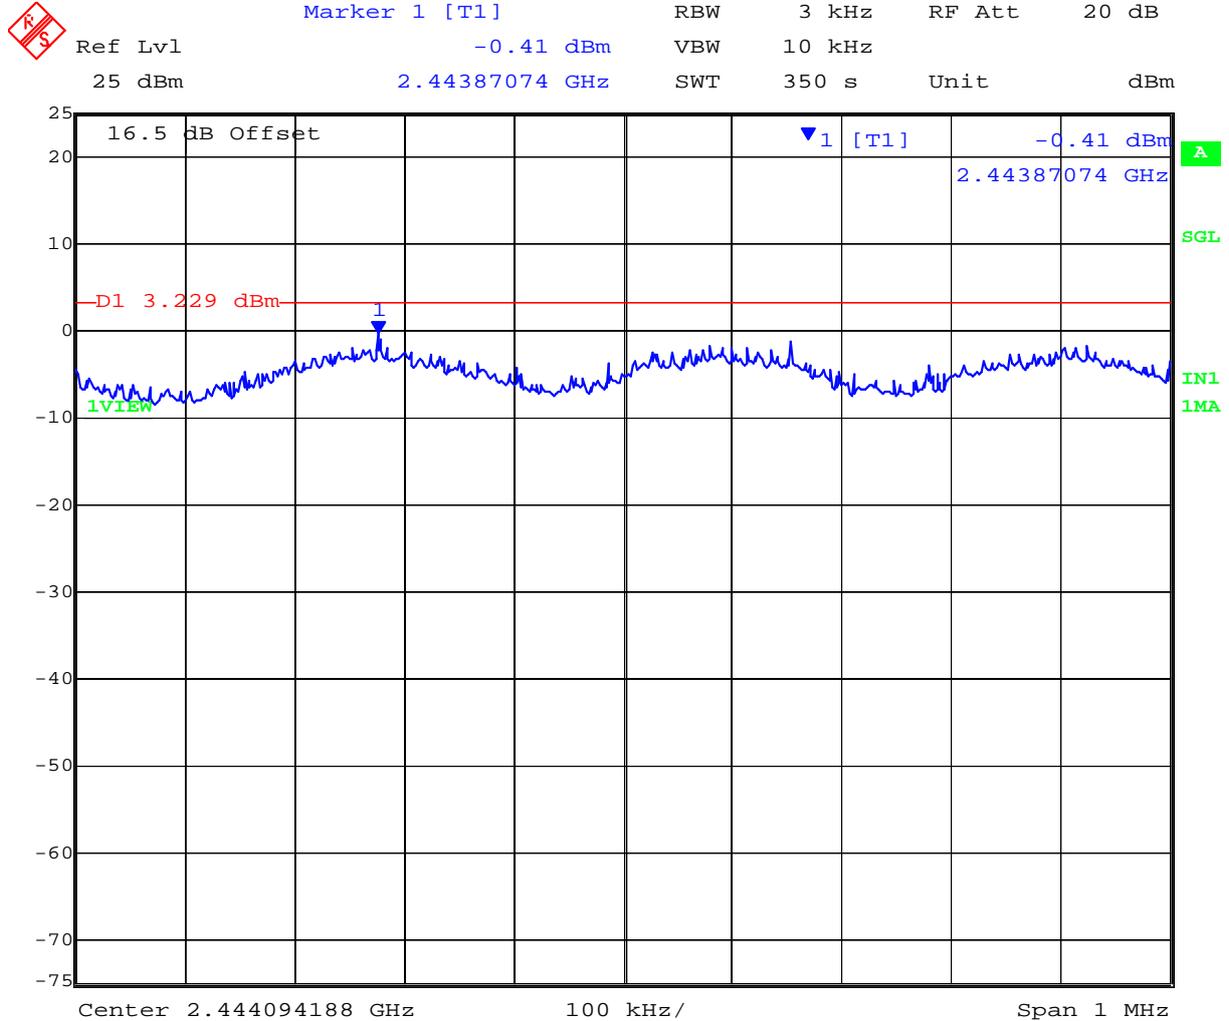


Date: 29.FEB.2012 12:14:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 2,462 MHz 802.11g Legacy - Peak Power Spectral Density

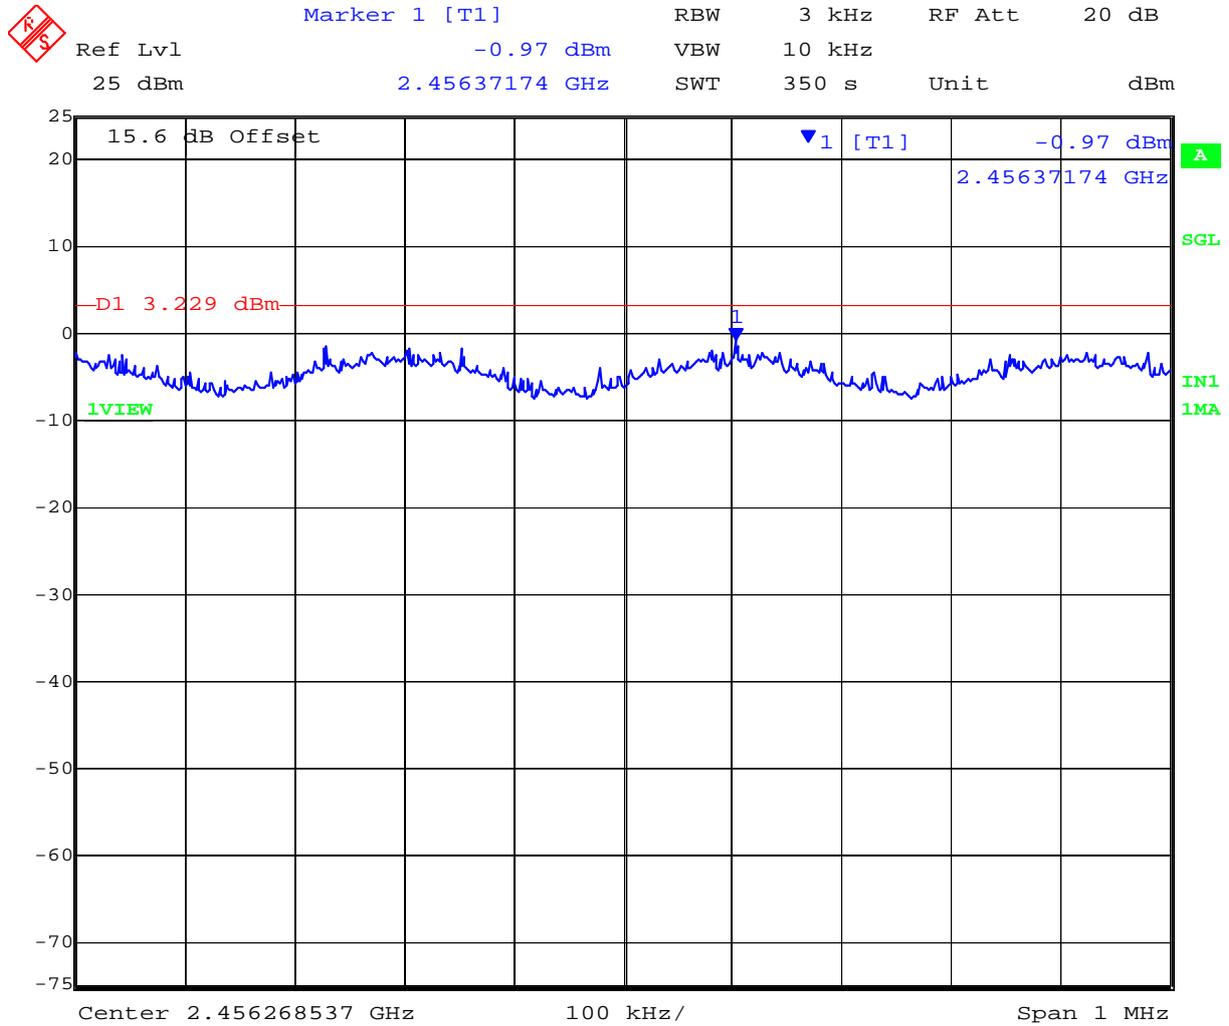


Date: 29.FEB.2012 12:36:44

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 123 of 331

PORT B 2,462 MHz 802.11g Legacy - Peak Power Spectral Density

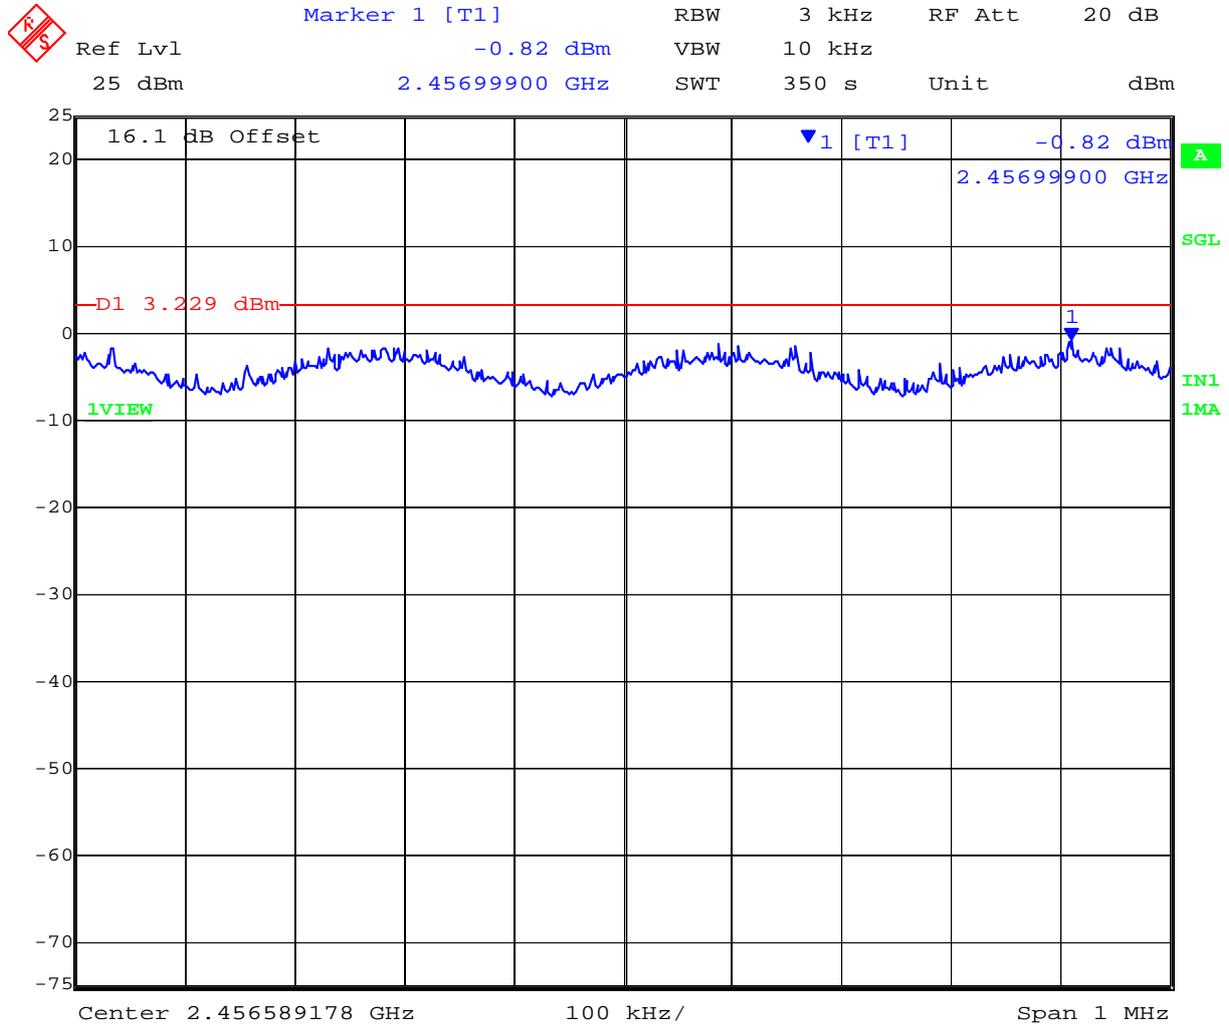


Date: 29.FEB.2012 12:43:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 124 of 331

PORT C 2,462 MHz 802.11g Legacy - Peak Power Spectral Density

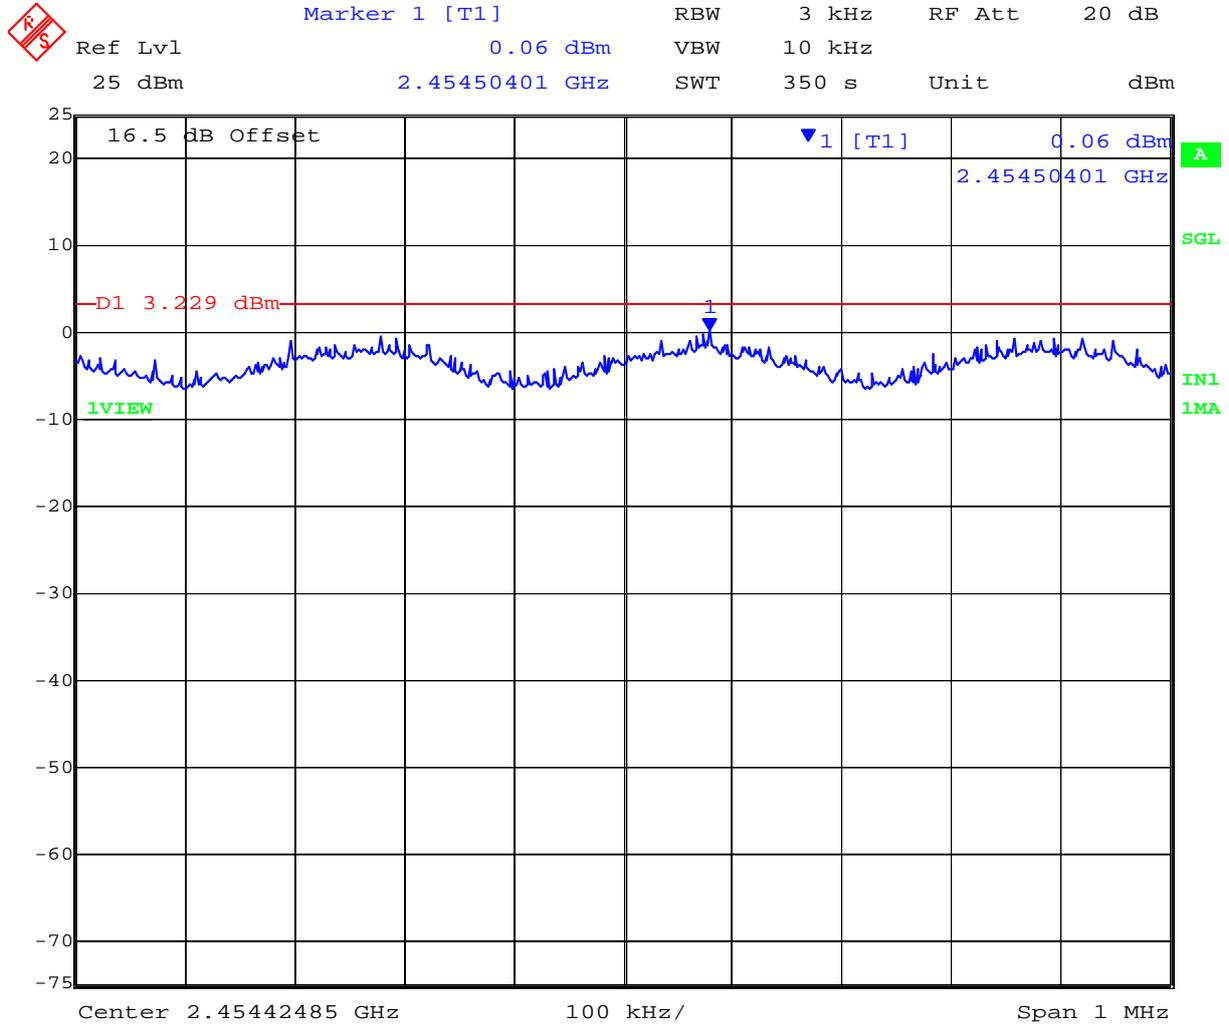

Date: 29.FEB.2012 12:49:48

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 125 of 331

Peak Power Spectral Density

TABLE OF RESULTS – 802.11n HT-20

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:			
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2412	-1.97	-1.49	-2.55	--	4.77	3.29	3.23	-4.72
2437	-2.41	-2.16	-2.29	--	4.77	2.61	3.23	-5.39
2462	-1.79	-0.25	-1.05	--	4.77	4.53	3.23	-3.48

Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------

NOTE: above margin is calculated from the highest Power Density returned from Chain A or B or C


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 126 of 331

PORT A 2,412 MHz 802.11n HT-20 - Peak Power Spectral Density

 Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -1.97 dBm VBW 10 kHz
25 dBm 2.41824549 GHz SWT 350 s Unit dBm

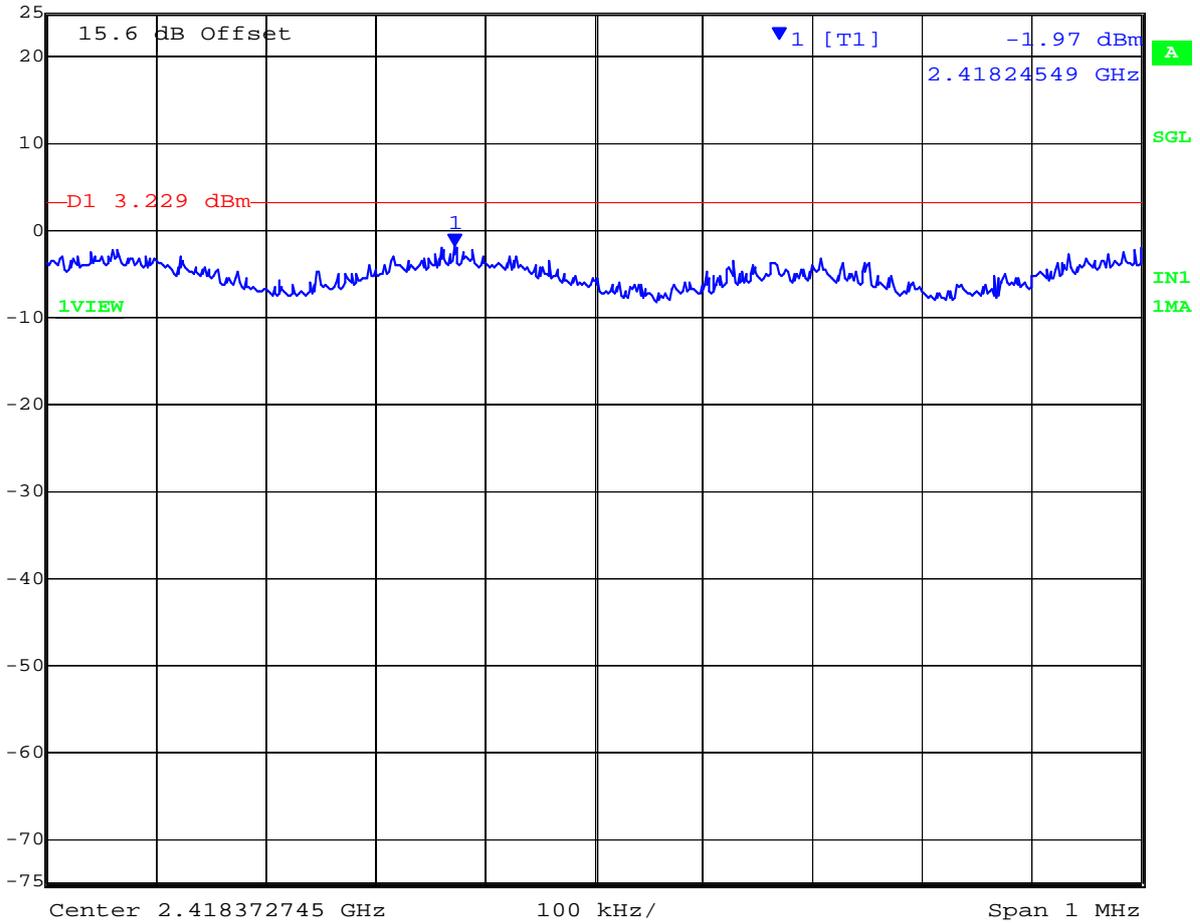


Date: 29.FEB.2012 15:00:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 127 of 331

PORT B 2,412 MHz 802.11n HT-20 - Peak Power Spectral Density

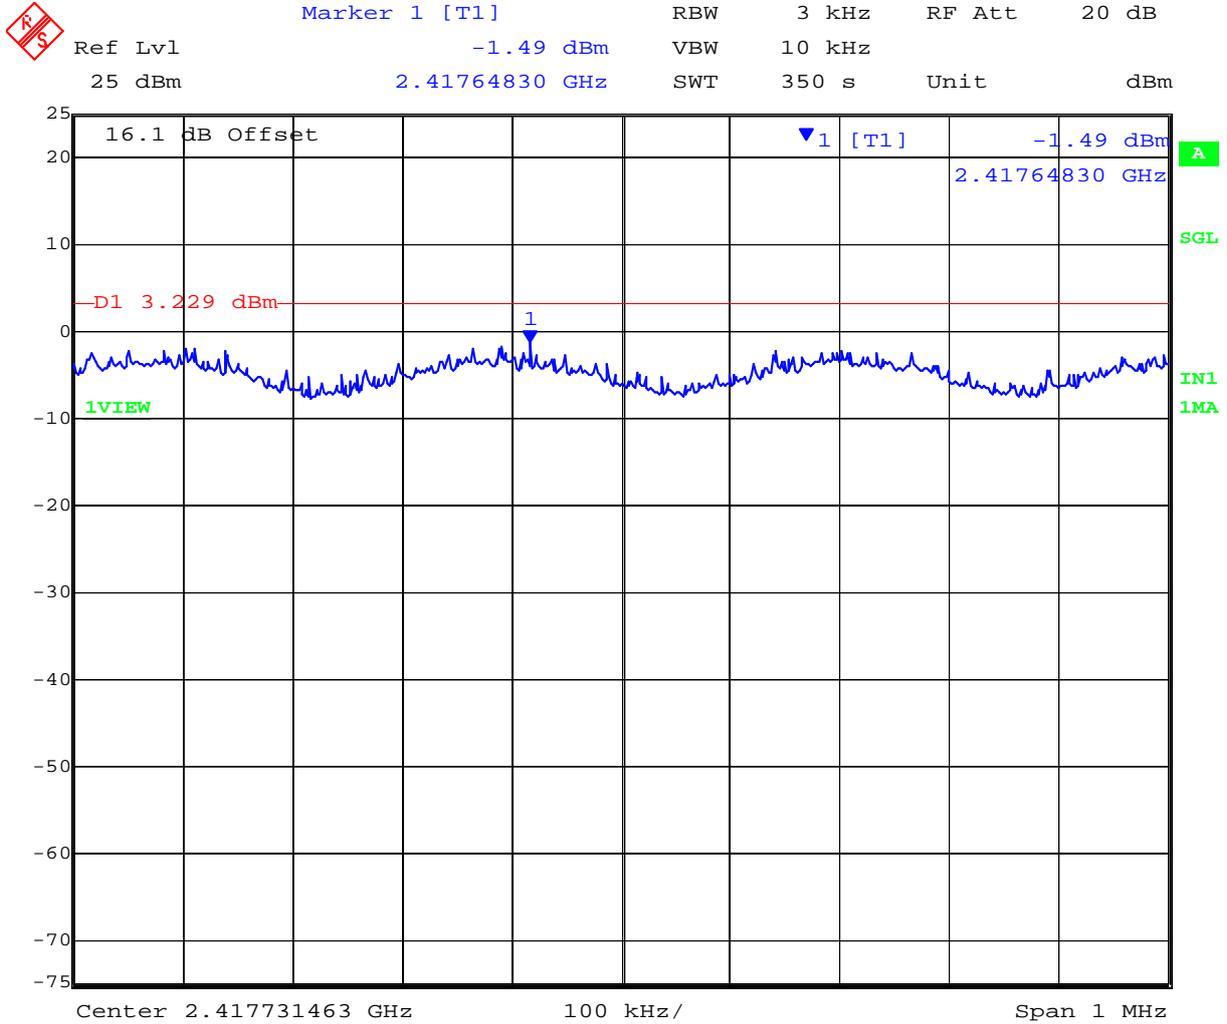

Date: 29.FEB.2012 15:06:46

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 128 of 331

PORT C 2,412 MHz 802.11n HT-20 - Peak Power Spectral Density




Date: 29.FEB.2012 15:13:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 129 of 331

PORT A 2,437 MHz 802.11n HT-20 - Peak Power Spectral Density

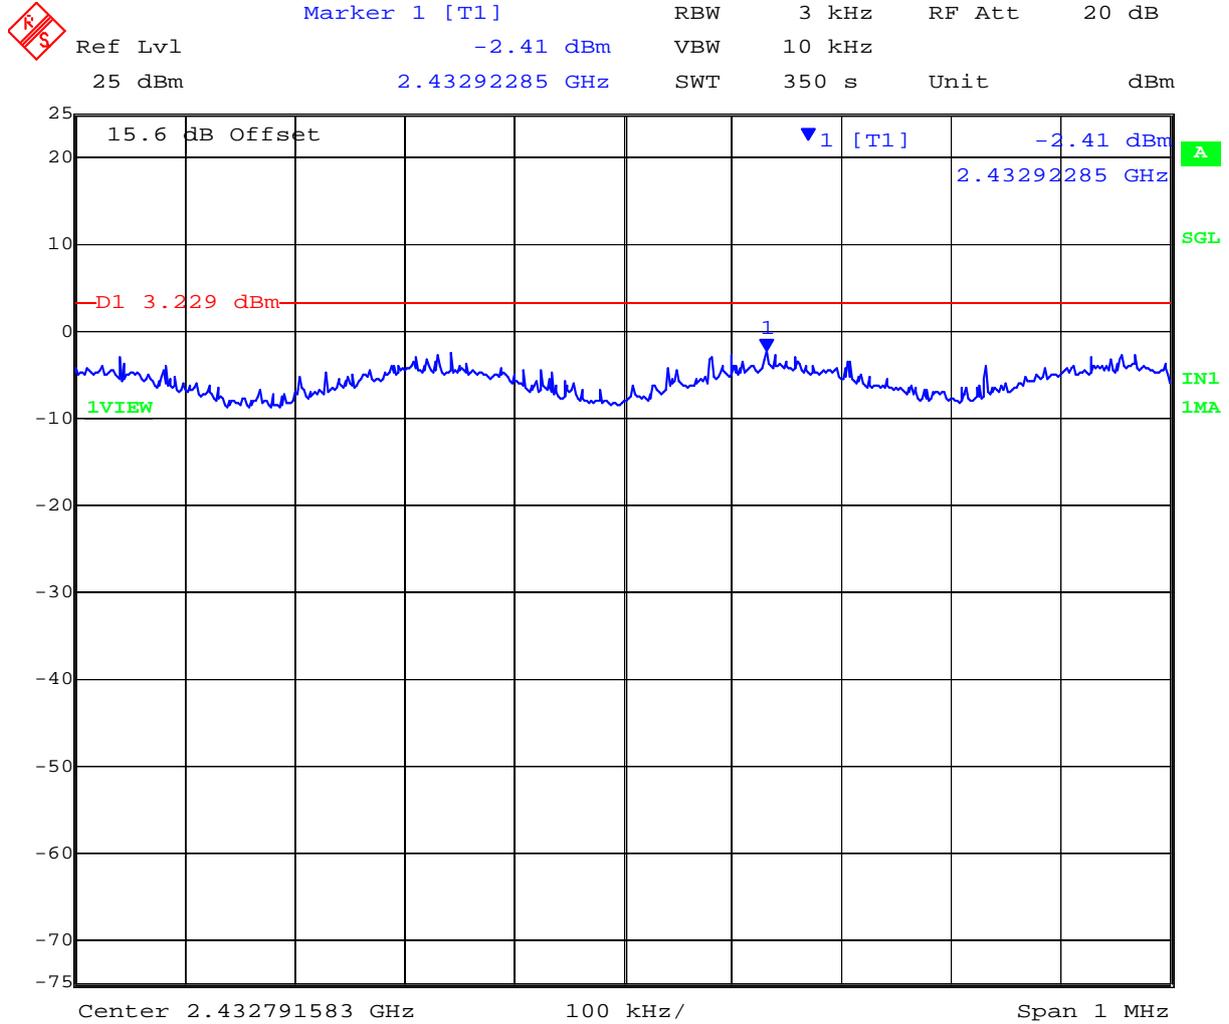


Date: 29.FEB.2012 15:38:33

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,437 MHz 802.11n HT-20 - Peak Power Spectral Density

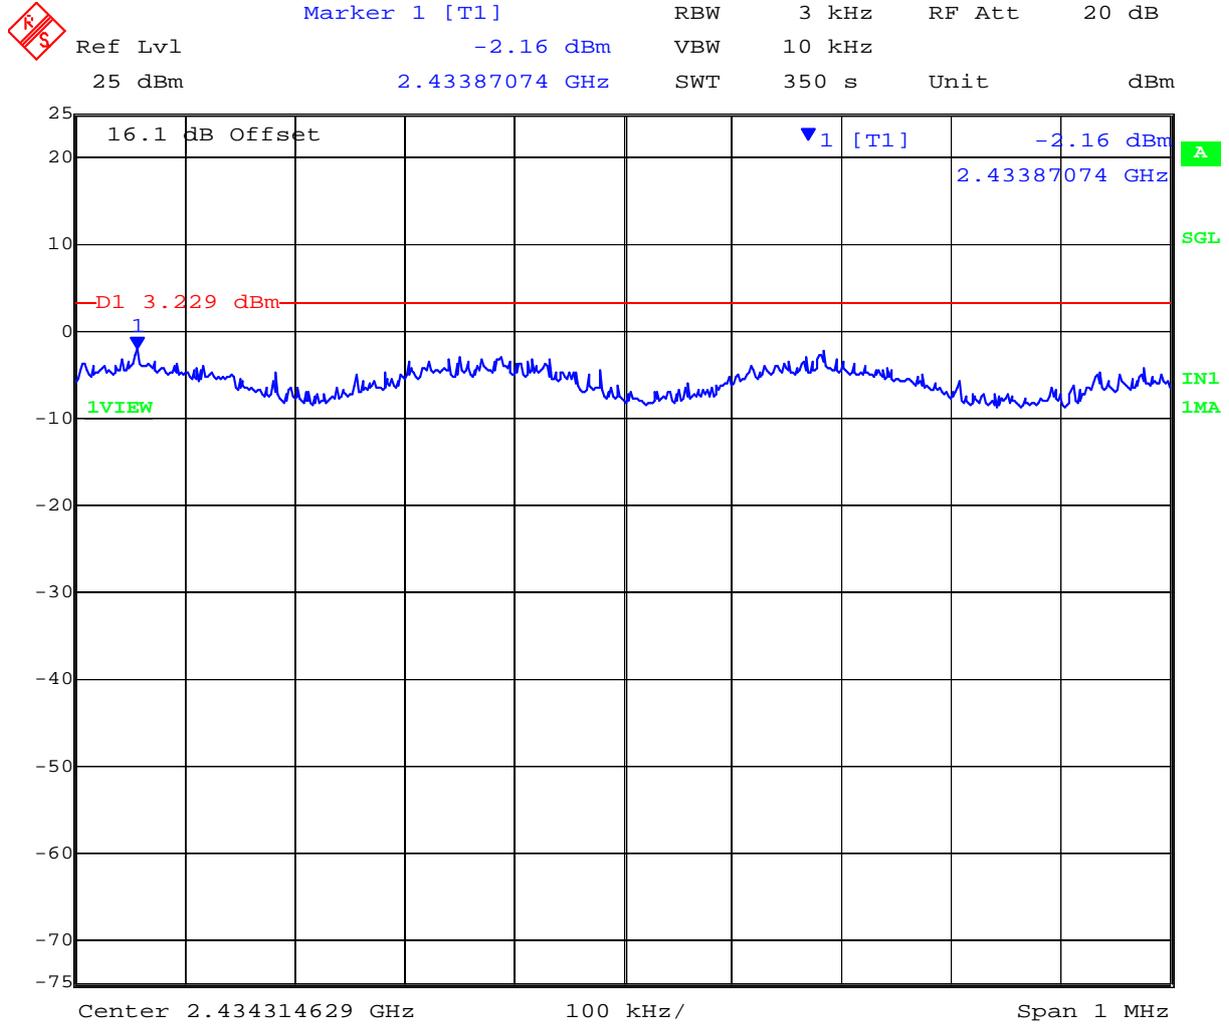


Date: 29.FEB.2012 15:45:04

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,437 MHz 802.11n HT-20 - Peak Power Spectral Density

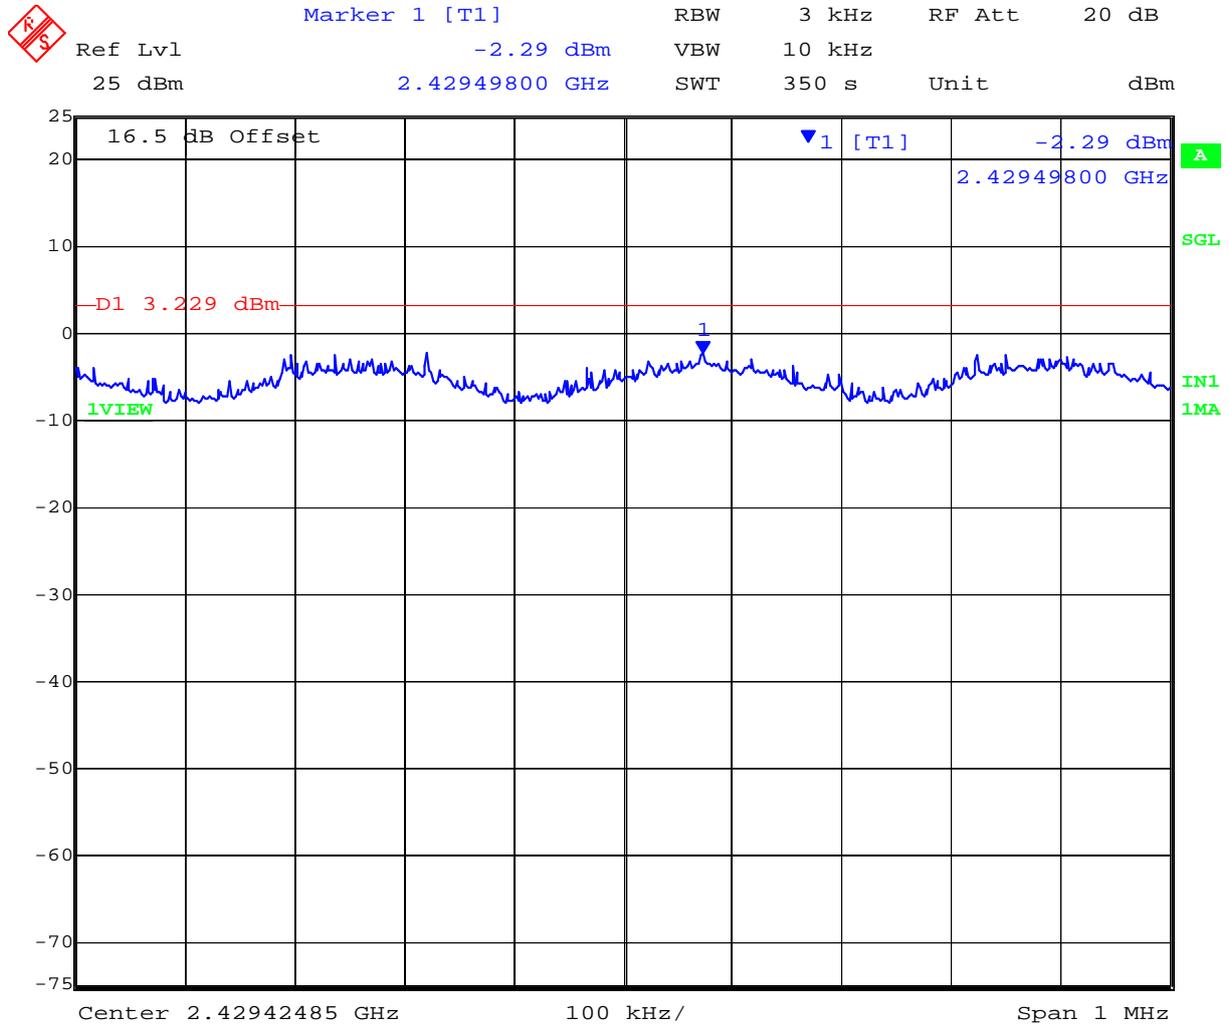


Date: 29.FEB.2012 15:51:34

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 132 of 331

PORT A 2,462 MHz 802.11n HT-20 - Peak Power Spectral Density

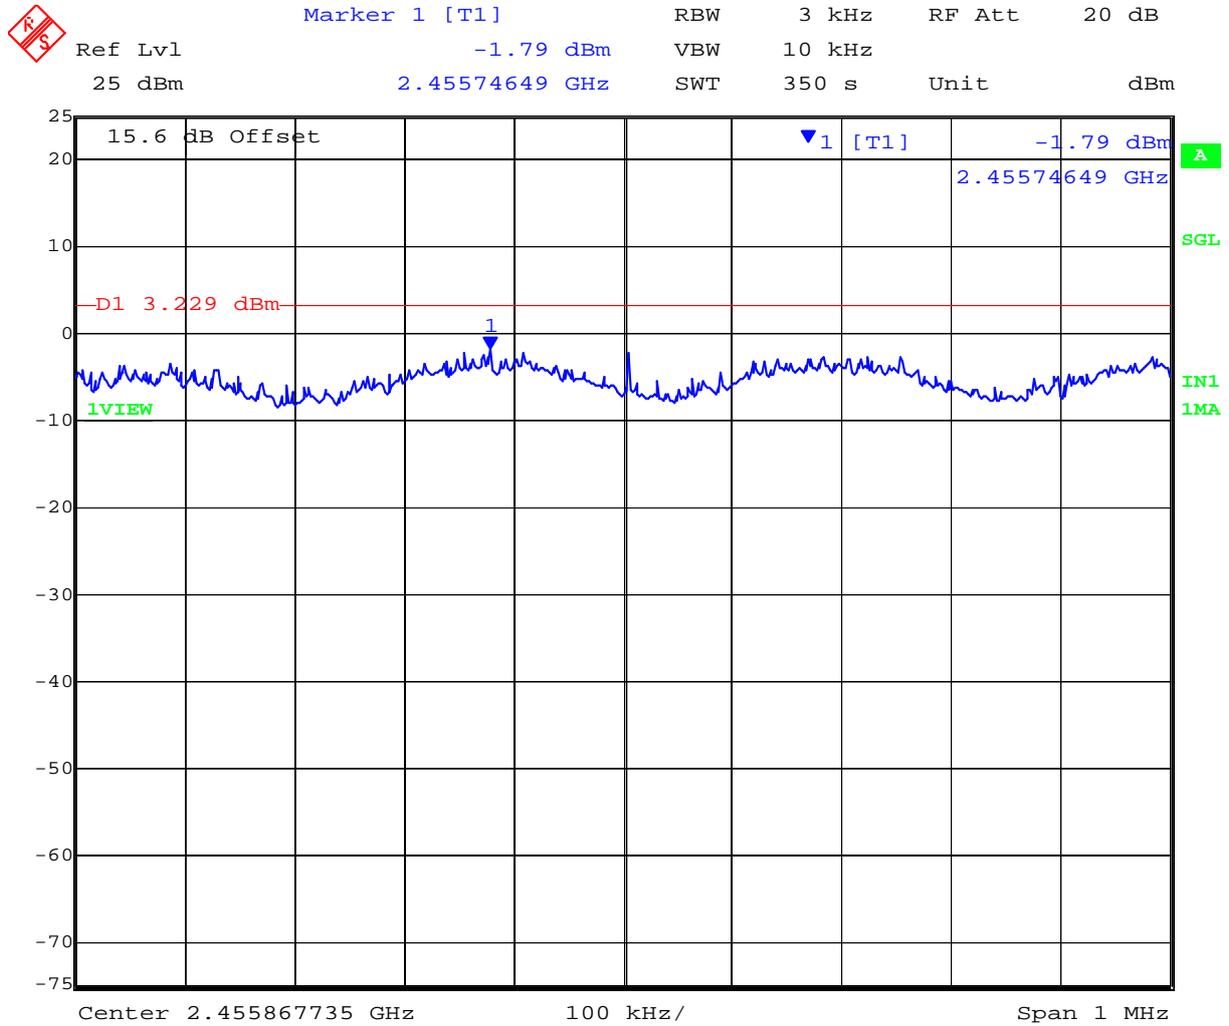

Date: 29.FEB.2012 16:11:29


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,462 MHz 802.11n HT-20 - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -1.05 dBm VBW 10 kHz
25 dBm 2.45762024 GHz SWT 350 s Unit dBm

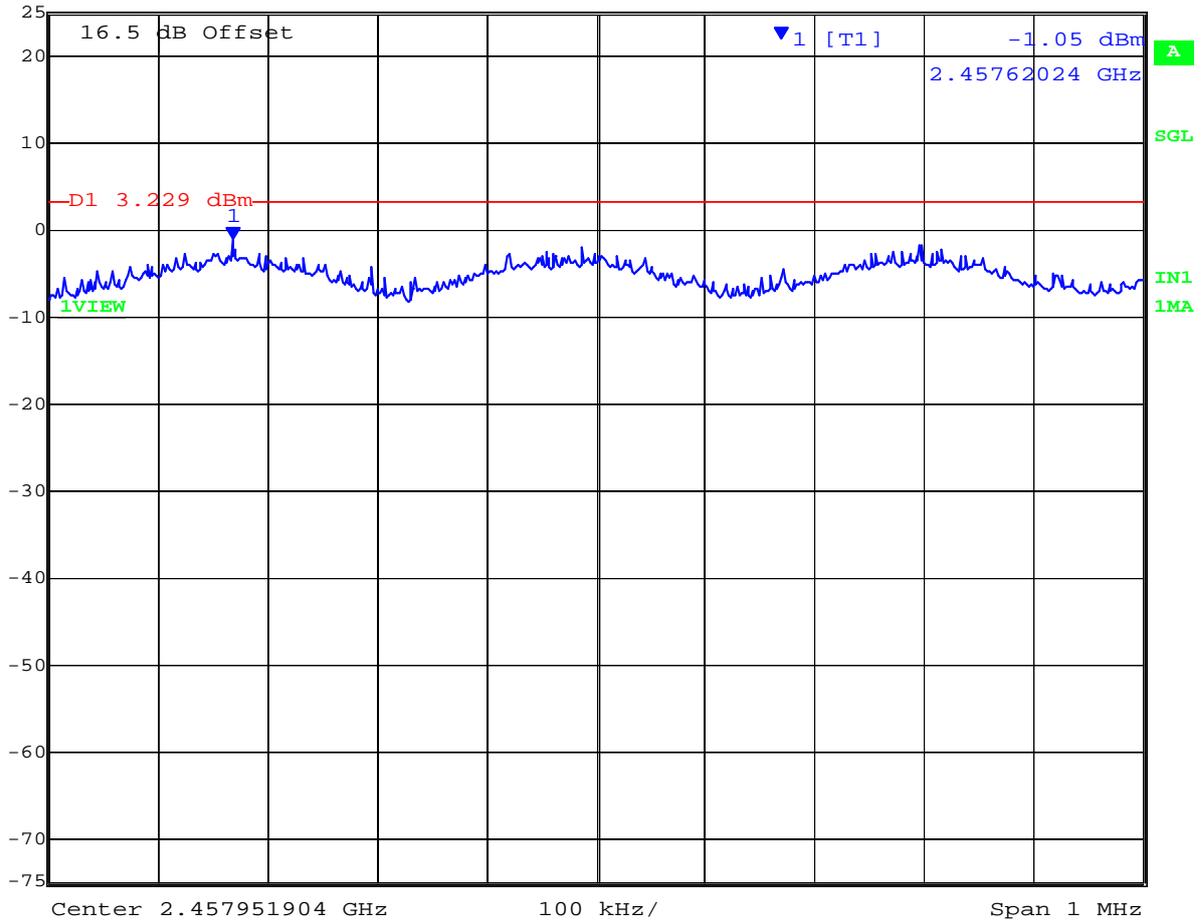

Date: 29.FEB.2012 16:24:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 135 of 331

Peak Power Spectral Density

TABLE OF RESULTS – 802.11n HT-40

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:			
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2422	-4.47	-2.84	-4.50	--	4.77	1.93	3.23	-6.07
2437	-3.26	-4.61	-3.99	--	4.77	1.52	3.23	-6.49
2452	-4.69	-4.06	-3.92	--	4.77	0.86	3.23	-7.15

Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------


NOTE: above margin is calculated from the highest Power Density returned from Chain A or B or C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 136 of 331

PORT A 2,422 MHz 802.11n HT-40 - Peak Power Spectral Density

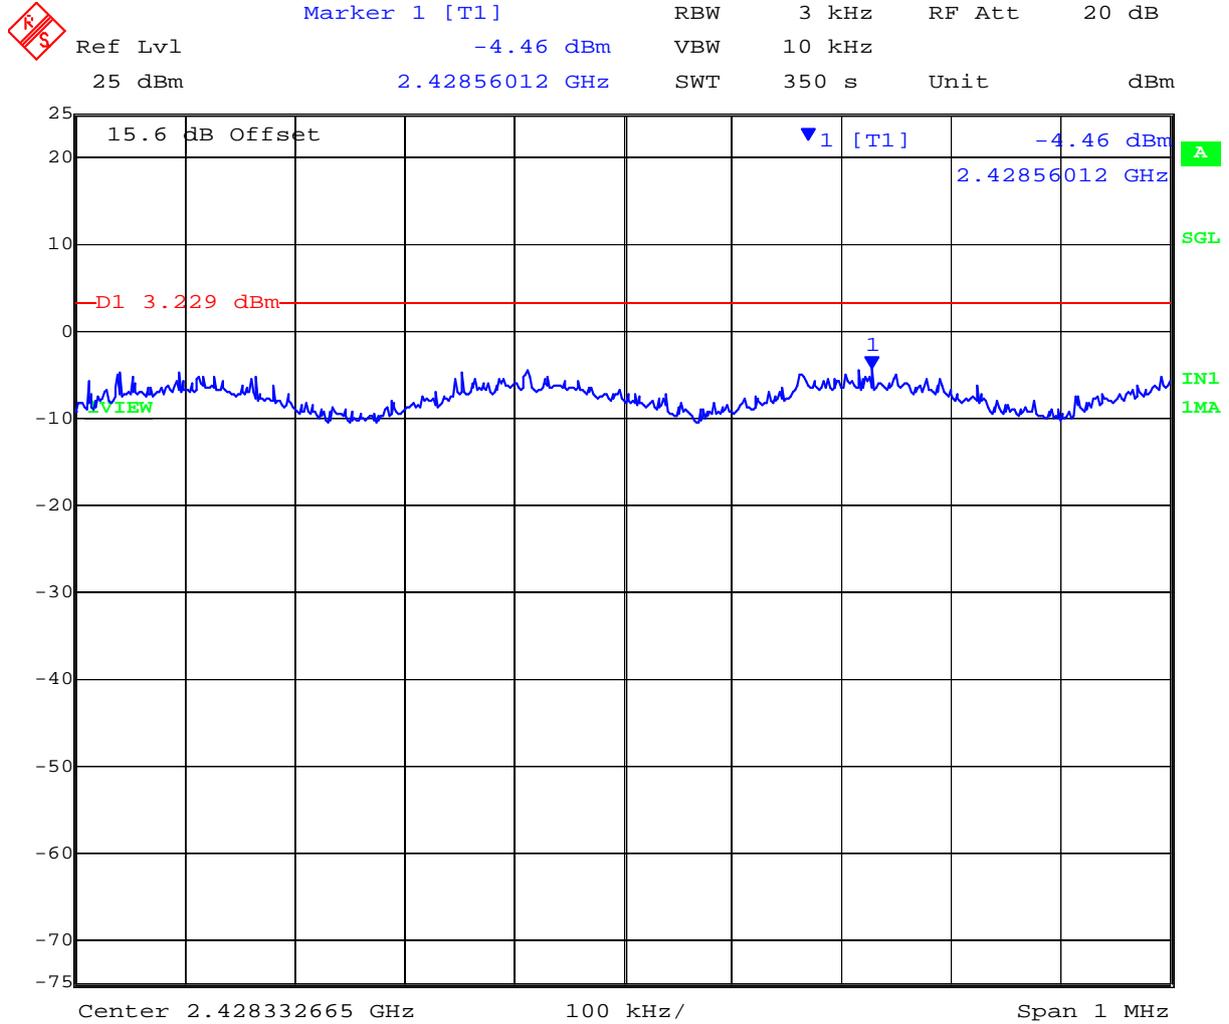


Date: 29.FEB.2012 16:58:36

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,422 MHz 802.11n HT-40 - Peak Power Spectral Density

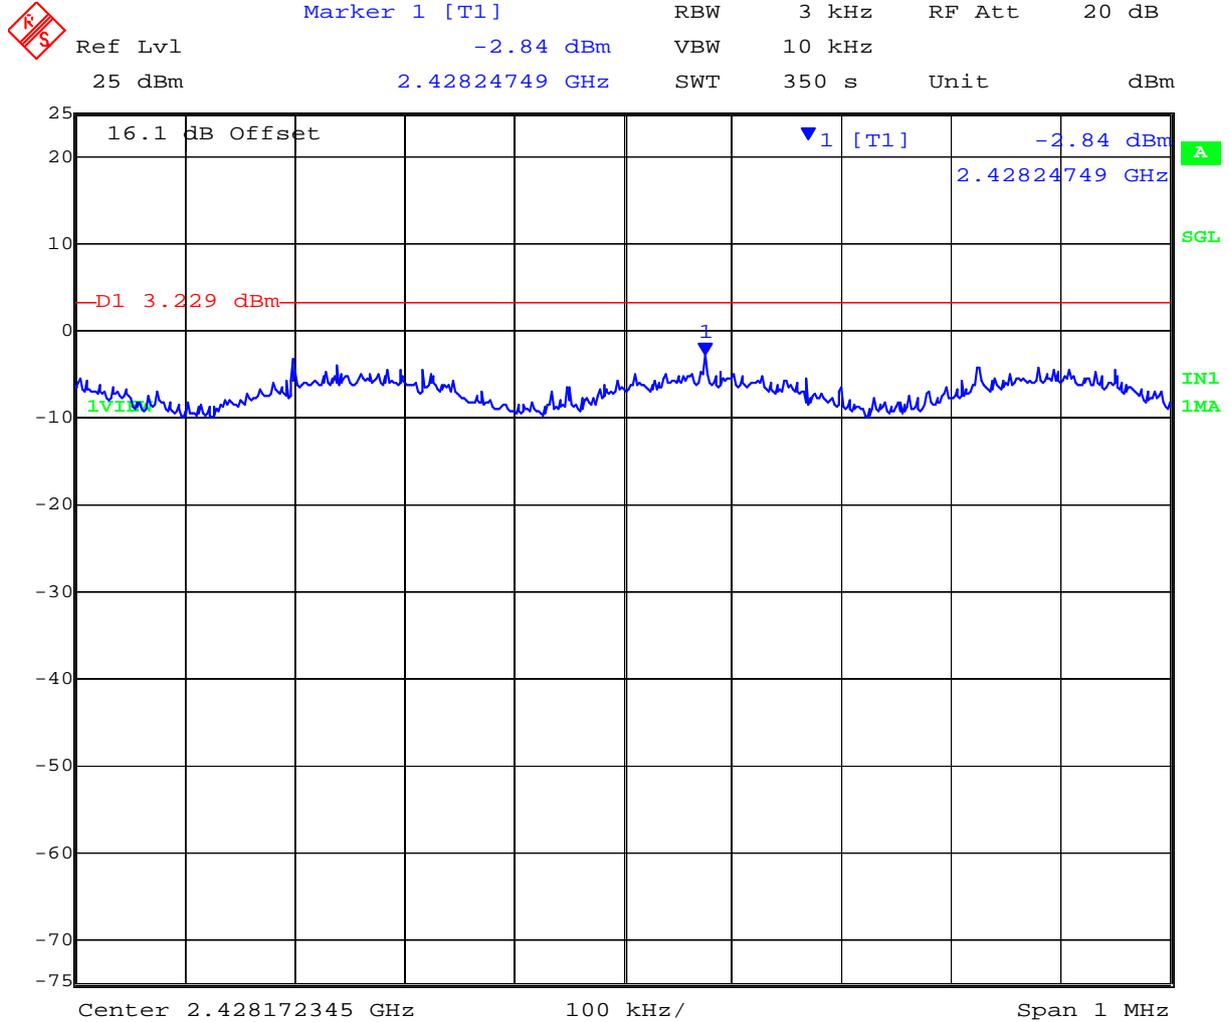

Date: 29.FEB.2012 17:05:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 2,422 MHz 802.11n HT-40 - Peak Power Spectral Density




Date: 29.FEB.2012 17:11:36

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 139 of 331

PORT A 2,437 MHz 802.11n HT-40 - Peak Power Spectral Density

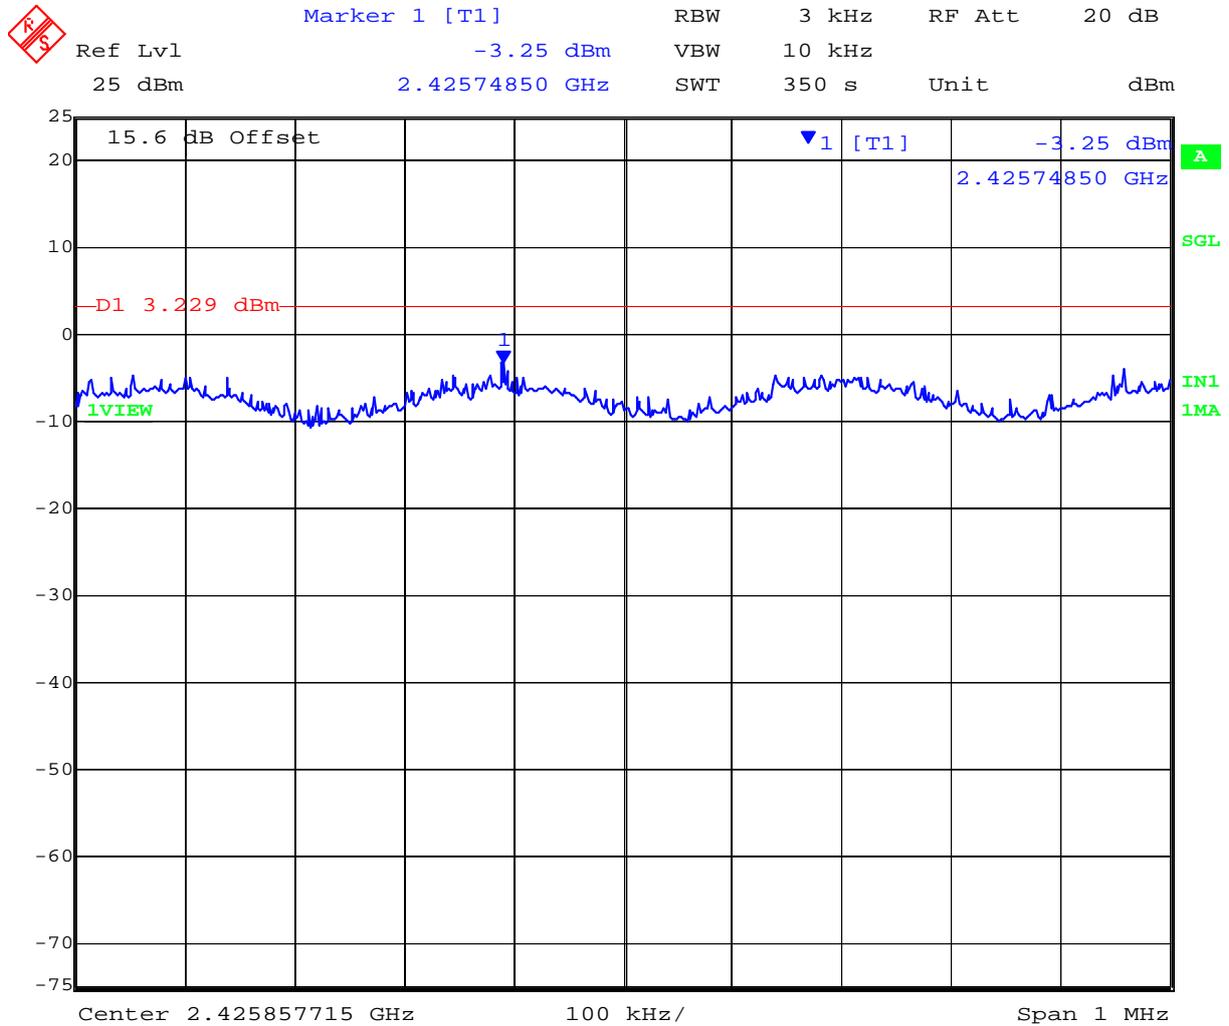


Date: 29.FEB.2012 17:27:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 2,437 MHz 802.11n HT-40 - Peak Power Spectral Density

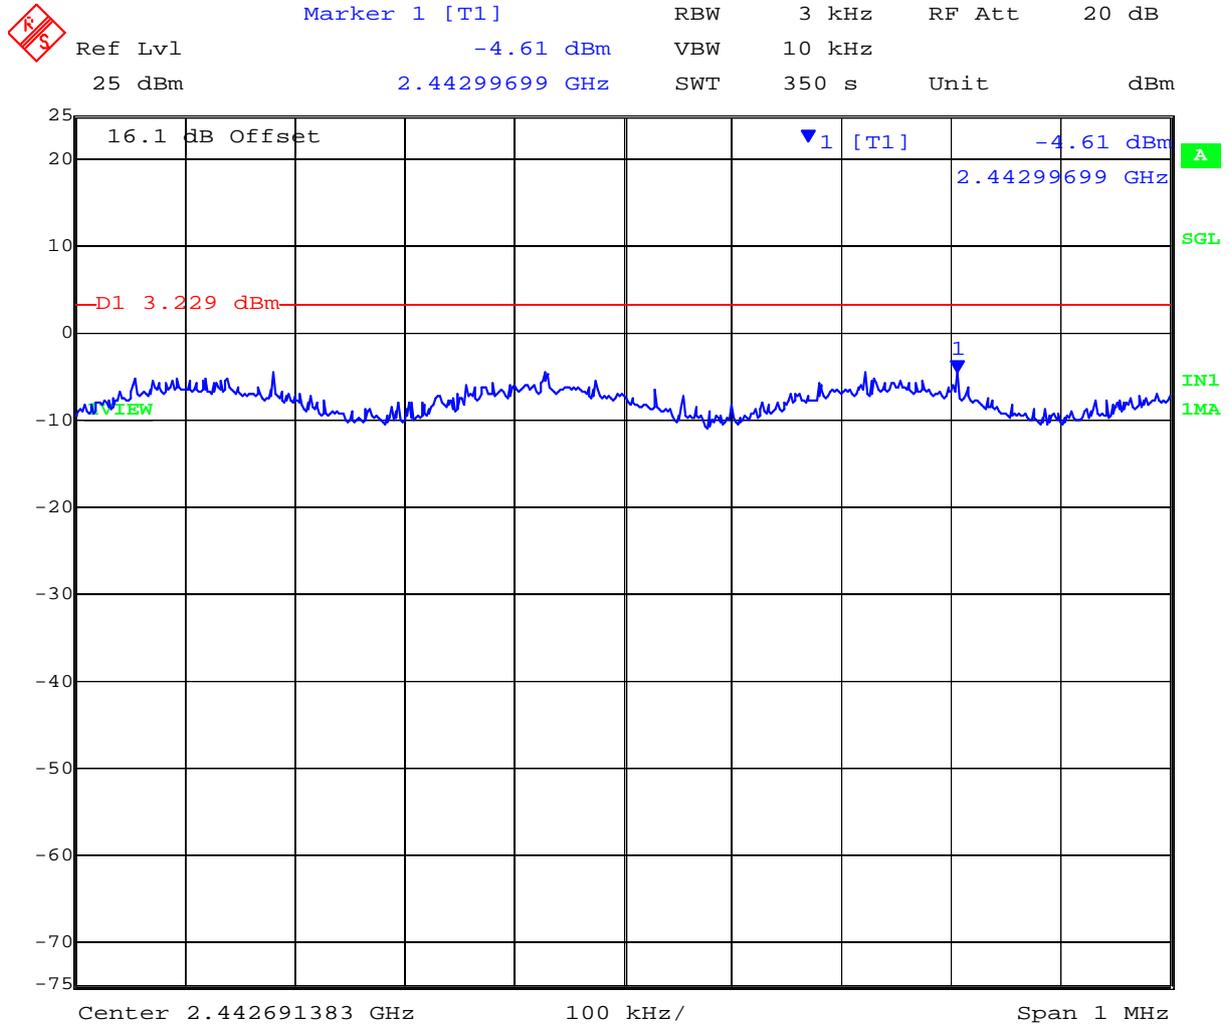


Date: 29.FEB.2012 17:34:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 141 of 331

PORT C 2,437 MHz 802.11n HT-40 - Peak Power Spectral Density

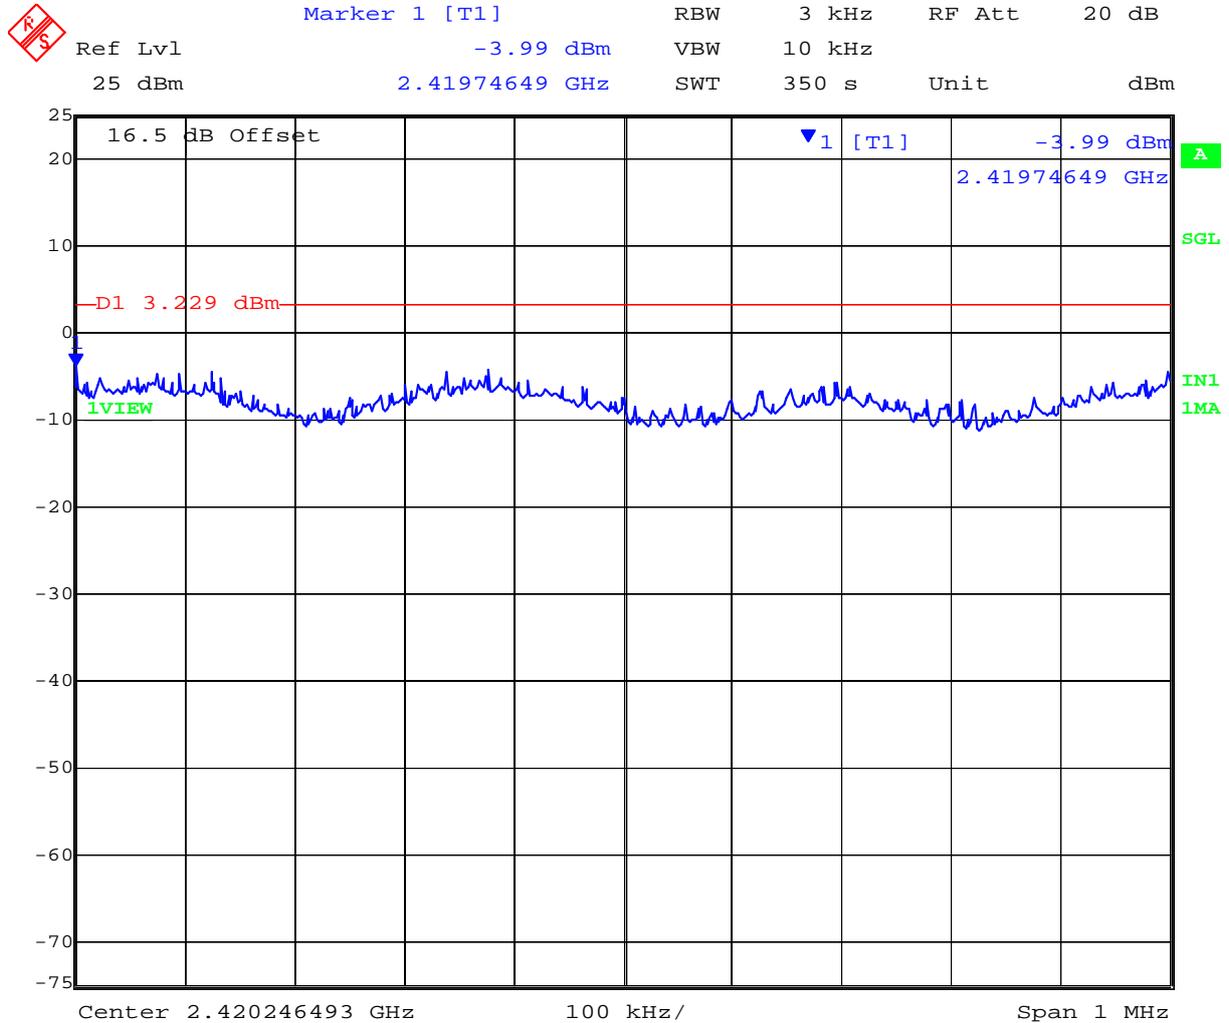


Date: 29.FEB.2012 17:40:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 142 of 331

PORT A 2,452 MHz 802.11n HT-40 - Peak Power Spectral Density

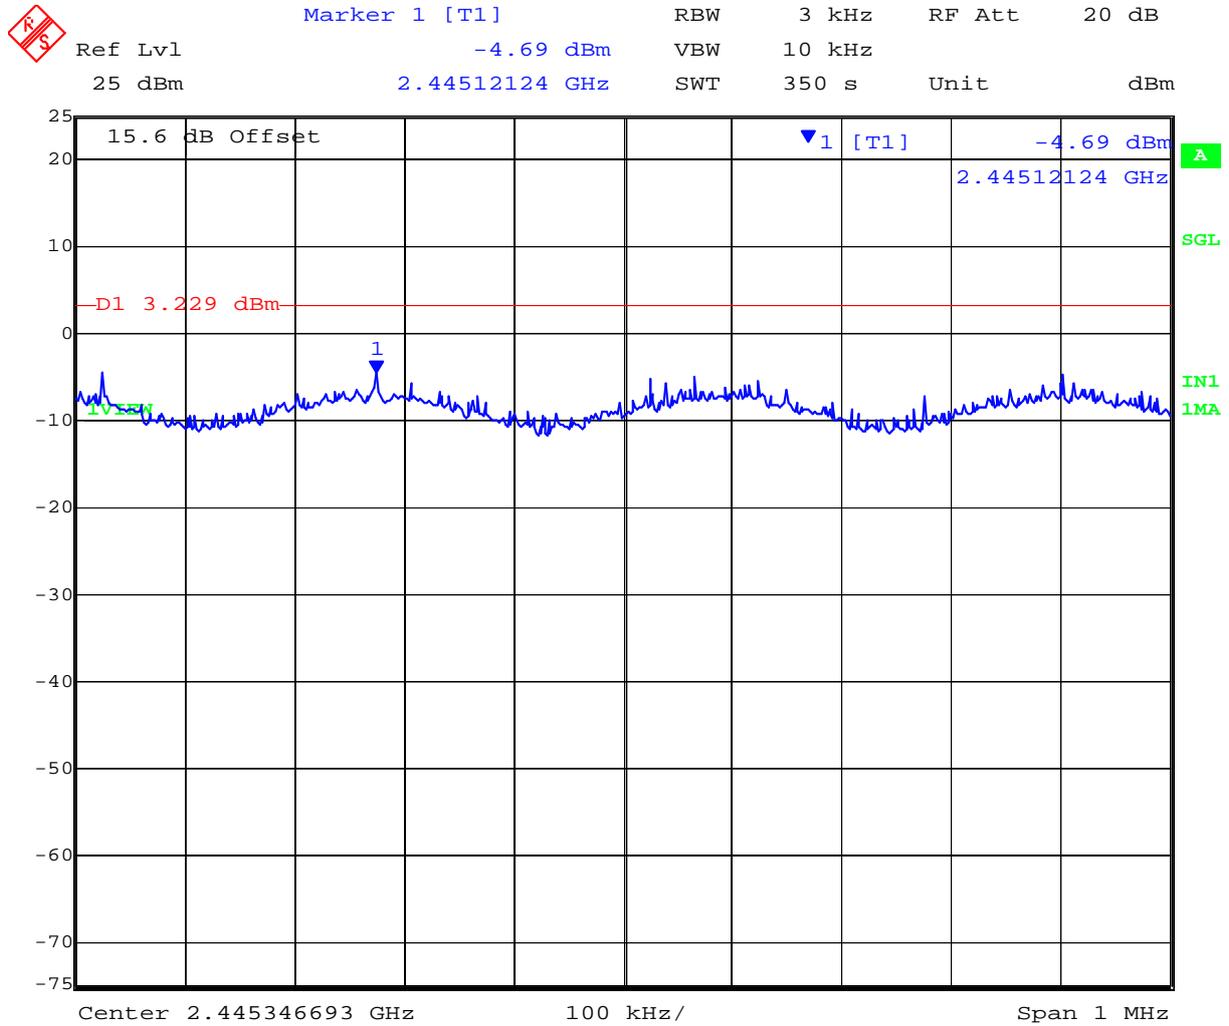


Date: 29.FEB.2012 18:01:45

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 143 of 331

PORT B 2,452 MHz 802.11n HT-40 - Peak Power Spectral Density

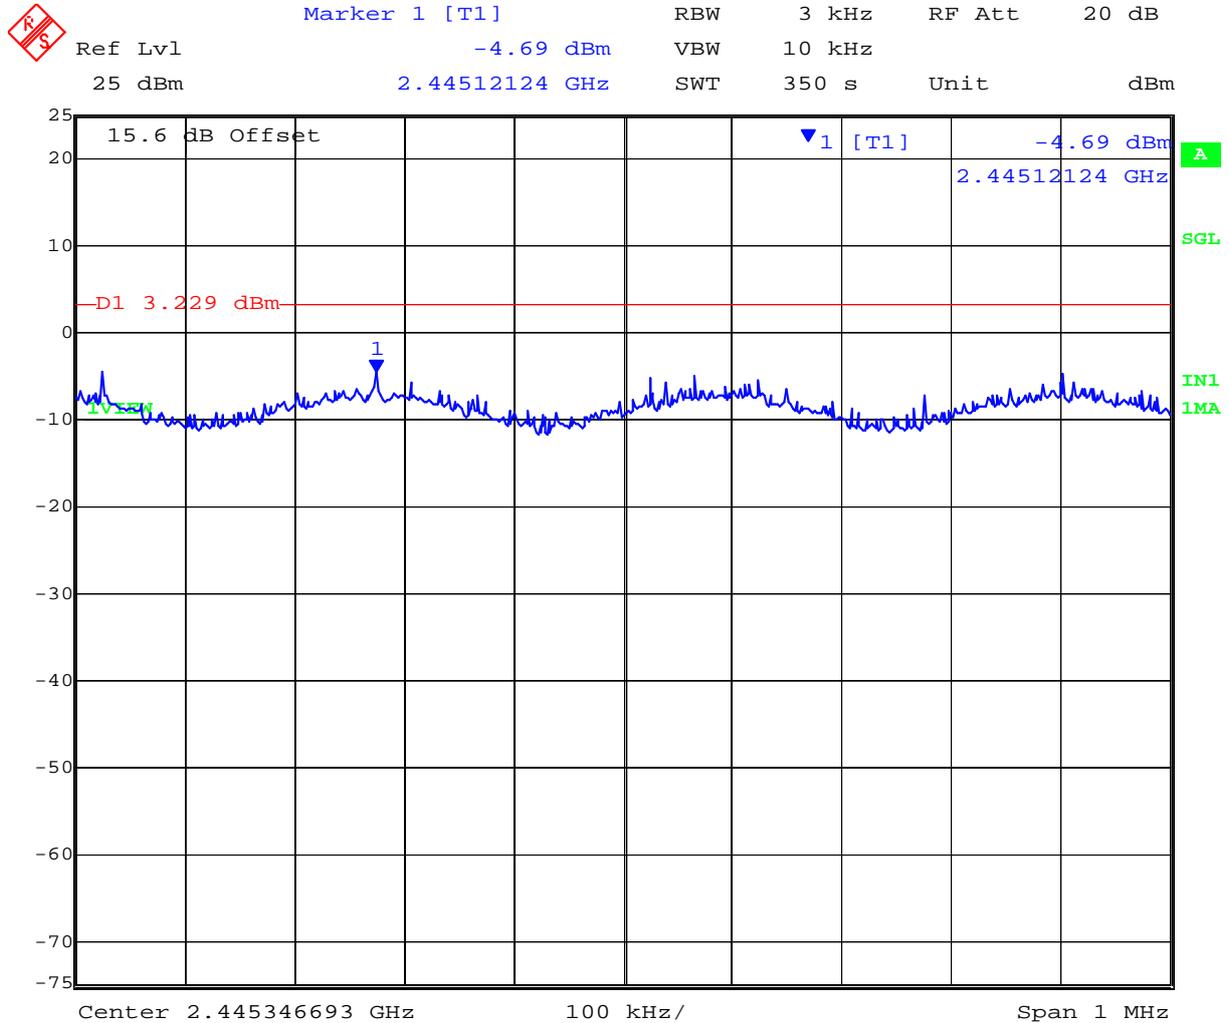


Date: 29.FEB.2012 18:01:45

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 144 of 331

PORT C 2,452 MHz 802.11n HT-40 - Peak Power Spectral Density

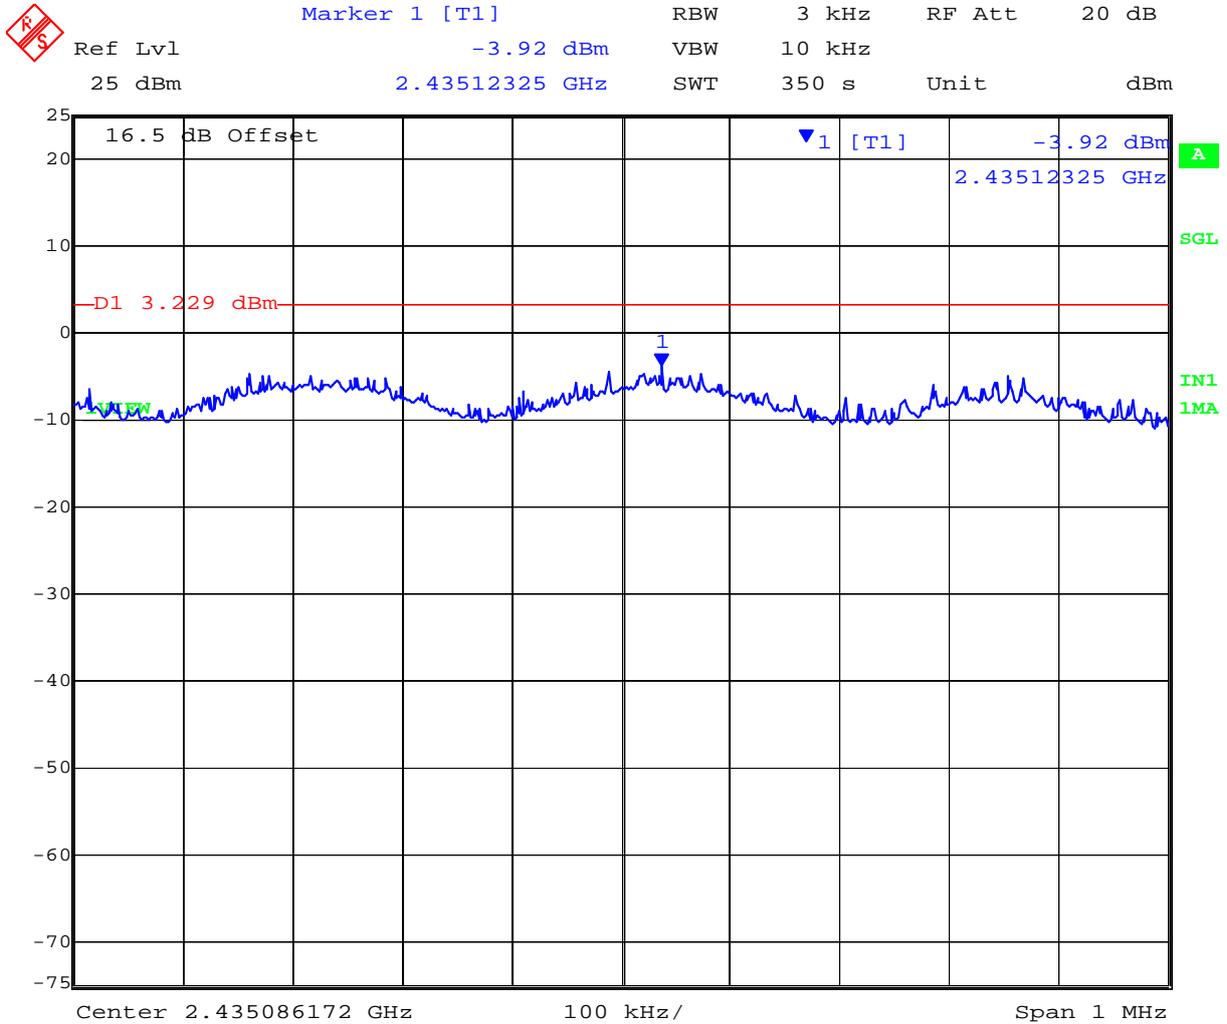

Date: 29.FEB.2012 18:14:48

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 145 of 331

TABLE OF RESULTS – 802.11a Legacy

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:			
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Σ Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5745	-0.63	-1.09	1.17	--	4.77	5.94	3.23	-2.06
5785	0.56	-1.84	1.92	--	4.77	6.69	3.23	-1.31
5825	-0.43	-2.98	0.11	--	4.77	4.88	3.23	-3.12

Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------

NOTE: above margin is calculated from the highest Power Density returned from Chain A or B or C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 146 of 331

PORT A 5,745 MHz 802.11a Legacy - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -0.63 dBm VBW 10 kHz
25 dBm 5.73874449 GHz SWT 350 s Unit dBm

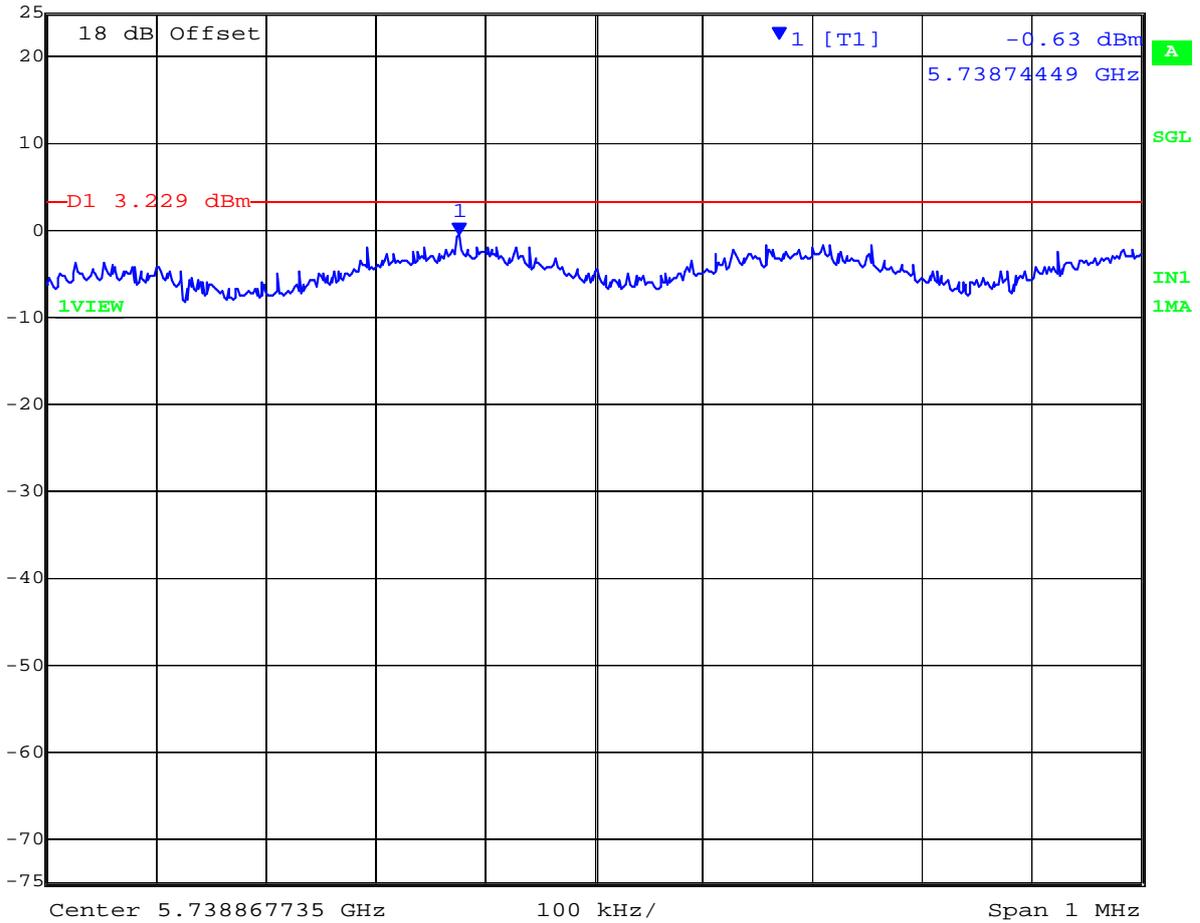

Date: 28.FEB.2012 12:03:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 147 of 331

PORT B 5,745 MHz 802.11a Legacy - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -1.09 dBm VBW 10 kHz
25 dBm 5.74937174 GHz SWT 350 s Unit dBm

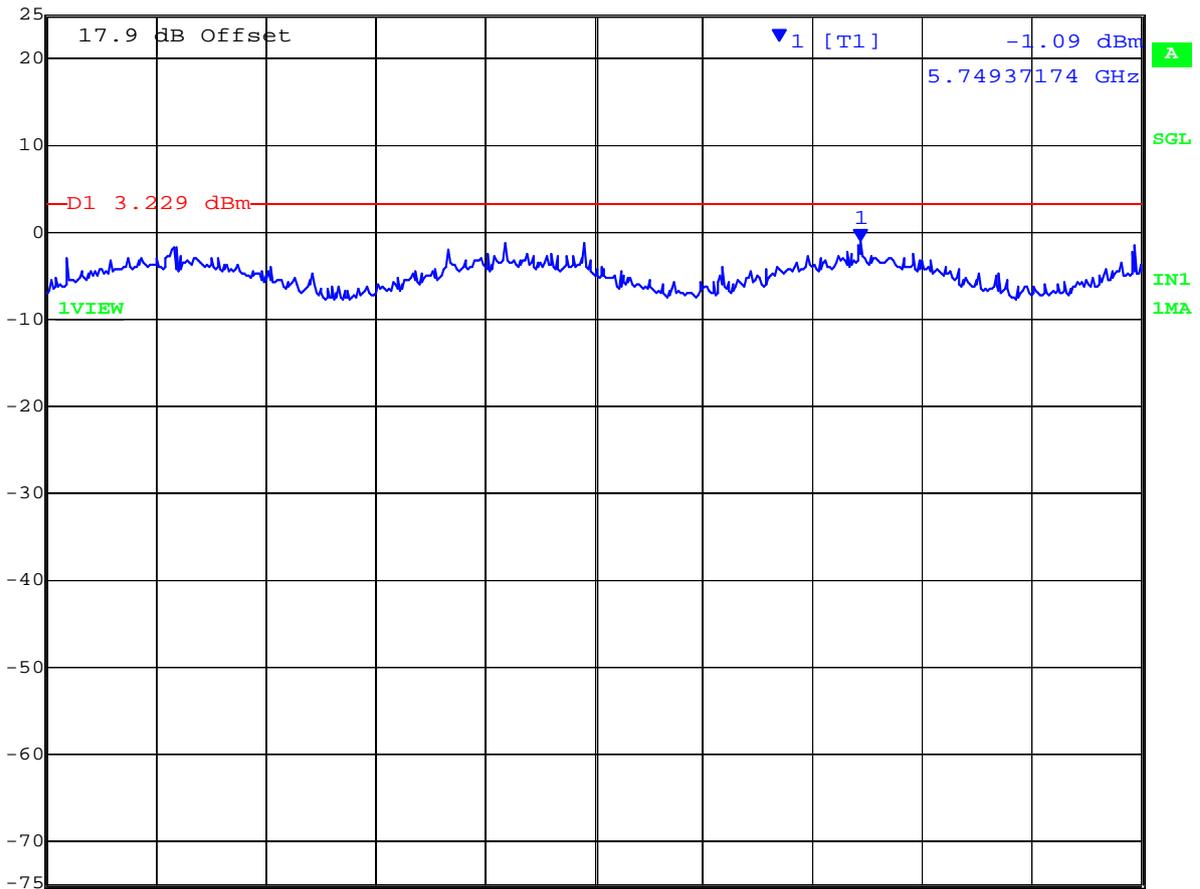


Center 5.749128257 GHz 100 kHz/ Span 1 MHz

Date: 28.FEB.2012 12:10:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,745 MHz 802.11a Legacy - Peak Power Spectral Density

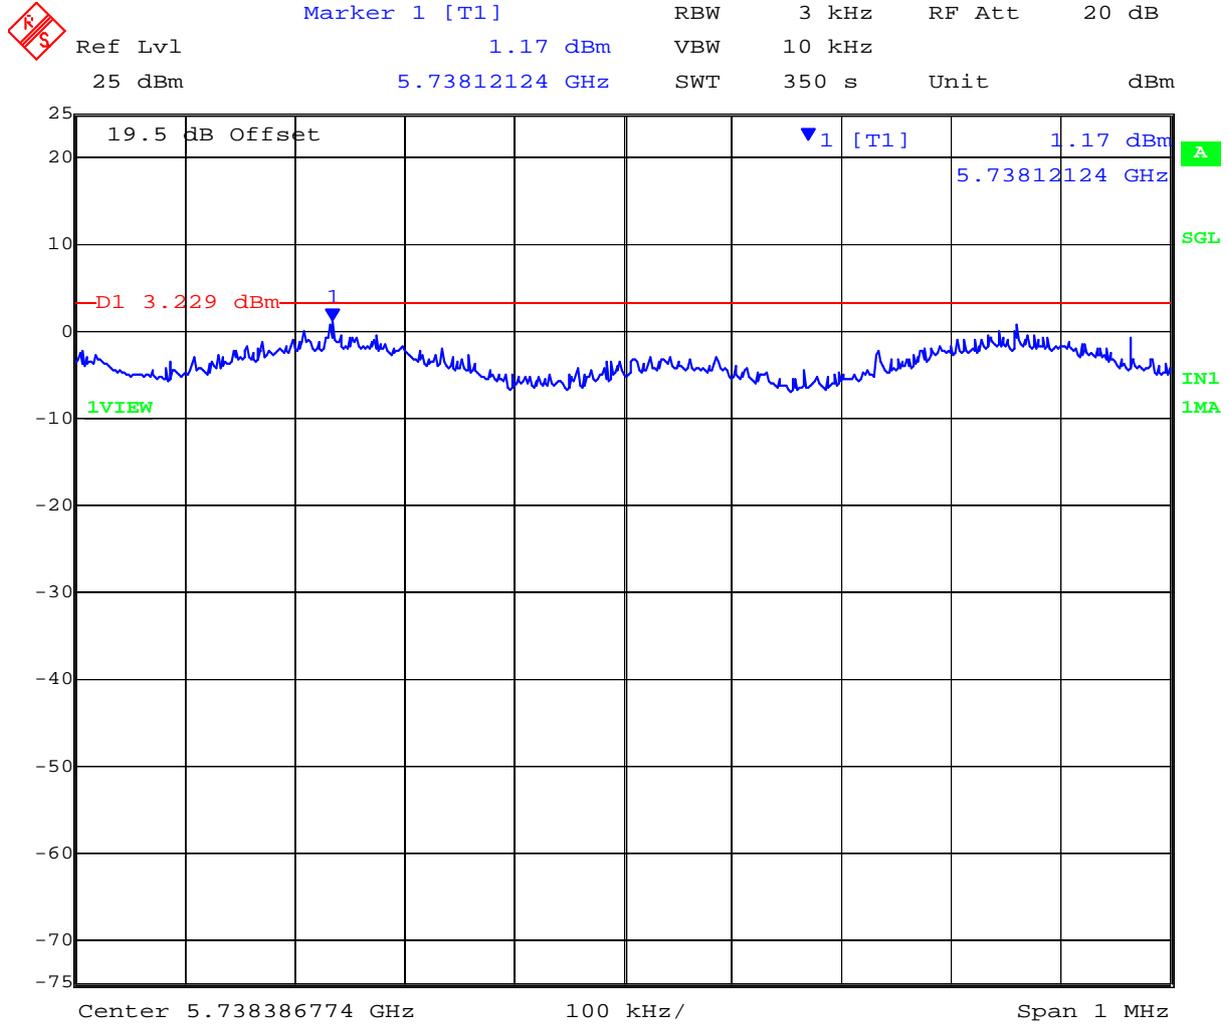


Date: 28.FEB.2012 12:16:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 149 of 331

PORT A 5,785 MHz 802.11a Legacy - Peak Power Spectral Density

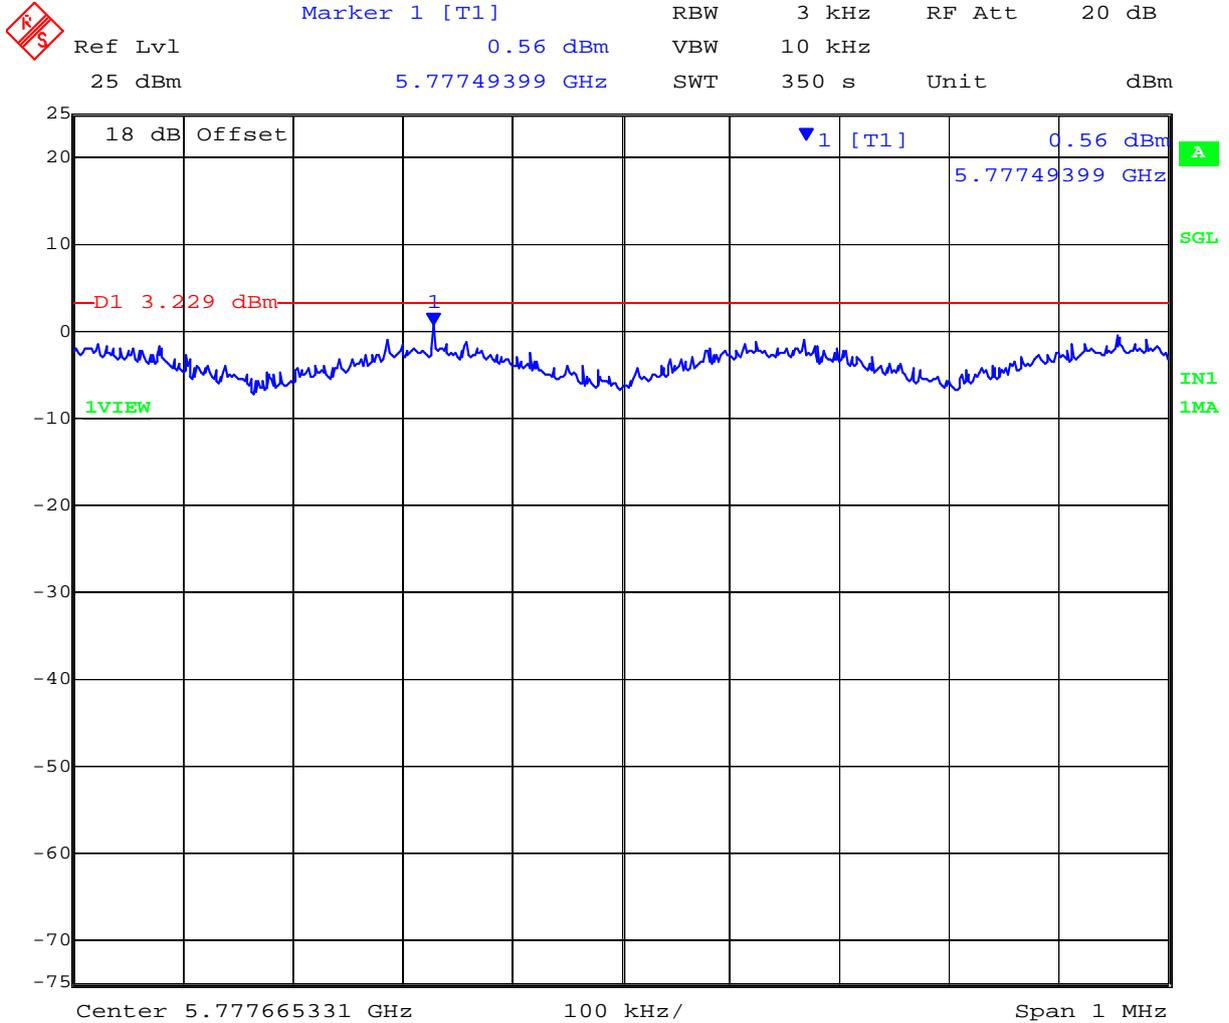

Date: 28.FEB.2012 12:32:50


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 5,785 MHz 802.11a Legacy - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -1.84 dBm VBW 10 kHz
25 dBm 5.77811924 GHz SWT 350 s Unit dBm

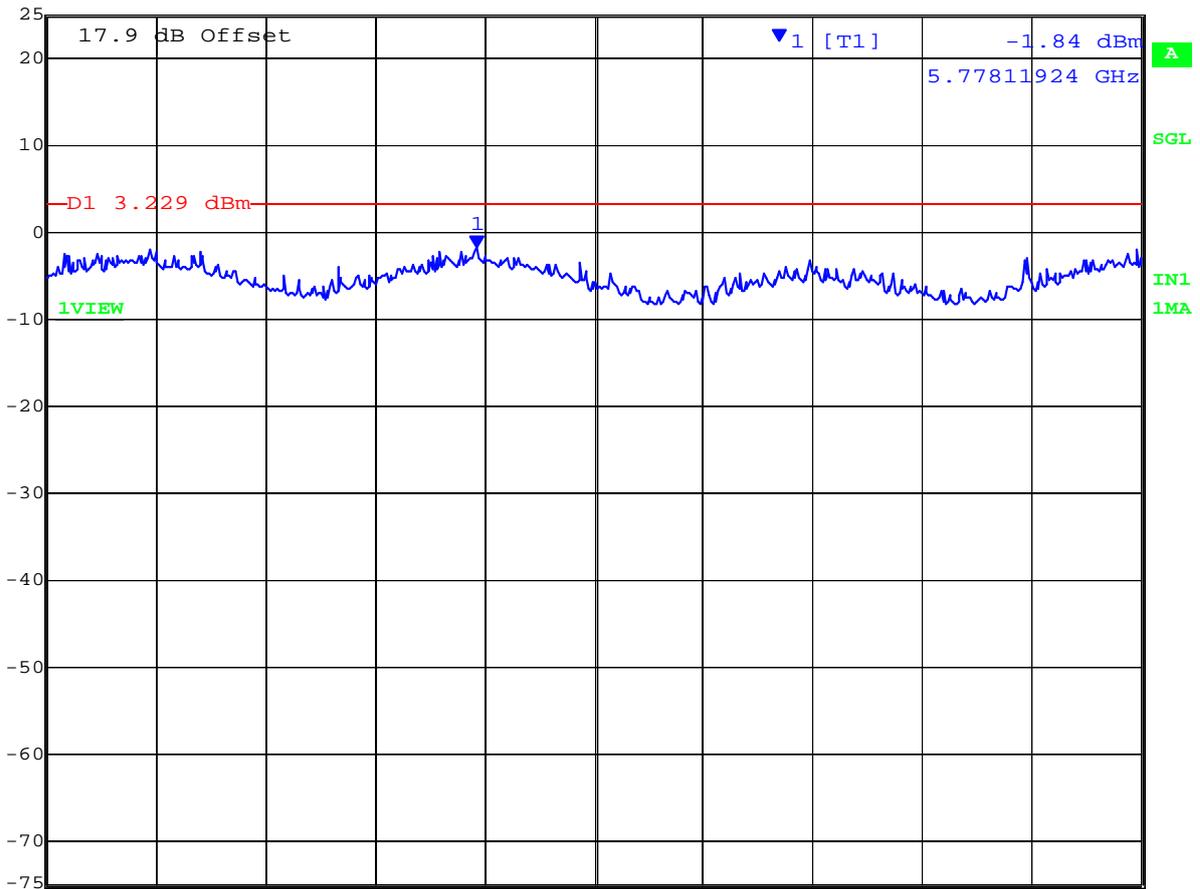

Center 5.778226453 GHz 100 kHz/ Span 1 MHz

Date: 28.FEB.2012 12:39:24


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,785 MHz 802.11a Legacy - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl 1.92 dBm VBW 10 kHz
25 dBm 5.78749399 GHz SWT 350 s Unit dBm

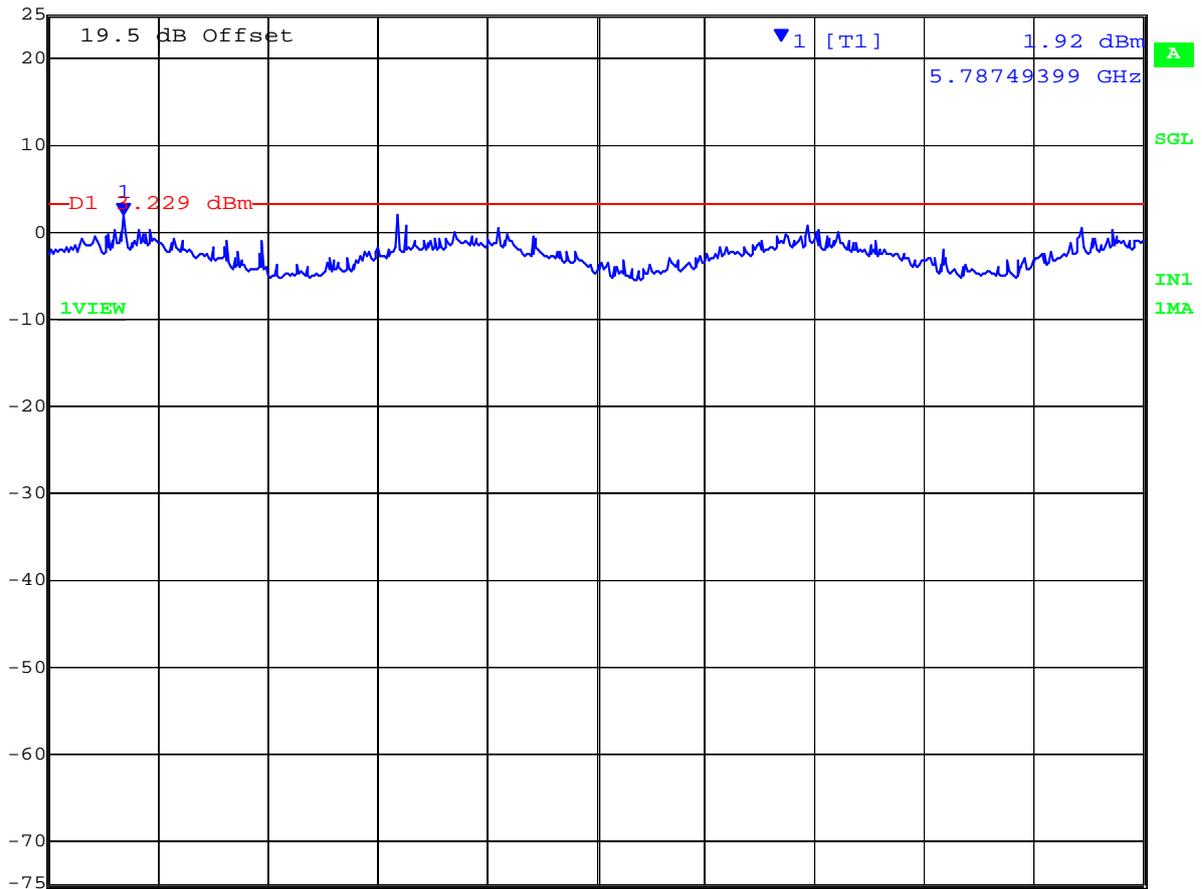

Center 5.787925852 GHz 100 kHz/ Span 1 MHz

Date: 28.FEB.2012 12:45:55


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,825 MHz 802.11a Legacy - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -0.43 dBm VBW 10 kHz
25 dBm 5.83062024 GHz SWT 350 s Unit dBm

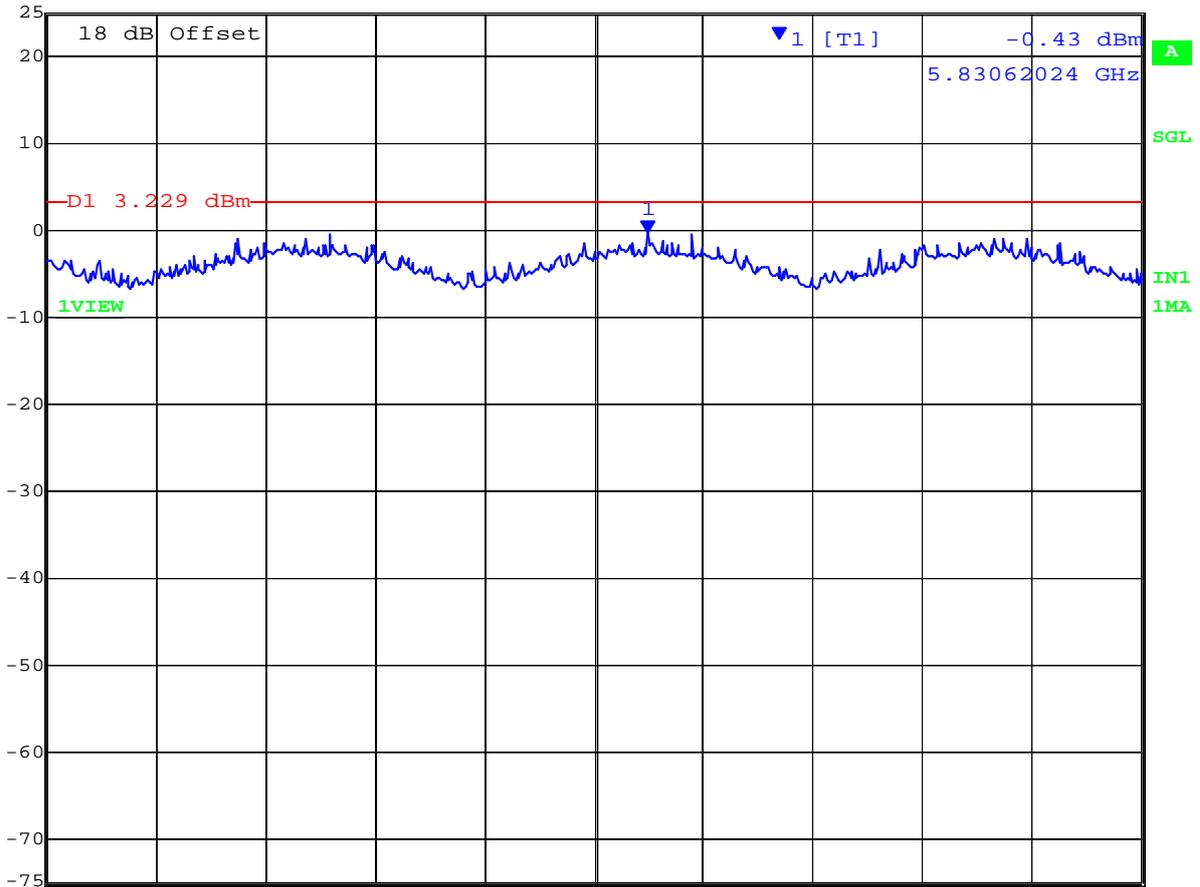

Center 5.830571142 GHz 100 kHz/ Span 1 MHz

Date: 28.FEB.2012 13:07:25


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT B 5,825 MHz 802.11a Legacy - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -2.98 dBm VBW 10 kHz
25 dBm 5.82062024 GHz SWT 350 s Unit dBm

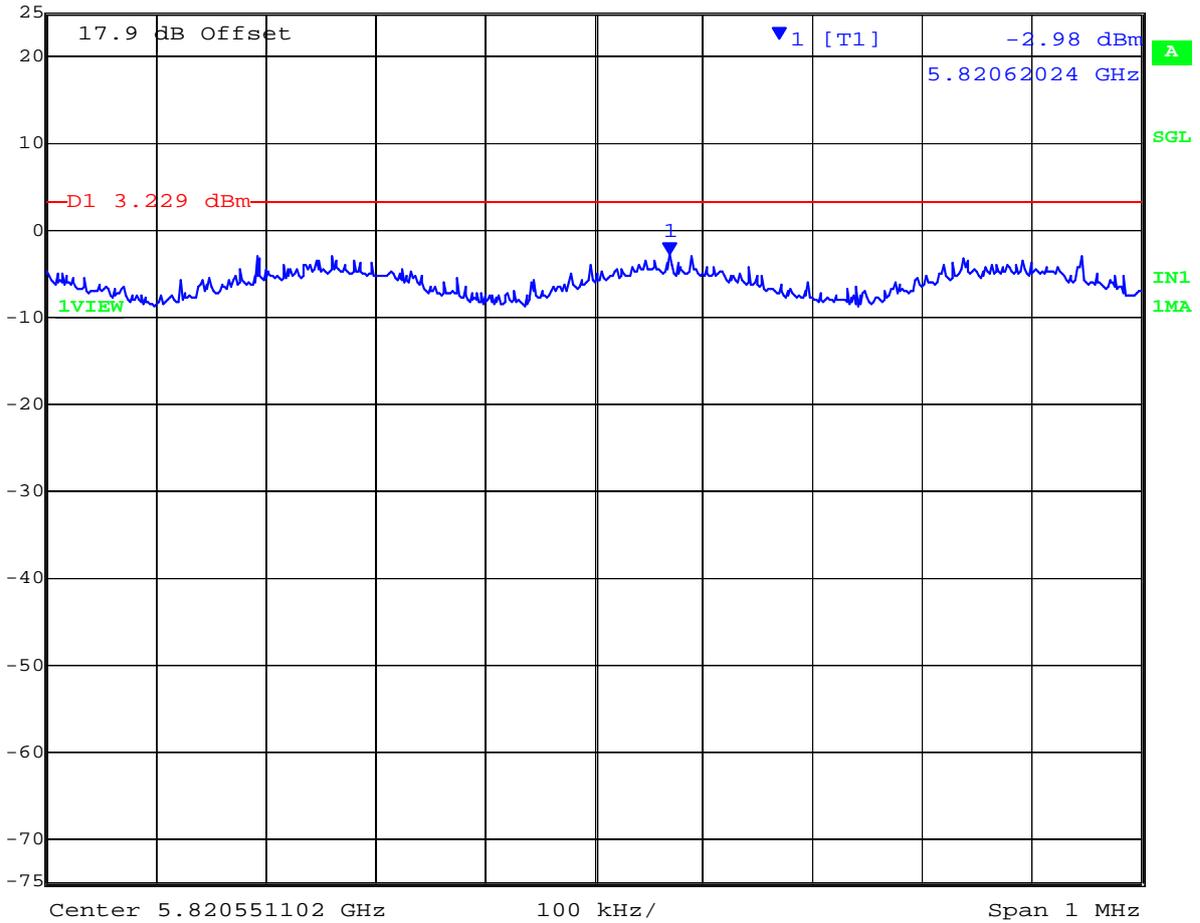

Date: 28.FEB.2012 13:13:59

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 154 of 331

PORT C 5,825 MHz 802.11a Legacy - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl 0.10 dBm VBW 10 kHz
25 dBm 5.83124349 GHz SWT 350 s Unit dBm

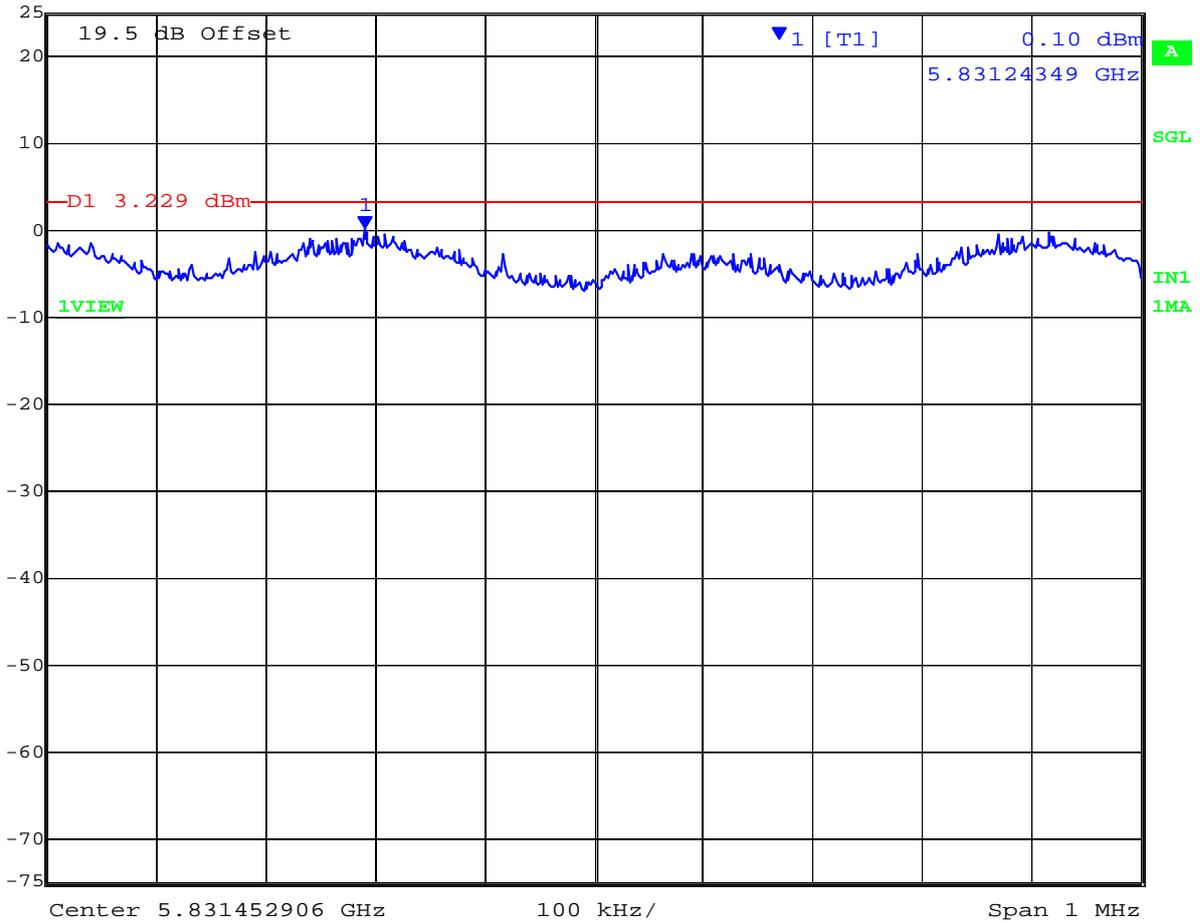

Date: 28.FEB.2012 13:20:30

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 155 of 331

TABLE OF RESULTS – 802.11n HT-20

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:			
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Σ Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5745	-1.50	-2.04	-0.06	--	4.77	4.71	3.23	-3.29
5785	-0.17	-1.84	1.10	--	4.77	5.87	3.23	-2.13
5825	0.08	-2.28	-0.37	--	4.77	4.85	3.23	-3.28

Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------

NOTE: above margin is calculated from the highest Power Density returned from Chain A or B or C

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 156 of 331

PORT A 5,745 MHz 802.11n HT-20 - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -1.50 dBm VBW 10 kHz
25 dBm 5.74124749 GHz SWT 350 s Unit dBm

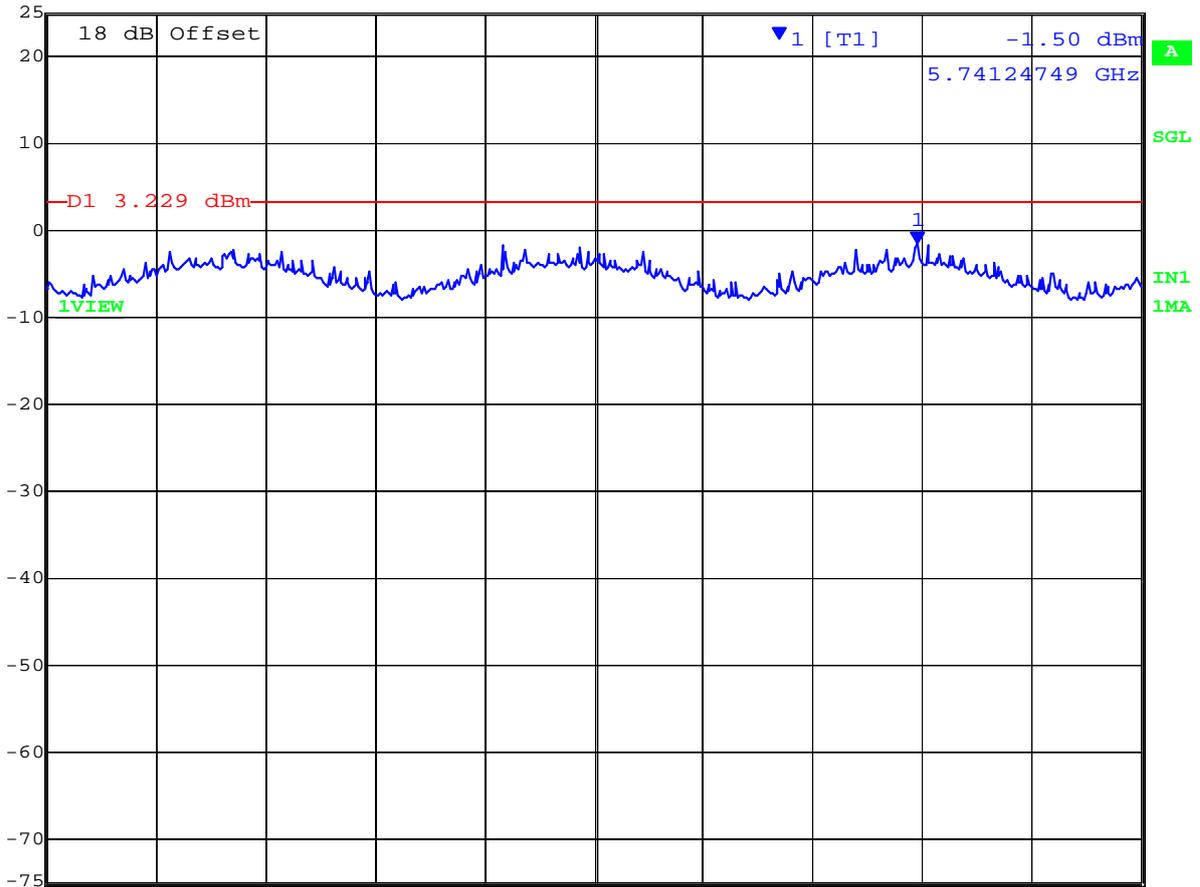

Center 5.740951904 GHz 100 kHz/ Span 1 MHz


Date: 28.FEB.2012 13:48:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 157 of 331

PORT B 5,745 MHz 802.11n HT-20 - Peak Power Spectral Density

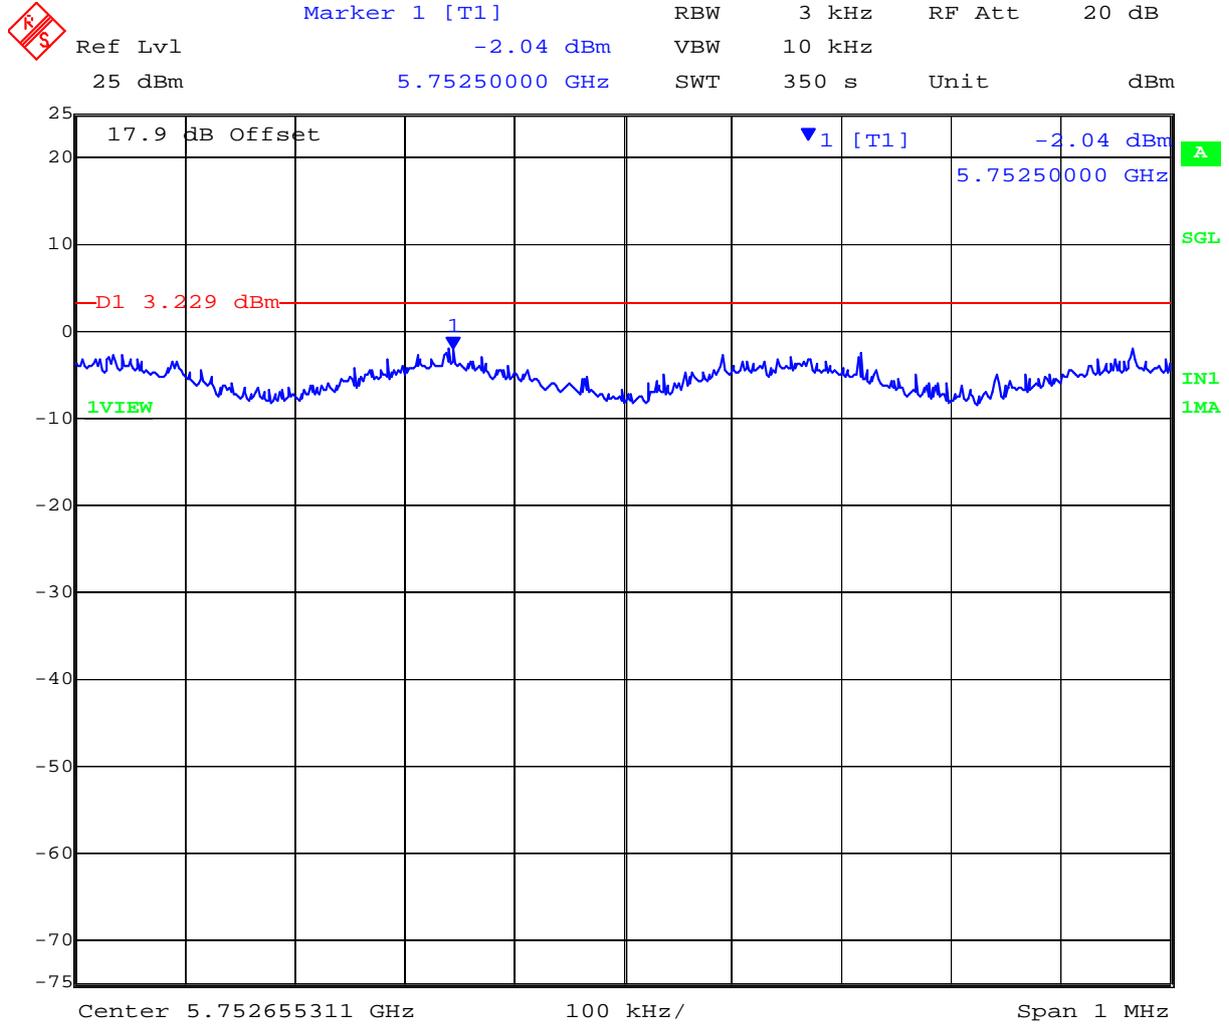

Date: 28.FEB.2012 13:55:26


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT C 5,745 MHz 802.11n HT-20 - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -0.06 dBm VBW 10 kHz
25 dBm 5.75212124 GHz SWT 350 s Unit dBm

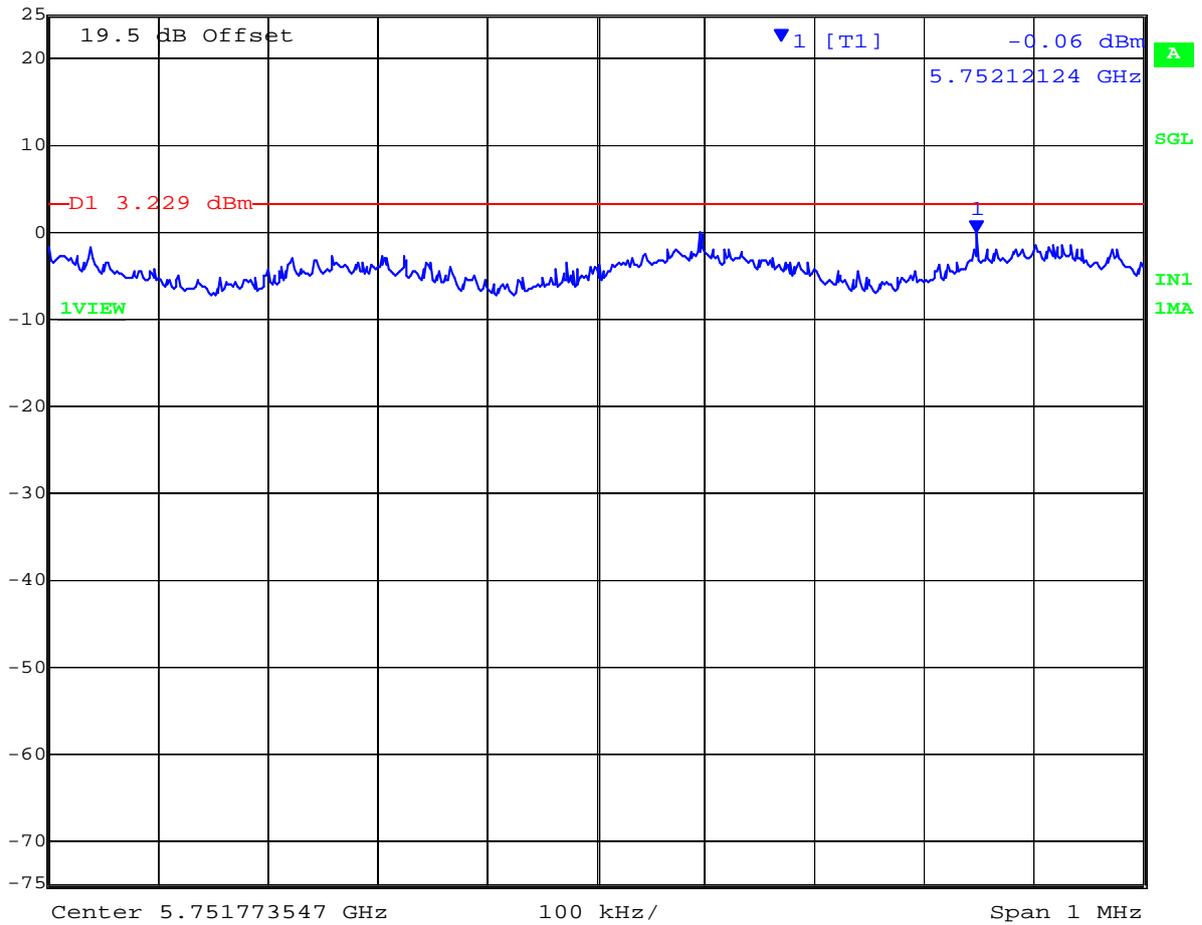

Date: 28.FEB.2012 14:01:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 159 of 331

PORT A 5,785 MHz 802.11n HT-20 - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -0.17 dBm VBW 10 kHz
25 dBm 5.78124349 GHz SWT 350 s Unit dBm

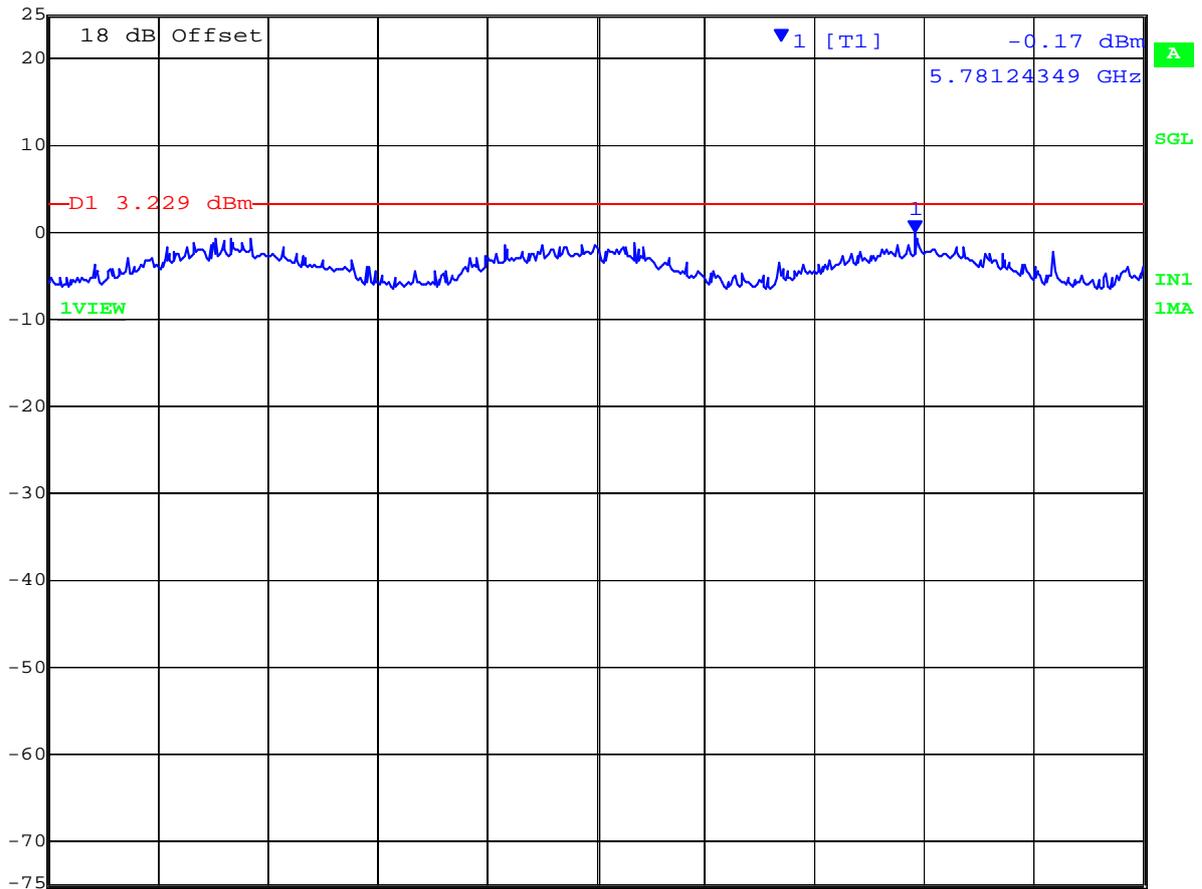

Center 5.780951904 GHz 100 kHz/ Span 1 MHz

Date: 28.FEB.2012 14:19:46

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 160 of 331

PORT B 5,785 MHz 802.11n HT-20 - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -1.84 dBm VBW 10 kHz
25 dBm 5.77966433 GHz SWT 350 s Unit dBm

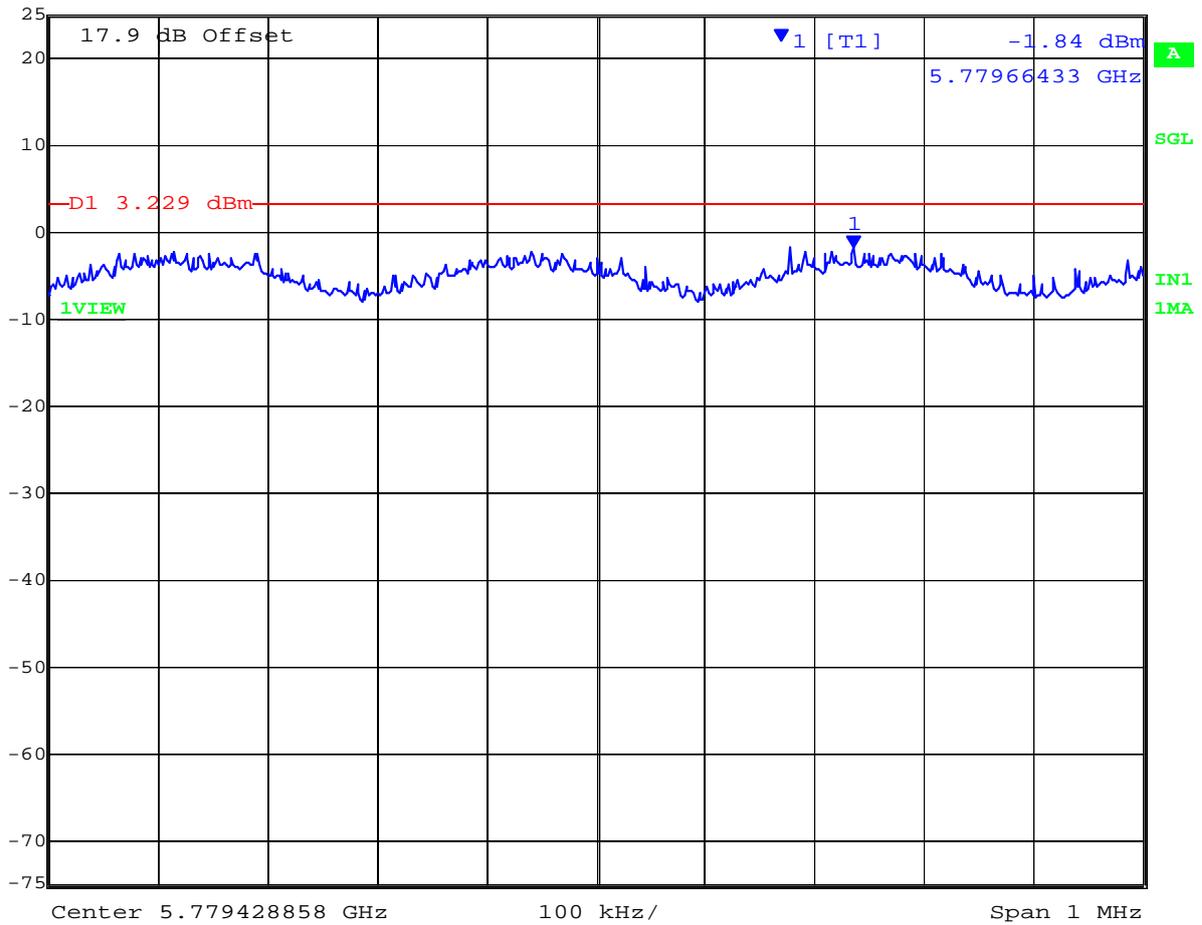

Date: 28.FEB.2012 14:26:20

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 161 of 331

PORT C 5,785 MHz 802.11n HT-20 - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl 1.10 dBm VBW 10 kHz
25 dBm 5.78062024 GHz SWT 350 s Unit dBm

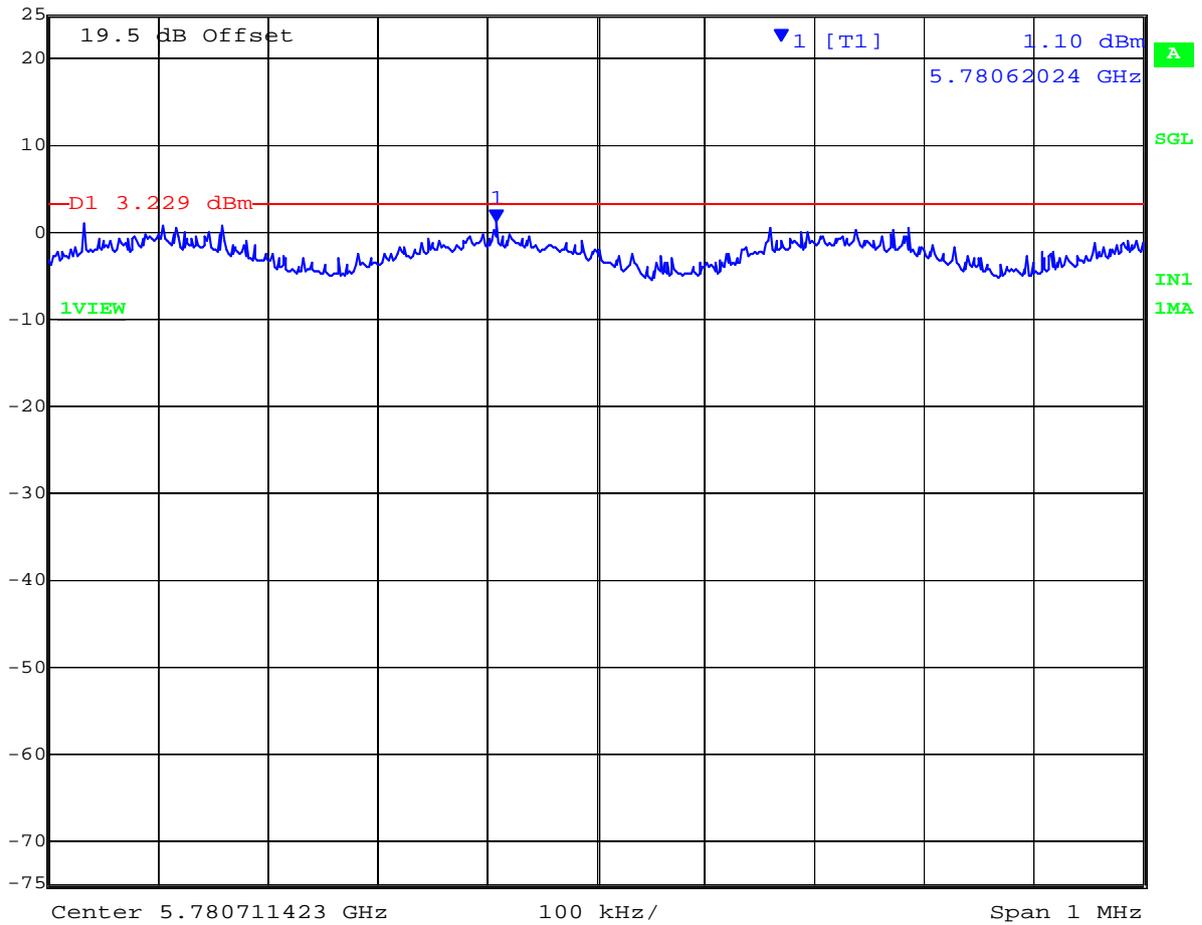


Date: 28.FEB.2012 14:32:50

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,825 MHz 802.11n HT-20 - Peak Power Spectral Density

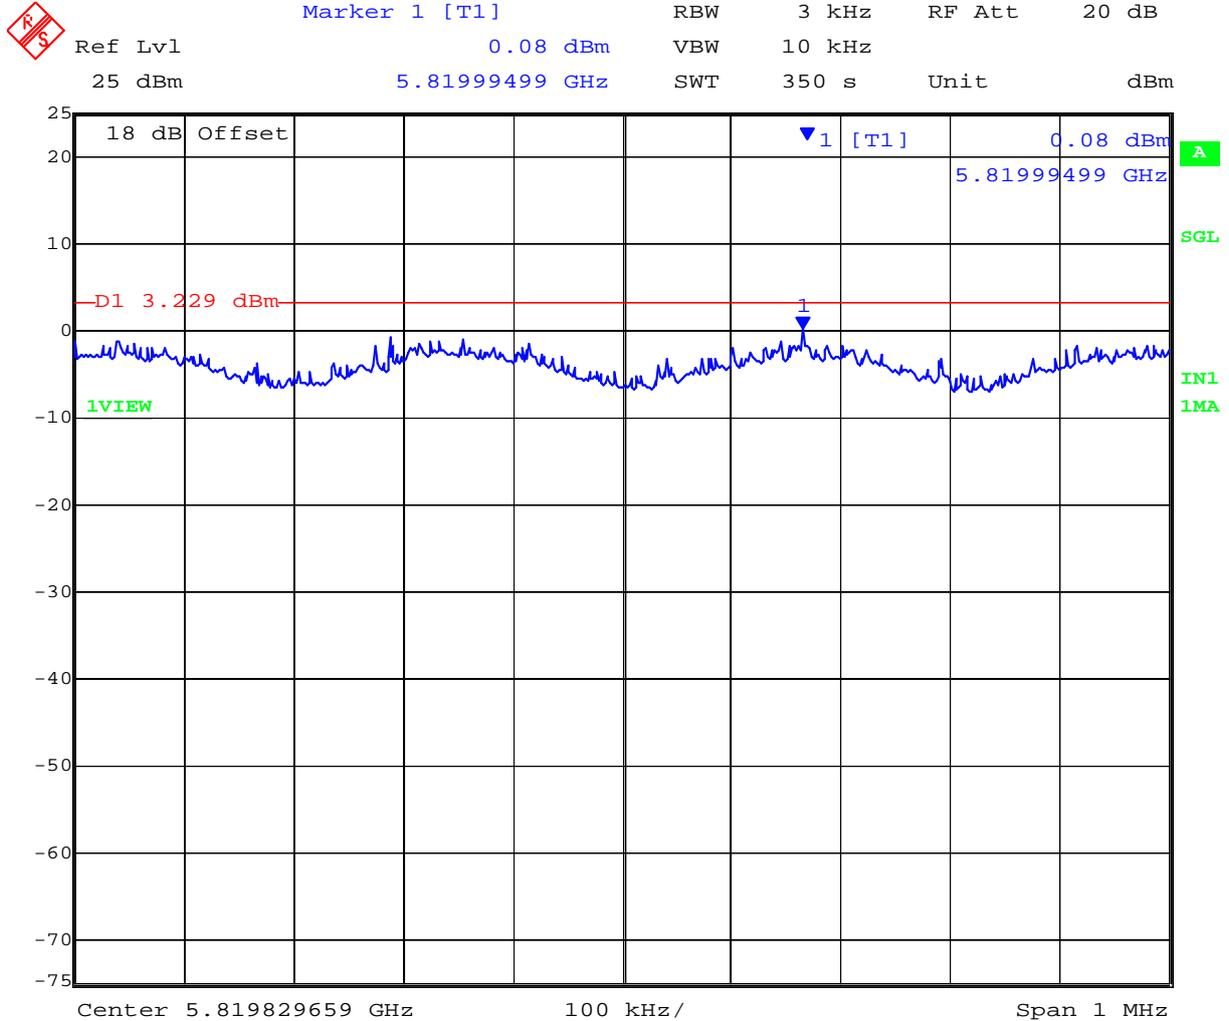


Date: 28.FEB.2012 15:01:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 163 of 331

PORT B 5,825 MHz 802.11n HT-20 - Peak Power Spectral Density

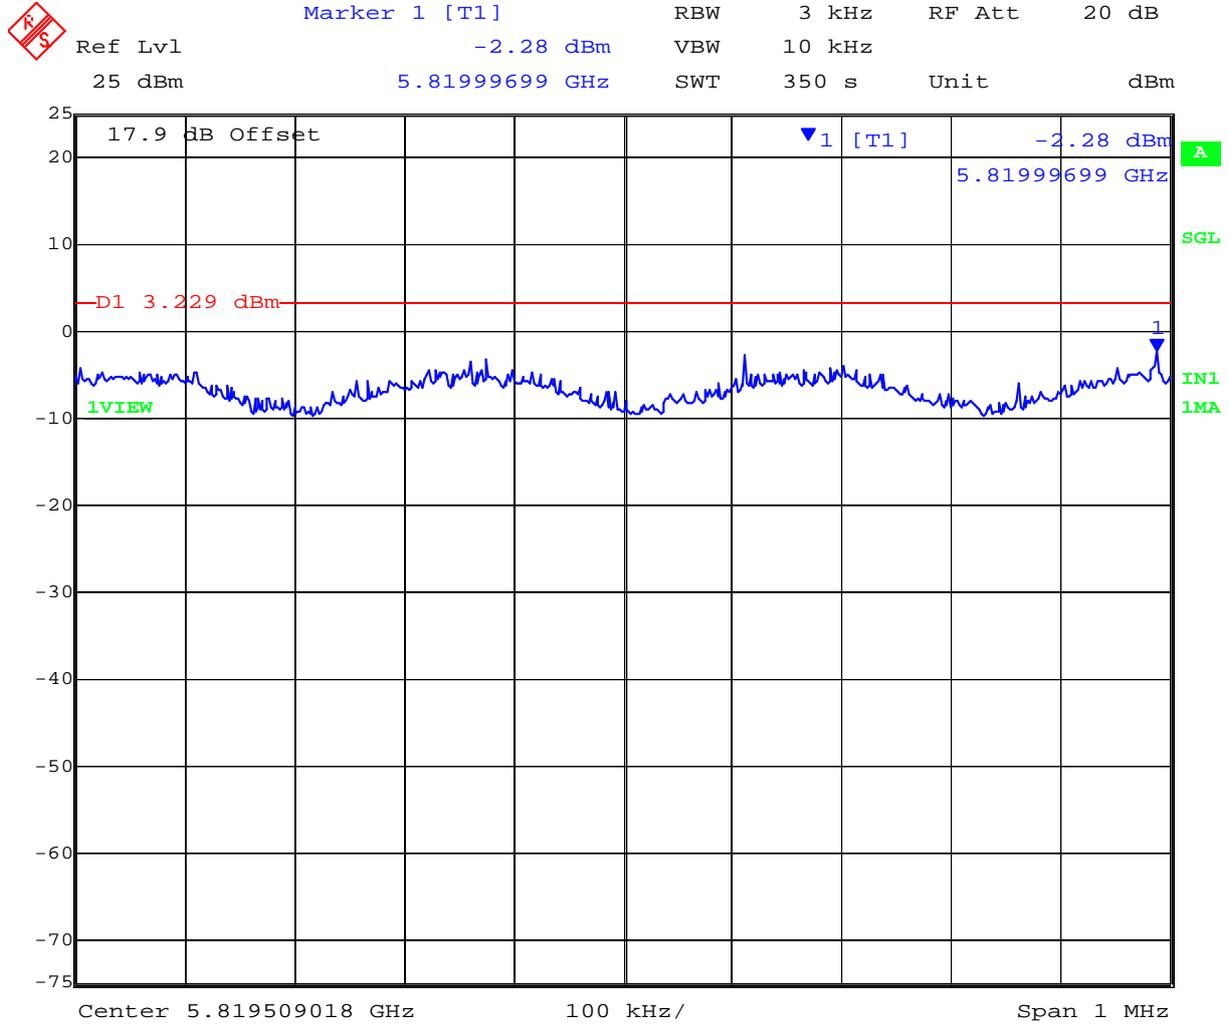


Date: 28.FEB.2012 15:07:39

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 164 of 331

PORT C 5,825 MHz 802.11n HT-20 - Peak Power Spectral Density

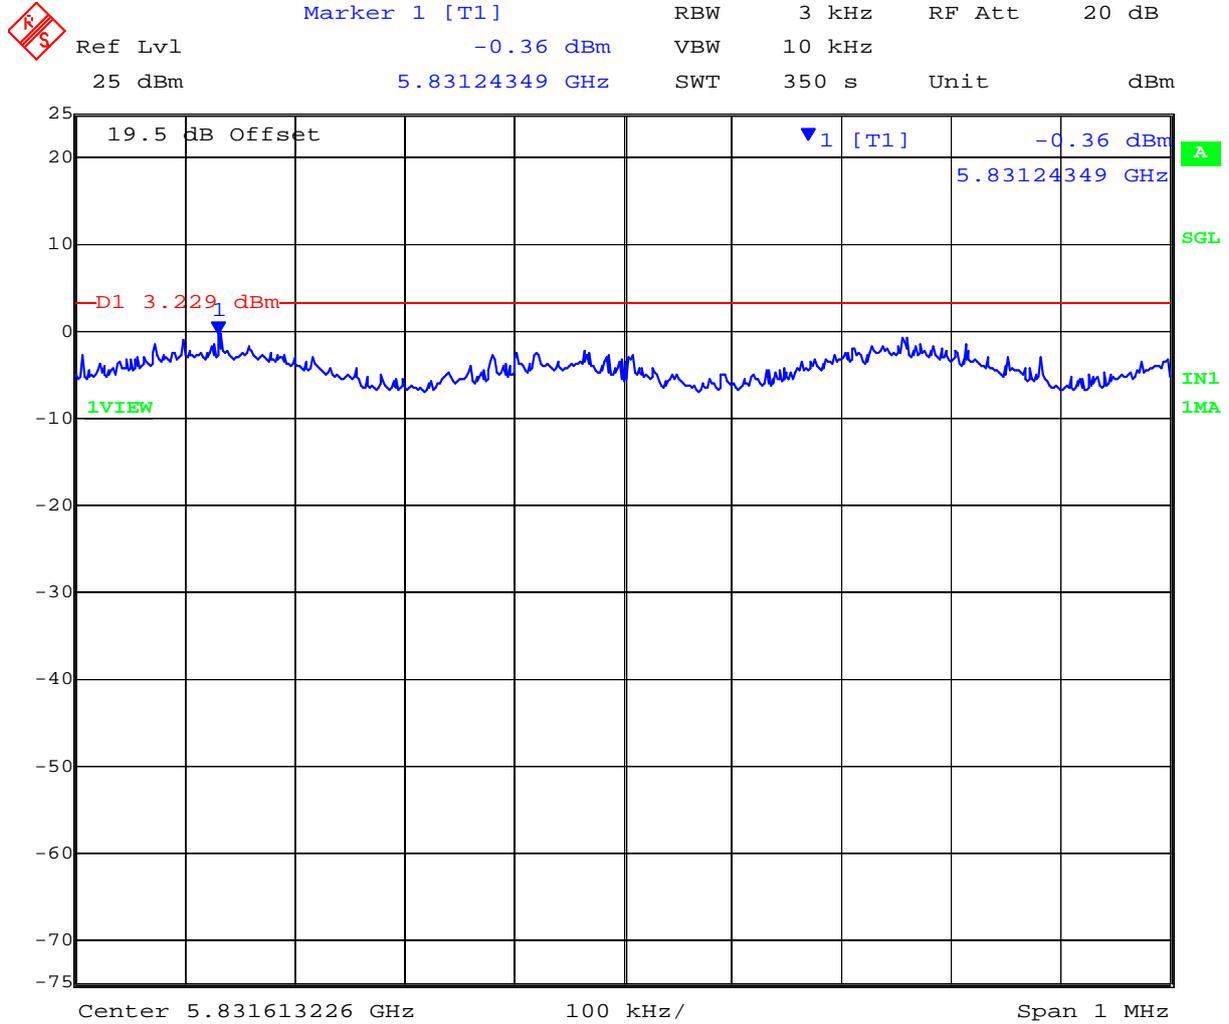

Date: 28.FEB.2012 15:14:11

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 165 of 331

TABLE OF RESULTS – 802.11n HT-40

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:			
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5755	-5.18	-6.27	-3.99	--	4.77	0.78	3.23	-7.22
5795	-3.46	-4.28	-0.96	--	4.77	3.81	3.23	-4.19

Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------

NOTE: above margin is calculated from the highest Power Density returned from Chain A or B or C


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 5,755 MHz 802.11n HT-40 - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -5.18 dBm VBW 10 kHz
25 dBm 5.73811924 GHz SWT 350 s Unit dBm

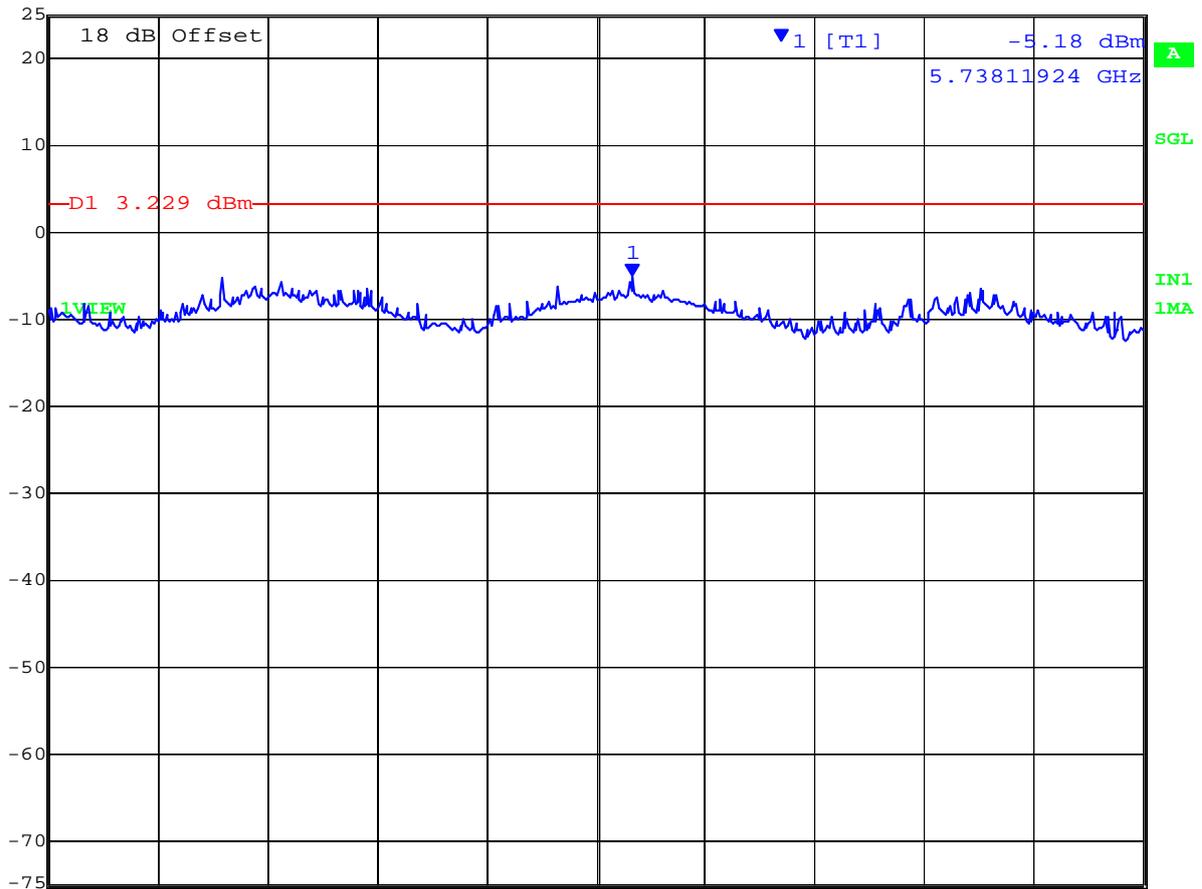

Center 5.738086172 GHz 100 kHz/ Span 1 MHz


Date: 28.FEB.2012 15:56:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 167 of 331

PORT B 5,755 MHz 802.11n HT-40 - Peak Power Spectral Density

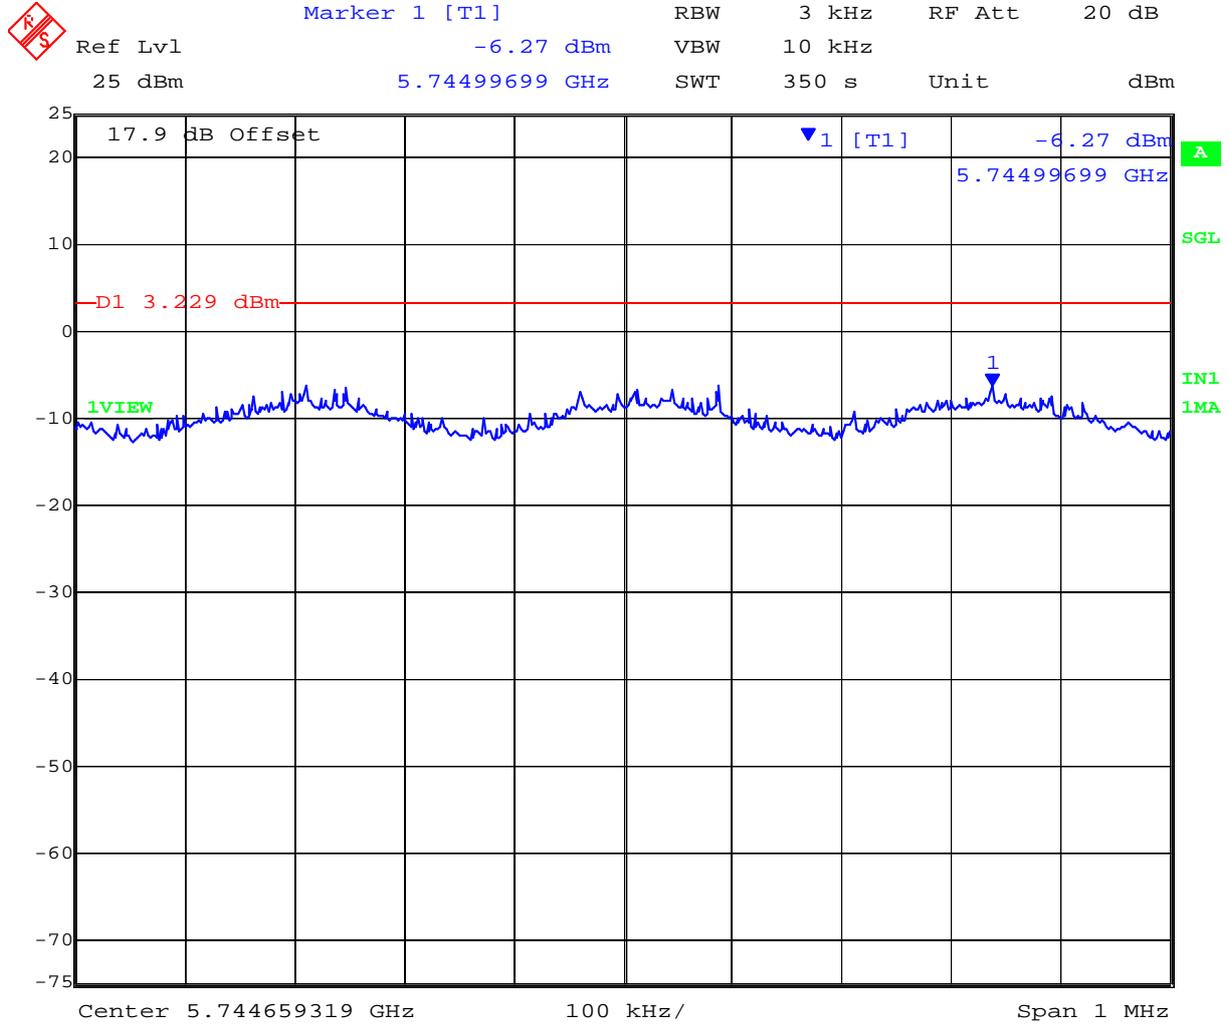

Date: 28.FEB.2012 16:02:59

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 168 of 331

PORT C 5,755 MHz 802.11n HT-40 - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -3.99 dBm VBW 10 kHz
25 dBm 5.73999499 GHz SWT 350 s Unit dBm

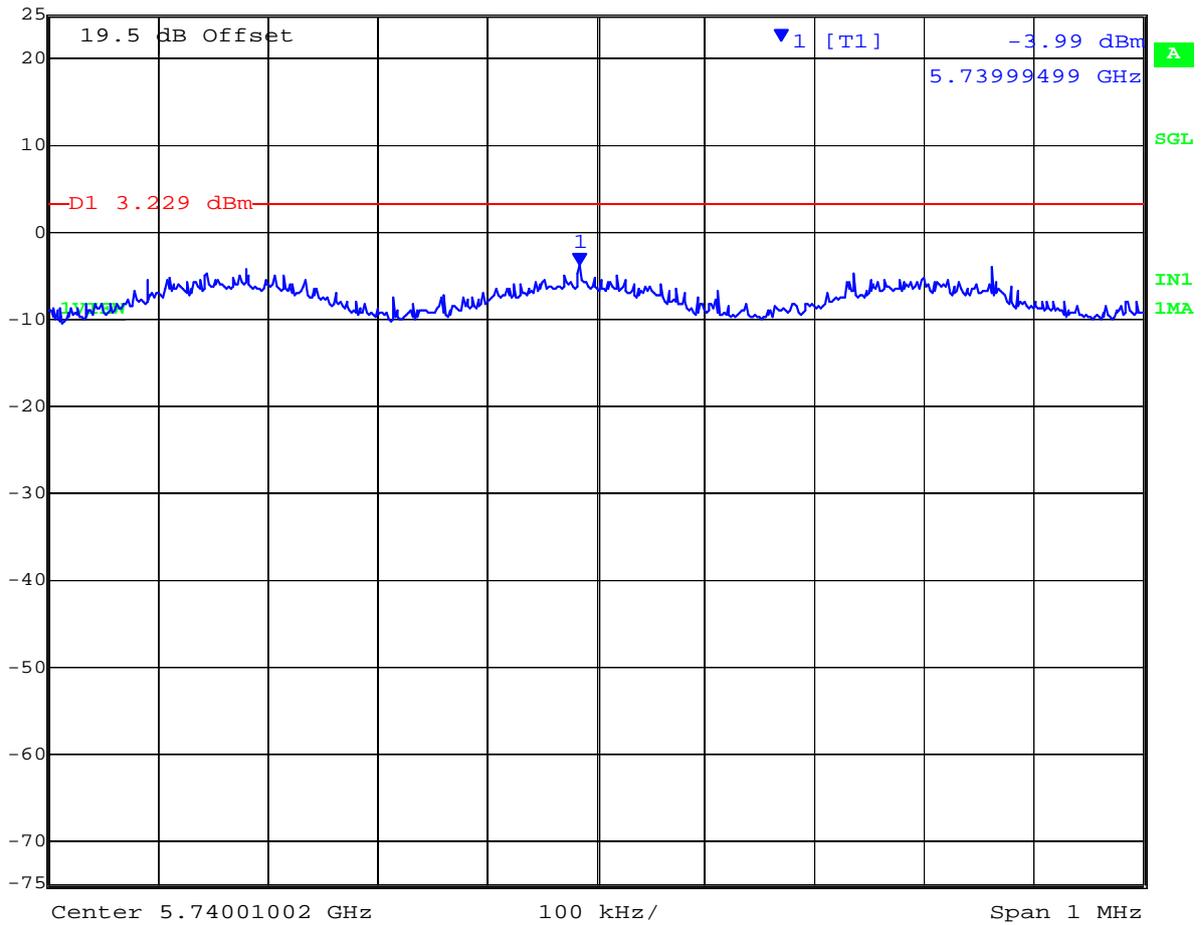


Date: 28.FEB.2012 16:09:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 169 of 331

PORT A 5,795 MHz 802.11n HT-40 - Peak Power Spectral Density

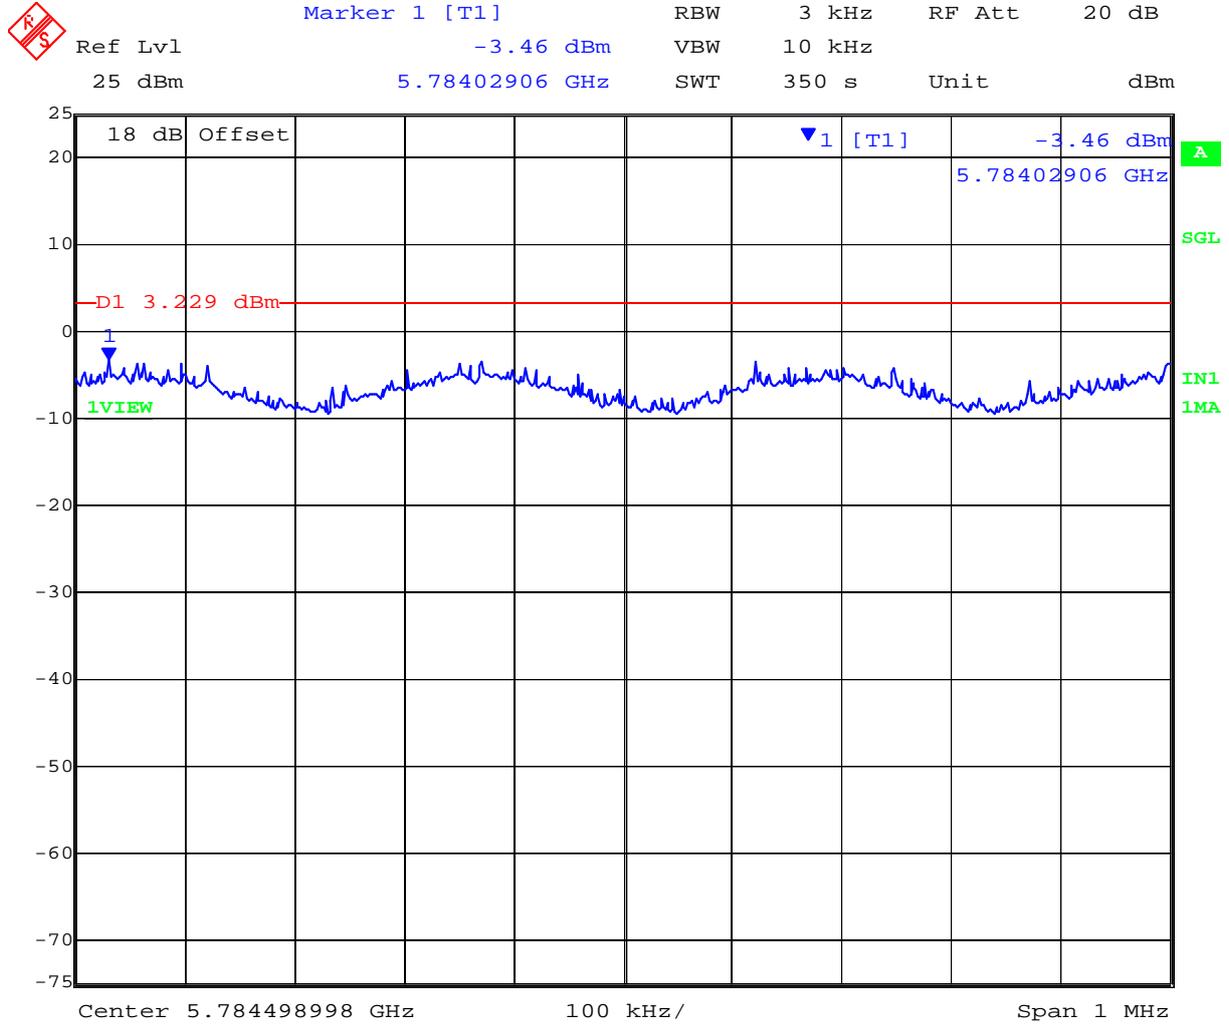


Date: 28.FEB.2012 16:29:53

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 170 of 331

PORT B 5,795 MHz 802.11n HT-40 - Peak Power Spectral Density

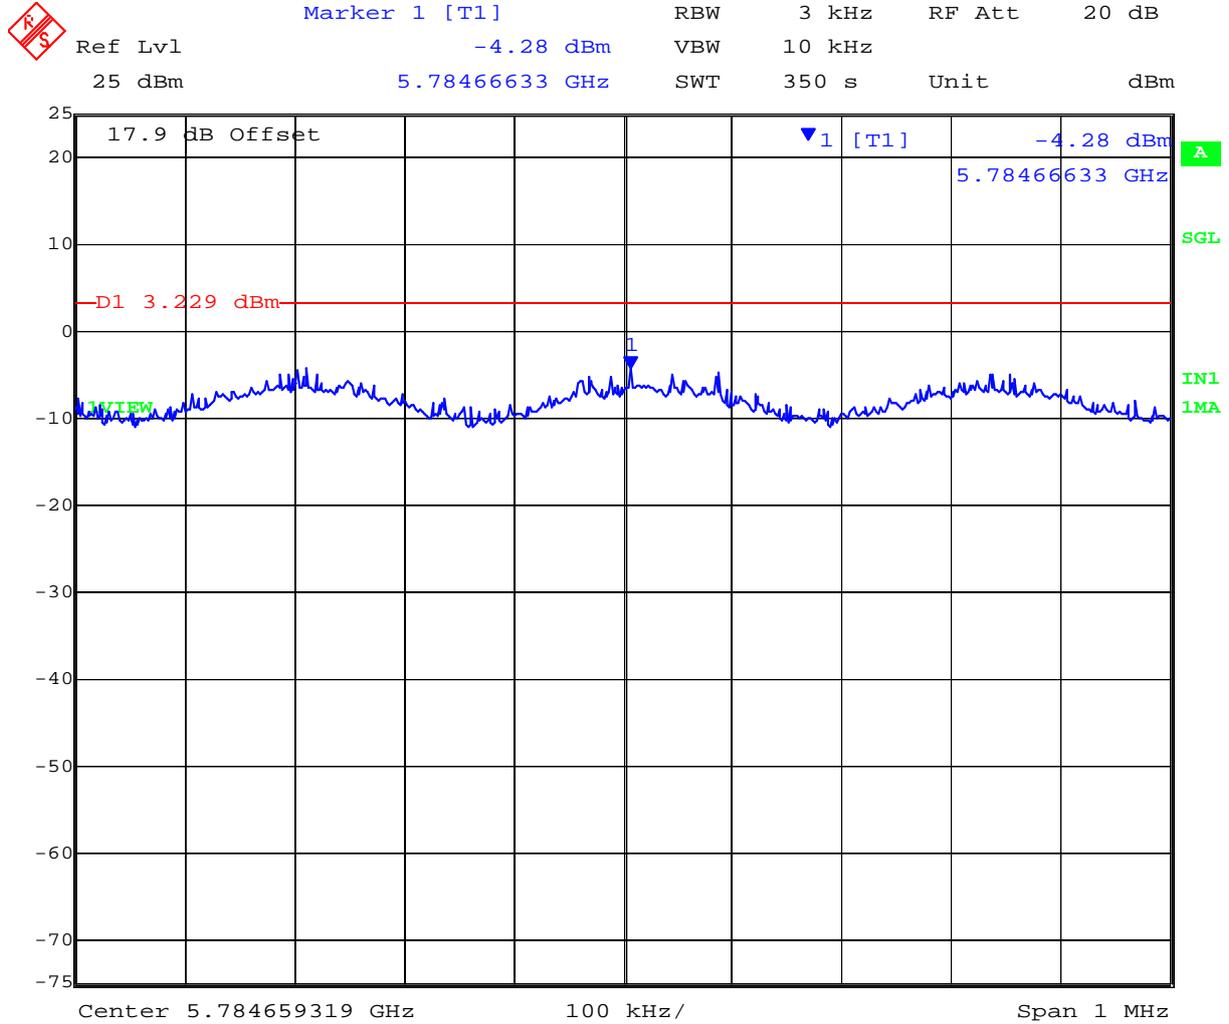

Date: 28.FEB.2012 16:36:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 171 of 331

PORT C 5,795 MHz 802.11n HT-40 - Peak Power Spectral Density



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -0.96 dBm VBW 10 kHz
25 dBm 5.78999699 GHz SWT 350 s Unit dBm

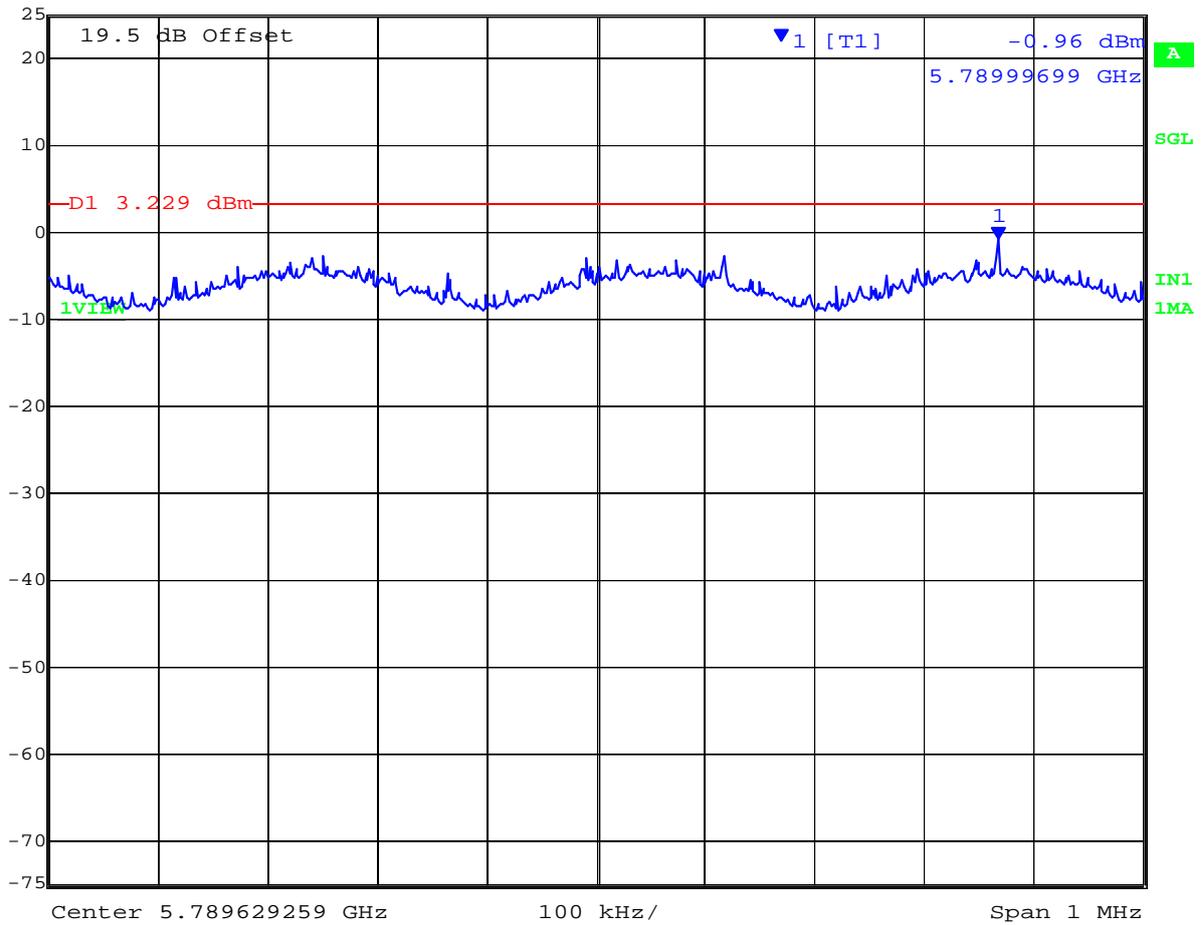

Date: 28.FEB.2012 16:43:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 172 of 331

Specification

Peak Power Spectral Density Limits

§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission

RSS-210 §A8.2(2) The transmitter power spectral density (into the antenna) shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0 second duration.

Laboratory Measurement Uncertainty for Spectral Density

Measurement uncertainty

±1.33 dB

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.4. Maximum Permissible Exposure

FCC, Part 15 Subpart C §15.247(i)

Industry Canada RSS-Gen §5.5

Calculations for Maximum Permissible Exposure Levels

Power Density = Pd (mW/cm²) = EIRP/(4πd²)

EIRP = P * G

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

Numeric Gain = 10 ^ (G (dBi)/10)

The Wavion WBSn-2450-O/-S Wireless LAN Access Point has three transmitters in each frequency band. The peak power in the table below is calculated by assuming a worst case scenario where all transmitters are operating simultaneously on the same channel therefore the Σ of all chain power was used to calculate MPE.

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm²

Freq. Band (GHz)	Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm ² Limit(cm)	Minimum Separation Distance (cm)
2.4 OMNI	7.4	5.5	+26.84	483.1	14.54	20.0*
2.4 SECTOR	12.0	15.8	+26.28	424.6	23.11	23.11
5.8 OMNI	8.5	7.1	+27.99	629.5	18.86	20.0*
5.8 SECTOR	14.0	25.1	+27.48	559.8	33.34	33.34

*Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

Specification - Maximum Permissible Exposure Limits

§15.247(i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency levels in excess of the Commission's guidelines.

FCC §1.1310 Limit = 1mW / cm² from 1.310 Table 1

RSS-Gen §5.5 Before equipment certification is granted, the applicable requirements of RSS-102 shall be met

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.5. Conducted Spurious Emissions

FCC, Part 15 Subpart C §15.247(d); 15.205; 15.209
Industry Canada RSS-210 §A8.5, §2.2
Industry Canada RSS-Gen 4.7

Test Procedure

Conducted emissions were measured at a limit of 20 dB below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Emissions at the band edge were measured and recorded. Measurements were made while EUT was operating in transmit mode of operation at the appropriate center frequency.

Test Measurement Set up

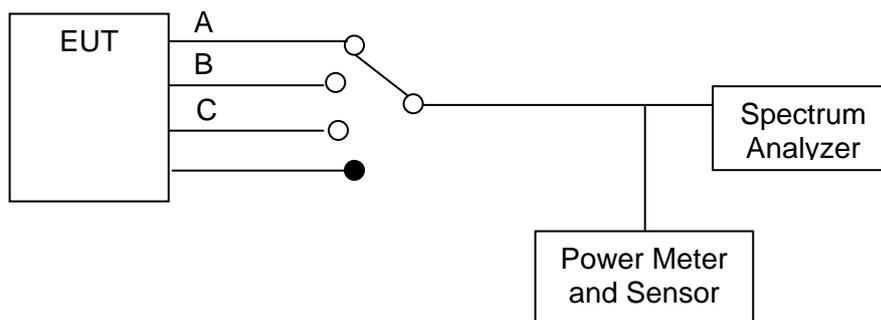

Band-edge measurement test configuration

Measurement Results of Conducted Spurious Emissions

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power

NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add 10 log (N) dB was implemented



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 175 of 331

Conducted Spurious Emission Results

Measurements were performed with the transmitter tuned to the channel closest to the band-edge being measured. All emissions were maximized during measurement. Limits which were derived from the band-edge measurements provided below are drawn on each plot.

TABLE OF RESULTS – 802.11b – Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11b	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A dBi		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
2412.000	30.00	26000.00	-42.15	-7.50	-42.49	-8.38	-42.31	-7.92		
2437.000	30.00	26000.00	-43.13	-6.84	-42.55	-8.87	-42.69	-8.85		
2462.000	30.00	26000.00	-43.06	-8.03	-43.35	-7.83	-42.67	-7.01		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
2412.000	2400.00	-35.99	-6.99	-33.97	-7.39	-36.28	-7.29		
2462.000	2483.50	-49.30	-6.75	-49.27	-6.67	-48.61	-6.07		

BE: Maximum Band edge emission found


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

Note: Limit is based on 20dB down from fundamental emissions


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11b - Conducted Spurious Emissions at the 2,400 MHz Band Edge

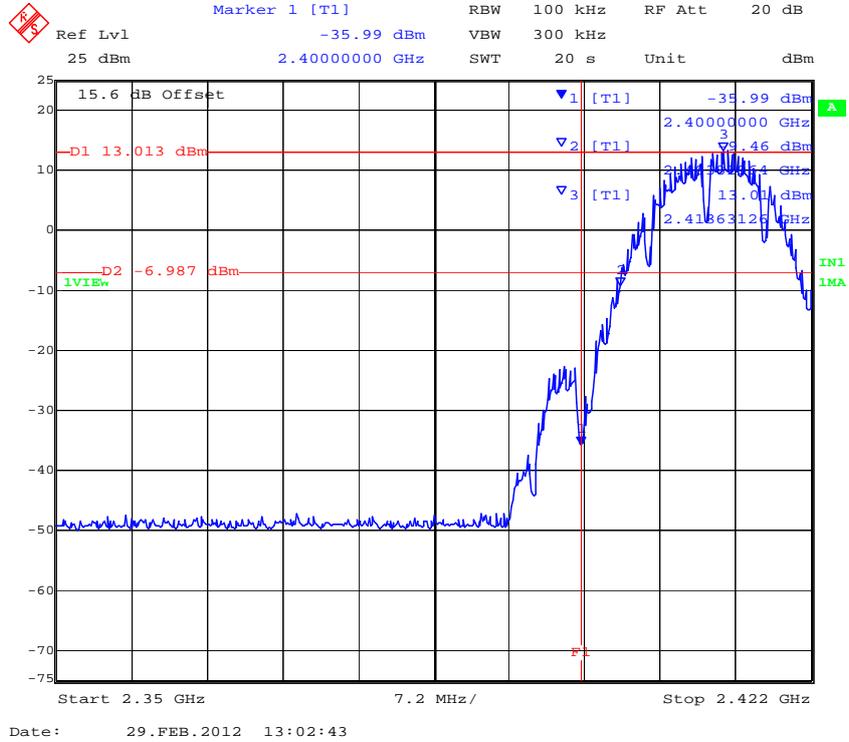

PORT B 802.11b - Conducted Spurious Emissions at the 2,400 MHz Band Edge

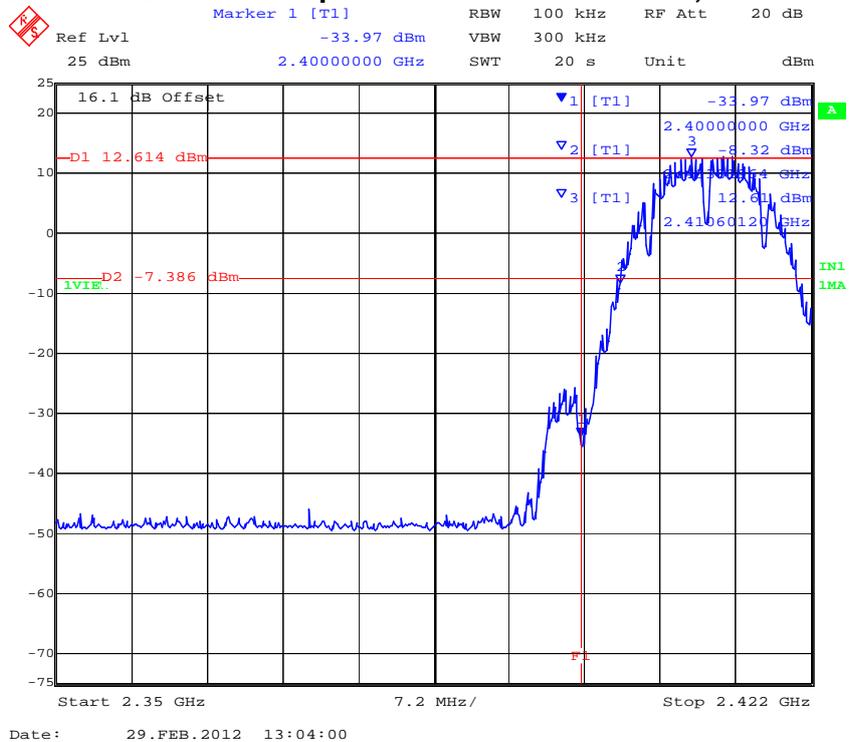


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 177 of 331


PORT C 802.11b - Conducted Spurious Emissions at the 2,400 MHz Band Edge

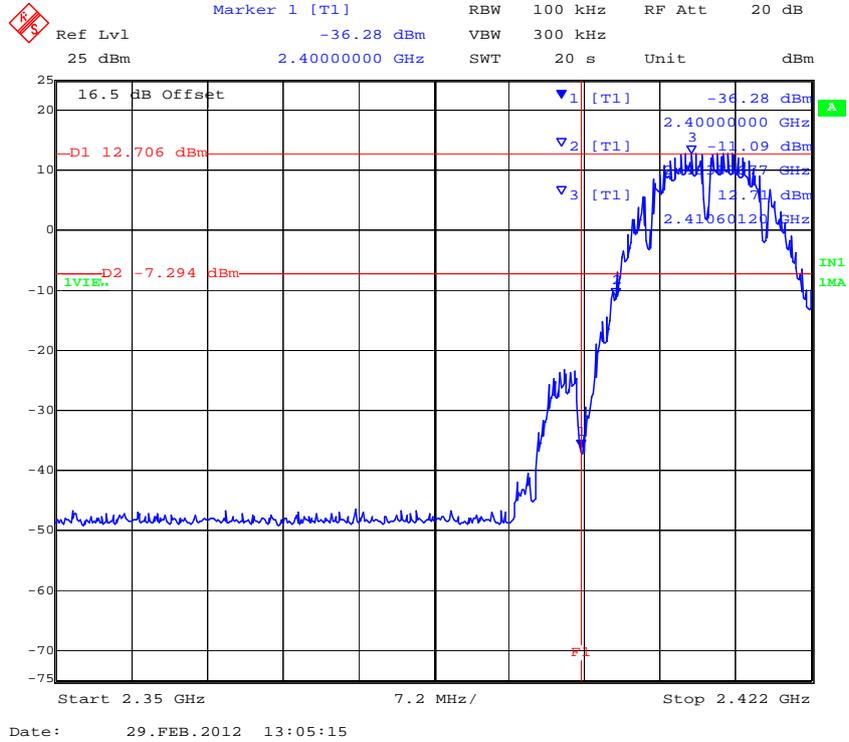


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11b - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

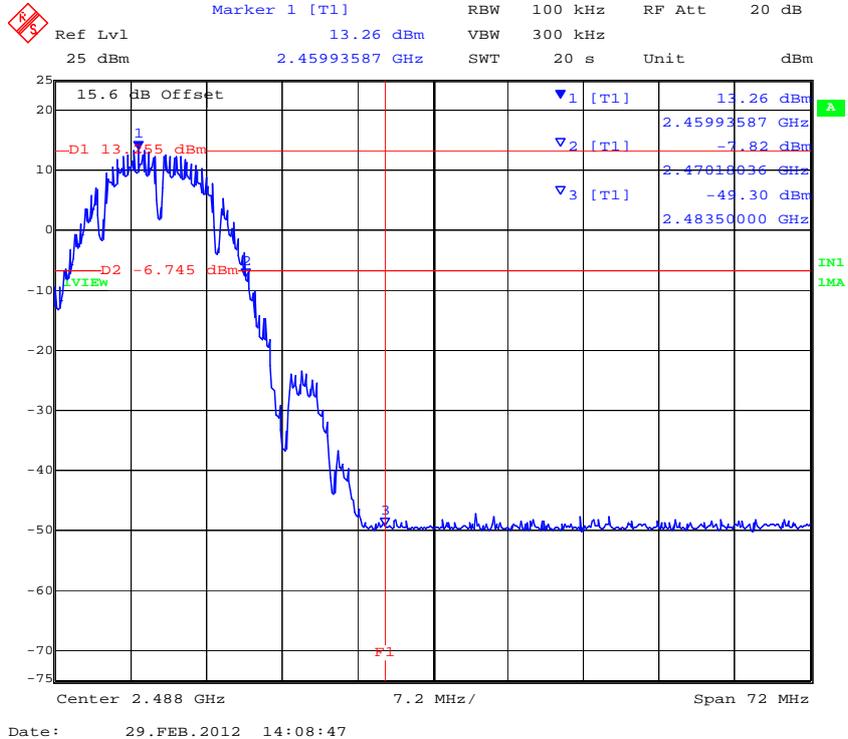

PORT B 802.11b - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

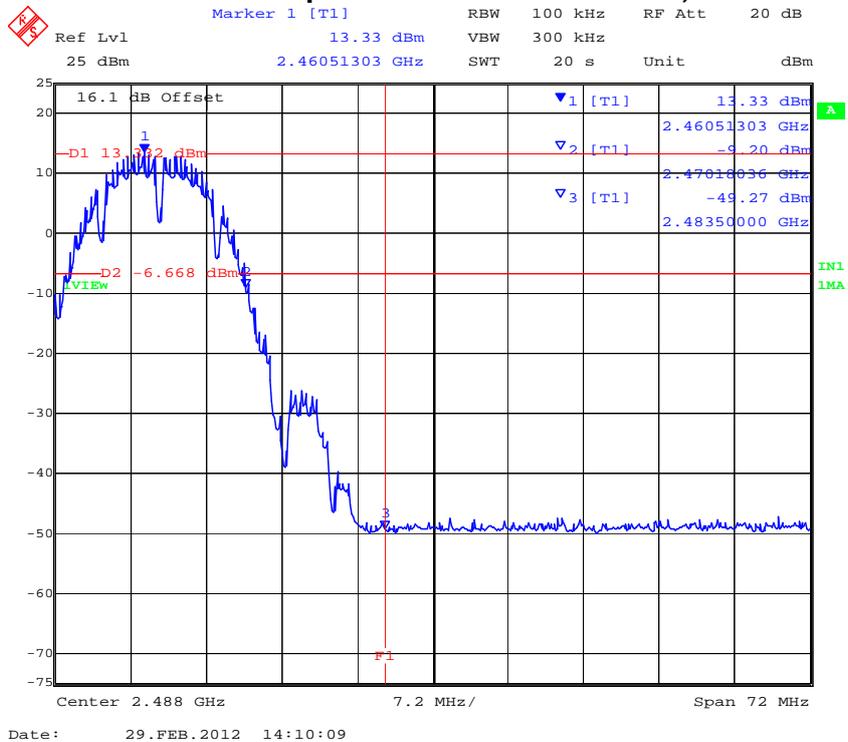


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 179 of 331


PORT C 802.11b - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

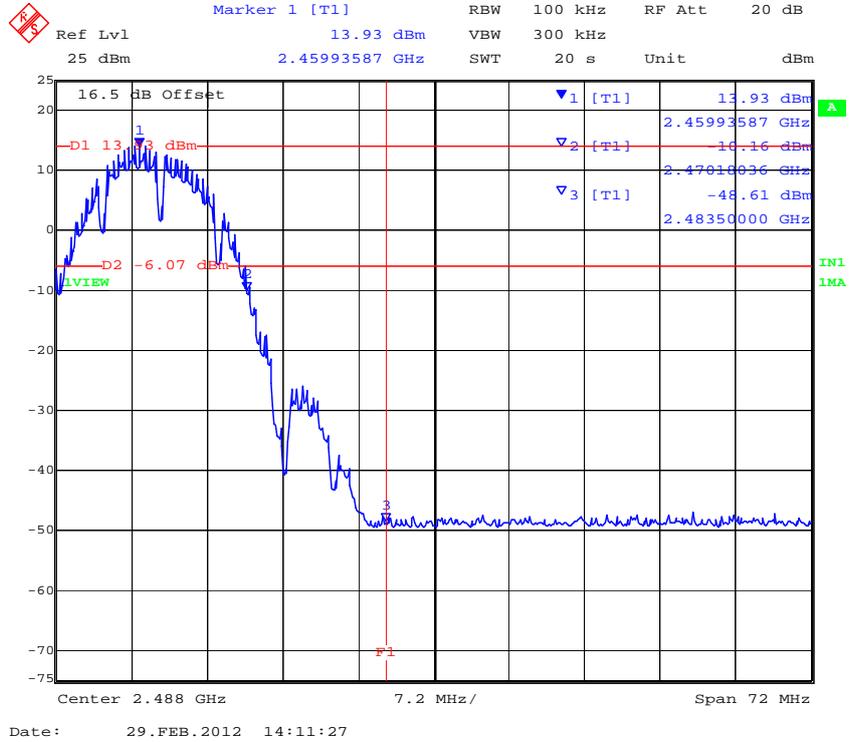


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11b-Legacy 2,412 MHz Conducted Spurious Emissions 0.30 to 26 GHz

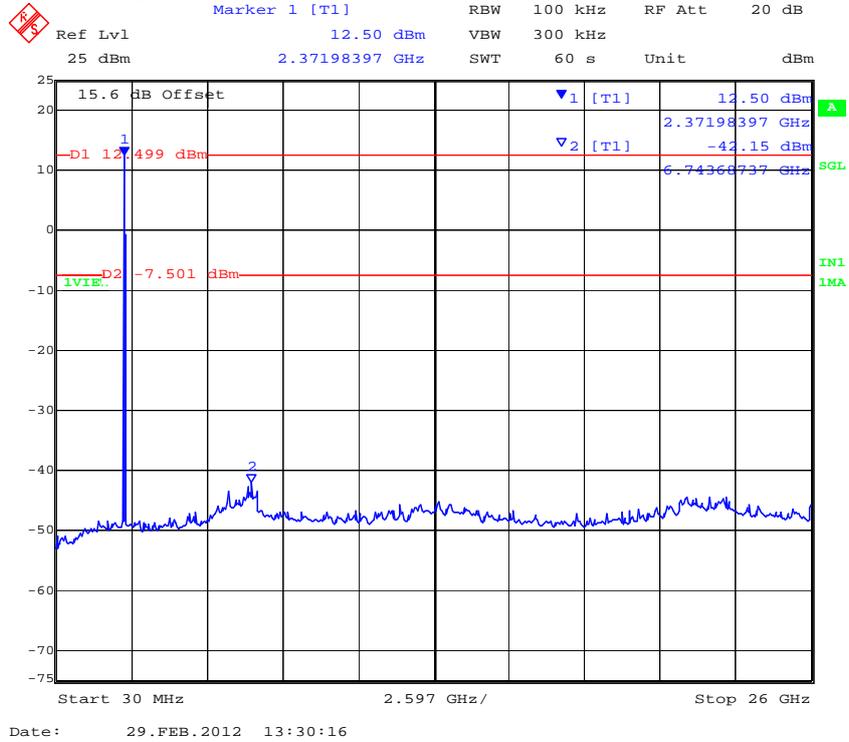

PORT B 802.11b-Legacy 2,412 MHz Conducted Spurious Emissions 0.30 to 26 GHz

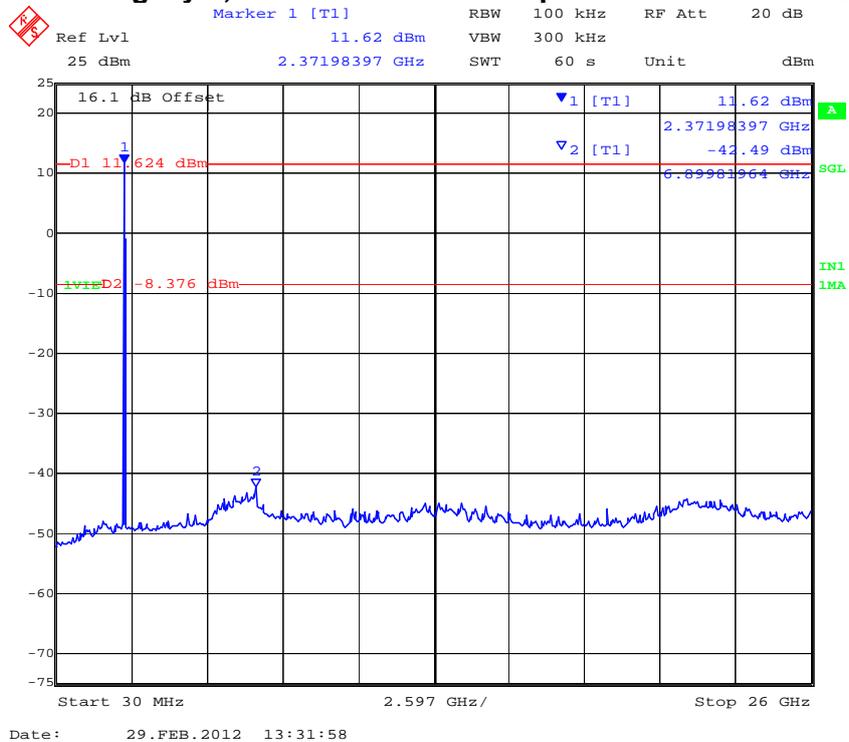


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 181 of 331


PORT C 802.11b-Legacy 2,412 MHz Conducted Spurious Emissions 0.30 to 26 GHz

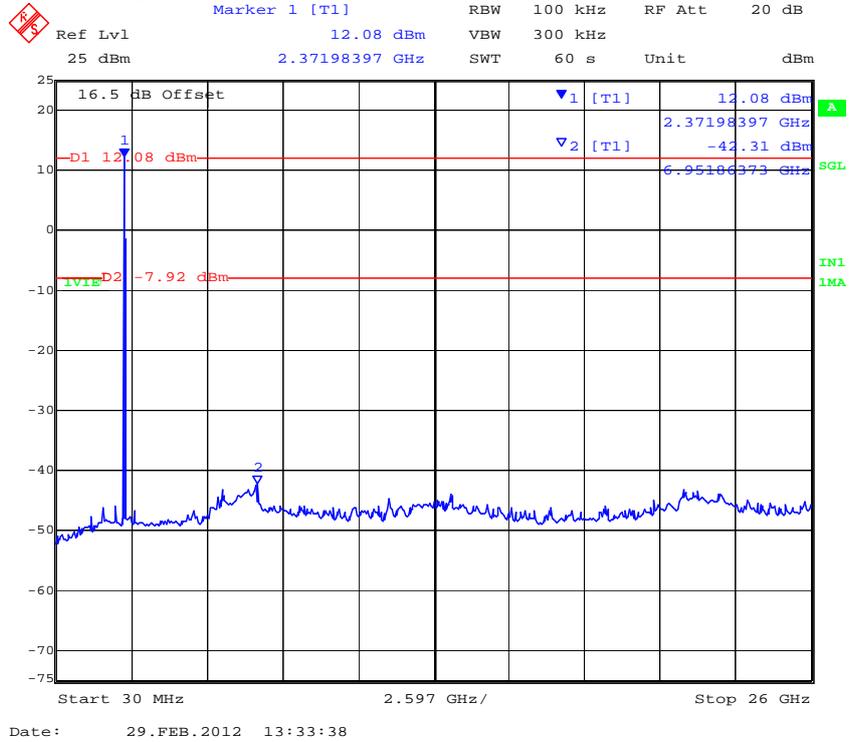


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11b-Legacy 2,437 MHz Conducted Spurious Emissions 0.30 to 26 GHz

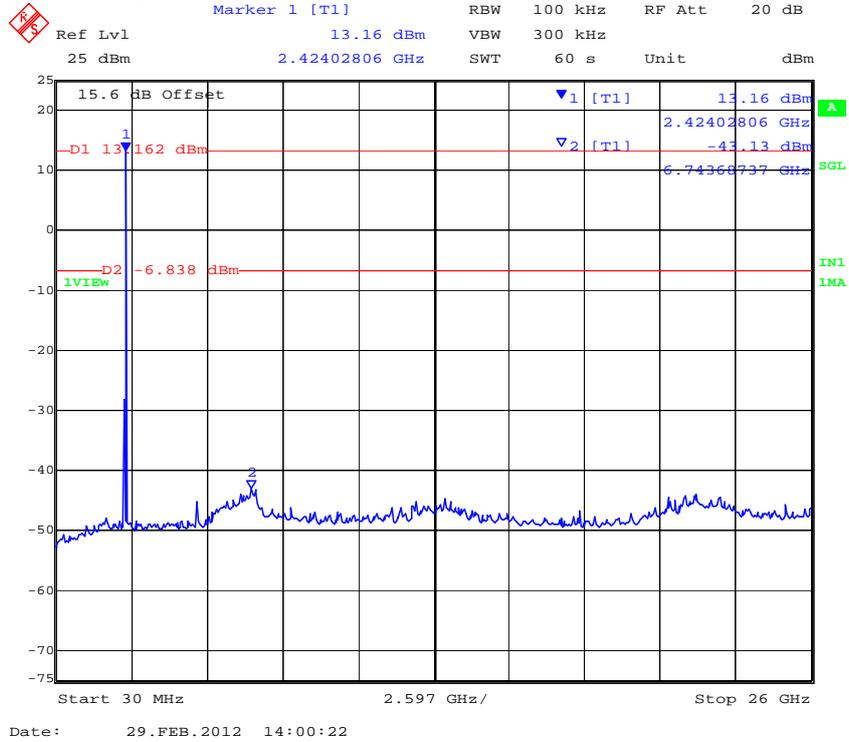

PORT B 802.11b-Legacy 2,437 MHz Conducted Spurious Emissions 0.30 to 26 GHz

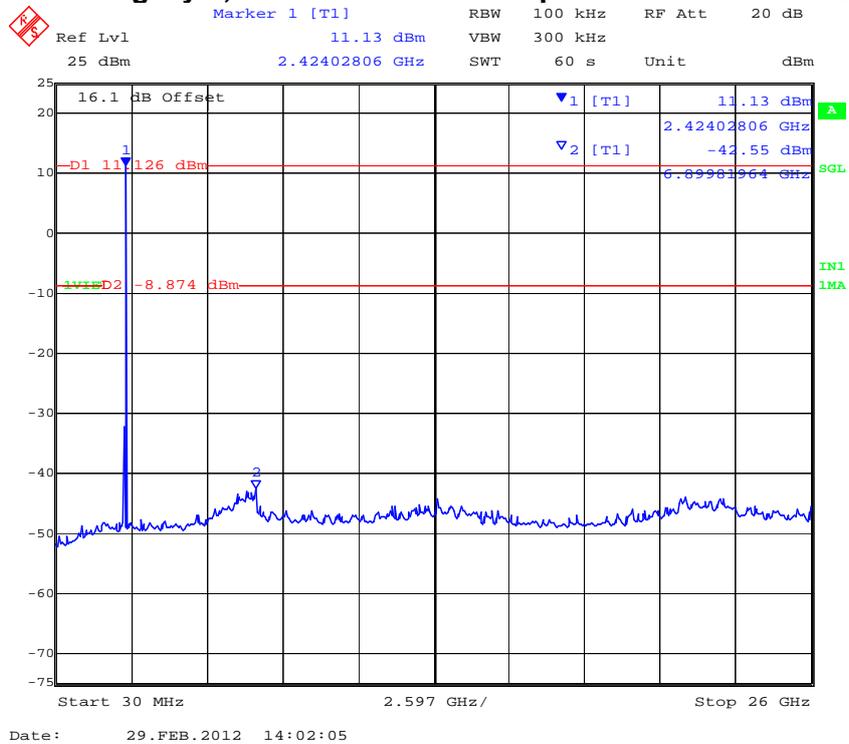


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 183 of 331


PORT C 802.11b-Legacy 2,437 MHz Conducted Spurious Emissions 0.30 to 26 GHz

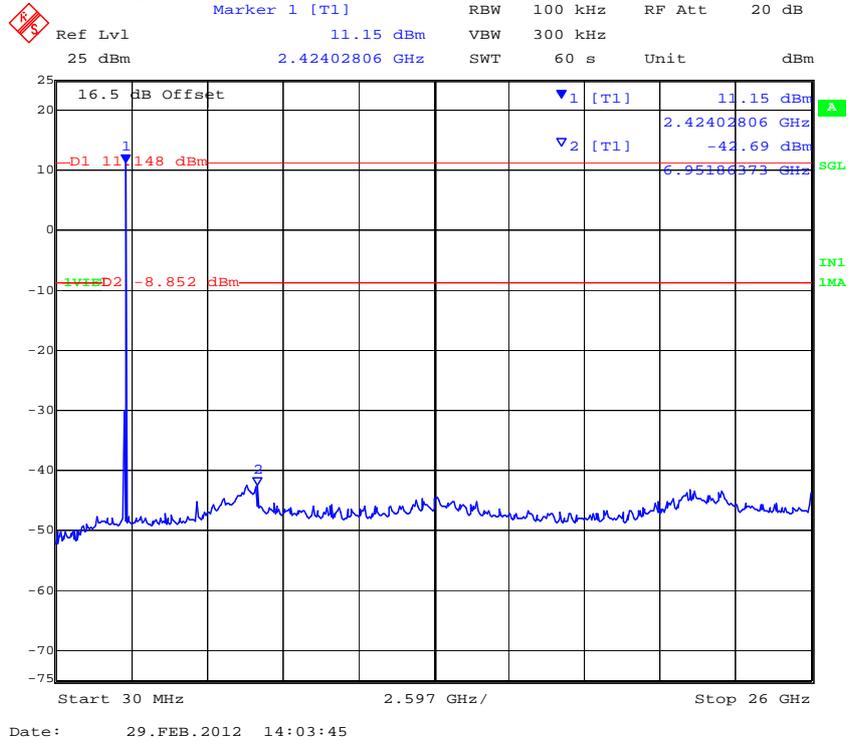


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11b-Legacy 2,462 MHz Conducted Spurious Emissions 0.30 to 26 GHz

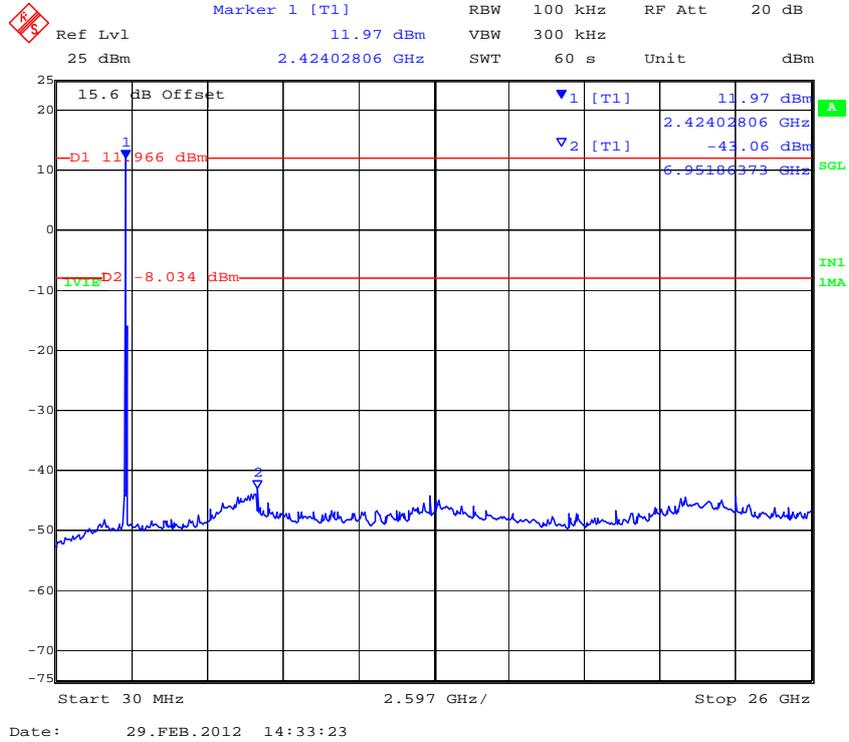

PORT B 802.11b-Legacy 2,462 MHz Conducted Spurious Emissions 0.30 to 26 GHz

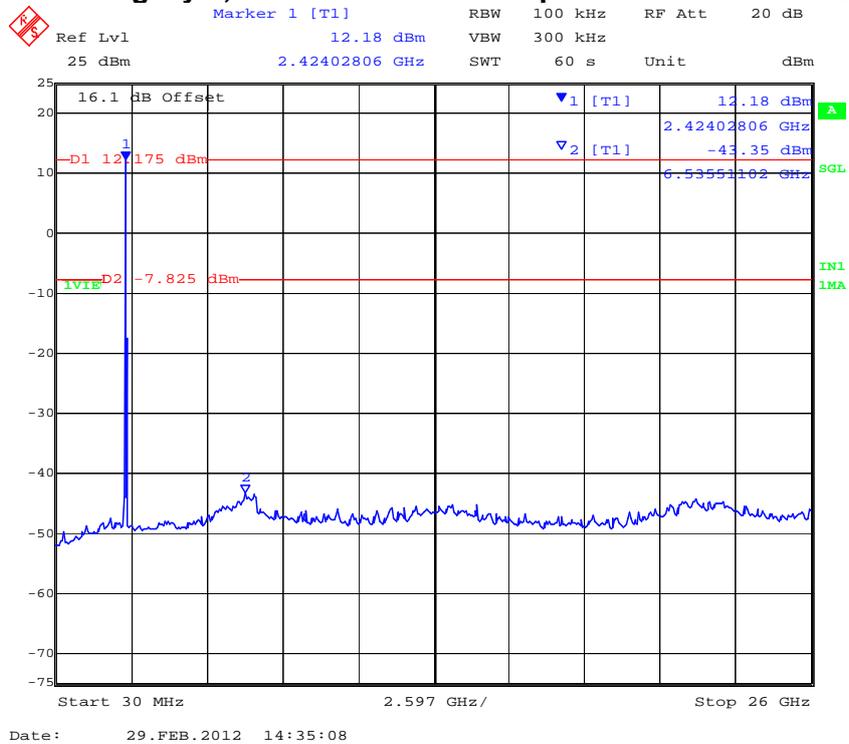


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 185 of 331

PORT C 802.11b-Legacy 2,462 MHz Conducted Spurious Emissions 0.30 to 26 GHz

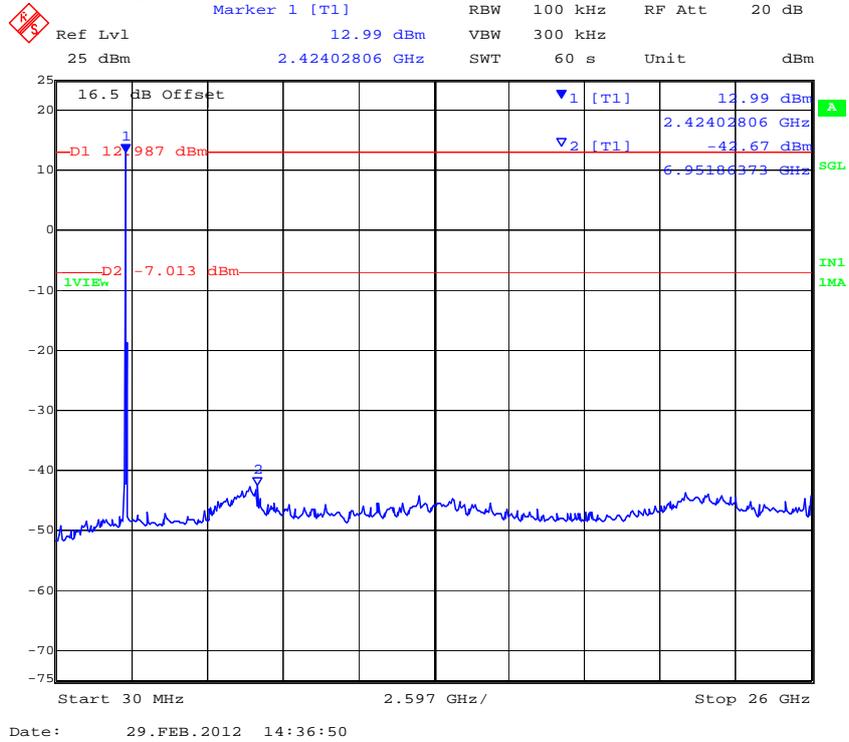

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 186 of 331

Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11g Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11b	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A dBi		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
2412.000	30.00	26000.00	-43.00	-11.26	-43.51	-11.76	-42.73	-11.32		
2437.000	30.00	26000.00	-43.35	-11.51	-42.93	-12.45	-42.43	-11.55		
2462.000	30.00	26000.00	-43.21	-11.27	-42.72	-10.82	-42.31	-11.21		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
2412.000	2400.00	-12.05	-9.40	-13.47	-10.36	-11.28	-10.02		
2462.000	2483.50	-44.24	-10.46	-47.69	-9.37	-44.91	-8.92		

BE: Maximum Band edge emission found


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

Note: Limit is based on 20dB down from fundamental emissions


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11g Legacy - Conducted Spurious Emissions at the 2,400 MHz Band Edge

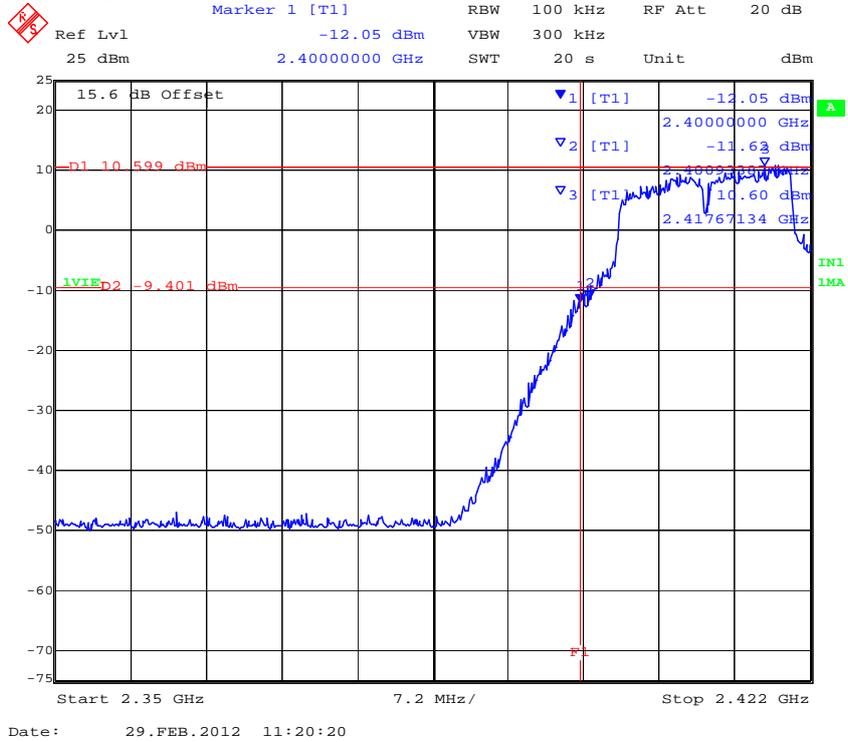


PORT B 802.11g Legacy - Conducted Spurious Emissions at the 2,400 MHz Band Edge

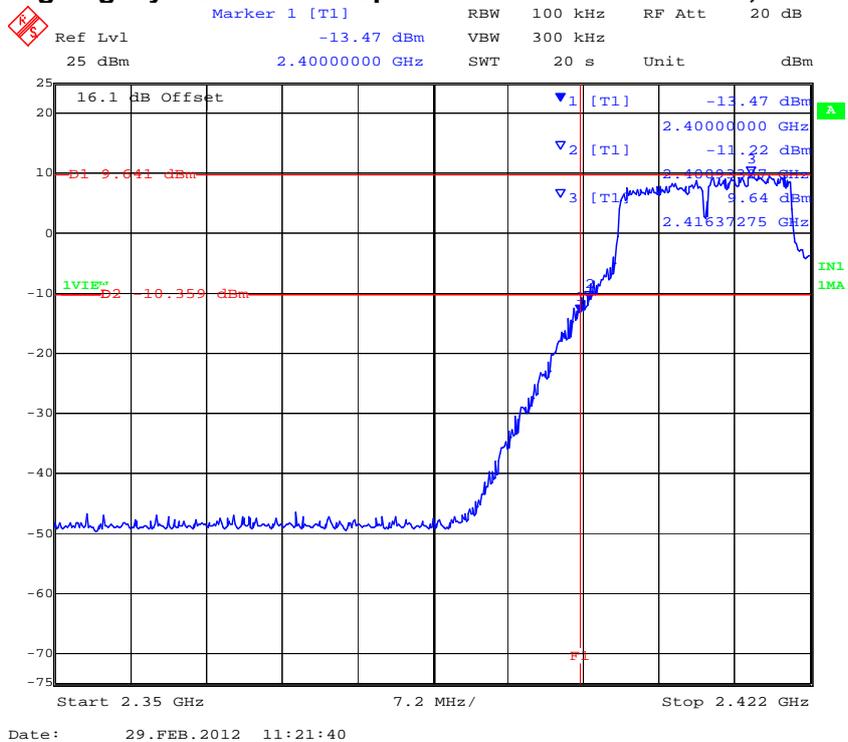

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT C 802.11g Legacy - Conducted Spurious Emissions at the 2,400 MHz Band Edge

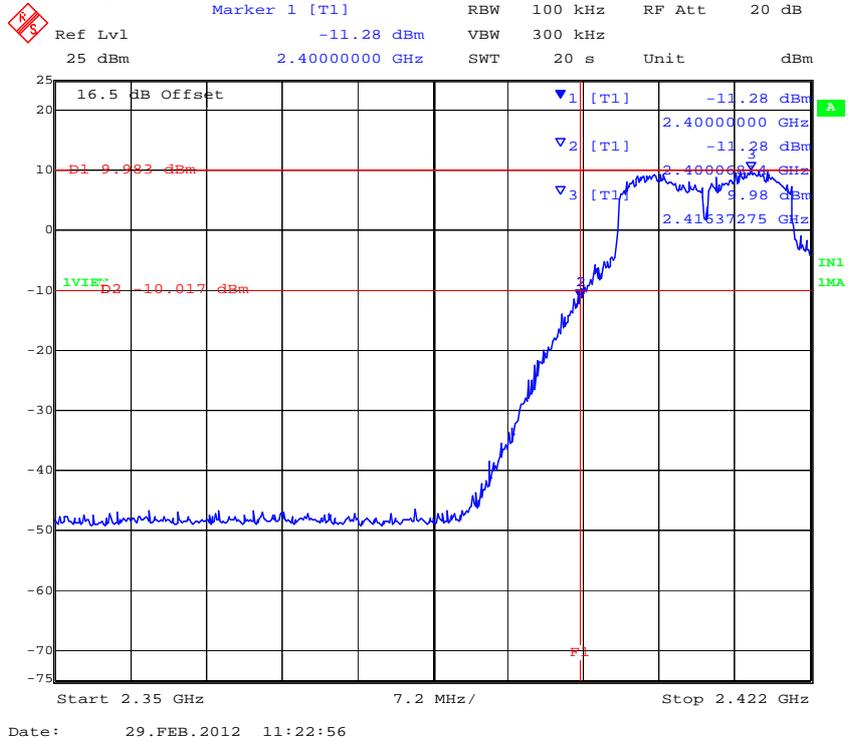


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11g - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

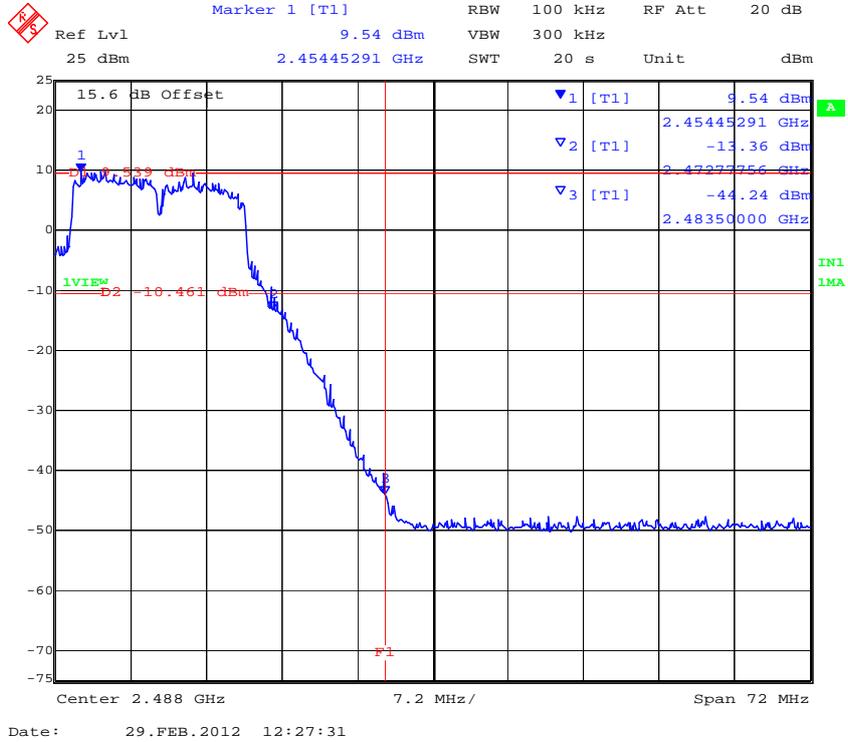

PORT B 802.11g - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

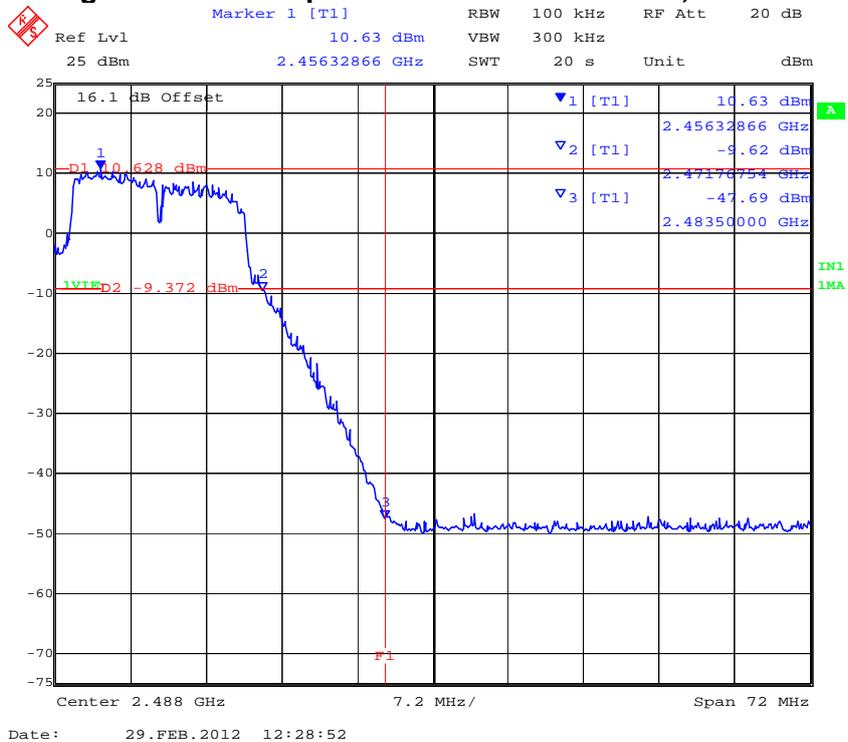


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 190 of 331


PORT C 802.11g - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

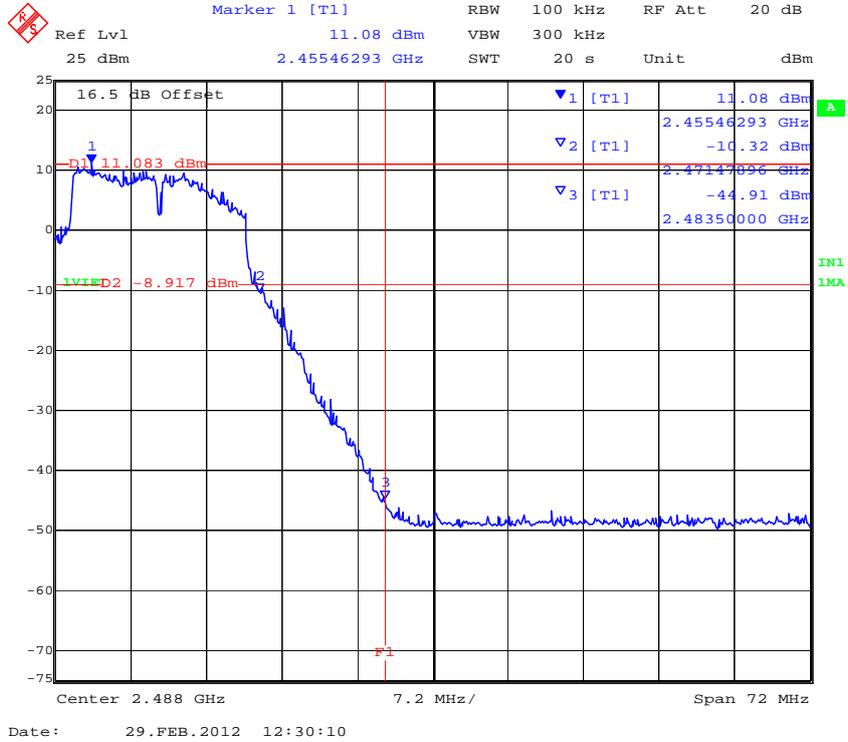


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11g – Legacy 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

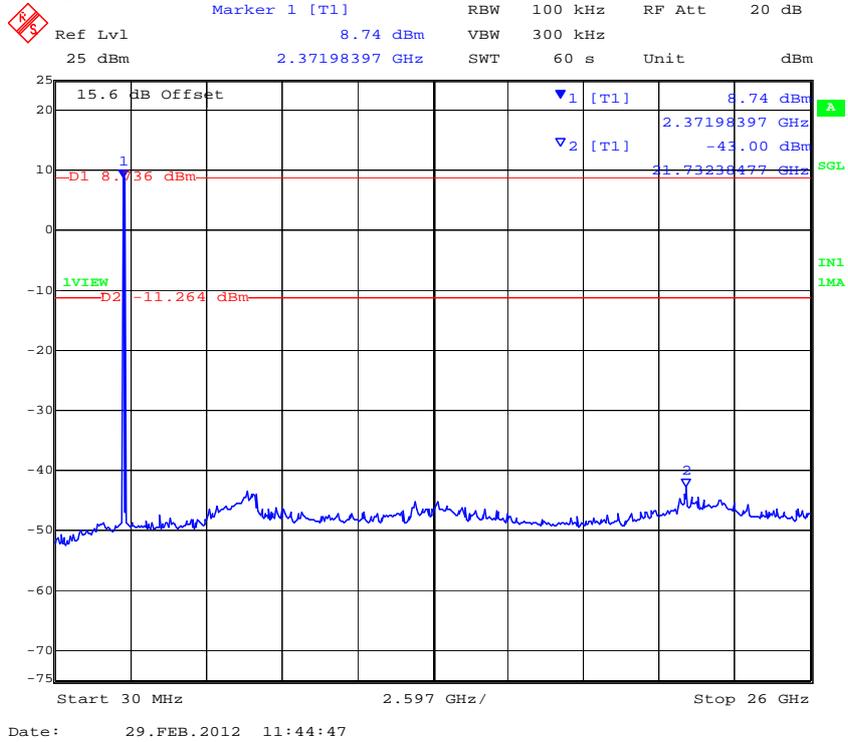


PORT B 802.11g – Legacy 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

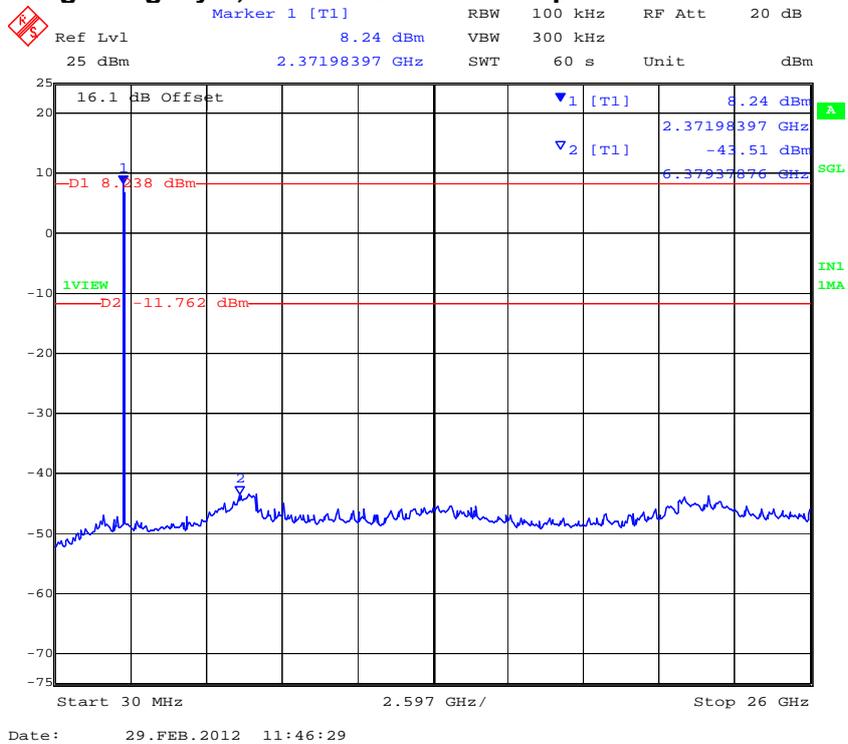


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11g-Legacy 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

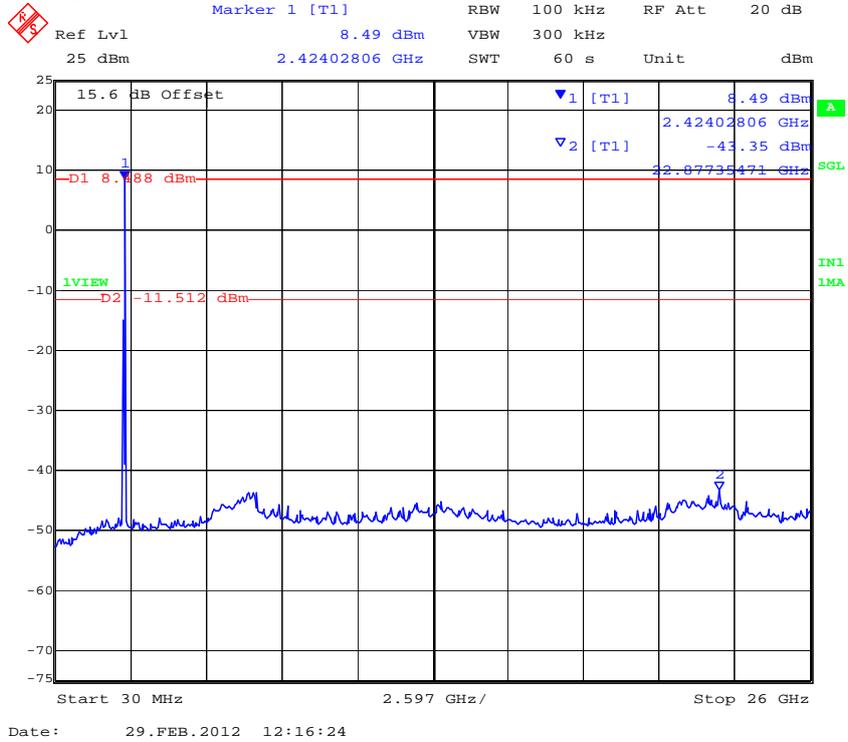

PORT B 802.11g-Legacy 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

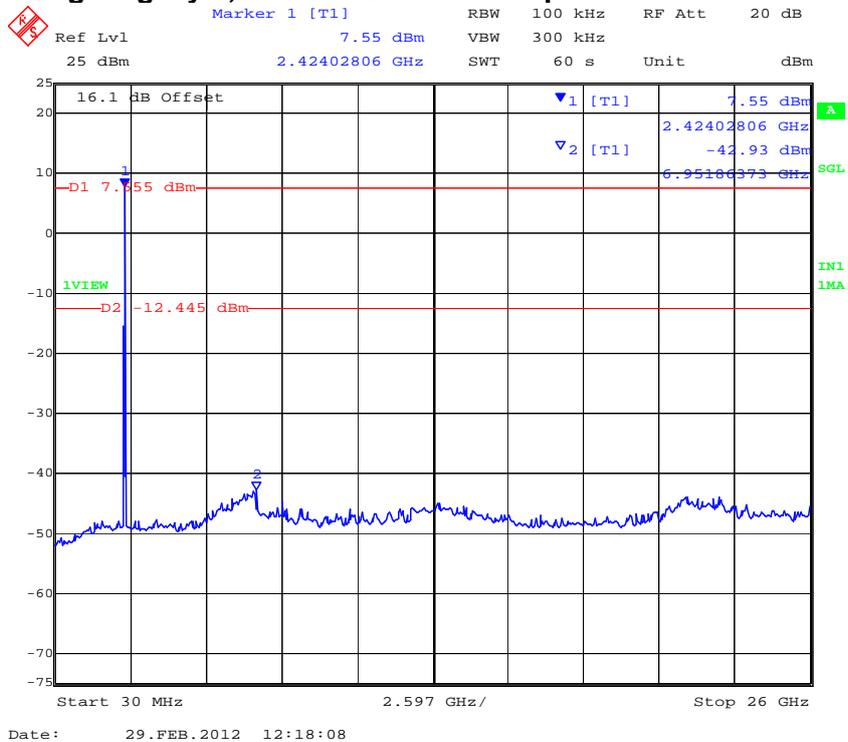


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 194 of 331


PORT C 802.11g-Legacy 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

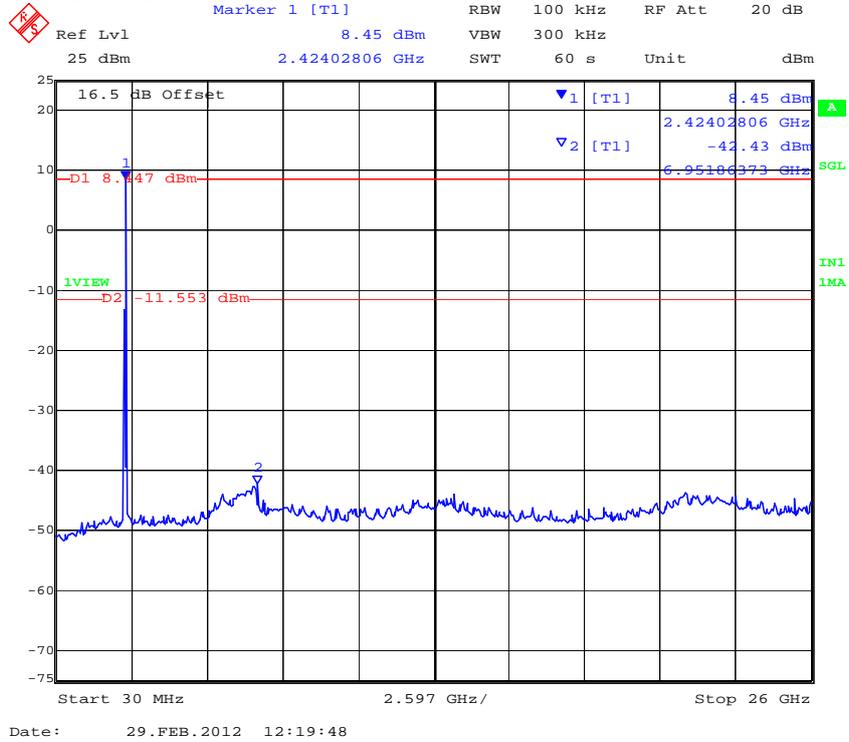


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11g – Legacy 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

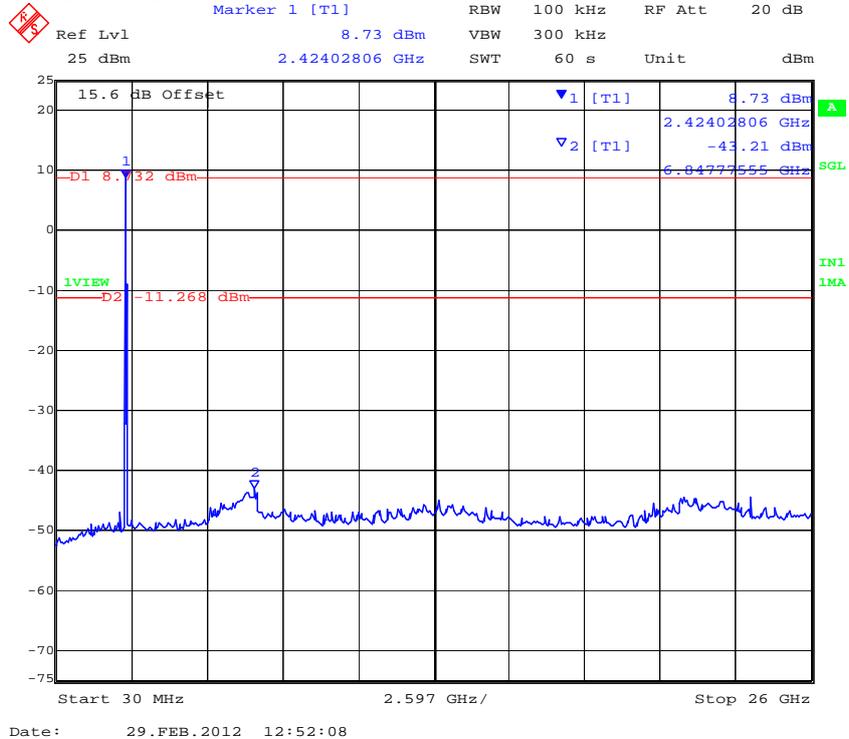

PORT B 802.11g – Legacy 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

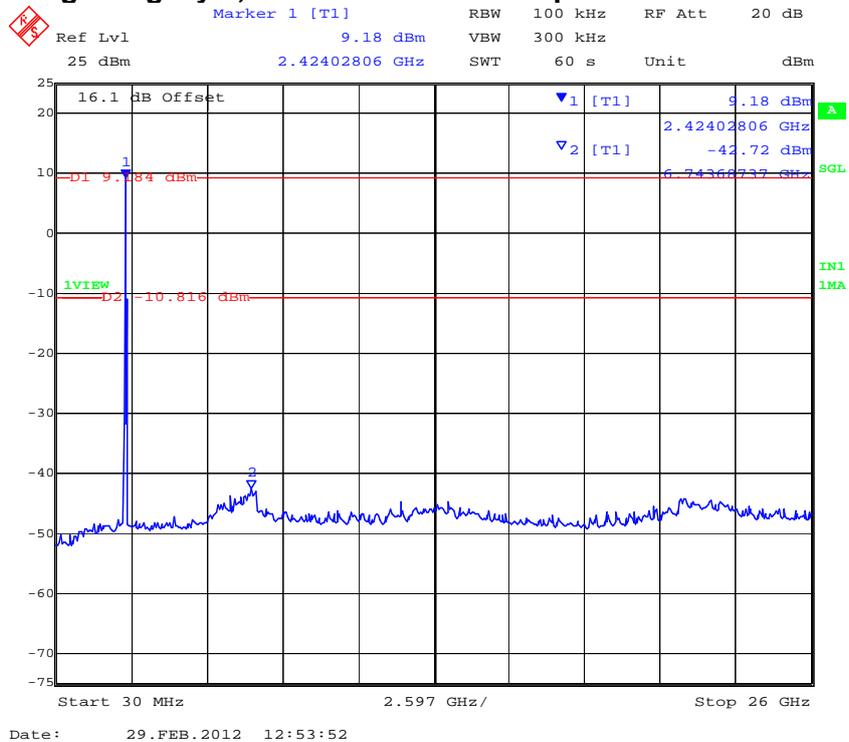


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 196 of 331

PORT C 802.11g – Legacy 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

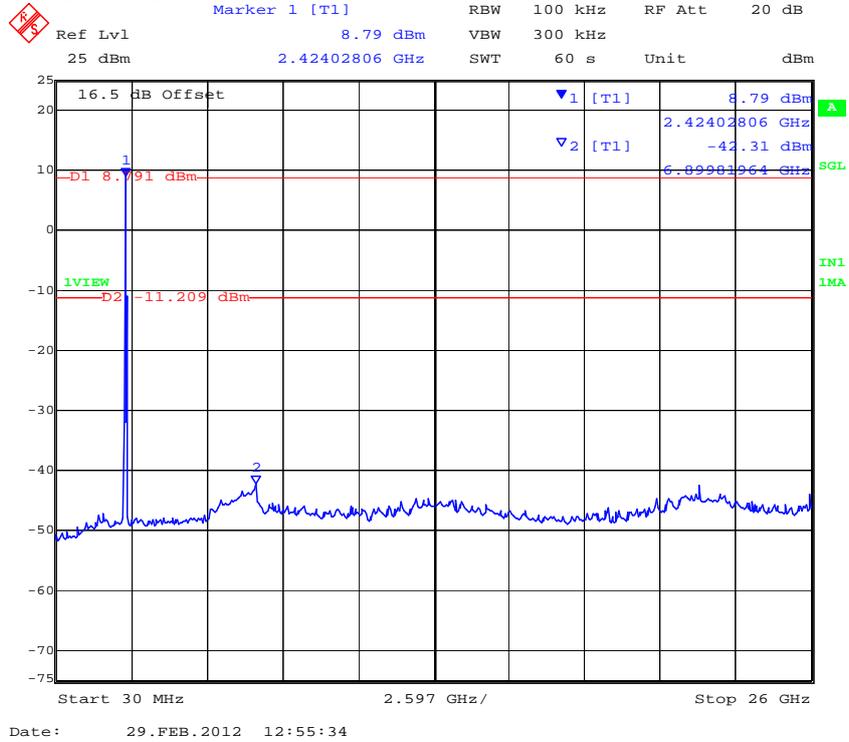

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11n HT-20

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A dBi		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
2412.000	30.00	26000.00	-43.45	-11.44	-42.47	-11.84	-42.83	-11.24		
2437.000	30.00	26000.00	-43.83	-12.38	-42.50	-12.54	-42.68	-11.84		
2462.000	30.00	26000.00	-43.35	-12.26	-43.00	-11.47	-42.82	-12.25		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
2412.000	2400.00	-13.93	-10.69	-13.60	-10.63	-10.85	-10.83		
2462.000	2483.50	-44.15	-10.14	-45.74	-9.40	-44.19	-10.33		

BE: Maximum Band edge emission found


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

Note: Limit is based on 20dB down from fundamental emissions


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-20 Legacy - Conducted Band Edge Spurious 2,400 MHz

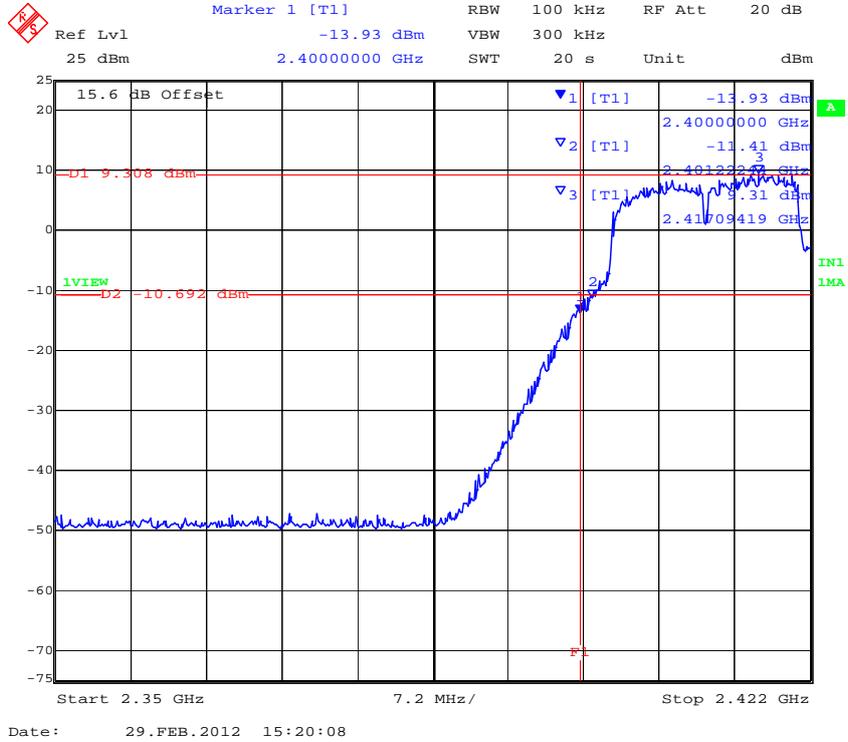


PORT B 802.11n HT-20 Legacy - Conducted Band Edge Spurious 2,400 MHz

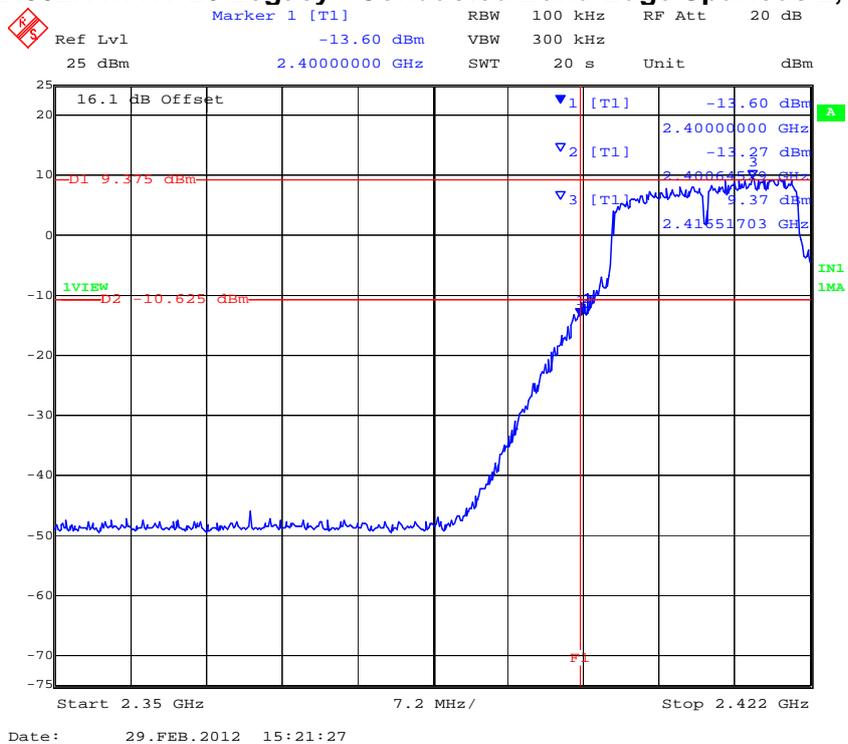

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT C 802.11n HT-20 Legacy - Conducted Band Edge Spurious 2,400 MHz

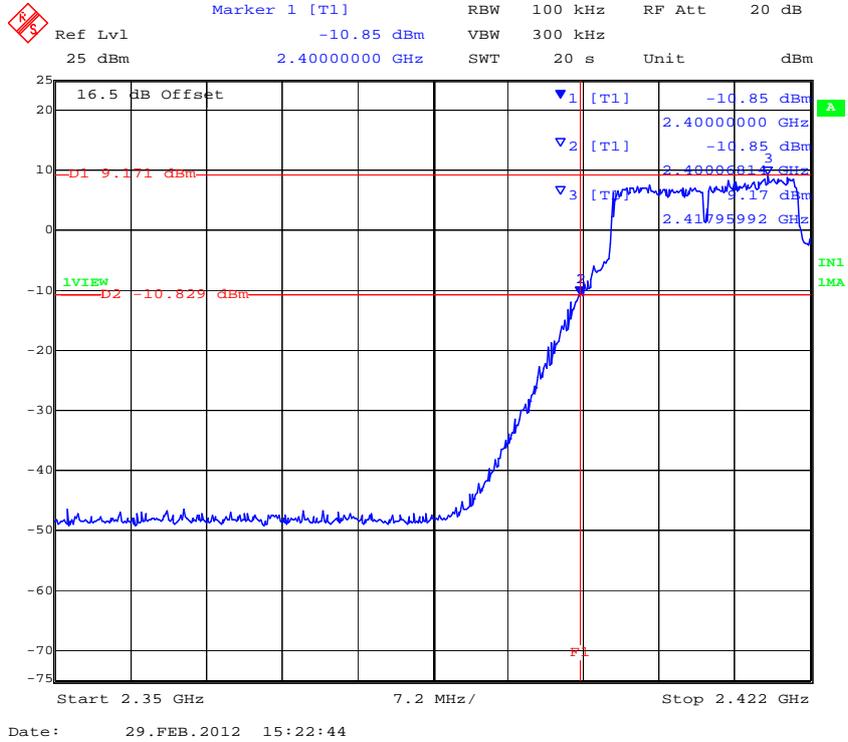


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802. 11n HT-20 Conducted Spurious Emissions at 2,483.5 MHz Band Edge

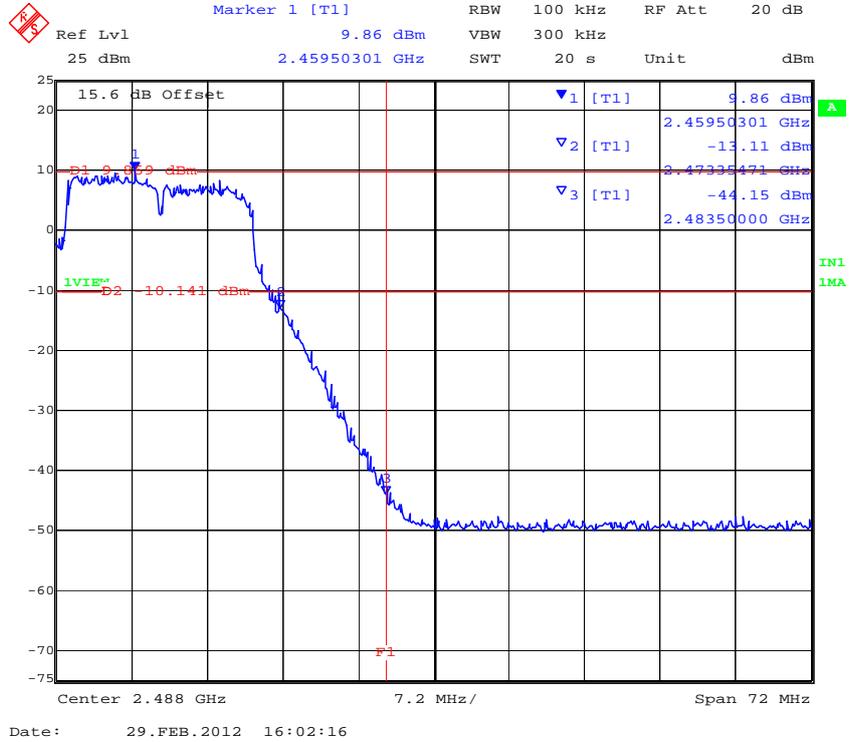

PORT B 802. 11n HT-20 Conducted Spurious Emissions at 2,483.5 MHz Band Edge

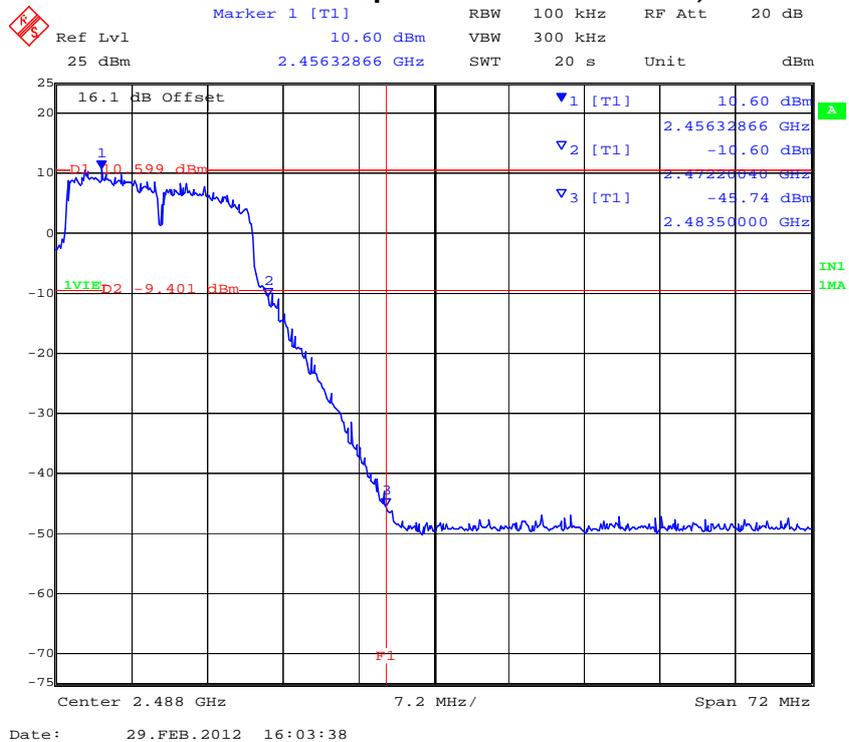


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 201 of 331


PORT C 802.11n HT-20 Conducted Spurious Emissions at 2,483.5 MHz Band Edge

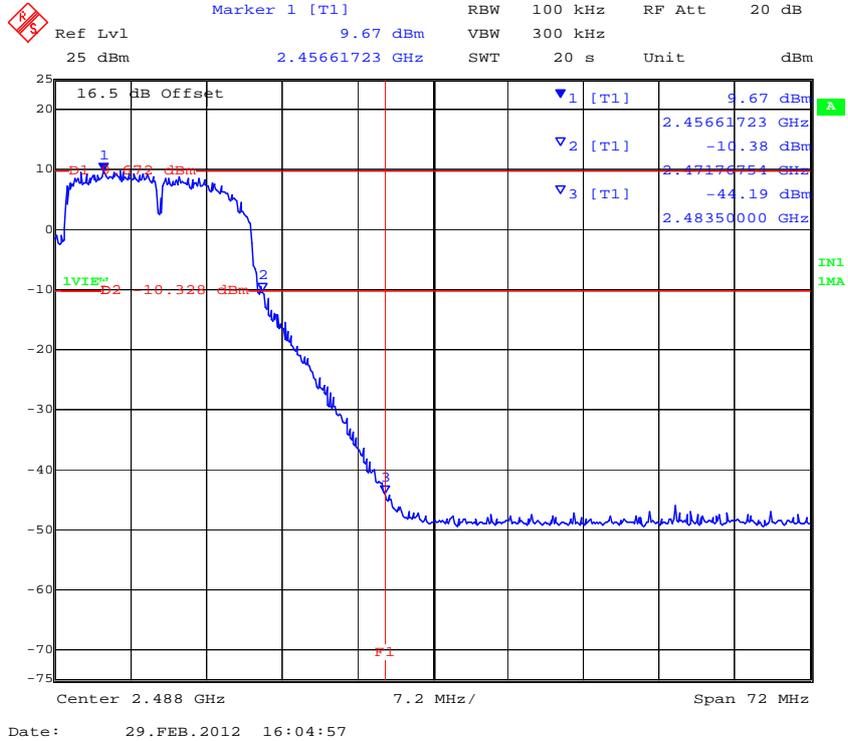


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-20 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

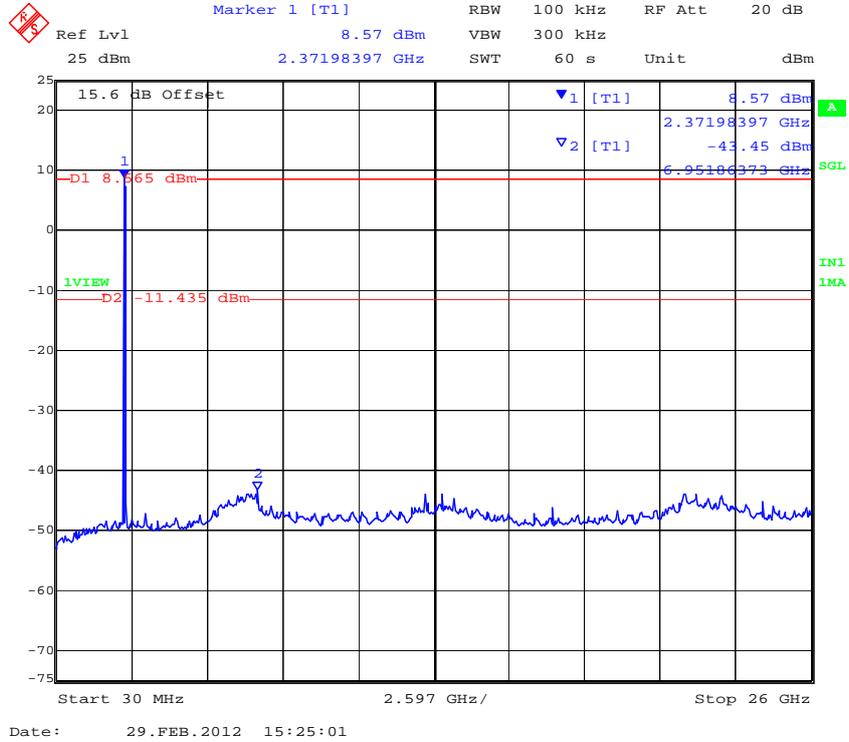

PORT B 802.11n HT-20 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

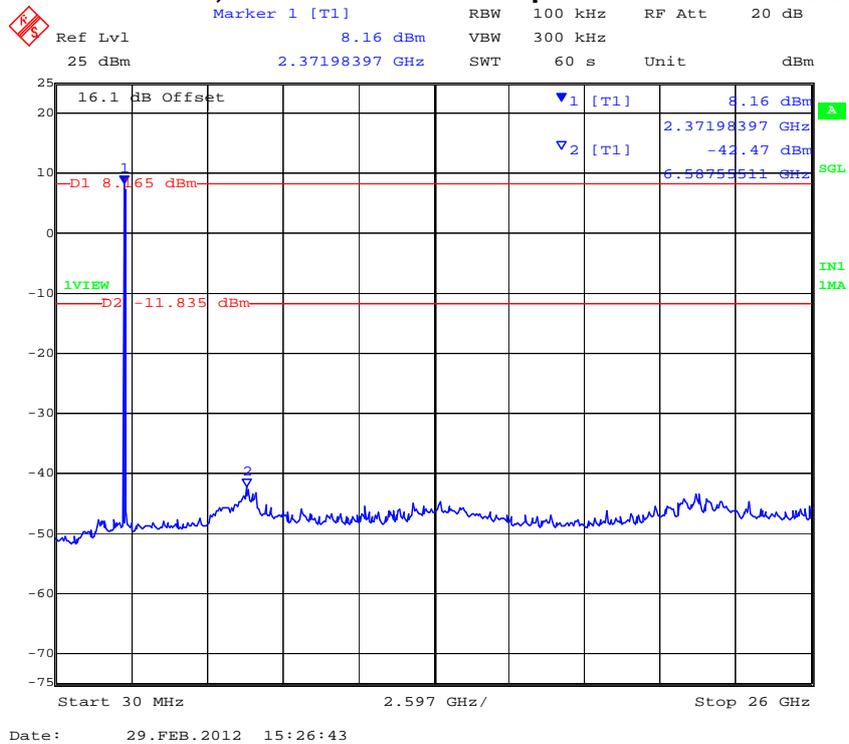


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 203 of 331


PORT C 802.11n HT-20 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

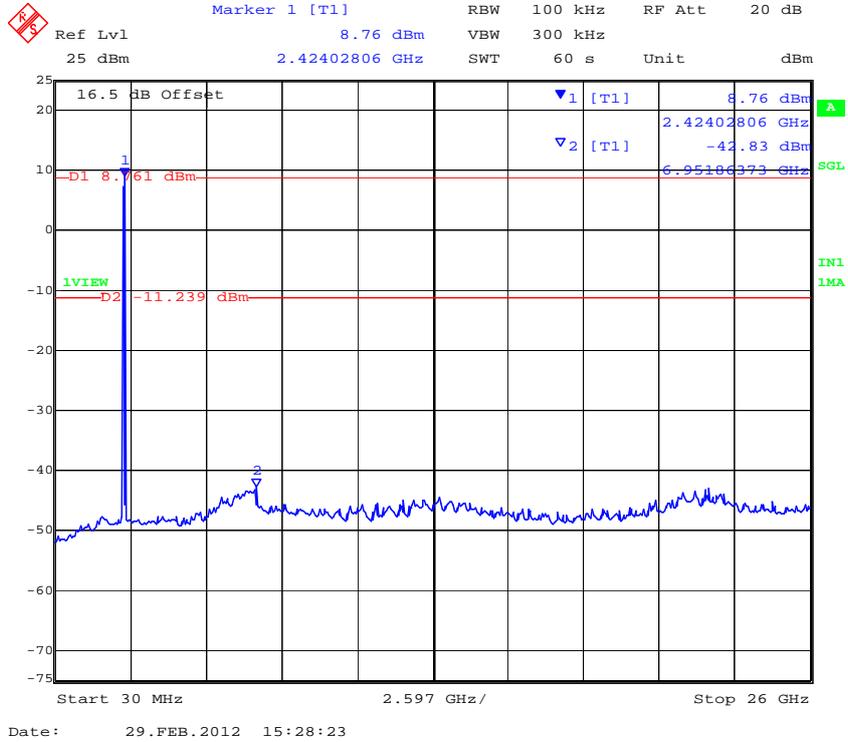


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-20 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

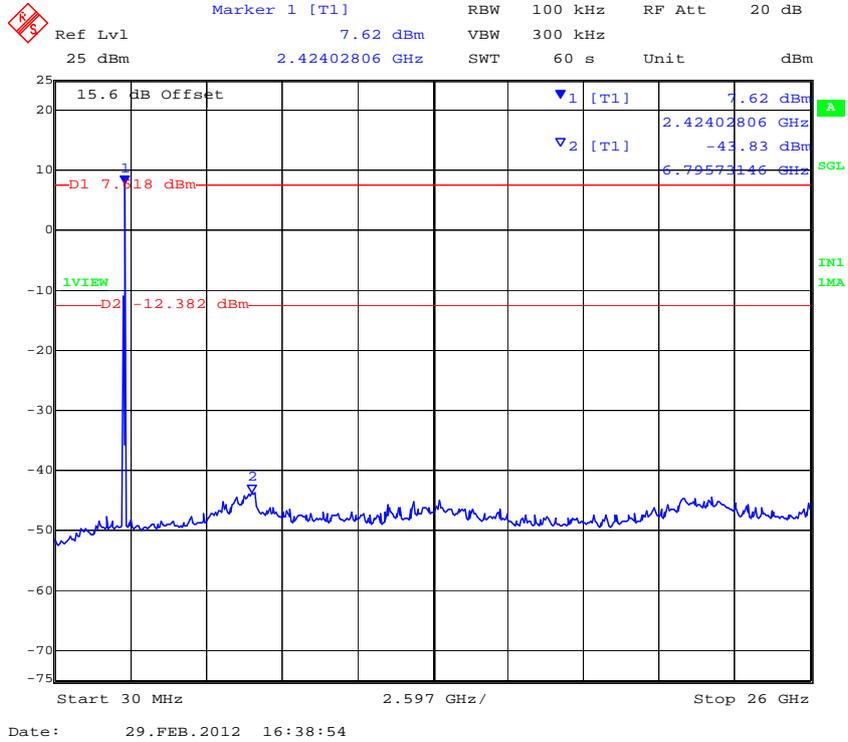

PORT B 802.11n HT-20 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

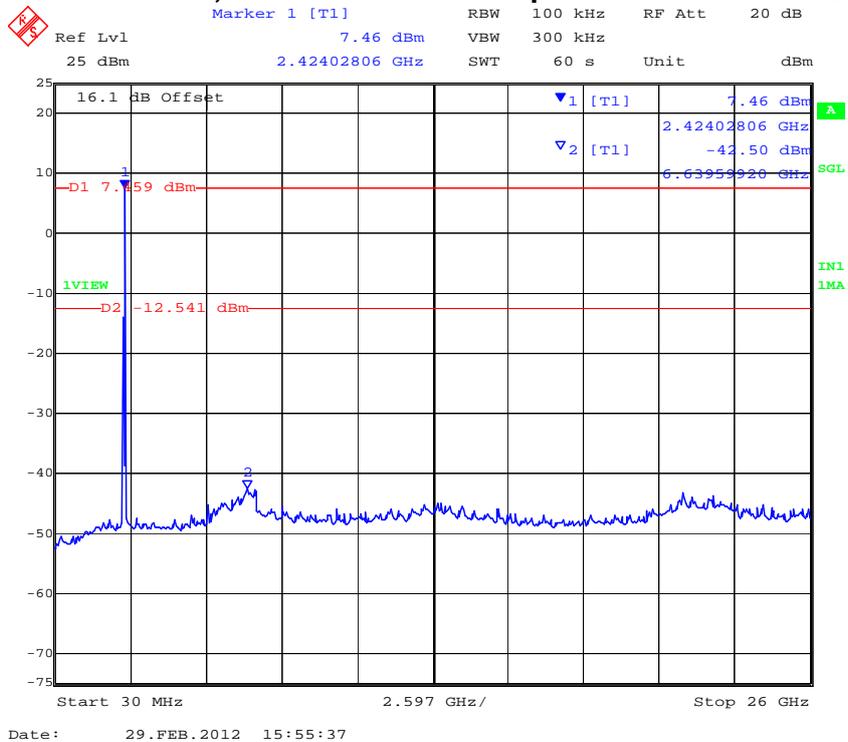


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 205 of 331


PORT C 802.11n HT-20 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

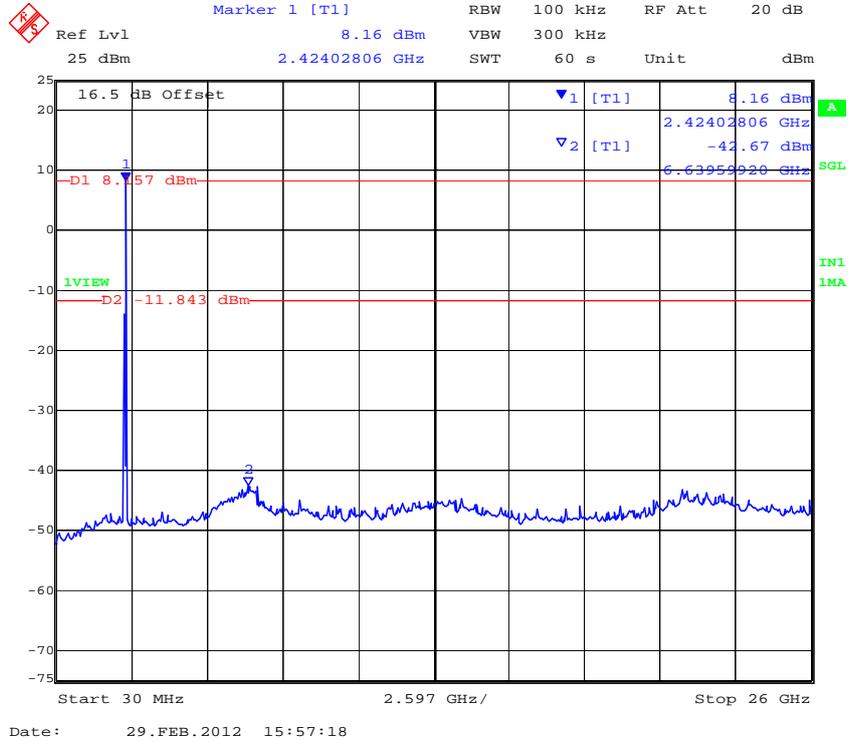


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-20 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

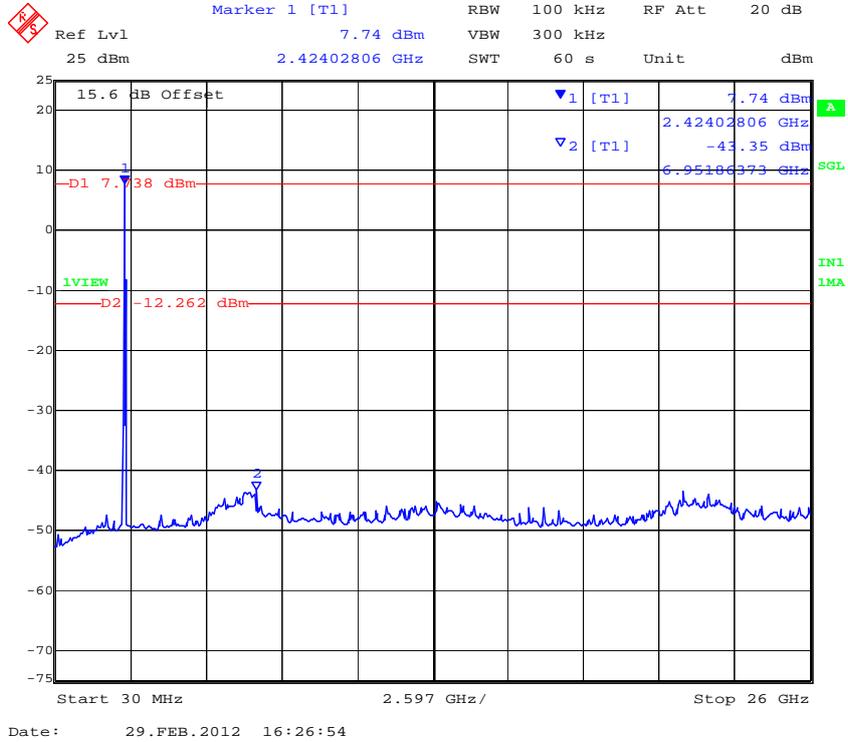

PORT B 802.11n HT-20 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

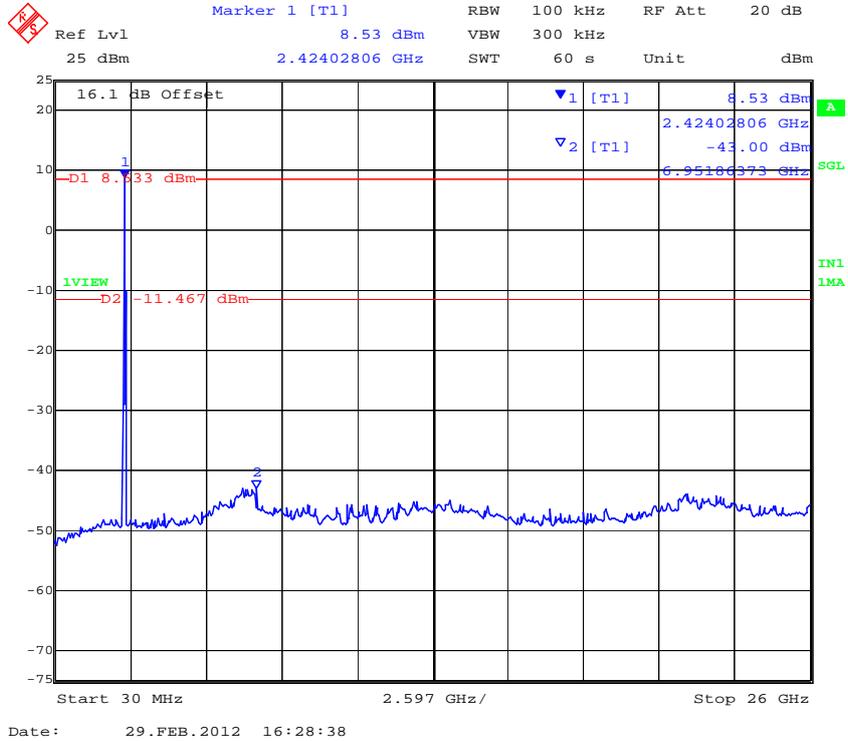


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 207 of 331

PORT C 802.11n HT-20 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

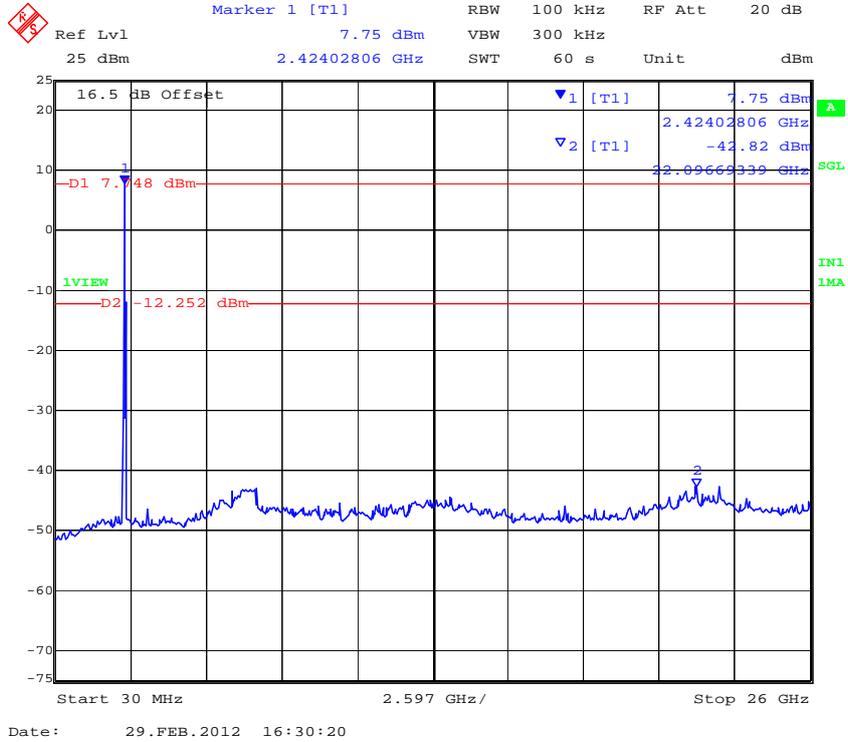

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11N HT-40

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A dBi		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
2422.000	30.00	26000.00	-43.07	-13.51	-42.66	-13.02	-43.00	-14.96		
2437.000	30.00	26000.00	-43.39	-14.06	-42.16	-14.65	-42.52	-14.39		
2452.000	30.00	26000.00	-43.66	-14.62	-42.41	-14.64	-42.72	-14.24		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
2422.000	2400.00	-13.99	-12.87	-16.45	-12.28	-16.21	-14.41		
2452.000	2483.50	-45.20	-13.16	-45.65	-13.51	-45.81	-13.61		

BE: Maximum Band edge emission found


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

Note: Limit is based on 20dB down from fundamental emissions


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-40 Conducted Band Edge Spurious 2,400 MHz

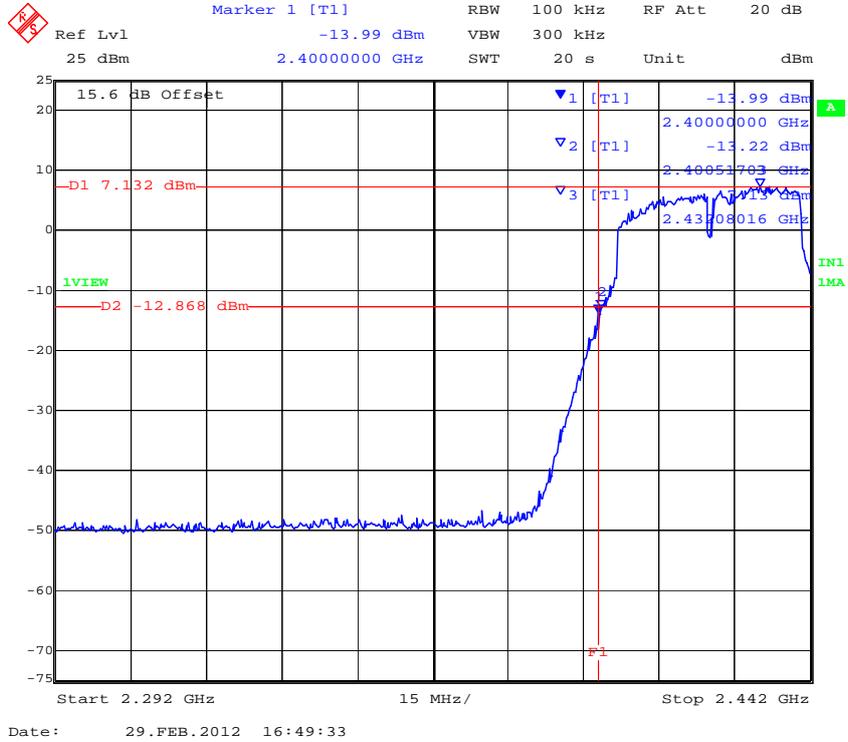


PORT B 802.11n HT-40 Conducted Band Edge Spurious 2,400 MHz

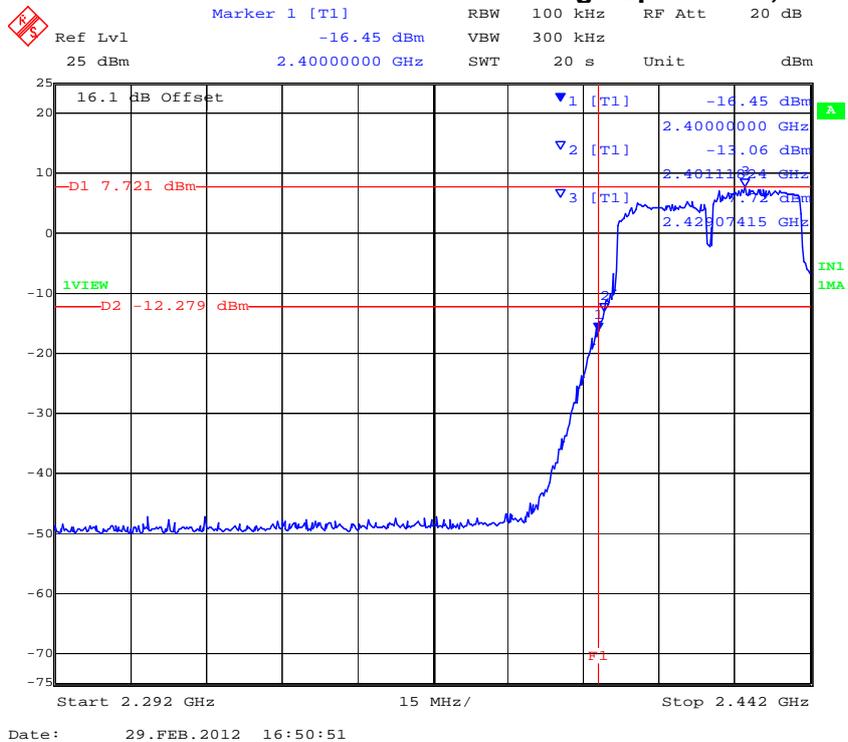

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT C 802.11n HT-40 Conducted Band Edge Spurious 2,400 MHz

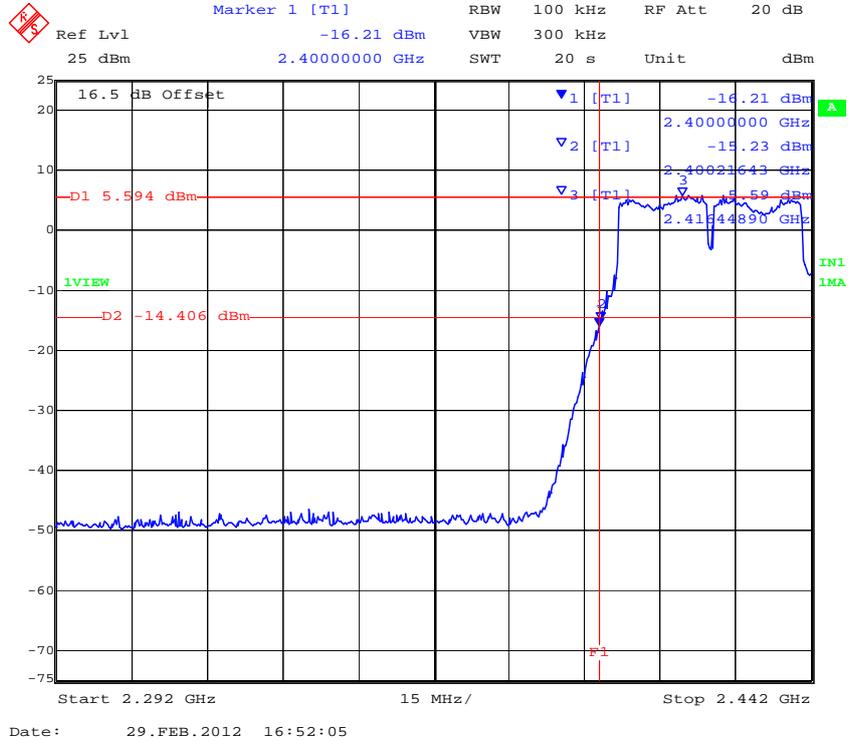

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-40 Conducted Spurious Emissions at 2,483.5 MHz Band Edge

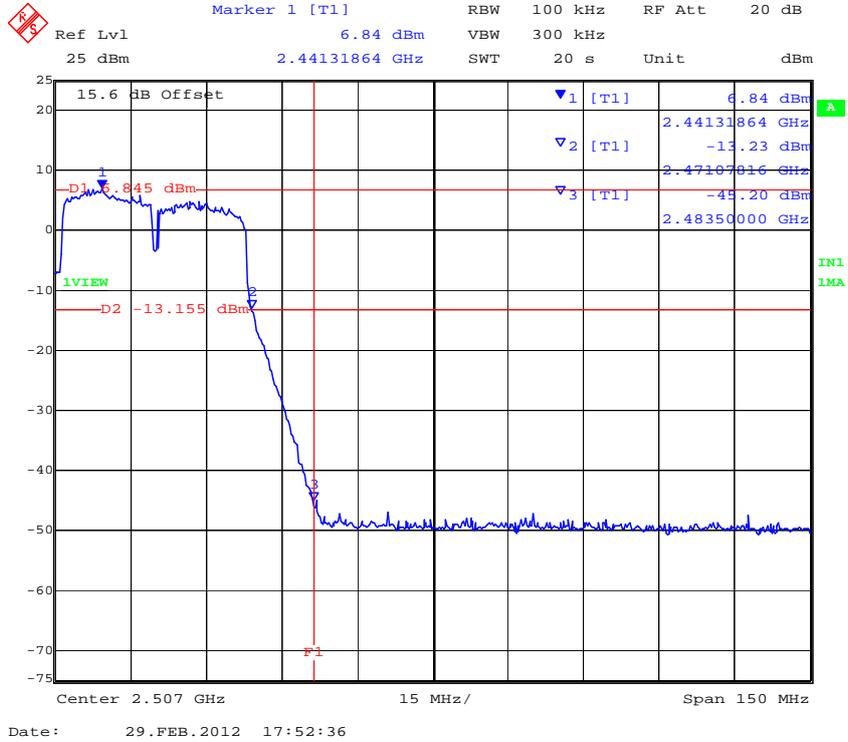

PORT B 802.11n HT-40 Conducted Spurious Emissions at 2,483.5 MHz Band Edge




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 212 of 331


PORT C 802. 11n HT-40 Conducted Spurious Emissions at 2,483.5 MHz Band Edge

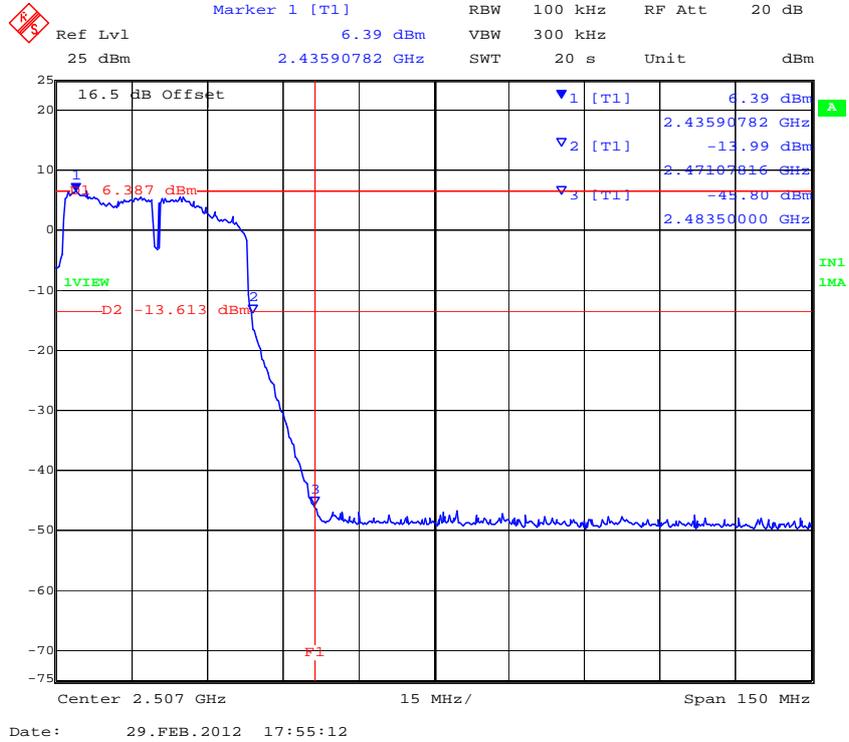


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n – HT-40 2,422 MHz Conducted Spurious Emissions 0.03 – 26 GHz

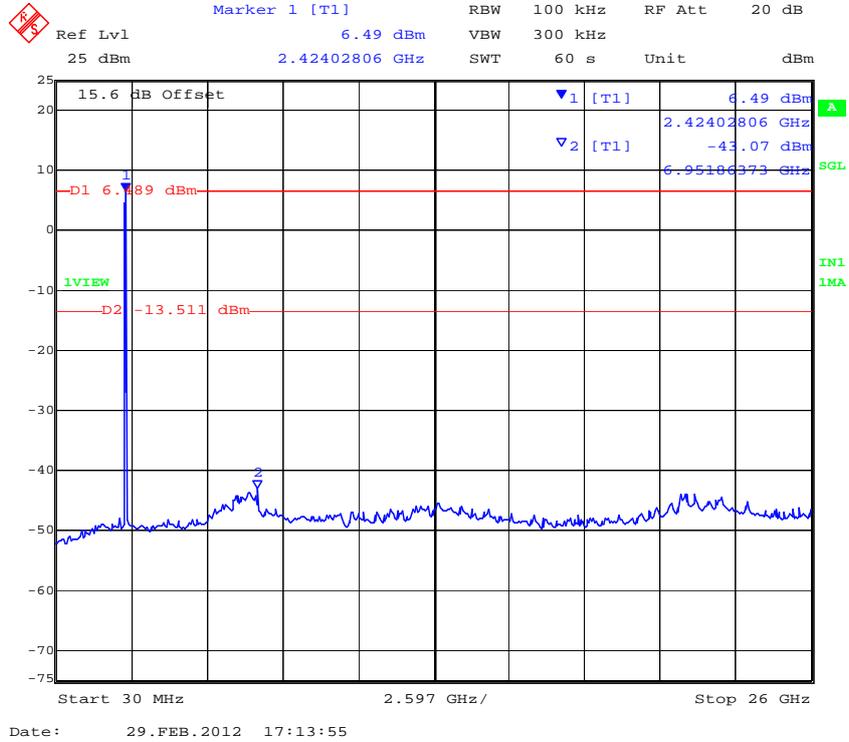

PORT B 802.11n – HT-40 2,422 MHz Conducted Spurious Emissions 0.03 – 26 GHz

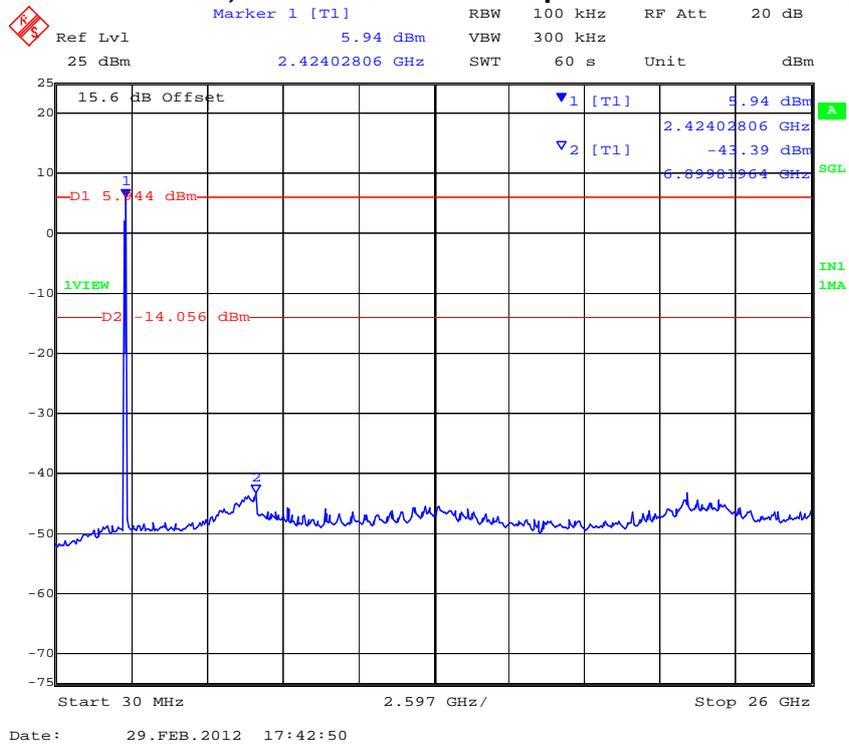


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 214 of 331


PORT C 802.11n – HT-40 2,422 MHz Conducted Spurious Emissions 0.03 – 26 GHz

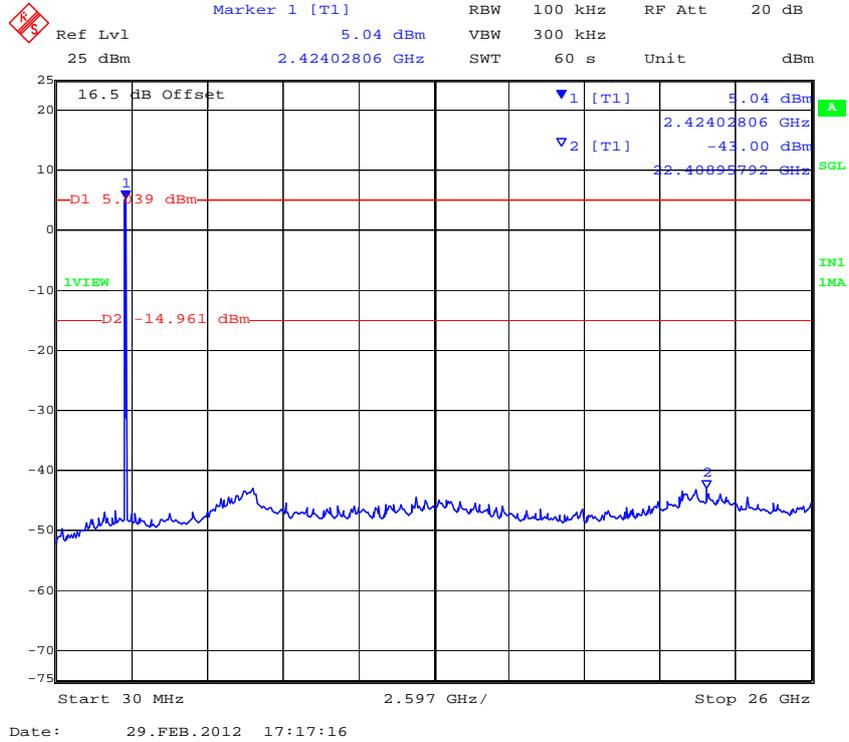


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-40 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

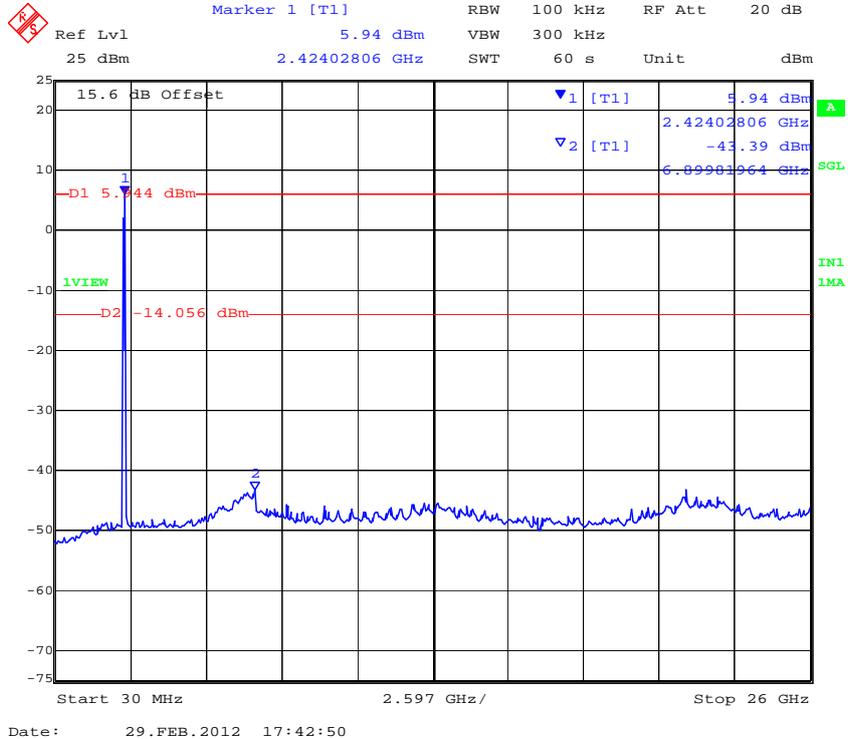

PORT B 802.11n HT-40 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

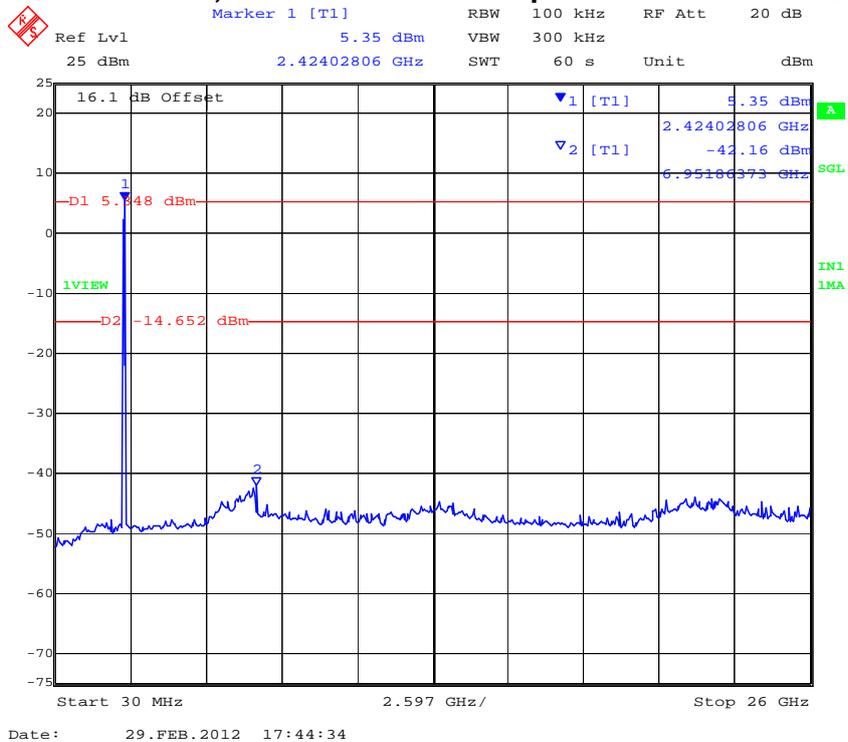


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 216 of 331


PORT C 802.11n HT-40 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

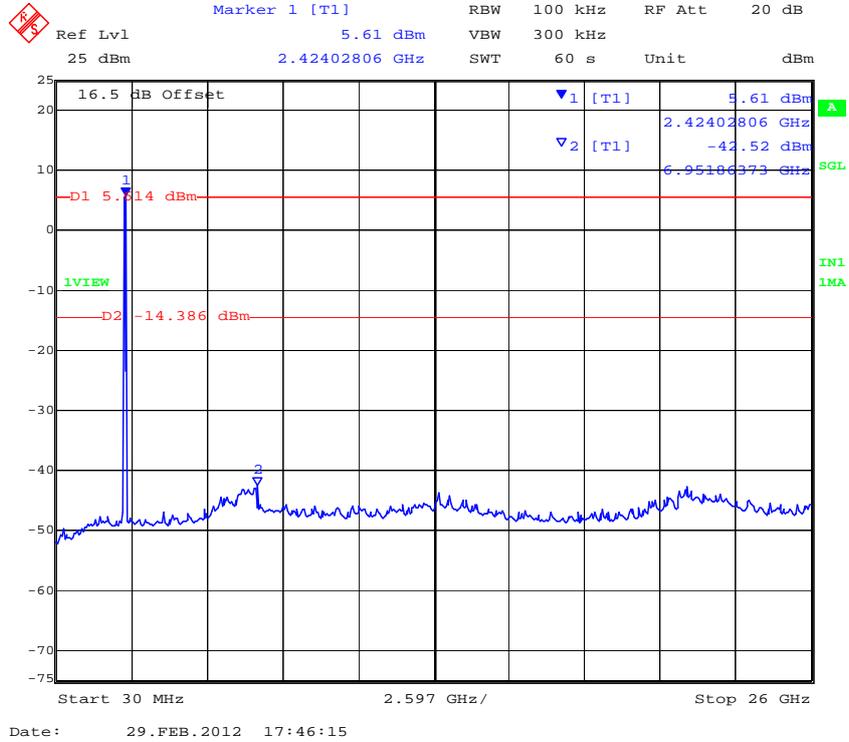


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-40 2,452 MHz Conducted Spurious Emissions 0.03 – 26 GHz

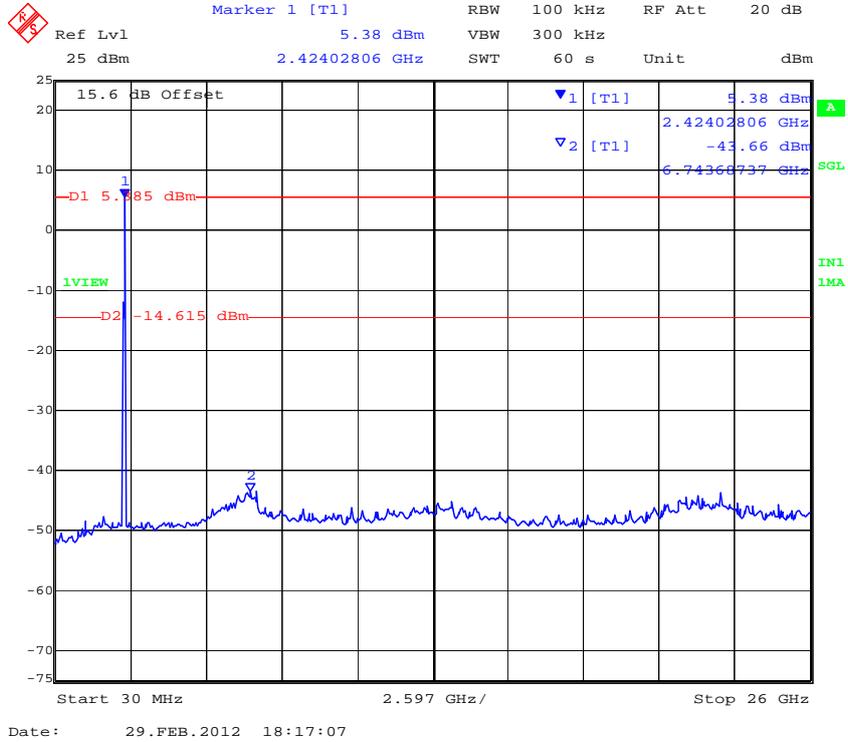

PORT B 802.11n HT-40 2,452 MHz Conducted Spurious Emissions 0.03 – 26 GHz

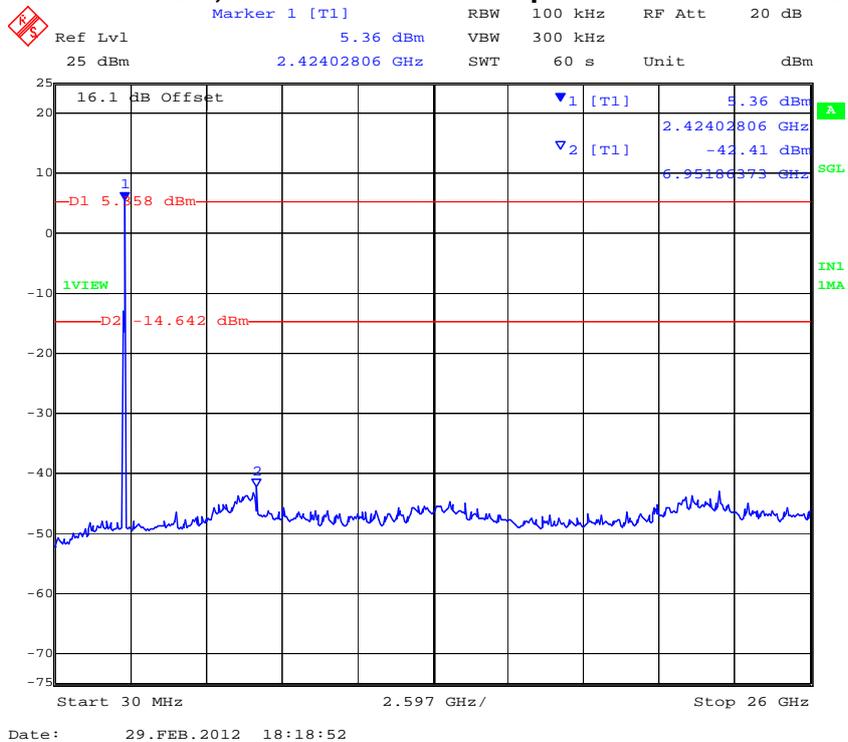


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 218 of 331

PORT C 802.11n HT-40 2,452 MHz Conducted Spurious Emissions 0.03 – 26 GHz

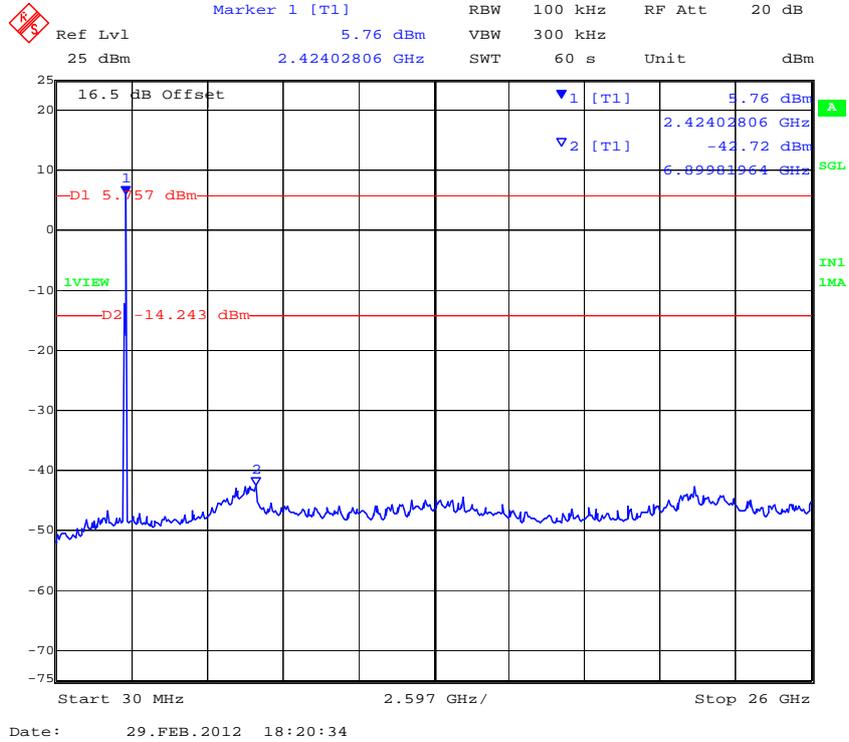

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11a Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A dBi		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
5745.000	30.00	26000.00	-41.24	-11.69	-42.05	-12.16	-40.08	-9.81		
5785.000	30.00	26000.00	-40.99	-9.70	-41.78	-10.68	-39.60	-7.29		
5825.000	30.00	26000.00	-38.38	-9.19	-41.29	-11.24	-40.13	-9.36		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
5745.000	5725.00	-13.00	-9.88	-10.38	-9.81	-9.68	-7.81		
5825.000	5850.00	-11.64	-8.27	-16.14	-10.27	-11.35	-7.62		

BE: Maximum Band edge emission found


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

Note: Limit is based on 20dB down from fundamental emission


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11a Legacy - Conducted Band Edge Spurious 5,725 MHz

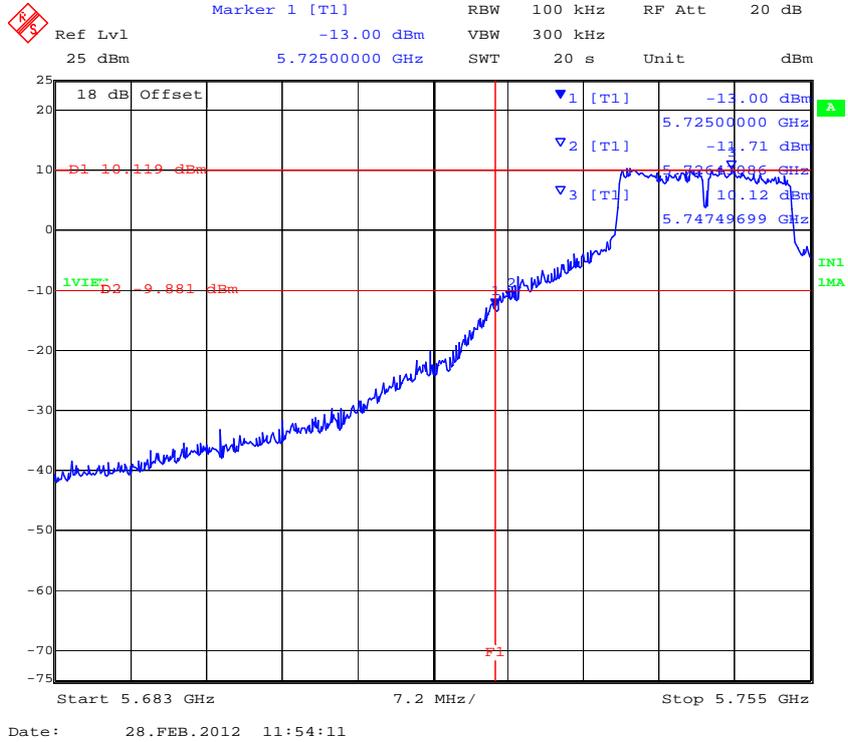


PORT B 802.11a Legacy - Conducted Band Edge Spurious 5,725 MHz

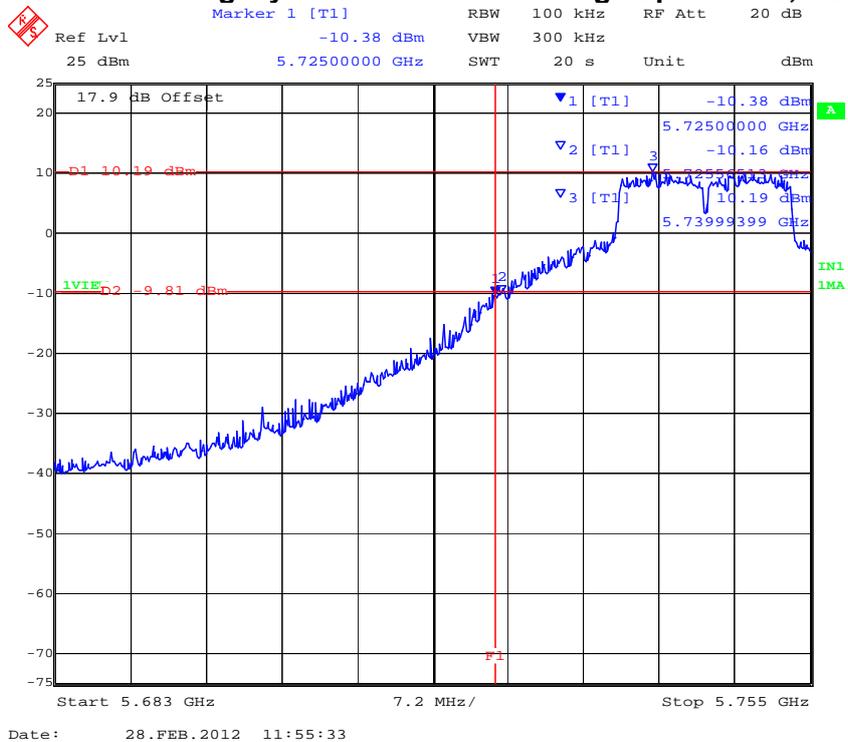

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT C 802.11a Legacy - Conducted Band Edge Spurious 5,725 MHz

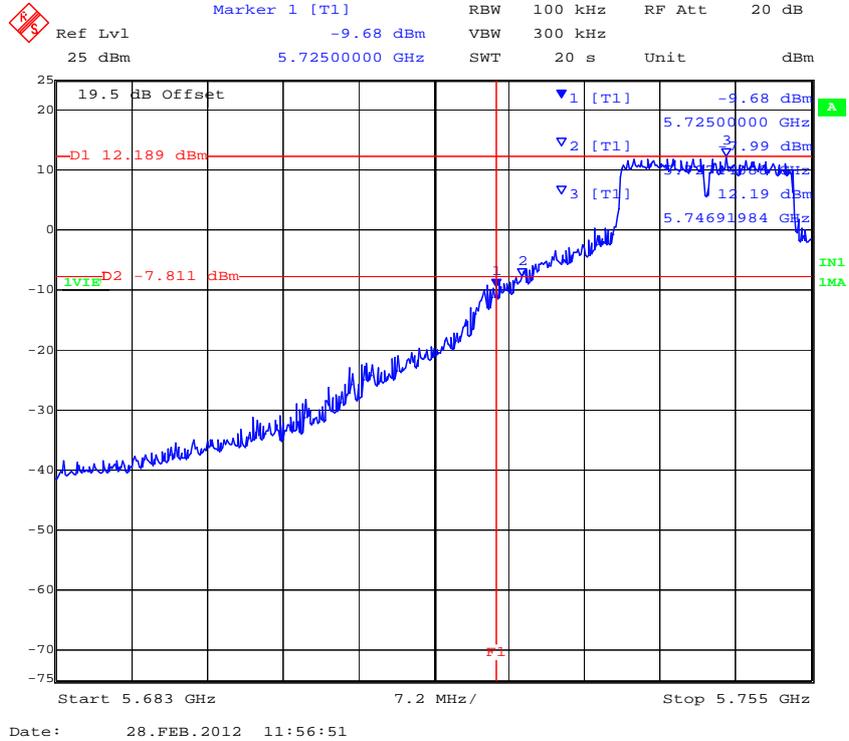


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11a Conducted Spurious Emissions at 5,850 MHz Band Edge

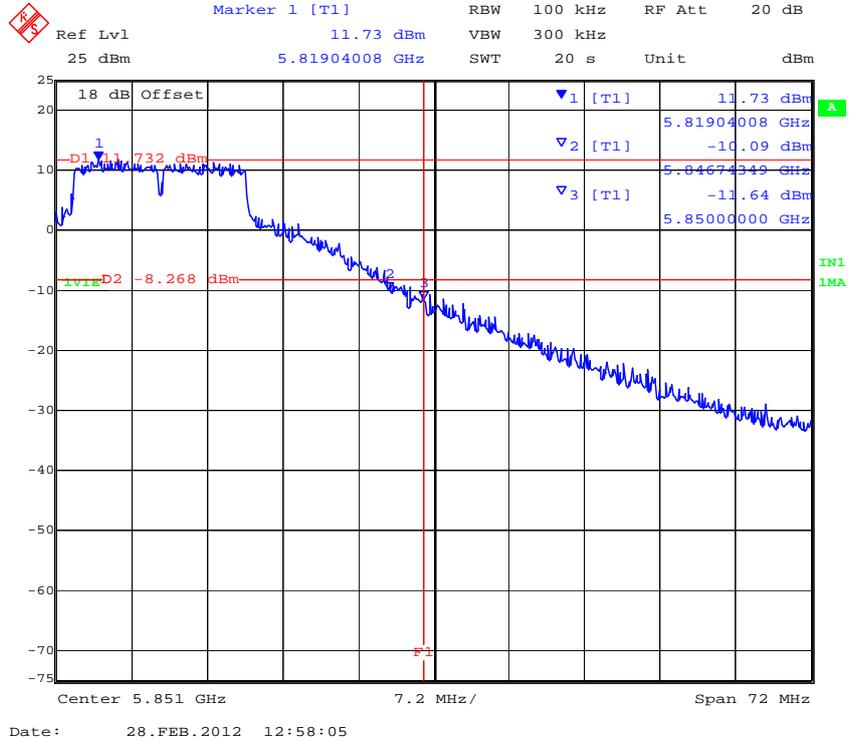


PORT B 802.11a Conducted Spurious Emissions at 5,850 MHz Band Edge

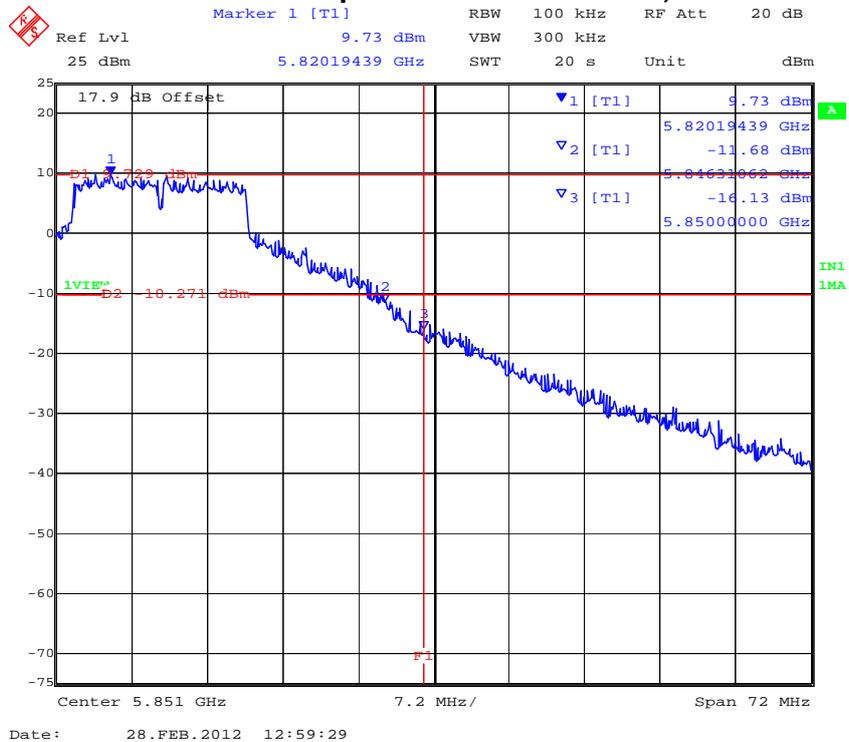

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT C 802.11a Conducted Spurious Emissions at 5,850 MHz Band Edge

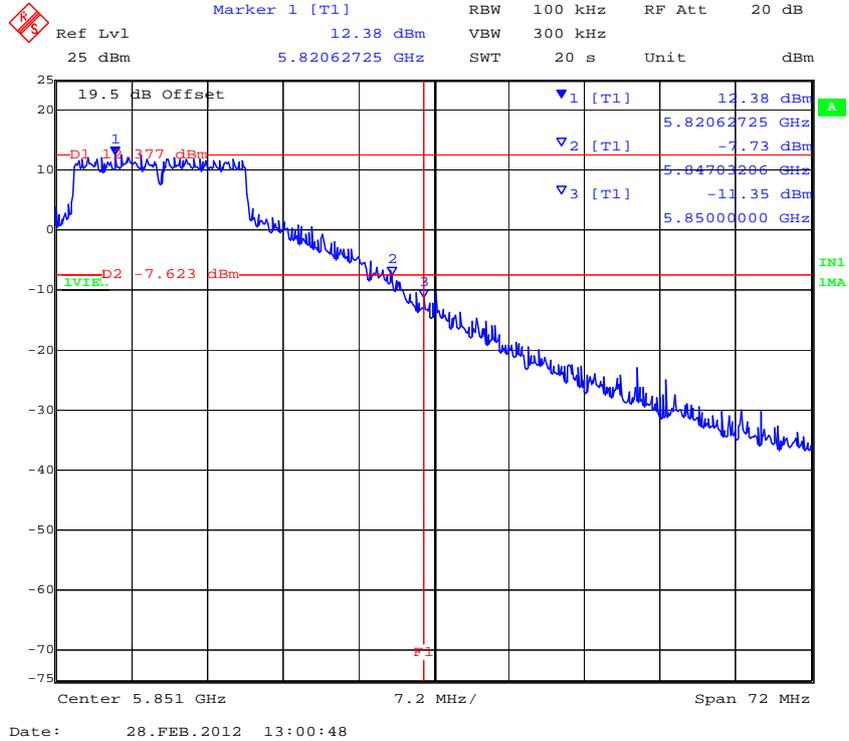


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11a – Legacy 5,745 MHz Conducted Spurious Emissions 0.03 – 26 GHz

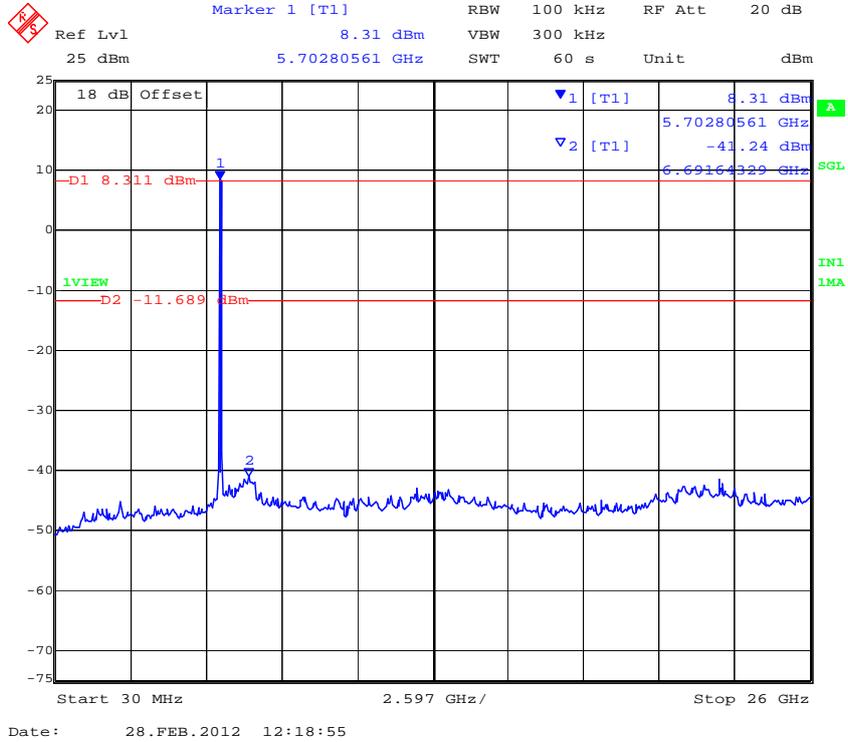

PORT B 802.11a – Legacy 5,745 MHz Conducted Spurious Emissions 0.03 – 26 GHz

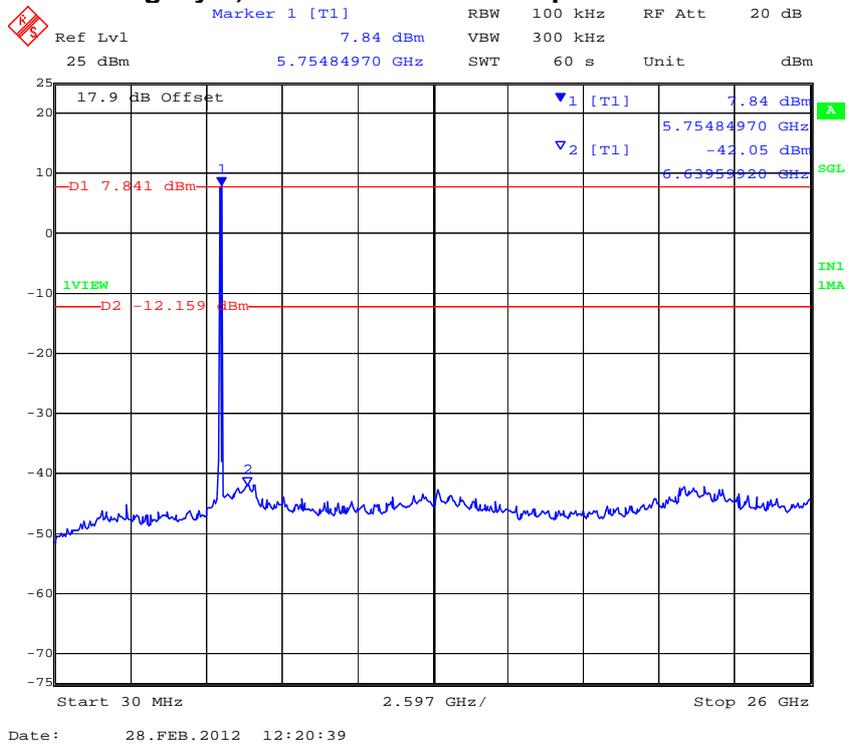


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 225 of 331


PORT C 802.11a – Legacy 5,745 MHz Conducted Spurious Emissions 0.03 – 26 GHz

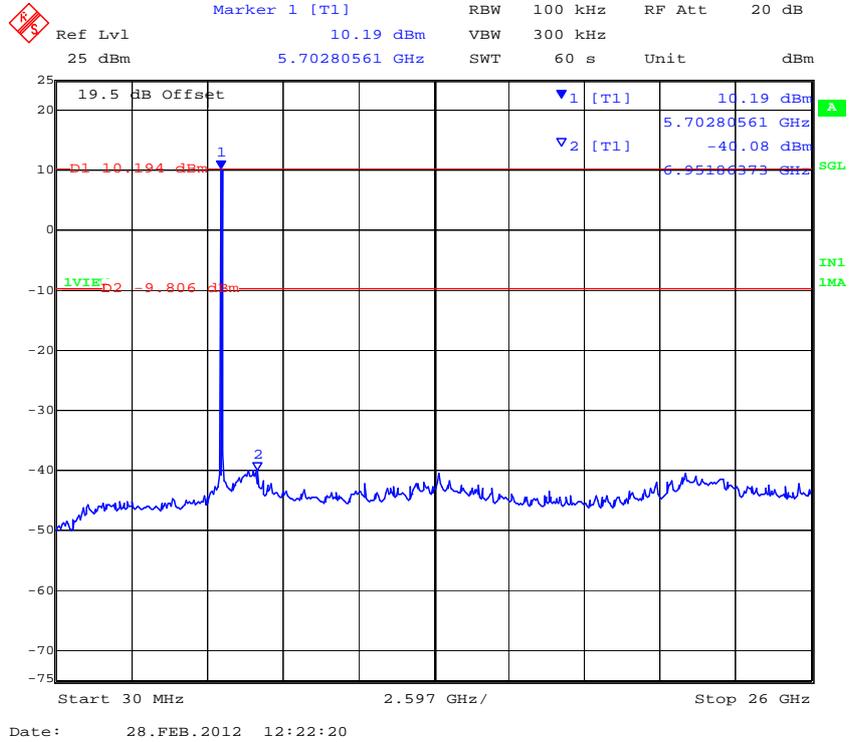


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11a – Legacy 5,785 MHz Conducted Spurious Emissions 0.03 – 26 GHz

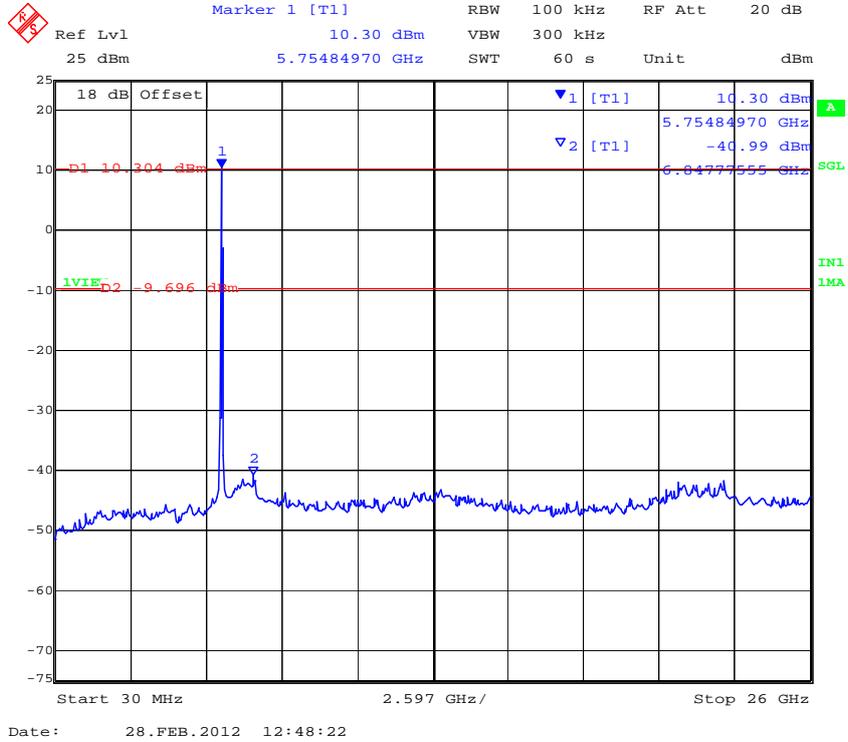

PORT B 802.11a – Legacy 5,785 MHz Conducted Spurious Emissions 0.03 – 26 GHz

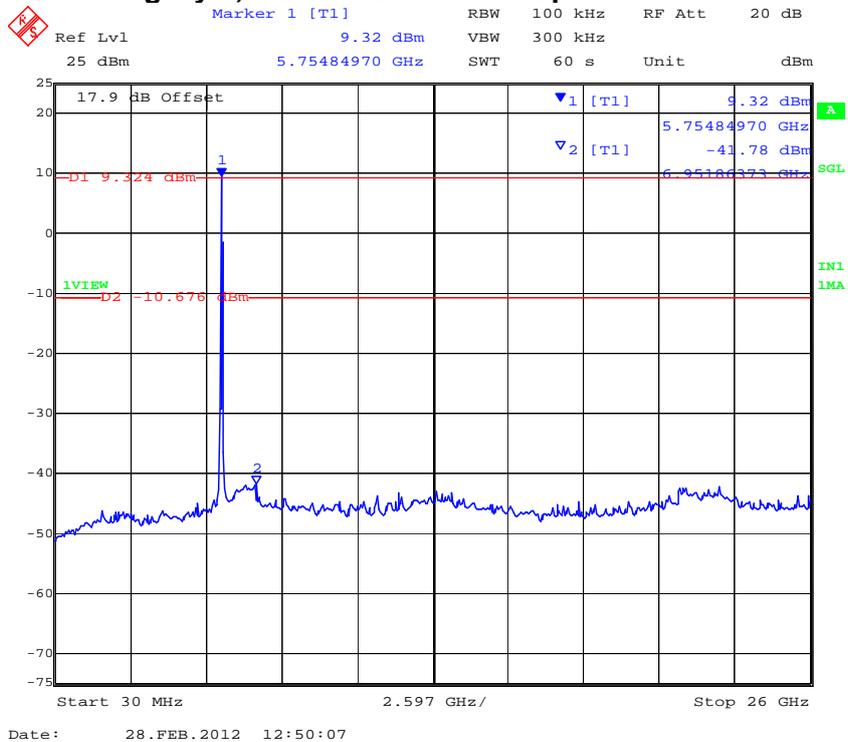


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 227 of 331


PORT C 802.11a – Legacy 5,785 MHz Conducted Spurious Emissions 0.03 – 26 GHz

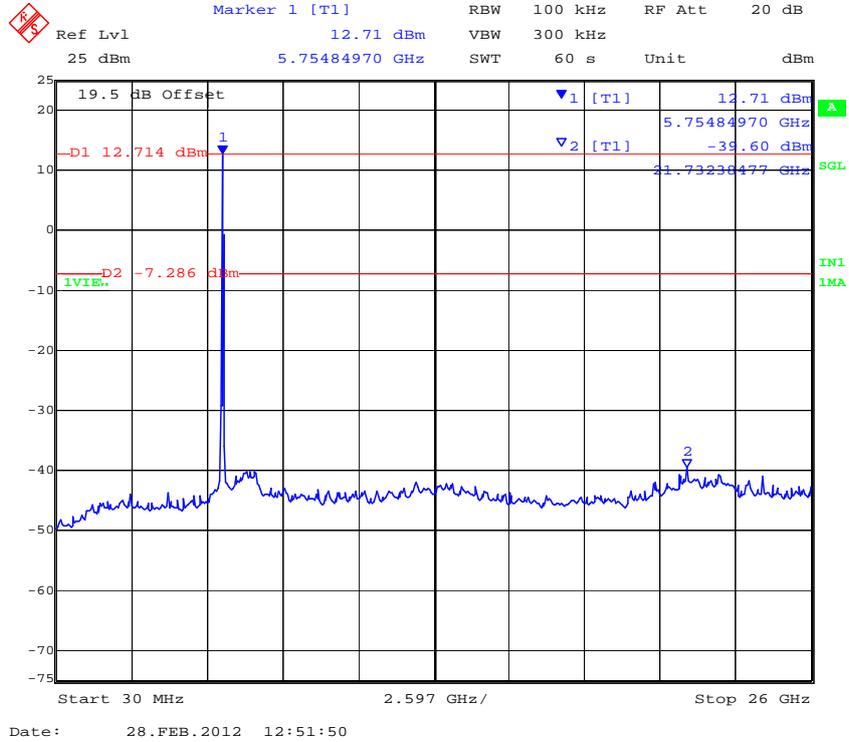

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT A 802.11a – Legacy 5,825 MHz Conducted Spurious Emissions 0.03 – 26 GHz

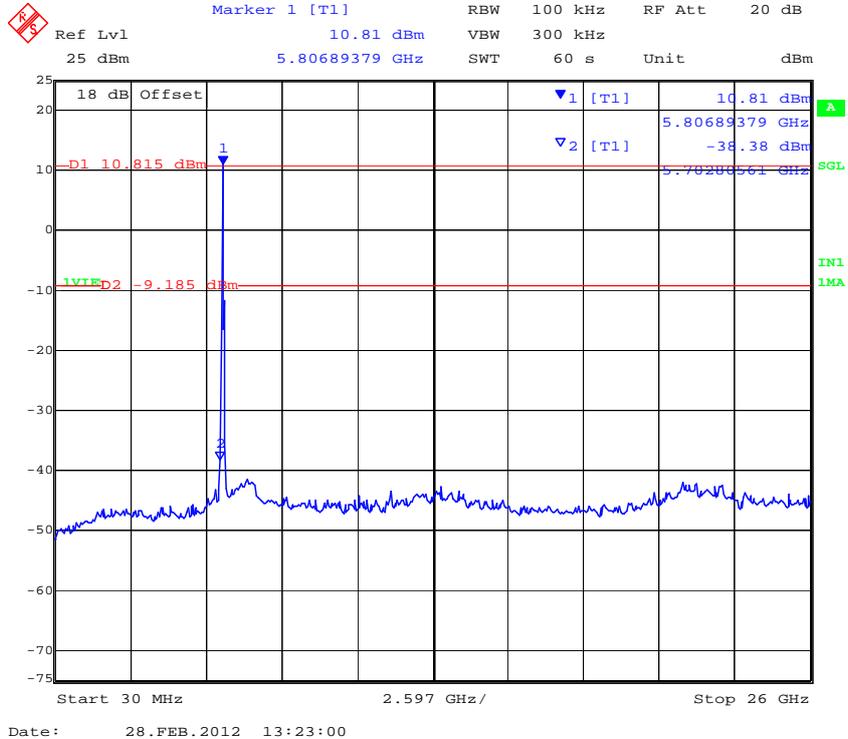

Date: 28.FEB.2012 13:23:00

PORT B 802.11a – Legacy 5,825 MHz Conducted Spurious Emissions 0.03 – 26 GHz

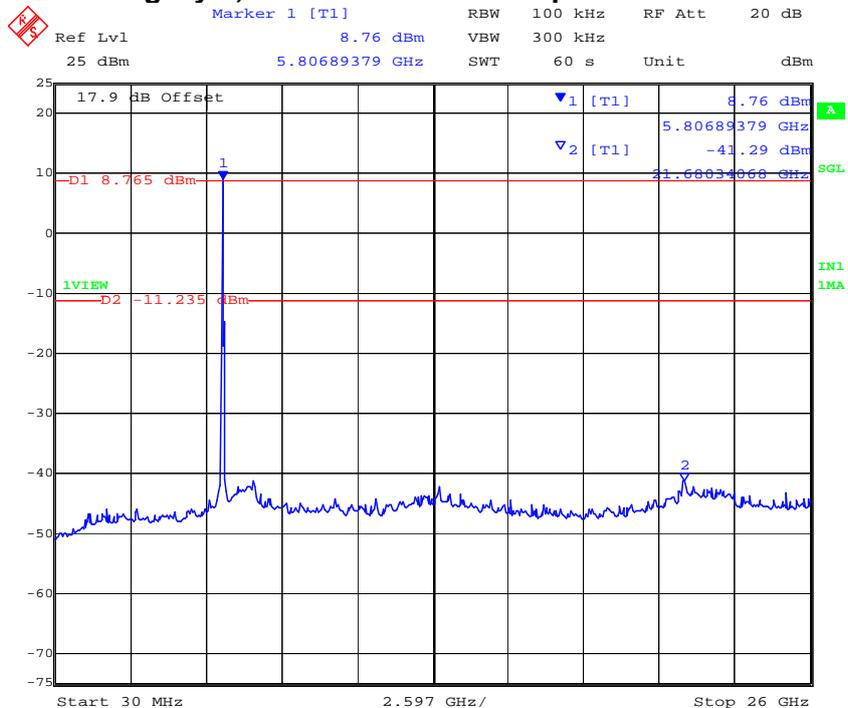


Date: 28.FEB.2012 13:24:47

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 229 of 331

PORT C 802.11a – Legacy 5,825 MHz Conducted Spurious Emissions 0.03 – 26 GHz

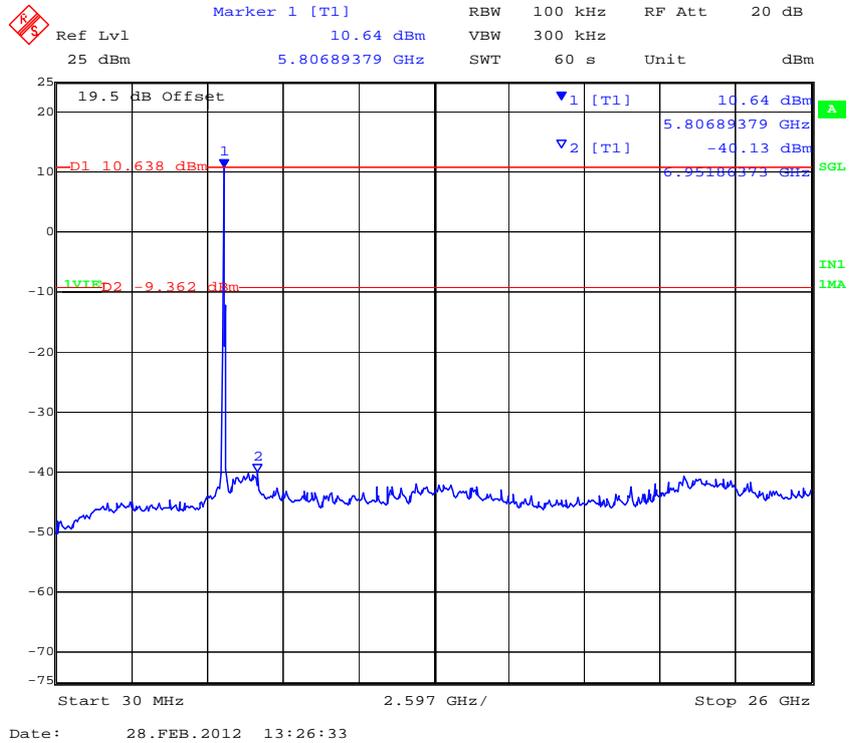

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11n HT-20

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A dBi		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
5745.000	30.00	26000.00	-41.14	-12.04	-41.33	-12.21	-39.68	-10.40		
5785.000	30.00	26000.00	-41.31	-9.51	-40.81	-10.16	-40.18	-8.40		
5825.000	30.00	26000.00	-39.25	-9.70	-41.17	-12.82	-39.43	-9.68		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
5745.000	5725.00	-14.55	-11.72	-12.75	-11.99	-12.73	-10.34		
5825.000	5850.00	-12.66	-7.79	-16.74	-11.12	-14.75	-8.82		

BE: Maximum Band edge emission found


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

Note: Limit is based on 20dB down from fundamental emission


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-20 Legacy - Conducted Band Edge Spurious 5,725 MHz

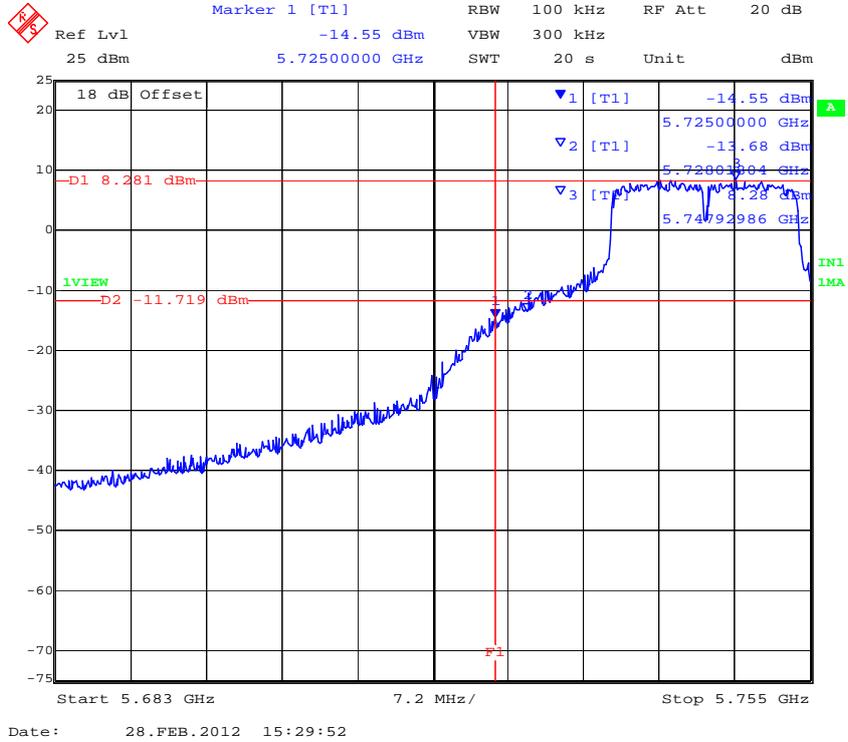


PORT B 802.11n HT-20 Legacy - Conducted Band Edge Spurious 5,725 MHz

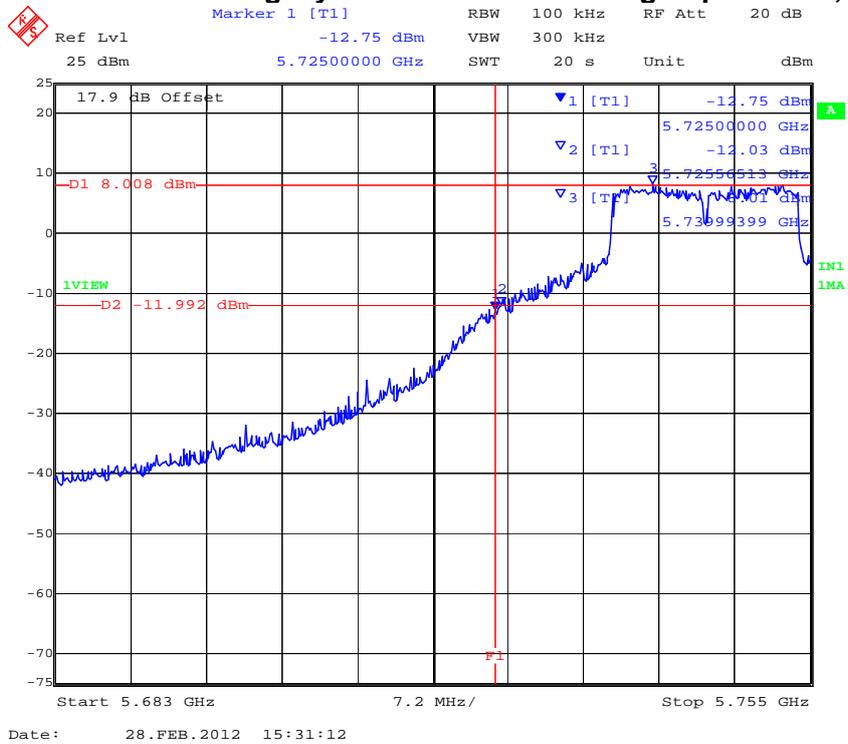

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT C 802.11n HT-20 Legacy - Conducted Band Edge Spurious 5,725 MHz

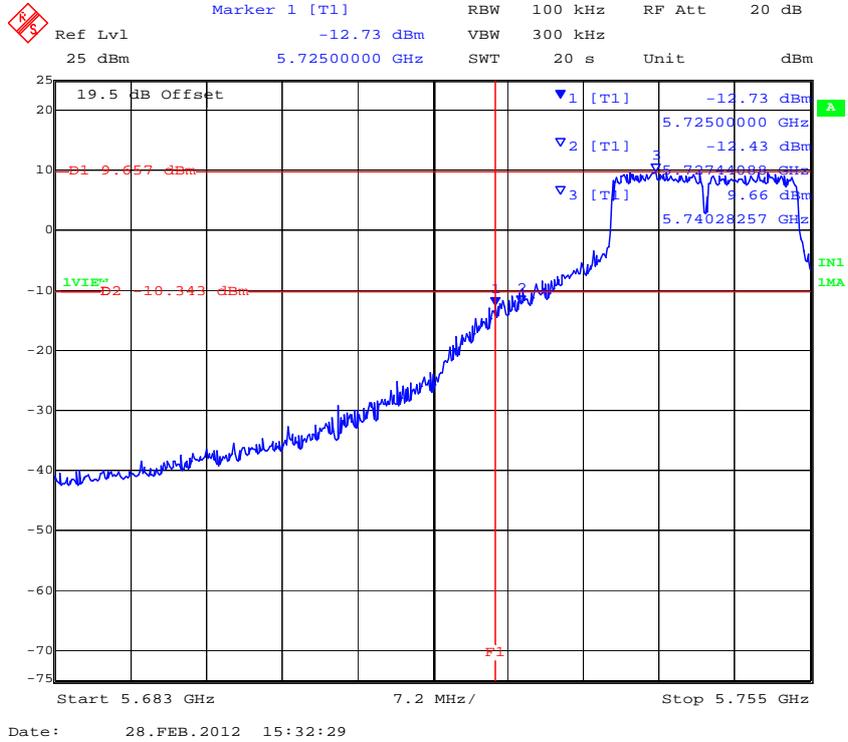


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-20 Conducted Spurious Emissions at 5,850 MHz Band Edge

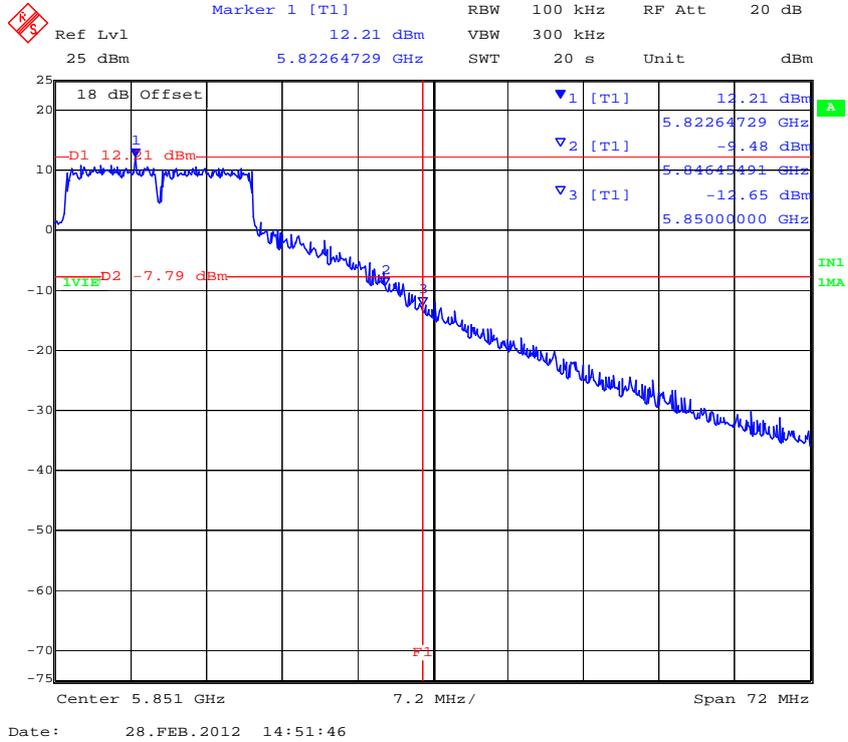


PORT B 802.11n HT-20 Conducted Spurious Emissions at 5,850 MHz Band Edge

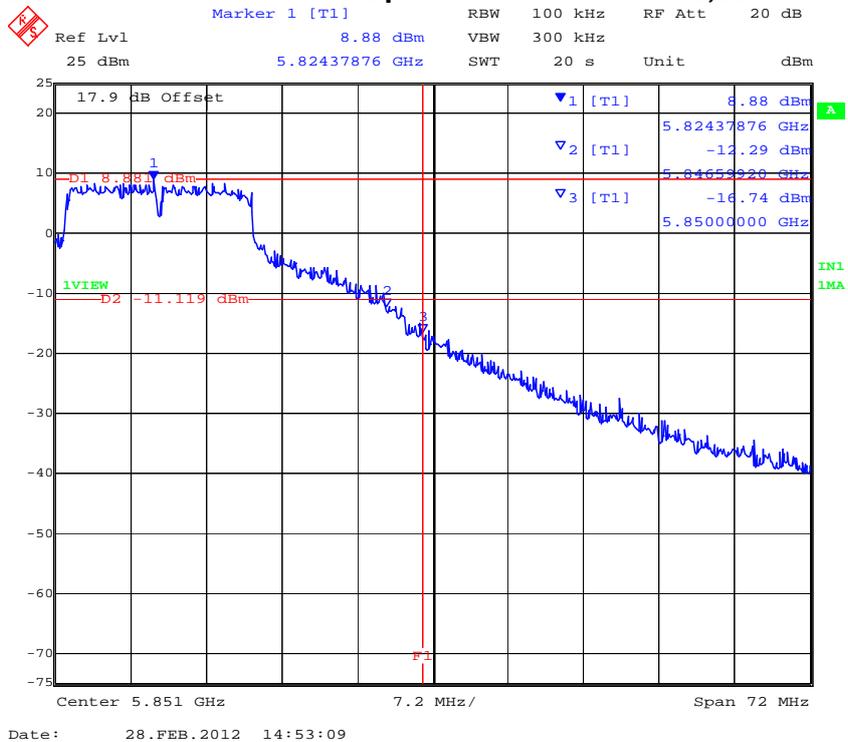

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT C 802.11n HT-20 Conducted Spurious Emissions at 5,850 MHz Band Edge

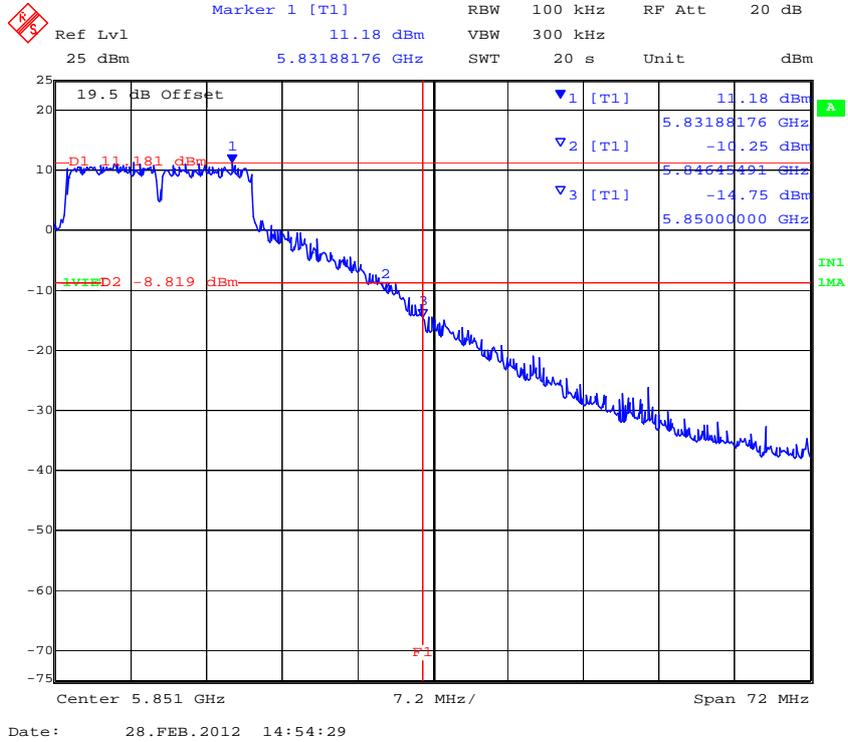


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-20 5,745 MHz Conducted Spurious Emissions 0.03 – 26 GHz

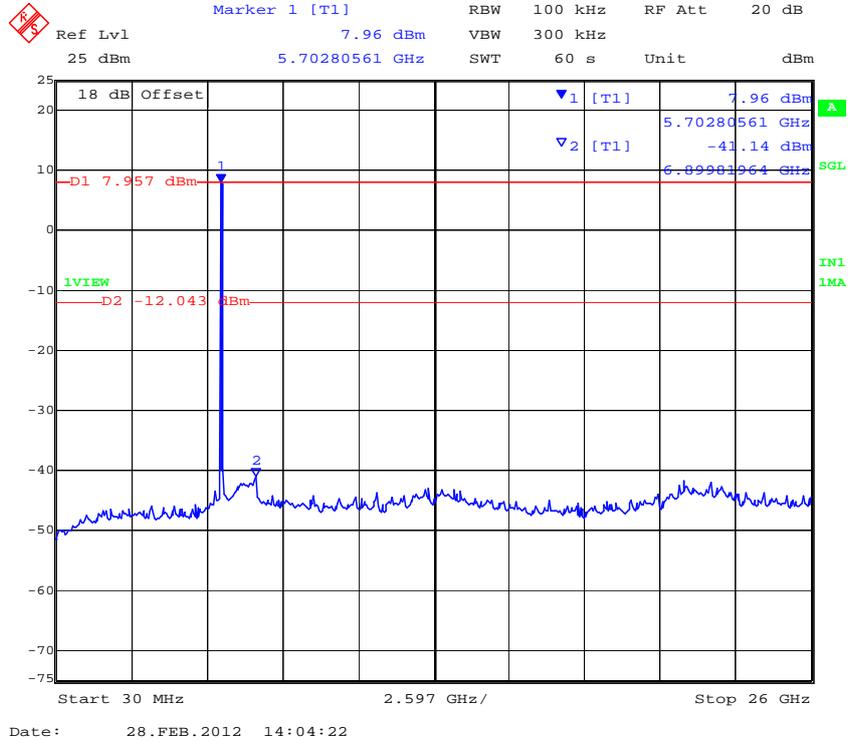

PORT B 802.11n HT-20 5,745 MHz Conducted Spurious Emissions 0.03 – 26 GHz

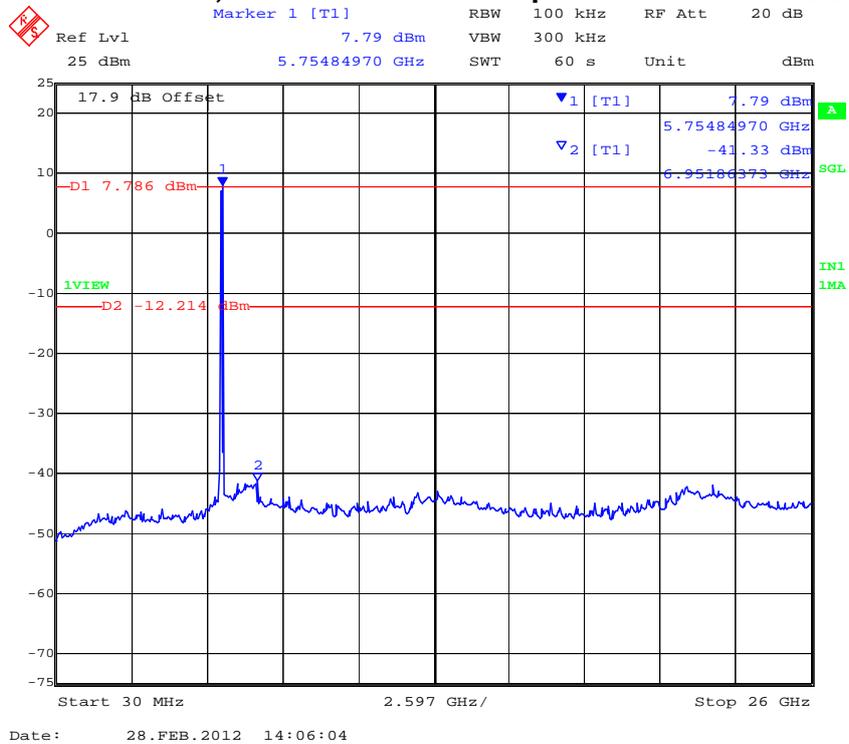


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 236 of 331


PORT C 802.11n HT-20 5,745 MHz Conducted Spurious Emissions 0.03 – 26 GHz

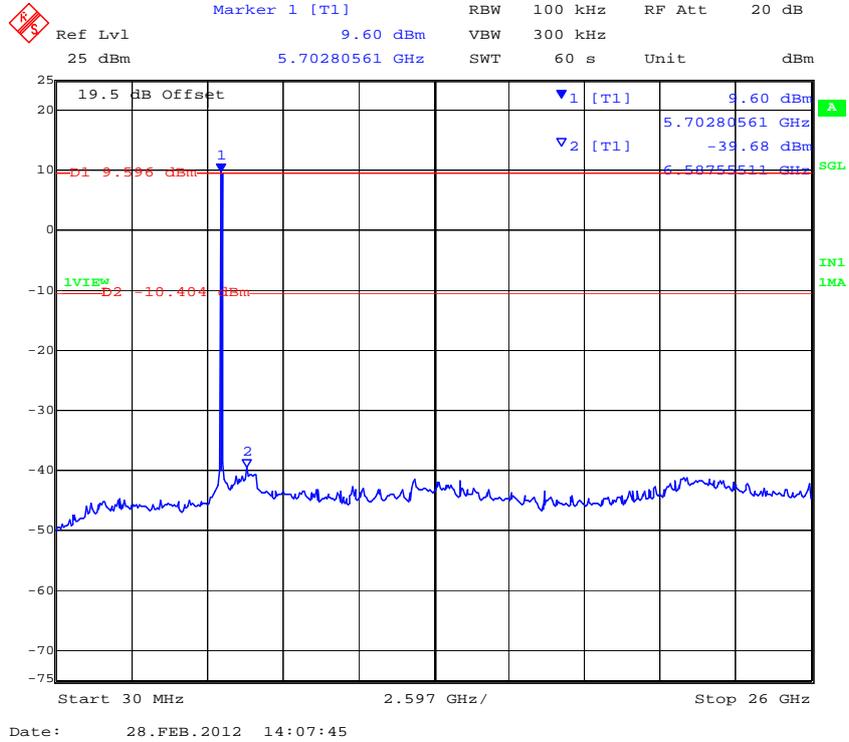


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-20 5,785 MHz Conducted Spurious Emissions 0.03 – 26 GHz

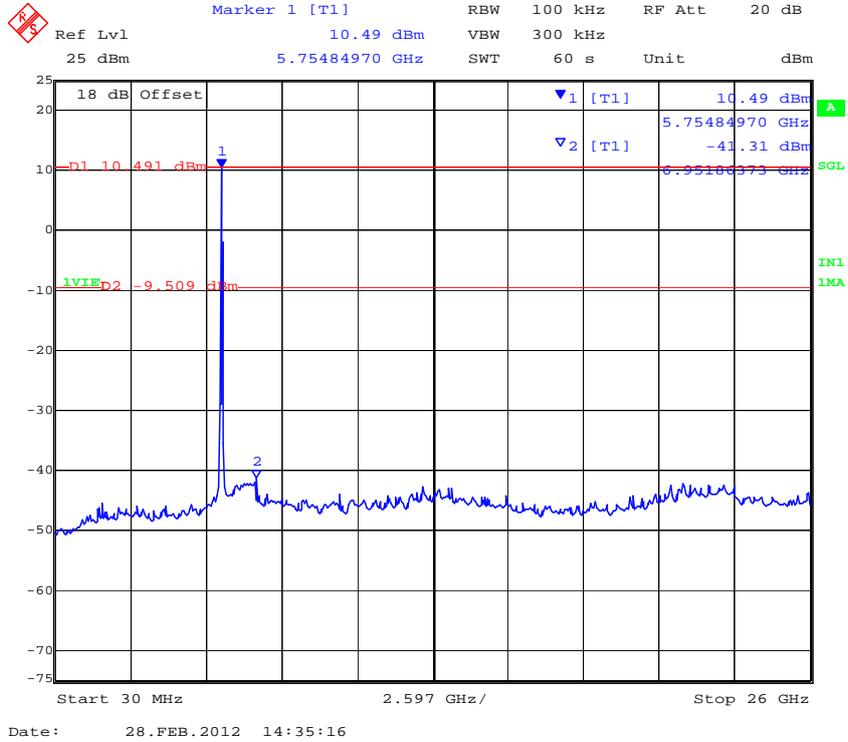

PORT B 802.11n HT-20 5,785 MHz Conducted Spurious Emissions 0.03 – 26 GHz

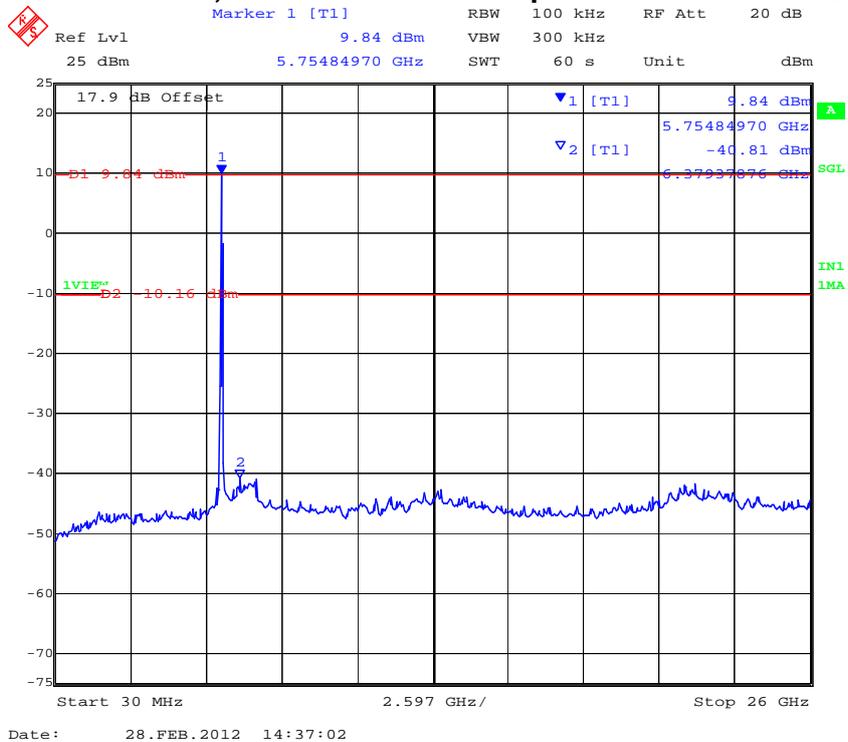


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 238 of 331


PORT C 802.11n HT-20 5,785 MHz Conducted Spurious Emissions 0.03 – 26 GHz

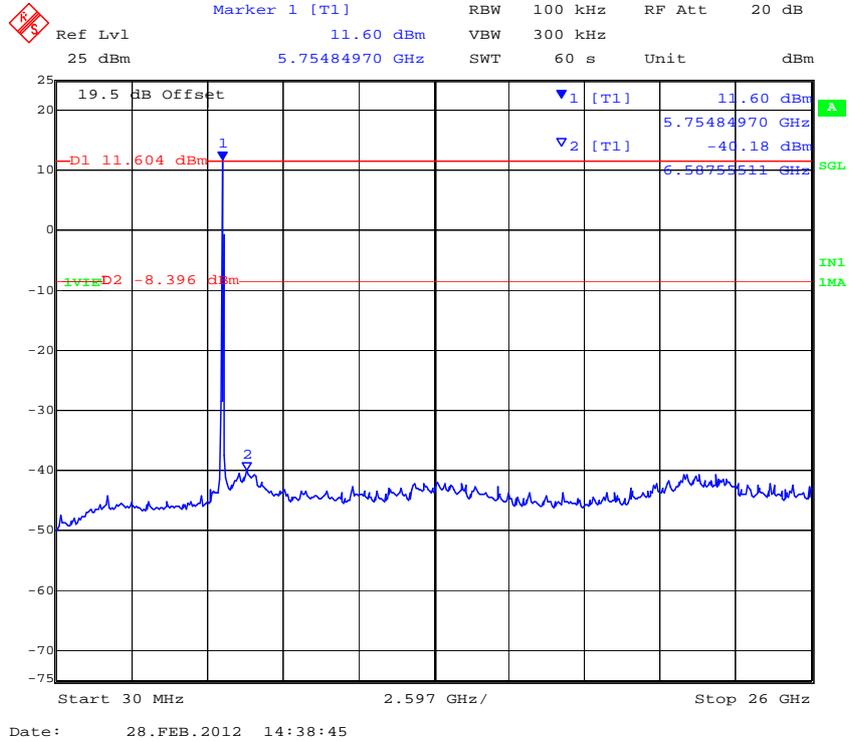


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-20 5,825 MHz Conducted Spurious Emissions 0.03 – 26 GHz

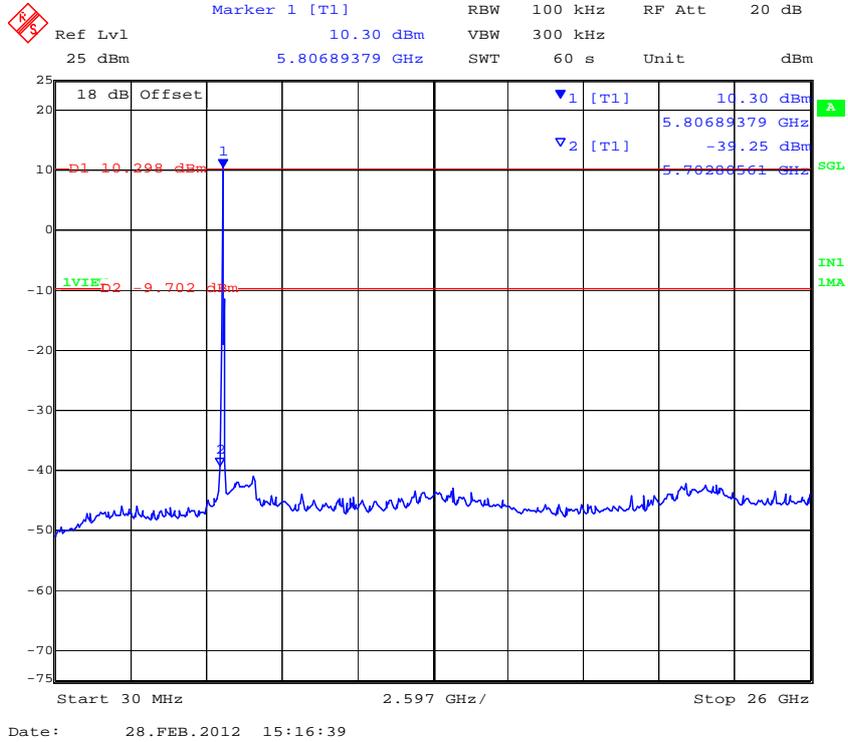

PORT B 802.11n HT-20 5,825 MHz Conducted Spurious Emissions 0.03 – 26 GHz

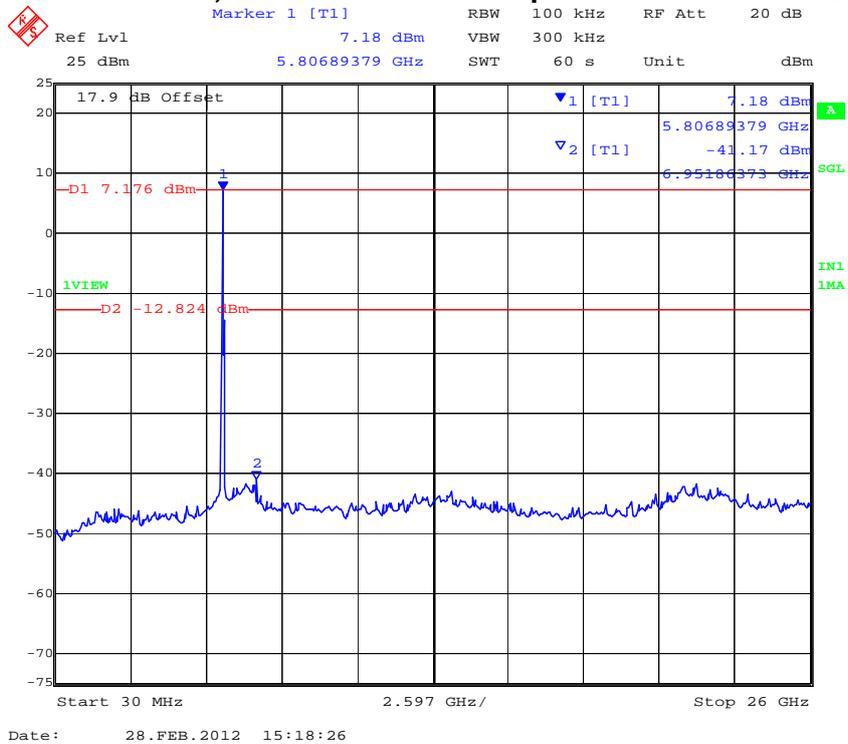


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 240 of 331

PORT C 802.11n HT-20 5,825 MHz Conducted Spurious Emissions 0.03 – 26 GHz

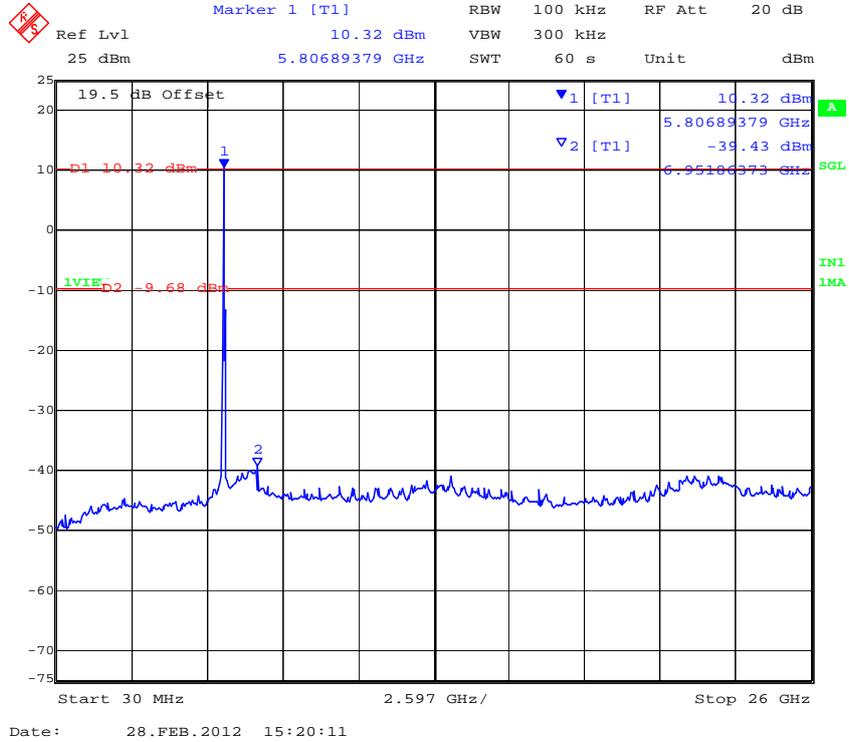

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11N HT-40

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A dBi		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
			SE dBm	Limit dBm						
5755.000	30.00	26000.00	-41.29	-15.39	-41.76	-16.52	-39.27	-14.68		
5795.000	30.00	26000.00	-40.99	-12.27	-40.67	-12.97	-39.82	-11.37		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
		BE dBm	Limit dBm						
5755.000	5725.00	-25.10	-16.96	-17.78	-17.06	-22.86	-15.51		
5795.000	5850.00	-18.98	-12.06	-20.13	-13.02	-18.76	-10.50		


BE: Maximum Band edge emission found

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


Note: Limit is based on 20dB down from fundamental emission



PORT A 802.11n HT-40 Legacy - Conducted Band Edge Spurious 5,725 MHz

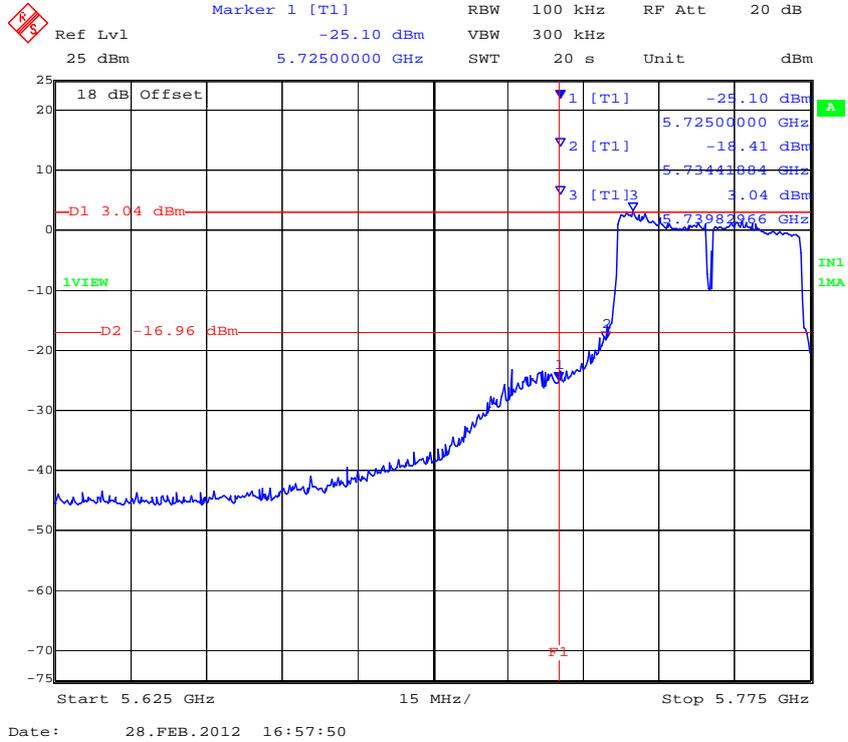

PORT B 802.11n HT-40 Legacy - Conducted Band Edge Spurious 5,725 MHz

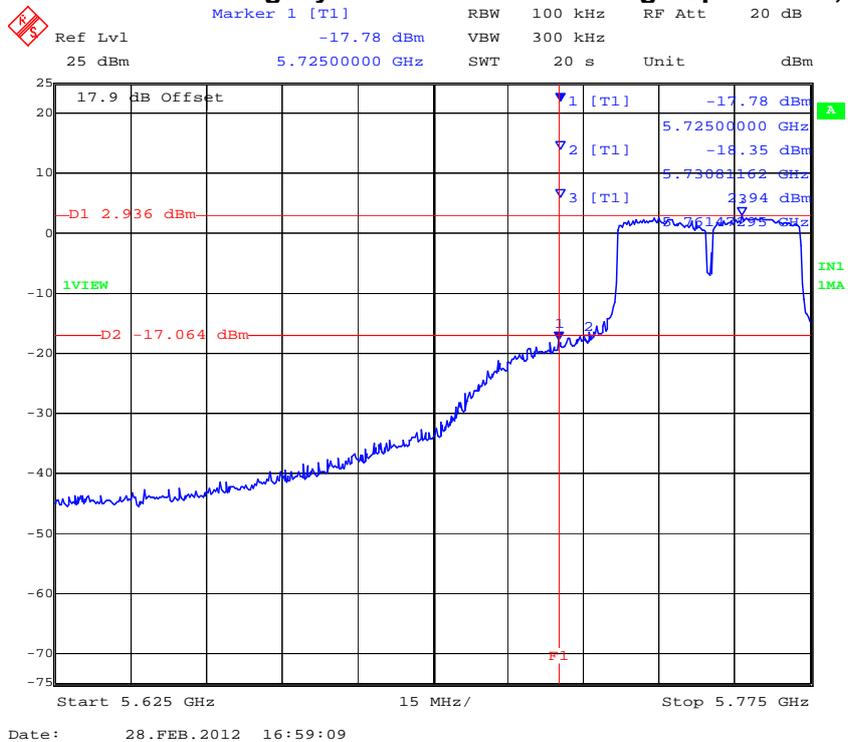


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 243 of 331


PORT C 802.11n HT-40 Legacy - Conducted Band Edge Spurious 5,725 MHz

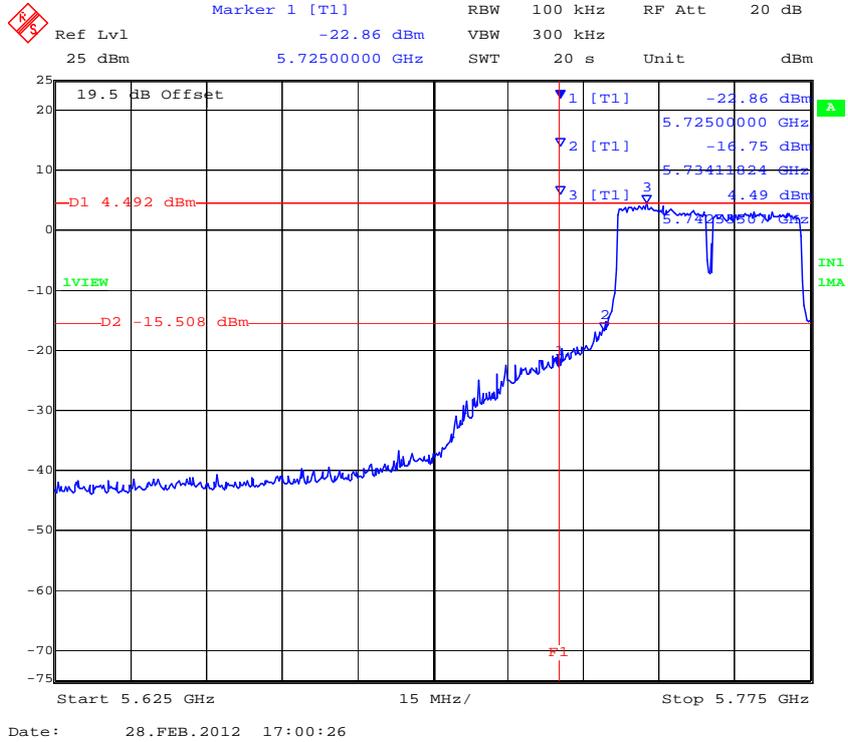


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-40 Conducted Spurious Emissions at 5,850 MHz Band Edge

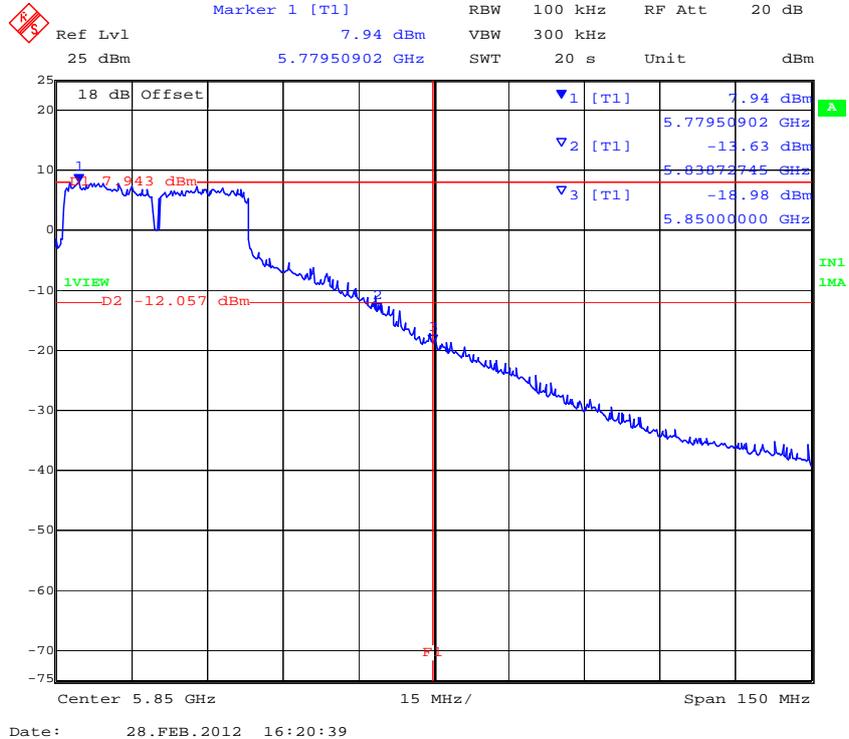


PORT B 802.11n HT-40 Conducted Spurious Emissions at 5,850 MHz Band Edge

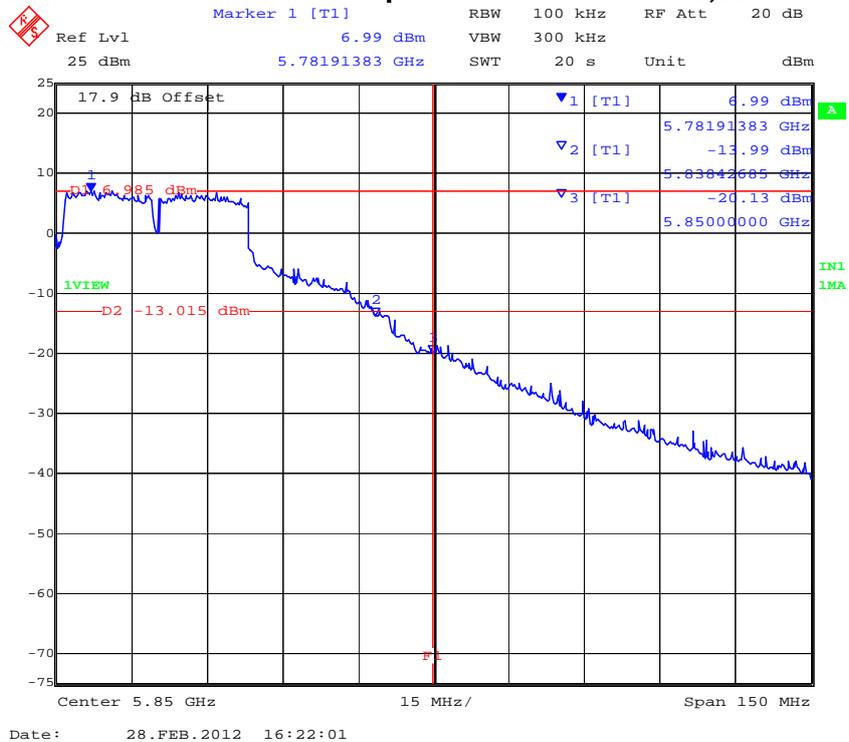

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




PORT C 802.11n HT-40 Conducted Spurious Emissions at 5,850 MHz Band Edge

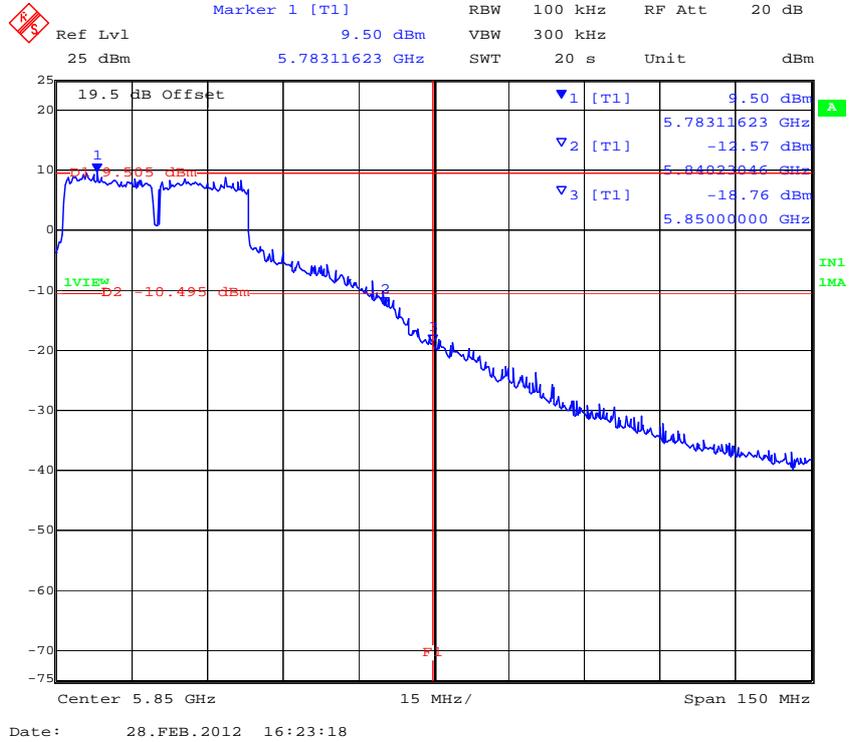


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-40 5,755 MHz Conducted Spurious Emissions 0.03 – 26 GHz

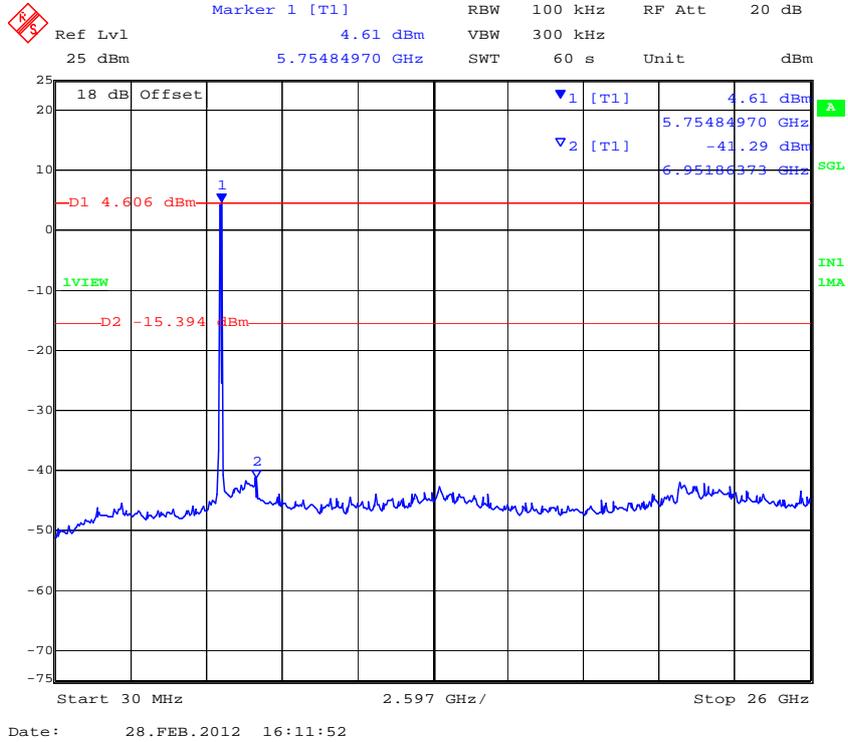

PORT B 802.11n HT-40 5,755 MHz Conducted Spurious Emissions 0.03 – 26 GHz

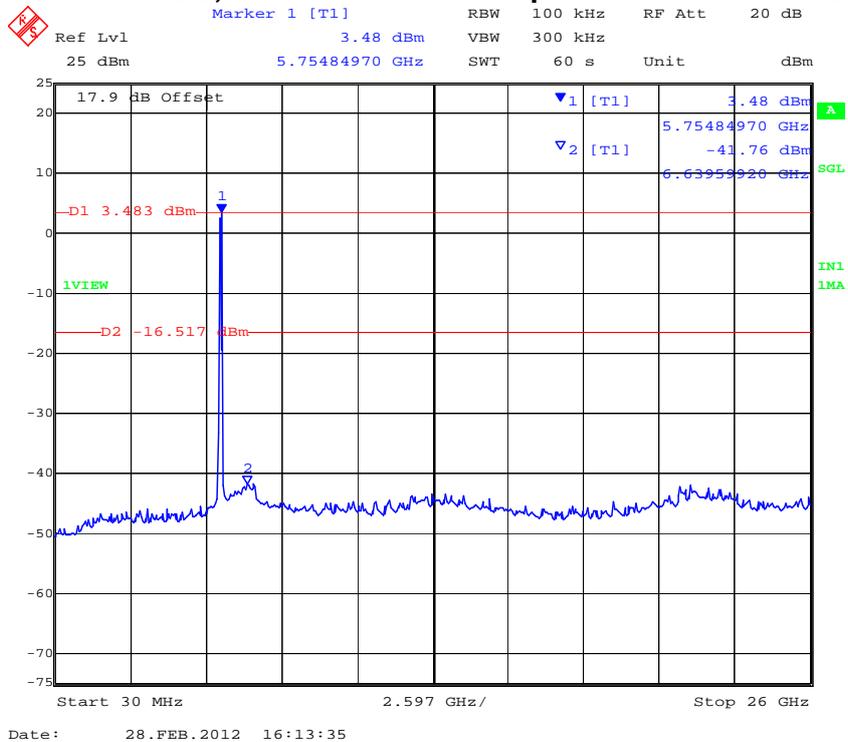


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 247 of 331


PORT C 802.11n HT-40 5,755 MHz Conducted Spurious Emissions 0.03 – 26 GHz

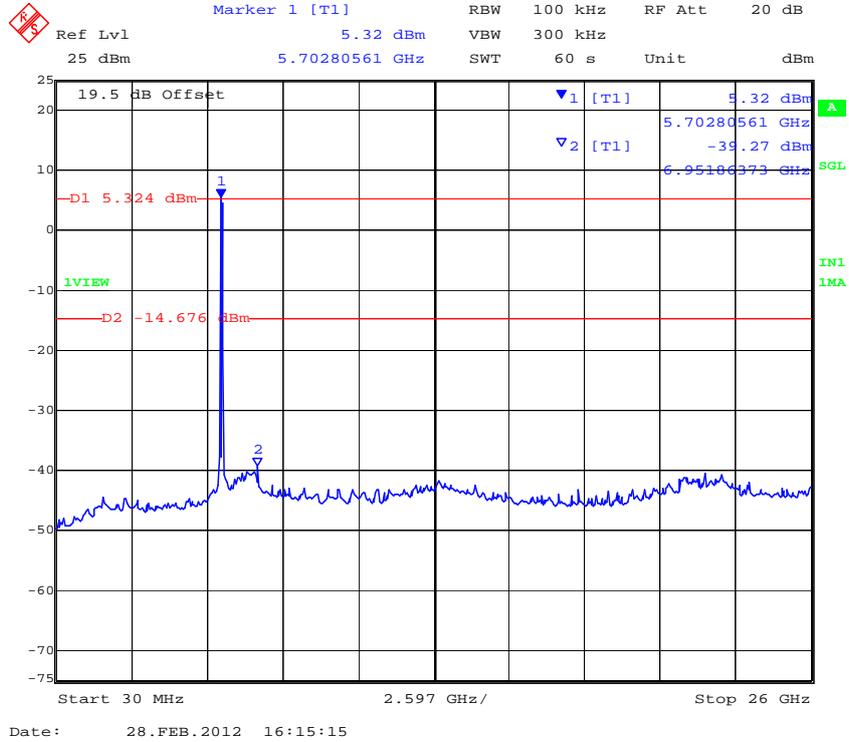


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



PORT A 802.11n HT-40 5,795 MHz Conducted Spurious Emissions 0.03 – 26 GHz

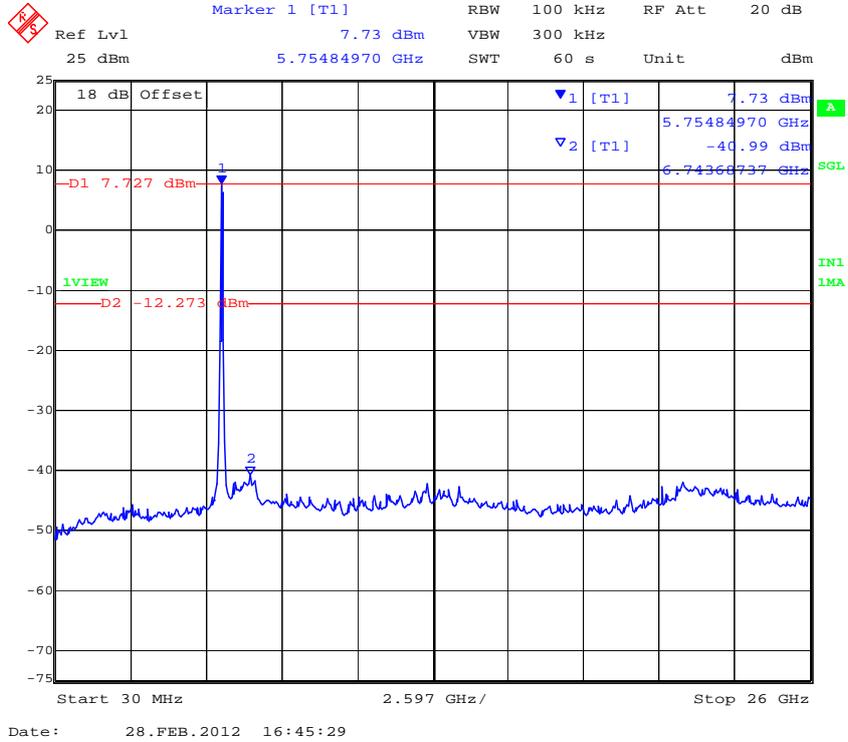

PORT B 802.11n HT-40 5,795 MHz Conducted Spurious Emissions 0.03 – 26 GHz

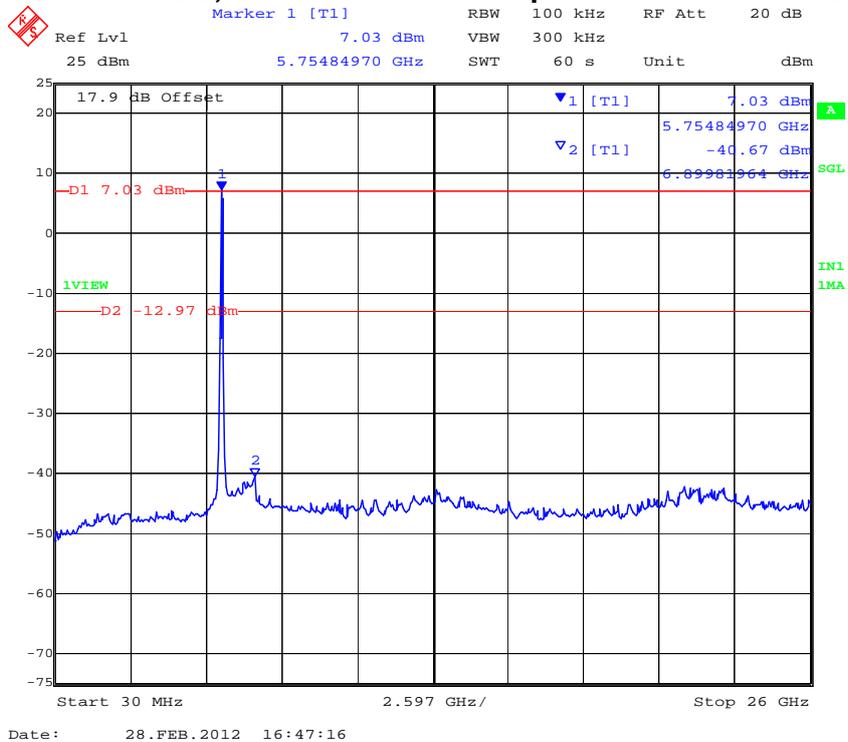

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 250 of 331

Specification

Limits Band-Edge

Lower Limit Band-edge	Upper Limit Band-edge	Limit below highest level of desired power
2,400 MHz	2,483.5 MHz	≥ 20 dB
5725 MHz	5850 MHz	

§15.247(d) and RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

§15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

RSS-210 §A8.5 If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz , whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0088, 0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 251 of 331

5.1.6. Radiated Emissions

Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands

FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209
Industry Canada RSS-210 §A8.5, §2.2, §2.6
Industry Canada RSS-Gen §4.7

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:


$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radiated Emission Measurement Setup – Above 1 GHz

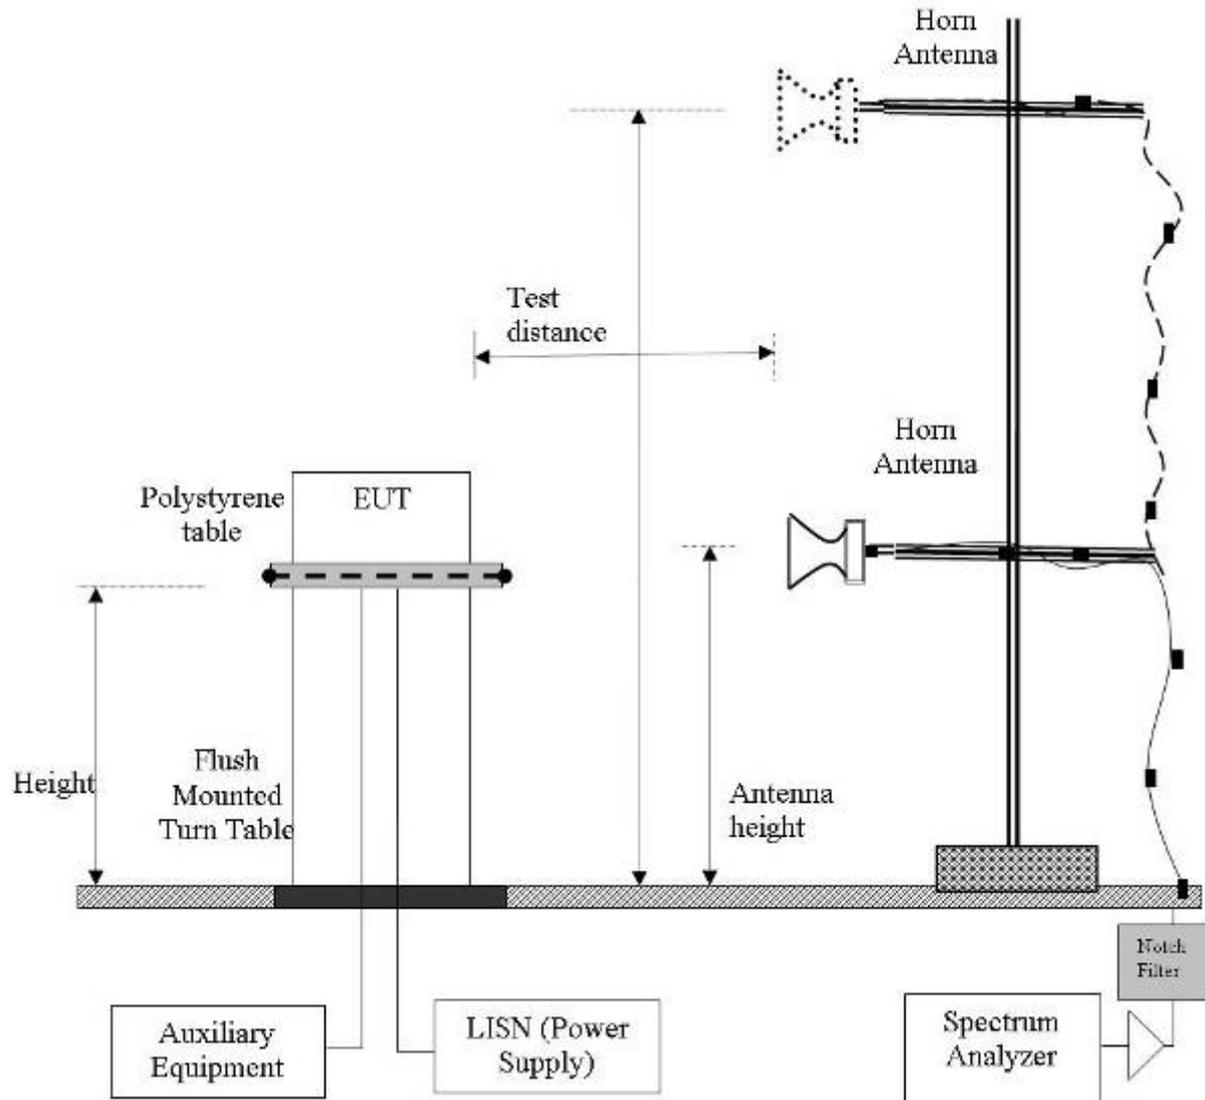


NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add $10 \log(N)$ dB was implemented



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 253 of 331

5.1.6.1. Omni Antenna

Test Freq.	2412 MHz	Engineer	GMH
Variant	802.11b; 1 Mbs	Temp (°C)	19.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	23	Press. (mBars)	1011
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

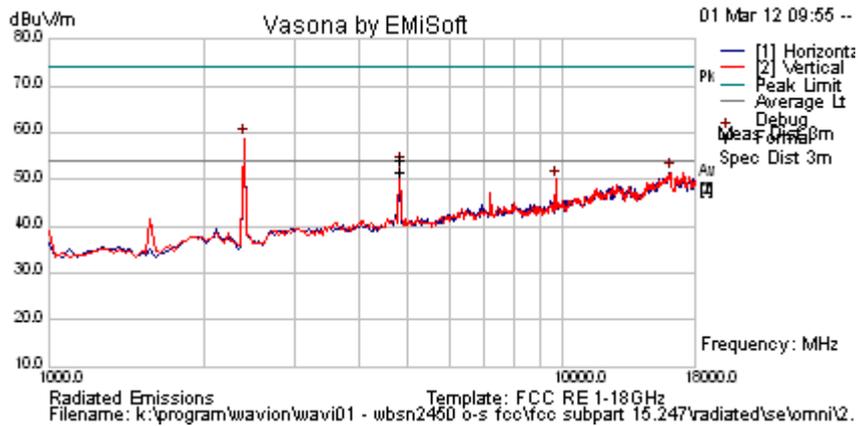

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4824.000	59.5	4.5	-9.7	54.3	Peak Max	V	109	8	74.0	-19.7	Pass	RB
4824.00001	56.9	4.5	-9.7	51.7	Average Max	V	109	8	54.0	-2.3	Pass	RB
2396.794	67.4	3.0	-11.7	58.7	Peak [Scan]	H						FUND
16126.253	42.3	9.0	0.2	51.5	Peak [Scan]	V	200	0	54.0	-2.5	Pass	NOISE
9653.307	47.2	6.3	-3.5	50.0	Peak [Scan]	H					Pass	NRB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 254 of 331

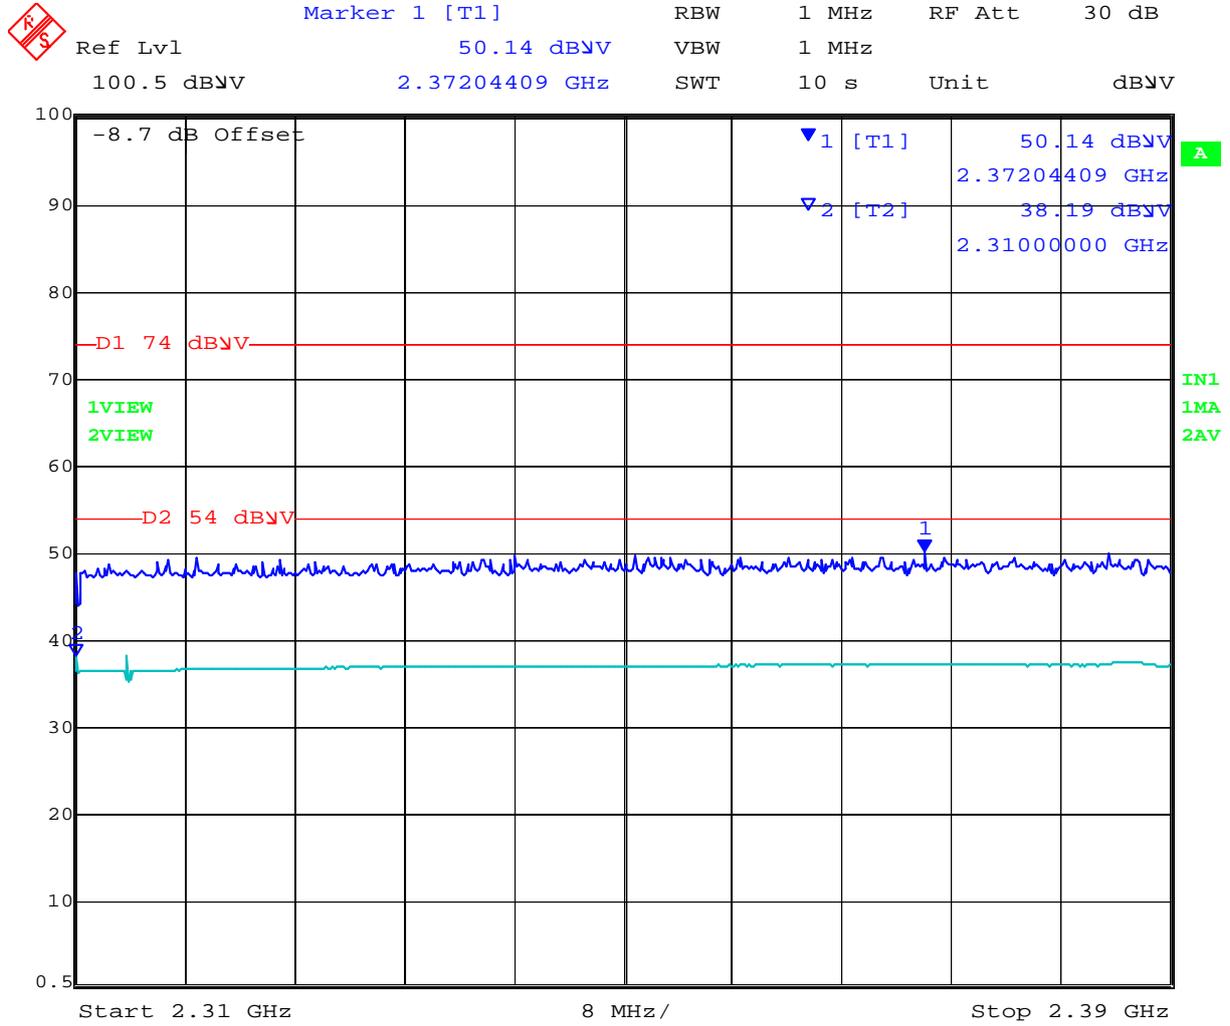


Date: 1.MAR.2012 12:31:10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 255 of 331

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11b; 1 Mbs	Temp (°C)	19.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	23	Press. (mBars)	1011
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

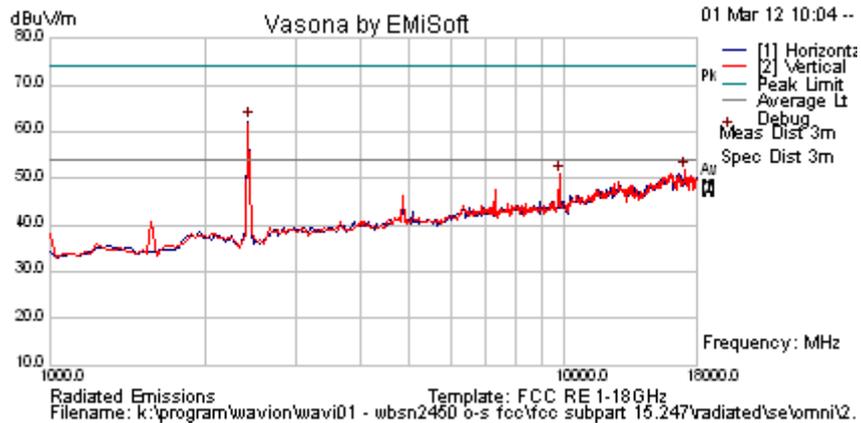

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	70.8	3.0	-11.6	62.2	Peak [Scan]	H						
17114.228	42.8	8.5	0.5	51.8	Peak [Scan]	V	150	0	54.0	-2.3	Pass	NOISE
9755.511	48.4	6.4	-3.7	51.0	Peak [Scan]	V	100	0	54.0	-3.0	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 256 of 331

Test Freq.	2462 MHz	Engineer	GMH
Variant	802.11b; 1 Mbs	Temp (°C)	19.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	23	Press. (mBars)	1011
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

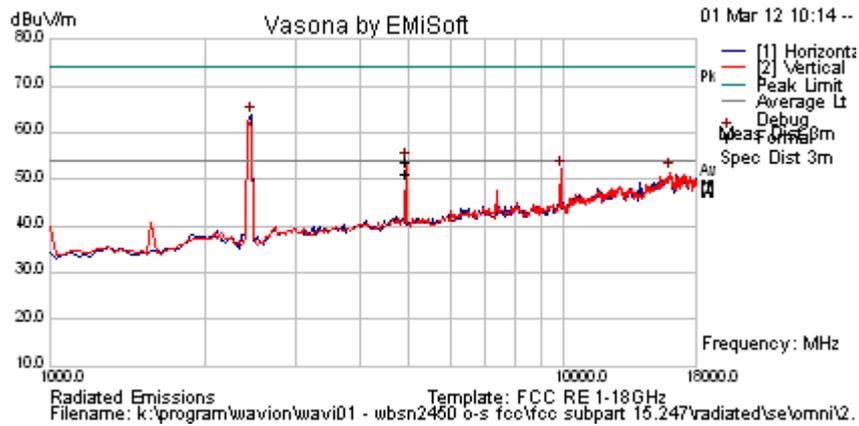

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4923.989	59.1	4.6	-9.8	53.9	Peak Max	V	98	67	74.0	-20.1	Pass	
4923.989	56.4	4.6	-9.8	51.1	Average Max	V	98	67	54.0	-2.9	Pass	
2464.930	72.2	3.0	-11.5	63.7	Peak [Scan]	H	150	0	54.0	9.7	Fail	
9857.715	49.2	6.4	-3.5	52.1	Peak [Scan]	V	150	0	54.0	-1.9	Pass	
16058.116	42.2	9.0	0.3	51.5	Peak [Scan]	V	100	0	54.0	-2.5	Pass	

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 257 of 331

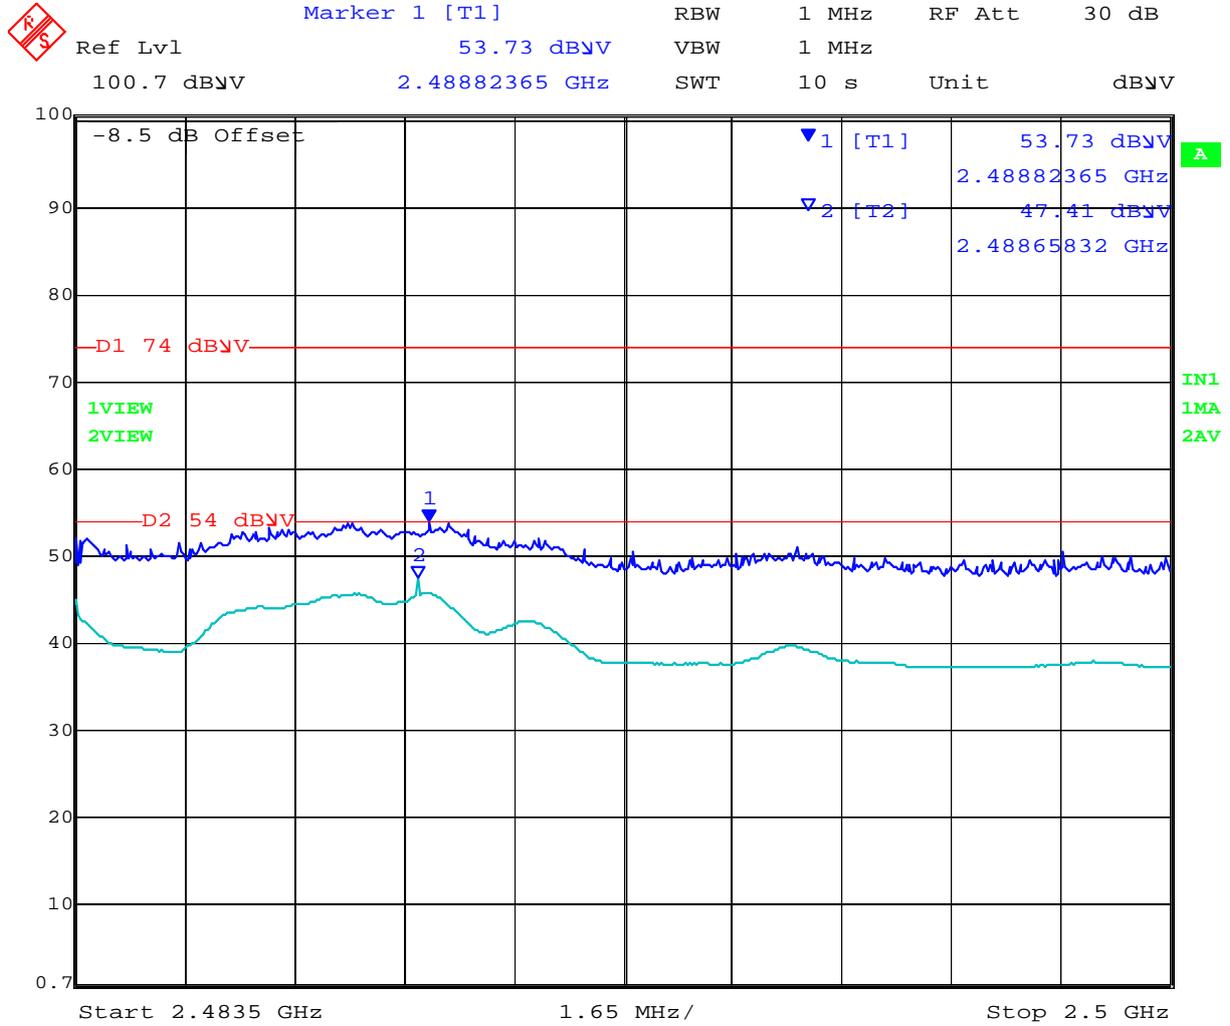


Date: 1.MAR.2012 12:45:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 258 of 331

Test Freq.	2412 MHz	Engineer	GMH
Variant	802.11g; 6 Mbs	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	22.5 (Power Reduction)	Press. (mBars)	1010
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

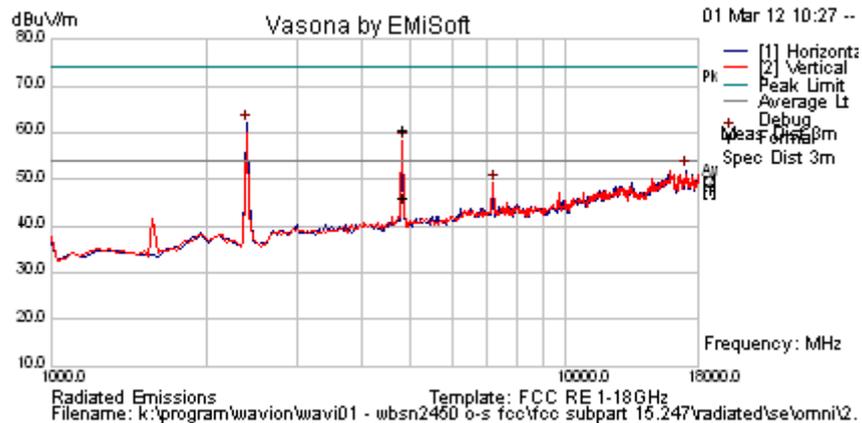


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4821.976	65.9	4.5	-9.7	60.7	Peak Max	V	121	10	74.0	-13.3	Pass	RB
4821.976	51.3	4.5	-9.7	46.1	Average Max	V	121	10	54.0	-7.9	Pass	RB
2396.794	70.7	3.0	-11.7	62.0	Peak [Scan]	H						FUND
17080.160	43.0	8.5	0.4	51.9	Peak [Scan]	H	200	0	54.0	-2.1	Pass	NOISE
7234.469	49.5	5.4	-5.8	49.1	Peak [Scan]	V	150	0	54.0	-4.9	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 259 of 331

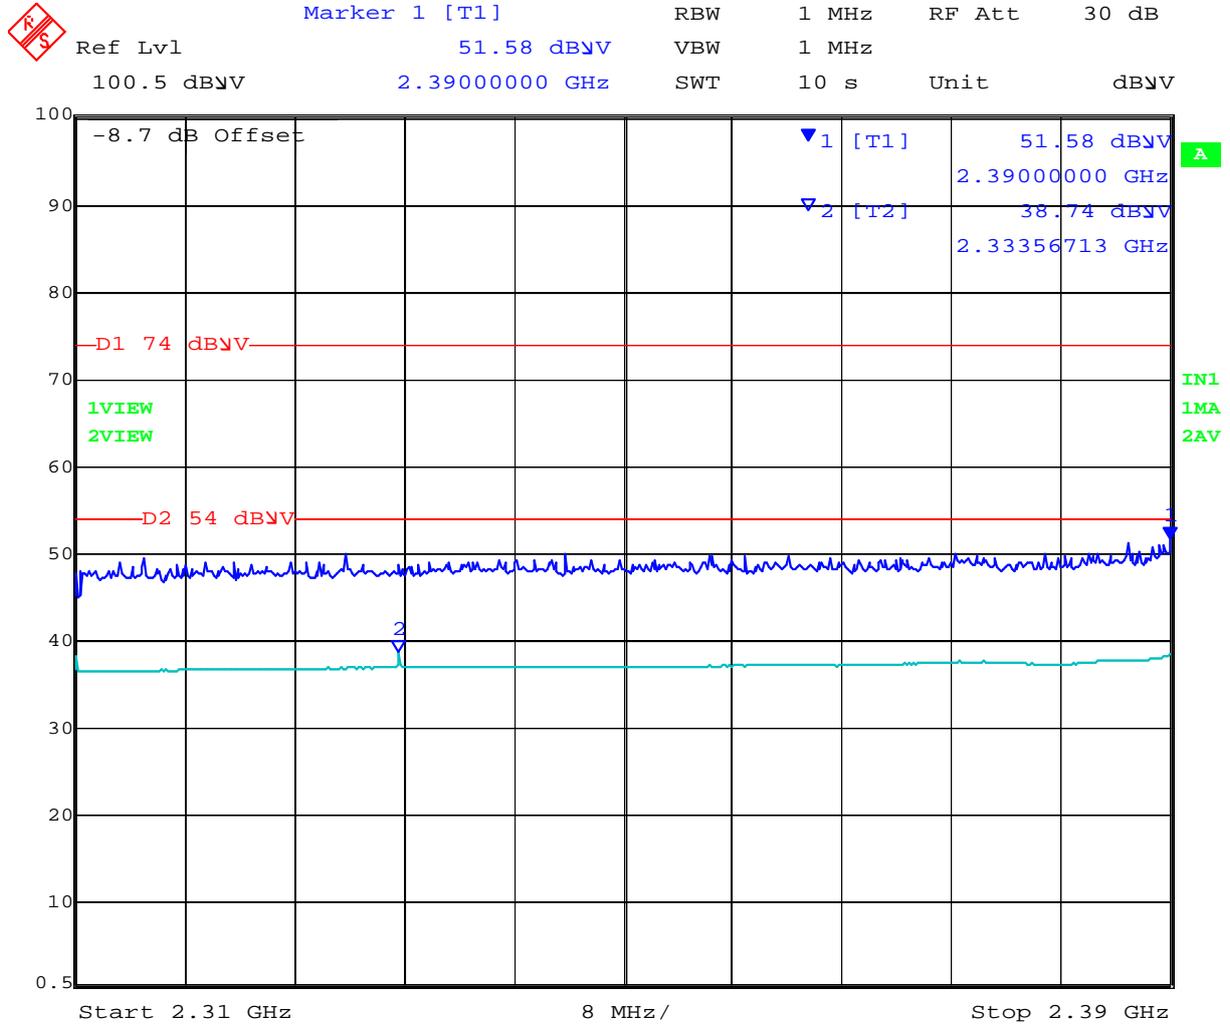


Date: 1.MAR.2012 12:33:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 260 of 331

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11g; 6 Mbs	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	22.5 (Power Reduction)	Press. (mBars)	1010
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

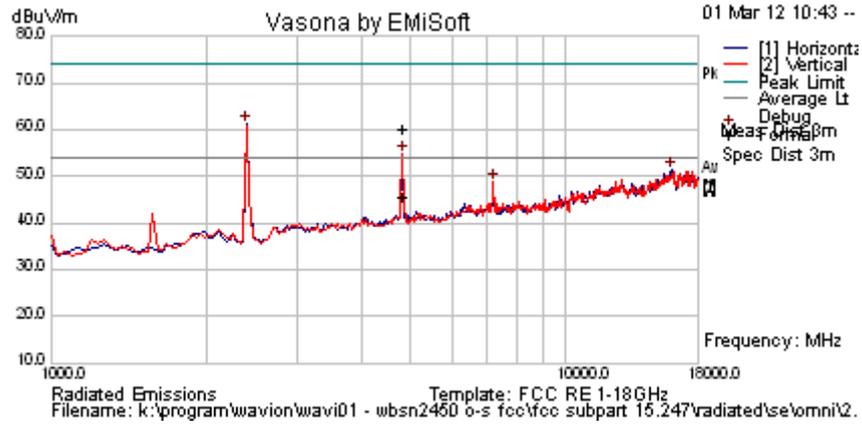

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4822.382	65.6	4.5	-9.7	60.4	Peak Max	V	98	8	74.0	-13.6	Pass	RB
4822.382	50.8	4.5	-9.7	45.6	Average Max	V	98	8	54.0	-8.4	Pass	RB
2396.794	70.0	3.0	-11.7	61.3	Peak [Scan]	H						FUND
16058.116	42.0	9.0	0.3	51.2	Peak [Scan]	H	100	0	54.0	-2.8	Pass	NOISE
7234.469	49.2	5.4	-5.8	48.8	Peak [Scan]	V	200	0	54.0	-5.2	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 261 of 331

Test Freq.	2462 MHz	Engineer	GMH
Variant	802.11g; 6 Mbs	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	22.5 (Power Reduction)	Press. (mBars)	1010
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

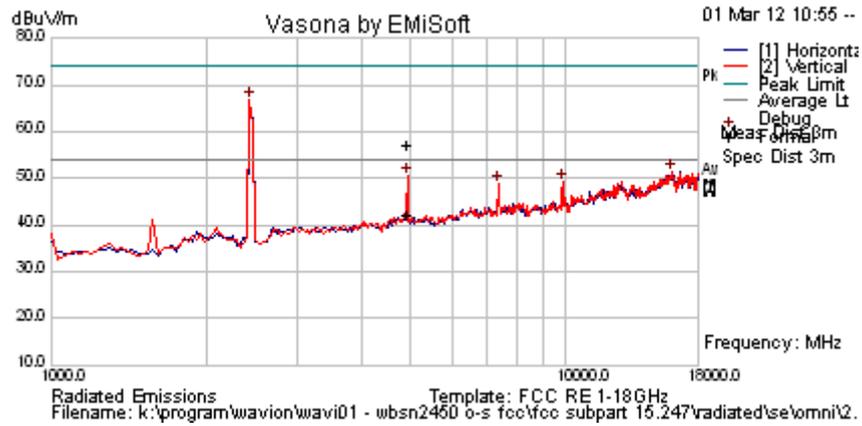


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4924.138	62.3	4.6	-9.8	57.1	Peak Max	V	126	57	74.0	-16.9	Pass	RB
4924.138	47.3	4.6	-9.8	42.1	Average Max	V	126	57	54.0	-11.9	Pass	RB
2430.862	75.2	3.0	-11.6	66.7	Peak [Scan]							FUND
16024.048	42.1	9.0	0.2	51.3	Peak [Scan]	V	200	0	54.0	-2.7	Pass	NOISE
9857.715	46.3	6.4	-3.5	49.2	Peak [Scan]	V	100	0	54.0	-4.8	Pass	NRB
7382.856	50.7	5.5	-5.5	50.7	Peak Max	V	190	20	74.0	-23.3	Pass	RB
7382.856	36.4	5.5	-5.5	36.4	Average Max	V	190	20	54.0	-17.6	Pass	RB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

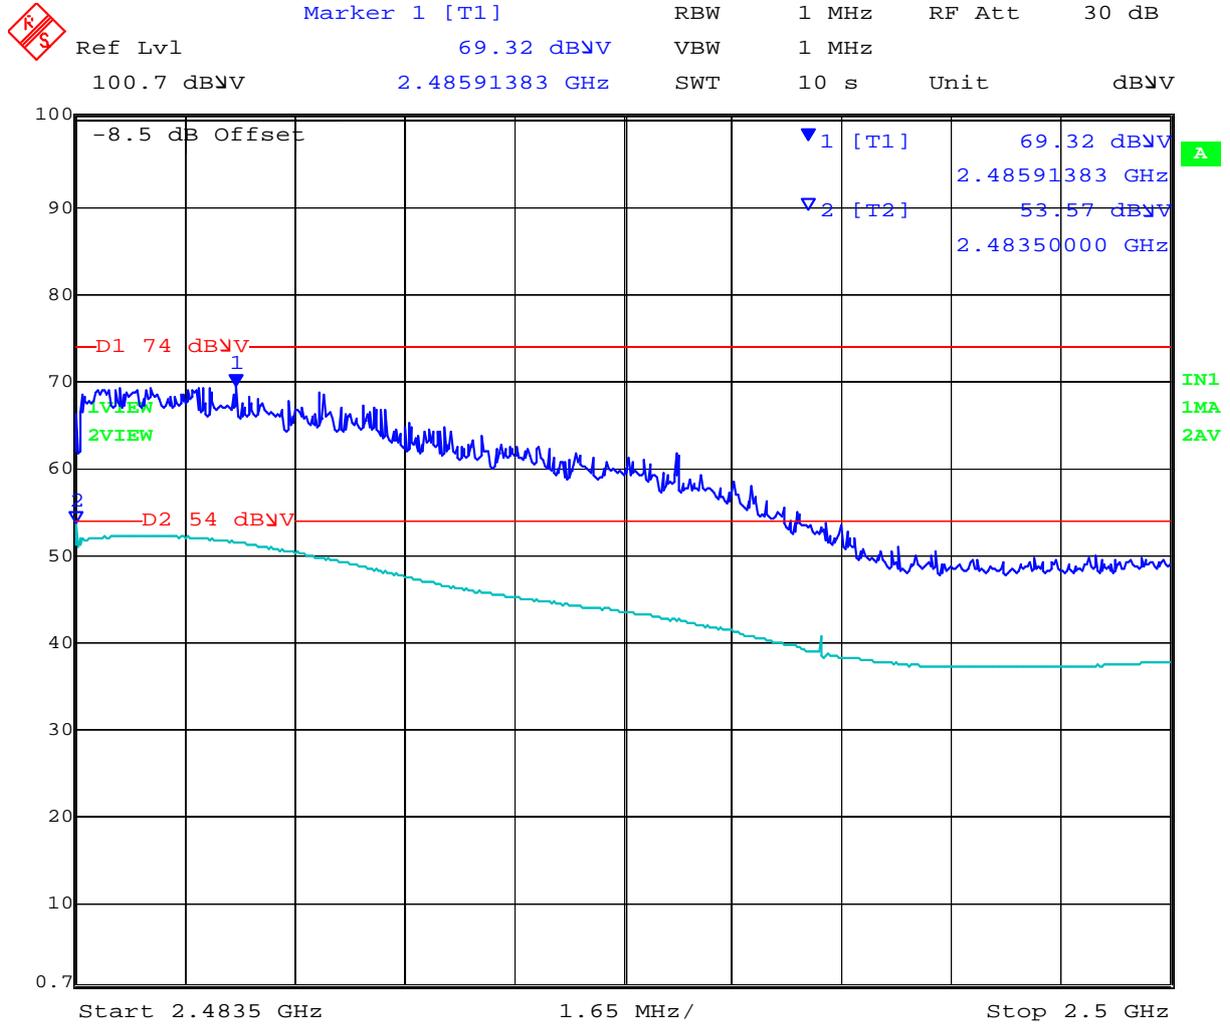


Date: 1.MAR.2012 12:50:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 263 of 331

Test Freq.	2412 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	23	Press. (mBars)	1010
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

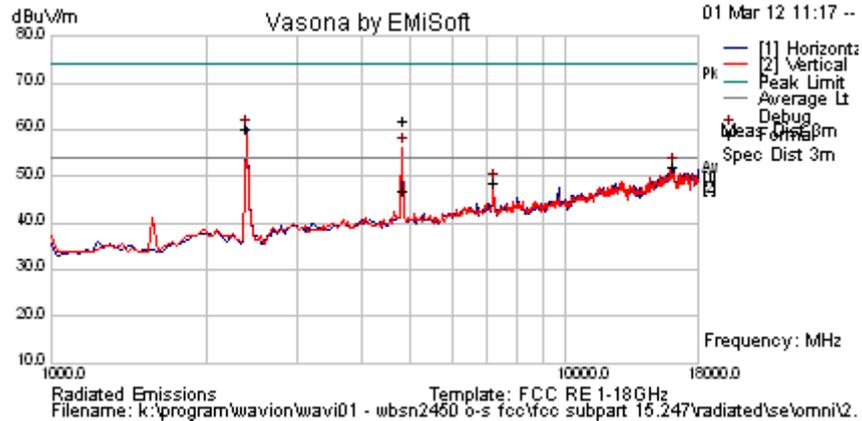


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4820.847	67.2	4.5	-9.7	62.0	Peak Max	V	121	313	74.0	-12.0	Pass	RB
4820.847	52.0	4.5	-9.7	46.8	Average Max	V	121	313	54.0	-7.2	Pass	RB
2396.794	68.9	3.0	-11.7	60.2	Peak [Scan]	H						FUND
16126.253	42.8	9.0	0.2	51.9	Peak [Scan]	H	100	0	54.0	-2.1	Pass	NOISE
7234.469	49.0	5.4	-5.8	48.6	Peak [Scan]	V	150	0	54.0	-5.4	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

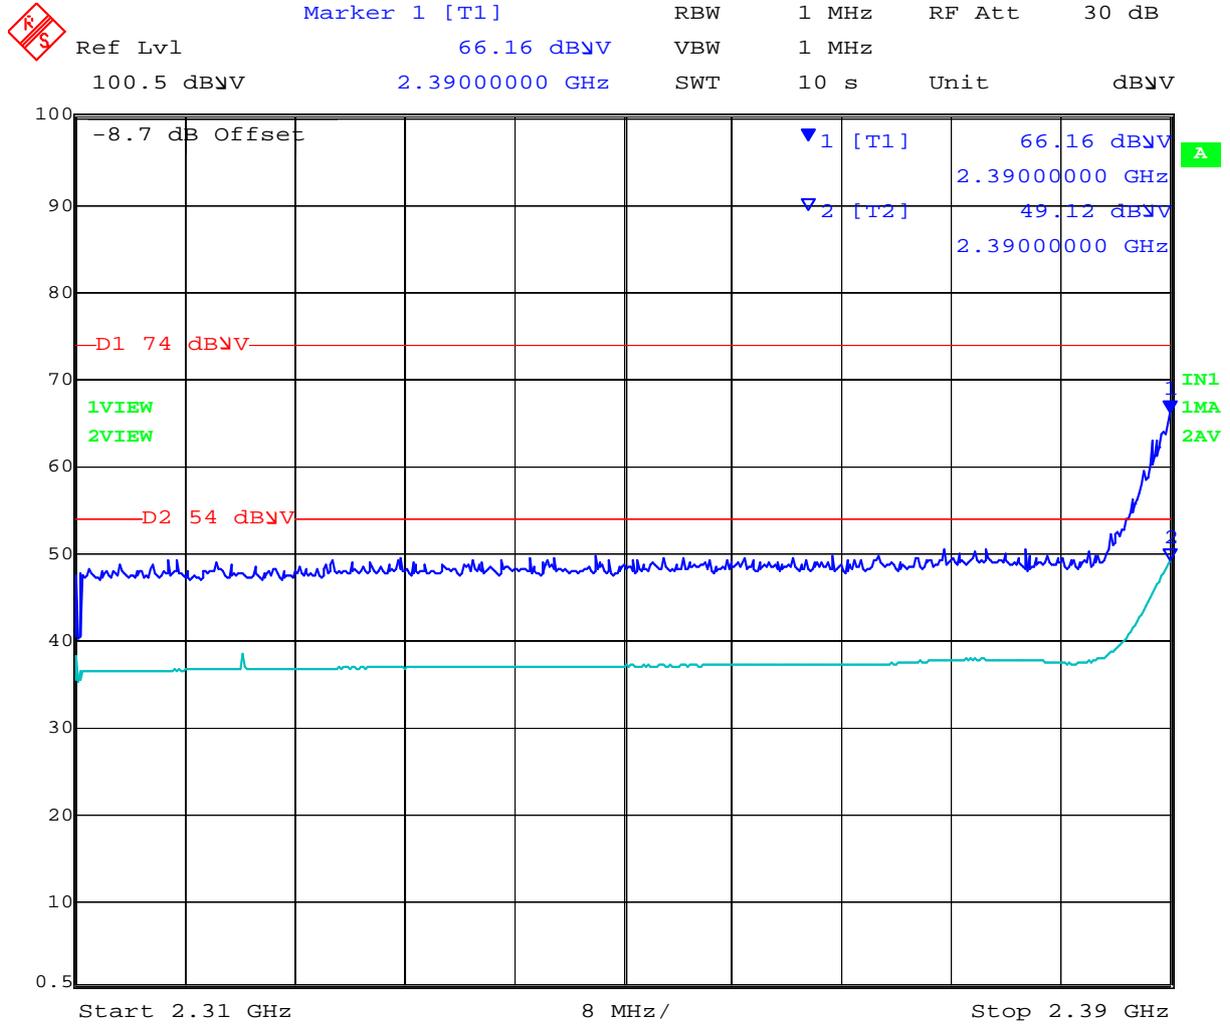


Date: 1.MAR.2012 12:36:30

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 265 of 331

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	23	Press. (mBars)	1010
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

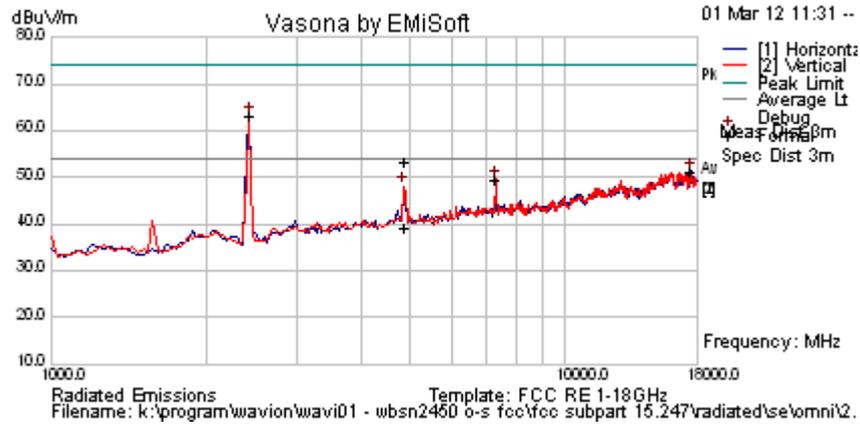

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4869.835	58.6	4.5	-9.7	53.4	Peak Max	V	98	4	74.0	-20.6	Pass	RB
4869.835	44.5	4.5	-9.7	39.4	Average Max	V	98	4	54.0	-14.7	Pass	RB
2430.862	71.8	3.0	-11.6	63.2	Peak [Scan]	H	150	0	54.0	9.2	Fail	FUND
17591.182	41.8	8.8	0.6	51.2	Peak [Scan]	H	100	0	54.0	-2.8	Pass	NOISE
7302.605	49.8	5.4	-5.7	49.5	Peak [Scan]	V	200	0	54.0	-4.5	Pass	RB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 266 of 331

Test Freq.	2462 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21 (Power Reduction)	Press. (mBars)	1010
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

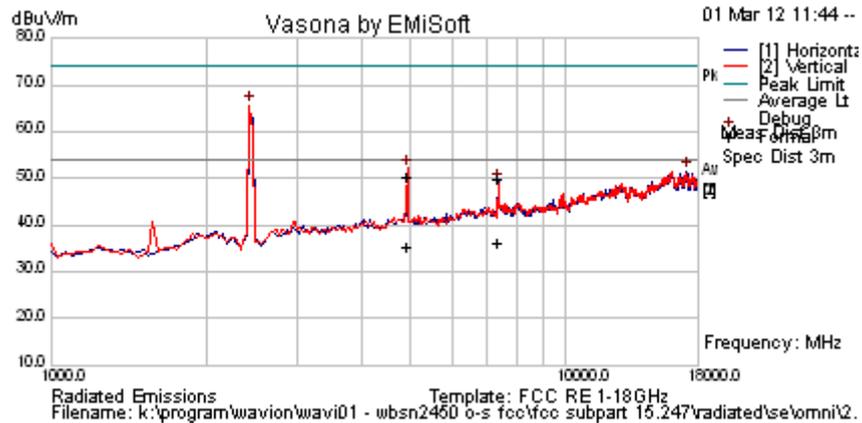

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4920.631	55.8	4.6	-9.8	50.5	Peak Max	V	132	20	74.0	-23.5	Pass	RB
7381.723	49.9	5.5	-5.5	49.9	Peak Max	H	98	351	74.0	-24.1	Pass	RB
4920.631	40.7	4.6	-9.8	35.5	Average Max	V	132	20	54.0	-18.5	Pass	RB
7381.723	36.4	5.5	-5.5	36.3	Average Max	H	98	351	54.0	-17.7	Pass	RB
2430.862	74.4	3.0	-11.6	65.8	Peak [Scan]	V						FUND
17148.297	42.5	8.6	0.5	51.6	Peak [Scan]	H	100	0	54.0	-2.4	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

	Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
Ref Lvl	69.62 dBμV	VBW	1 MHz		
100.7 dBμV	2.48356613 GHz	SWT	10 s	Unit	dBμV

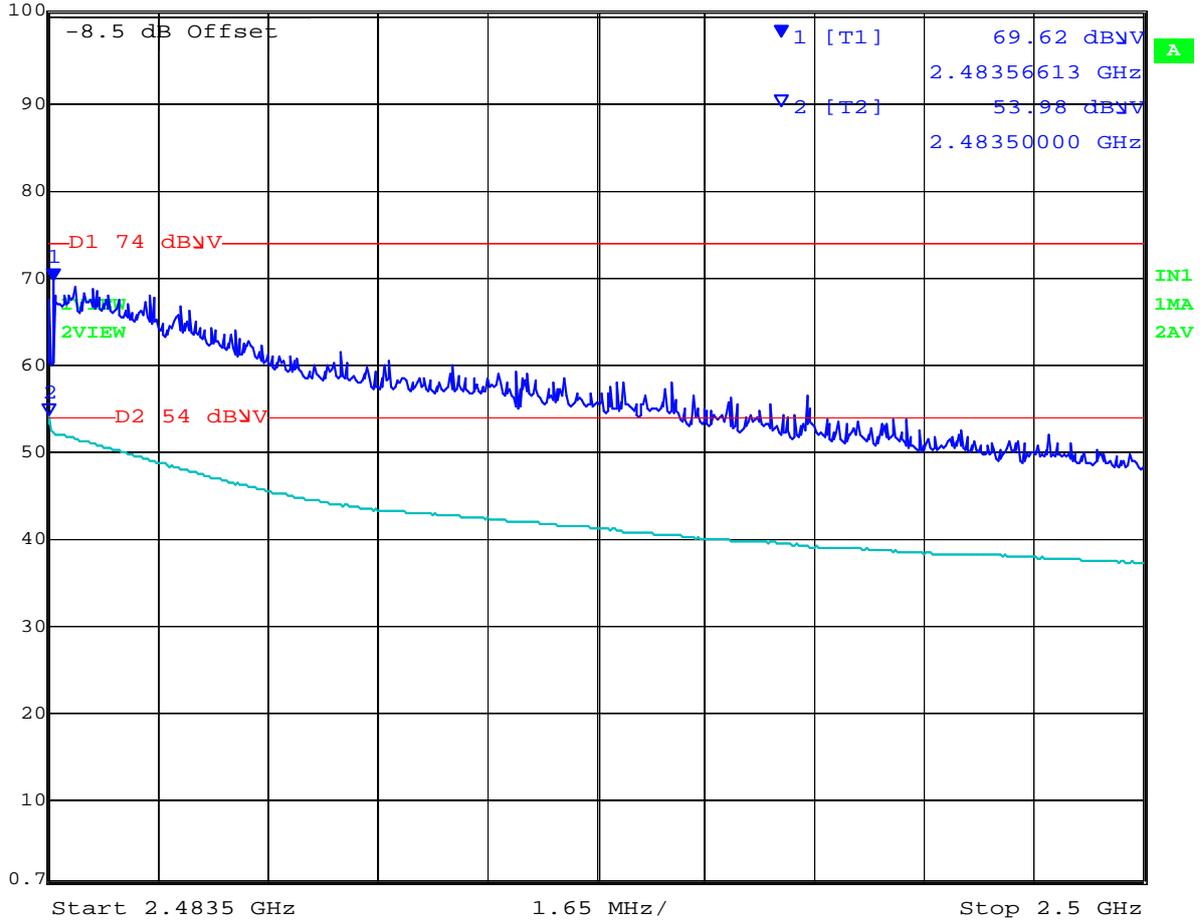


Date: 1.MAR.2012 12:55:07

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 268 of 331

Test Freq.	2422 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.5 (Power Reduction)	Press. (mBars)	1010
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

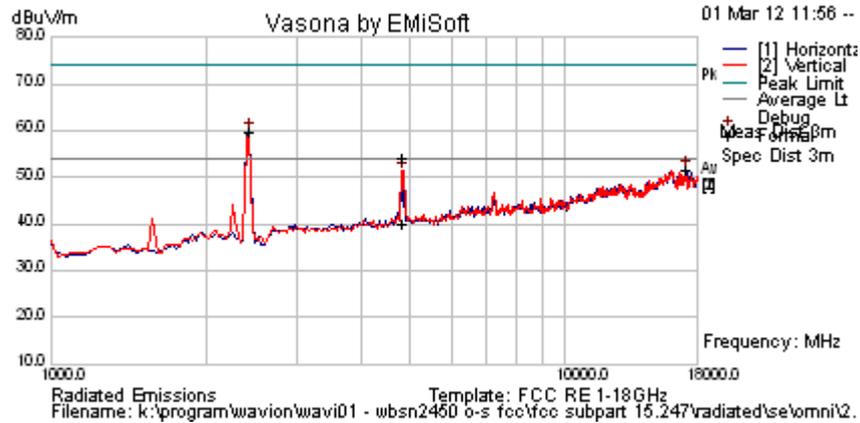

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4839.379	59.3	4.5	-9.7	54.1	Peak Max	V	122	9	74.0	-19.9	Pass	RB
4839.379	45.1	4.5	-9.7	40.0	Average Max	V	122	9	54.0	-14.1	Pass	RB
2430.862	68.5	3.0	-11.6	59.9	Peak [Scan]	H						FUND
17148.297	42.7	8.6	0.5	51.8	Peak [Scan]	H	100	0	54.0	-2.2	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 270 of 331

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	23	Press. (mBars)	1010
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

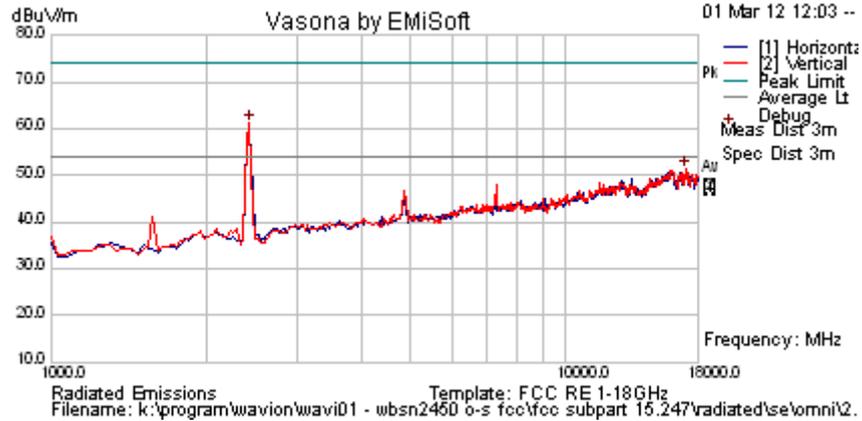

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	69.8	3.0	-11.6	61.2	Peak [Scan]	V						FUND
17114.228	42.3	8.5	0.5	51.3	Peak [Scan]	V	200	0	54.0	-2.7	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 271 of 331

Test Freq.	2452 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	23	Press. (mBars)	1010
Antenna	OMNI 7.4 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

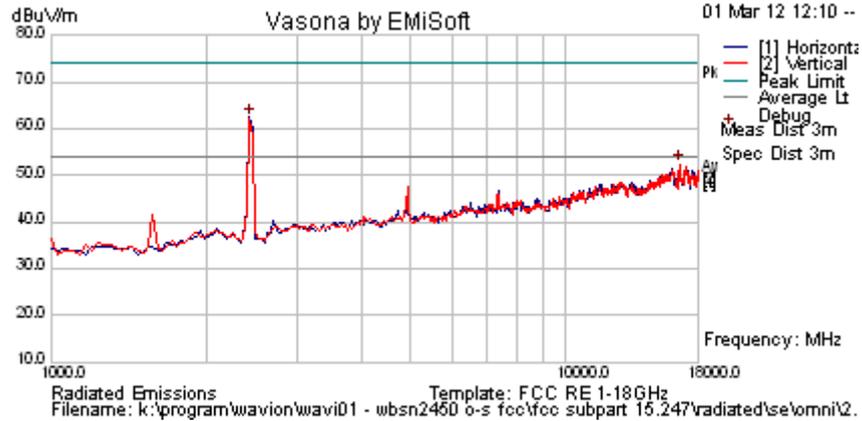

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	71.0	3.0	-11.6	62.4	Peak [Scan]	H						FUND
16569.138	43.1	8.8	0.5	52.3	Peak [Scan]	V	150	0	54.0	-1.7	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB
Ref Lvl 100.7 dBV 65.81 dBV VBW 1 MHz
100.7 dBV 2.48551703 GHz SWT 10 s Unit dBV

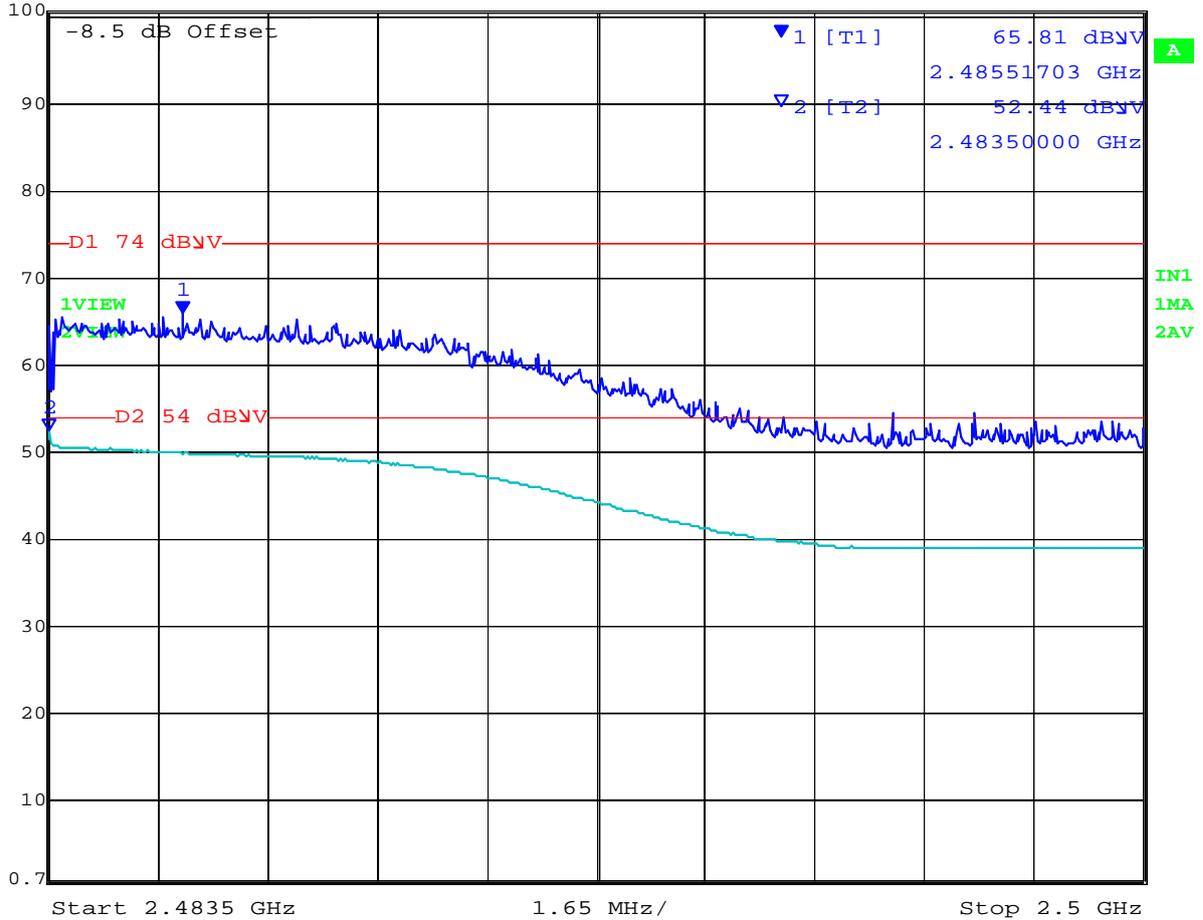


Date: 1.MAR.2012 13:00:03

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 273 of 331

Test Freq.	5745 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	25	Press. (mBars)	995
Antenna	8.5 dBi Omni	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

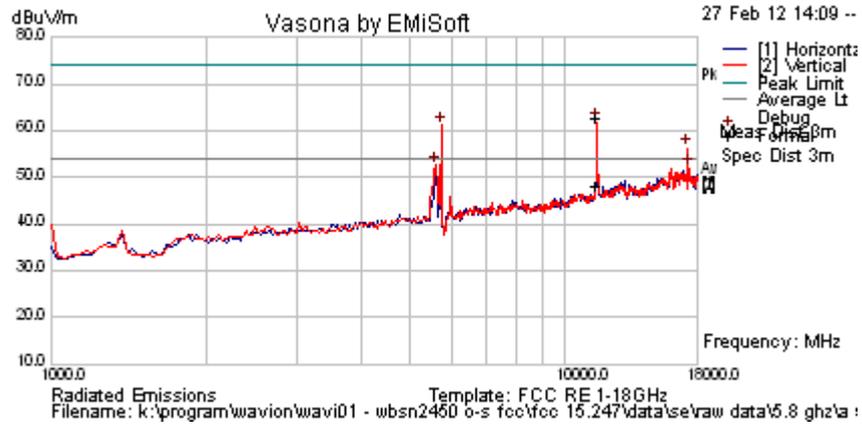


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11484.760	57.8	6.8	-2.0	62.6	Peak Max	V	98	0	74.0	-11.4	Pass	RB
11484.76	43.6	6.8	-2.0	48.4	Average Max	V	98	0	54.0	-5.6	Pass	RB
5735.471	65.9	4.8	-9.5	61.1	Peak [Scan]	V						FUND
5599.198	57.7	4.7	-9.7	52.7	Peak [Scan]	V					Pass	BE
17352.705	41.9	8.7	1.3	52.0	Peak [Scan]	V					Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

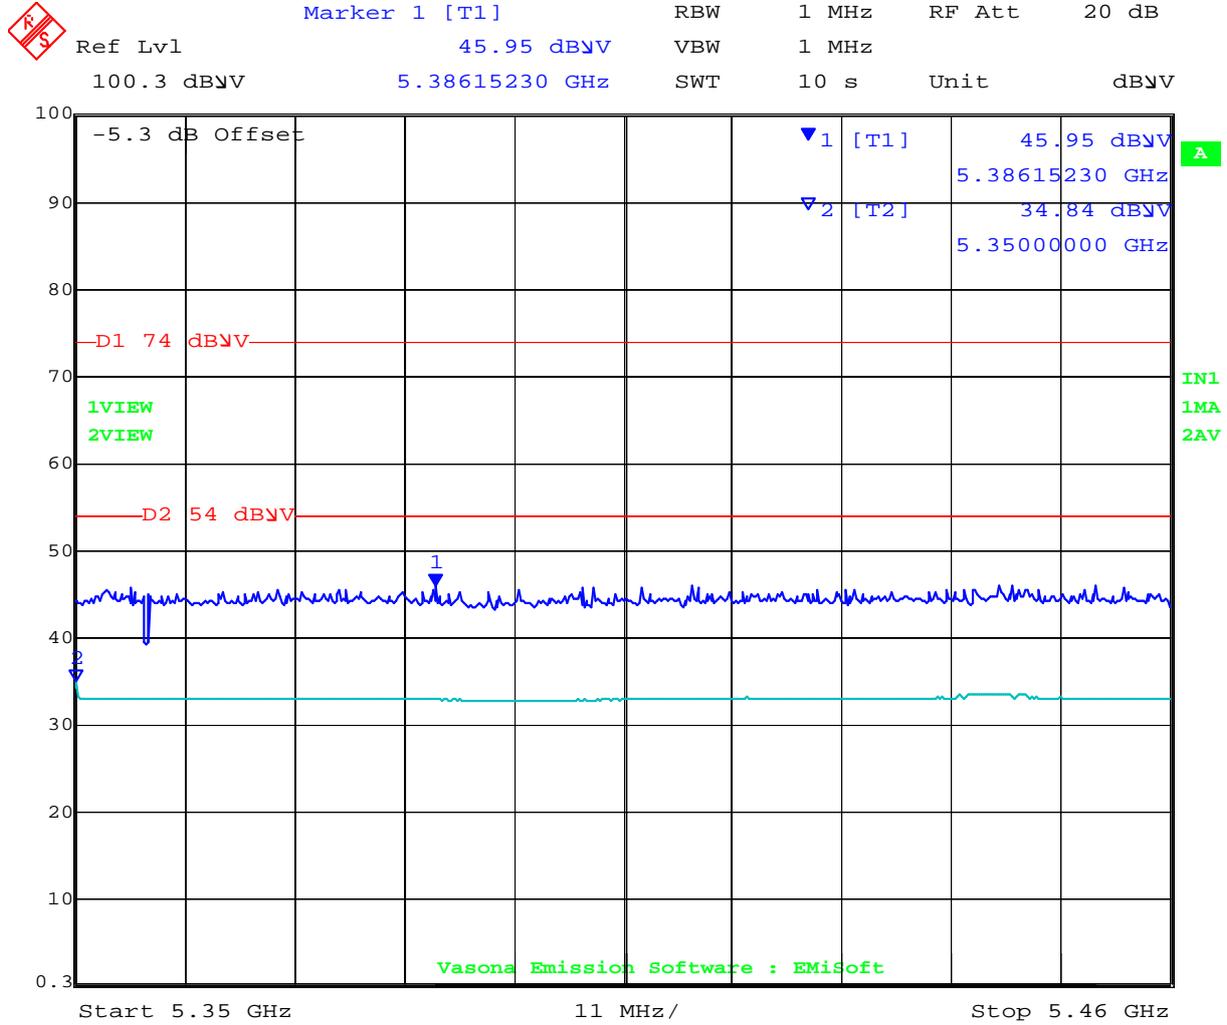


Date: 27.FEB.2012 16:06:46

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 275 of 331

Test Freq.	5785 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	25	Press. (mBars)	995
Antenna	8.5 dBi Omni	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

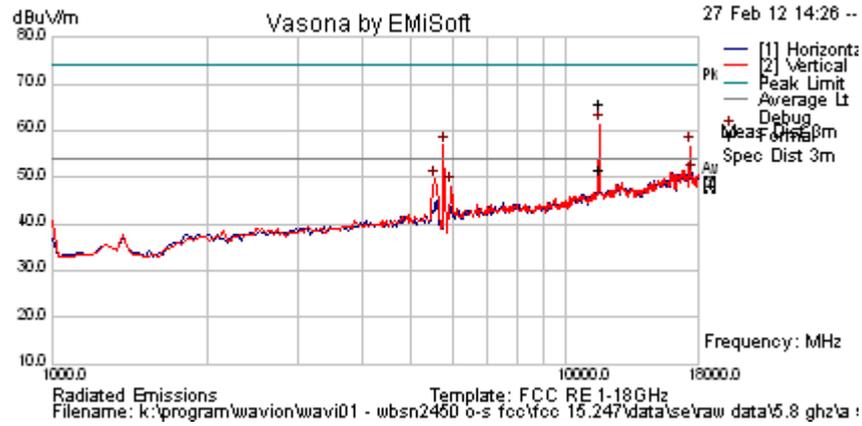

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11573.887	60.9	6.8	-2.0	65.7	Peak Max	V	115	0	74.0	-8.3	Pass	RB
11573.887	46.8	6.8	-2.0	51.6	Average Max	V	115	0	54.0	-2.4	Pass	RB
5769.539	61.6	4.8	-9.5	56.9	Peak [Scan]	V						FUND
17352.705	46.6	8.7	1.3	56.6	Peak [Scan]	V					Pass	NRB
5531.062	54.7	4.6	-9.7	49.7	Peak [Scan]	V	100	0	54	-4.3	Pass	BE
5973.948	52.0	4.9	-8.7	48.1	Peak [Scan]	V	200	0	54	-5.9	Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 276 of 331

Test Freq.	5825 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	25	Press. (mBars)	995
Antenna	8.5 dBi Omni	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

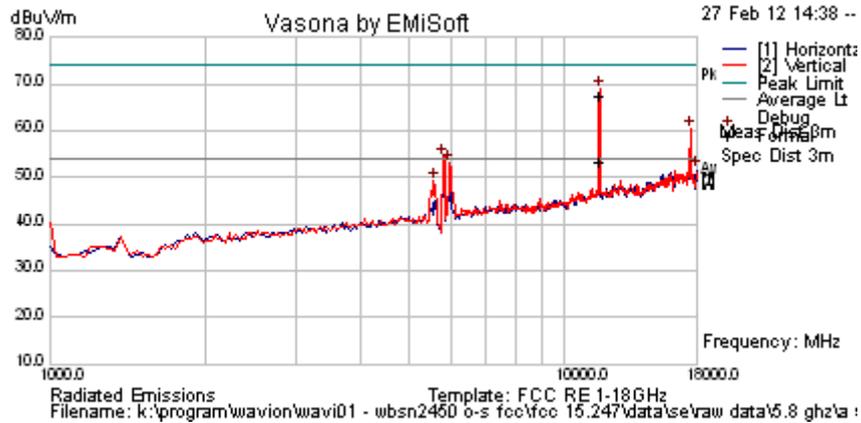

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11651.303	62.7	6.8	-2.3	67.3	Peak	V	98	0	74.0	-6.7	Pass	RB
11651.303	49.0	6.8	-2.3	53.5	Average	V	98	0	54.0	-0.5	Pass	RB
17488.978	50.6	8.8	1.0	60.4	Peak [Scan]	V					Pass	NRB
5803.607	58.9	4.8	-9.4	54.4	Peak [Scan]	V						FUND
18000.000	42.2	8.8	0.7	51.7	Peak [Scan]	H	200	0	54	-2.3	Pass	NOISE
5565.130	54.4	4.7	-9.7	49.3	Peak [Scan]	V					Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 277 of 331

Test Freq.	5745 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 Mbit/s, MCS0	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	25	Press. (mBars)	995
Antenna	8.5dBi Omni	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

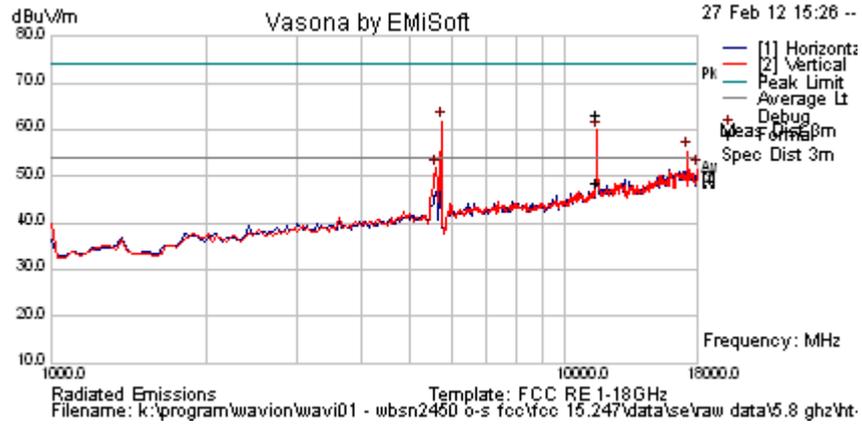

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11483.056	58.6	6.8	-2.0	63.4	Peak Max	V	150	3	74.0	-10.6	Pass	RB
11483.056	43.9	6.8	-2.0	48.7	Average Max	V	150	3	54.0	-5.3	Pass	RB
5735.471	66.6	4.8	-9.5	61.8	Peak [Scan]	V						FUND
17250.501	45.8	8.6	1.0	55.4	Peak [Scan]	V					Pass	NRB
18000.000	42.4	8.8	0.7	51.9	Peak [Scan]	V	150	0	54	-2.1	Pass	NOISE
5599.198	56.7	4.7	-9.7	51.7	Peak [Scan]	V	200	0	54	-2.4	Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

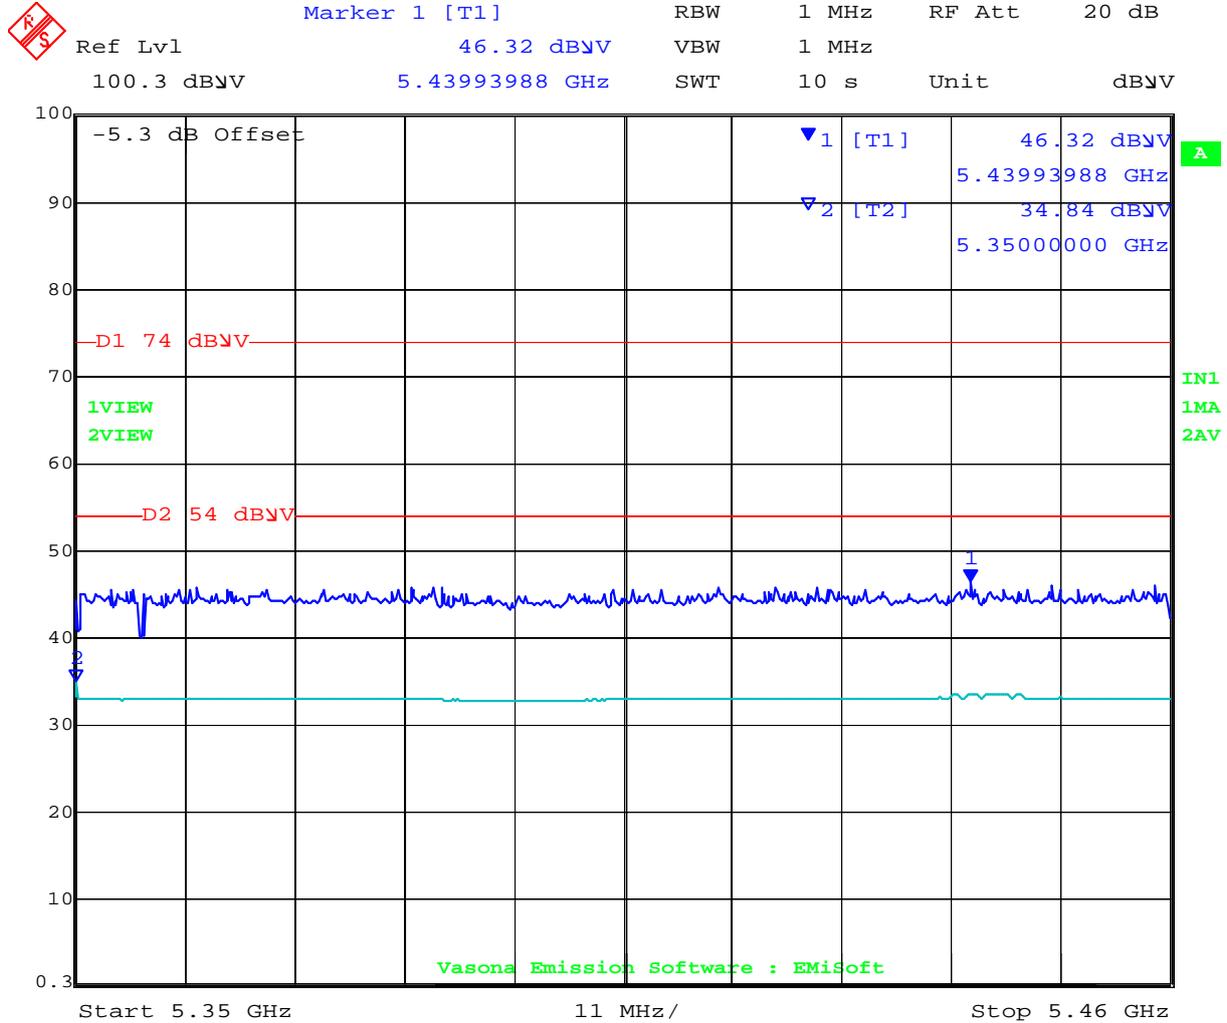


Date: 27.FEB.2012 16:08:43

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 279 of 331

Test Freq.	5785 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 Mbit/s, MCS0	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	25	Press. (mBars)	995
Antenna	8.5dBi Omni	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

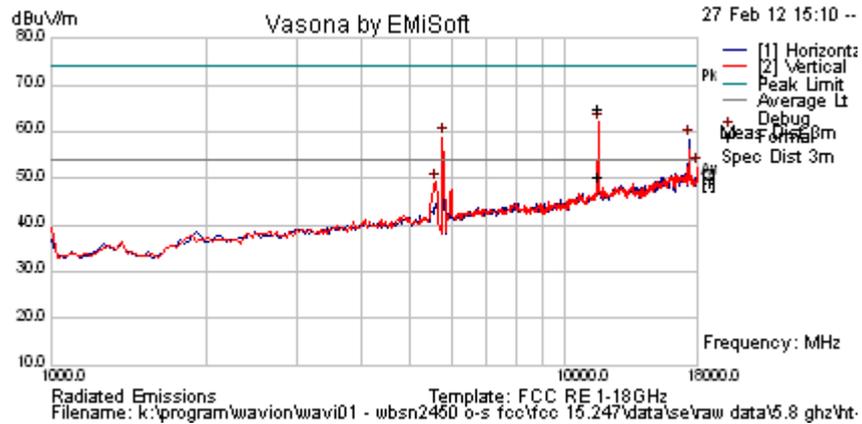

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11576.543	59.9	6.8	-2.0	64.7	Peak Max	V	114	1	74.0	-9.3	Pass	RB
11576.543	45.4	6.8	-2.0	50.2	Average Max	V	114	1	54.0	-3.9	Pass	RB
5769.539	63.4	4.8	-9.5	58.7	Peak [Scan]	V						FUND
17352.705	48.3	8.7	1.3	58.3	Peak [Scan]	H					Pass	NRB
18000.000	43.2	8.8	0.7	52.7	Peak [Scan]	V	150	0	54	-1.3	Pass	NOISE
5599.198	54.2	4.7	-9.7	49.2	Peak [Scan]	V	100	0	54	-4.8	Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 280 of 331

Test Freq.	5825 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 Mbit/s, MCS0	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	23 (Reduced Power)	Press. (mBars)	995
Antenna	8.5dBi Omni	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

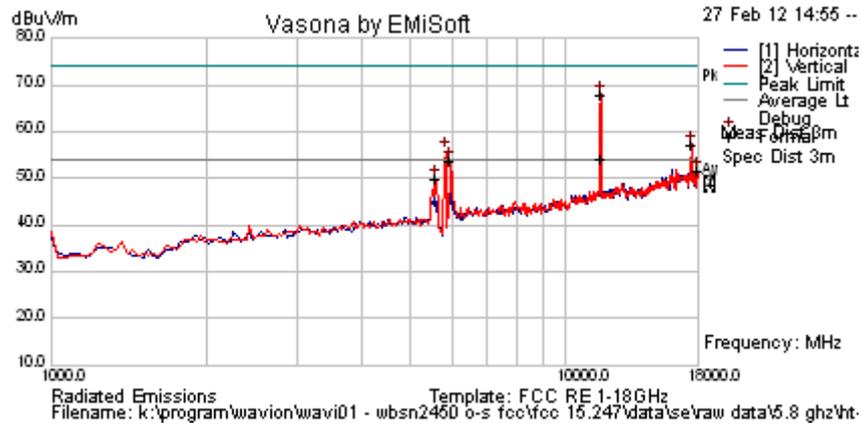

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11653.237	63.5	6.8	-2.3	68.1	Peak Max	V	106	3	74.0	-5.9	Pass	RB
11653.237	49.5	6.8	-2.3	54.0	Average Max	V	106	3	54.0	0.0	Pass	RB
17488.978	47.5	8.8	1.0	57.3	Peak [Scan]	V					Pass	NRB
5973.948	57.7	4.9	-8.7	53.9	Peak [Scan]	V						FUND
18000.000	42.1	8.8	0.7	51.6	Peak [Scan]	V	200	0	54	-2.4	Pass	NOISE
5565.130	54.9	4.7	-9.7	49.8	Peak [Scan]	V	100	0	54	-4.2	Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 281 of 331

Test Freq.	5755 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 Mbit/s, MCS 0	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	25	Press. (mBars)	995
Antenna	8.5 dBi Omni	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

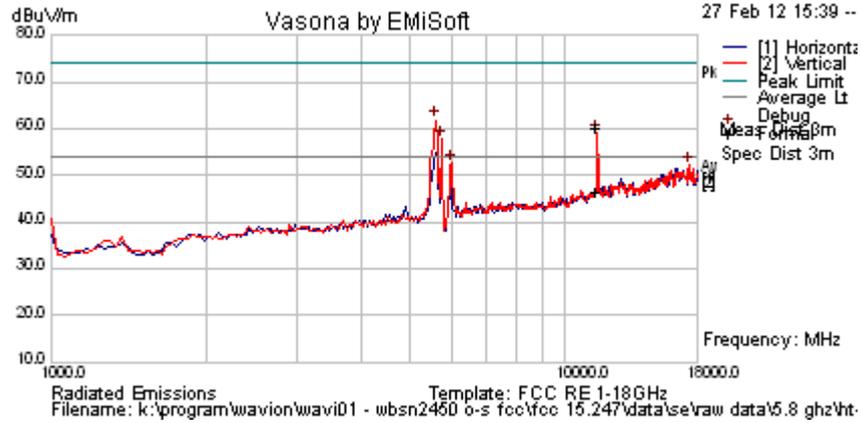

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11506.459	55.4	6.8	-1.9	60.2	Peak Max	V	146	37	74.0	-13.8	Pass	RB
11506.459	41.6	6.8	-1.9	46.5	Average Max	V	146	37	54.0	-7.6	Pass	RB
5599.198	66.8	4.7	-9.7	61.8	Peak [Scan]	V					Pass	BE
5735.471	62.6	4.8	-9.5	57.8	Peak [Scan]	V						FUND
6008.016	56.3	4.9	-8.6	52.6	Peak [Scan]	V					Pass	BE
17386.774	42.1	8.7	1.4	52.2	Peak [Scan]	V	200	0	54	-1.8	Pass	NOISE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

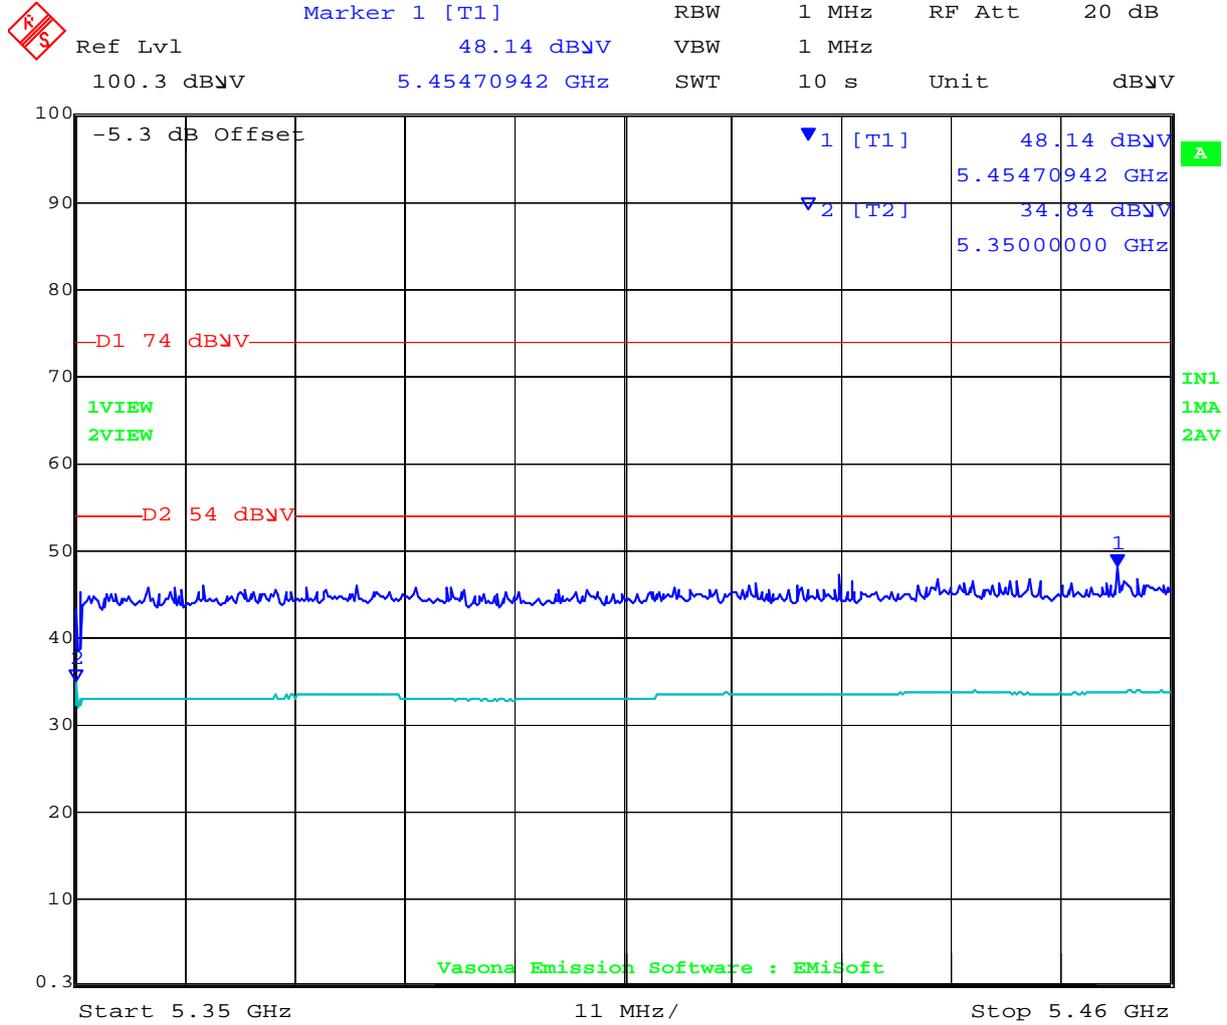


Date: 27.FEB.2012 16:09:54

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 283 of 331

Test Freq.	5795 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	25	Press. (mBars)	995
Antenna	8.5 dBi Omni	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

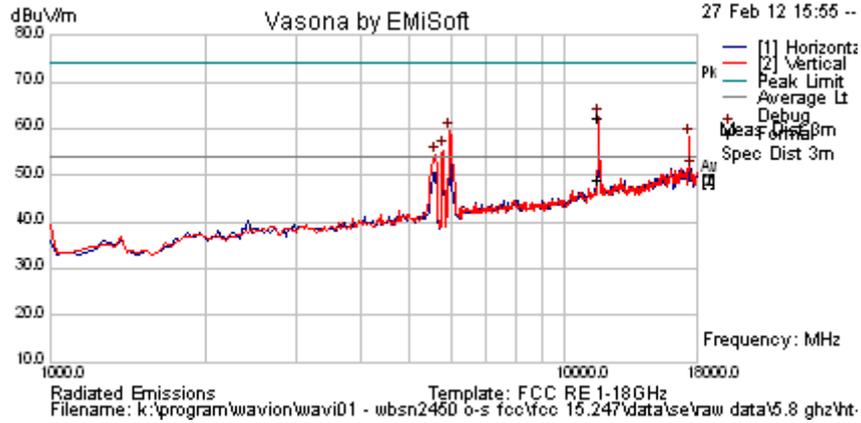

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11578.426	57.7	6.8	-2.0	62.4	Peak Max	V	118	0	74.0	-11.6	Pass	RB
11578.426	44.5	6.8	-2.0	49.2	Average Max	V	118	0	54.0	-4.8	Pass	RB
5973.948	63.2	4.9	-8.7	59.4	Peak [Scan]	V					Pass	BE
17386.774	48.1	8.7	1.4	58.2	Peak [Scan]	V					Pass	NRB
17557.114	41.8	8.8	0.8	51.3	Peak [Scan]	H	200	0	54	-2.7	Pass	NOISE
5599.198	59.3	4.7	-9.7	54.3	Peak [Scan]	V					Pass	BE
5803.607	60.0	4.8	-9.4	55.4	Peak [Scan]	V						FUND


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.6.2. Sector Antenna

Test Freq.	2412 MHz	Engineer	GMH
Variant	802.11b; 1 Mbs	Temp (°C)	19.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	18.5 (Reduced Power)	Press. (mBars)	1011
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

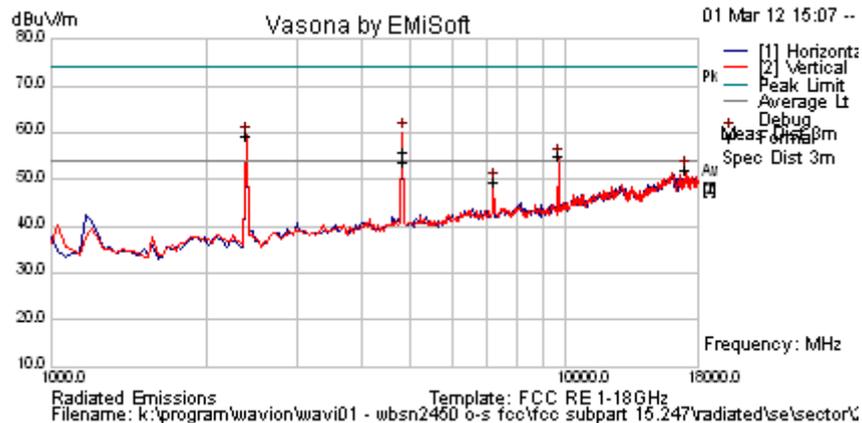

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4824.022	60.9	4.5	-9.7	55.7	Peak Max	V	118	149	74.0	-18.3	Pass	RB
4824.022	58.8	4.5	-9.7	53.6	Average Max	V	118	149	54.0	-0.4	Pass	RB
2396.794	68.2	3.0	-11.7	59.5	Peak [Scan]	V						FUND
9653.307	52.1	6.3	-3.5	54.9	Peak [Scan]	V					Pass	NRB
17080.160	43.1	8.5	0.4	52.0	Peak [Scan]	V	150	0	54	-2.1	Pass	NOISE
7234.469	50.0	5.4	-5.8	49.5	Peak [Scan]	V	150	0	54	-4.5	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB
Ref Lvl 50.09 dBμV VBW 1 MHz
100.5 dBμV 2.36448898 GHz SWT 10 s Unit dBμV

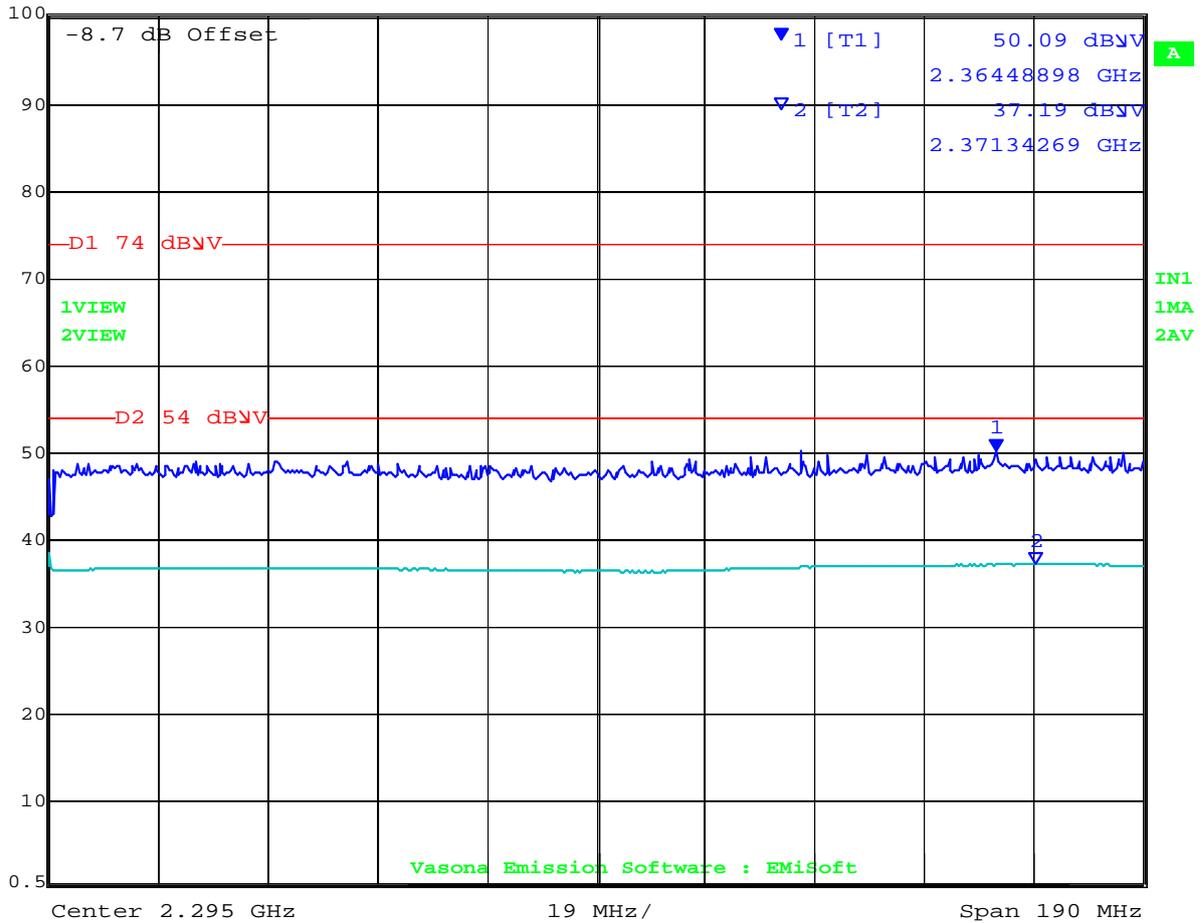


Date: 1.MAR.2012 17:39:24

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 286 of 331

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11b; 1 Mbs	Temp (°C)	19.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.0 (Reduced Power)	Press. (mBars)	1011
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

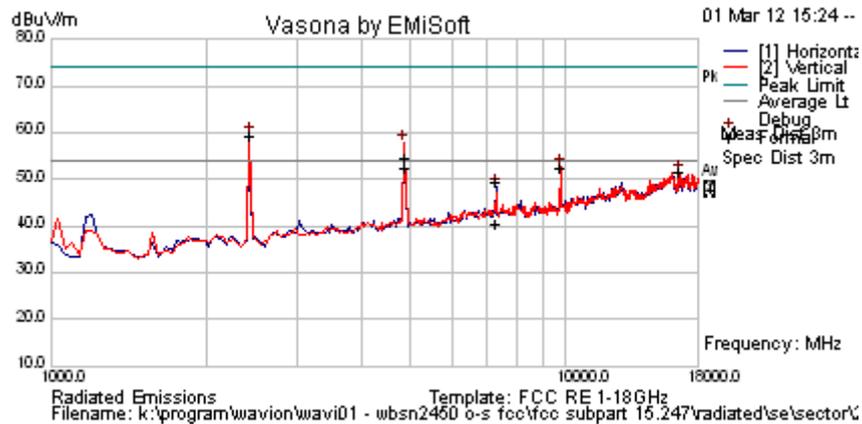

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4874.042	59.9	4.5	-9.7	54.7	Peak	H	202	-4	74.0	-19.3	Pass	RB
7309.424	49.9	5.4	-5.7	49.7	Peak Max	H	175	104	74.0	-24.3	Pass	RB
4874.042	57.5	4.5	-9.7	52.3	Average	H	202	-4	54.0	-1.7	Pass	RB
7309.424	40.5	5.4	-5.7	40.3	Average Max	H	175	104	54	-13.7	Pass	RB
2430.862	68.0	3.0	-11.6	59.4	Peak [Scan]	V						FUND
9755.511	50.0	6.4	-3.7	52.7	Peak [Scan]	V	100	0	54	-1.3	Pass	NRB
16569.138	42.2	8.8	0.5	51.4	Peak [Scan]	V	100	0	54	-2.6	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 287 of 331

Test Freq.	2462 MHz	Engineer	GMH
Variant	802.11b; 1 Mbs	Temp (°C)	19.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	19.5 (Reduced Power)	Press. (mBars)	1011
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

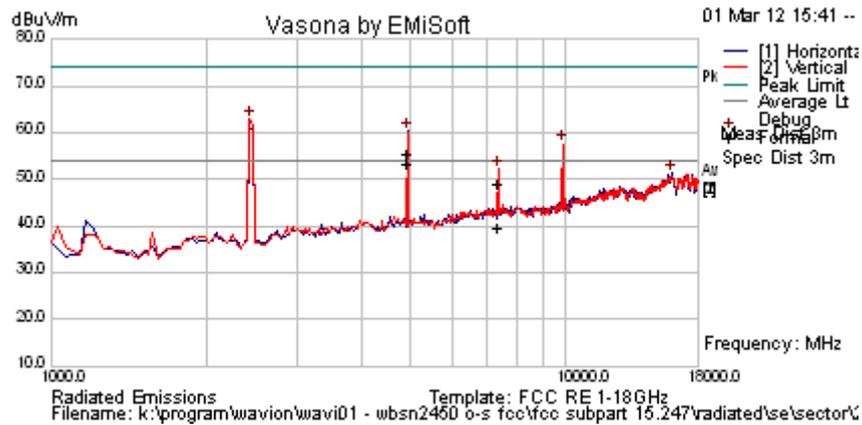

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4924.032	60.8	4.6	-9.8	55.5	Peak	H	202	269	74.0	-18.5	Pass	RB
7388.537	49.0	5.5	-5.5	49.0	Peak Max	V	99	9	74.0	-25.0	Pass	RB
7388.537	39.6	5.5	-5.5	39.6	Average Max	V	99	9	54.0	-14.4	Pass	RB
4924.032	58.4	4.6	-9.8	53.2	Average	H	202	269	54.0	-0.8	Pass	RB
2430.862	71.5	3.0	-11.6	63.0	Peak [Scan]	V						FUND
9857.715	54.6	6.4	-3.5	57.5	Peak [Scan]	V					Pass	NRB
16058.116	42.0	9.0	0.3	51.3	Peak [Scan]	H	200	0	54	-2.7	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB
Ref Lvl 50.38 dB μ V VBW 1 MHz
100.7 dB μ V 2.48631062 GHz SWT 10 s Unit dB μ V

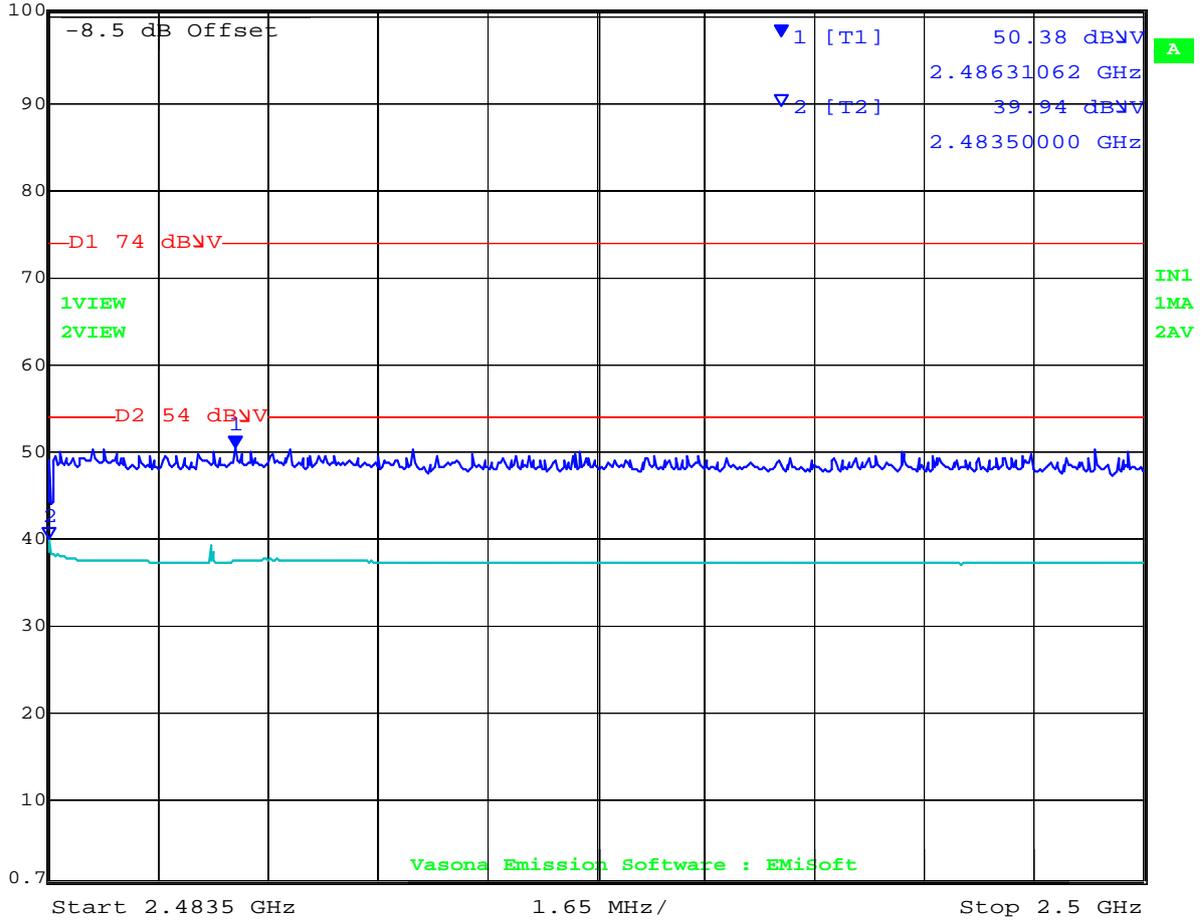


Date: 1.MAR.2012 17:52:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 289 of 331

Test Freq.	2412 MHz	Engineer	GMH
Variant	802.11g; 6 Mbs	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.5	Press. (mBars)	1010
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

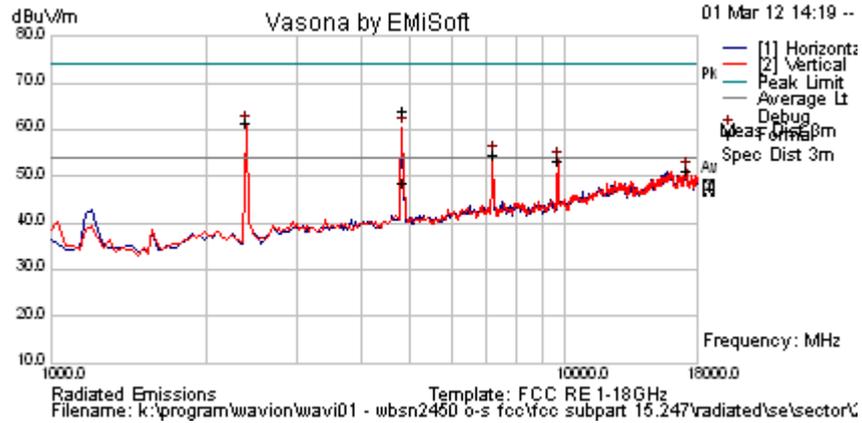

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4821.353	69.3	4.5	-9.7	64.1	Peak Max	V	202	0	74.0	-9.9	Pass	RB
4821.353	53.8	4.5	-9.7	48.6	Average Max	V	202	0	54.0	-5.4	Pass	RB
2396.794	70.0	3.0	-11.7	61.3	Peak [Scan]	H						FUND
7234.469	54.9	5.4	-5.8	54.5	Peak [Scan]	V					Pass	NRB
9653.307	50.8	6.3	-3.5	53.5	Peak [Scan]	V					Pass	NRB
17148.297	42.2	8.6	0.5	51.3	Peak [Scan]	H	200	0	54	-2.7	Pass	NOISE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

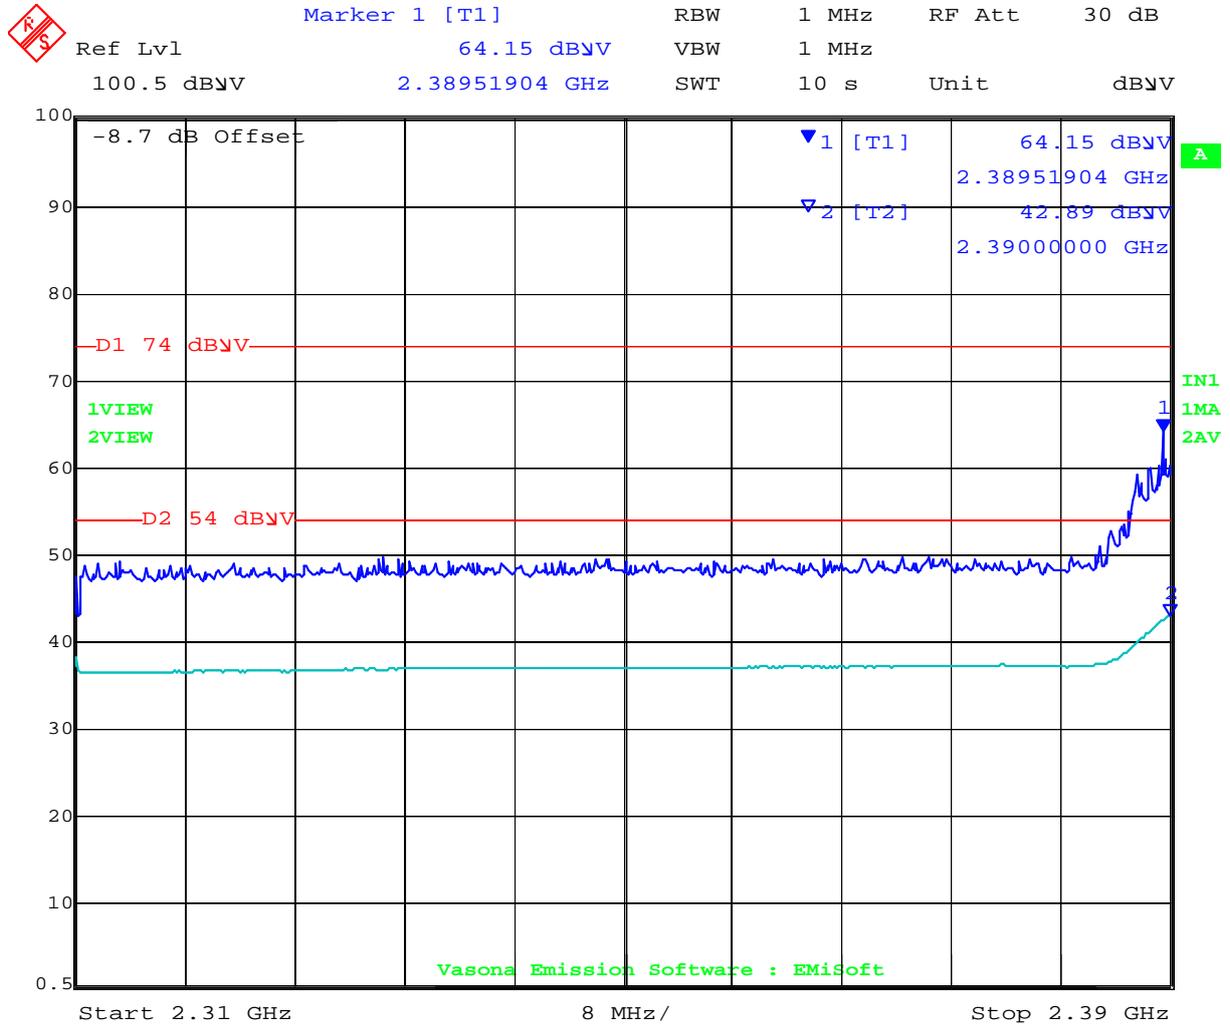


Date: 1.MAR.2012 17:43:27

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 291 of 331

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11g; 6 Mbs	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.5	Press. (mBars)	1010
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

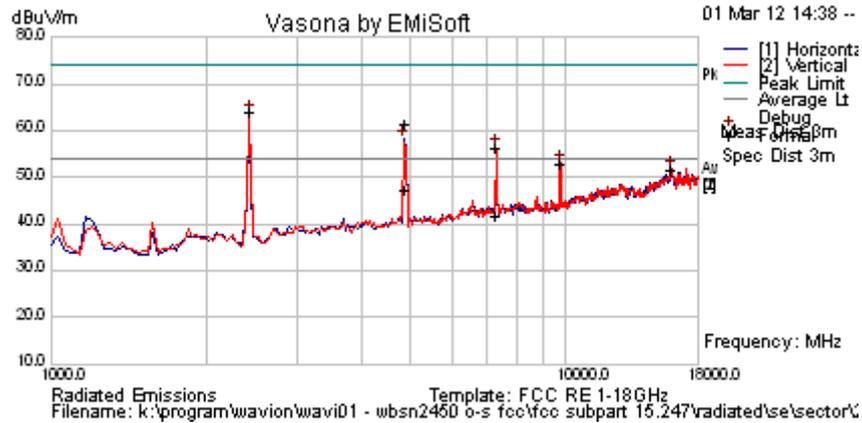

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4871.663	66.9	4.5	-9.7	61.7	Peak Max	H	150	81	74.0	-12.3	Pass	RB
7305.711	56.4	5.4	-5.7	56.1	Peak Max	V	112	197	74.0	-17.9	Pass	RB
4871.663	52.7	4.5	-9.7	47.5	Average Max	H	150	81	54	-6.5	Pass	RB
7305.711	41.9	5.4	-5.7	41.7	Average Max	V	112	197	54.0	-12.3	Pass	RB
2430.862	72.4	3.0	-11.6	63.9	Peak [Scan]	V						FUND
9755.511	50.4	6.4	-3.7	53.0	Peak [Scan]	V					Pass	NRB
15989.980	42.6	9.0	0.1	51.8	Peak [Scan]	V	150	0	54	-2.3	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 292 of 331

Test Freq.	2462 MHz	Engineer	GMH
Variant	802.11g; 6 Mbs	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.5	Press. (mBars)	1010
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

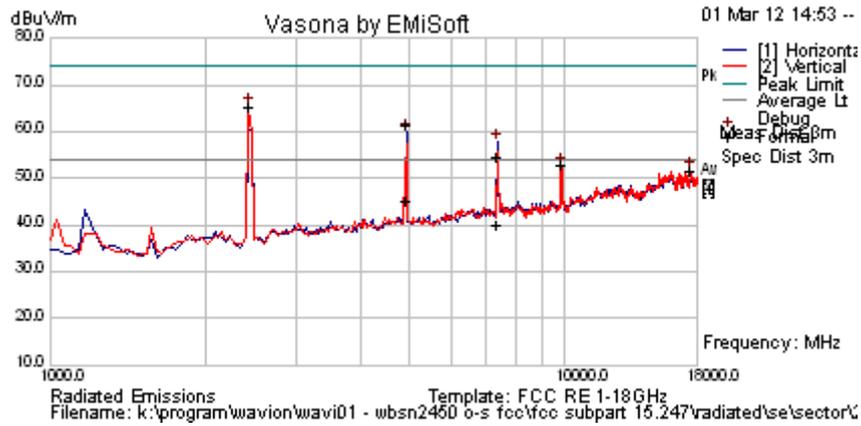

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4919.985	66.6	4.6	-9.8	61.4	Peak Max	H	147	109	74.0	-12.6	Pass	RB
7387.174	54.5	5.5	-5.5	54.5	Peak Max	H	172	104	74.0	-19.6	Pass	RB
4919.985	50.6	4.6	-9.8	45.4	Average Max	H	147	109	54	-8.6	Pass	RB
7387.174	40.0	5.5	-5.5	40.0	Average Max	H	172	104	54.0	-14.0	Pass	RB
2430.862	73.9	3.0	-11.6	65.4	Peak [Scan]	V						FUND
9857.715	49.8	6.4	-3.5	52.7	Peak [Scan]	V					Pass	NRB
17523.046	41.8	8.8	0.9	51.5	Peak [Scan]	V	200	0	54.0	-2.5	Pass	NOISE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

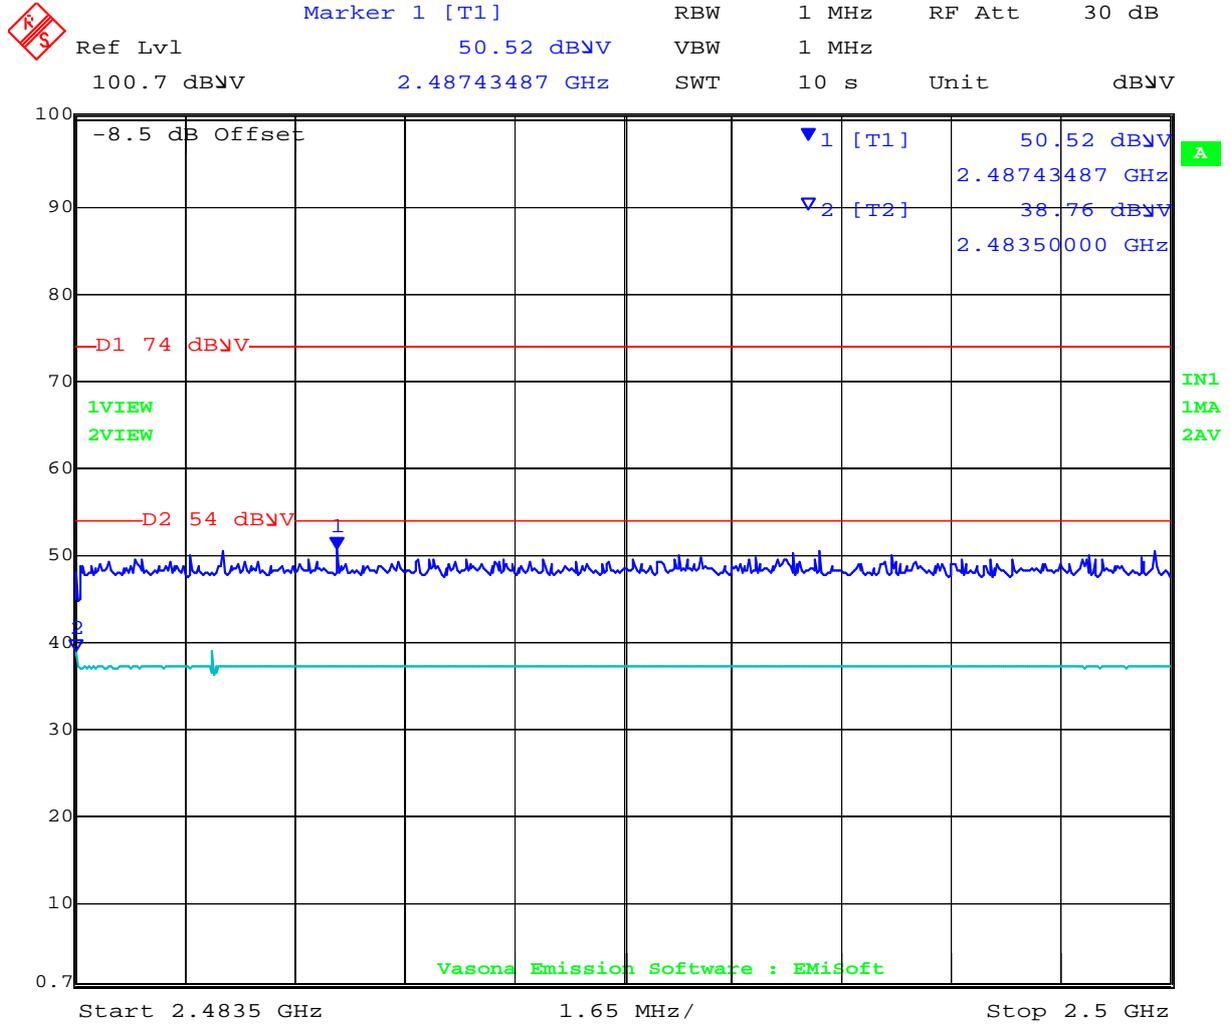


Date: 1.MAR.2012 17:56:11

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 294 of 331

Test Freq.	2412 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.5	Press. (mBars)	1010
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

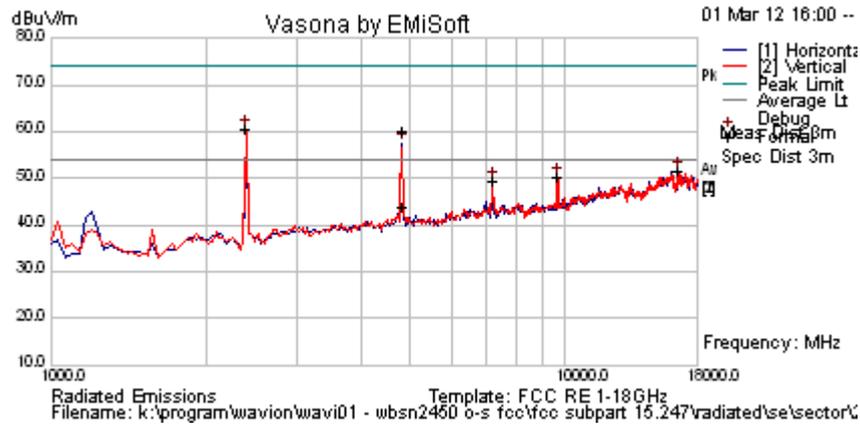

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4820.681	65.2	4.5	-9.7	60.0	Peak Max	H	192	274	74.0	-14.0	Pass	RB
4820.681	49.1	4.5	-9.7	43.9	Average Max	H	192	274	54.0	-10.1	Pass	RB
2396.794	69.2	3.0	-11.7	60.5	Peak [Scan]	V						
16569.138	42.3	8.8	0.5	51.5	Peak [Scan]	V	100	0	54.0	-2.5	Pass	NOISE
9653.307	47.4	6.3	-3.5	50.2	Peak [Scan]	H					Pass	NRB
7234.469	50.0	5.4	-5.8	49.6	Peak [Scan]	H					Pass	NRB

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

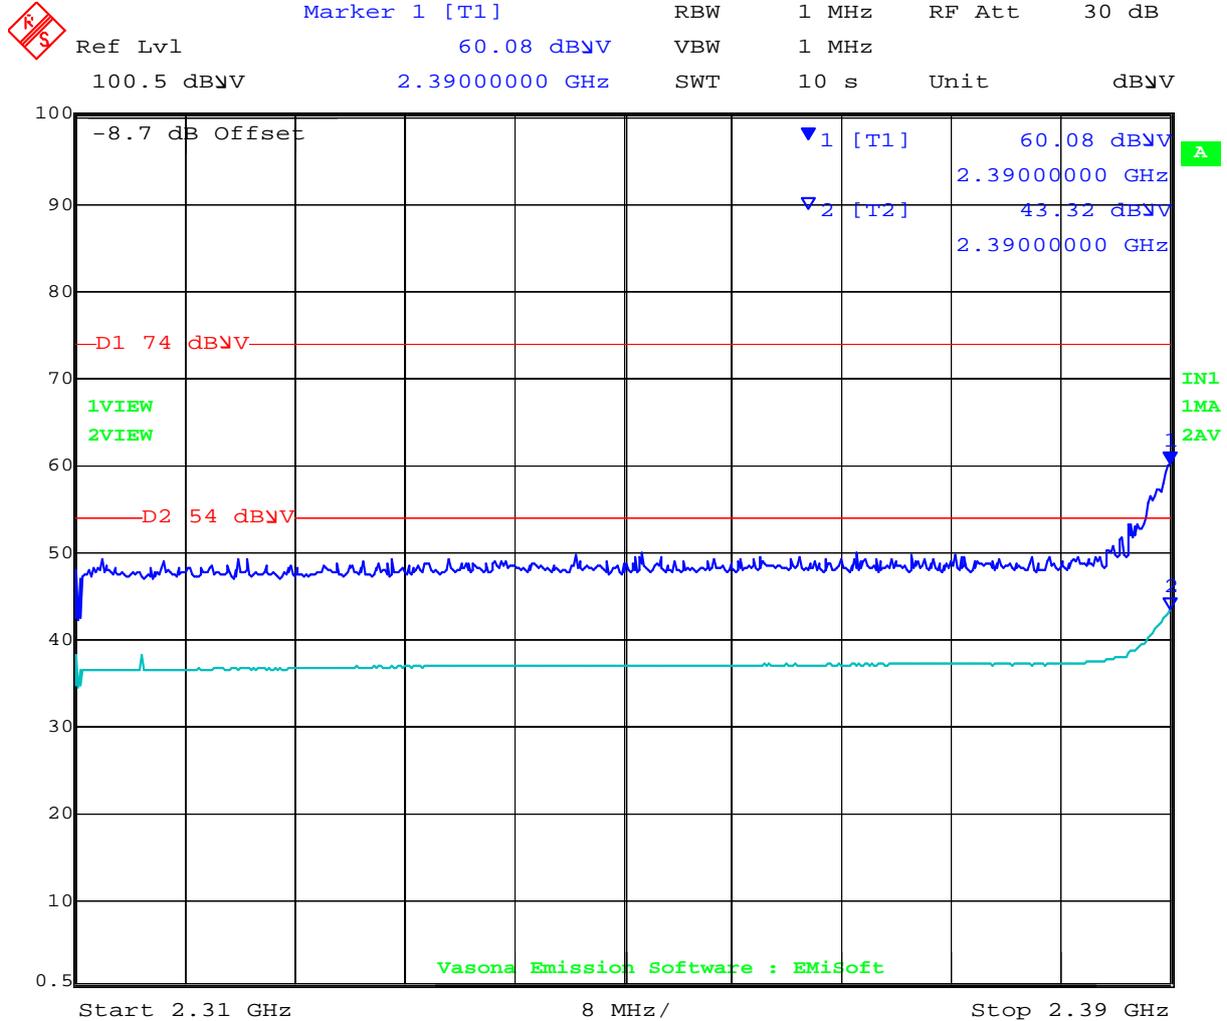


Date: 1.MAR.2012 17:45:59

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 296 of 331

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.5	Press. (mBars)	1010
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

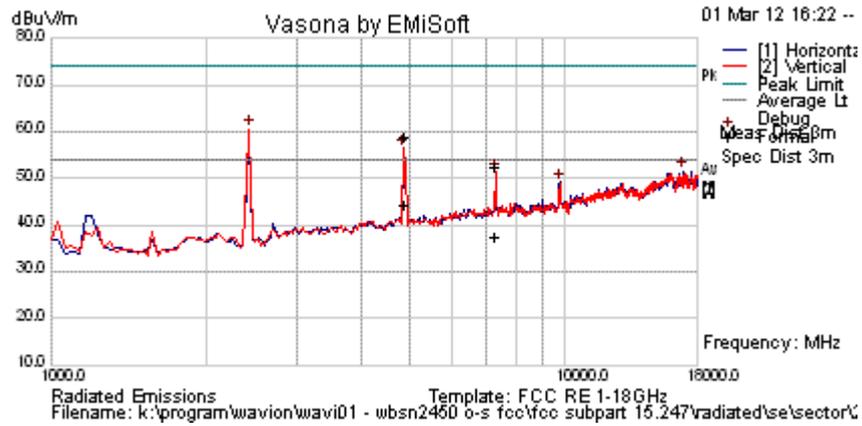

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4871.513	64.3	4.5	-9.7	59.1	Peak Max	V	199	0	74.0	-14.9	Pass	RB
7310.371	52.6	5.4	-5.7	52.3	Peak Max	V	142	173	74.0	-21.7	Pass	RB
4871.513	49.5	4.5	-9.7	44.3	Average Max	V	199	0	54.0	-9.7	Pass	RB
7310.371	37.6	5.4	-5.7	37.4	Average Max	V	142	173	54.0	-16.6	Pass	RB
2430.862	69.1	3.0	-11.6	60.5	Peak [Scan]	V						FUND
16875.752	42.3	8.6	0.7	51.5	Peak [Scan]	H	150	0	54	-2.5	Pass	NOISE
9755.511	46.5	6.4	-3.7	49.1	Peak [Scan]	H					Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 297 of 331

Test Freq.	2462 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	20.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.5	Press. (mBars)	1010
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

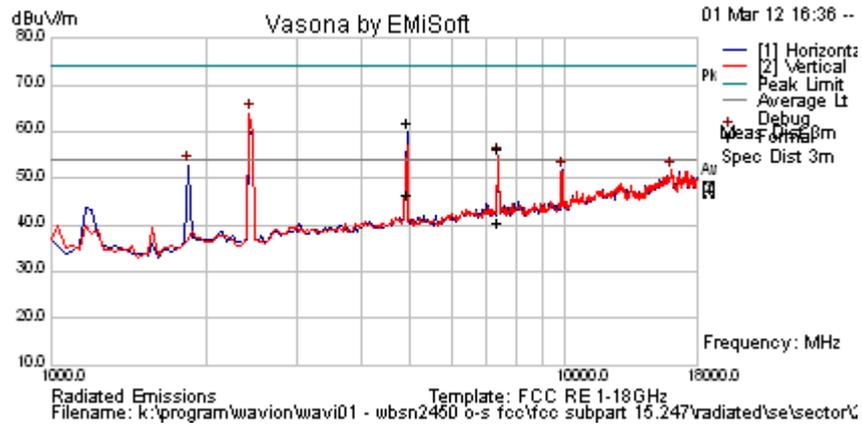

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4921.844	67.0	4.6	-9.8	61.8	Peak Max	H	202	273	74.0	-12.2	Pass	RB
7385.972	56.4	5.5	-5.5	56.4	Peak Max	V	165	198	74.0	-17.6	Pass	RB
4921.844	51.9	4.6	-9.8	46.7	Average Max	H	202	273	54.0	-7.4	Pass	RB
7385.972	40.3	5.5	-5.5	40.3	Average Max	V	165	198	54.0	-13.7	Pass	RB
2430.862	72.5	3.0	-11.6	63.9	Peak [Scan]	V						FUND
1851.703	62.6	2.7	-12.4	52.9	Peak [Scan]	H					Pass	NRB
9857.715	48.9	6.4	-3.5	51.8	Peak [Scan]	H					Pass	NRB
16058.116	42.5	9.0	0.3	51.8	Peak [Scan]	V	100	0	54	-2.2	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

	Ref Lvl	100.7 dBμV	Marker 1 [T1]	72.35 dBμV	2.48419439 GHz	RBW	1 MHz	RF Att	30 dB	VBW	1 MHz	SWT	10 s	Unit	dBμV
--	---------	------------	---------------	------------	----------------	-----	-------	--------	-------	-----	-------	-----	------	------	------

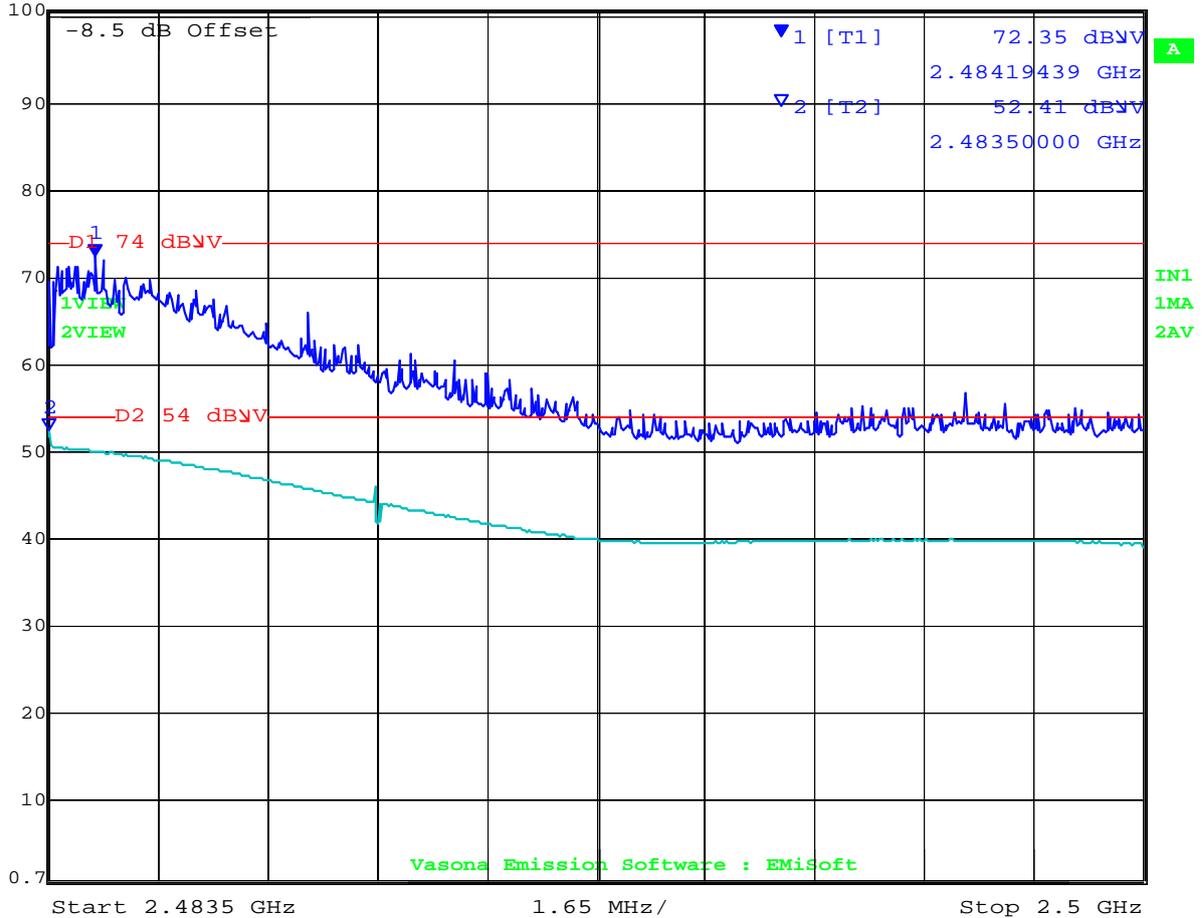


Date: 1.MAR.2012 17:58:55

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 299 of 331

Test Freq.	2422 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.5	Press. (mBars)	1010
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

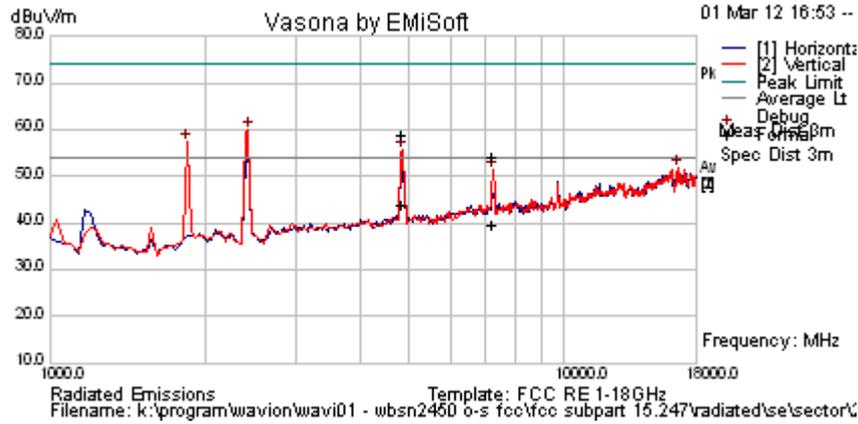

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4841.122	63.9	4.5	-9.7	58.7	Peak Max	V	199	0	74.0	-15.3	Pass	RB
7271.984	54.3	5.4	-5.8	54.0	Peak Max	V	133	175	74.0	-20.0	Pass	RB
4841.122	49.2	4.5	-9.7	44.0	Average Max	V	199	0	54	-10.0	Pass	RB
7271.984	40.0	5.4	-5.8	39.7	Average Max	V	133	175	54.0	-14.4	Pass	RB
2430.862	68.4	3.0	-11.6	59.8	Peak [Scan]	V						FUND
1851.703	67.0	2.7	-12.4	57.3	Peak [Scan]	V					Pass	NRB
16569.138	42.6	8.8	0.5	51.8	Peak [Scan]	V	200	0	54	-2.2	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB
Ref Lvl 64.07 dBμV VBW 1 MHz
100.5 dBμV 2.39000000 GHz SWT 10 s Unit dBμV

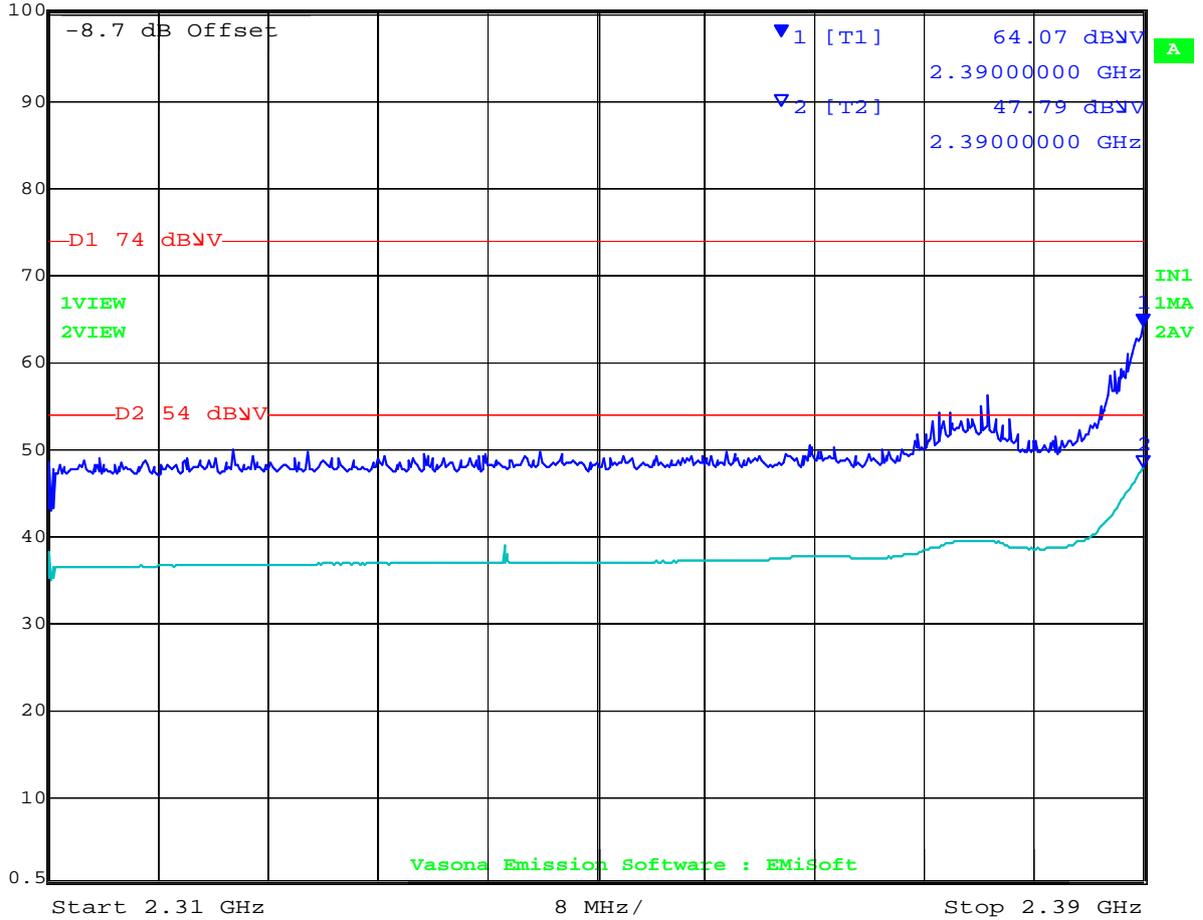


Date: 1.MAR.2012 17:48:53

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 301 of 331

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.5	Press. (mBars)	1010
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

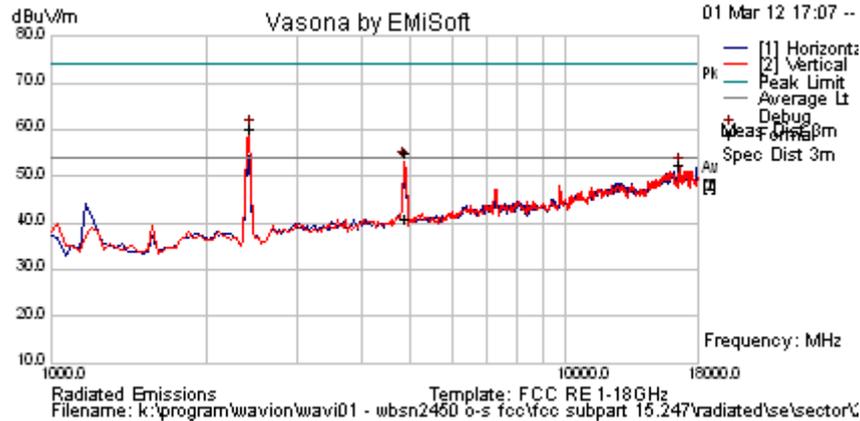

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4867.445	60.4	4.5	-9.7	55.2	Peak Max	V	202	0	74.0	-18.8	Pass	RB
4867.445	46.0	4.5	-9.7	40.8	Average Max	V	202	0	54.0	-13.2	Pass	RB
2430.862	68.8	3.0	-11.6	60.2	Peak [Scan]	V						FUND
16569.138	43.0	8.8	0.5	52.3	Peak [Scan]	H	100	0	54	-1.7	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 302 of 331

Test Freq.	2452 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	21
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	33
Power Setting	21.5	Press. (mBars)	1010
Antenna	Sector 12 dBi	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

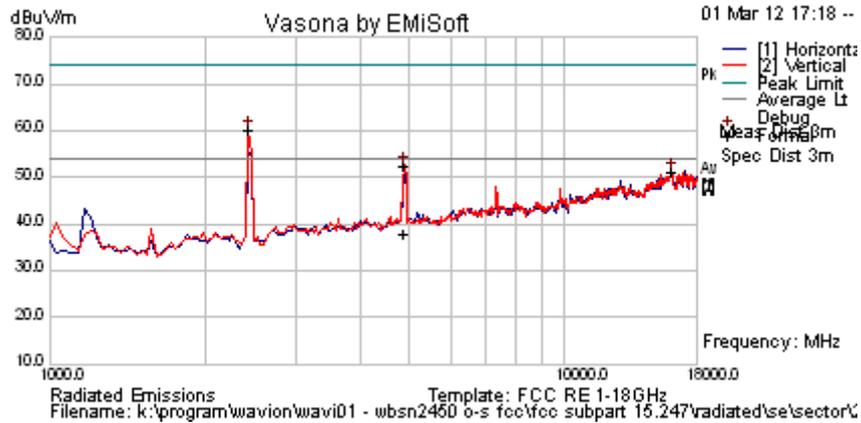

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
4895.070	57.5	4.5	-9.7	52.3	Peak Max	V	194	0	74.0	-21.7	Pass	RB
4895.07	43.1	4.5	-9.7	37.9	Average Max	V	194	0	54.0	-16.2	Pass	RB
2430.862	69.0	3.0	-11.6	60.4	Peak [Scan]	V						FUND
16092.184	42.1	9.0	0.3	51.3	Peak [Scan]	V	100	0	54	-2.7	Pass	NOISE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 30 dB
Ref Lvl 66.93 dBμV VBW 1 MHz
100.7 dBμV 2.48445892 GHz SWT 10 s Unit dBμV

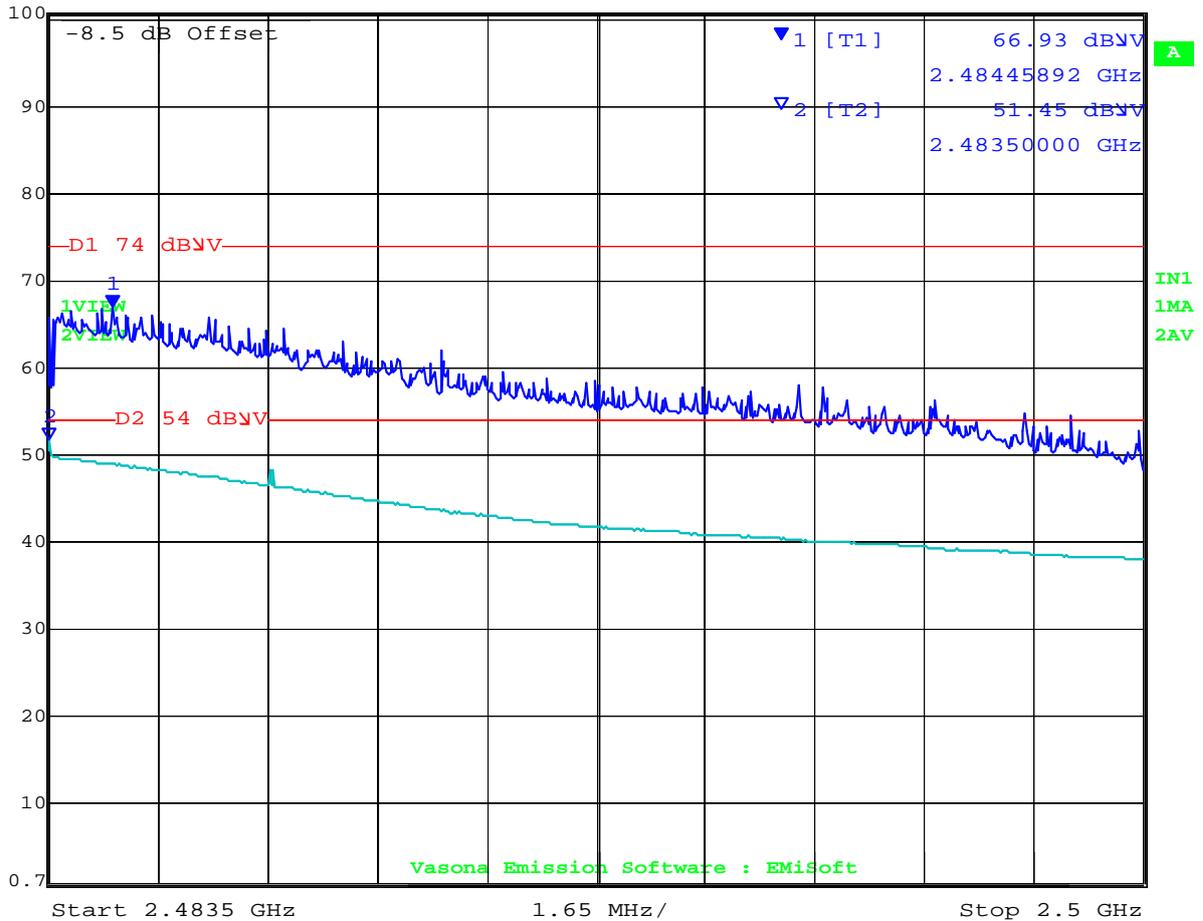


Date: 1.MAR.2012 18:02:50

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 304 of 331

Test Freq.	5745 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	20 (Reduced Power)	Press. (mBars)	995
Antenna	14 dBi Sector	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

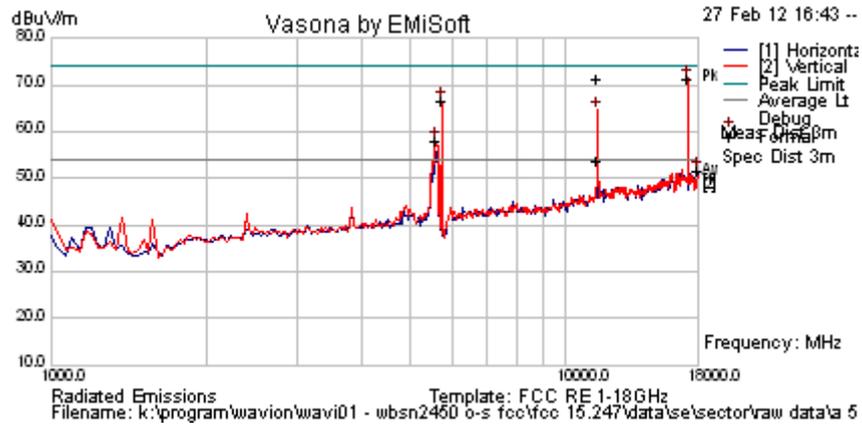

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11489.224	66.6	6.8	-2.0	71.4	Peak Max	V	105	197	74.0	-2.6	Pass	RB
11489.224	48.9	6.8	-2.0	53.7	Average Max	V	105	197	54.0	-0.3	Pass	RB
17250.501	61.8	8.6	1.0	71.4	Peak [Scan]	V	100	0	54	17.4	Fail	NRB
5735.471	71.3	4.8	-9.5	66.5	Peak [Scan]	V						FUND
5599.198	63.1	4.7	-9.7	58.1	Peak [Scan]	V					Pass	BE
18000.000	42.3	8.8	0.7	51.8	Peak [Scan]	H	150	0	54	-2.2	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 305 of 331

Test Freq.	5785 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	21 (Reduced Power)	Press. (mBars)	995
Antenna	14 dBi Sector	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

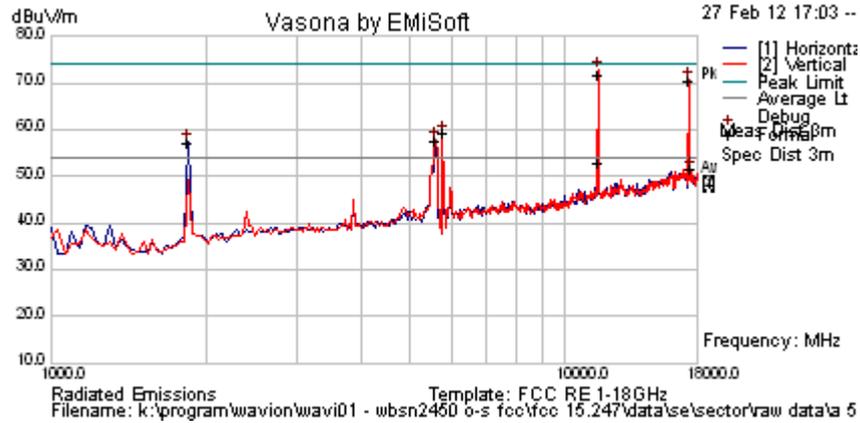

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11569.033	67.1	6.8	-2.0	71.9	Peak	V	98	191	74.0	-2.1	Pass	RB
11569.033	48.3	6.8	-2.0	53.1	Average	V	98	191	54.0	-0.9	Pass	RB
17352.705	60.7	8.7	1.3	70.7	Peak [Scan]	H	100	0	54	16.7	Fail	NRB
5769.539	63.8	4.8	-9.5	59.1	Peak [Scan]	V						FUND
5599.198	62.8	4.7	-9.7	57.8	Peak [Scan]	V					Pass	BE
1851.703	67.0	2.7	-12.4	57.2	Peak [Scan]	H	100	0	54	3.2	Pass	NRB
17523.046	41.8	8.8	0.9	51.4	Peak [Scan]	V	100	0	54	-2.6	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 306 of 331

Test Freq.	5825 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	20.5 (Reduced Power)	Press. (mBars)	995
Antenna	14 dBi Sector	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

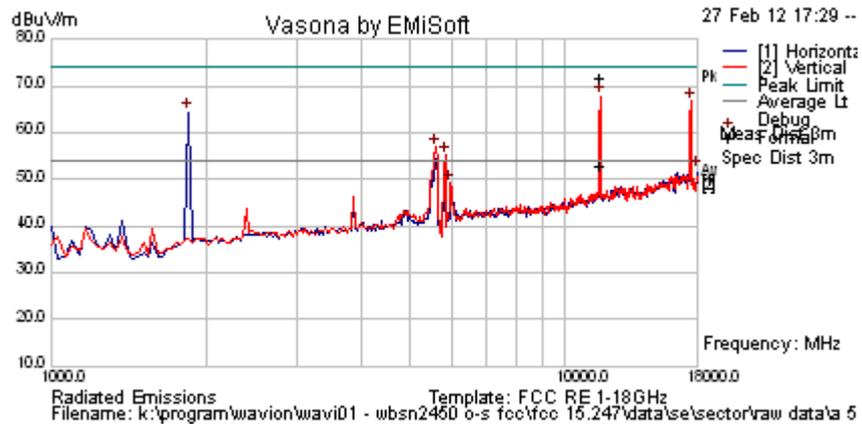

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11651.163	67.2	6.8	-2.3	71.8	Peak	V	98	193	74.0	-2.2	Pass	RB
11651.163	48.4	6.8	-2.3	53.0	Average	V	98	193	54.0	-1.0	Pass	RB
17488.978	56.9	8.8	1.0	66.7	Peak [Scan]	V	150	0	54	12.7	Pass	NRB
1851.703	74.2	2.7	-12.4	64.5	Peak [Scan]	H	100	0	54	10.5	Pass	NRB
5599.198	61.8	4.7	-9.7	56.8	Peak [Scan]	V					Pass	BE
5837.675	59.5	4.8	-9.3	55.1	Peak [Scan]	V						FUND
18000.000	42.4	8.8	0.7	51.9	Peak [Scan]	H	100	0	54	-2.1	Pass	NOISE
5973.948	53.1	4.9	-8.7	49.3	Peak [Scan]	V					Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 307 of 331

Test Freq.	5745 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 Mbit/s, MCS0	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	21 (Reduced Power)	Press. (mBars)	995
Antenna	Sector	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

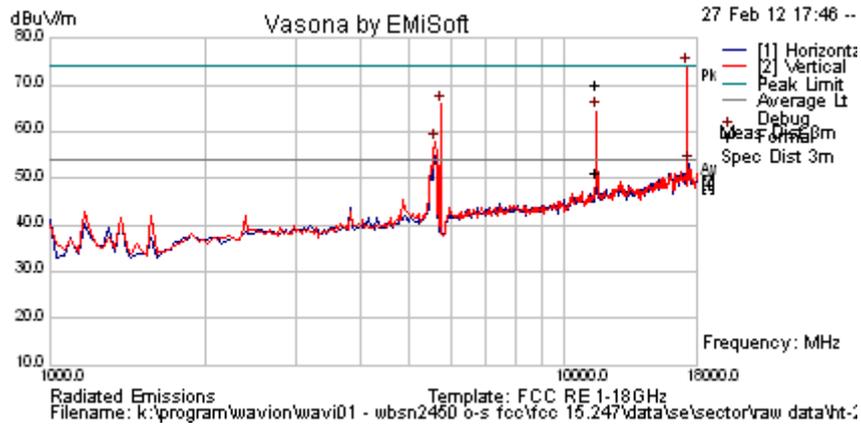

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11489.209	65.2	6.8	-2.0	70.0	Peak Max	V	113	188	74.0	-4.0	Pass	RB
11489.209	46.5	6.8	-2.0	51.3	Average Max	V	113	188	54.0	-2.7	Pass	RB
17250.501	64.5	8.6	1.0	74.1	Peak [Scan]	V					Pass	NRB
5735.471	70.6	4.8	-9.5	65.8	Peak [Scan]	V						FUND
5599.198	62.8	4.7	-9.7	57.8	Peak [Scan]	V					Pass	BE
17386.774	42.9	8.7	1.4	53.0	Peak [Scan]	H	150	0	54	-1.0	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 20 dB
Ref Lvl 48.08 dBμV VBW 1 MHz
100.3 dBμV 5.44567134 GHz SWT 10 s Unit dBμV

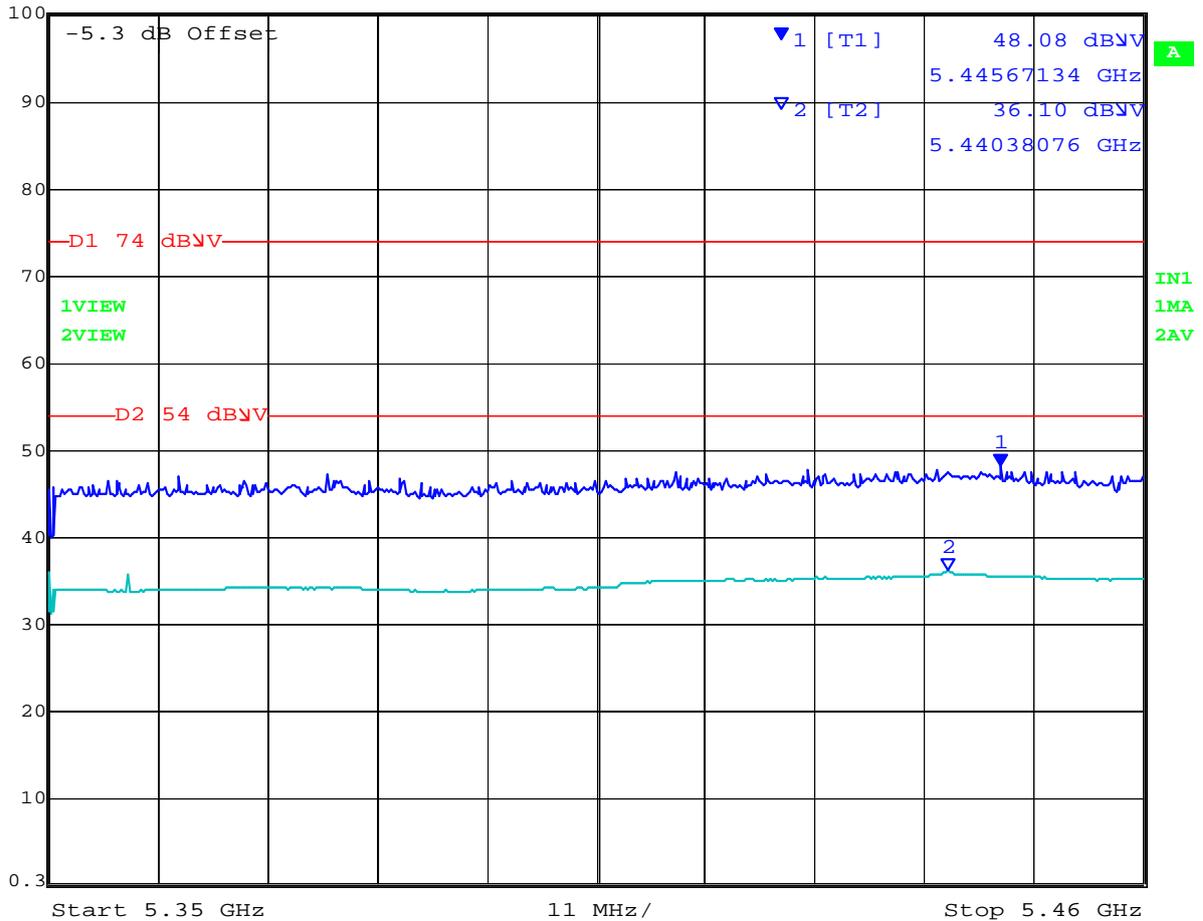


Date: 27.FEB.2012 19:08:16

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 309 of 331

Test Freq.	5785 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 Mbit/s, MCS0	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	23	Press. (mBars)	995
Antenna	Sector	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

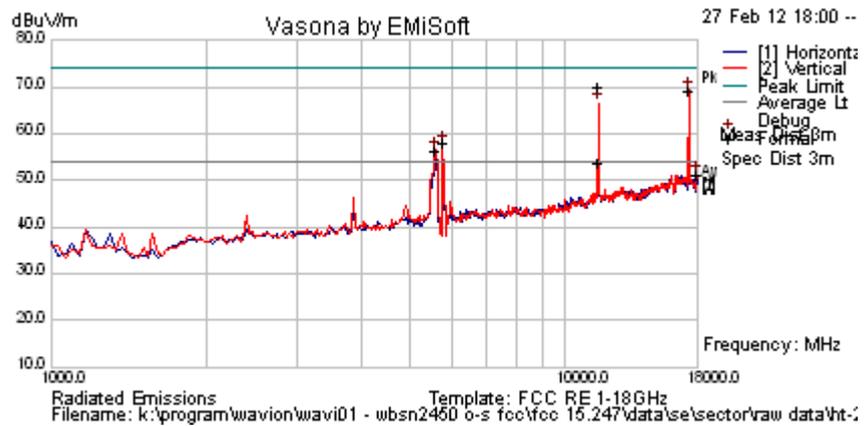

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11569.008	65.2	6.8	-2.0	70.0	Peak Max	V	108	195	74.0	-4.0	Pass	RB
11569.008	48.9	6.8	-2.0	53.7	Average Max	V	108	195	54.0	-0.3	Pass	RB
17352.705	59.2	8.7	1.3	69.2	Peak [Scan]	V					Pass	NRB
5769.539	62.6	4.8	-9.5	57.9	Peak [Scan]	V						FUND
5599.198	61.4	4.7	-9.7	56.4	Peak [Scan]	V					Pass	BE
18000.000	41.8	8.8	0.7	51.3	Peak [Scan]	H	100	0	54	-2.7	Pass	NOISE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 310 of 331

Test Freq.	5825 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 Mbit/s, MCS0	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	21 (Reduced Power)	Press. (mBars)	995
Antenna	Sector	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

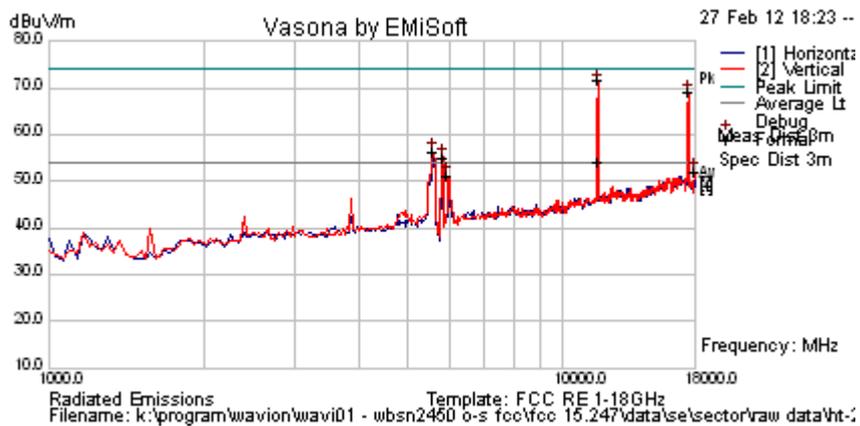

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11652.343	67.4	6.8	-2.3	71.9	Peak	V	98	191	74.0	-2.1	Pass	RB
11652.343	49.5	6.8	-2.3	54.0	Average	V	98	191	54.0	0.0	Pass	RB
17488.978	59.2	8.8	1.0	69.0	Peak [Scan]	V					Pass	NRB
5599.198	61.4	4.7	-9.7	56.3	Peak [Scan]	V					Pass	BE
5837.675	59.5	4.8	-9.3	55.1	Peak [Scan]	V						FUND
18000.000	42.4	8.8	0.7	52.0	Peak [Scan]	V	100	0	54	-2.1	Pass	NOISE
5973.948	55.0	4.9	-8.7	51.1	Peak [Scan]	V					Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 311 of 331

Test Freq.	5755 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 Mbit/s, MCS 0	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	22 (Reduced Power)	Press. (mBars)	995
Antenna	Sector	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

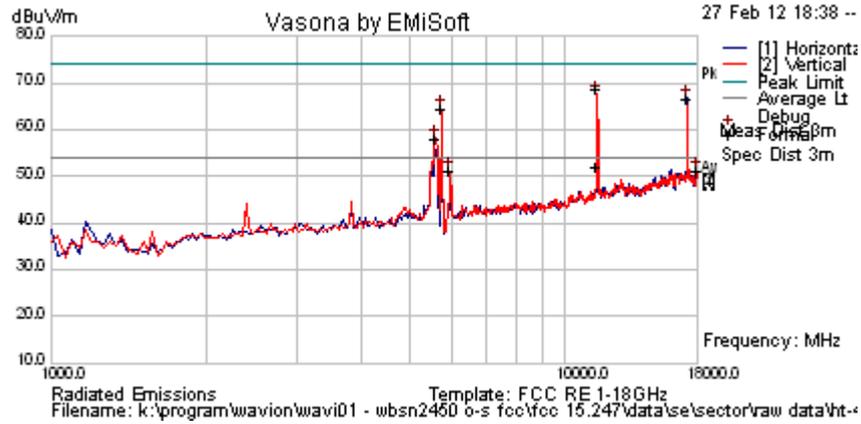

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11510.336	63.8	6.8	-1.9	68.7	Average.	V	98	197	74.0	-5.3	Pass	RB
11510.336	47.2	6.8	-1.9	52.0	Average	V	98	197	54.0	-2.0	Pass	RB
17250.501	57.2	8.6	1.0	66.8	Peak [Scan]	H					Pass	NRB
5735.471	69.2	4.8	-9.5	64.5	Peak [Scan]	V						FUND
5599.198	63.1	4.7	-9.7	58.1	Peak [Scan]	V					Pass	BE
18000.000	41.8	8.8	0.7	51.3	Peak [Scan]	V	100	0	54	-2.7	Pass	NOISE
5973.948	54.9	4.9	-8.7	51.1	Peak [Scan]	V					Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Band Edge

 **Marker 1 [T1]** RBW 1 MHz RF Att 20 dB
Ref Lvl 49.74 dBμV VBW 1 MHz
100.3 dBμV 5.42340681 GHz SWT 10 s Unit dBμV

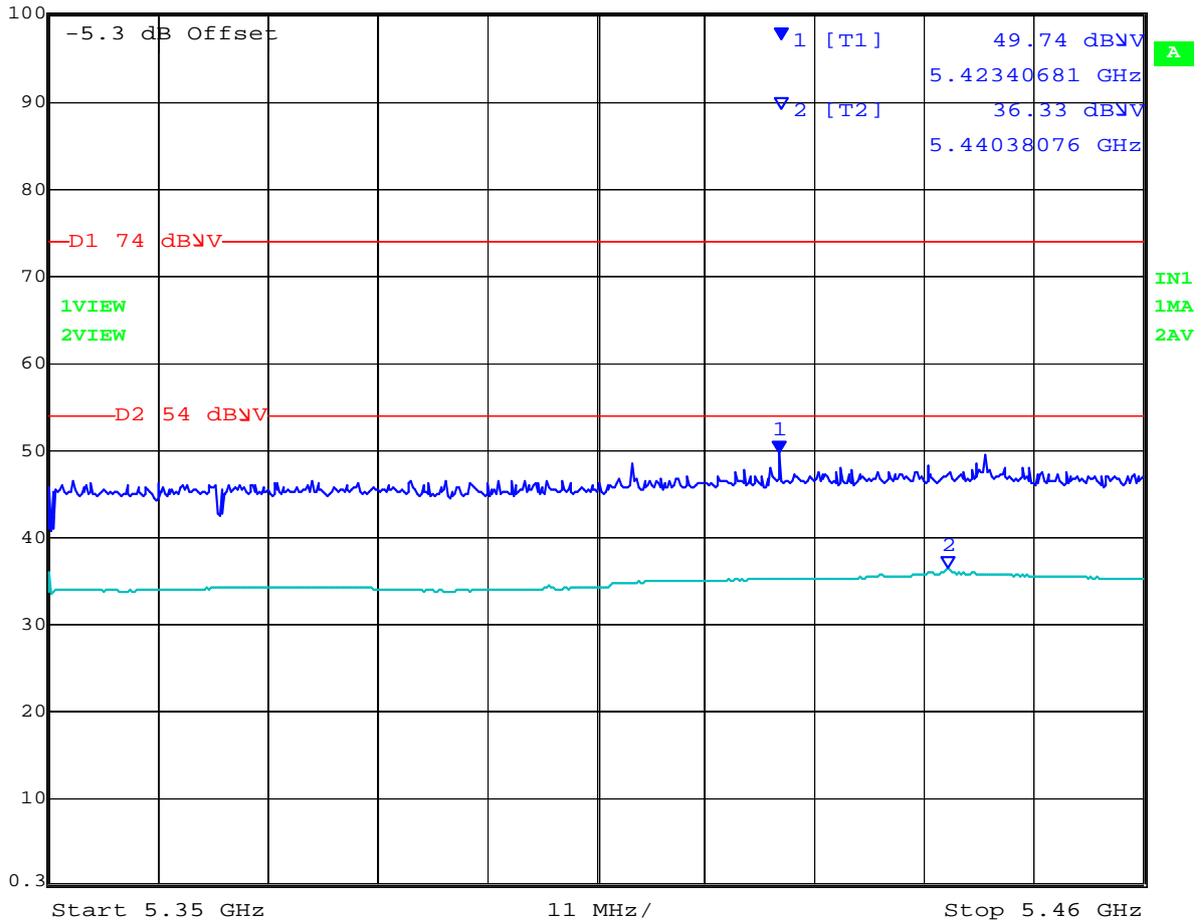


Date: 27.FEB.2012 19:11:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 313 of 331

Test Freq.	5795 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	21.5
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	22 (Reduced Power)	Press. (mBars)	995
Antenna	Sector	Duty Cycle (%)	100
Test Notes 1			
Test Notes 2			

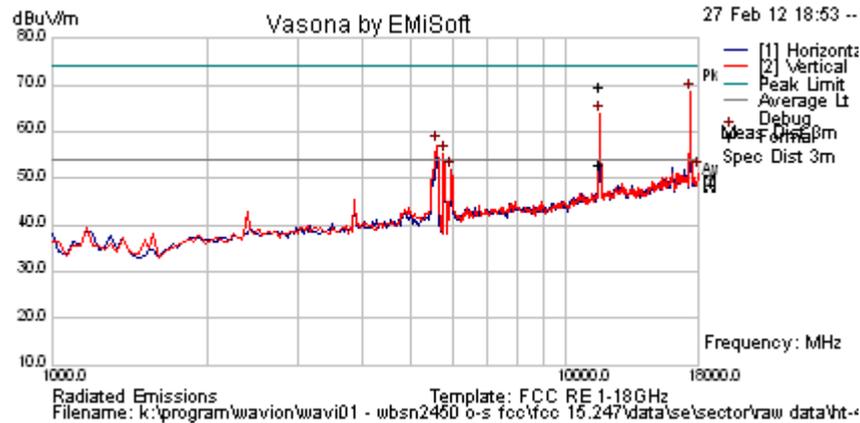

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
11587.770	64.8	6.8	-2.1	69.6	Peak Max	V	98	192	74.0	-4.4	Pass	RB
11587.77	48.0	6.8	-2.1	52.7	Average Max	V	98	192	54.0	-1.3	Pass	RB
17420.842	58.5	8.7	1.3	68.5	Peak [Scan]	V					Pass	NRB
5599.198	62.2	4.7	-9.7	57.1	Peak [Scan]	V					Pass	BE
5769.539	59.9	4.8	-9.5	55.2	Peak [Scan]	V						FUND
5973.948	55.6	4.9	-8.7	51.7	Peak [Scan]	V					Pass	BE
18000.000	42.1	8.8	0.7	51.6	Peak [Scan]	V	200	0	54	-2.4	Pass	NOISE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 314 of 331

Specification Limits

FCC §15.247(d) and RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

FCC §15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

IC RSS-210 §A8.5 If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

IC RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 315 of 331

§15.209 (a) Limit Matrix

Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



5.1.6.3. Radiated Spurious Emissions (30M-1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209
Industry Canada RSS-210 §2.2

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength
R = Measured Receiver Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:


$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radiated Emission Measurement Setup – Below 1 GHz

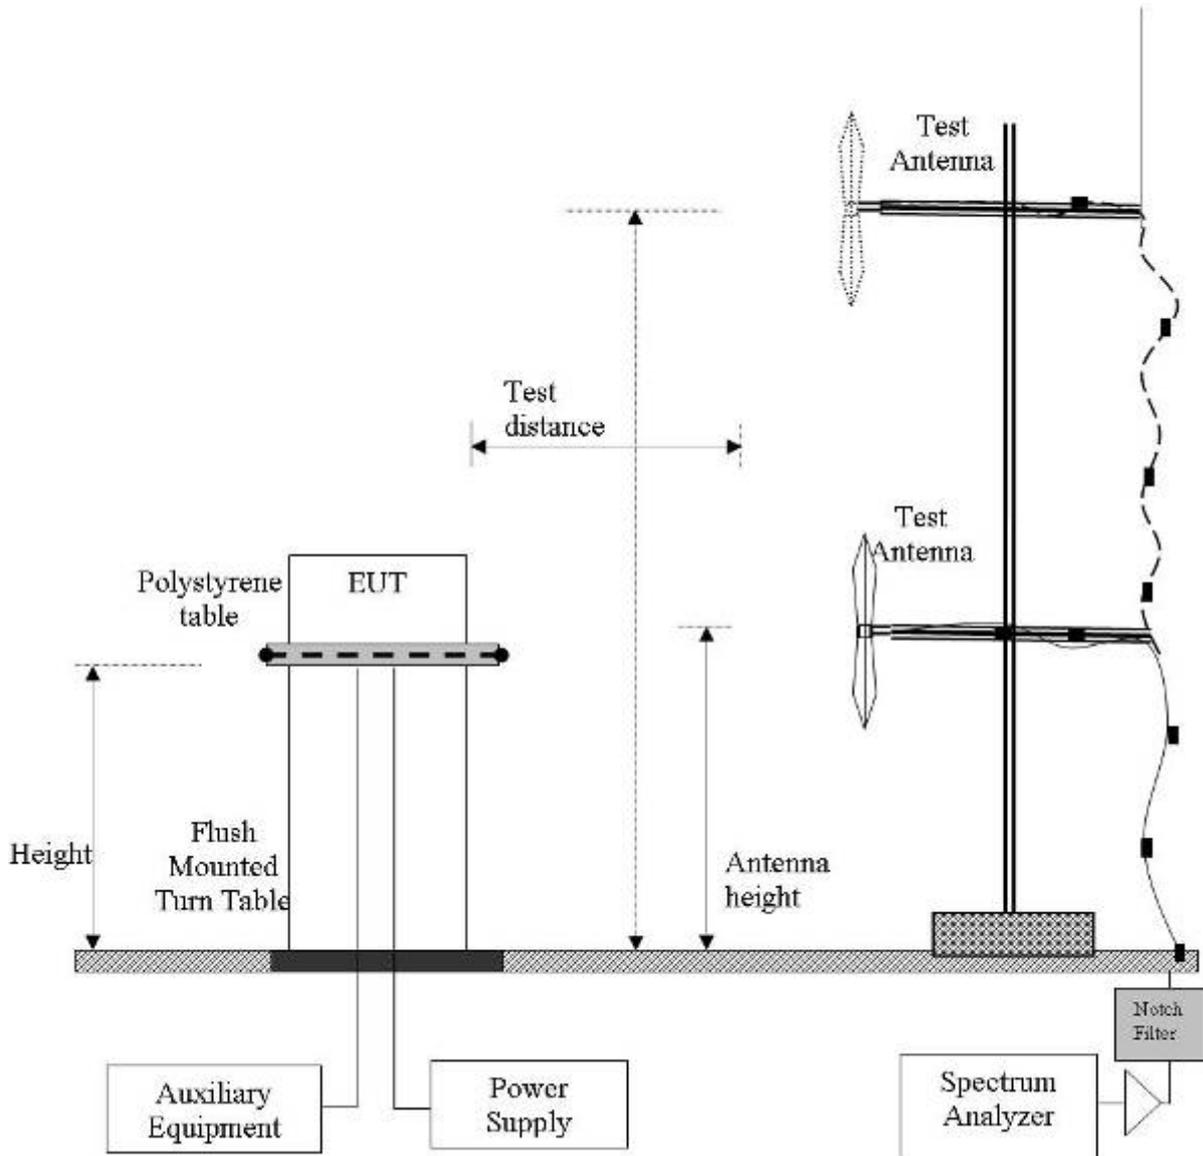


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



The EUT was powered via Power over Ethernet (POE).

Test Freq.	5260 MHz	Engineer	GMH
Variant	Digital Emissions	Temp (°C)	21.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	31
Power Setting	N/A	Press. (mBars)	1012
Antenna	OMNI		
Test Notes 1	POE Model #: POE61U-560DG, Input Voltage 100-240 ~ 2A, Output Voltage 56 Vdc 1.1A		
Test Notes 2	To bring EUT into compliance a 1m screened cable was required between POE and EUT		

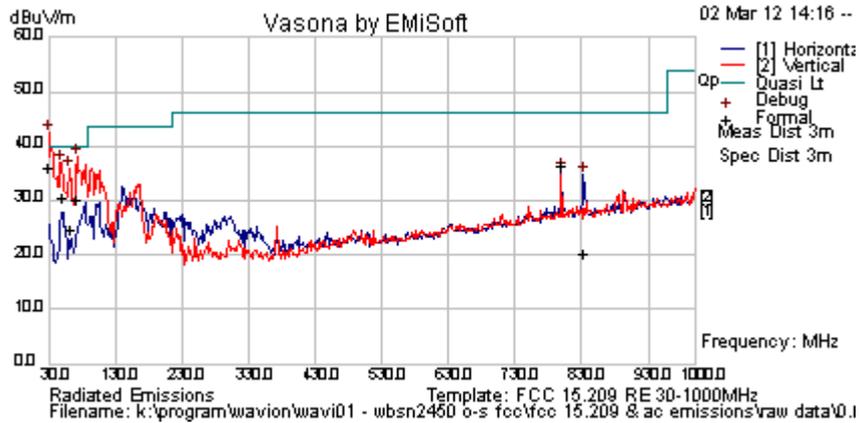

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
30.326	42.0	3.4	-9.4	36.0	Quasi Max	V	133	303	40	-4.0	Pass	
72.863	48.8	3.9	-22.7	30.1	Quasi Max	V	124	19	40.0	-9.9	Pass	
50.536	49.6	3.7	-22.9	30.5	Quasi Max	V	98	75	40.0	-9.5	Pass	
63.691	44.0	3.9	-23.3	24.6	Quasi Max	V	166	82	40.0	-15.4	Pass	
800.009	37.6	7.2	-8.4	36.4	Quasi Max	H	104	311	46.0	-9.6	Pass	
834.982	21.1	7.2	-7.9	20.4	Quasi Max	H	144	224	46.0	-25.6	Pass	


Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 319 of 331

Test Freq.	5260 MHz	Engineer	GMH
Variant	Digital Emissions	Temp (°C)	21.5
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	31
Power Setting	17	Press. (mBars)	1012
Antenna	Sector Antenna		
Test Notes 1	The 800.005 MHz emission was measured in two modes 1).. As a digital emission and 2).. As an intentional radiator. This emission was related to the transmitter and as such classed as a NRB emission. When the transmitter was stopped the emission amplitude was reduced but still present and therefore tested as a DIGITAL emission also. Both cases were found to be compliant		
Test Notes 2	POE Model #: POE61U-560DG, Input Voltage 100-240 ~ 2A, Output Voltage 56 Vdc 1.1A. To bring the EUT into compliance a 1m screened cable was required between POE and EUT		To

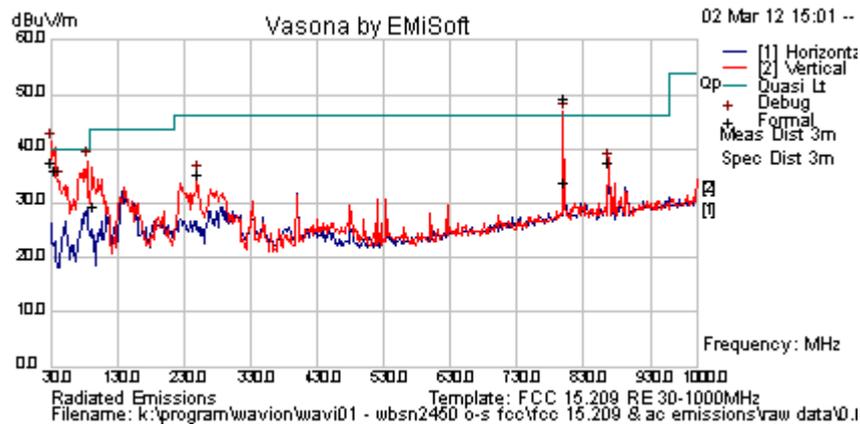

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
30.047	43.3	3.4	-9.1	37.5	Quasi Max	V	98	280	40	-2.5	Pass	DIG
37.030	47.0	3.5	-14.4	36.1	Quasi Max	V	115	268	40.0	-3.9	Pass	DIG
94.208	47.8	4.1	-22.5	29.4	Quasi Max	V	149	342	43.5	-14.1	Pass	DIG
249.417	49.1	5.0	-18.6	35.5	Peak [Scan]	V	144	268	46.0	-10.5	Pass	DIG
800.005	35.0	7.2	-8.4	33.8	Average	V	144	268	46.0	-12.2	Pass	DIG
800.005	50.5	7.2	-8.4	49.3	Quasi Max	V					Pass	NRB
867.975	37.8	7.2	-7.5	37.5	Peak [Scan]	V	144	268	46.0	-8.5	Pass	DIG

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency

NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 320 of 331

Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.7. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

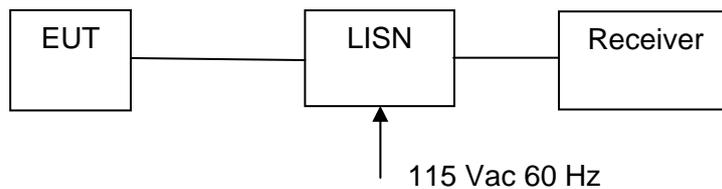

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C


Relative humidity: 31 to 57 %

Pressure: 999 to 1012 mbar



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 322 of 331

Test Freq.	2412 MHz	Engineer	GMH
Variant	AC Line Emissions (120 Vac 60 Hz)	Temp (°C)	21.5
Freq. Range	0.150 MHz - 30 MHz	Rel. Hum.(%)	31
Power Setting	17	Press. (mBars)	1012
Antenna	Sector		
Test Notes 1	POE Model #: POE61U-560DG, Input Voltage 100-240 ~ 2A, Output Voltage 56 Vdc 1.1A		
Test Notes 2	To bring the EUT into compliance a 1m screened cable was required between POE and EUT		

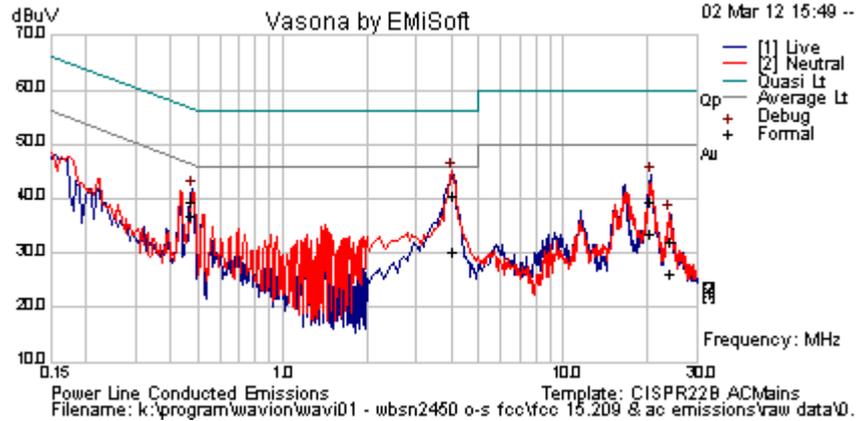

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail	Comments
0.478	29.3	9.9	0.1	39.3	Quasi Peak	Live	56.37	-17.1	Pass	
20.500	28.0	10.5	0.8	39.3	Quasi Peak	Live	60	-20.7	Pass	
24.051	20.5	10.6	0.9	32.0	Quasi Peak	Neutral	60	-28.0	Pass	
4.045	30.4	10.1	0.2	40.6	Quasi Peak	Neutral	56	-15.4	Pass	
0.478	26.9	9.9	0.1	36.9	Average	Live	46.37	-9.5	Pass	
20.500	22.1	10.5	0.8	33.4	Average	Live	50	-16.6	Pass	
24.051	14.8	10.6	0.9	26.3	Average	Neutral	50	-23.8	Pass	
4.045	19.9	10.1	0.2	30.2	Average	Neutral	46	-15.8	Pass	
0.436	31.3	9.9	0.1	41.3	Peak [Scan]	Neutral	47.14	-5.8	Pass	

Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency
 NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 323 of 331

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


6. PHOTOGRAPHS

6.1. Conducted Test Setup




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.2. Radiated Test Setup > 1 GHz OMNI

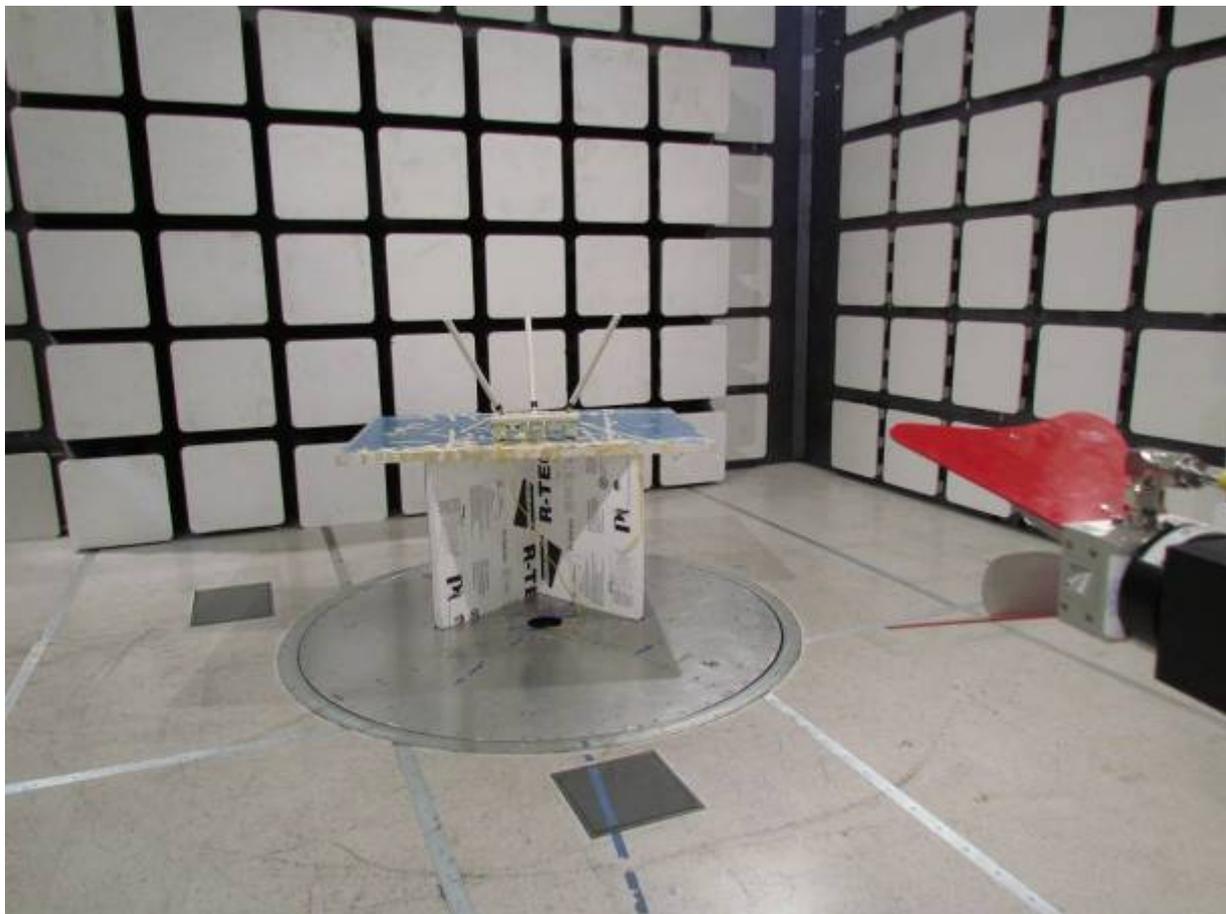

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.3. Radiated Test Setup > 1 GHz SECTOR

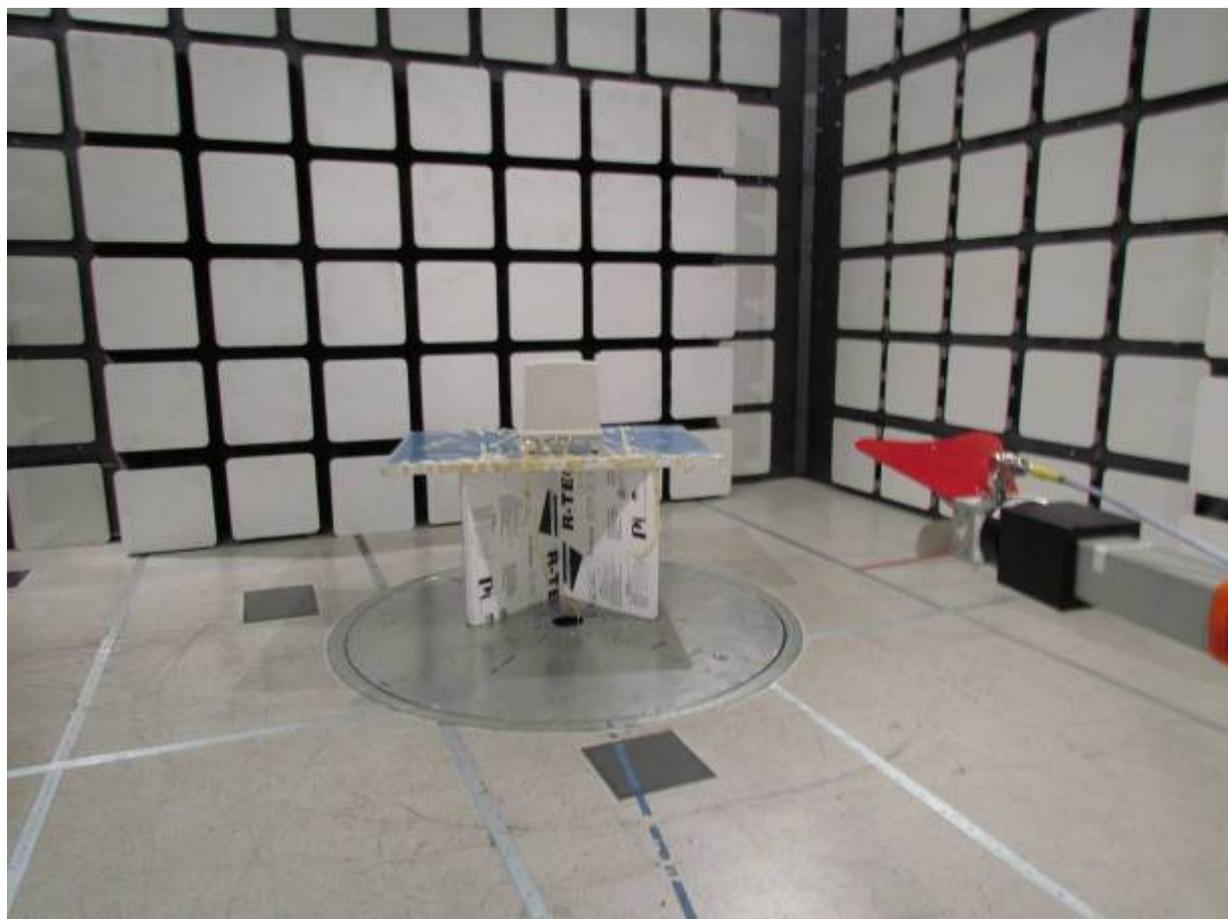

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.4. Radiated Test Setup below 1 GHz OMNI




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.5. Radiated Test Setup below 1 GHz SECTOR



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.6. AC Wireline Emissions

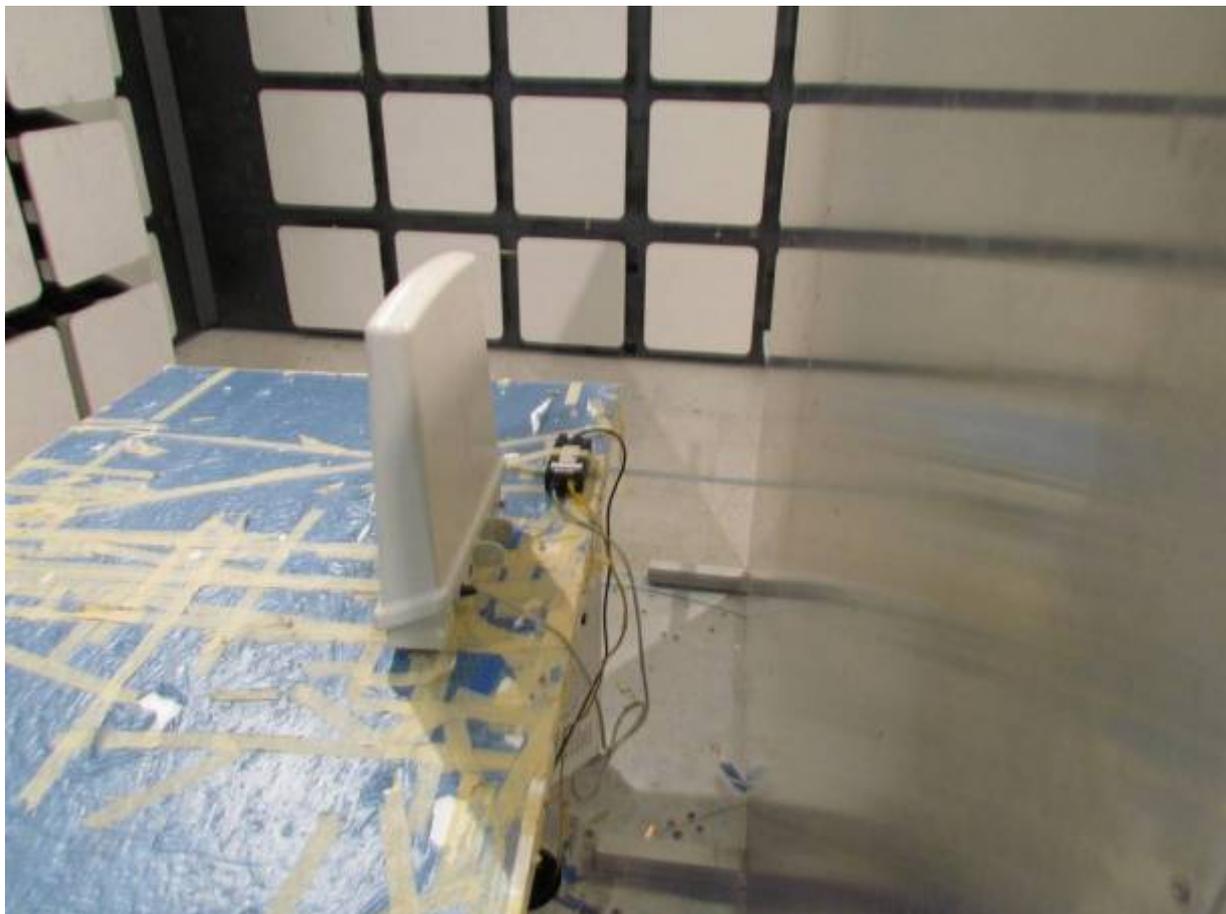

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Wavion WBSn-2450-O/-S Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: WAVI01-U1 Rev C
Issue Date: 14th March 2012
Page: 330 of 331

7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	3410A00141
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0287	EMI Receiver	Rhode & Schwartz	ESIB 40	100201
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787- 3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181- 3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com