

# FCC Test Report

**FCC ID** : UIDSBR-AC1900P  
**Equipment** : AC1900 Wi-Fi Router with RipCurrent™ Technology  
**Model No.** : SBR-AC1900P  
**Brand Name** : ARRIS  
**Applicant** : ARRIS Group, Inc.  
**Address** : 3871 Lakefield Drive, Suite 300, Suwanee, Georgia 30024, United States  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Jul. 29, 2015  
**Tested Date** : Aug. 21 ~ Sep. 30, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	8
1.3	Test Setup Chart .....	8
1.4	The Equipment List .....	9
1.5	Test Standards .....	10
1.6	Measurement Uncertainty .....	10
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>11</b>
2.1	Testing Condition .....	11
2.2	The Worst Test Modes and Channel Details .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>12</b>
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth .....	17
3.3	RF Output Power .....	22
3.4	Power Spectral Density .....	24
3.5	Unwanted Emissions into Restricted Frequency Bands .....	27
3.6	Emissions in Non-Restricted Frequency Bands .....	69
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>88</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR572901AC	Rev. 01	Initial issue	Oct. 13, 2015

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.461MHz 39.63 (Margin -7.05dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 4824.00MHz 52.98 (Margin -1.02dB) - AV [dBuV/m at 3m]: 5000.00MHz 52.98 (Margin -1.02dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: <b>Non-beamforming mode</b> 29.10 <b>Beamforming mode</b> 27.49	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	3	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	3	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	3	MCS 0-23
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	3	MCS 0-23

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.  
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.  
 Note 4: 802.11n supports beamforming function.

### 1.1.2 Antenna Details

Ant. No.	Type	Connector	Operating Frequency (MHz) / Gain (dBi)		
			2400~2483.5	5150~5250	5725~5850
1	Dipole	I-pex	3.29	-	-
2	Dipole	I-pex	3.86	-	-
3	Dipole	I-pex	3.66	-	-
4	Dipole	I-pex	-	4.3	4
5	Dipole	I-pex	-	3.2	2.8
6	Dipole	I-pex	-	3.5	4.3

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	100-240Vac, 50-60Hz, 1.0A Power line: 1.5m non-shielded without core
--------------------------	---

### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	RJ45 cable	1m non-shielded without core

### 1.1.5 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

### 1.1.6 Test Tool and Duty Cycle

Test Tool	MTool, version 2.0.2.1				
Duty Cycle and Duty Factor	Mode	Non-beamforming		Beamforming	
		Duty cycle (%)	Duty factor (dB)	Duty cycle (%)	Duty factor (dB)
	11b	100.00%	0.00	---	---
	11g	99.66%	0.02	---	---
	HT20	99.26%	0.03	98.48%	0.07
HT40	98.21%	0.08	98.12%	0.08	


### 1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set	
		Non-beamforming	Beamforming
11b	2412	92	---
11b	2437	94	---
11b	2462	94	---
11g	2412	80	---
11g	2437	94	---
11g	2462	78	---
HT20	2412	76	74
HT20	2437	94	90
HT20	2462	74	74
HT40	2422	64	64
HT40	2437	74	74
HT40	2452	60	60

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6440	DoC	RJ45, 8m non-shielded.
2	Notebook	DELL	Latitude E6440	DoC	RJ45, 8m non-shielded.
3	USB 2.0 flash	Kingston	DTSE9	---	---
4	USB 2.0 flash	Kingston	DTSE9	---	---
5	Load	ICC	---	---	RJ45, 5m non-shielded x3.

## 1.3 Test Setup Chart

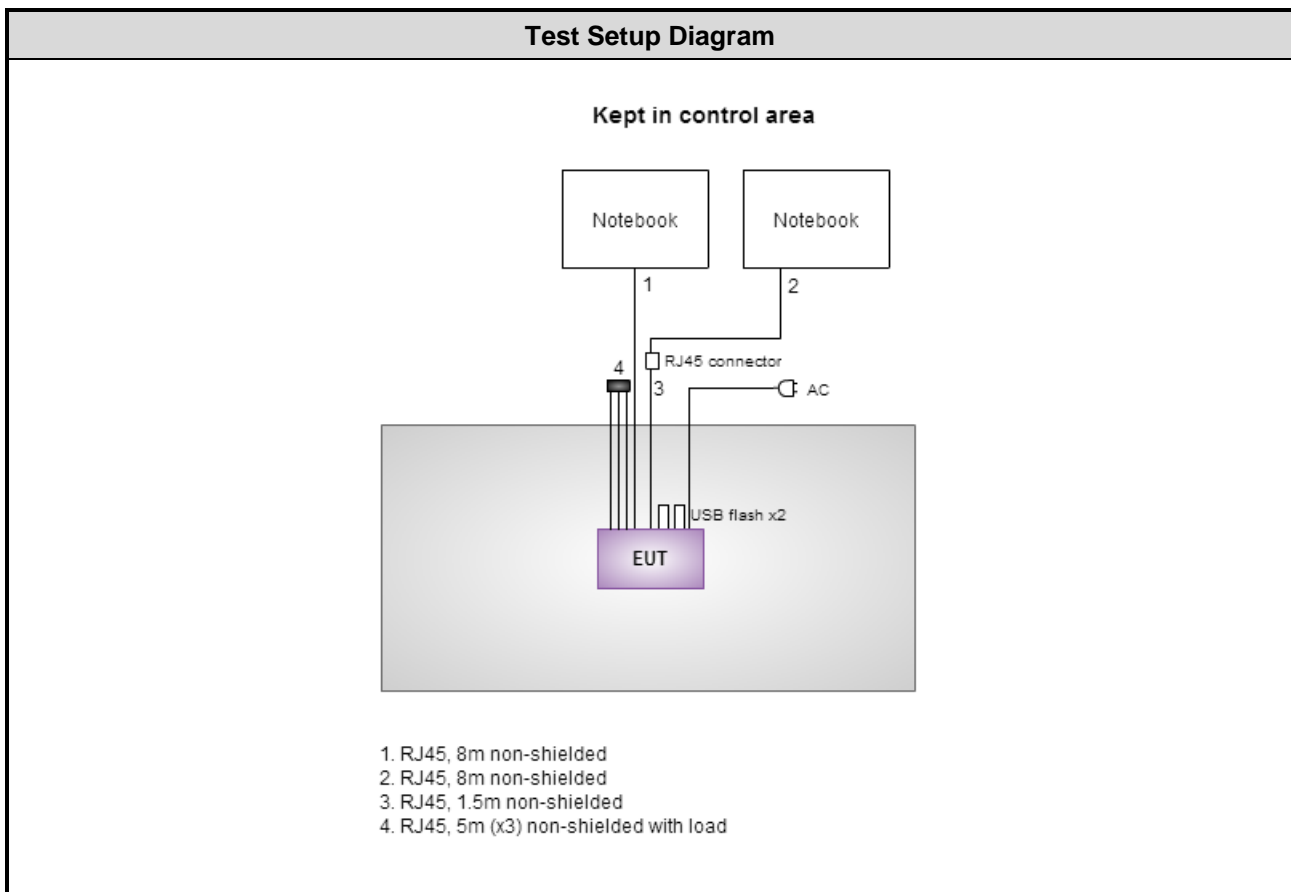



## 1.4 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Sep. 21, 2015				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
EMC Receiver	R&S	ESCS 30	100169	Oct. 17, 2014	Oct. 16, 2015
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber 2 / (03CH02-WS)				
<b>Tested Date</b>	Aug. 21 ~ Sep. 18, 2015				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101499	Dec. 31, 2014	Dec. 30, 2015
Receiver	R&S	ESR3	101657	Jan. 15, 2015	Jan. 14, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Oct. 16, 2014	Oct. 15, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Oct. 14, 2014	Oct. 13, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Burgeon	BPA-530	100218	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Agilent	83017A	MY39501309	Sep. 29, 2014	Sep. 28, 2015
Pre-Amplifier	WM	TF-130N-R1	923365	Feb. 10, 2015	Feb. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 16, 2014	Dec. 15, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 16, 2014	Dec. 15, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 16, 2014	Dec. 15, 2015
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 16, 2014	Dec. 15, 2015
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-004	Dec. 16, 2014	Dec. 15, 2015
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Sep. 24 ~ Sep. 30, 2015				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v03r03

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.62 dB
Radiated emission > 1GHz	±5.60 dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 56%	Kevin Ma
Radiated Emissions	03CH02-WS	21-25°C / 62-68%	Anderson Hung
RF Conducted	TH01-WS	21°C / 64%	Felix Sung

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

### 2.2 The Worst Test Modes and Channel Details

#### *Non-beamforming mode*

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11b	2462	1 Mbps	---
Radiated Emissions ≤1GHz	11b	2462	1 Mbps	---
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	---
Maximum Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

#### *Beamforming mode*

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	HT20	2437	MCS 0	---
Radiated Emissions ≤1GHz	HT20	2437	MCS 0	---
Radiated Emissions >1GHz	HT20	2412 / 2437 / 2462	MCS 0	---
Maximum Output Power	HT40	2422 / 2437 / 2452	MCS 0	
6dB bandwidth			MCS 0	
Power spectral density				

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

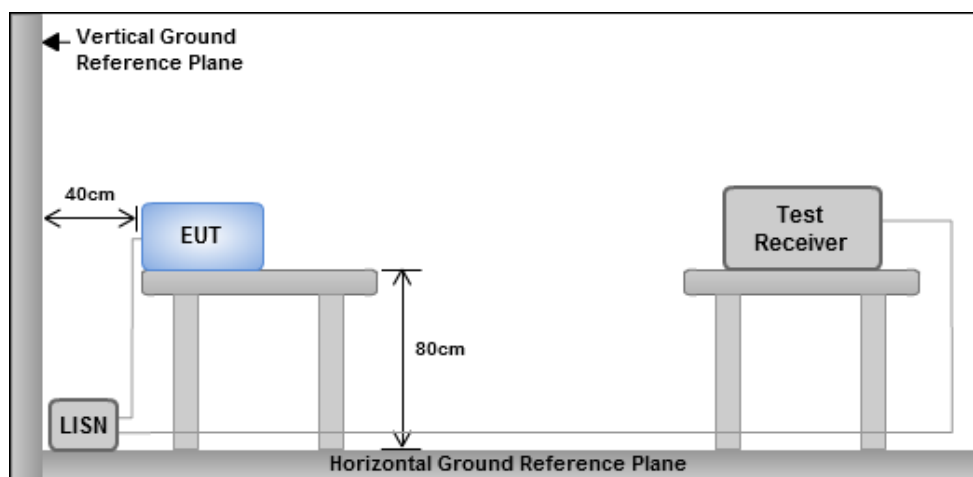


- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

#### Non-beamforming mode

Modulation	11b	Test Freq. (MHz)	2462
Power Phase	Line		

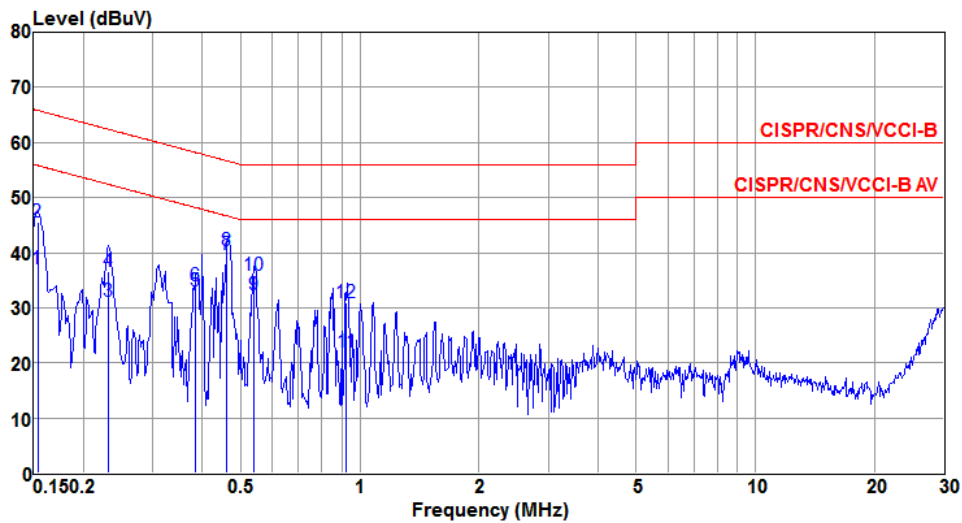


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	37.14	55.82	-18.68	36.99	0.07	0.08	Average
2	0.153	45.54	65.82	-20.28	45.39	0.07	0.08	QP
3	0.232	31.27	52.39	-21.12	31.11	0.07	0.09	Average
4	0.232	36.63	62.39	-25.76	36.47	0.07	0.09	QP
5	0.384	32.99	48.19	-15.20	32.81	0.07	0.11	Average
6	0.384	34.04	58.19	-24.15	33.86	0.07	0.11	QP
7	0.461	39.63	46.68	-7.05	39.44	0.07	0.12	Average
8	0.461	40.38	56.68	-16.30	40.19	0.07	0.12	QP
9	0.541	32.41	46.00	-13.59	32.21	0.07	0.13	Average
10	0.541	35.93	56.00	-20.07	35.73	0.07	0.13	QP
11	0.923	22.05	46.00	-23.95	21.81	0.08	0.16	Average
12	0.923	30.94	56.00	-25.06	30.70	0.08	0.16	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).

Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Power Phase</b>	Neutral		

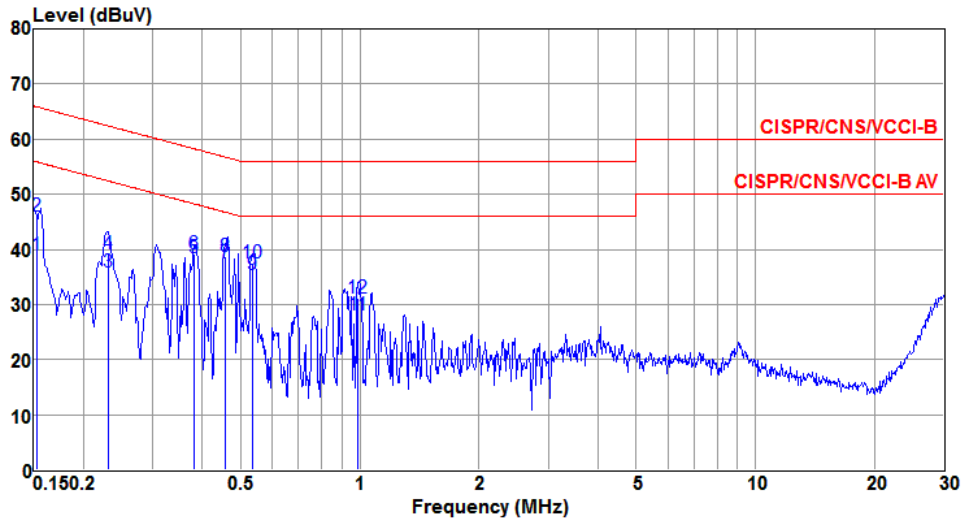


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	38.86	55.86	-17.00	38.71	0.07	0.08	Average
2	0.153	46.09	65.86	-19.77	45.94	0.07	0.08	QP
3	0.232	35.86	52.39	-16.53	35.70	0.07	0.09	Average
4	0.232	39.15	62.39	-23.24	38.99	0.07	0.09	QP
5	0.381	38.58	48.25	-9.67	38.40	0.07	0.11	Average
6	0.381	39.16	58.25	-19.09	38.98	0.07	0.11	QP
7	0.457	37.51	46.75	-9.24	37.32	0.07	0.12	Average
8	0.457	38.79	56.75	-17.96	38.60	0.07	0.12	QP
9	0.535	35.39	46.00	-10.61	35.19	0.07	0.13	Average
10	0.535	37.54	56.00	-18.46	37.34	0.07	0.13	QP
11	0.989	28.05	46.00	-17.95	27.81	0.08	0.16	Average
12	0.989	31.12	56.00	-24.88	30.88	0.08	0.16	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

**Beamforming mode**


<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Line		

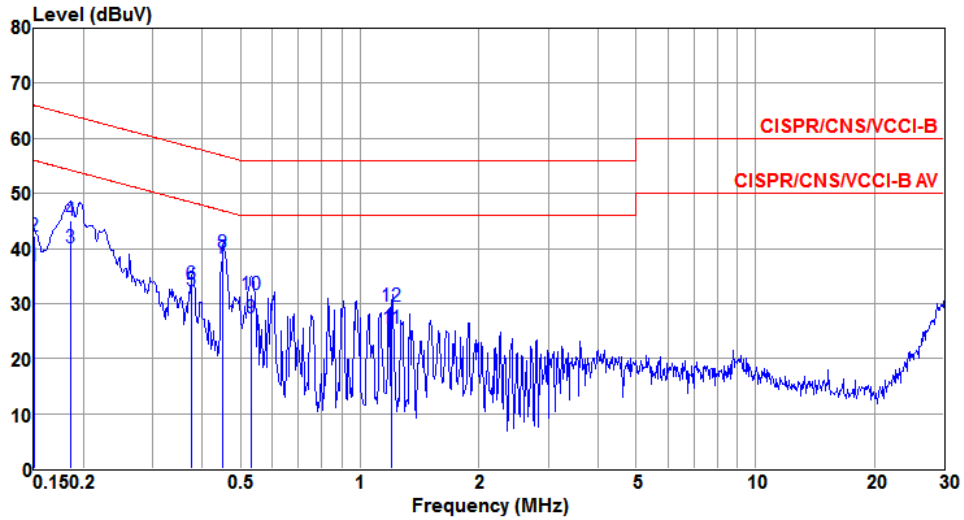

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.150	36.91	56.00	-19.09	36.76	0.07	0.08	Average
2	0.150	42.26	66.00	-23.74	42.11	0.07	0.08	QP
3	0.186	40.14	54.20	-14.06	39.98	0.07	0.09	Average
4	0.186	45.05	64.20	-19.15	44.89	0.07	0.09	QP
5	0.377	32.23	48.35	-16.12	32.05	0.07	0.11	Average
6	0.377	33.59	58.35	-24.76	33.41	0.07	0.11	QP
7@	0.451	38.23	46.86	-8.63	38.04	0.07	0.12	Average
8	0.451	39.15	56.86	-17.71	38.96	0.07	0.12	QP
9	0.531	27.30	46.00	-18.70	27.10	0.07	0.13	Average
10	0.531	31.52	56.00	-24.48	31.32	0.07	0.13	QP
11	1.204	25.52	46.00	-20.48	25.25	0.09	0.18	Average
12	1.204	29.60	56.00	-26.40	29.33	0.09	0.18	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Neutral		

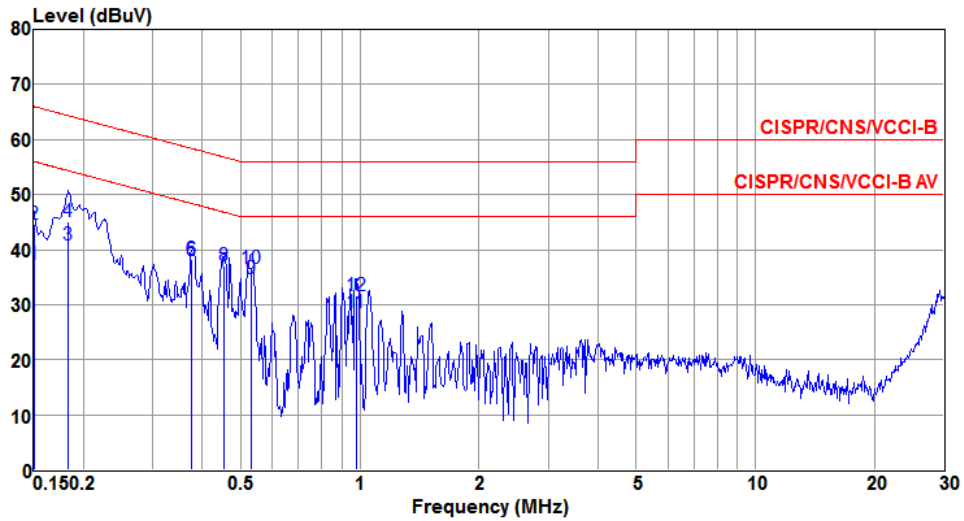

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	37.41	56.00	-18.59	37.26	0.07	0.08	Average
2	0.150	44.51	66.00	-21.49	44.36	0.07	0.08	QP
3	0.183	40.80	54.33	-13.53	40.64	0.07	0.09	Average
4	0.183	45.19	64.33	-19.14	45.03	0.07	0.09	QP
5	0.376	37.90	48.36	-10.46	37.72	0.07	0.11	Average
6	0.376	38.33	58.36	-20.03	38.15	0.07	0.11	QP
7	0.453	36.06	46.83	-10.77	35.87	0.07	0.12	Average
8	0.453	37.01	56.83	-19.82	36.82	0.07	0.12	QP
9	0.529	34.60	46.00	-11.40	34.40	0.07	0.13	Average
10	0.529	36.54	56.00	-19.46	36.34	0.07	0.13	QP
11	0.977	28.49	46.00	-17.51	28.25	0.08	0.16	Average
12	0.977	31.57	56.00	-24.43	31.33	0.08	0.16	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1 MHz, Video bandwidth = 3 MHz.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.


### 3.2.3 Test Setup




### 3.2.4 Test Result of 6dB and Occupied Bandwidth

#### Non-beamforming mode

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	6dB Bandwidth (MHz)				Limit (kHz)
			Chain 0	Chain 1	Chain 2	Chain 3	
11b	3	2412	7.83	8.52	8.58	---	500
11b	3	2437	8.58	8.58	8.52	---	500
11b	3	2462	8.58	8.12	8.52	---	500
11g	3	2412	16.35	16.35	16.35	---	500
11g	3	2437	16.35	16.35	16.35	---	500
11g	3	2462	16.35	16.35	16.35	---	500
HT20	3	2412	17.33	17.62	17.62	---	500
HT20	3	2437	17.57	17.62	17.28	---	500
HT20	3	2462	17.57	17.62	17.57	---	500
HT40	3	2422	35.94	36.41	36.41	---	500
HT40	3	2437	36.06	36.41	35.83	---	500
HT40	3	2452	35.94	35.83	35.83	---	500

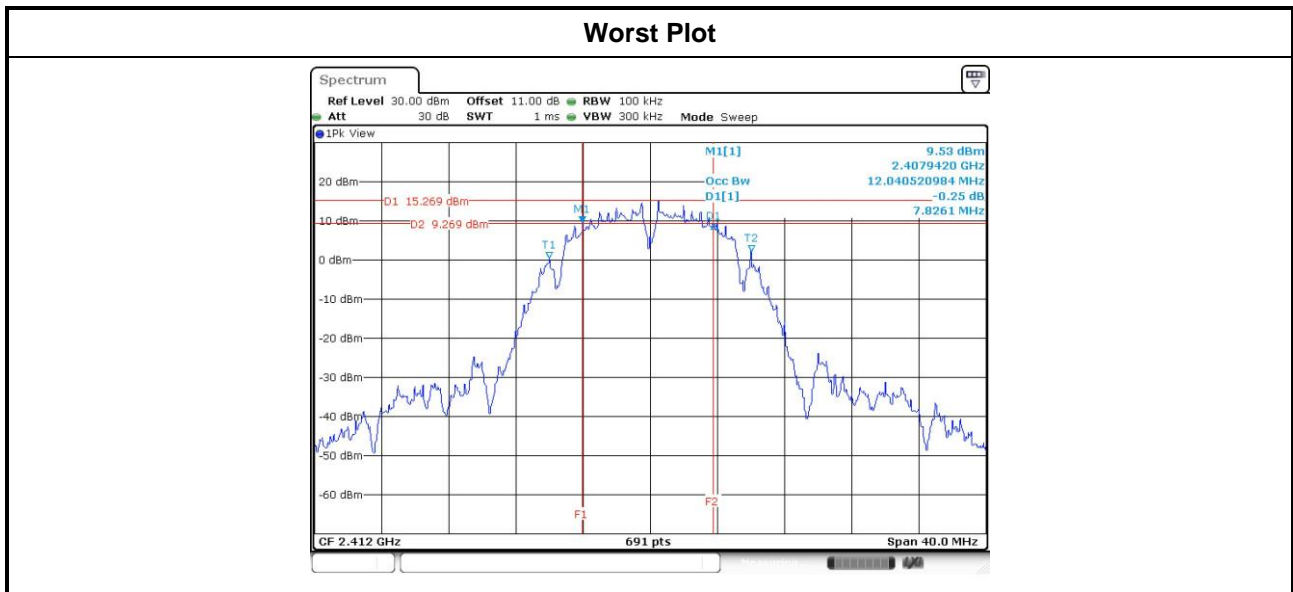


Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Occupied Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3
11b	3	2412	11.91	11.98	11.95	---
11b	3	2437	11.89	12.04	11.97	---
11b	3	2462	11.93	12.05	12.00	---
11g	3	2412	16.83	16.77	16.74	---
11g	3	2437	16.90	16.95	16.88	---
11g	3	2462	16.81	16.77	16.69	---
HT20	3	2412	17.87	17.77	17.80	---
HT20	3	2437	17.91	17.93	17.89	---
HT20	3	2462	17.88	17.75	17.77	---
HT40	3	2422	36.46	36.56	36.64	---
HT40	3	2437	36.46	36.50	36.56	---
HT40	3	2452	36.48	36.42	36.44	---

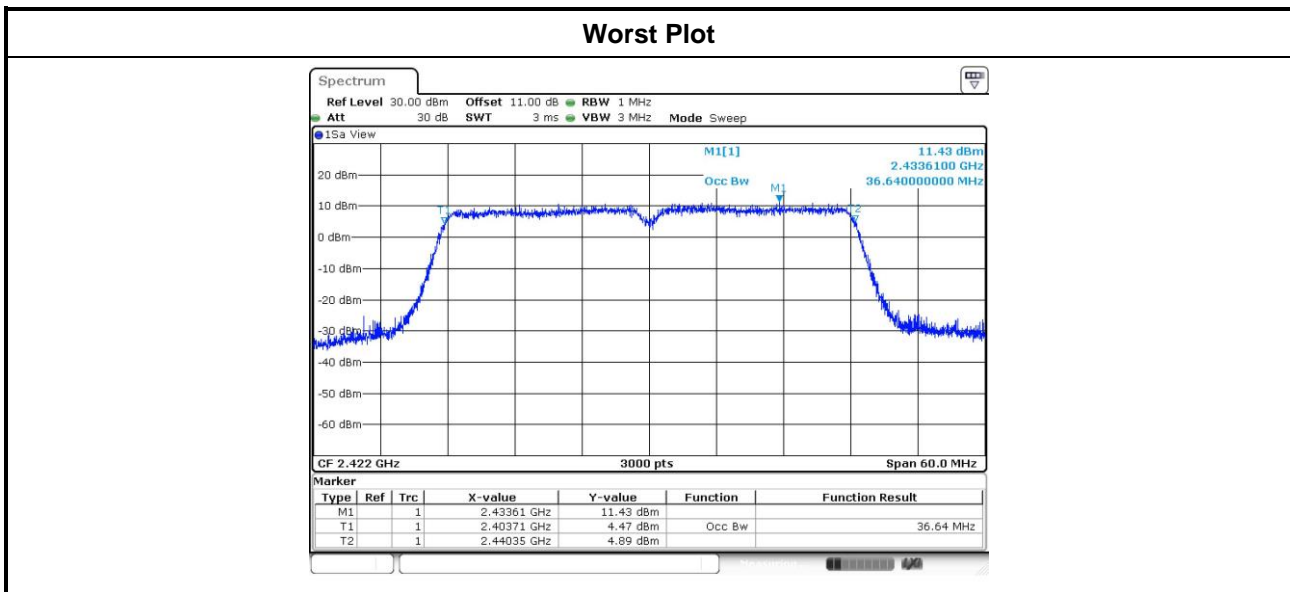


### Beamforming mode

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	6dB Bandwidth (MHz)				Limit (kHz)
			Chain 0	Chain 1	Chain 2	Chain 3	
HT20	3	2412	17.16	17.33	16.99	---	500
HT20	3	2437	16.00	15.71	17.28	---	500
HT20	3	2462	17.22	17.16	15.07	---	500
HT40	3	2422	33.86	35.01	35.01	---	500
HT40	3	2437	32.70	32.46	35.13	---	500
HT40	3	2452	35.01	35.13	35.13	---	500

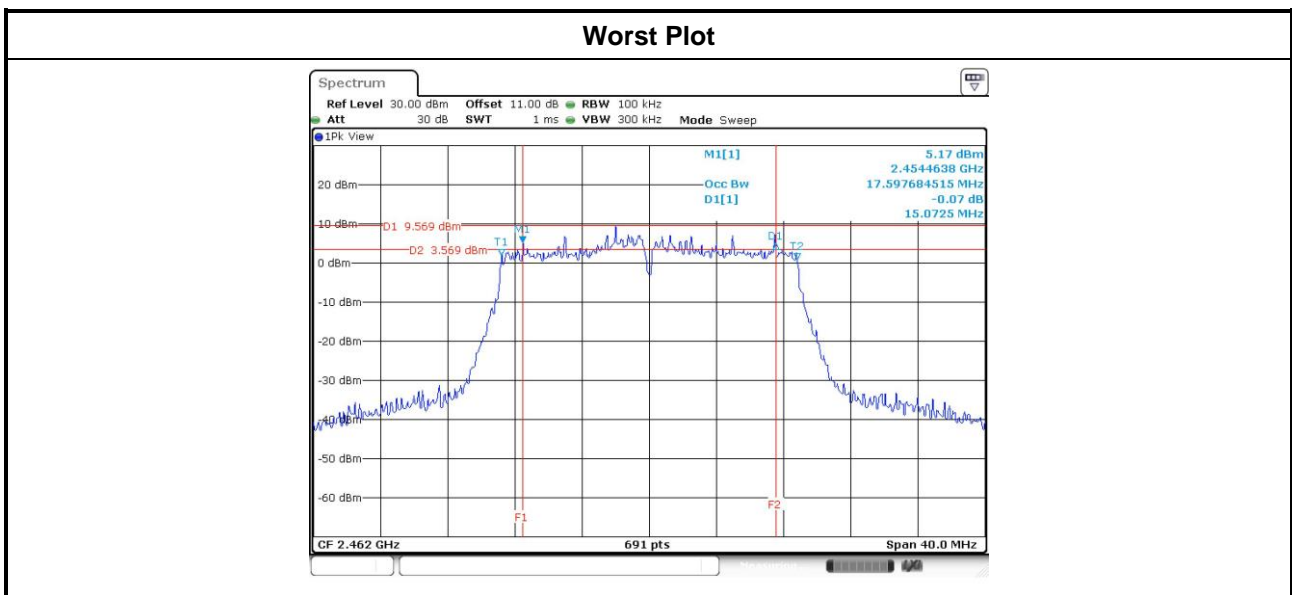

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Occupied Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3
HT20	3	2412	17.76	17.83	17.81	---
HT20	3	2437	17.82	17.84	17.85	---
HT20	3	2462	17.79	17.79	17.79	---
HT40	3	2422	36.36	36.54	36.58	---
HT40	3	2437	36.46	36.50	36.46	---
HT40	3	2452	36.34	36.38	36.38	---

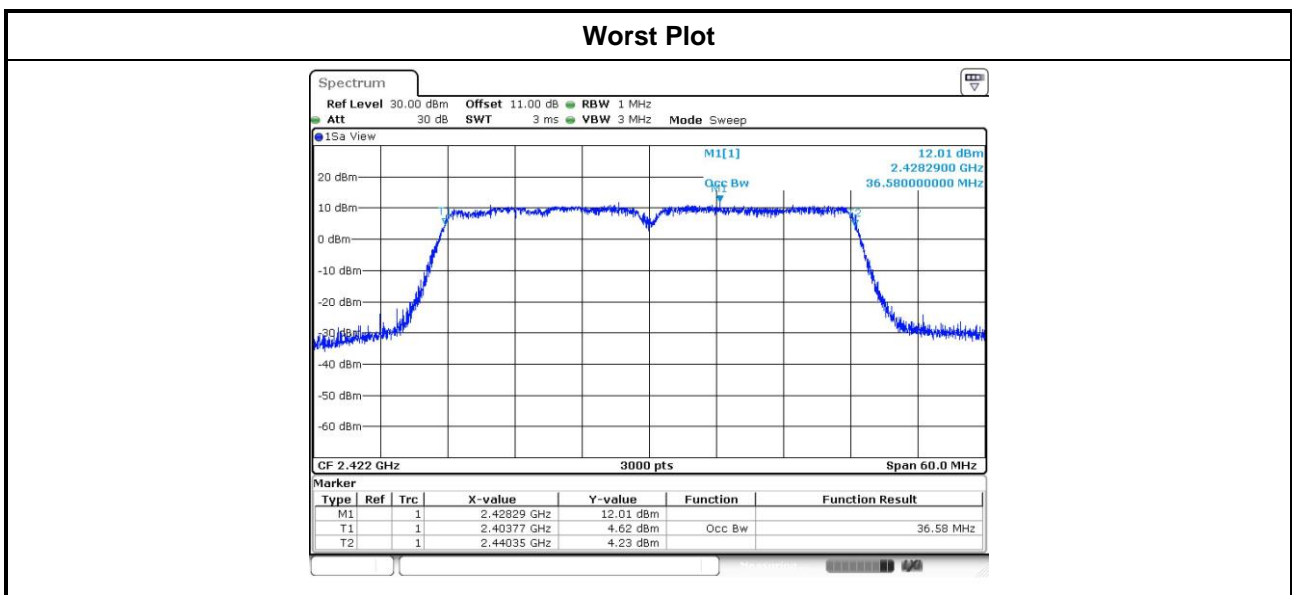

## 3.3 RF Output Power

### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.


- Antenna gain  $\leq$  6dBi, no any corresponding reduction is in output power limit.
- Antenna gain  $>$  6dBi
  - Non Fixed, point to point operations.  
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
  - Fixed, point to point operations  
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

### 3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
  - Spectrum analyzer**
    1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
    2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
    3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
  - Power meter**
    1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power
  - Power meter**
    1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.3.3 Test Setup



### 3.3.4 Test Result of Maximum Output Power

#### Non-beamforming mode

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted (average) output power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11b	3	2412	22.86	23.67	23.74	---	662.598	28.21	30.00
11b	3	2437	23.57	24.71	24.52	---	806.450	29.07	30.00
11b	3	2462	23.42	24.89	24.55	---	813.207	<b>29.10</b>	30.00
11g	3	2412	19.43	19.15	19.85	---	266.529	24.26	30.00
11g	3	2437	23.22	24.23	24.11	---	732.376	28.65	30.00
11g	3	2462	19.13	18.74	19.28	---	241.386	23.83	30.00
HT20	3	2412	18.24	17.94	18.82	---	205.119	23.12	30.00
HT20	3	2437	23.11	23.86	24.11	---	705.497	28.48	30.00
HT20	3	2462	17.89	17.48	18.19	---	183.411	22.63	30.00
HT40	3	2422	16.48	15.66	16.62	---	127.196	21.04	30.00
HT40	3	2437	18.58	18.33	18.83	---	216.571	23.36	30.00
HT40	3	2452	15.74	14.85	15.85	---	106.506	20.27	30.00

#### Beamforming mode

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted (average) output power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
HT20	3	2412	18.41	17.89	18.58	---	202.971	23.07	27.62
HT20	3	2437	22.36	22.82	22.96	---	561.309	<b>27.49</b>	27.62
HT20	3	2462	18.44	17.91	18.45	---	201.609	23.05	27.62
HT40	3	2422	16.71	16.16	16.58	---	133.685	21.26	27.62
HT40	3	2437	19.03	18.52	19.09	---	232.201	23.66	27.62
HT40	3	2452	16.11	15.21	16.01	---	113.924	20.57	27.62

**Note:**

1. Directional gain =  $10 * \log((10^{3.29/20} + 10^{3.86/20} + 10^{3.66/20})^2 / 3) = 8.38 \text{ dBi} > 6 \text{ dBi}$

Limit shall be reduced to  $30 \text{ dBm} - (8.38 \text{ dBi} - 6 \text{ dBi}) = 27.62 \text{ dBm}$ .

## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
  1. Set the RBW = 3kHz, VBW = 10kHz.
  2. Detector = Peak, Sweep time = auto couple.
  3. Trace mode = max hold, allow trace to fully stabilize.
  4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
  1. Set the RBW = 30kHz, VBW = 100 kHz.
  2. Detector = RMS, Sweep time = auto couple.
  3. Set the sweep time to:  $\geq 10 \times$  (number of measurement points in sweep)  $\times$  (maximum data rate per stream).
  4. Perform the measurement over a single sweep.
  5. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup






### 3.4.4 Test Result of Power Spectral Density

#### *Non-beamforming mode*

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Total Power Spectral Density (dBm/30kHz)	Limit (dBm/3kHz)
11b	3	2412	6.10	8.00
11b	3	2437	6.69	8.00
11b	3	2462	6.71	8.00
11g	3	2412	0.00	8.00
11g	3	2437	4.38	8.00
11g	3	2462	-0.14	8.00
HT20	3	2412	-2.05	8.00
HT20	3	2437	3.52	8.00
HT20	3	2462	-2.02	8.00
HT40	3	2422	-6.50	8.00
HT40	3	2437	-3.73	8.00
HT40	3	2452	-7.04	8.00


Note: Test result is bin-by-bin summing measured value of each TX port.

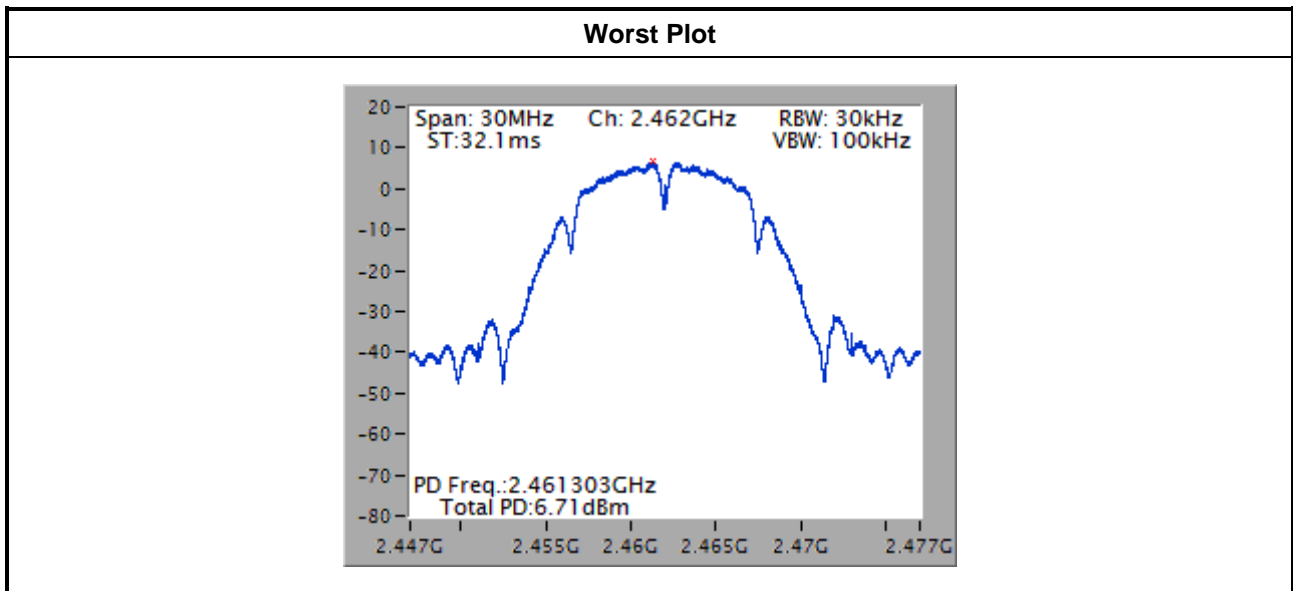

### Beamforming mode

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Total Power Spectral Density (dBm/30kHz)	Limit (dBm/3kHz)
HT20	3	2412	-2.05	8.00
HT20	3	2437	2.50	8.00
HT20	3	2462	-1.55	8.00
HT40	3	2422	-6.19	8.00
HT40	3	2437	-4.60	8.00
HT40	3	2452	-7.10	8.00

Note: Test result is bin-by-bin summing measured value of each TX port.

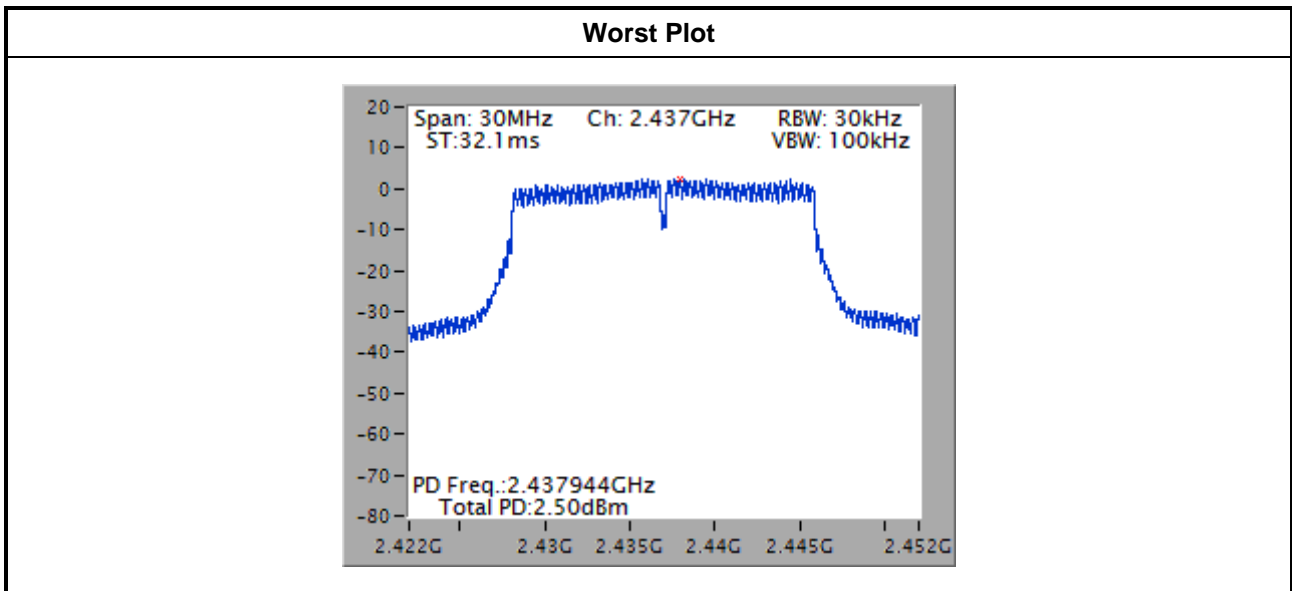

## 3.5 Unwanted Emissions into Restricted Frequency Bands

### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup

#### Radiated Emissions below 1 GHz

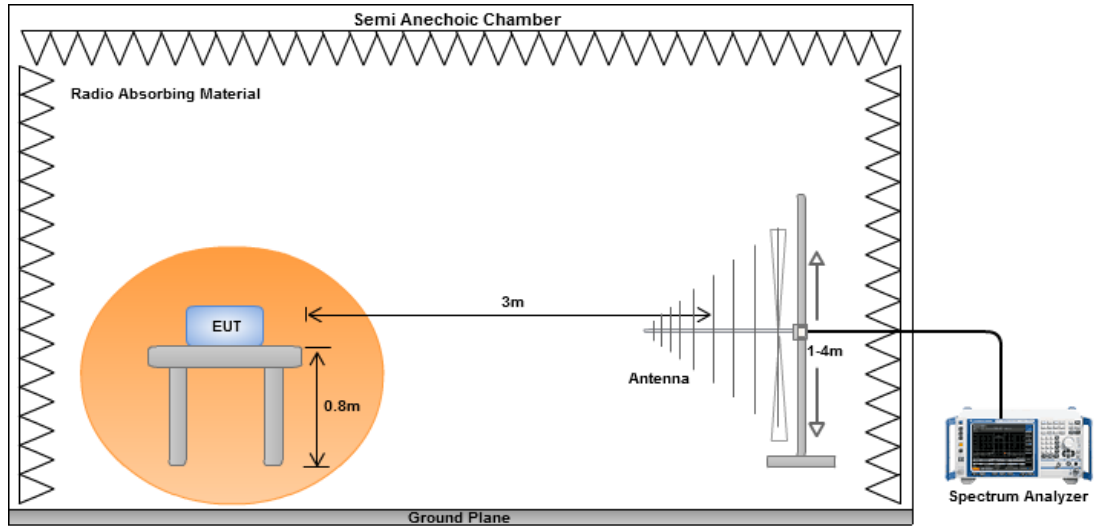

#### Radiated Emissions above 1 GHz

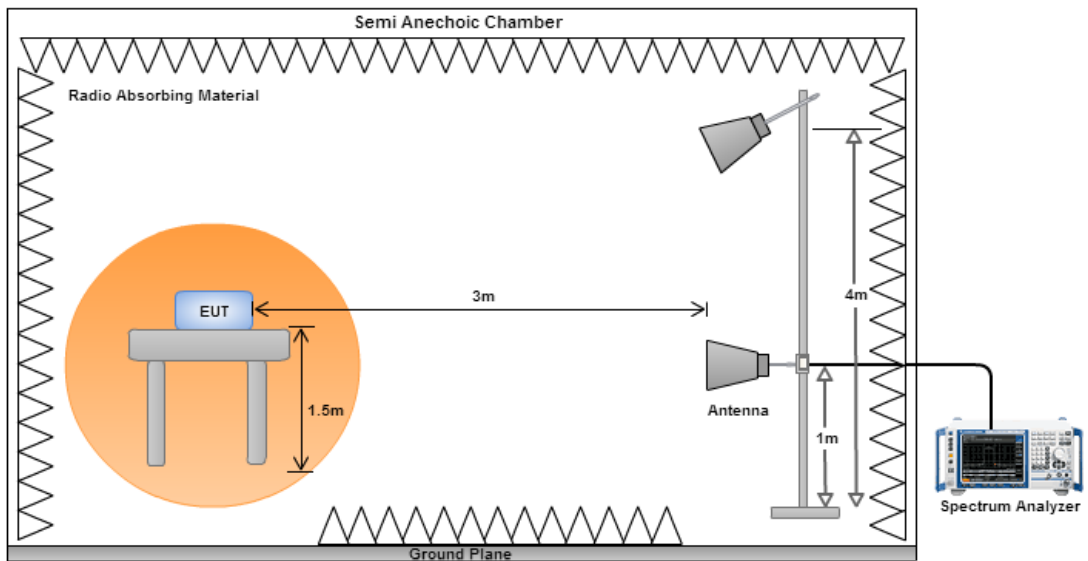


### Non-beamforming mode

#### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

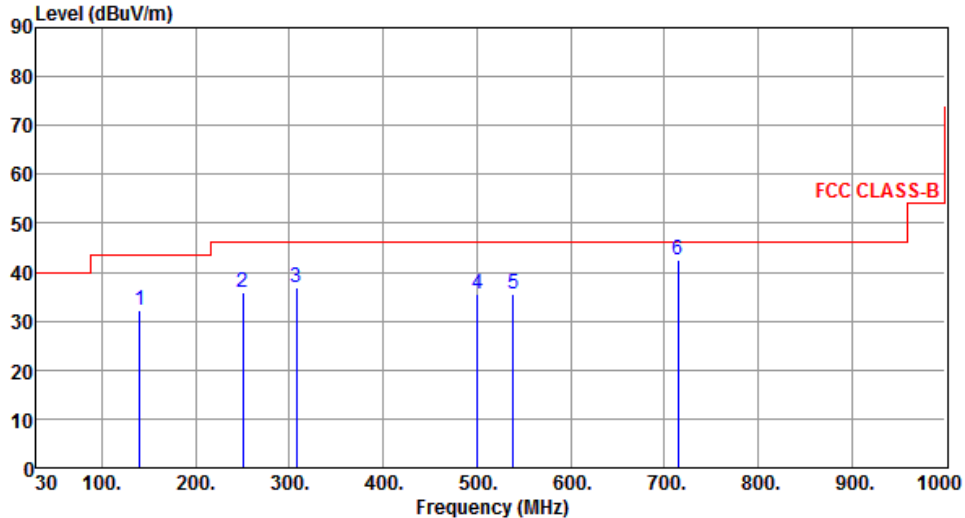


The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 300 MHz, 46 dBuV/m from 300 to 900 MHz, and 55 dBuV/m from 900 to 1000 MHz. Six blue vertical lines represent emission peaks labeled 1 through 6, with their respective frequencies and levels indicated in the table below.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	140.58	32.06	43.50	-11.44	49.47	-17.41	Peak	---	---
2	250.19	35.73	46.00	-10.27	53.59	-17.86	Peak	---	---
3	307.42	36.73	46.00	-9.27	52.63	-15.90	Peak	---	---
4	500.45	35.49	46.00	-10.51	47.20	-11.71	Peak	---	---
5	539.25	35.45	46.00	-10.55	46.34	-10.89	Peak	---	---
6	714.82	42.66	46.00	-3.34	50.60	-7.94	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

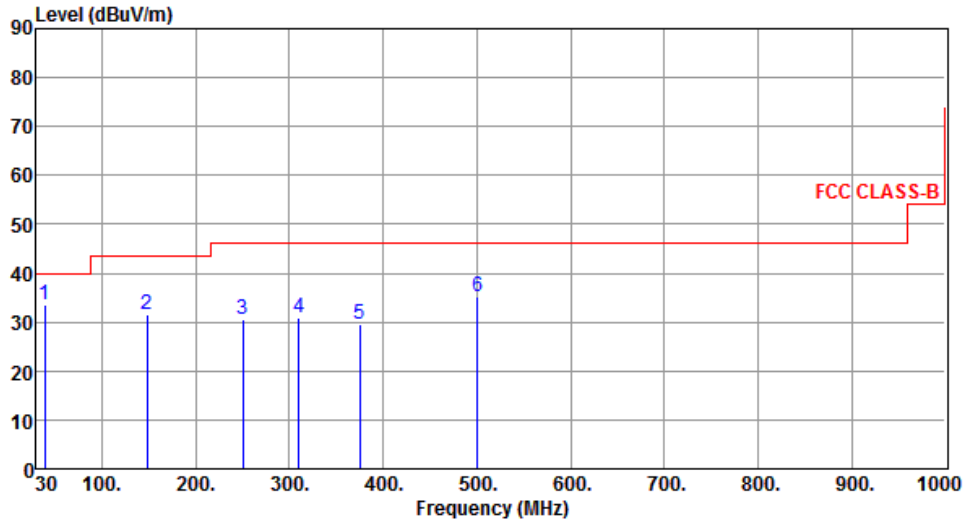

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	39.38	33.69	40.00	-6.31	50.96	-17.27	QP	100	0
2	148.34	31.53	43.50	-11.97	48.50	-16.97	Peak	---	---
3	250.19	30.65	46.00	-15.35	48.51	-17.86	Peak	---	---
4	310.33	30.75	46.00	-15.25	46.59	-15.84	Peak	---	---
5	375.32	29.69	46.00	-16.31	44.00	-14.31	Peak	---	---
6	500.45	35.27	46.00	-10.73	46.98	-11.71	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

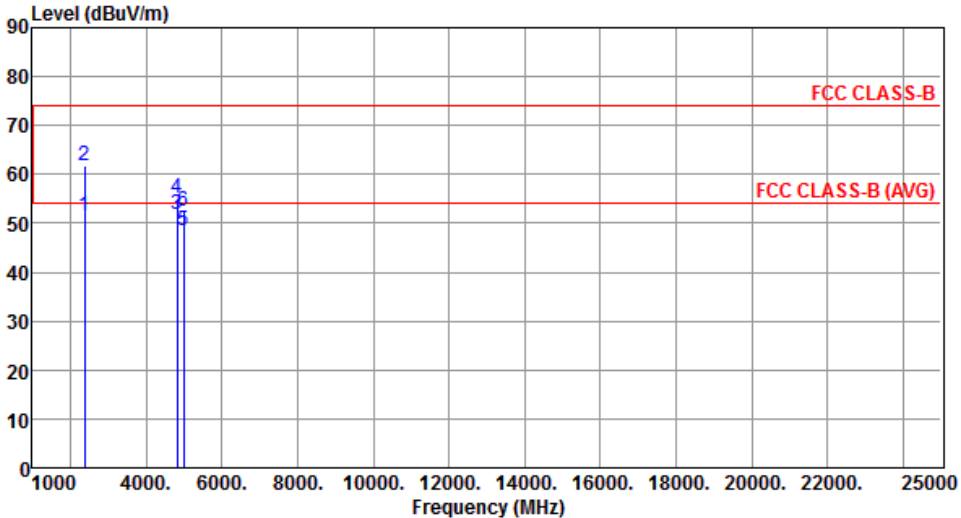Modulation	11b	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2387.00	51.45	54.00	-2.55	54.11	-2.66	Average	231	4
2	2387.00	61.63	74.00	-12.37	64.29	-2.66	Peak	231	4
3	4824.00	51.97	54.00	-2.03	47.00	4.97	Average	256	22
4	4824.00	55.12	74.00	-18.88	50.15	4.97	Peak	256	22
5	5000.00	48.54	54.00	-5.46	43.16	5.38	Average	254	166
6	5000.00	52.47	74.00	-21.53	47.09	5.38	Peak	254	166
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

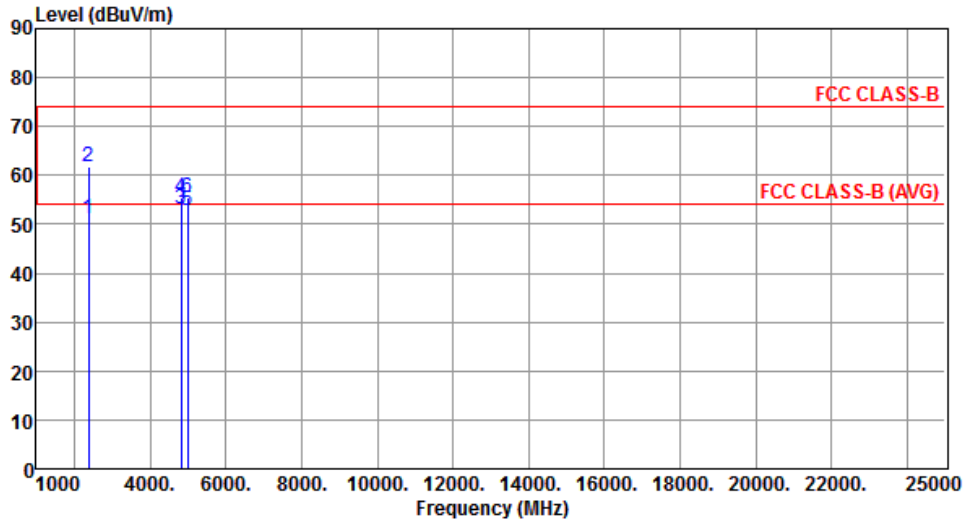

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2387.00	51.02	54.00	-2.98	53.68	-2.66	Average	233	343
2	2387.00	61.62	74.00	-12.38	64.28	-2.66	Peak	233	343
3	4824.00	52.98	54.00	-1.02	48.01	4.97	Average	227	124
4	4824.00	55.60	74.00	-18.40	50.63	4.97	Peak	227	124
5	5000.00	52.93	54.00	-1.07	47.55	5.38	Average	266	180
6	5000.00	55.31	74.00	-18.69	49.93	5.38	Peak	266	180


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

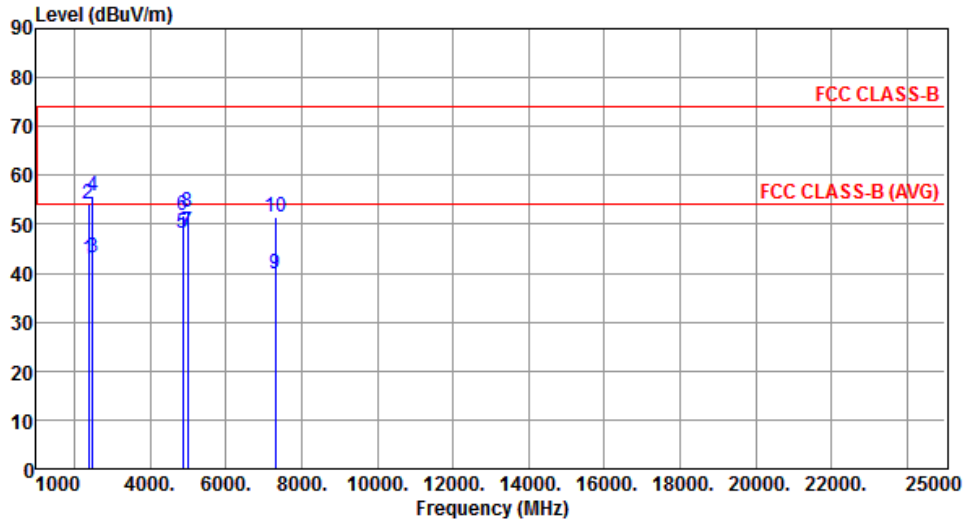


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.92	54.00	-11.08	45.57	-2.65	Average	308	348
2	2390.00	54.25	74.00	-19.75	56.90	-2.65	Peak	308	348
3	2483.50	43.25	54.00	-10.75	45.59	-2.34	Average	308	348
4	2483.50	55.65	74.00	-18.35	57.99	-2.34	Peak	308	348
5	4874.00	48.27	54.00	-5.73	43.19	5.08	Average	173	339
6	4874.00	51.67	74.00	-22.33	46.59	5.08	Peak	173	339
7	5000.00	48.43	54.00	-5.57	43.05	5.38	Average	254	166
8	5000.00	52.38	74.00	-21.62	47.00	5.38	Peak	254	166
9	7311.00	39.85	54.00	-14.15	29.74	10.11	Average	157	306
10	7311.00	51.40	74.00	-22.60	41.29	10.11	Peak	157	306

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

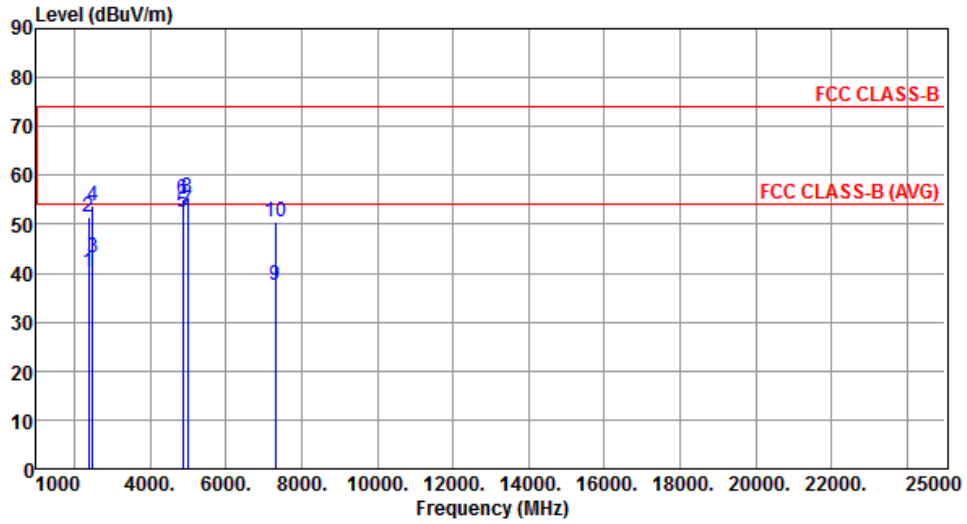


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	40.23	54.00	-13.77	42.88	-2.65	Average	325	307
2	2390.00	51.54	74.00	-22.46	54.19	-2.65	Peak	325	307
3	2483.50	43.16	54.00	-10.84	45.50	-2.34	Average	325	307
4	2483.50	53.78	74.00	-20.22	56.12	-2.34	Peak	325	307
5	4874.00	52.35	54.00	-1.65	47.27	5.08	Average	359	65
6	4874.00	55.15	74.00	-18.85	50.07	5.08	Peak	359	65
7	5000.00	52.95	54.00	-1.05	47.57	5.38	Average	264	182
8	5000.00	55.58	74.00	-18.42	50.20	5.38	Peak	264	182
9	7311.00	37.62	54.00	-16.38	27.51	10.11	Average	160	0
10	7311.00	50.57	74.00	-23.43	40.46	10.11	Peak	160	0

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

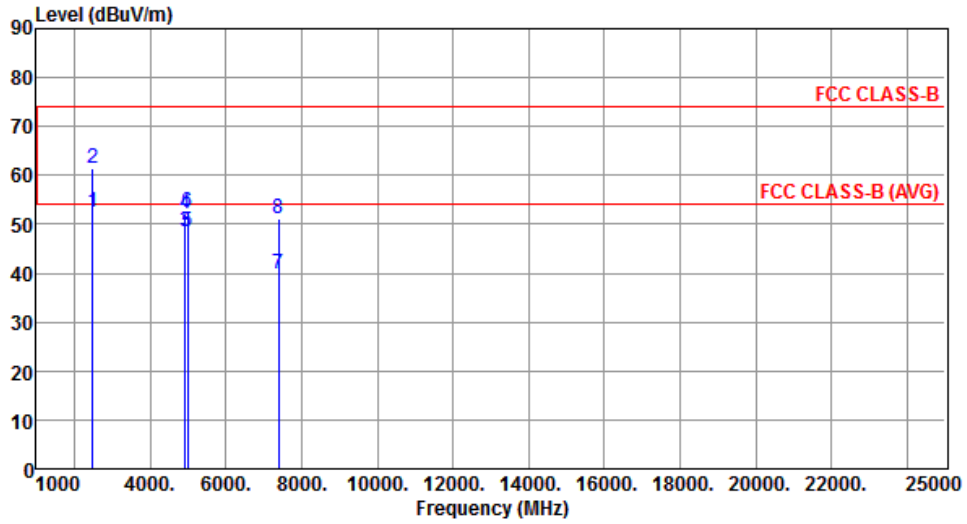


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2486.00	52.55	54.00	-1.45	54.88	-2.33	Average	286	350
2	2486.00	61.34	74.00	-12.66	63.67	-2.33	Peak	286	350
3	4924.00	48.65	54.00	-5.35	43.44	5.21	Average	178	352
4	4924.00	51.98	74.00	-22.02	46.77	5.21	Peak	178	352
5	5000.00	48.65	54.00	-5.35	43.27	5.38	Average	257	169
6	5000.00	52.53	74.00	-21.47	47.15	5.38	Peak	257	169
7	7386.00	39.74	54.00	-14.26	29.43	10.31	Average	158	344
8	7386.00	51.23	74.00	-22.77	40.92	10.31	Peak	158	344

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

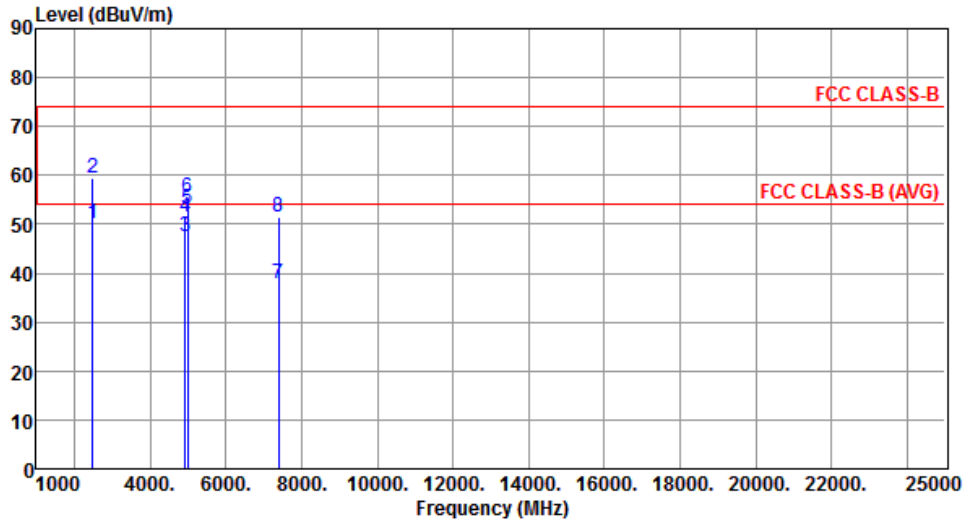


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2486.00	50.20	54.00	-3.80	52.53	-2.33	Average	320	315
2	2486.00	59.35	74.00	-14.65	61.68	-2.33	Peak	320	315
3	4924.00	47.62	54.00	-6.38	42.41	5.21	Average	371	81
4	4924.00	51.36	74.00	-22.64	46.15	5.21	Peak	371	81
5	5000.00	52.98	54.00	-1.02	47.60	5.38	Average	265	176
6	5000.00	55.48	74.00	-18.52	50.10	5.38	Peak	265	176
7	7386.00	37.80	54.00	-16.20	27.49	10.31	Average	358	60
8	7386.00	51.33	74.00	-22.67	41.02	10.31	Peak	358	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

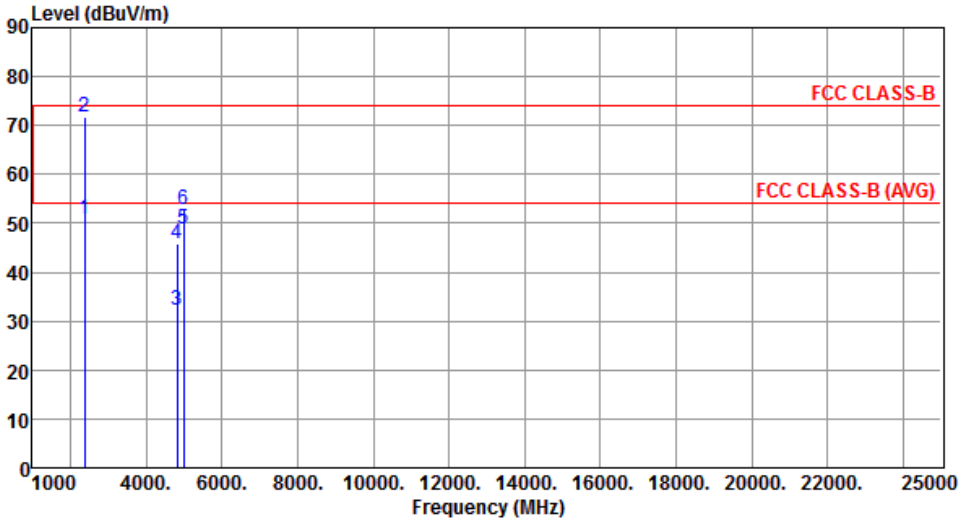Modulation	11g	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	50.92	54.00	-3.08	53.57	-2.65	Average	252	30
2	2390.00	71.85	74.00	-2.15	74.50	-2.65	Peak	252	30
3	4824.00	32.32	54.00	-21.68	27.35	4.97	Average	267	285
4	4824.00	45.72	74.00	-28.28	40.75	4.97	Peak	267	285
5	5000.00	48.75	54.00	-5.25	43.37	5.38	Average	248	165
6	5000.00	52.96	74.00	-21.04	47.58	5.38	Peak	248	165

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

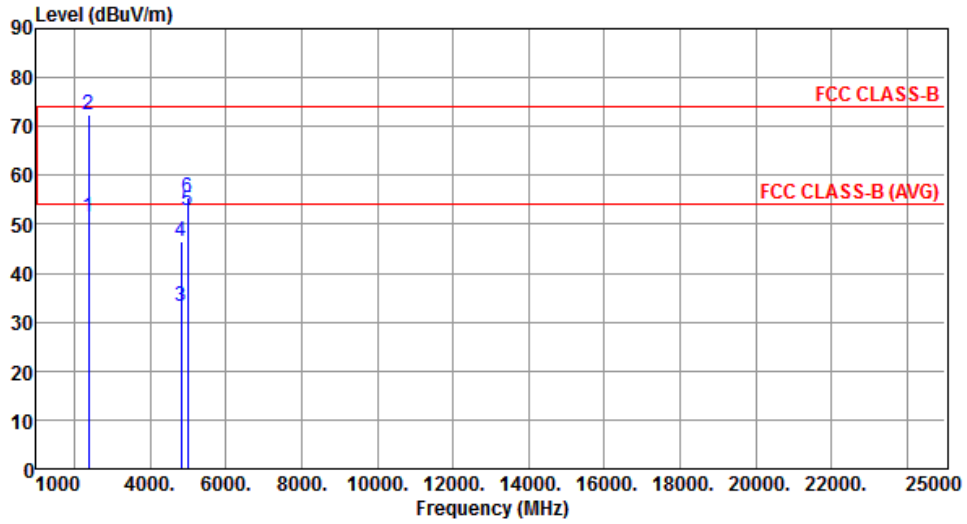


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.35	54.00	-2.65	54.00	-2.65	Average	253	19
2	2390.00	72.30	74.00	-1.70	74.95	-2.65	Peak	253	19
3	4824.00	33.36	54.00	-20.64	28.39	4.97	Average	270	76
4	4824.00	46.55	74.00	-27.45	41.58	4.97	Peak	270	76
5	5000.00	52.93	54.00	-1.07	47.55	5.38	Average	259	177
6	5000.00	55.52	74.00	-18.48	50.14	5.38	Peak	259	177

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

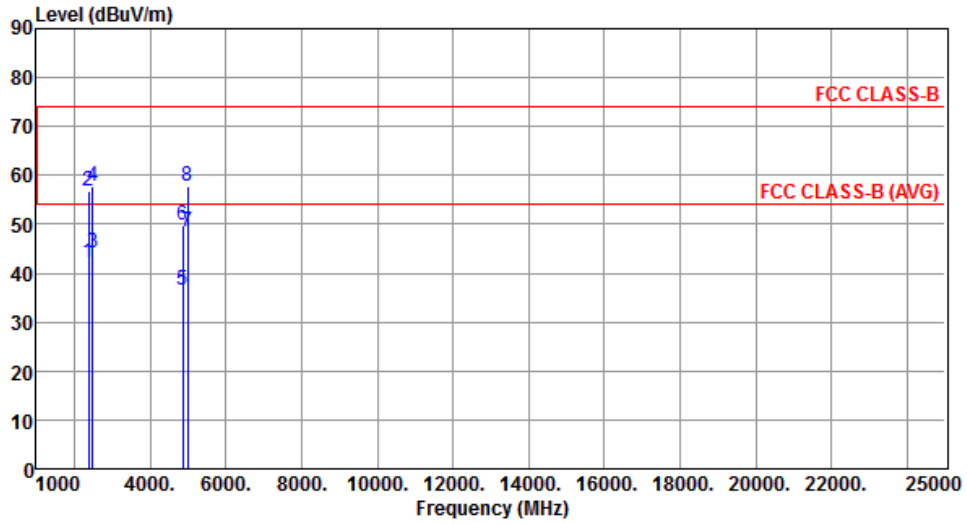


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.32	54.00	-11.68	44.97	-2.65	Average	169	0
2	2390.00	56.68	74.00	-17.32	59.33	-2.65	Peak	169	0
3	2483.50	44.10	54.00	-9.90	46.44	-2.34	Average	169	0
4	2483.50	57.65	74.00	-16.35	59.99	-2.34	Peak	169	0
5	4874.00	36.61	54.00	-17.39	31.53	5.08	Average	220	21
6	4874.00	49.74	74.00	-24.26	44.66	5.08	Peak	220	21
7	5000.00	48.42	54.00	-5.58	43.04	5.38	Average	251	163
8	5000.00	57.83	74.00	-16.17	52.45	5.38	Peak	251	163

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

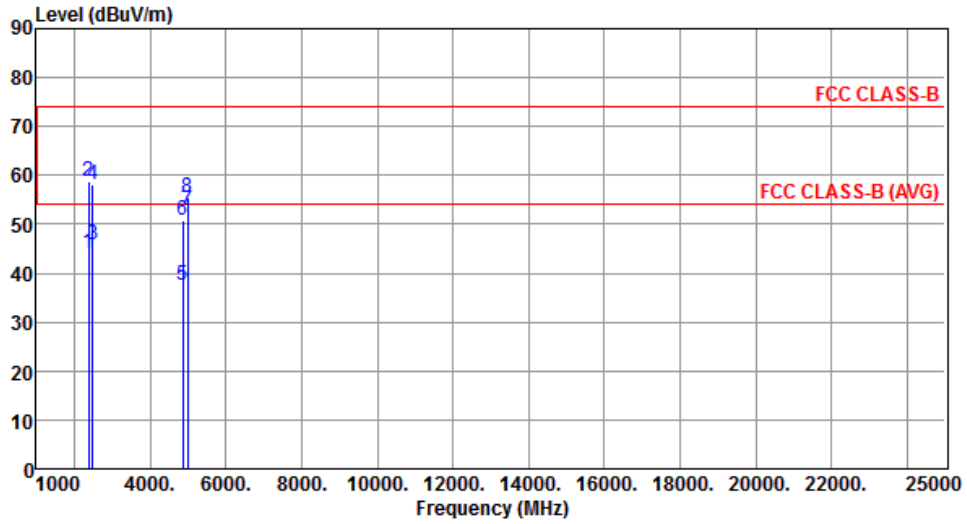

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	44.15	54.00	-9.85	46.80	-2.65	Average	170	351
2	2390.00	58.81	74.00	-15.19	61.46	-2.65	Peak	170	351
3	2483.50	45.98	54.00	-8.02	48.32	-2.34	Average	151	5
4	2483.50	58.21	74.00	-15.79	60.55	-2.34	Peak	151	5
5	4874.00	37.65	54.00	-16.35	32.57	5.08	Average	271	55
6	4874.00	50.74	74.00	-23.26	45.66	5.08	Peak	271	55
7	5000.00	52.95	54.00	-1.05	47.57	5.38	Average	265	177
8	5000.00	55.32	74.00	-18.68	49.94	5.38	Peak	265	177


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

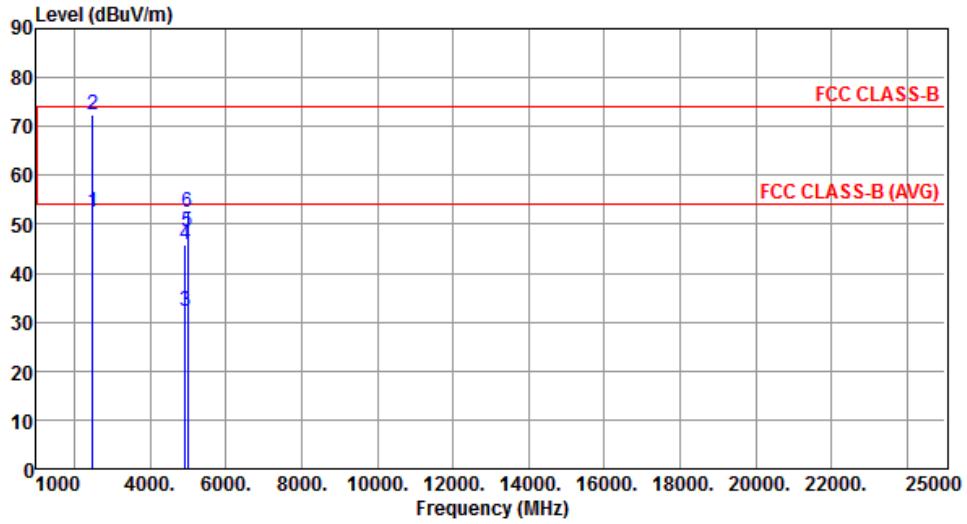


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.34	54.00	-1.66	54.68	-2.34	Average	247	0
2	2483.50	72.44	74.00	-1.56	74.78	-2.34	Peak	247	0
3	4924.00	32.35	54.00	-21.65	27.14	5.21	Average	258	326
4	4924.00	45.89	74.00	-28.11	40.68	5.21	Peak	258	326
5	5000.00	48.42	54.00	-5.58	43.04	5.38	Average	257	169
6	5000.00	52.42	74.00	-21.58	47.04	5.38	Peak	257	169

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

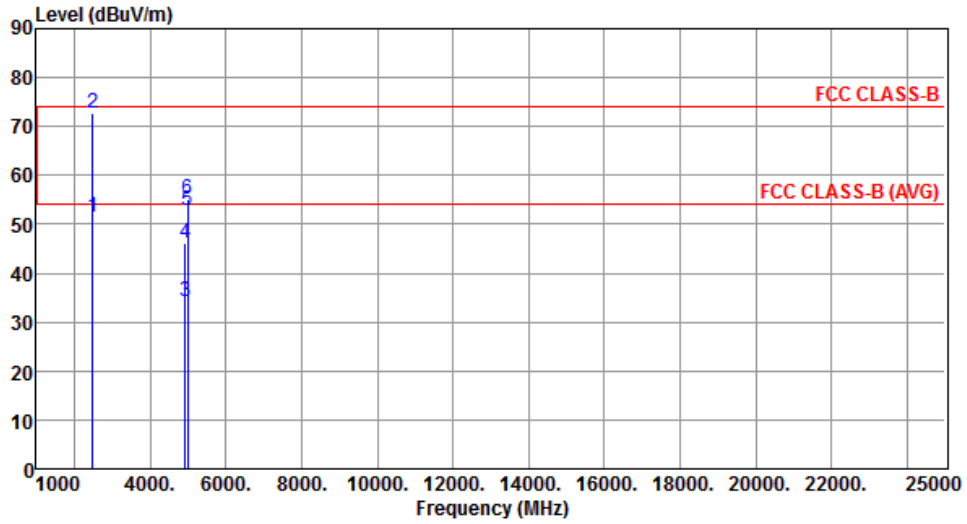


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	51.34	54.00	-2.66	53.68	-2.34	Average	182	347
2	2483.50	72.84	74.00	-1.16	75.18	-2.34	Peak	182	347
3	4924.00	34.08	54.00	-19.92	28.87	5.21	Average	269	88
4	4924.00	46.02	74.00	-27.98	40.81	5.21	Peak	269	88
5	5000.00	52.94	54.00	-1.06	47.56	5.38	Average	269	182
6	5000.00	55.29	74.00	-18.71	49.91	5.38	Peak	269	182

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

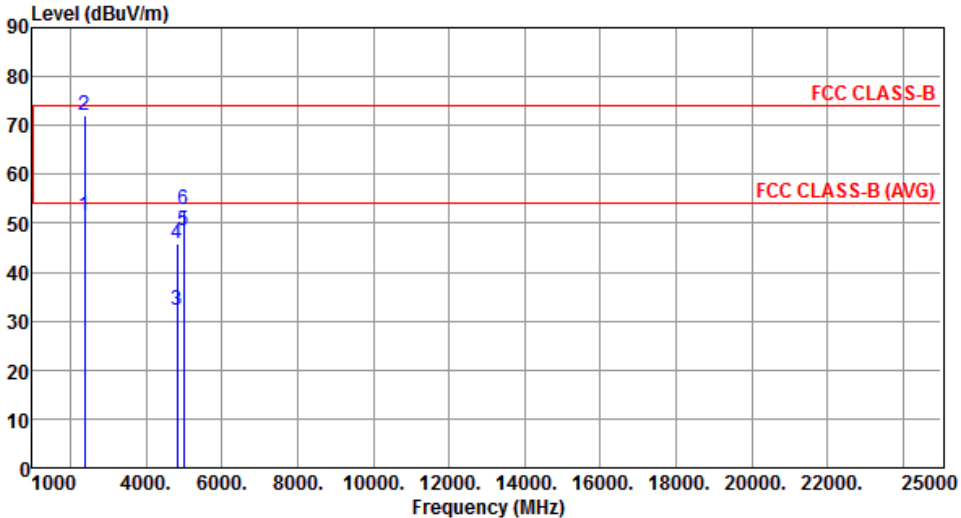Modulation	HT20	Test Freq. (MHz)	2412																																																																													
Polarization	Horizontal																																																																															
																																																																																
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>51.32</td> <td>54.00</td> <td>-2.68</td> <td>53.97</td> <td>-2.65</td> <td>Average</td> <td>258 331</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>71.93</td> <td>74.00</td> <td>-2.07</td> <td>74.58</td> <td>-2.65</td> <td>Peak</td> <td>258 331</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>32.18</td> <td>54.00</td> <td>-21.82</td> <td>27.21</td> <td>4.97</td> <td>Average</td> <td>260 39</td> </tr> <tr> <td>4</td> <td>4824.00</td> <td>45.74</td> <td>74.00</td> <td>-28.26</td> <td>40.77</td> <td>4.97</td> <td>Peak</td> <td>260 39</td> </tr> <tr> <td>5</td> <td>5000.00</td> <td>48.61</td> <td>54.00</td> <td>-5.39</td> <td>43.23</td> <td>5.38</td> <td>Average</td> <td>248 163</td> </tr> <tr> <td>6</td> <td>5000.00</td> <td>52.67</td> <td>74.00</td> <td>-21.33</td> <td>47.29</td> <td>5.38</td> <td>Peak</td> <td>248 163</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	2390.00	51.32	54.00	-2.68	53.97	-2.65	Average	258 331	2	2390.00	71.93	74.00	-2.07	74.58	-2.65	Peak	258 331	3	4824.00	32.18	54.00	-21.82	27.21	4.97	Average	260 39	4	4824.00	45.74	74.00	-28.26	40.77	4.97	Peak	260 39	5	5000.00	48.61	54.00	-5.39	43.23	5.38	Average	248 163	6	5000.00	52.67	74.00	-21.33	47.29	5.38	Peak	248 163							
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																								
1	2390.00	51.32	54.00	-2.68	53.97	-2.65	Average	258 331																																																																								
2	2390.00	71.93	74.00	-2.07	74.58	-2.65	Peak	258 331																																																																								
3	4824.00	32.18	54.00	-21.82	27.21	4.97	Average	260 39																																																																								
4	4824.00	45.74	74.00	-28.26	40.77	4.97	Peak	260 39																																																																								
5	5000.00	48.61	54.00	-5.39	43.23	5.38	Average	248 163																																																																								
6	5000.00	52.67	74.00	-21.33	47.29	5.38	Peak	248 163																																																																								
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																																

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

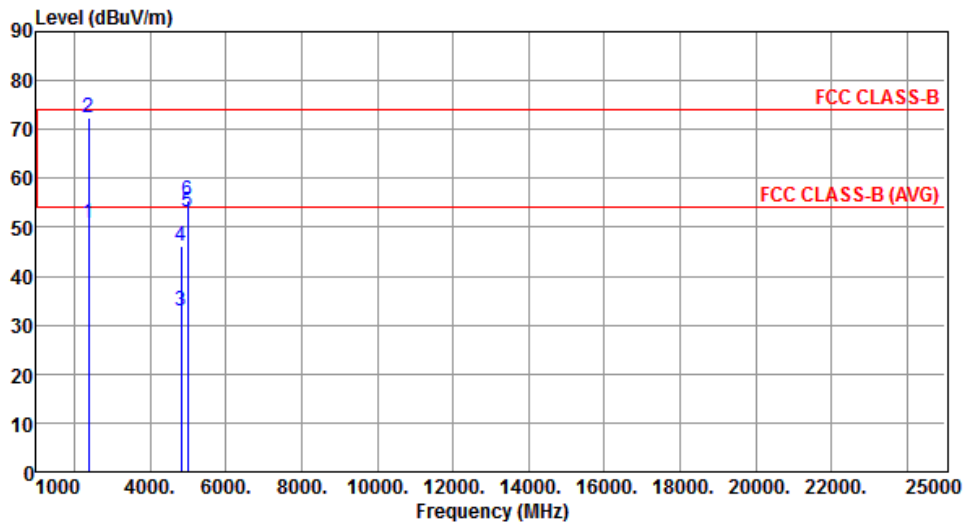


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	50.66	54.00	-3.34	53.31	-2.65	Average	252	353
2	2390.00	72.48	74.00	-1.52	75.13	-2.65	Peak	252	353
3	4824.00	32.98	54.00	-21.02	28.01	4.97	Average	270	83
4	4824.00	46.19	74.00	-27.81	41.22	4.97	Peak	270	83
5	5000.00	52.98	54.00	-1.02	47.60	5.38	Average	261	189
6	5000.00	55.42	74.00	-18.58	50.04	5.38	Peak	261	189

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

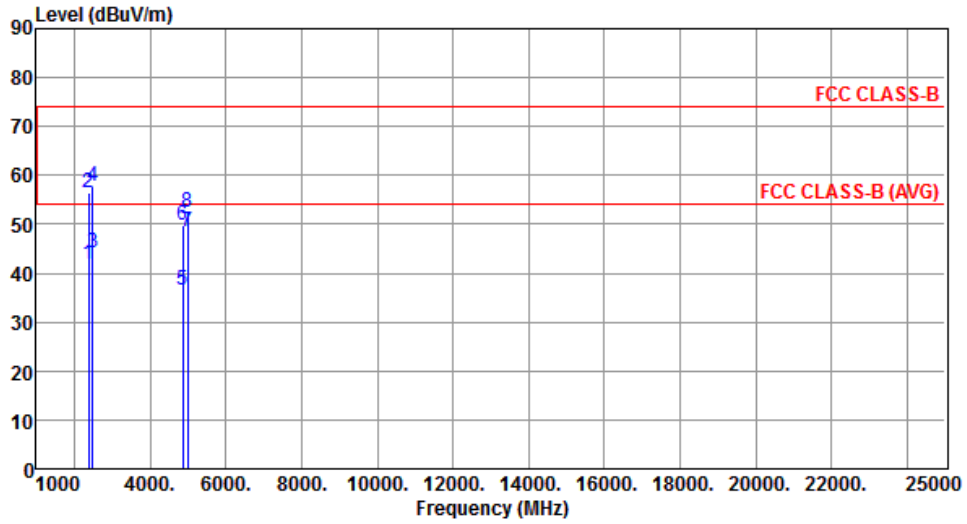


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.01	54.00	-11.99	44.66	-2.65	Average	172	3
2	2390.00	56.55	74.00	-17.45	59.20	-2.65	Peak	172	3
3	2483.50	44.32	54.00	-9.68	46.66	-2.34	Average	172	3
4	2483.50	57.73	74.00	-16.27	60.07	-2.34	Peak	172	3
5	4874.00	36.52	54.00	-17.48	31.44	5.08	Average	256	92
6	4874.00	49.79	74.00	-24.21	44.71	5.08	Peak	256	92
7	5000.00	48.51	54.00	-5.49	43.13	5.38	Average	247	174
8	5000.00	52.53	74.00	-21.47	47.15	5.38	Peak	247	174

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

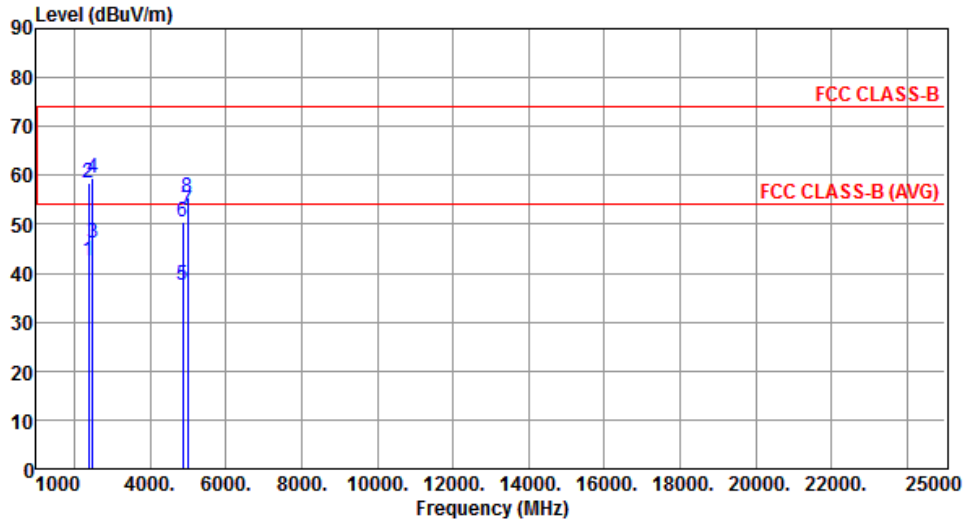


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.52	54.00	-11.48	45.17	-2.65	Average	159	337
2	2390.00	58.49	74.00	-15.51	61.14	-2.65	Peak	159	337
3	2483.50	46.12	54.00	-7.88	48.46	-2.34	Average	159	337
4	2483.50	59.56	74.00	-14.44	61.90	-2.34	Peak	159	337
5	4874.00	37.54	54.00	-16.46	32.46	5.08	Average	159	337
6	4874.00	50.63	74.00	-23.37	45.55	5.08	Peak	159	337
7	5000.00	52.96	54.00	-1.04	47.58	5.38	Average	265	173
8	5000.00	55.44	74.00	-18.56	50.06	5.38	Peak	265	173

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

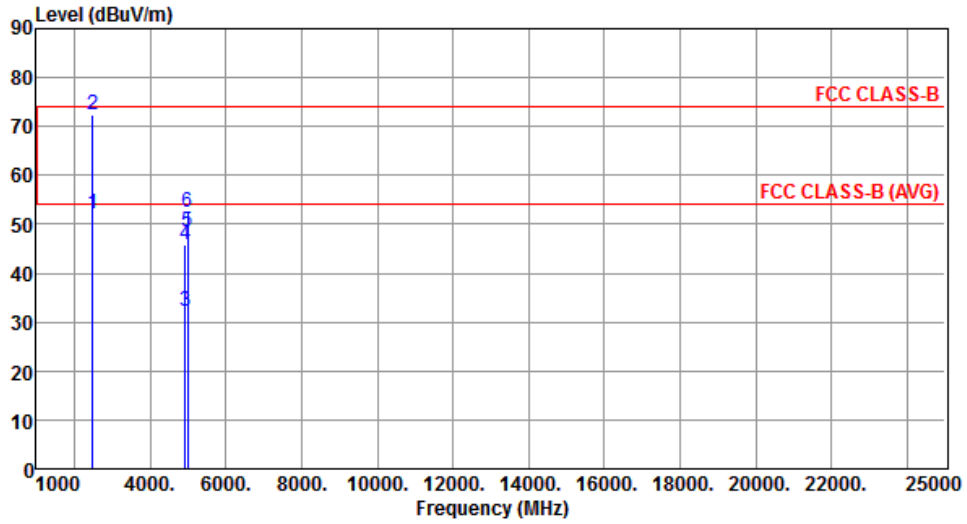


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.02	54.00	-1.98	54.36	-2.34	Average	225	351
2	2483.50	72.36	74.00	-1.64	74.70	-2.34	Peak	225	351
3	4924.00	32.31	54.00	-21.69	27.10	5.21	Average	256	101
4	4924.00	45.92	74.00	-28.08	40.71	5.21	Peak	256	101
5	5000.00	48.53	54.00	-5.47	43.15	5.38	Average	250	156
6	5000.00	52.54	74.00	-21.46	47.16	5.38	Peak	250	156

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

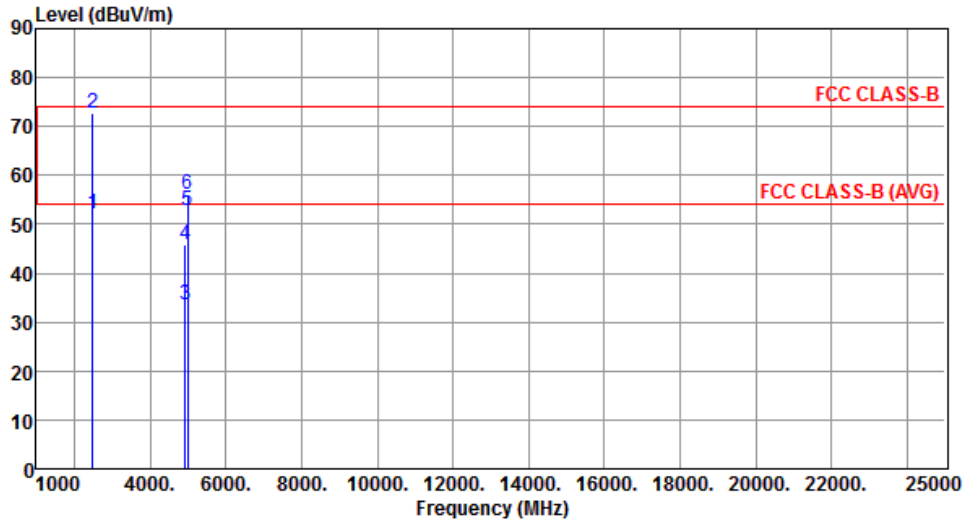

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.05	54.00	-1.95	54.39	-2.34	Average	175	335
2	2483.50	72.89	74.00	-1.11	75.23	-2.34	Peak	175	335
3	4924.00	33.63	54.00	-20.37	28.42	5.21	Average	225	36
4	4924.00	45.96	74.00	-28.04	40.75	5.21	Peak	225	36
5	5000.00	52.93	54.00	-1.07	47.55	5.38	Average	270	188
6	5000.00	55.98	74.00	-18.02	50.60	5.38	Peak	270	188


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



### 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

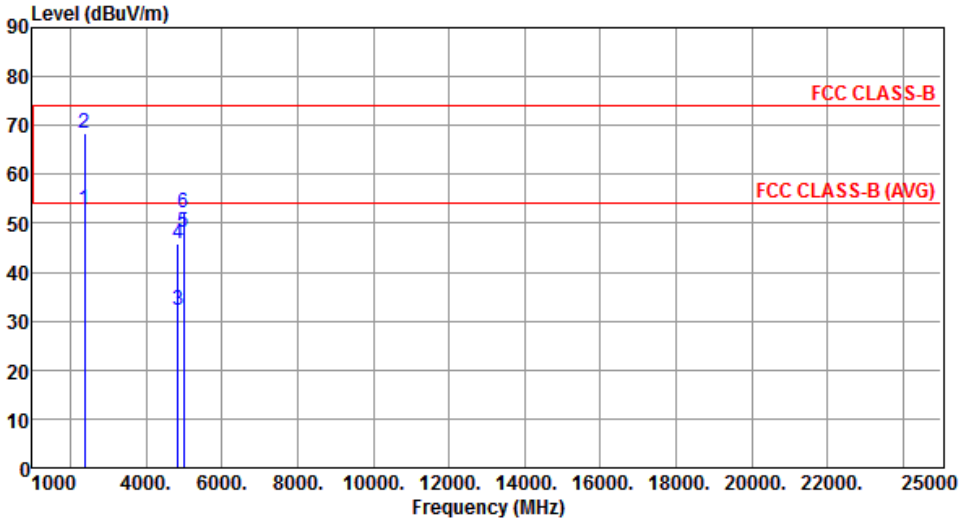Modulation	HT40	Test Freq. (MHz)	2422						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	52.68	54.00	-1.32	55.33	-2.65	Average	265	349
2	2390.00	68.36	74.00	-5.64	71.01	-2.65	Peak	265	349
3	4844.00	32.25	54.00	-21.75	27.23	5.02	Average	142	263
4	4844.00	45.91	74.00	-28.09	40.89	5.02	Peak	142	263
5	5000.00	48.32	54.00	-5.68	42.94	5.38	Average	239	158
6	5000.00	52.26	74.00	-21.74	46.88	5.38	Peak	239	158
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2422
<b>Polarization</b>	Vertical		

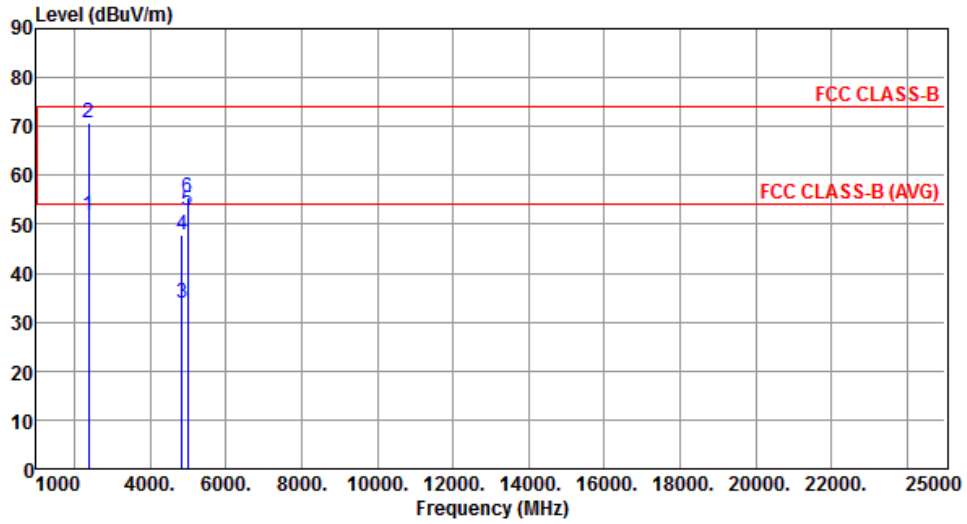


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.97	54.00	-2.03	54.62	-2.65	Average	171	353
2	2390.00	70.63	74.00	-3.37	73.28	-2.65	Peak	171	353
3	4844.00	33.83	54.00	-20.17	28.81	5.02	Average	132	251
4	4844.00	47.90	74.00	-26.10	42.88	5.02	Peak	132	251
5	5000.00	52.93	54.00	-1.07	47.55	5.38	Average	176	183
6	5000.00	55.46	74.00	-18.54	50.08	5.38	Peak	176	183

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

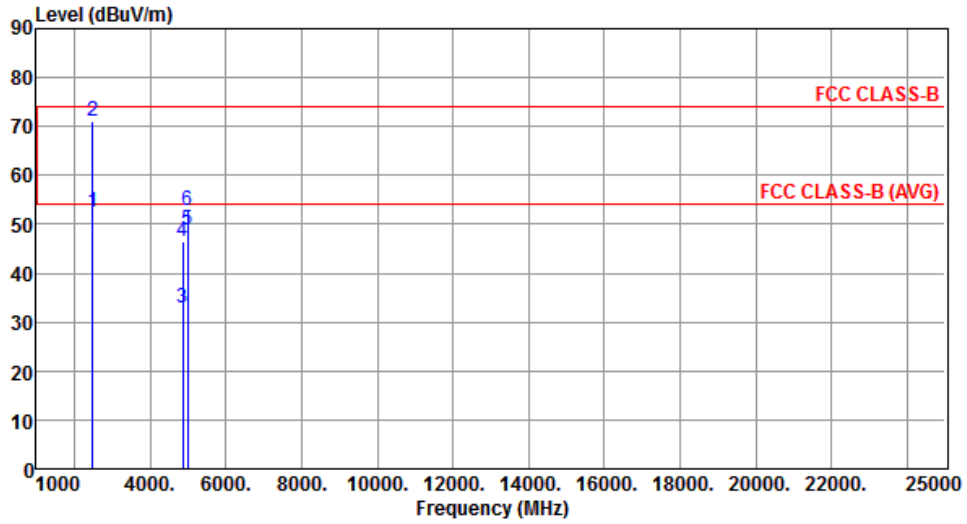


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.33	54.00	-1.67	54.67	-2.34	Average	258	358
2	2483.50	70.91	74.00	-3.09	73.25	-2.34	Peak	258	358
3	4874.00	32.77	54.00	-21.23	27.69	5.08	Average	146	322
4	4874.00	46.54	74.00	-27.46	41.46	5.08	Peak	146	322
5	5000.00	48.86	54.00	-5.14	43.48	5.38	Average	247	159
6	5000.00	52.96	74.00	-21.04	47.58	5.38	Peak	247	159

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

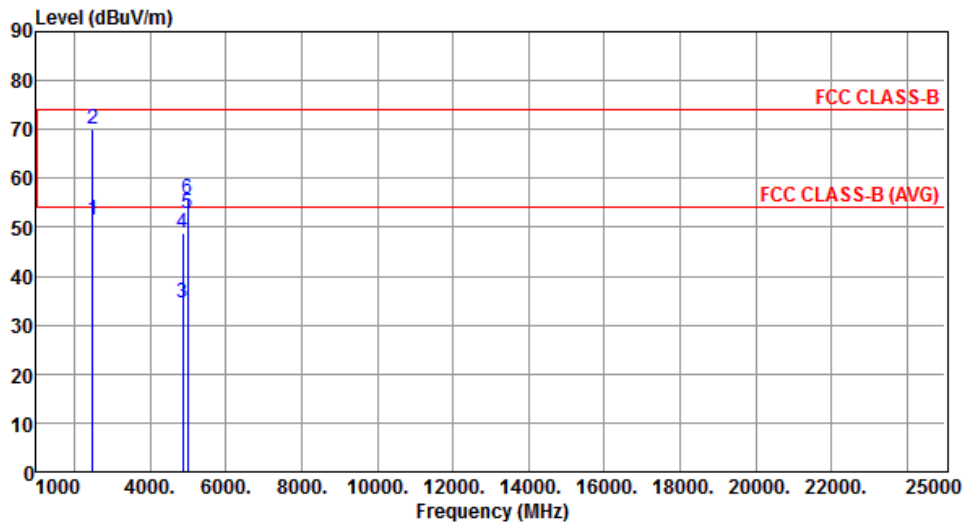


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	51.45	54.00	-2.55	53.79	-2.34	Average	180	344
2	2483.50	69.95	74.00	-4.05	72.29	-2.34	Peak	180	344
3	4874.00	34.41	54.00	-19.59	29.33	5.08	Average	225	329
4	4874.00	48.67	74.00	-25.33	43.59	5.08	Peak	225	329
5	5000.00	52.95	54.00	-1.05	47.57	5.38	Average	273	183
6	5000.00	55.63	74.00	-18.37	50.25	5.38	Peak	273	183

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Horizontal		

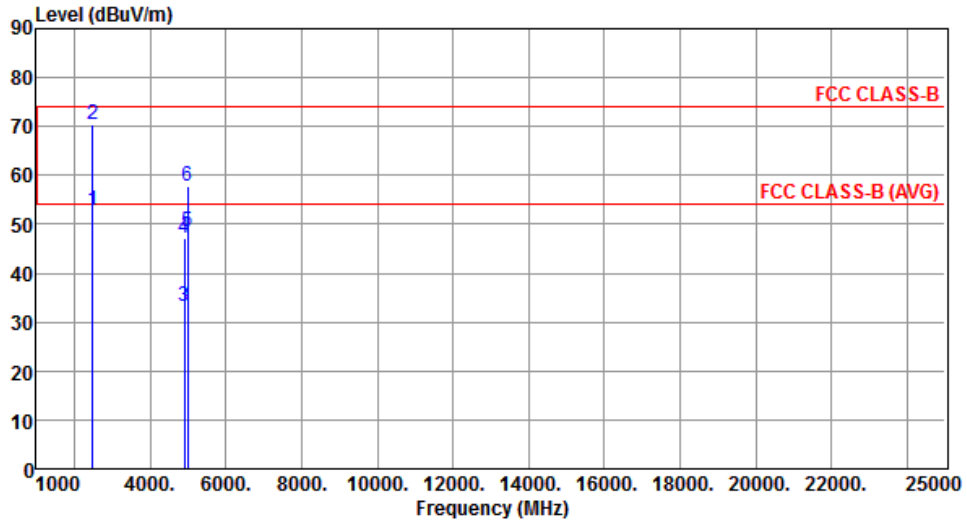


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.76	54.00	-1.24	55.10	-2.34	Average	222	9
2	2483.50	70.51	74.00	-3.49	72.85	-2.34	Peak	222	9
3	4904.00	33.37	54.00	-20.63	28.20	5.17	Average	154	332
4	4904.00	47.13	74.00	-26.87	41.96	5.17	Peak	154	332
5	5000.00	48.34	54.00	-5.66	42.96	5.38	Average	258	165
6	5000.00	57.75	74.00	-16.25	52.37	5.38	Peak	258	165

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Vertical		

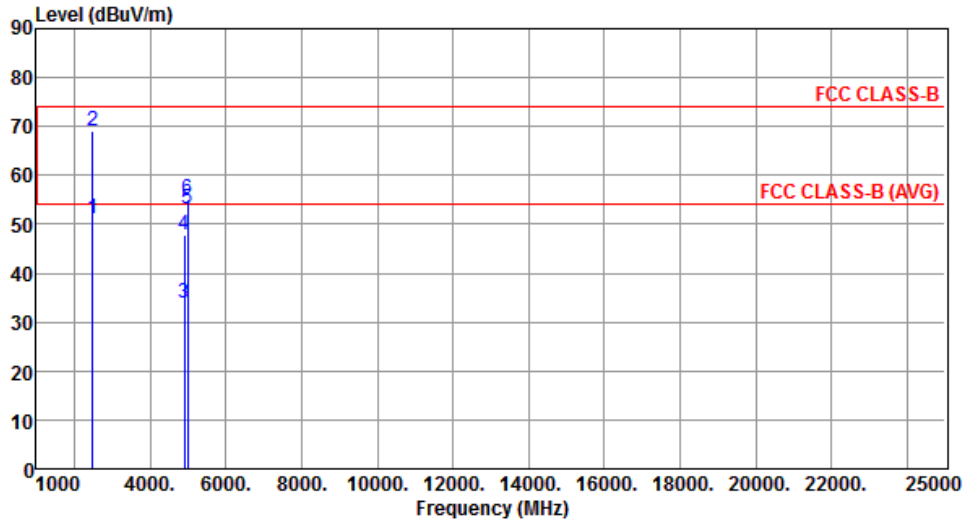

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	51.16	54.00	-2.84	53.50	-2.34	Average	164	335
2	2483.50	68.95	74.00	-5.05	71.29	-2.34	Peak	164	335
3	4904.00	34.03	54.00	-19.97	28.86	5.17	Average	196	236
4	4904.00	47.93	74.00	-26.07	42.76	5.17	Peak	196	236
5	5000.00	52.98	54.00	-1.02	47.60	5.38	Average	265	185
6	5000.00	55.15	74.00	-18.85	49.77	5.38	Peak	265	185


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## Beamforming mode

### 3.5.9 Transmitter Radiated Unwanted Emissions (Below 1GHz)

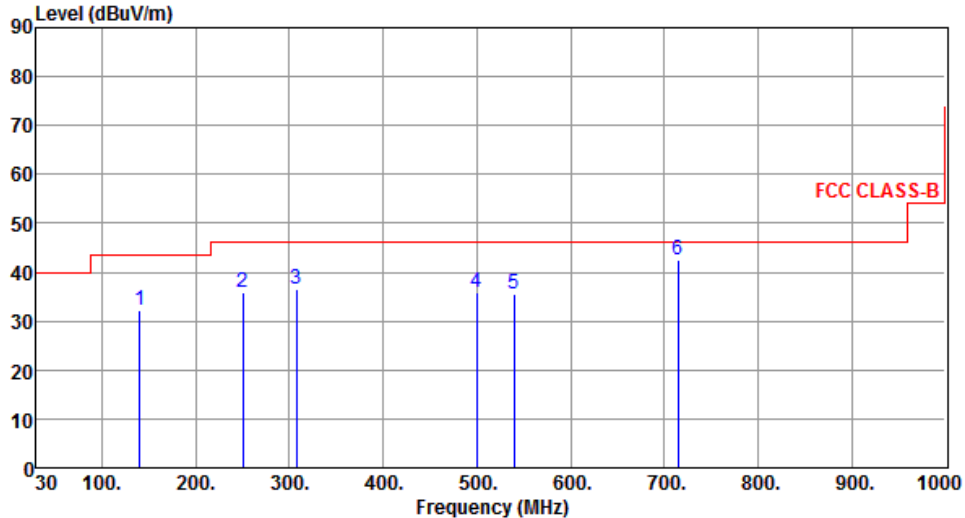Modulation	HT20	Test Freq. (MHz)	2437																																																															
Polarization	Horizontal																																																																	
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 300 MHz, 46 dBuV/m from 300 to 1000 MHz, and 55 dBuV/m from 1000 MHz to 1000 MHz. Six blue vertical lines indicate emission peaks at 140.25, 250.12, 307.52, 500.23, 539.54, and 714.65 MHz, labeled 1 through 6 respectively.</p>																																																																		
	<table border="1"> <thead> <tr> <th>Freq. MHz</th> <th>Emission level dBuV/m</th> <th>Limit dBuV/m</th> <th>Margin dB</th> <th>SA reading dBuV</th> <th>Factor dB</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>140.25</td> <td>32.20</td> <td>43.50</td> <td>-11.30</td> <td>49.63</td> <td>-17.43</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>250.12</td> <td>35.80</td> <td>46.00</td> <td>-10.20</td> <td>53.67</td> <td>-17.87</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>307.52</td> <td>36.62</td> <td>46.00</td> <td>-9.38</td> <td>52.52</td> <td>-15.90</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>500.23</td> <td>35.81</td> <td>46.00</td> <td>-10.19</td> <td>47.53</td> <td>-11.72</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>539.54</td> <td>35.55</td> <td>46.00</td> <td>-10.45</td> <td>46.43</td> <td>-10.88</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>714.65</td> <td>42.49</td> <td>46.00</td> <td>-3.51</td> <td>50.44</td> <td>-7.95</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	1	140.25	32.20	43.50	-11.30	49.63	-17.43	Peak	---	2	250.12	35.80	46.00	-10.20	53.67	-17.87	Peak	---	3	307.52	36.62	46.00	-9.38	52.52	-15.90	Peak	---	4	500.23	35.81	46.00	-10.19	47.53	-11.72	Peak	---	5	539.54	35.55	46.00	-10.45	46.43	-10.88	Peak	---	6	714.65	42.49	46.00	-3.51	50.44	-7.95	Peak	---		
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg																																																										
1	140.25	32.20	43.50	-11.30	49.63	-17.43	Peak	---																																																										
2	250.12	35.80	46.00	-10.20	53.67	-17.87	Peak	---																																																										
3	307.52	36.62	46.00	-9.38	52.52	-15.90	Peak	---																																																										
4	500.23	35.81	46.00	-10.19	47.53	-11.72	Peak	---																																																										
5	539.54	35.55	46.00	-10.45	46.43	-10.88	Peak	---																																																										
6	714.65	42.49	46.00	-3.51	50.44	-7.95	Peak	---																																																										
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																		

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

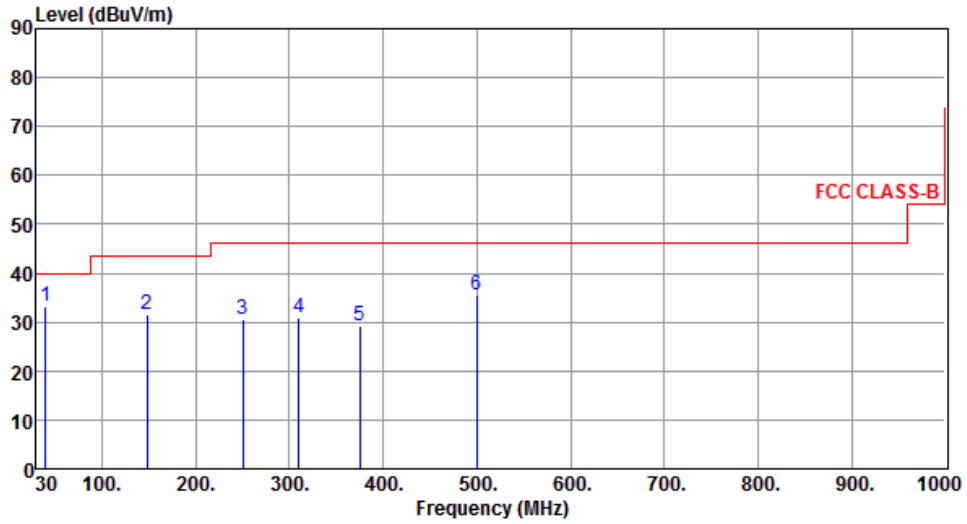

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	39.52	33.18	40.00	-6.82	50.44	-17.26	QP	100	1
2	148.53	31.57	43.50	-11.93	48.53	-16.96	Peak	---	---
3	250.11	30.56	46.00	-15.44	48.43	-17.87	Peak	---	---
4	310.25	30.90	46.00	-15.10	46.75	-15.85	Peak	---	---
5	375.16	29.23	46.00	-16.77	43.55	-14.32	Peak	---	---
6	500.26	35.60	46.00	-10.40	47.31	-11.71	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



### 3.5.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

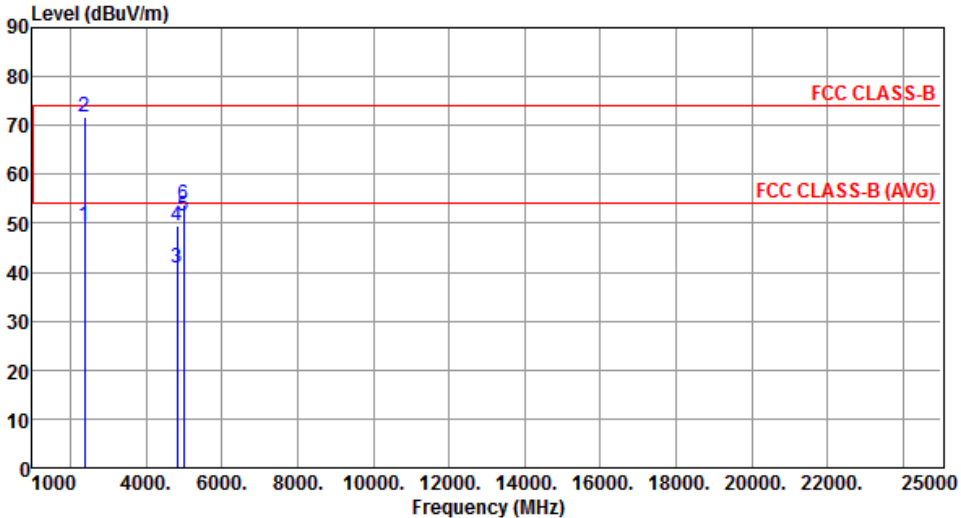Modulation	HT20	Test Freq. (MHz)	2412																																																																																				
Polarization	Horizontal																																																																																						
																																																																																							
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>49.53</td> <td>54.00</td> <td>-4.47</td> <td>52.18</td> <td>-2.65</td> <td>Average</td> <td>107</td> <td>359</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>71.85</td> <td>74.00</td> <td>-2.15</td> <td>74.50</td> <td>-2.65</td> <td>Peak</td> <td>107</td> <td>359</td> </tr> <tr> <td>3</td> <td>4824.00</td> <td>40.82</td> <td>54.00</td> <td>-13.18</td> <td>35.85</td> <td>4.97</td> <td>Average</td> <td>254</td> <td>21</td> </tr> <tr> <td>4</td> <td>4824.00</td> <td>49.53</td> <td>74.00</td> <td>-24.47</td> <td>44.56</td> <td>4.97</td> <td>Peak</td> <td>254</td> <td>21</td> </tr> <tr> <td>5</td> <td>5000.00</td> <td>51.32</td> <td>54.00</td> <td>-2.68</td> <td>45.94</td> <td>5.38</td> <td>Average</td> <td>351</td> <td>83</td> </tr> <tr> <td>6</td> <td>5000.00</td> <td>53.83</td> <td>74.00</td> <td>-20.17</td> <td>48.45</td> <td>5.38</td> <td>Peak</td> <td>351</td> <td>83</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	2390.00	49.53	54.00	-4.47	52.18	-2.65	Average	107	359	2	2390.00	71.85	74.00	-2.15	74.50	-2.65	Peak	107	359	3	4824.00	40.82	54.00	-13.18	35.85	4.97	Average	254	21	4	4824.00	49.53	74.00	-24.47	44.56	4.97	Peak	254	21	5	5000.00	51.32	54.00	-2.68	45.94	5.38	Average	351	83	6	5000.00	53.83	74.00	-20.17	48.45	5.38	Peak	351	83								
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																															
1	2390.00	49.53	54.00	-4.47	52.18	-2.65	Average	107	359																																																																														
2	2390.00	71.85	74.00	-2.15	74.50	-2.65	Peak	107	359																																																																														
3	4824.00	40.82	54.00	-13.18	35.85	4.97	Average	254	21																																																																														
4	4824.00	49.53	74.00	-24.47	44.56	4.97	Peak	254	21																																																																														
5	5000.00	51.32	54.00	-2.68	45.94	5.38	Average	351	83																																																																														
6	5000.00	53.83	74.00	-20.17	48.45	5.38	Peak	351	83																																																																														
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																																							

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

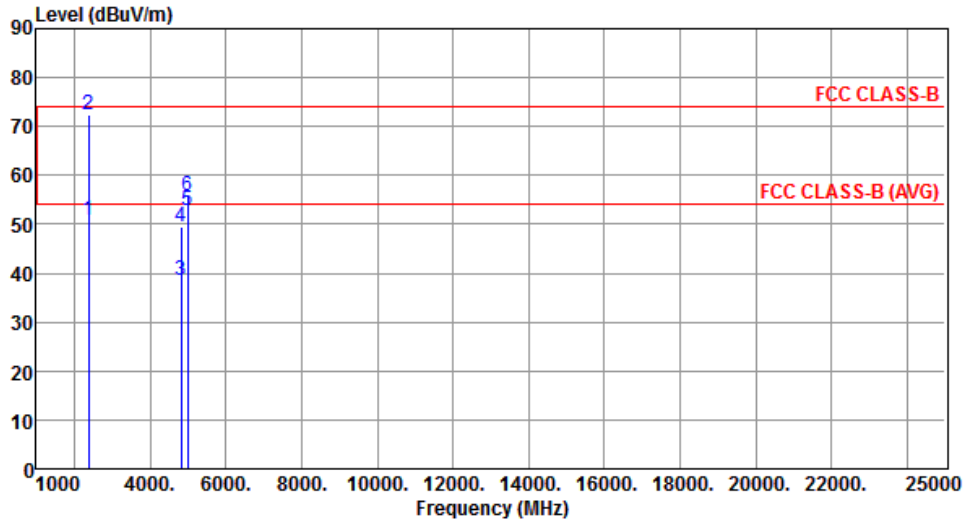


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	50.97	54.00	-3.03	53.62	-2.65	Average	240	86
2	2390.00	72.26	74.00	-1.74	74.91	-2.65	Peak	240	86
3	4824.00	38.68	54.00	-15.32	33.71	4.97	Average	196	123
4	4824.00	49.55	74.00	-24.45	44.58	4.97	Peak	196	123
5	5000.00	52.88	54.00	-1.12	47.50	5.38	Average	102	218
6	5000.00	55.63	74.00	-18.37	50.25	5.38	Peak	102	218

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

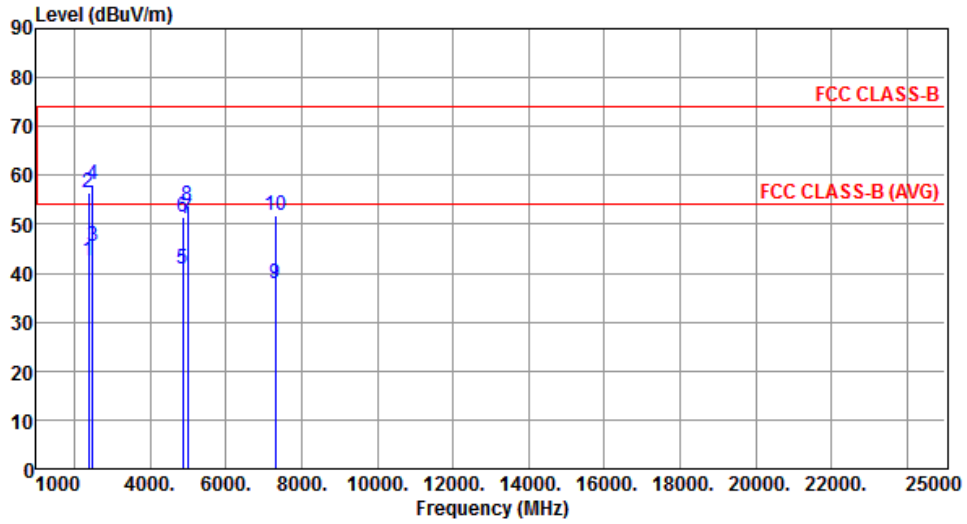


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.55	54.00	-11.45	45.20	-2.65	Average	176	359
2	2390.00	56.30	74.00	-17.70	58.95	-2.65	Peak	176	359
3	2483.50	45.53	54.00	-8.47	47.87	-2.34	Average	176	359
4	2483.50	58.17	74.00	-15.83	60.51	-2.34	Peak	176	359
5	4874.00	40.71	54.00	-13.29	35.63	5.08	Average	251	23
6	4874.00	51.37	74.00	-22.63	46.29	5.08	Peak	251	23
7	5000.00	51.05	54.00	-2.95	45.67	5.38	Average	354	89
8	5000.00	53.74	74.00	-20.26	48.36	5.38	Peak	354	89
9	7311.00	38.02	54.00	-15.98	27.91	10.11	Average	320	105
10	7311.00	51.91	74.00	-22.09	41.80	10.11	Peak	320	105

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

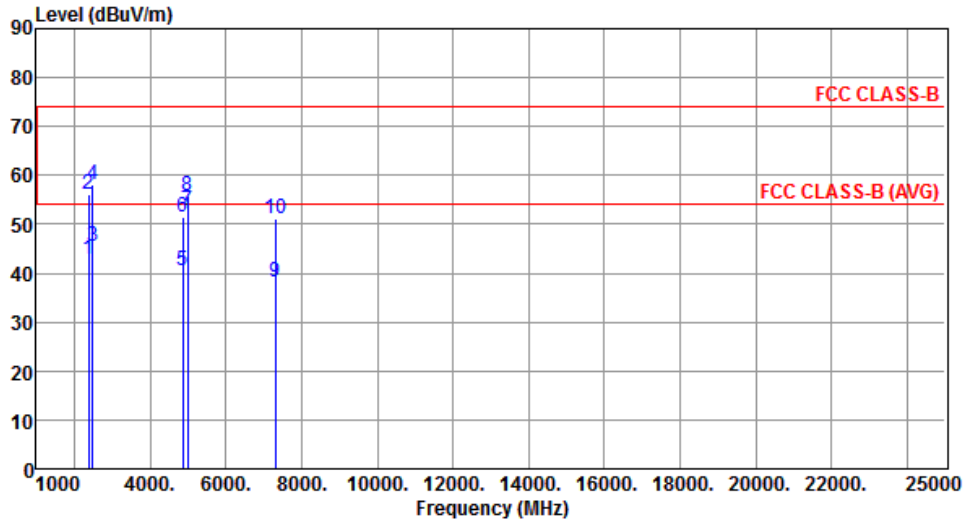


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.97	54.00	-11.03	45.62	-2.65	Average	100	20
2	2390.00	56.27	74.00	-17.73	58.92	-2.65	Peak	100	20
3	2483.50	45.59	54.00	-8.41	47.93	-2.34	Average	100	20
4	2483.50	58.22	74.00	-15.78	60.56	-2.34	Peak	100	20
5	4874.00	40.64	54.00	-13.36	35.56	5.08	Average	195	137
6	4874.00	51.40	74.00	-22.60	46.32	5.08	Peak	195	137
7	5000.00	52.92	54.00	-1.08	47.54	5.38	Average	104	211
8	5000.00	55.75	74.00	-18.25	50.37	5.38	Peak	104	211
9	7311.00	38.12	54.00	-15.88	28.01	10.11	Average	172	354
10	7311.00	51.06	74.00	-22.94	40.95	10.11	Peak	172	354

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

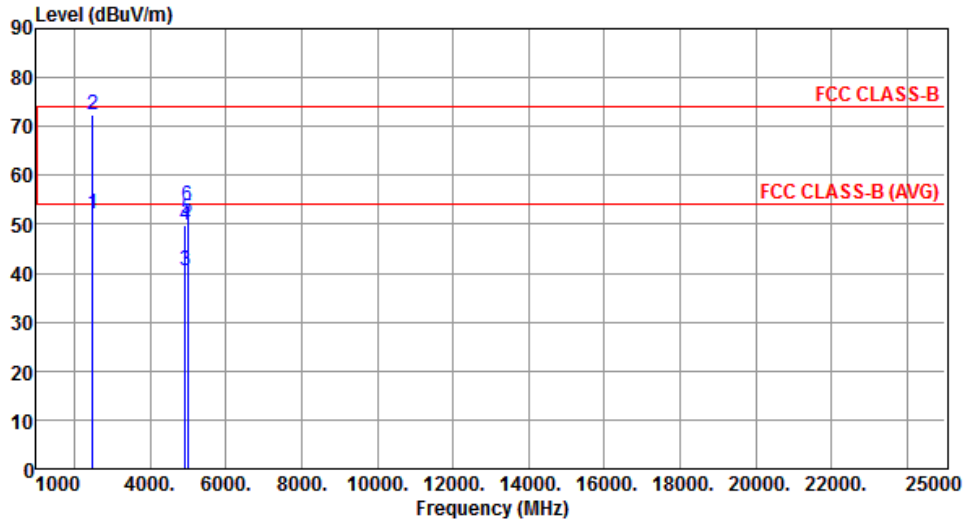


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	51.99	54.00	-2.01	54.33	-2.34	Average	171	358
2	2483.50	72.43	74.00	-1.57	74.77	-2.34	Peak	171	358
3	4924.00	40.62	54.00	-13.38	35.41	5.21	Average	252	25
4	4924.00	49.79	74.00	-24.21	44.58	5.21	Peak	252	25
5	5000.00	51.15	54.00	-2.85	45.77	5.38	Average	357	84
6	5000.00	53.67	74.00	-20.33	48.29	5.38	Peak	357	84

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

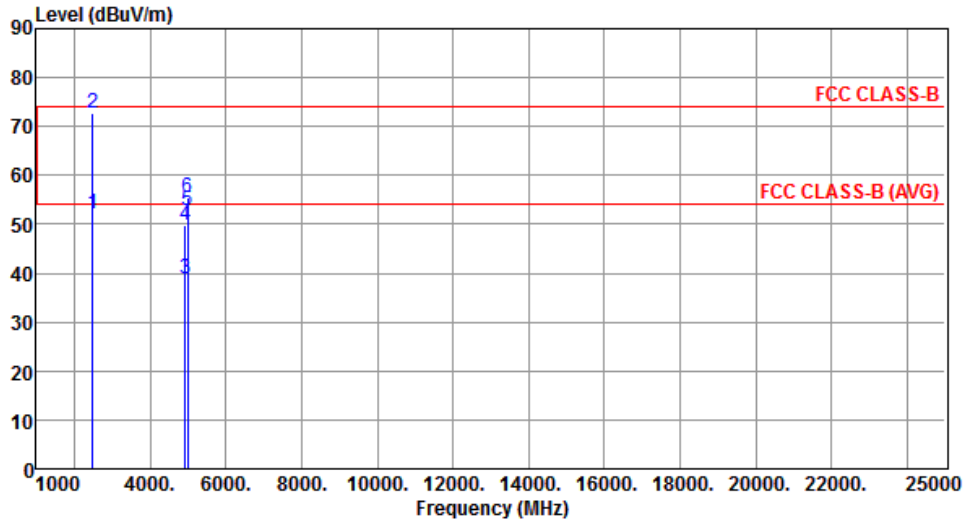

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.13	54.00	-1.87	54.47	-2.34	Average	175	258
2	2483.50	72.78	74.00	-1.22	75.12	-2.34	Peak	175	258
3	4924.00	38.75	54.00	-15.25	33.54	5.21	Average	193	122
4	4924.00	49.84	74.00	-24.16	44.63	5.21	Peak	193	122
5	5000.00	52.74	54.00	-1.26	47.36	5.38	Average	105	214
6	5000.00	55.33	74.00	-18.67	49.95	5.38	Peak	105	214

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.11 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

Modulation	HT40	Test Freq. (MHz)	2422						
Polarization	Horizontal								
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	52.77	54.00	-1.23	55.42	-2.65	Average	181	348
2	2390.00	70.32	74.00	-3.68	72.97	-2.65	Peak	181	348
3	4844.00	39.58	54.00	-14.42	34.56	5.02	Average	255	23
4	4844.00	48.66	74.00	-25.34	43.64	5.02	Peak	255	23
5	5000.00	51.47	54.00	-2.53	46.09	5.38	Average	348	79
6	5000.00	53.99	74.00	-20.01	48.61	5.38	Peak	348	79
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2422
<b>Polarization</b>	Vertical		

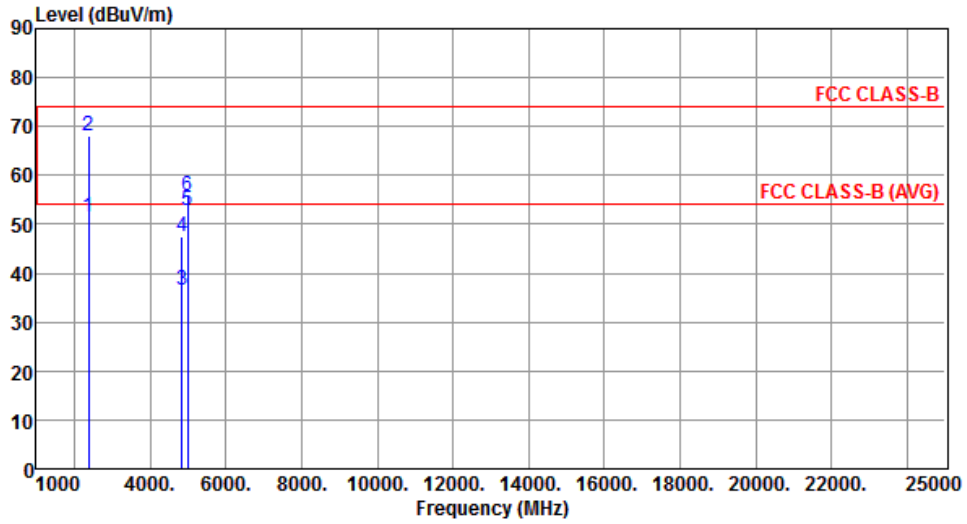

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.45	54.00	-2.55	54.10	-2.65	Average	245	80
2	2390.00	68.22	74.00	-5.78	70.87	-2.65	Peak	245	80
3	4844.00	36.52	54.00	-17.48	31.50	5.02	Average	193	122
4	4844.00	47.64	74.00	-26.36	42.62	5.02	Peak	193	122
5	5000.00	52.97	54.00	-1.03	47.59	5.38	Average	105	211
6	5000.00	55.78	74.00	-18.22	50.40	5.38	Peak	105	211


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

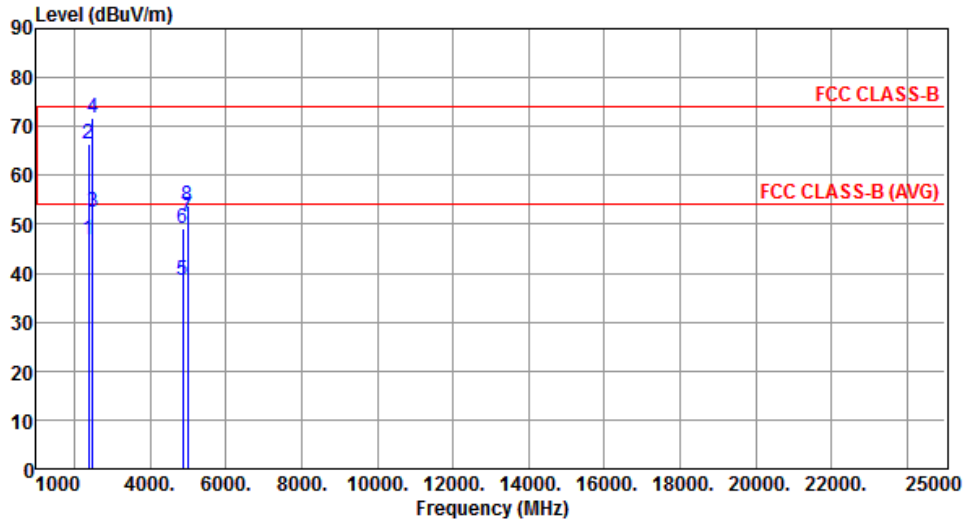


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	46.72	54.00	-7.28	49.37	-2.65	Average	171	349
2	2390.00	66.35	74.00	-7.65	69.00	-2.65	Peak	171	349
3	2483.50	52.45	54.00	-1.55	54.79	-2.34	Average	171	349
4	2483.50	71.59	74.00	-2.41	73.93	-2.34	Peak	171	349
5	4874.00	38.65	54.00	-15.35	33.57	5.08	Average	253	30
6	4874.00	49.24	74.00	-24.76	44.16	5.08	Peak	253	30
7	5000.00	51.33	54.00	-2.67	45.95	5.38	Average	357	85
8	5000.00	53.89	74.00	-20.11	48.51	5.38	Peak	357	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

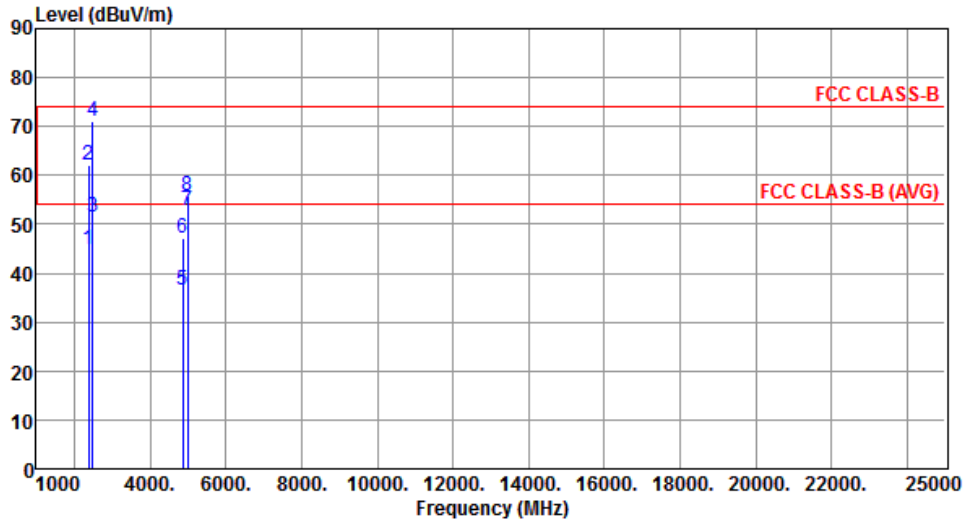


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	45.00	54.00	-9.00	47.65	-2.65	Average	198	339
2	2390.00	62.02	74.00	-11.98	64.67	-2.65	Peak	198	339
3	2483.50	51.57	54.00	-2.43	53.91	-2.34	Average	198	339
4	2483.50	70.99	74.00	-3.01	73.33	-2.34	Peak	198	339
5	4874.00	36.55	54.00	-17.45	31.47	5.08	Average	190	134
6	4874.00	47.29	74.00	-26.71	42.21	5.08	Peak	190	134
7	5000.00	52.88	54.00	-1.12	47.50	5.38	Average	100	217
8	5000.00	55.64	74.00	-18.36	50.26	5.38	Peak	100	217

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Horizontal		

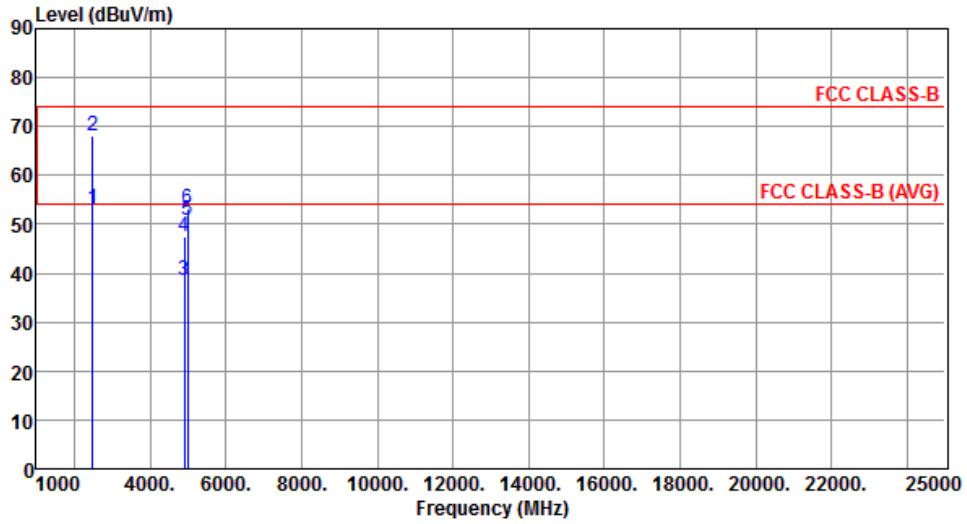


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.97	54.00	-1.03	55.31	-2.34	Average	120	355
2	2483.50	68.13	74.00	-5.87	70.47	-2.34	Peak	120	355
3	4904.00	38.43	54.00	-15.57	33.26	5.17	Average	255	29
4	4904.00	47.41	74.00	-26.59	42.24	5.17	Peak	255	29
5	5000.00	50.89	54.00	-3.11	45.51	5.38	Average	347	78
6	5000.00	53.26	74.00	-20.74	47.88	5.38	Peak	347	78

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Vertical		

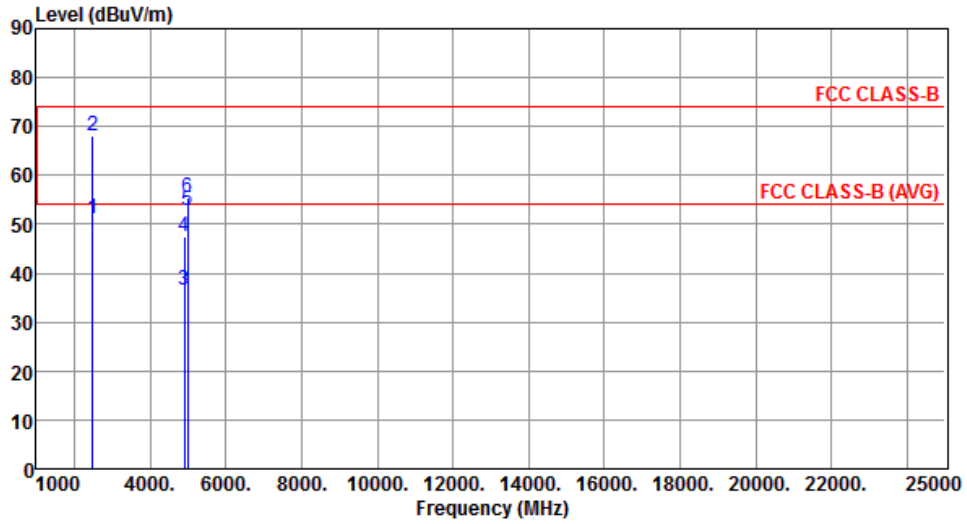

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	51.25	54.00	-2.75	53.59	-2.34	Average	100	35
2	2483.50	68.01	74.00	-5.99	70.35	-2.34	Peak	100	35
3	4904.00	36.64	54.00	-17.36	31.47	5.17	Average	190	127
4	4904.00	47.63	74.00	-26.37	42.46	5.17	Peak	190	127
5	5000.00	52.87	54.00	-1.13	47.49	5.38	Average	102	219
6	5000.00	55.60	74.00	-18.40	50.22	5.38	Peak	102	219

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Emissions in Non-Restricted Frequency Bands

### 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz

### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.6.4 Test Setup

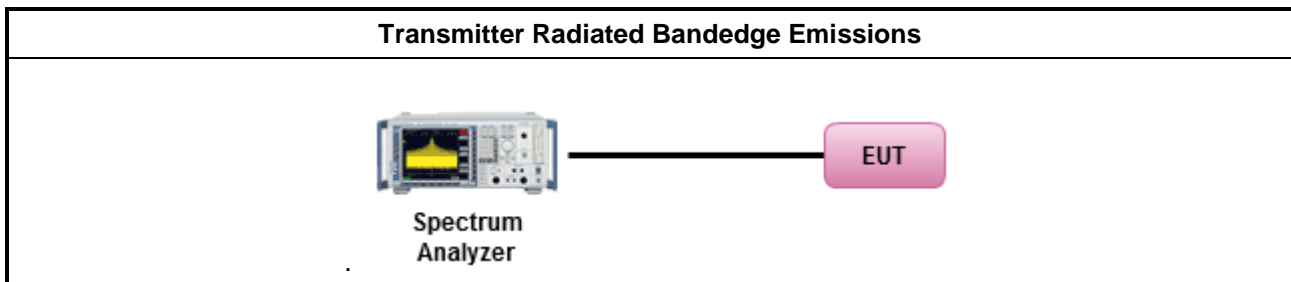


### 3.6.5 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding  $10 \log(N_{ANT})$  since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.


### 3.6.6 Unwanted Emissions into Non-Restricted Frequency Bands

#### Non-beamforming mode

802.11b

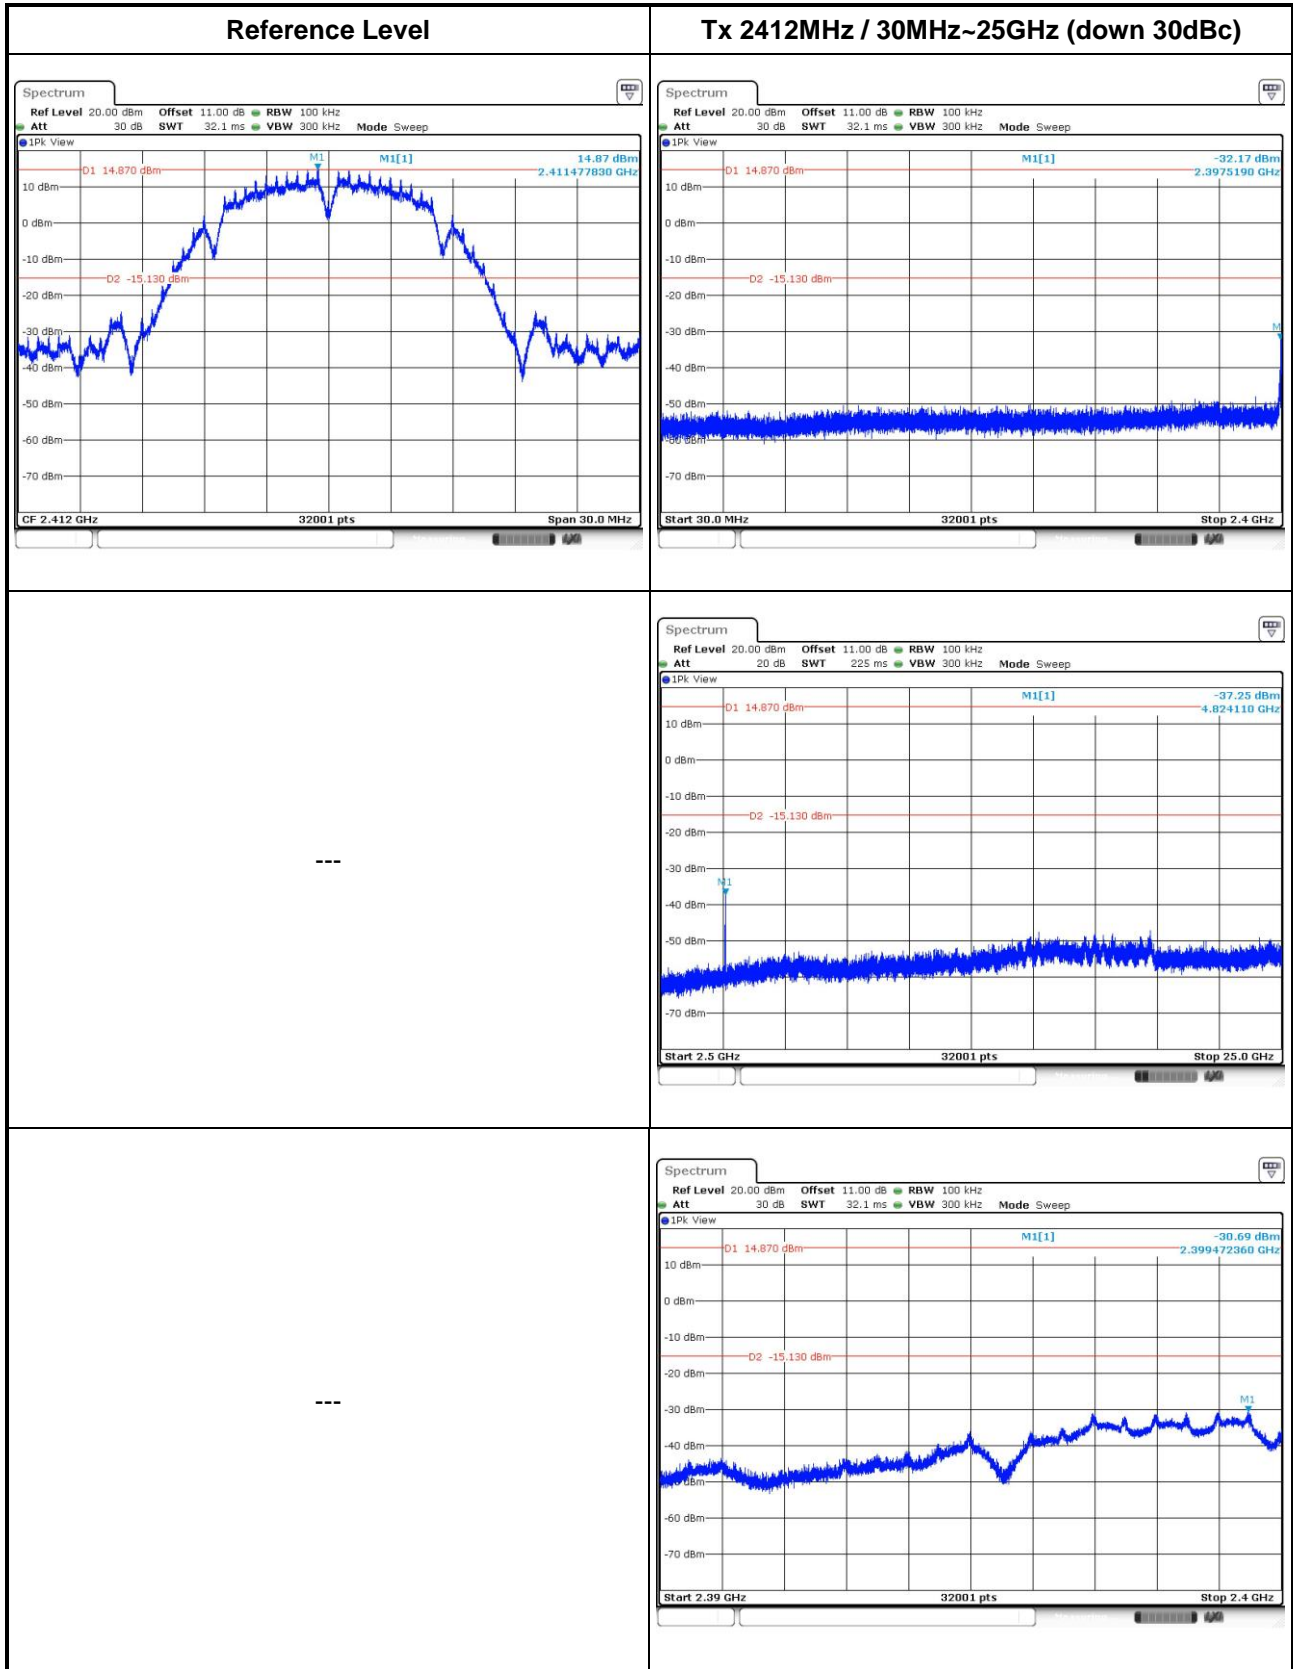


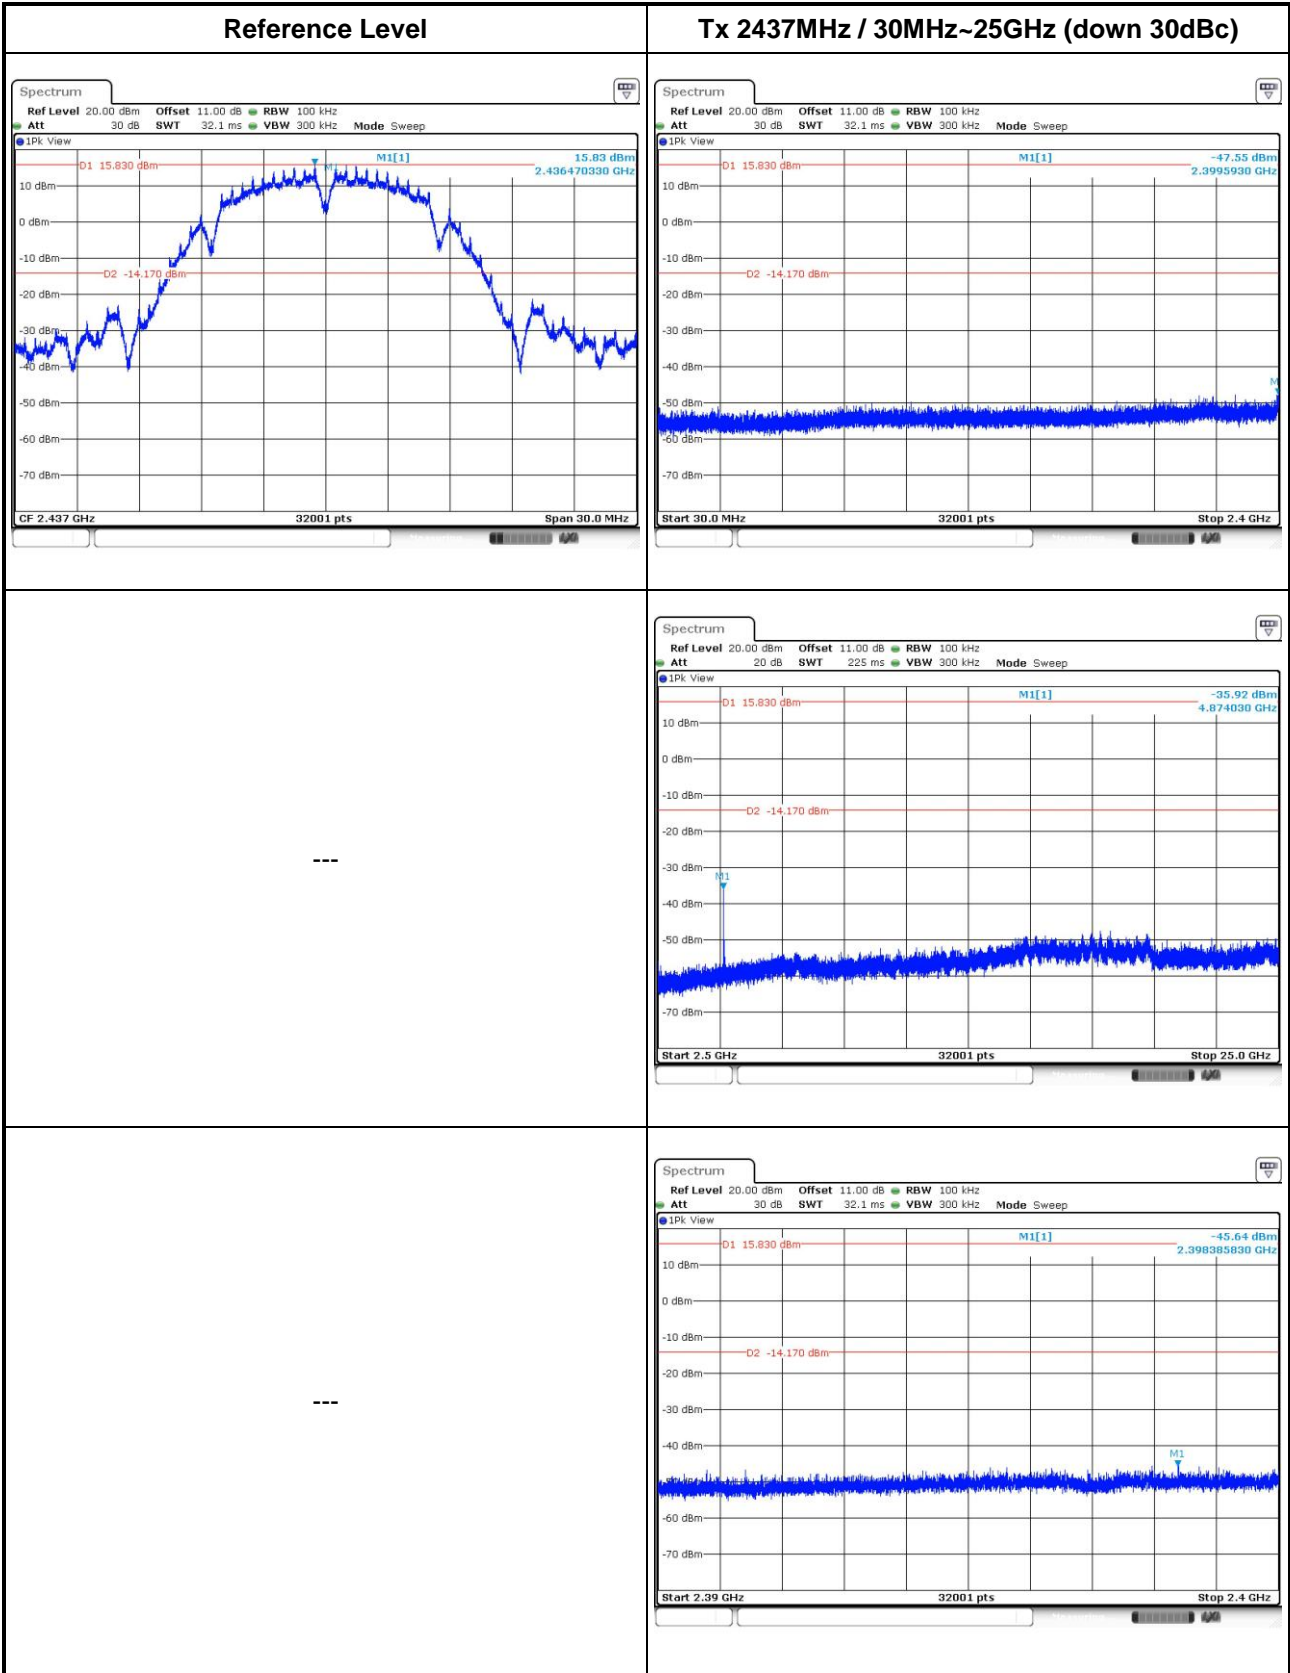


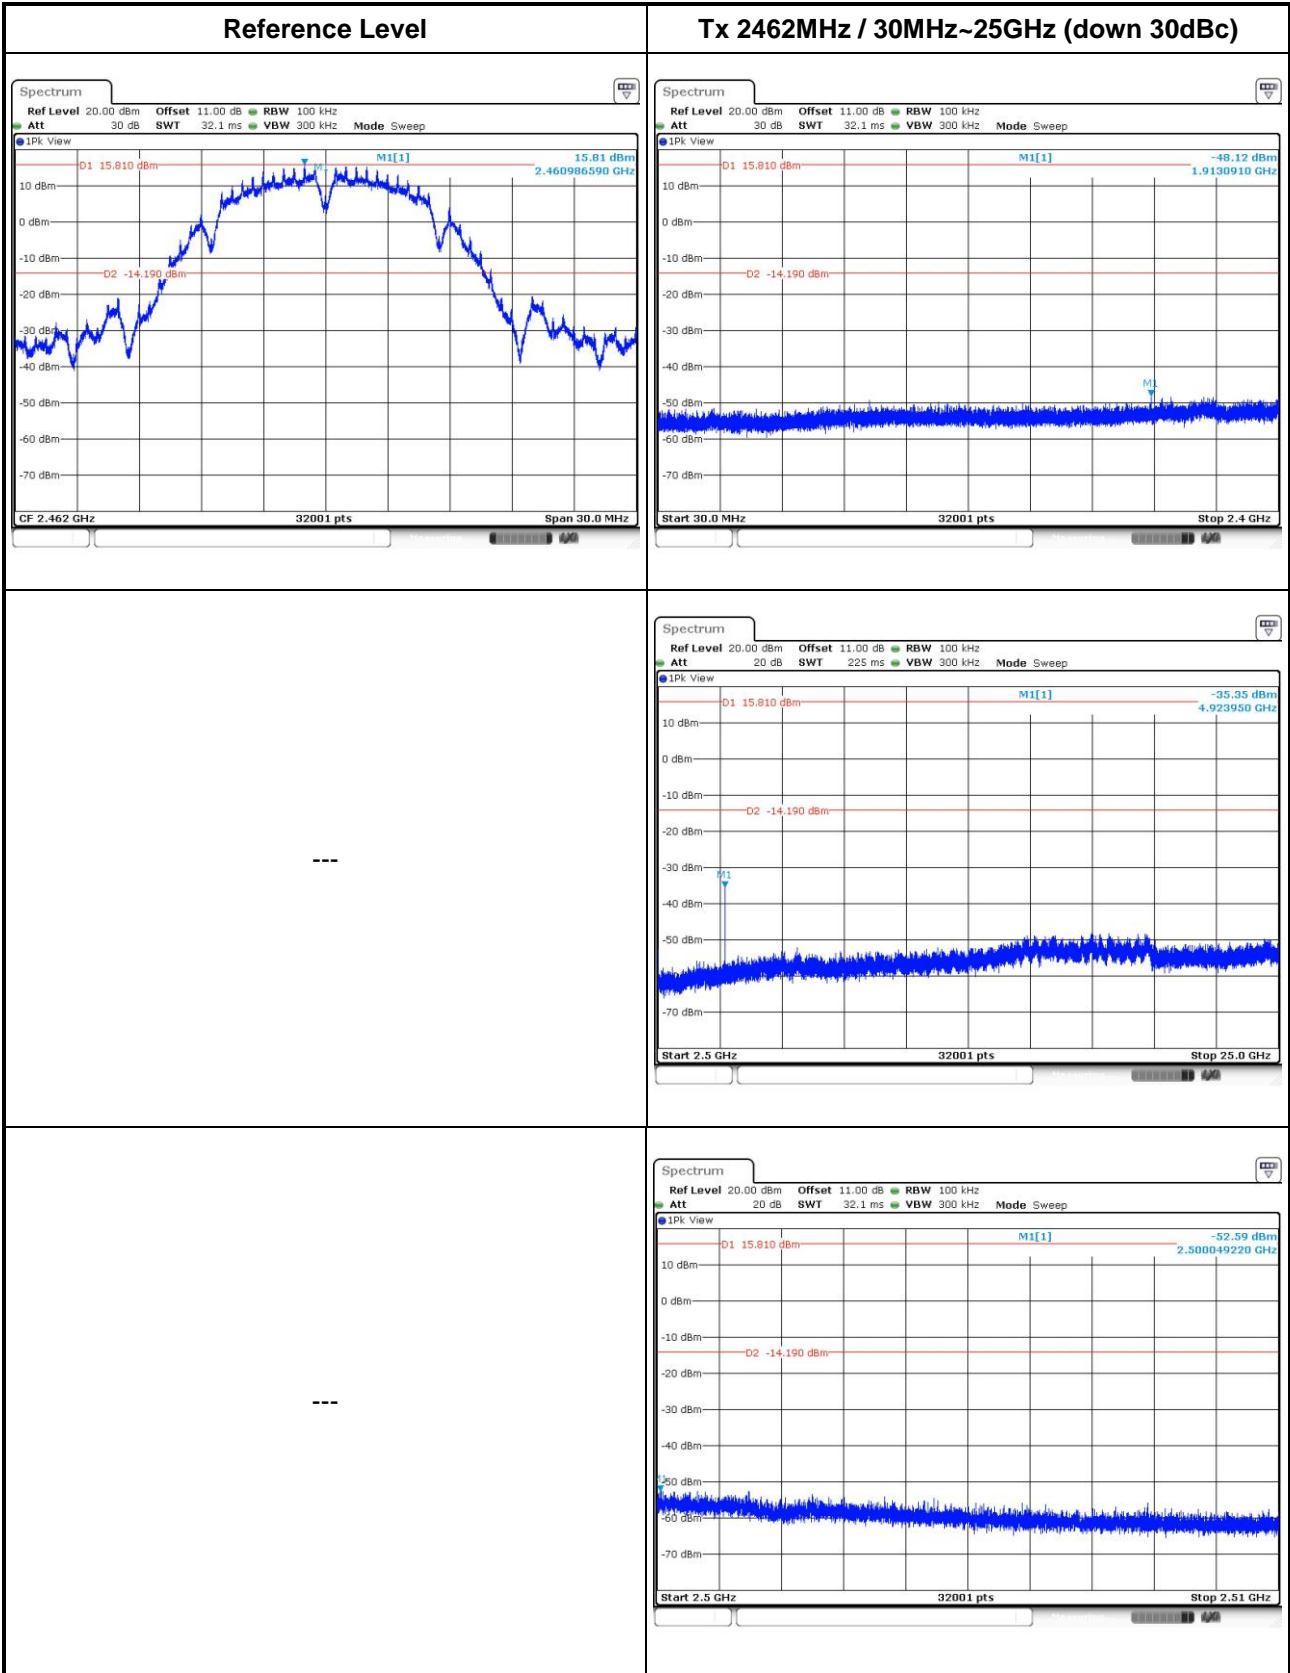





802.11g

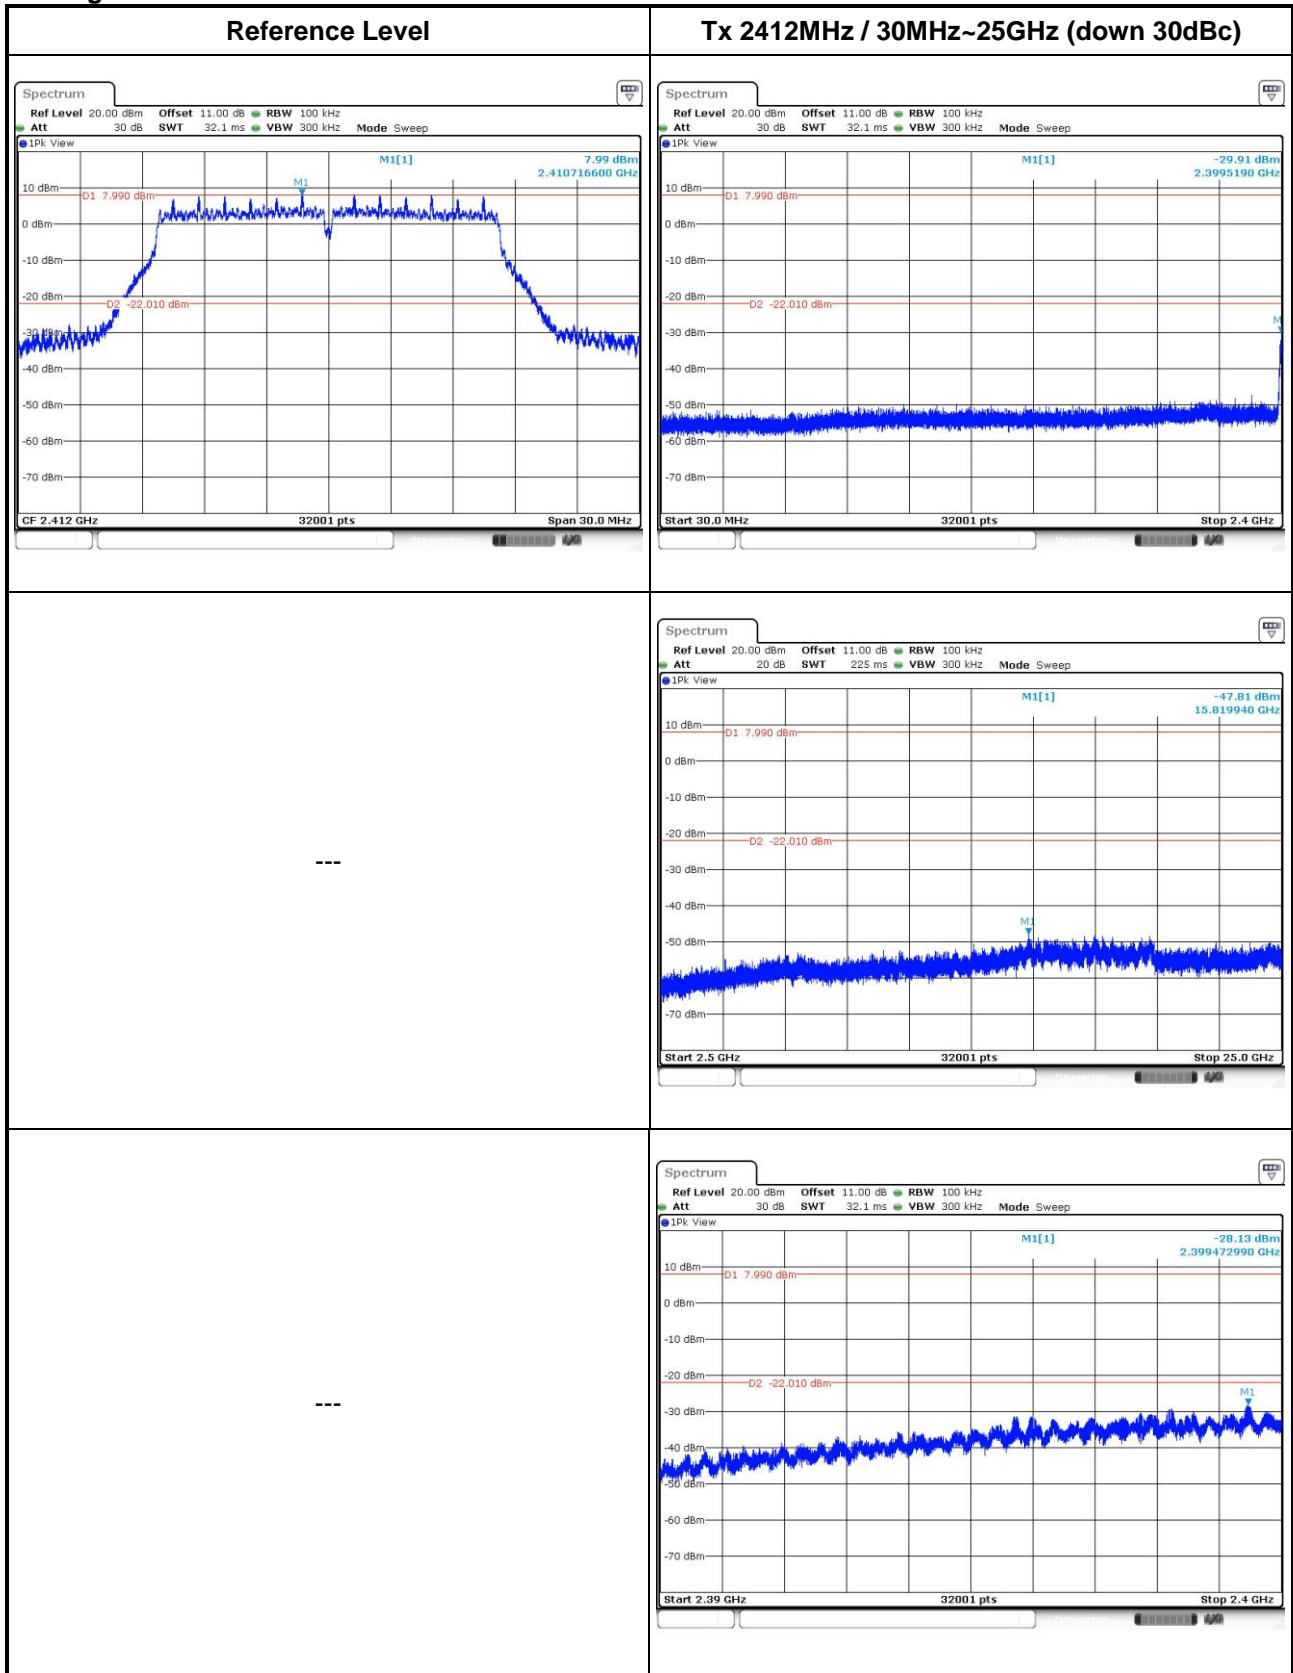


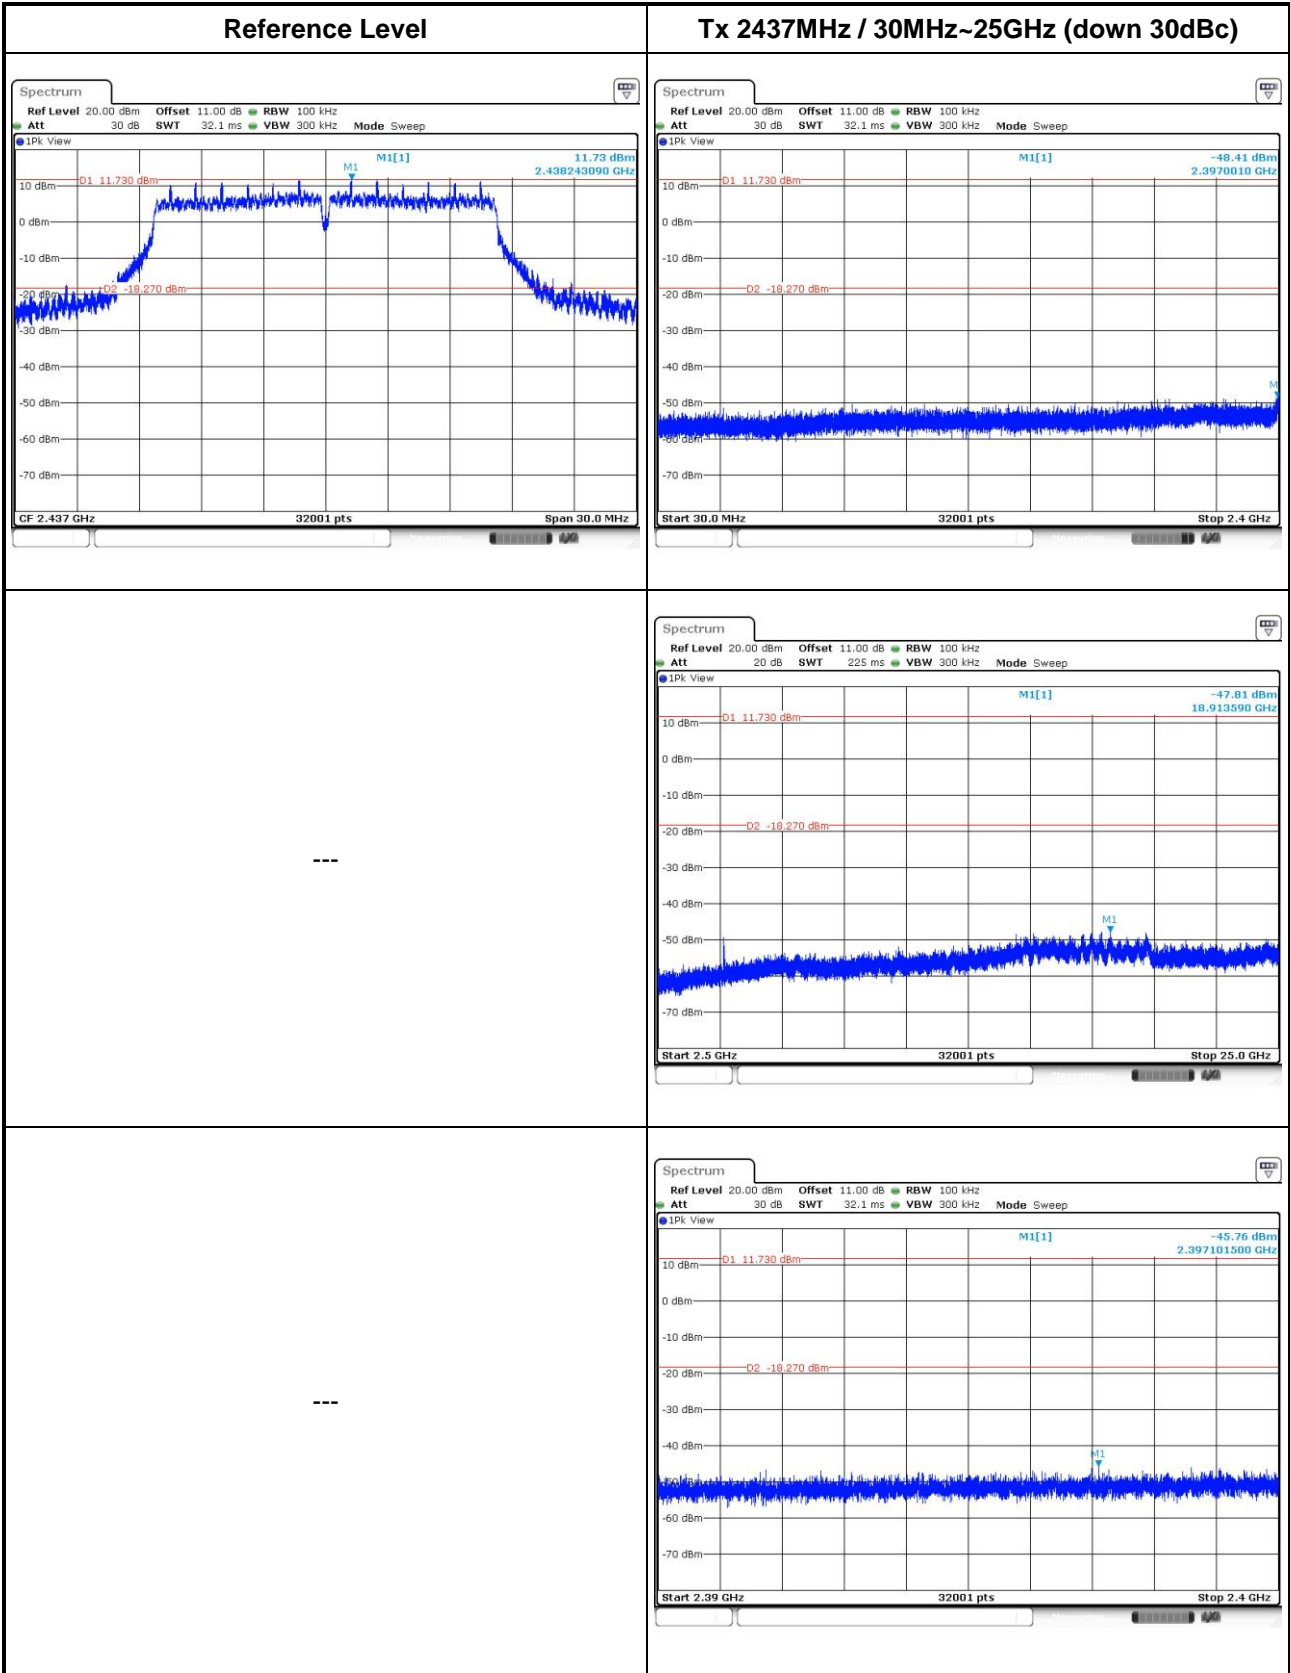


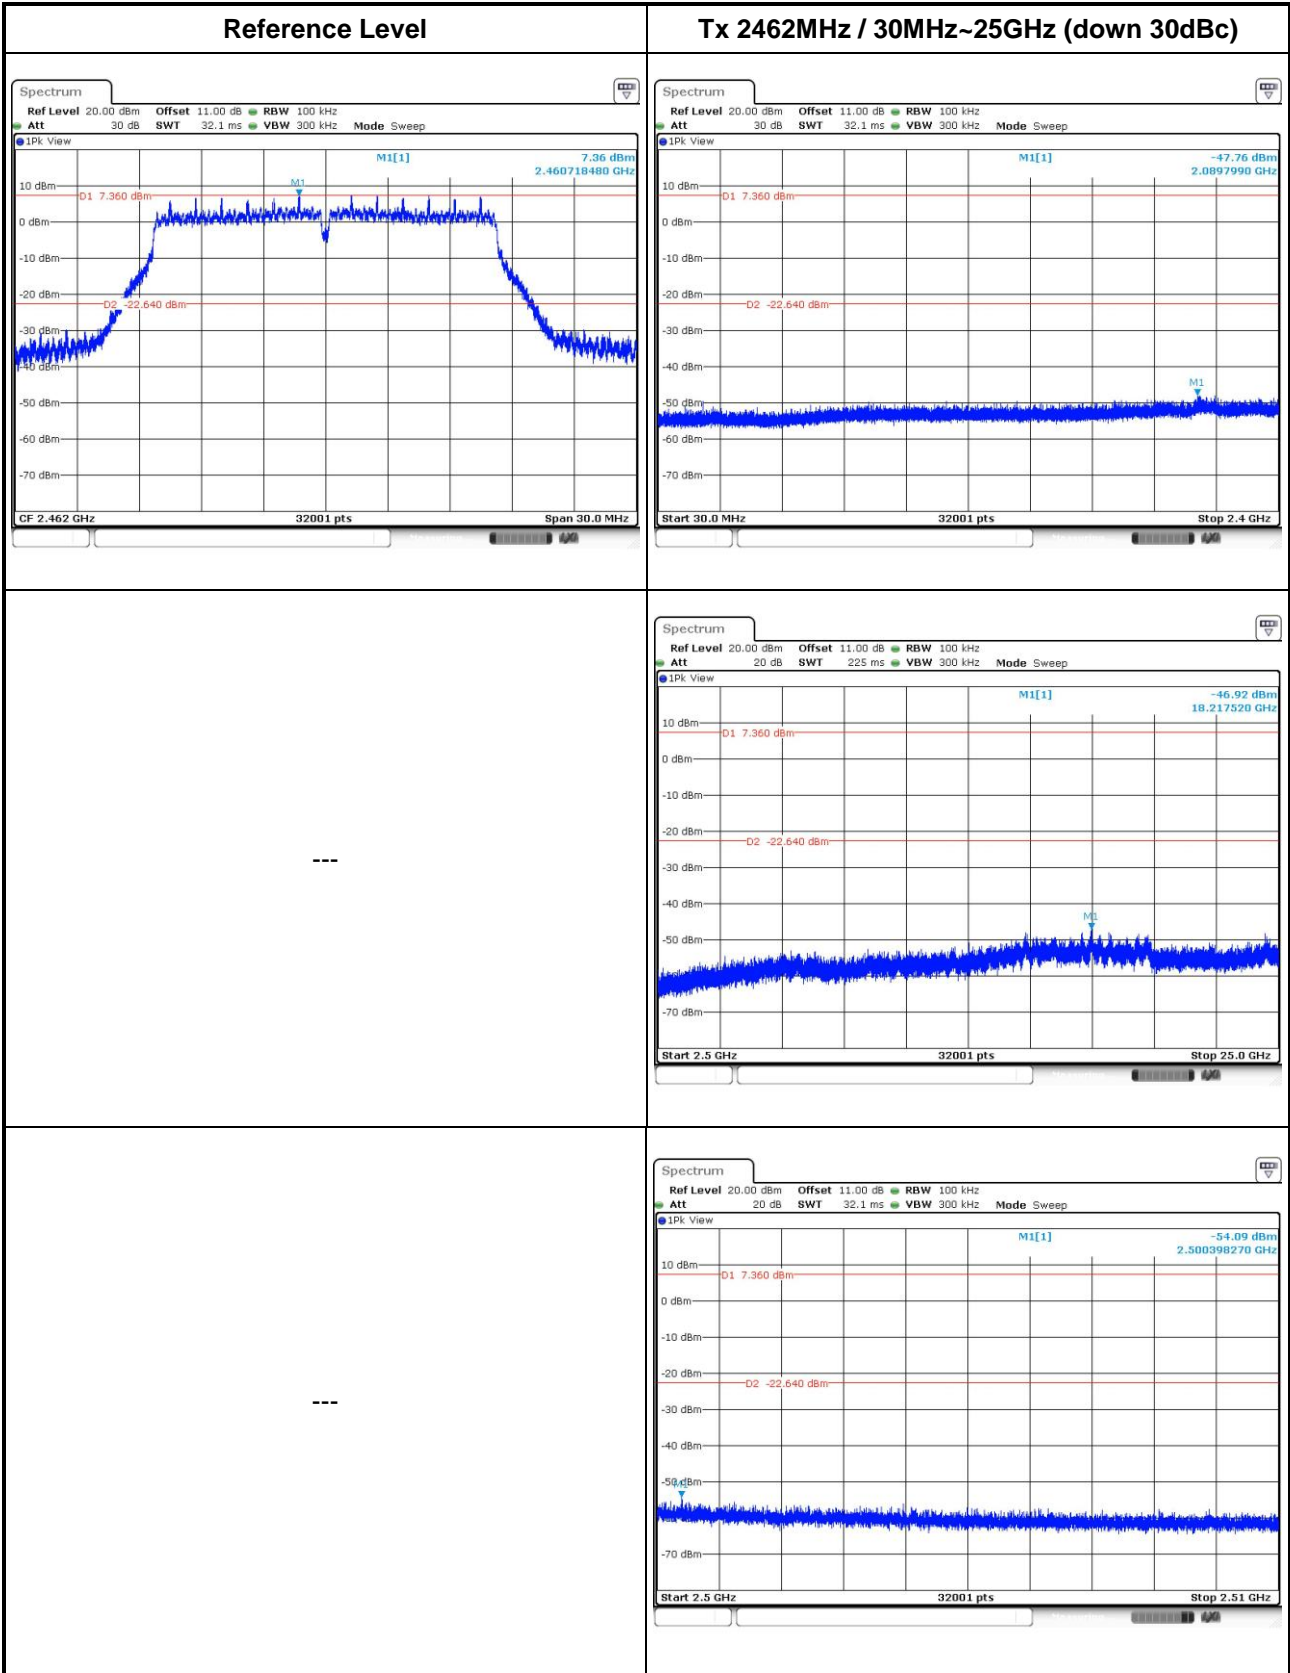

802.11n HT20

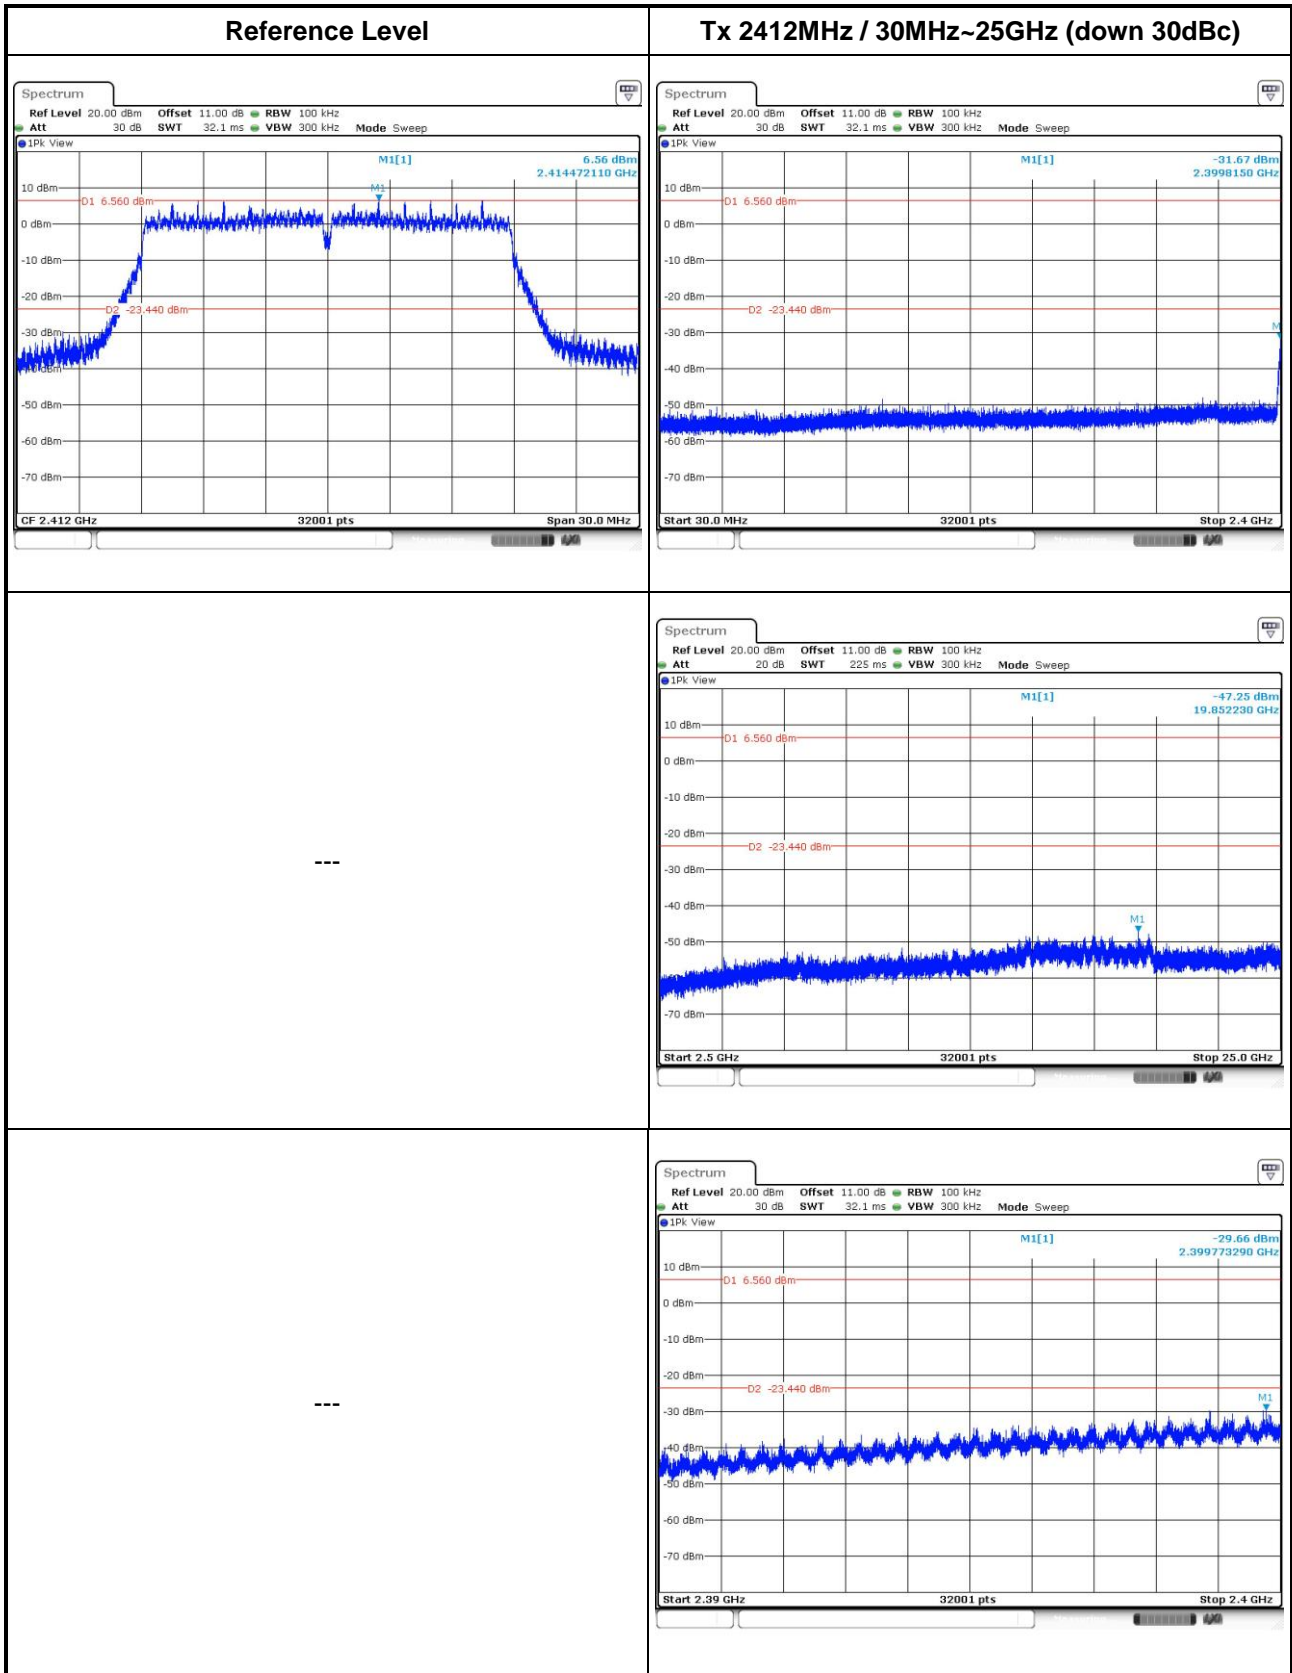


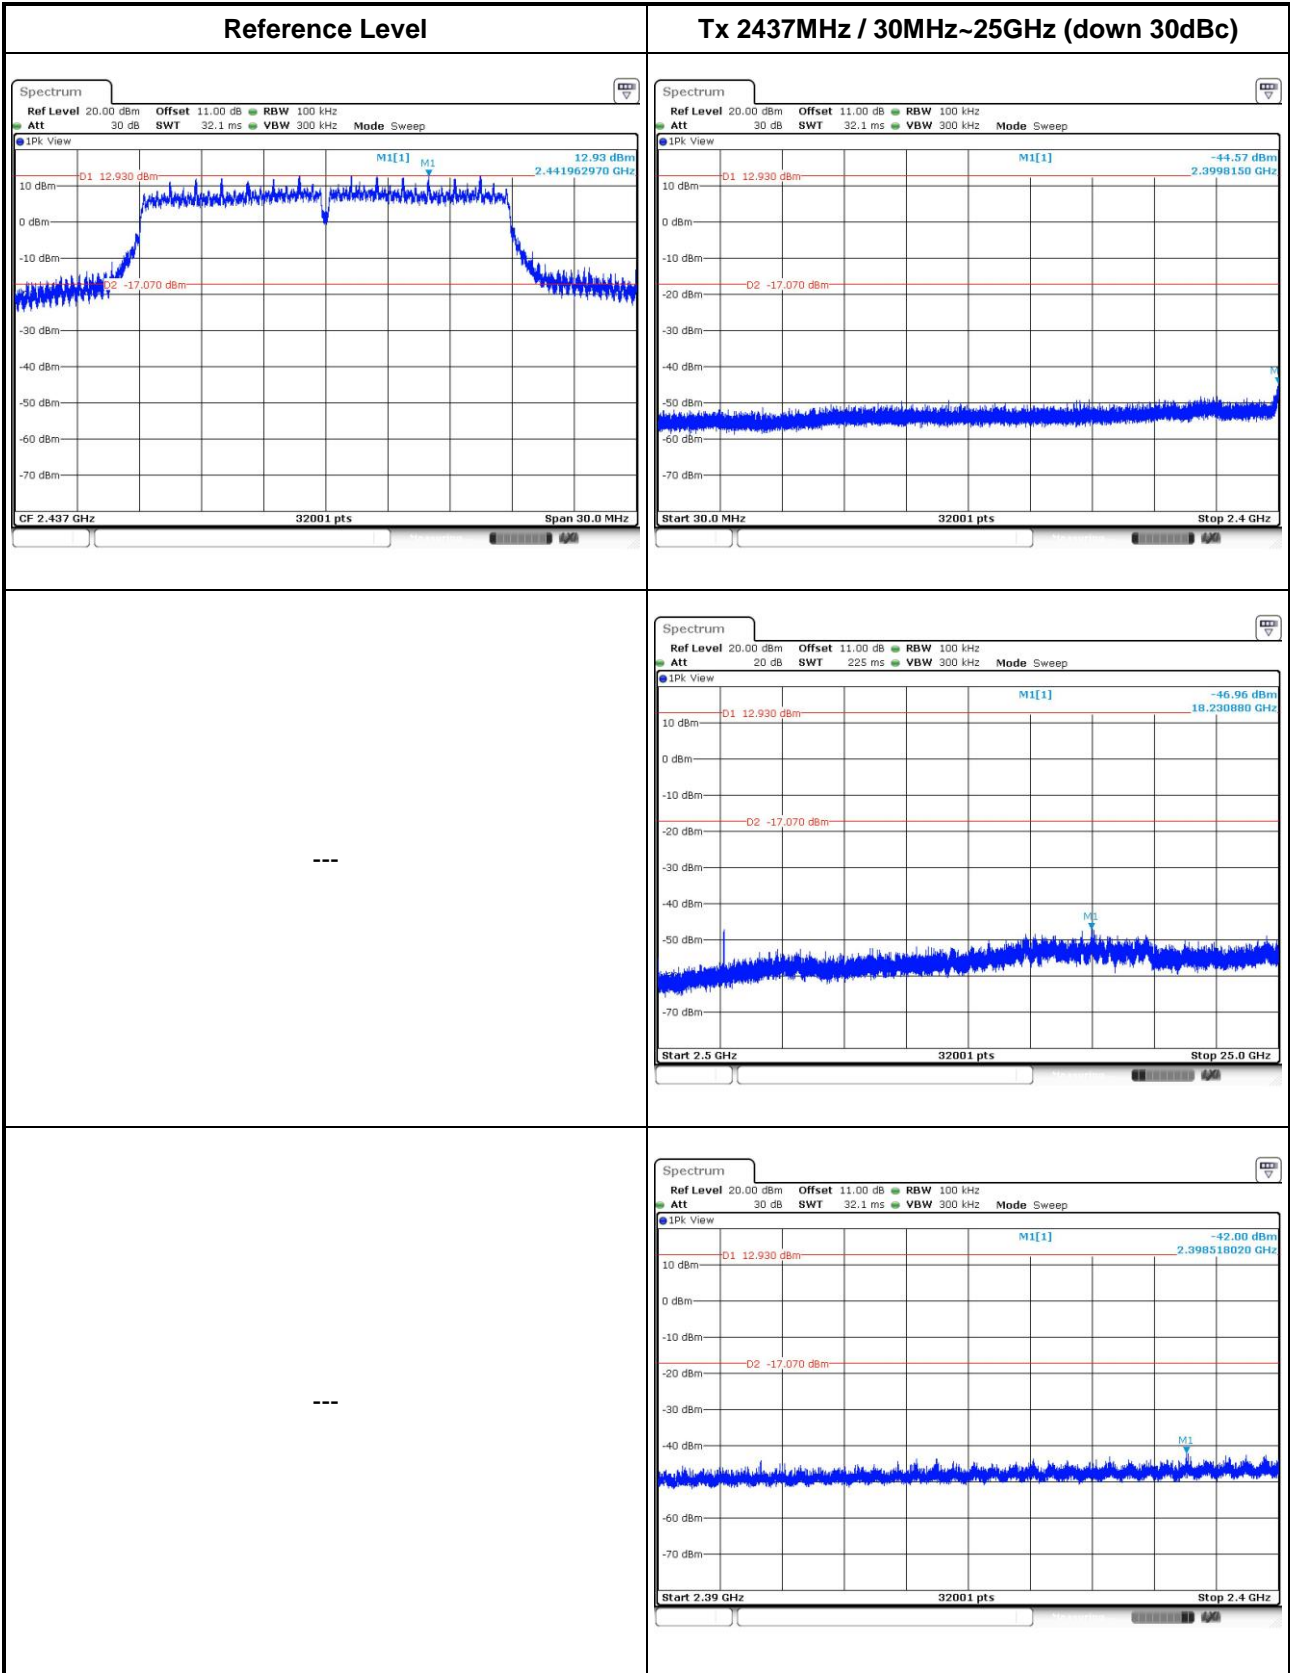


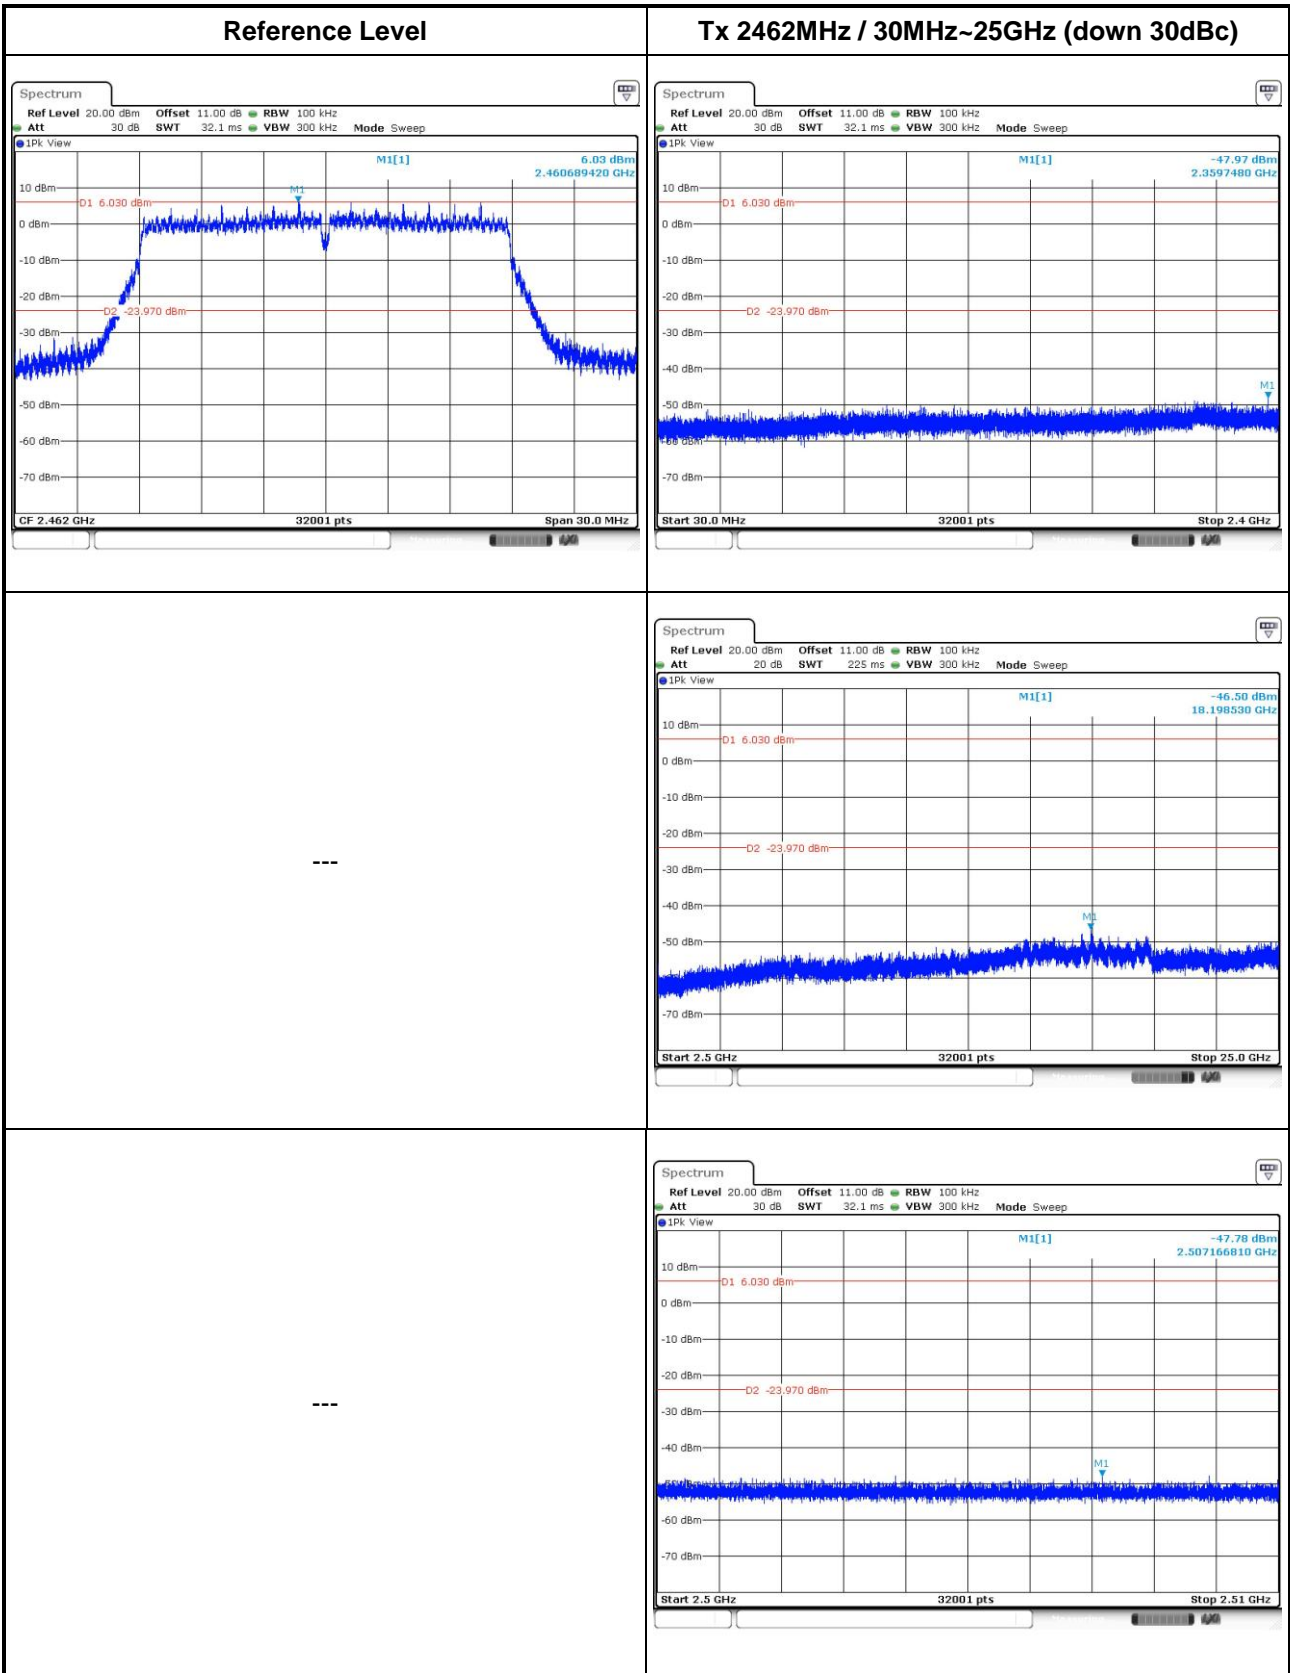




802.11n HT40

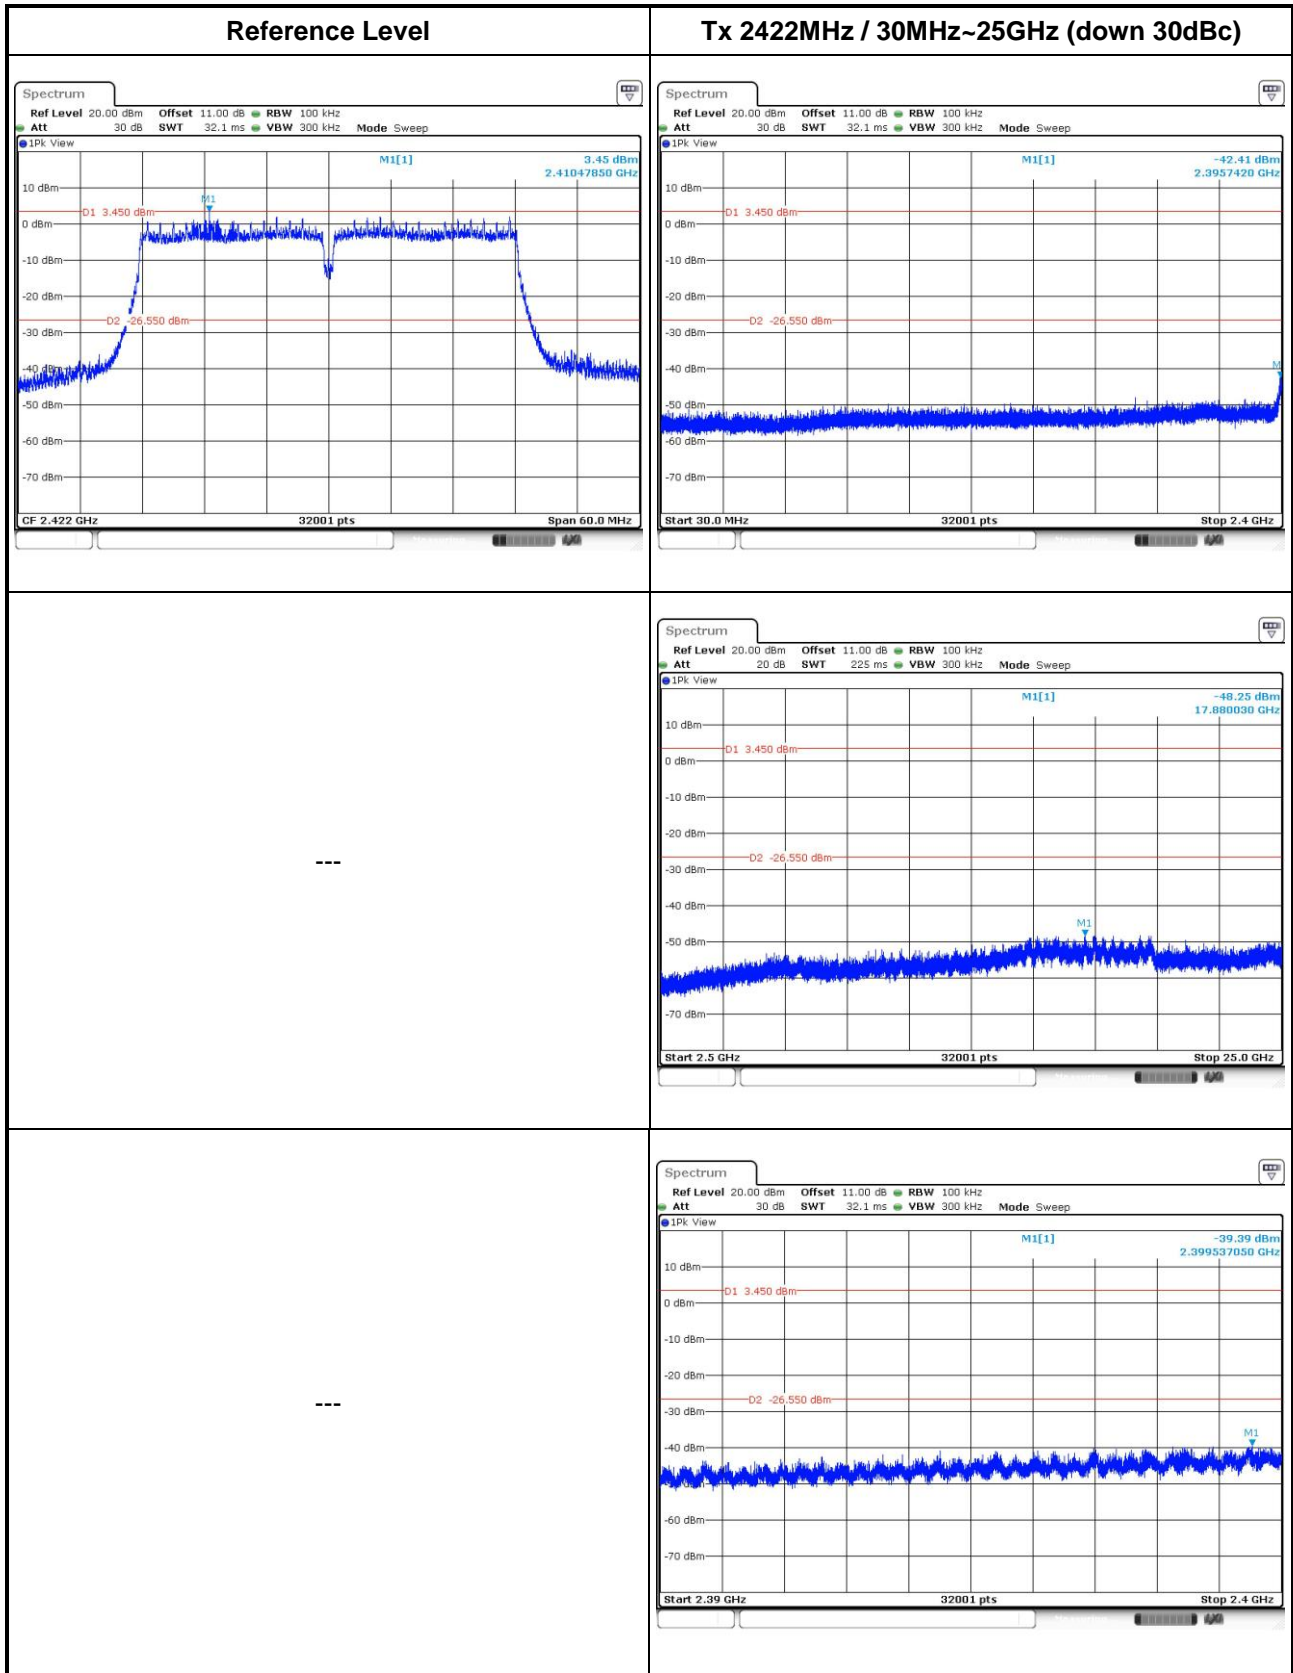

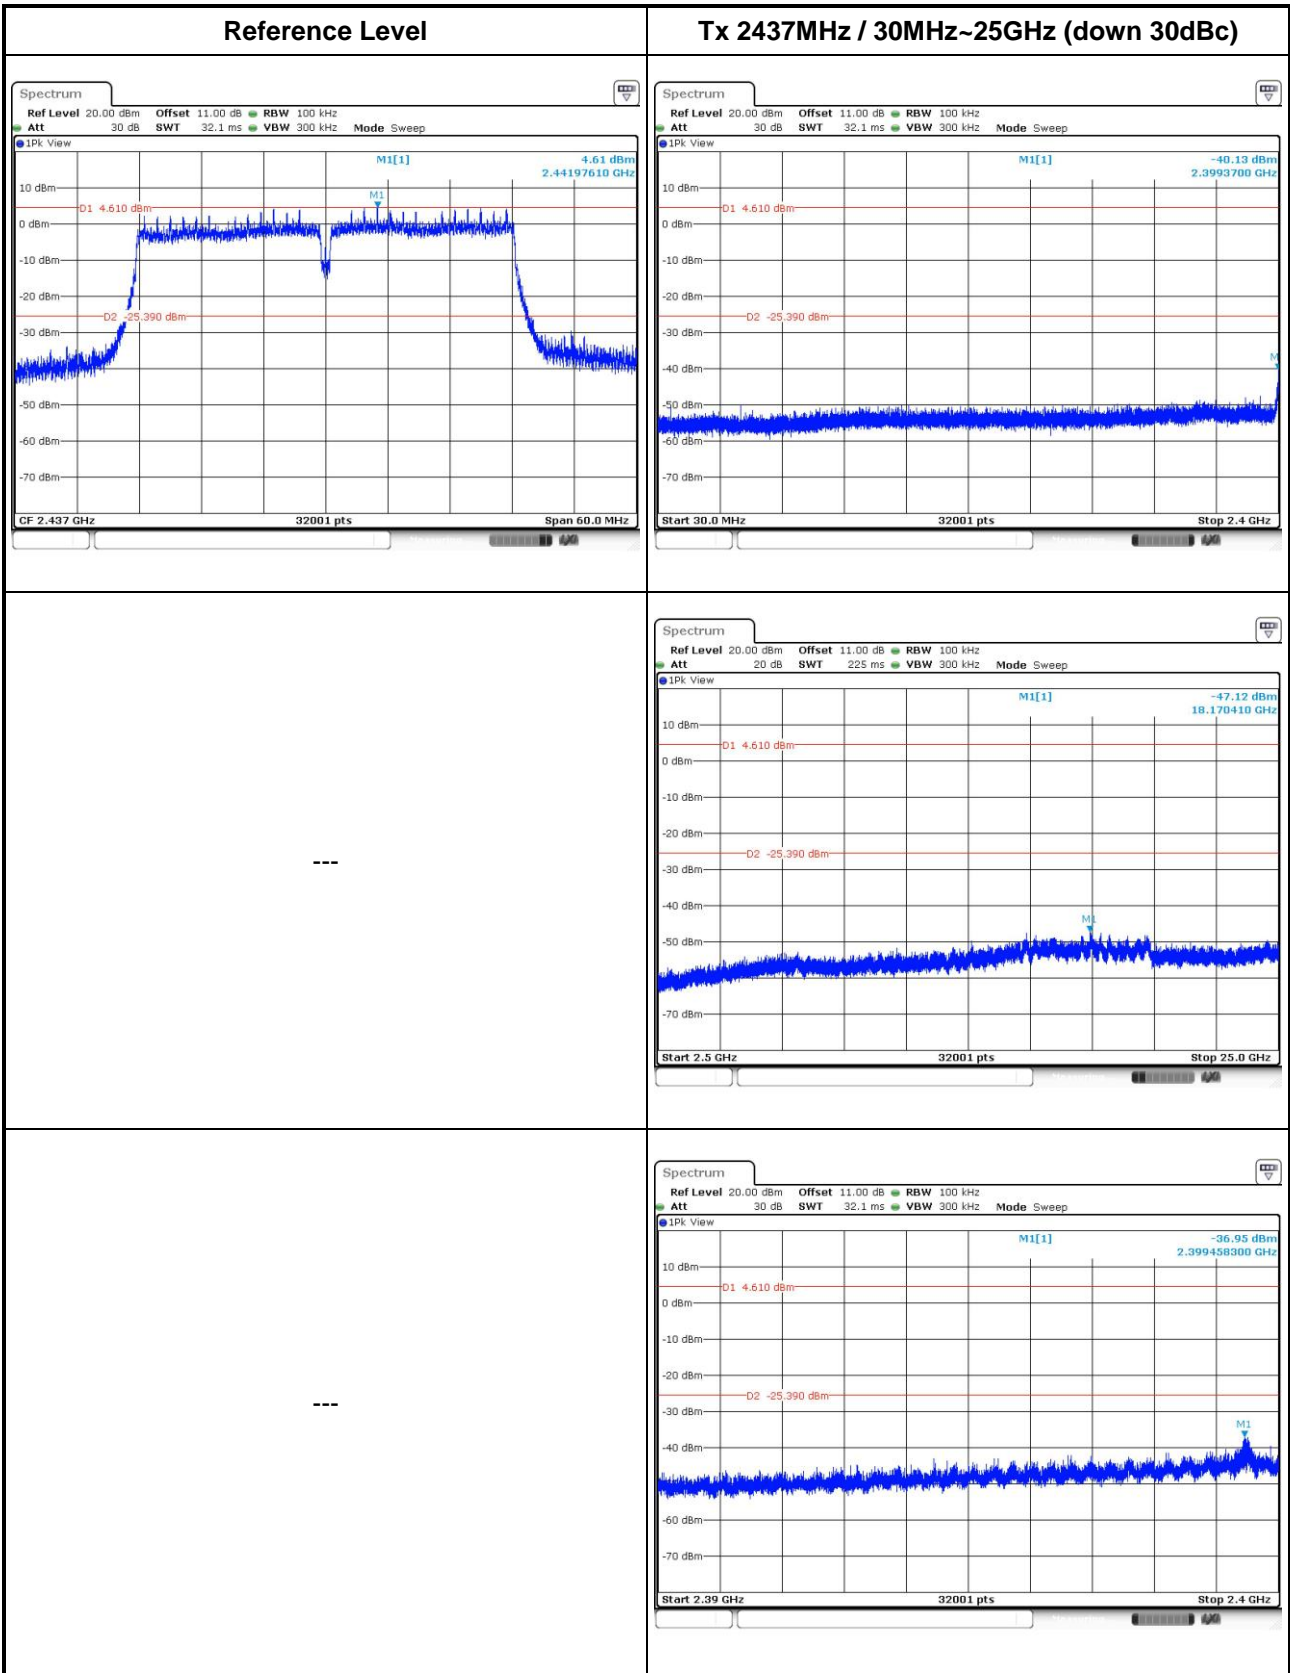





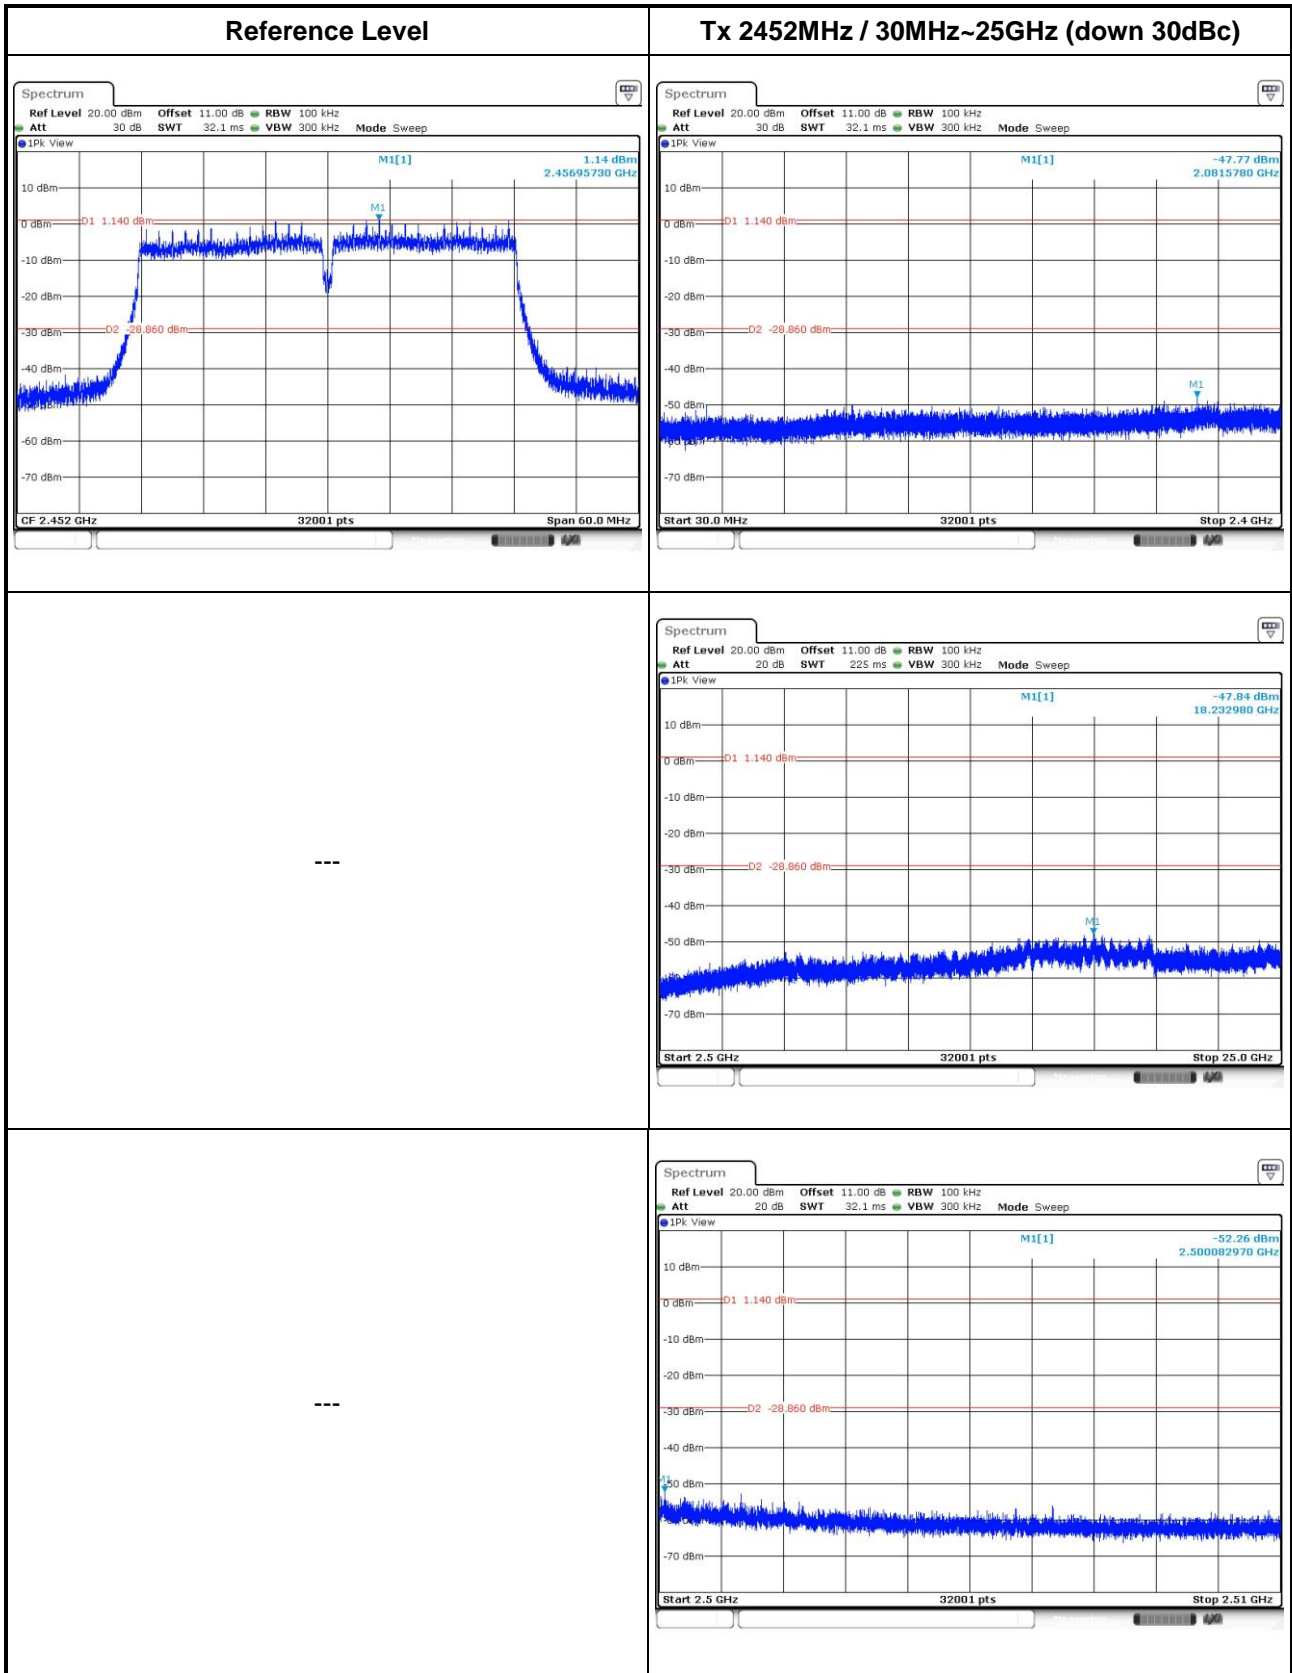


## Beamforming mode


802.11n HT20

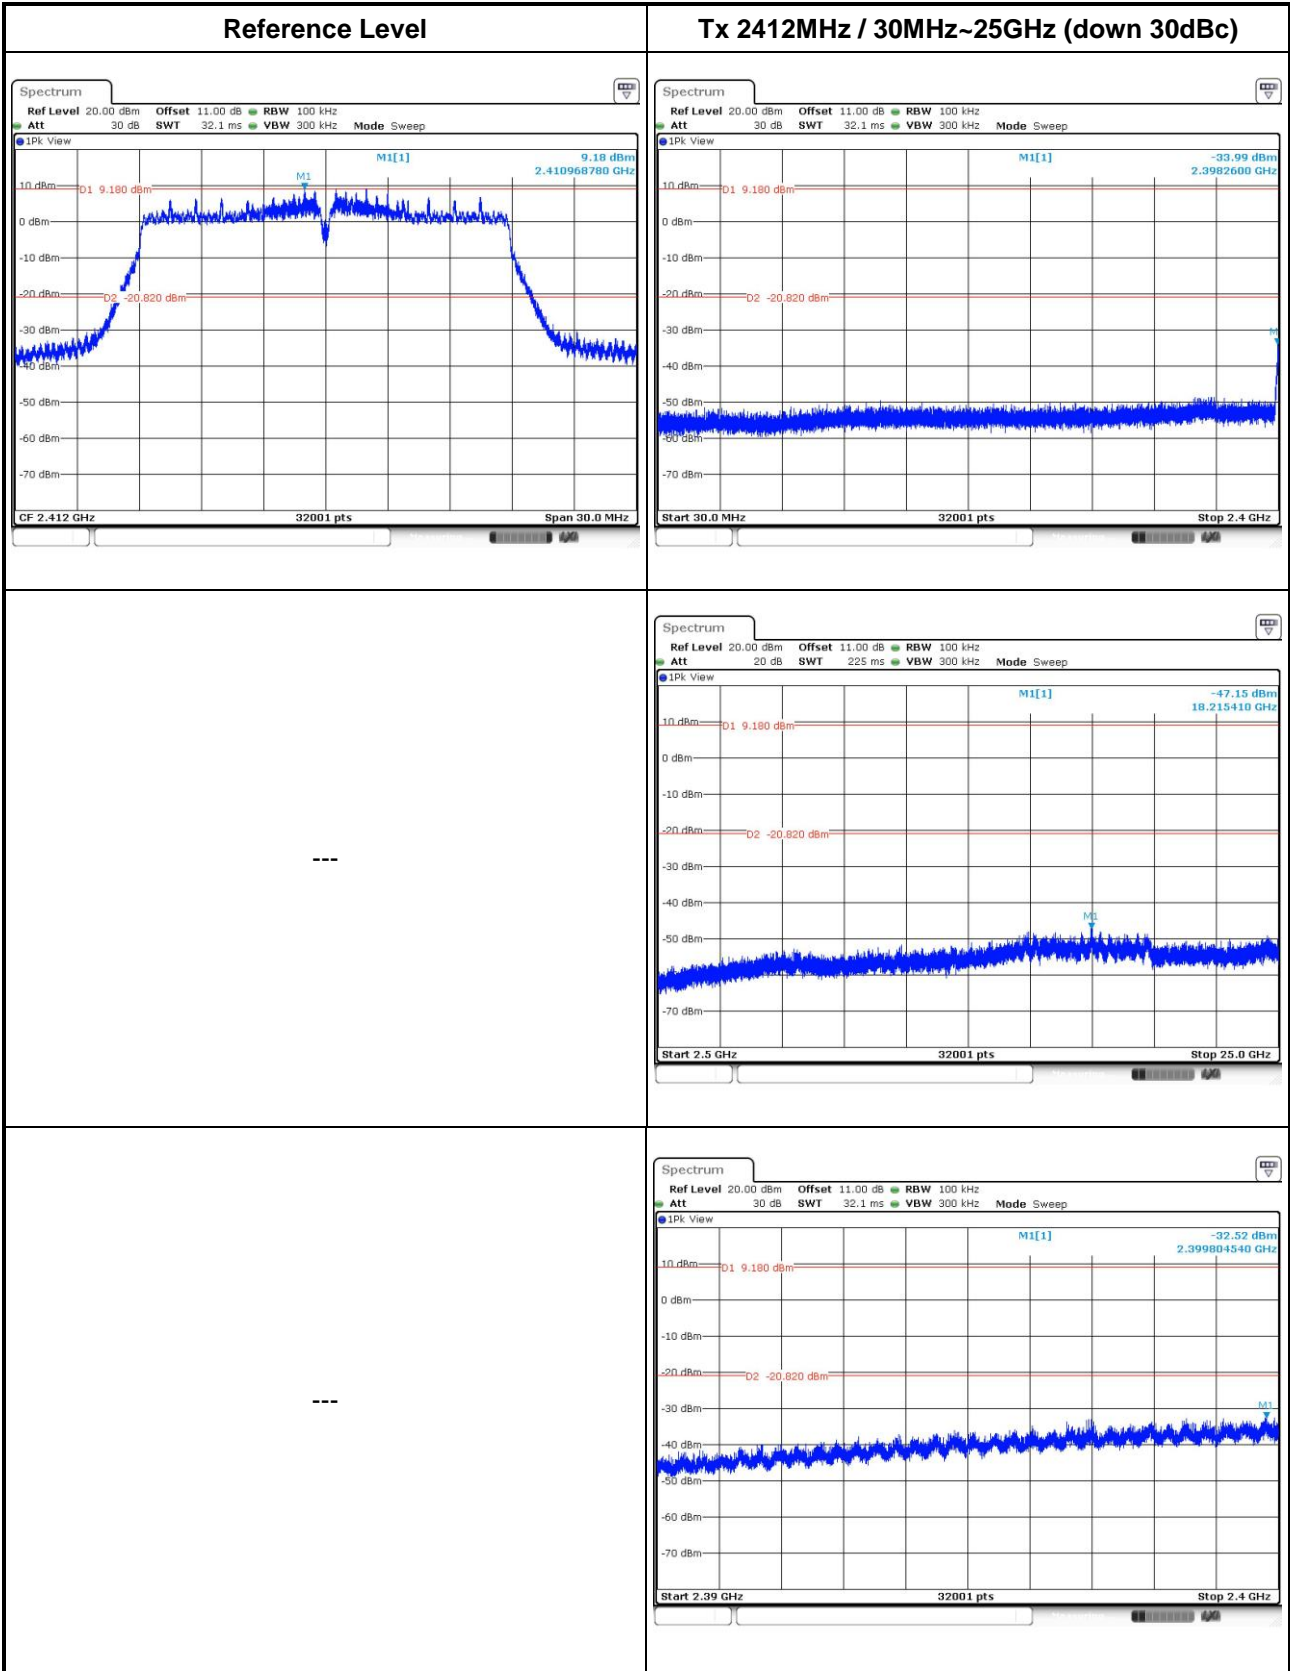


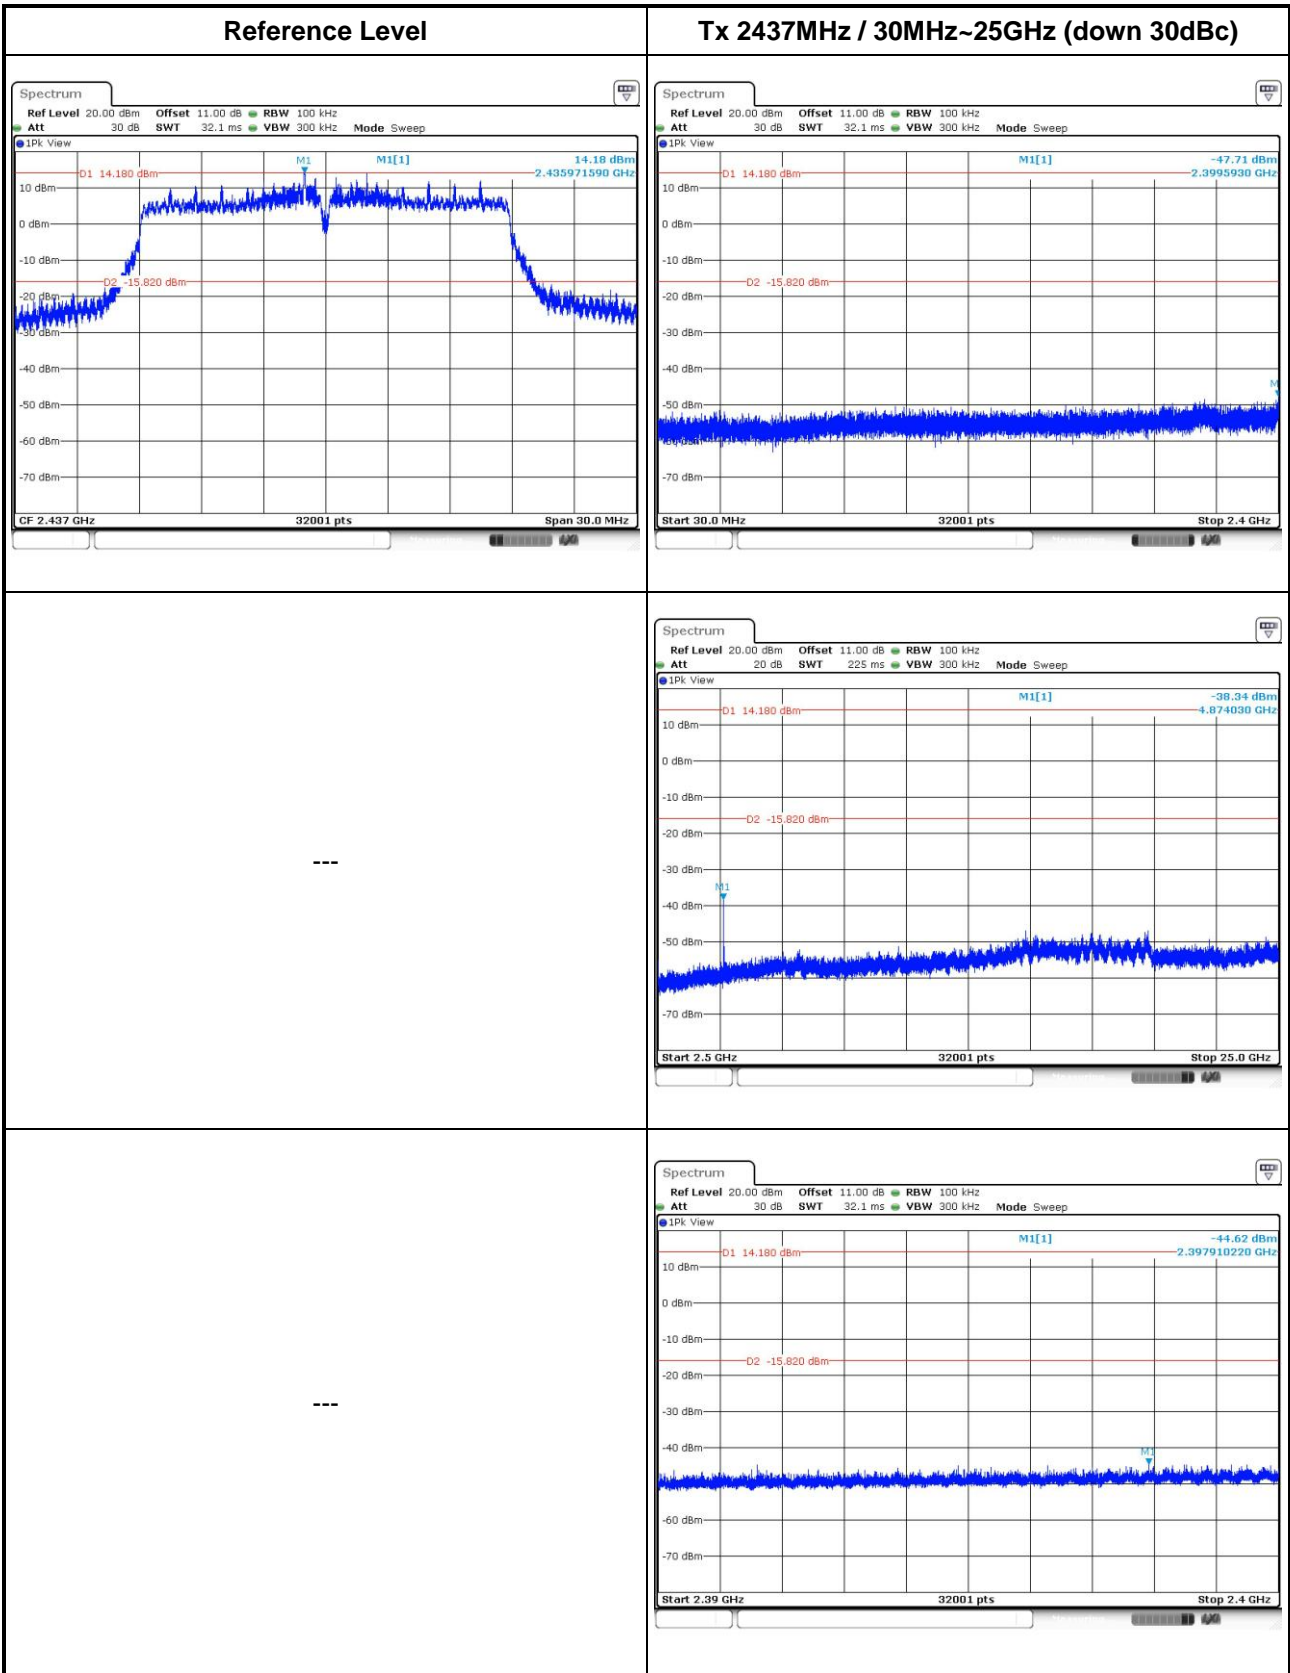

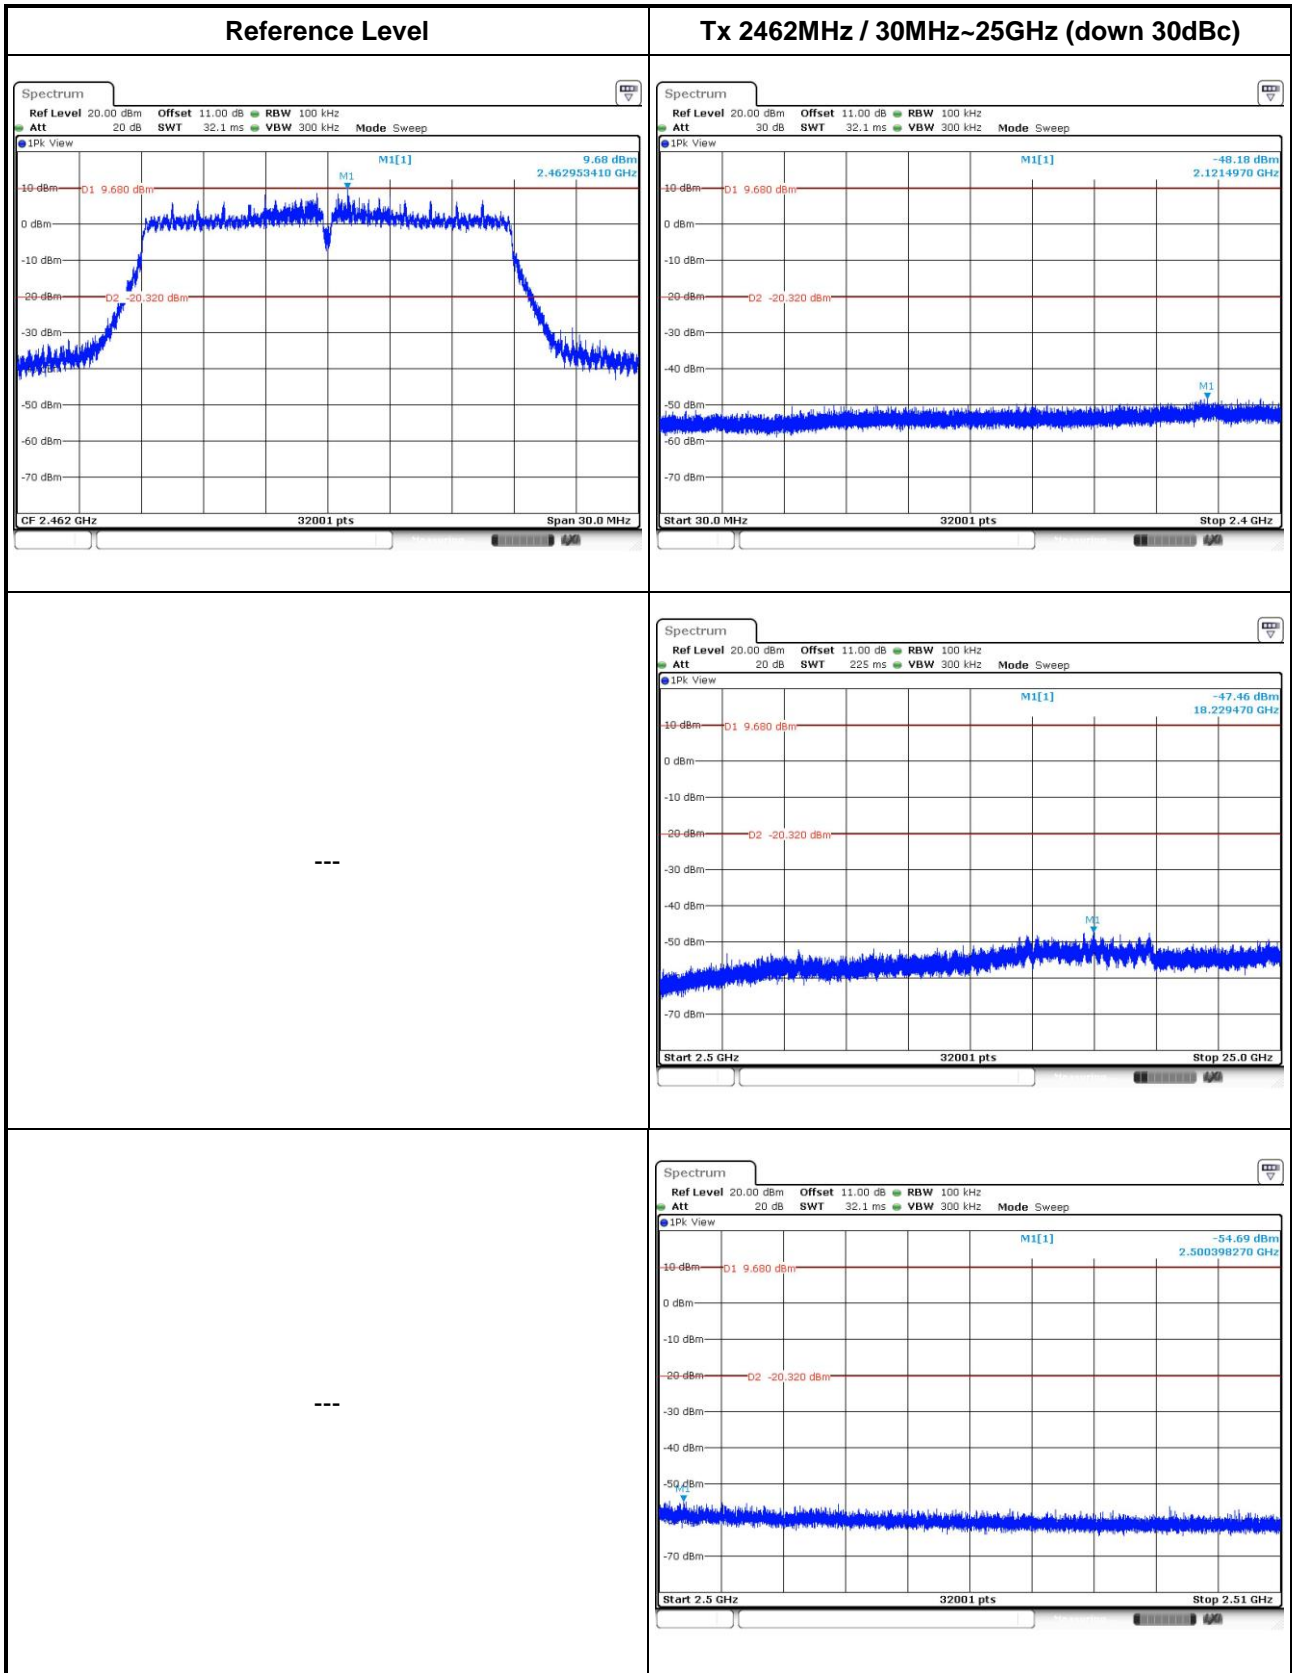


802.11n HT40

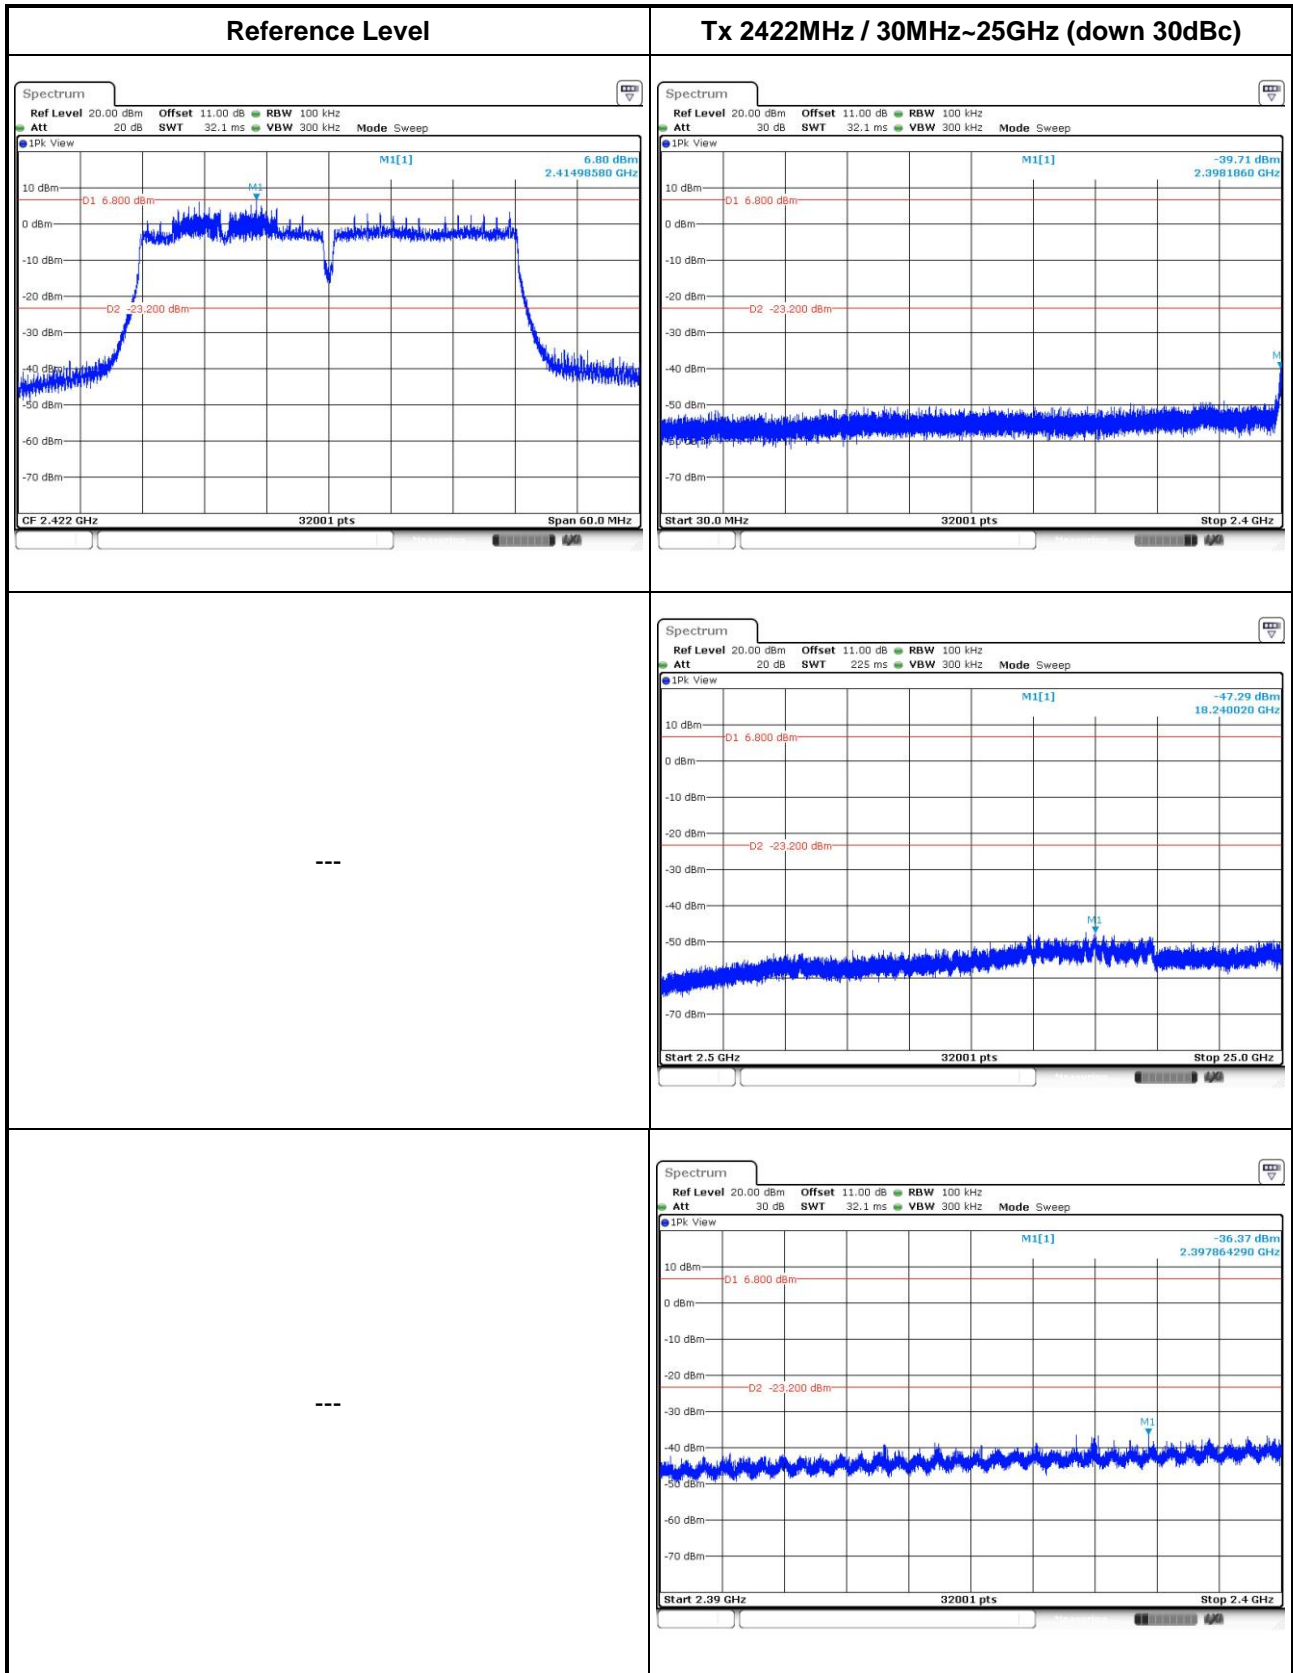

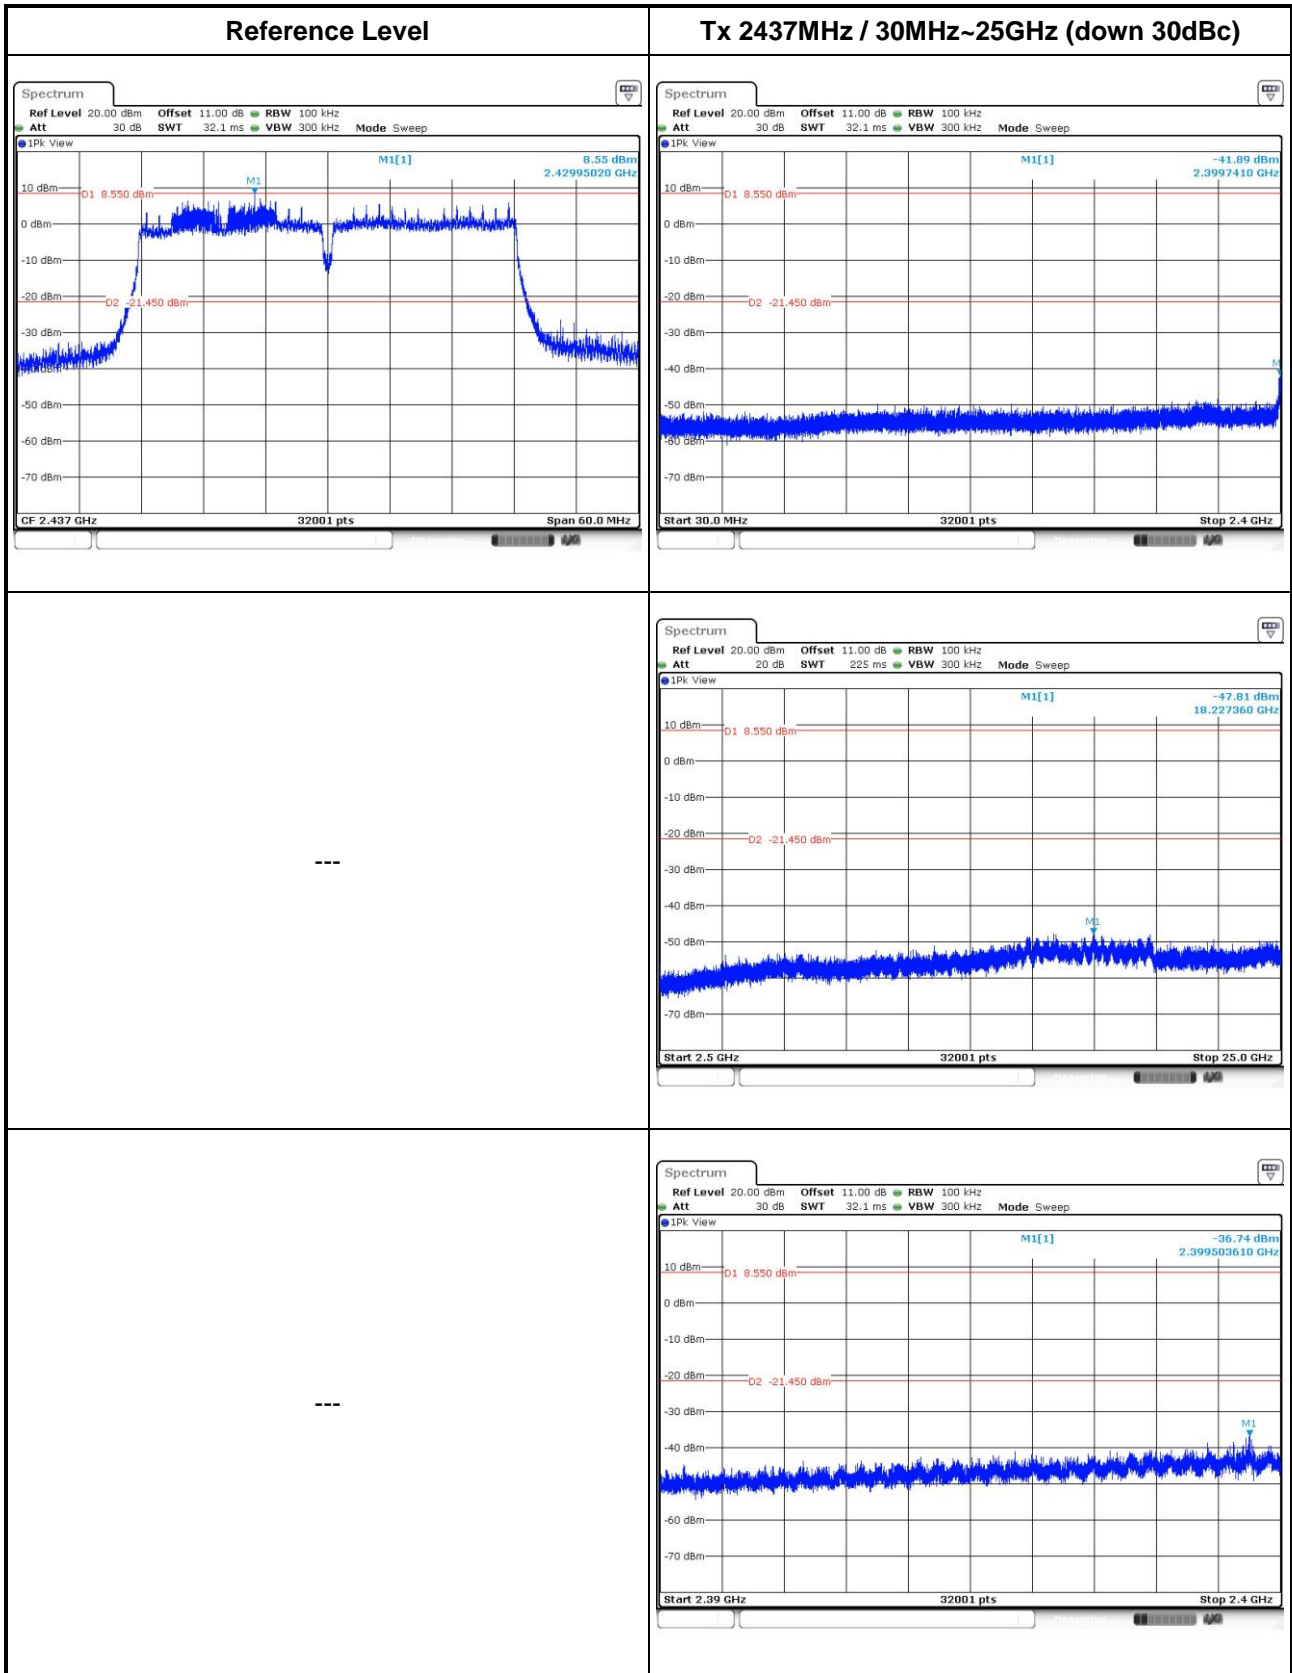



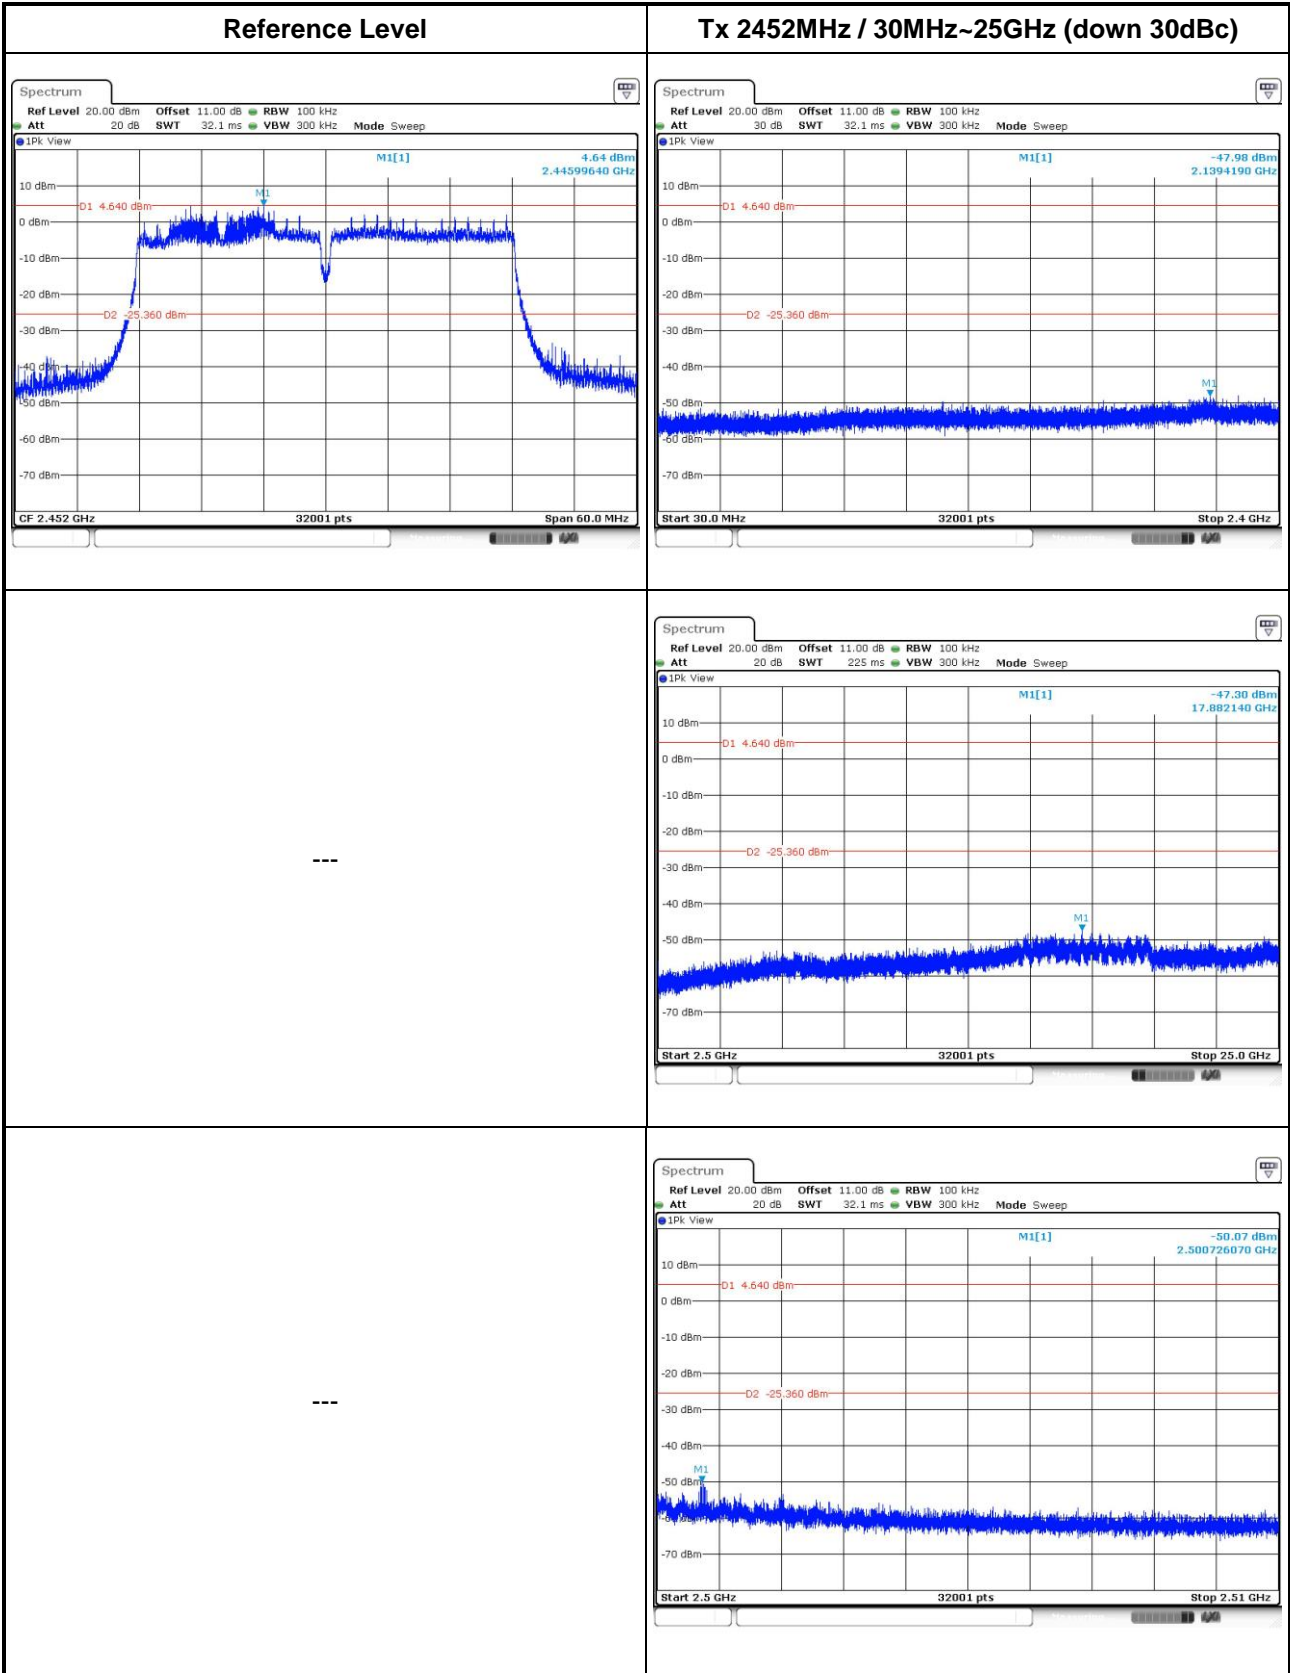

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan,  
R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==