

# FCC Test Report

**FCC ID** : UIDSBX-AC1200P  
**Equipment** : AC1200 Wi-Fi Extender with RipCurrent™ Technology  
**Model No.** : SBX-AC1200P  
**Brand Name** : ARRIS  
**Applicant** : ARRIS Group, Inc.  
**Address** : 3871 Lakefield Drive, Suite 300, Suwanee, Georgia 30024, United States  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Sep. 30, 2015  
**Tested Date** : Oct. 14 ~ Dec. 01, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	8
1.3	Test Setup Chart .....	8
1.4	The Equipment List .....	9
1.5	Test Standards .....	10
1.6	Measurement Uncertainty .....	10
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>11</b>
2.1	Testing Condition .....	11
2.2	The Worst Test Modes and Channel Details .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>12</b>
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth .....	15
3.3	RF Output Power .....	18
3.4	Power Spectral Density .....	20
3.5	Unwanted Emissions into Restricted Frequency Bands .....	22
3.6	Emissions in Non-Restricted Frequency Bands .....	50
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>63</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR593001AC	Rev. 01	Initial issue	Dec. 15, 2015

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.201MHz 44.92 (Margin -8.66dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2390.00MHz 72.99 (Margin -1.01dB) - PK [dBuV/m at 3m]: 2483.50MHz 52.99 (Margin -1.01dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 28.09	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.  
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.  
 Note 4: Only chain 0 can transmit 802.11b signal.

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Operating Frequency (MHz) / Gain (dBi)		
				2400~2483.5	5150~5250	5725~5850
1	617210L2	Dipole	I-pex	3.1	3.34	2.7
2	617210L3	Dipole	I-pex	2.85	2.37	3.44

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	100-240Vac, 50-60Hz, 0.6A Power line: 1m non-shielded without core
--------------------------	---

### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	RJ45 cable	1m non-shielded without core

### 1.1.5 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

### 1.1.6 Test Tool and Duty Cycle

Test Tool	MTool, version: 2.0.2.7		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11b	100.00%	0.00
	11g	98.63%	0.06
	HT20	99.26%	0.03
	HT40	98.64%	0.06


### 1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	66
11b	2437	68
11b	2462	72
11g	2412	56
11g	2437	80
11g	2462	62
HT20	2412	52
HT20	2437	78
HT20	2462	60
HT40	2422	46
HT40	2437	60
HT40	2452	42

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	DoC	RJ45, 10m non-shielded.

## 1.3 Test Setup Chart

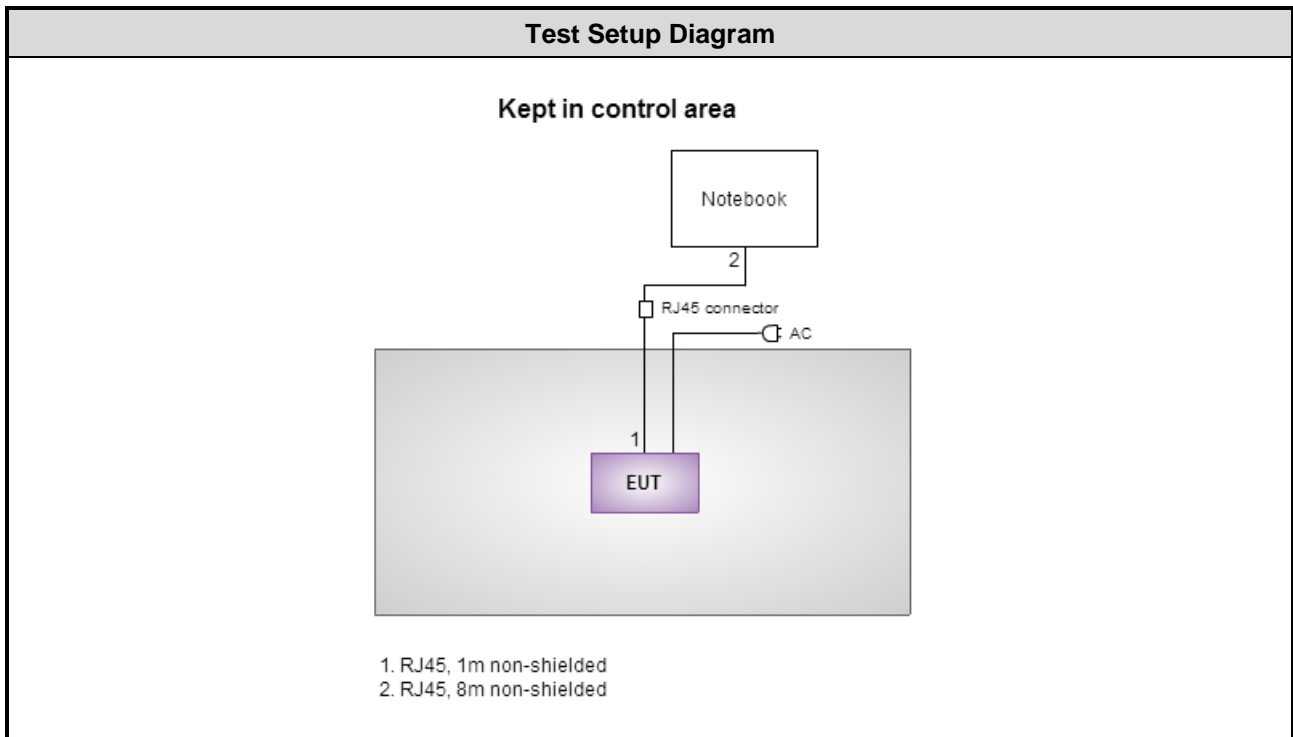



## 1.4 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Nov. 26, 2015				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission below 1GHz test				
<b>Test Site</b>	966 chamber 2 / (03CH02-WS)				
<b>Tested Date</b>	Nov. 24, 2015				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101657	Jan. 15, 2015	Jan. 14, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-523	Nov. 09, 2015	Nov. 08, 2016
Preamplifier	Burgeon	BPA-530	100218	Nov. 03, 2015	Nov. 02, 2016
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 16, 2014	Dec. 15, 2015
LF cable 10M	EMCC	CFD400-E	CFD400-001	Jun. 17, 2015	Jun. 16, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission above 1GHz test				
<b>Test Site</b>	966 chamber 2 / (03CH02-WS)				
<b>Tested Date</b>	Oct. 14, 2015				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101499	Dec. 31, 2014	Dec. 30, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Oct. 07, 2015	Oct. 06, 2016
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Agilent	83017A	MY39501309	Sep. 22, 2015	Sep. 21, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 16, 2014	Dec. 15, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 16, 2014	Dec. 15, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 16, 2014	Dec. 15, 2015
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Nov. 27 ~ Dec. 01, 2015				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 DTS Meas Guidance v03r03

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.62 dB
Radiated emission > 1GHz	±5.60 dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	21°C / 43%	Peter Lin
Radiated Emissions	03CH02-WS	21-23°C / 61-63%	Anderson Hung Morgan Chen
RF Conducted	TH01-WS	21°C / 64%	Alex Huang

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-2

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	HT20	2437	MCS 0	---
Radiated Emissions ≤1GHz	HT20	2437	MCS 0	---
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	---
Maximum Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

**NOTE:**

- The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions


<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Line		

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.153	41.04	55.82	-14.78	40.91	0.11	0.02	Average
2	0.153	51.01	65.82	-14.81	50.88	0.11	0.02	QP
3	0.201	44.92	53.58	-8.66	44.79	0.11	0.02	Average
4	0.201	46.67	63.58	-16.91	46.54	0.11	0.02	QP
5	0.406	34.37	47.73	-13.36	34.21	0.13	0.03	Average
6	0.406	41.56	57.73	-16.17	41.40	0.13	0.03	QP
7	0.524	32.79	46.00	-13.21	32.62	0.13	0.04	Average
8	0.524	40.33	56.00	-15.67	40.16	0.13	0.04	QP
9	1.035	23.00	46.00	-23.00	22.81	0.13	0.06	Average
10	1.035	39.13	56.00	-16.87	38.94	0.13	0.06	QP
11	4.574	17.47	46.00	-28.53	17.14	0.20	0.13	Average
12	4.574	30.50	56.00	-25.50	30.17	0.20	0.13	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Neutral		

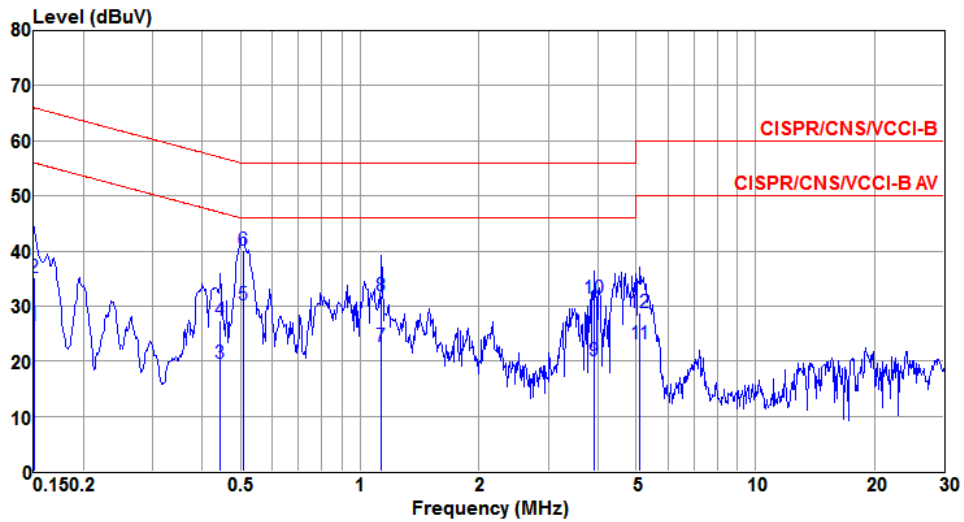

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.150	26.34	56.00	-29.66	26.19	0.13	0.02	Average
2	0.150	35.14	66.00	-30.86	34.99	0.13	0.02	QP
3	0.444	19.53	46.98	-27.45	19.36	0.14	0.03	Average
4	0.444	27.35	56.98	-29.63	27.18	0.14	0.03	QP
5	0.507	30.19	46.00	-15.81	30.01	0.14	0.04	Average
6	0.507	40.18	56.00	-15.82	40.00	0.14	0.04	QP
7	1.135	22.57	46.00	-23.43	22.37	0.14	0.06	Average
8	1.135	31.84	56.00	-24.16	31.64	0.14	0.06	QP
9	3.922	19.98	46.00	-26.02	19.69	0.17	0.12	Average
10	3.922	31.28	56.00	-24.72	30.99	0.17	0.12	QP
11	5.112	23.15	50.00	-26.85	22.82	0.20	0.13	Average
12	5.112	28.92	60.00	-31.08	28.59	0.20	0.13	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth


1. Set resolution bandwidth (RBW) = 1 MHz, Video bandwidth = 3 MHz.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup




### 3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	6dB Bandwidth (MHz)				Limit (kHz)
			Chain 0	Chain 1	Chain 2	Chain 3	
11b	1	2412	8.06	---	---	---	500
11b	1	2437	8.00	---	---	---	500
11b	1	2462	7.59	---	---	---	500
11g	2	2412	15.42	14.03	---	---	500
11g	2	2437	15.01	14.78	---	---	500
11g	2	2462	15.07	15.07	---	---	500
HT20	2	2412	13.80	15.13	---	---	500
HT20	2	2437	15.07	14.67	---	---	500
HT20	2	2462	14.38	15.07	---	---	500
HT40	2	2422	35.13	35.13	---	---	500
HT40	2	2437	35.13	36.41	---	---	500
HT40	2	2452	35.13	35.71	---	---	500

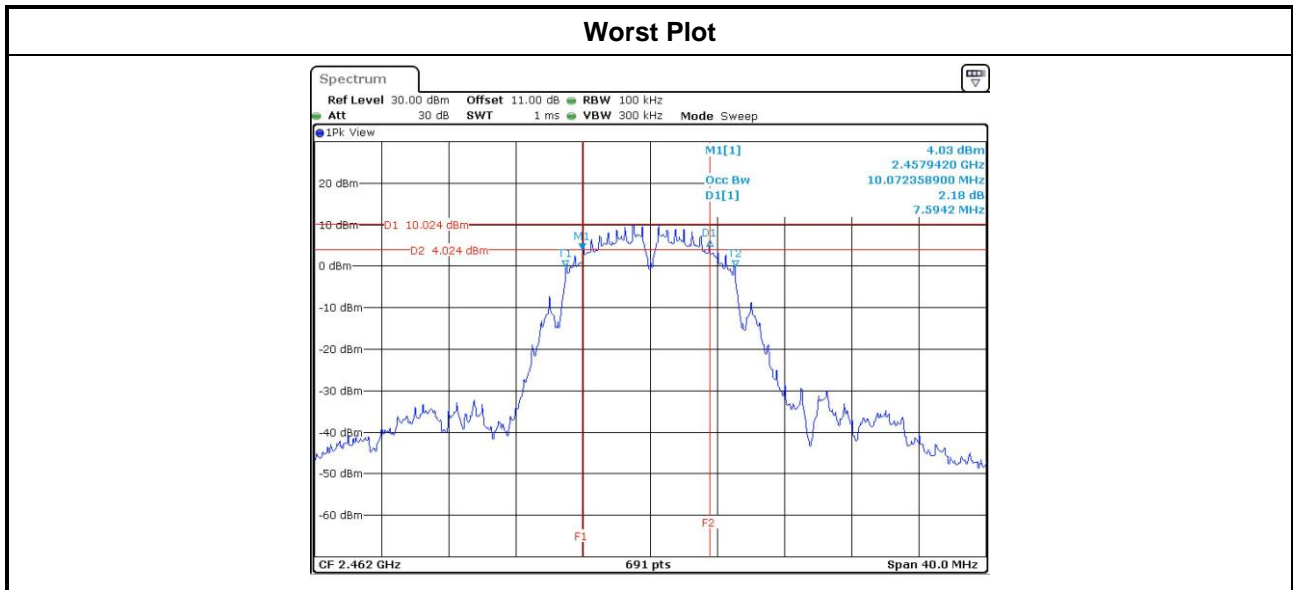



Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Occupied Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3
11b	1	2412	10.15	---	---	---
11b	1	2437	10.13	---	---	---
11b	1	2462	10.18	---	---	---
11g	2	2412	16.40	16.41	---	---
11g	2	2437	17.15	17.03	---	---
11g	2	2462	16.43	16.41	---	---
HT20	2	2412	17.41	17.45	---	---
HT20	2	2437	17.63	17.60	---	---
HT20	2	2462	17.41	17.45	---	---
HT40	2	2422	36.48	36.48	---	---
HT40	2	2437	36.44	36.50	---	---
HT40	2	2452	36.40	36.50	---	---

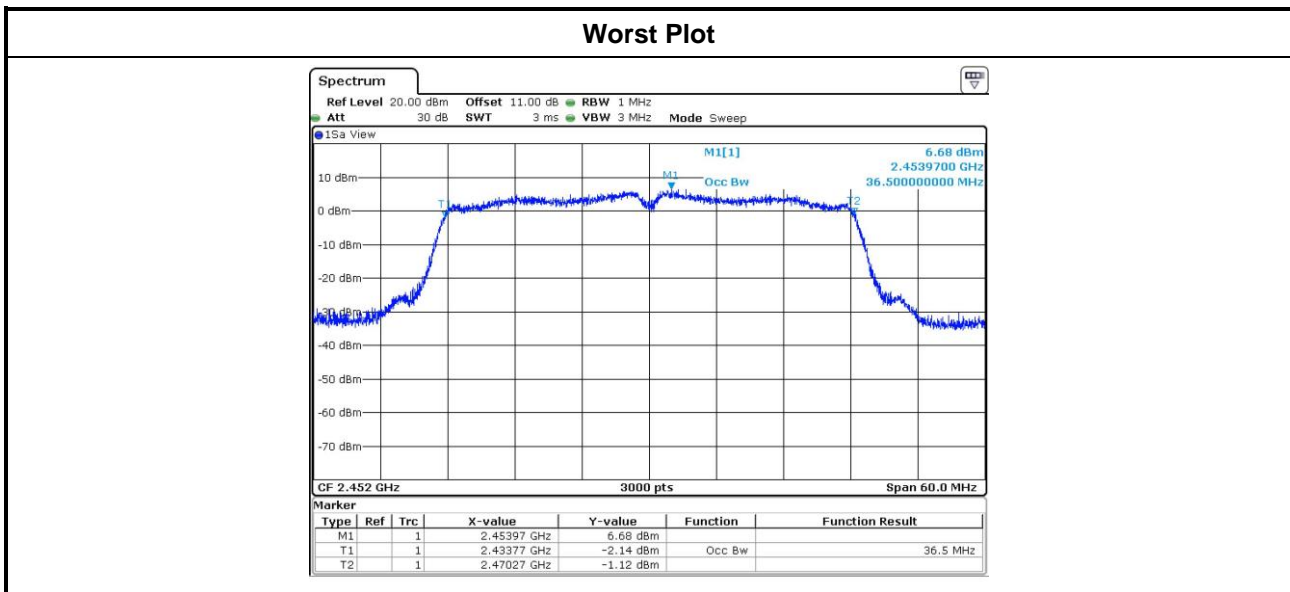

## 3.3 RF Output Power

### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.


- Antenna gain  $\leq$  6dBi, no any corresponding reduction is in output power limit.
- Antenna gain  $>$  6dBi
  - Non Fixed, point to point operations.  
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
  - Fixed, point to point operations  
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

### 3.3.2 Test Procedures

- Maximum Peak Conducted Output Power
  - Spectrum analyzer**
    1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
    2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
    3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
  - Power meter**
    1. A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power ( For reference only )
  - Power meter**
    1. A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.3.3 Test Setup

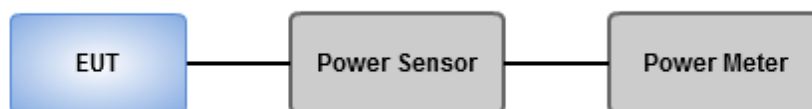

### 3.3.4 Test Result of Maximum Output Power

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Peak conducted Output Power (dBm)							Ant. Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3	Total Power (mW)	Total Power (dBm)	Limit (dBm)			
11b	1	2412	20.37	---	---	---	108.893	20.37	30.00	3.10	23.47	36.00
11b	1	2437	21.6	---	---	---	144.544	21.60	30.00	3.10	24.70	36.00
11b	1	2462	22.06	---	---	---	160.694	22.06	30.00	3.10	25.16	36.00
11g	2	2412	25.07	23.28	---	---	534.180	27.28	30.00	3.10	30.38	36.00
11g	2	2437	25.93	23.38	---	---	609.513	27.85	30.00	3.10	30.95	36.00
11g	2	2462	23.43	23.64	---	---	451.499	26.55	30.00	3.10	29.65	36.00
HT20	2	2412	24.88	24.12	---	---	565.836	27.53	30.00	3.10	30.63	36.00
HT20	2	2437	25.83	24.18	---	---	644.643	<b>28.09</b>	30.00	3.10	31.19	36.00
HT20	2	2462	24.63	24.01	---	---	542.170	27.34	30.00	3.10	30.44	36.00
HT40	2	2422	22.33	21.56	---	---	314.220	24.97	30.00	3.10	28.07	36.00
HT40	2	2437	24.01	23.26	---	---	463.604	26.66	30.00	3.10	29.76	36.00
HT40	2	2452	21.07	20.85	---	---	249.557	23.97	30.00	3.10	27.07	36.00

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted (Average) Output Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11b	1	2412	17.25	---	---	---	53.088	17.25	---
11b	1	2437	17.94	---	---	---	62.230	17.94	---
11b	1	2462	18.45	---	---	---	69.984	18.45	---
11g	2	2412	15.02	13.43	---	---	53.798	17.31	---
11g	2	2437	20.78	18.96	---	---	198.379	<b>22.97</b>	---
11g	2	2462	15.78	14.5	---	---	66.028	18.20	---
HT20	2	2412	15.78	14.53	---	---	66.223	18.21	---
HT20	2	2437	20.12	18.48	---	---	173.271	22.39	---
HT20	2	2462	15.12	14.21	---	---	58.872	17.70	---
HT40	2	2422	12.44	11.67	---	---	32.228	15.08	---
HT40	2	2437	15.02	14.25	---	---	58.376	17.66	---
HT40	2	2452	11.19	10.51	---	---	24.398	13.87	---

Note: Conducted average output power is for reference only.

## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
  1. Set the RBW = 3kHz, VBW = 10kHz.
  2. Detector = Peak, Sweep time = auto couple.
  3. Trace mode = max hold, allow trace to fully stabilize.
  4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
  1. Set the RBW = 100kHz, VBW = 300 kHz.
  2. Detector = RMS, Sweep time = auto couple.
  3. Set the sweep time to:  $\geq 10 \times$  (number of measurement points in sweep)  $\times$  (maximum data rate per stream).
  4. Perform the measurement over a single sweep.
  5. Use the peak marker function to determine the maximum amplitude level.


### 3.4.3 Test Setup

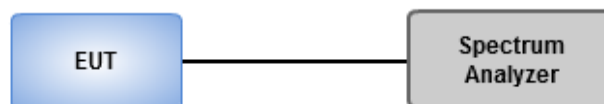

### 3.4.4 Test Result of Power Spectral Density

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	1	2412	-6.09	8.00
11b	1	2437	-6.11	8.00
11b	1	2462	-1.56	8.00
11g	2	2412	-7.94	8.00
11g	2	2437	-2.18	8.00
11g	2	2462	-6.79	8.00
HT20	2	2412	-8.84	8.00
HT20	2	2437	-2.25	8.00
HT20	2	2462	-7.44	8.00
HT40	2	2422	-12.30	8.00
HT40	2	2437	-10.00	8.00
HT40	2	2452	-13.93	8.00

Note: Test result for g / HT20 / HT40 is bin-by-bin summing measured value of each TX port.

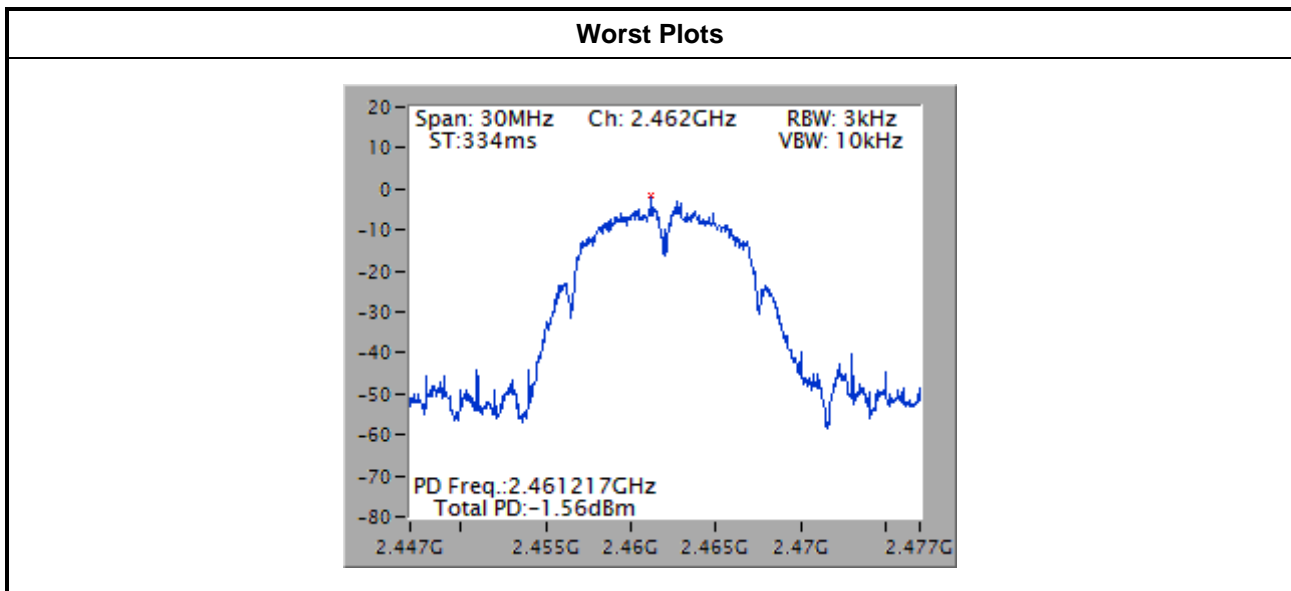

## 3.5 Unwanted Emissions into Restricted Frequency Bands

### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup


#### Radiated Emissions below 1 GHz

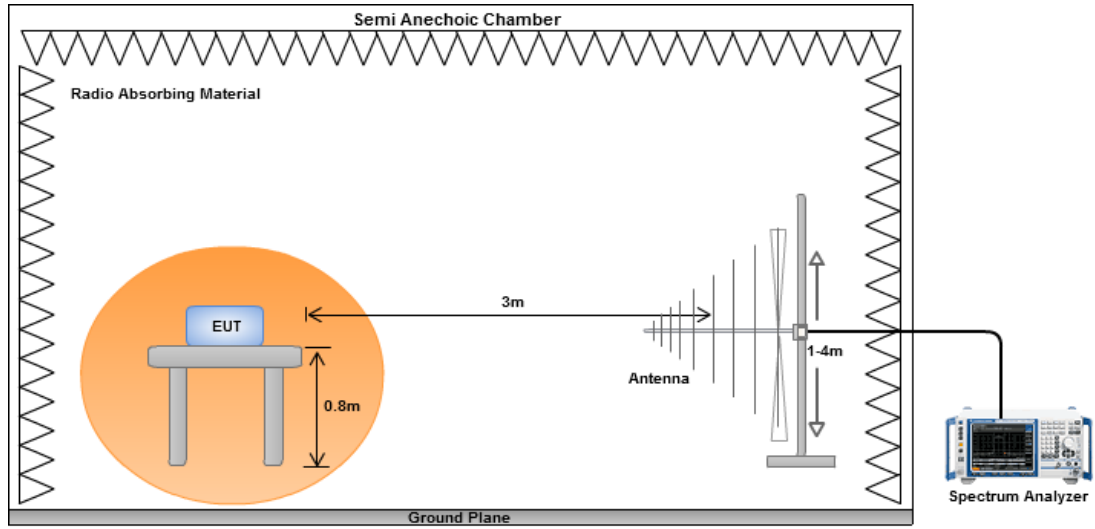

#### Radiated Emissions above 1 GHz

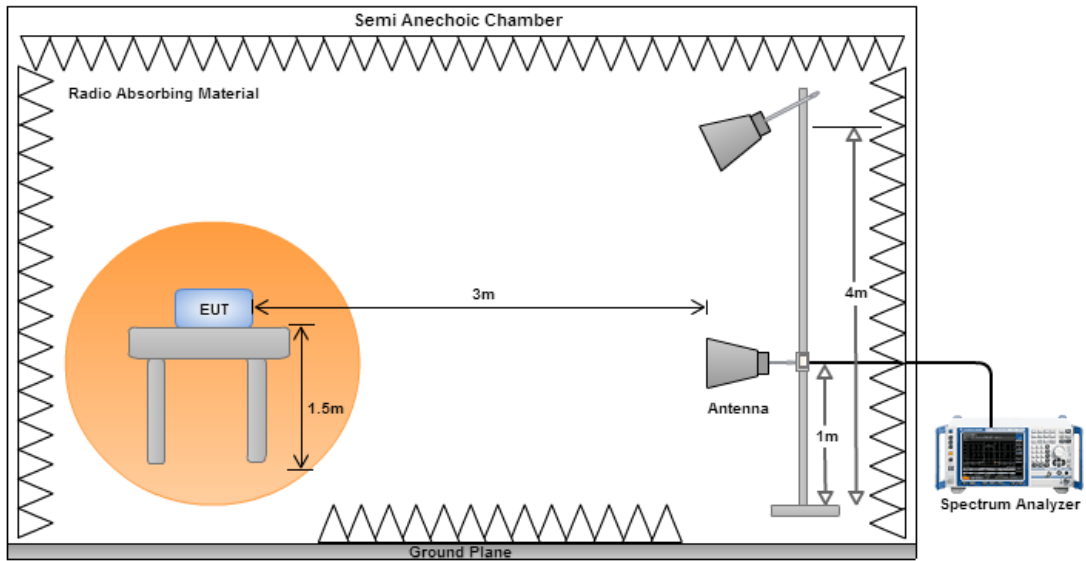


### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

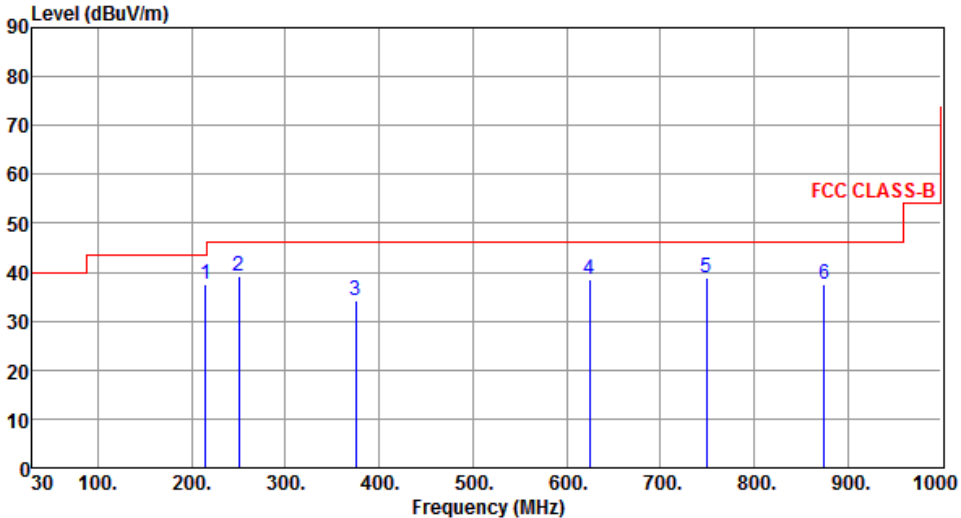Modulation	HT20	Test Freq. (MHz)	2437																																																																								
Polarization	Horizontal																																																																										
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is constant at 46 dBuV/m from 100 MHz to 1000 MHz. Six blue vertical lines indicate emission peaks at frequencies 215.27, 250.19, 375.32, 624.61, 749.74, and 874.87 MHz. The emission levels are 37.59, 39.16, 34.05, 38.66, 38.80, and 37.64 dBuV/m respectively. The margins relative to the 46 dBuV/m limit are -5.91, -6.84, -11.95, -7.34, -7.20, and -8.36 dB.</p>																																																																											
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>215.27</td> <td>37.59</td> <td>43.50</td> <td>-5.91</td> <td>51.94</td> <td>-14.35</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>250.19</td> <td>39.16</td> <td>46.00</td> <td>-6.84</td> <td>51.95</td> <td>-12.79</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>375.32</td> <td>34.05</td> <td>46.00</td> <td>-11.95</td> <td>43.38</td> <td>-9.33</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>624.61</td> <td>38.66</td> <td>46.00</td> <td>-7.34</td> <td>42.99</td> <td>-4.33</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>749.74</td> <td>38.80</td> <td>46.00</td> <td>-7.20</td> <td>41.31</td> <td>-2.51</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>874.87</td> <td>37.64</td> <td>46.00</td> <td>-8.36</td> <td>38.61</td> <td>-0.97</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	215.27	37.59	43.50	-5.91	51.94	-14.35	Peak	---	2	250.19	39.16	46.00	-6.84	51.95	-12.79	Peak	---	3	375.32	34.05	46.00	-11.95	43.38	-9.33	Peak	---	4	624.61	38.66	46.00	-7.34	42.99	-4.33	Peak	---	5	749.74	38.80	46.00	-7.20	41.31	-2.51	Peak	---	6	874.87	37.64	46.00	-8.36	38.61	-0.97	Peak	---		
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																			
1	215.27	37.59	43.50	-5.91	51.94	-14.35	Peak	---																																																																			
2	250.19	39.16	46.00	-6.84	51.95	-12.79	Peak	---																																																																			
3	375.32	34.05	46.00	-11.95	43.38	-9.33	Peak	---																																																																			
4	624.61	38.66	46.00	-7.34	42.99	-4.33	Peak	---																																																																			
5	749.74	38.80	46.00	-7.20	41.31	-2.51	Peak	---																																																																			
6	874.87	37.64	46.00	-8.36	38.61	-0.97	Peak	---																																																																			
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor, cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																											



<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

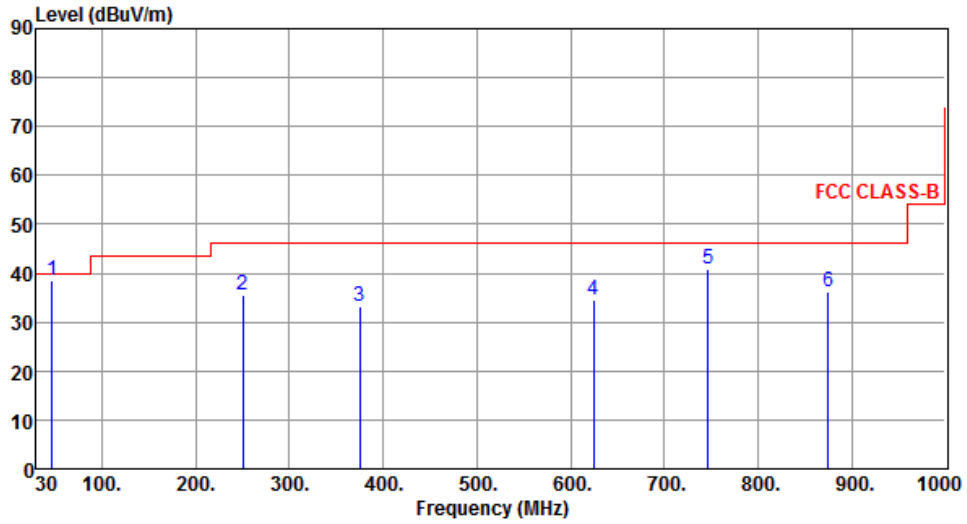

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	38.52	40.00	-1.48	50.12	-11.60	QP	---	---
2	250.19	35.39	46.00	-10.61	48.18	-12.79	Peak	---	---
3	375.32	33.32	46.00	-12.68	42.65	-9.33	Peak	---	---
4	624.61	34.44	46.00	-11.56	38.77	-4.33	Peak	---	---
5	746.83	40.81	46.00	-5.19	43.36	-2.55	Peak	---	---
6	874.87	36.21	46.00	-9.79	37.18	-0.97	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

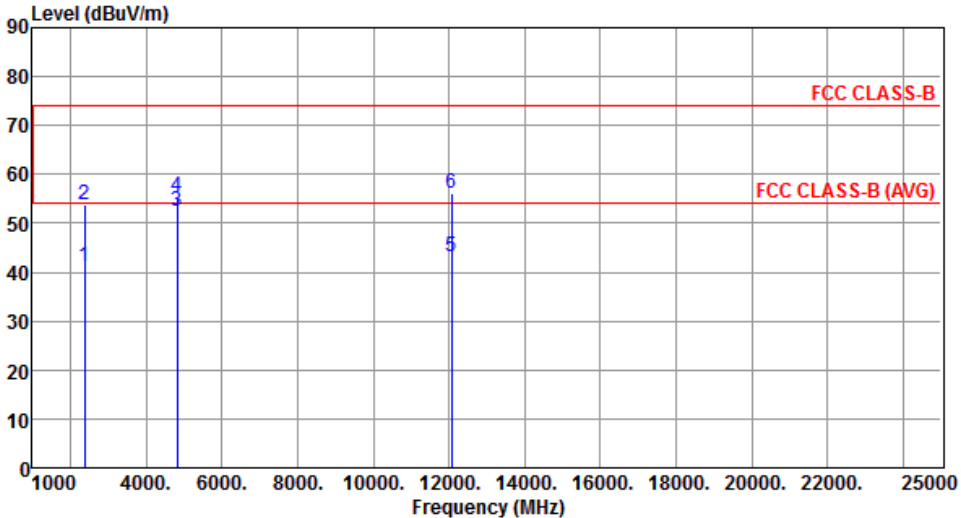Modulation	11b	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.07	54.00	-12.93	43.77	-2.70	Average	258	0
2	2390.00	53.67	74.00	-20.33	56.37	-2.70	Peak	258	0
3	4824.00	52.61	54.00	-1.39	47.64	4.97	Average	361	22
4	4824.00	55.44	74.00	-18.56	50.47	4.97	Peak	361	22
5	12060.00	43.20	54.00	-10.80	27.98	15.22	Average	330	157
6	12060.00	56.00	74.00	-18.00	40.78	15.22	Peak	330	157
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

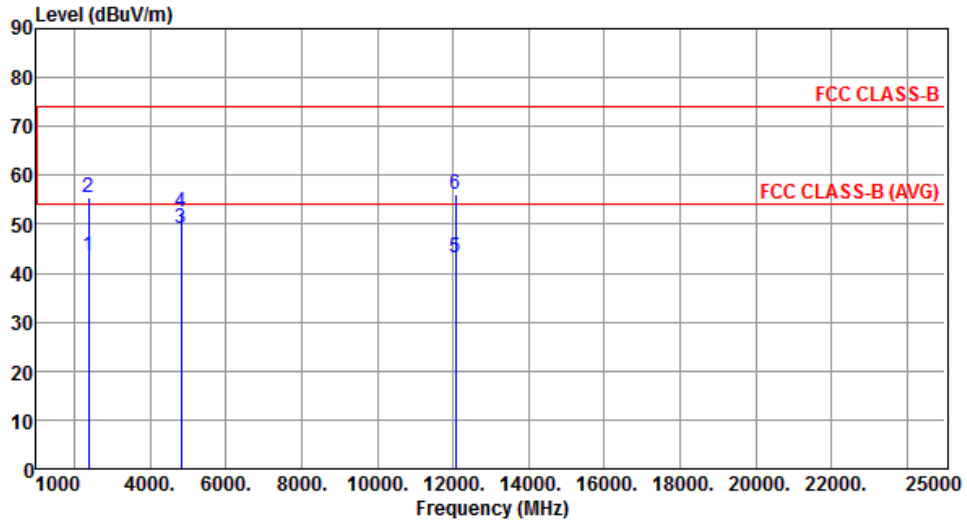


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	43.51	54.00	-10.49	46.21	-2.70	Average	184	12
2	2390.00	55.48	74.00	-18.52	58.18	-2.70	Peak	184	12
3	4824.00	49.29	54.00	-4.71	44.32	4.97	Average	152	330
4	4824.00	52.40	74.00	-21.60	47.43	4.97	Peak	152	330
5	12060.00	43.17	54.00	-10.83	27.95	15.22	Average	260	322
6	12060.00	55.99	74.00	-18.01	40.77	15.22	Peak	260	322

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

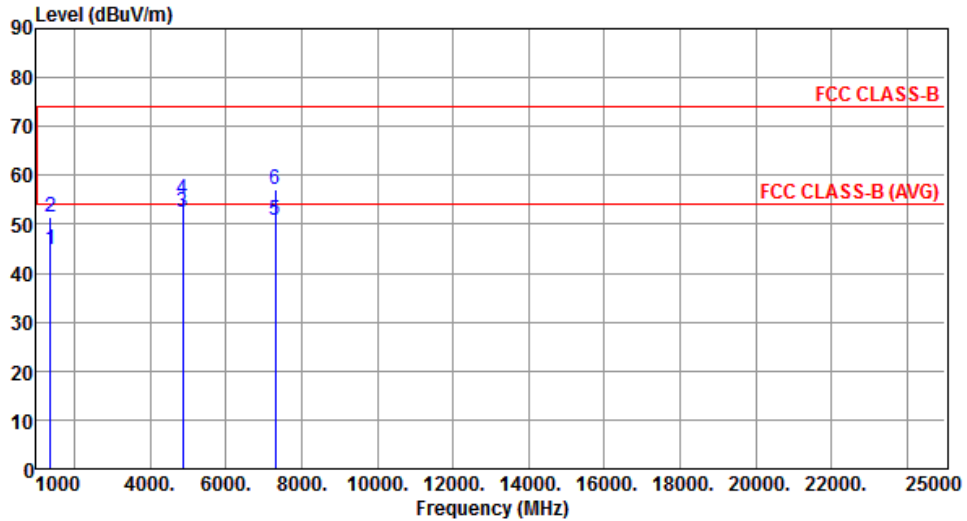


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1375.00	44.84	54.00	-9.16	51.24	-6.40	Average	195	111
2	1375.00	51.57	74.00	-22.43	57.97	-6.40	Peak	195	111
3	4874.00	52.62	54.00	-1.38	47.54	5.08	Average	267	14
4	4874.00	55.21	74.00	-18.79	50.13	5.08	Peak	267	14
5	7311.00	50.91	54.00	-3.09	41.02	9.89	Average	375	6
6	7311.00	57.00	74.00	-17.00	47.11	9.89	Peak	375	6

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

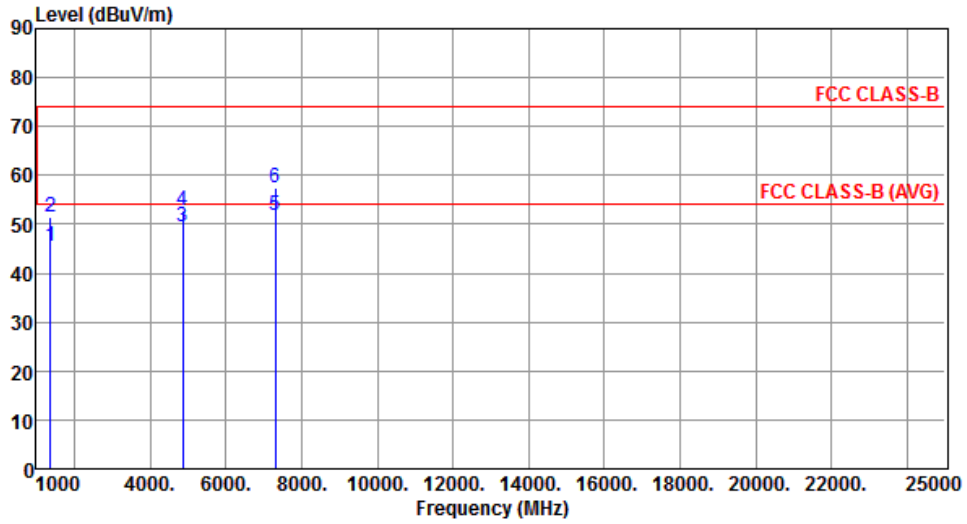


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1375.00	45.50	54.00	-8.50	51.90	-6.40	Average	154	15
2	1375.00	51.52	74.00	-22.48	57.92	-6.40	Peak	154	15
3	4874.00	49.59	54.00	-4.41	44.51	5.08	Average	199	331
4	4874.00	52.65	74.00	-21.35	47.57	5.08	Peak	199	331
5	7311.00	51.69	54.00	-2.31	41.80	9.89	Average	237	331
6	7311.00	57.35	74.00	-16.65	47.46	9.89	Peak	237	331

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

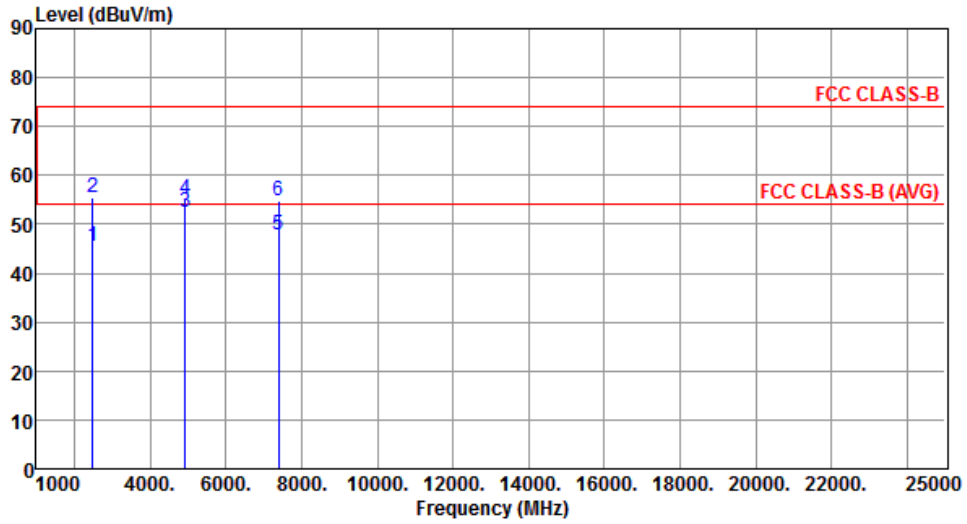


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	45.43	54.00	-8.57	47.80	-2.37	Average	166	4
2	2483.50	55.55	74.00	-18.45	57.92	-2.37	Peak	166	4
3	4924.00	52.51	54.00	-1.49	47.31	5.20	Average	245	22
4	4924.00	55.21	74.00	-18.79	50.01	5.20	Peak	245	22
5	7386.00	47.67	54.00	-6.33	37.61	10.06	Average	251	45
6	7386.00	54.93	74.00	-19.07	44.87	10.06	Peak	251	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

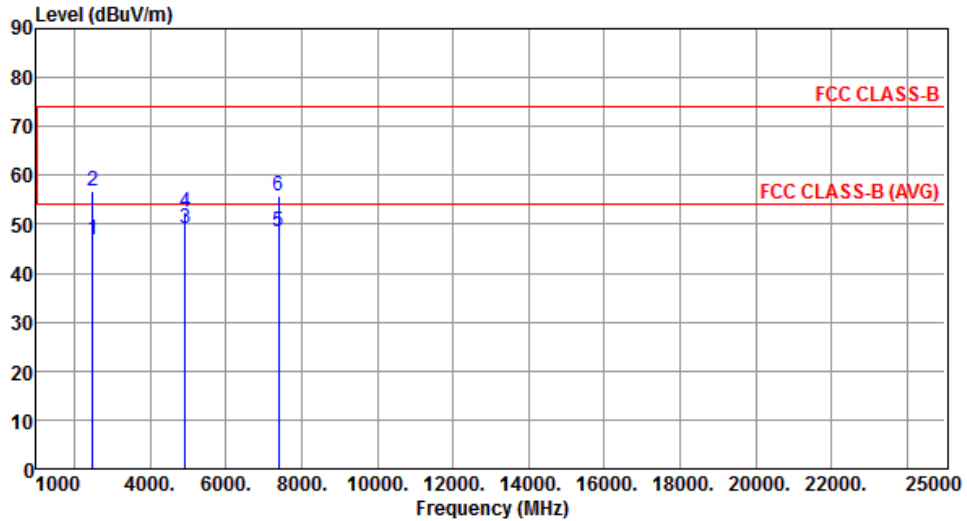

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	46.72	54.00	-7.28	49.09	-2.37	Average	120	3
2	2483.50	56.80	74.00	-17.20	59.17	-2.37	Peak	120	3
3	4924.00	49.28	54.00	-4.72	44.08	5.20	Average	181	332
4	4924.00	52.54	74.00	-21.46	47.34	5.20	Peak	181	332
5	7386.00	48.36	54.00	-5.64	38.30	10.06	Average	330	28
6	7386.00	55.77	74.00	-18.23	45.71	10.06	Peak	330	28

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

Modulation	11g	Test Freq. (MHz)	2412						
Polarization	Horizontal								
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	51.35	54.00	-2.65	54.05	-2.70	Average	199	344
2	2390.00	69.57	74.00	-4.43	72.27	-2.70	Peak	199	344
3	4824.00	46.89	54.00	-7.11	41.92	4.97	Average	275	23
4	4824.00	59.57	74.00	-14.43	54.60	4.97	Peak	275	23
5	12060.00	42.54	54.00	-11.46	27.32	15.22	Average	312	96
6	12060.00	55.65	74.00	-18.35	40.43	15.22	Peak	312	96
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									



<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

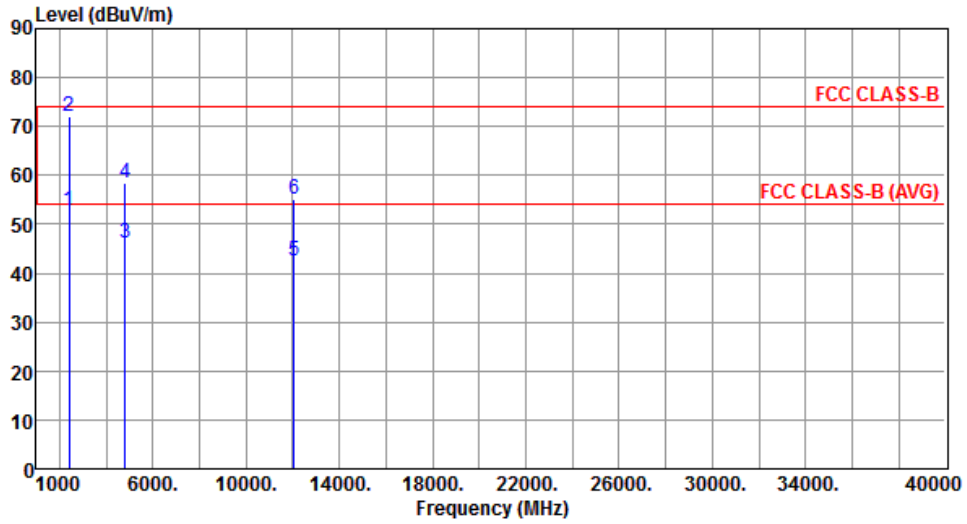


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.68	54.00	-1.32	55.38	-2.70	Average	119	1
2	2390.00	71.96	74.00	-2.04	74.66	-2.70	Peak	119	1
3	4824.00	46.21	54.00	-7.79	41.24	4.97	Average	193	338
4	4824.00	58.42	74.00	-15.58	53.45	4.97	Peak	193	338
5	12060.00	42.56	54.00	-11.44	27.34	15.22	Average	277	275
6	12060.00	55.17	74.00	-18.83	39.95	15.22	Peak	277	275

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

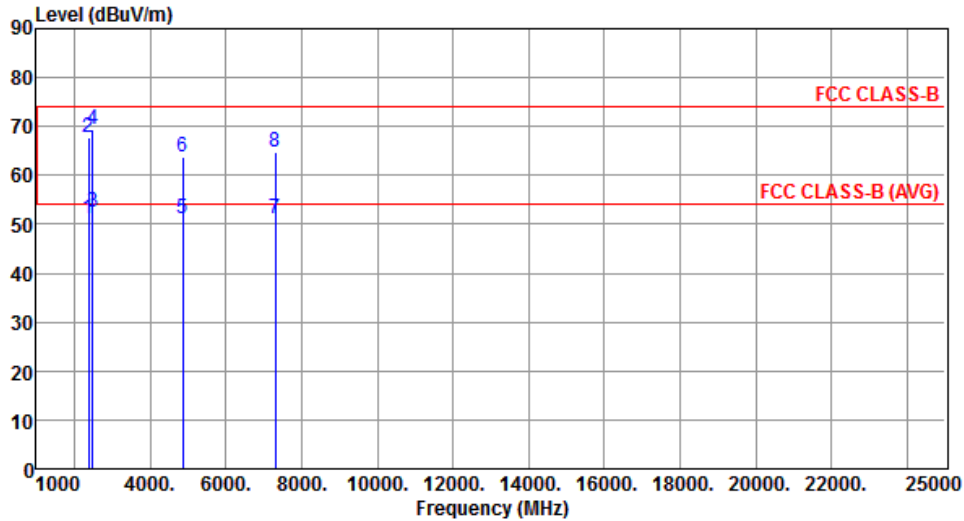


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.27	54.00	-2.73	53.97	-2.70	Average	231	8
2	2390.00	67.66	74.00	-6.34	70.36	-2.70	Peak	231	8
3	2483.50	52.32	54.00	-1.68	54.69	-2.37	Average	238	348
4	2483.50	69.45	74.00	-4.55	71.82	-2.37	Peak	238	348
5	4874.00	51.00	54.00	-3.00	45.92	5.08	Average	271	20
6	4874.00	63.82	74.00	-10.18	58.74	5.08	Peak	271	20
7	7311.00	51.03	54.00	-2.97	41.14	9.89	Average	336	5
8	7311.00	64.90	74.00	-9.10	55.01	9.89	Peak	336	5

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

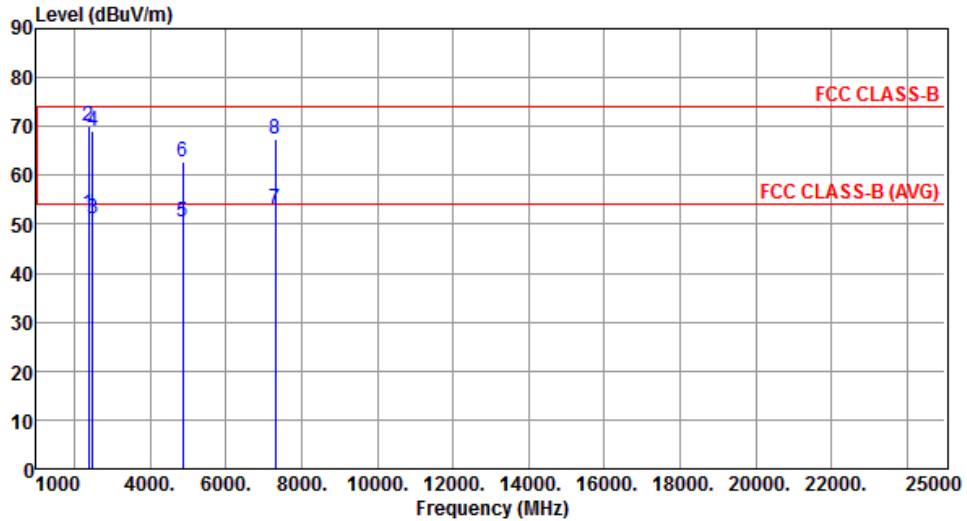


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.25	54.00	-1.75	54.95	-2.70	Average	119	7
2	2390.00	69.95	74.00	-4.05	72.65	-2.70	Peak	119	7
3	2483.50	51.15	54.00	-2.85	53.52	-2.37	Average	343	113
4	2483.50	69.16	74.00	-4.84	71.53	-2.37	Peak	343	113
5	4874.00	50.57	54.00	-3.43	45.49	5.08	Average	198	332
6	4874.00	62.87	74.00	-11.13	57.79	5.08	Peak	198	332
7	7311.00	52.98	54.00	-1.02	44.49	8.49	Average	228	330
8	7311.00	67.43	74.00	-6.57	57.54	9.89	Peak	228	330

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

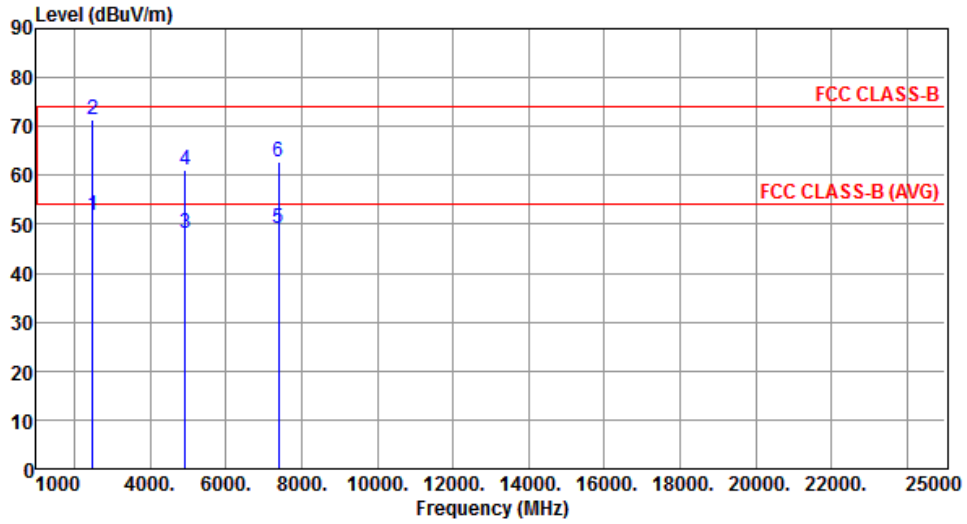


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	51.72	54.00	-2.28	54.09	-2.37	Average	182	18
2	2483.50	71.53	74.00	-2.47	73.90	-2.37	Peak	182	18
3	4924.00	48.11	54.00	-5.89	42.91	5.20	Average	266	24
4	4924.00	60.95	74.00	-13.05	55.75	5.20	Peak	266	24
5	7386.00	49.12	54.00	-4.88	39.06	10.06	Average	332	8
6	7386.00	62.87	74.00	-11.13	52.81	10.06	Peak	332	8

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

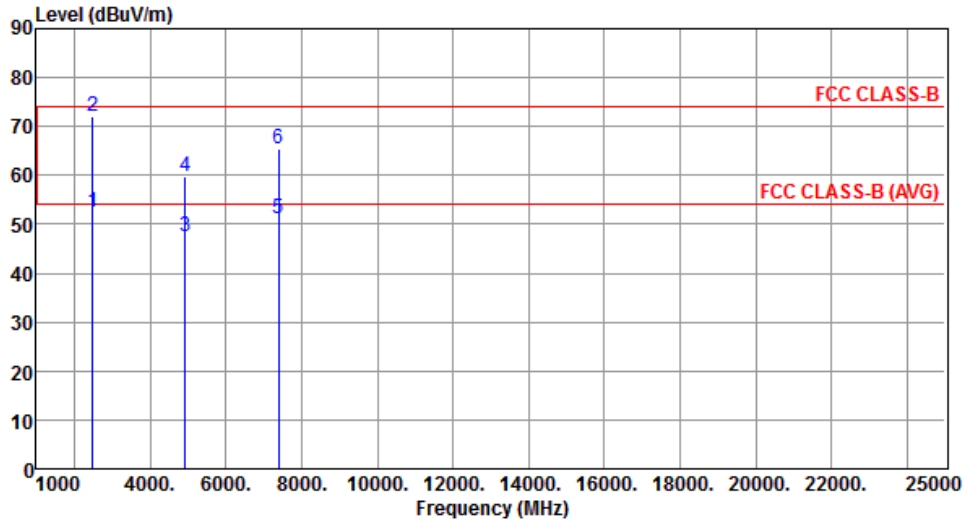


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.38	54.00	-1.62	54.75	-2.37	Average	278	85
2	2483.50	72.01	74.00	-1.99	74.38	-2.37	Peak	278	85
3	4924.00	47.51	54.00	-6.49	42.31	5.20	Average	193	324
4	4924.00	59.69	74.00	-14.31	54.49	5.20	Peak	193	324
5	7386.00	51.15	54.00	-2.85	41.09	10.06	Average	224	339
6	7386.00	65.58	74.00	-8.42	55.52	10.06	Peak	224	339

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

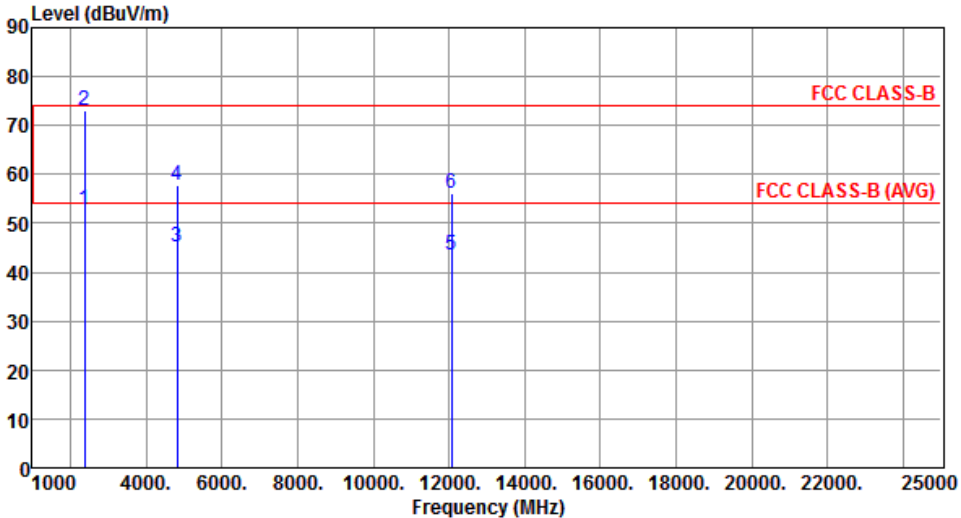Modulation	HT20	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
	1	2390.00	52.71	54.00	-1.29	55.41	-2.70	Average	162 209
	2	2390.00	72.99	74.00	-1.01	75.69	-2.70	Peak	162 209
	3	4824.00	45.10	54.00	-8.90	40.13	4.97	Average	263 321
	4	4824.00	57.89	74.00	-16.11	52.92	4.97	Peak	263 321
	5	12060.00	43.37	54.00	-10.63	28.15	15.22	Average	153 19
	6	12060.00	55.98	74.00	-18.02	40.76	15.22	Peak	153 19
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

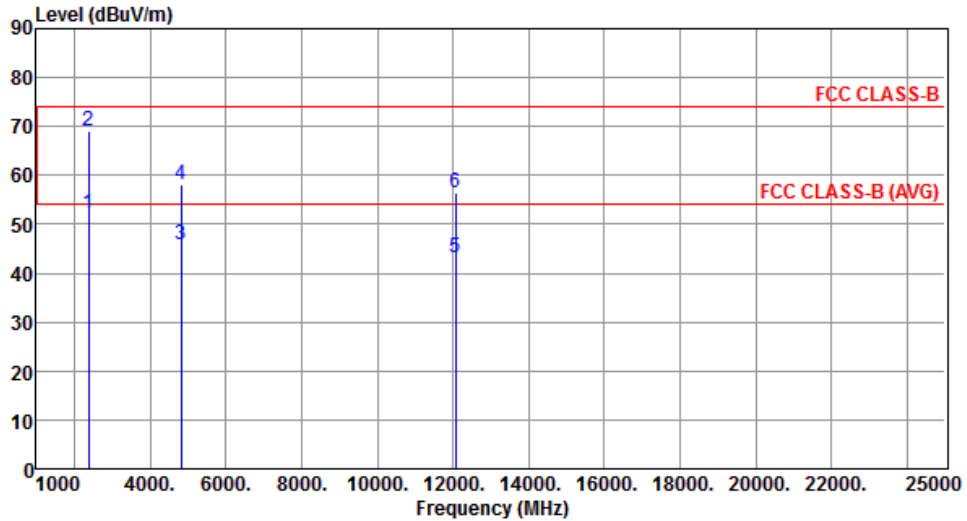


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.12	54.00	-1.88	54.82	-2.70	Average	117	192
2	2390.00	69.10	74.00	-4.90	71.80	-2.70	Peak	117	192
3	4824.00	45.88	54.00	-8.12	40.91	4.97	Average	185	160
4	4824.00	58.12	74.00	-15.88	53.15	4.97	Peak	185	160
5	12060.00	43.33	54.00	-10.67	28.11	15.22	Average	177	156
6	12060.00	56.48	74.00	-17.52	41.26	15.22	Peak	177	156

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

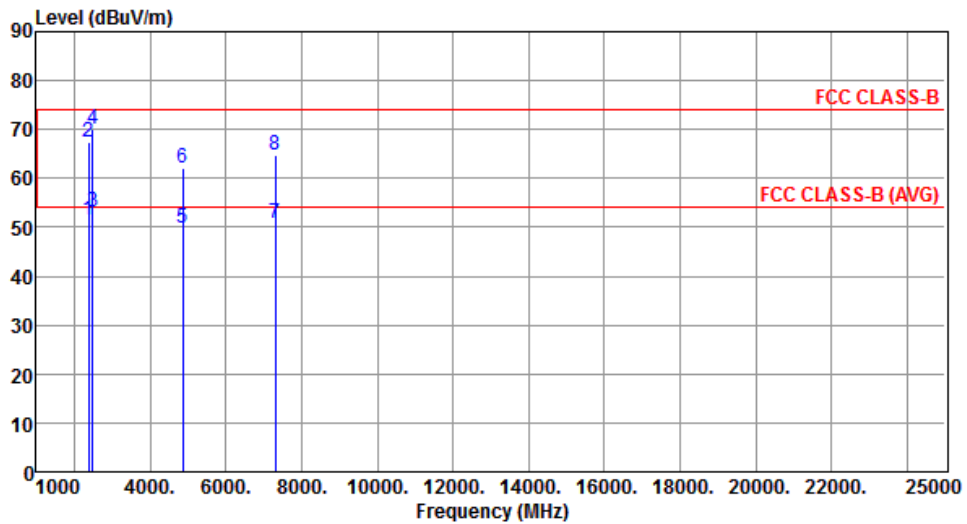

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.63	54.00	-2.37	54.33	-2.70	Average	190	195
2	2390.00	67.50	74.00	-6.50	70.20	-2.70	Peak	190	195
3	2483.50	52.99	54.00	-1.01	55.36	-2.37	Average	178	200
4	2483.50	70.03	74.00	-3.97	72.40	-2.37	Peak	178	200
5	4874.00	49.71	54.00	-4.29	44.63	5.08	Average	240	15
6	4874.00	62.19	74.00	-11.81	57.11	5.08	Peak	240	15
7	7311.00	50.73	54.00	-3.27	40.84	9.89	Average	211	359
8	7311.00	64.79	74.00	-9.21	54.90	9.89	Peak	211	359


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

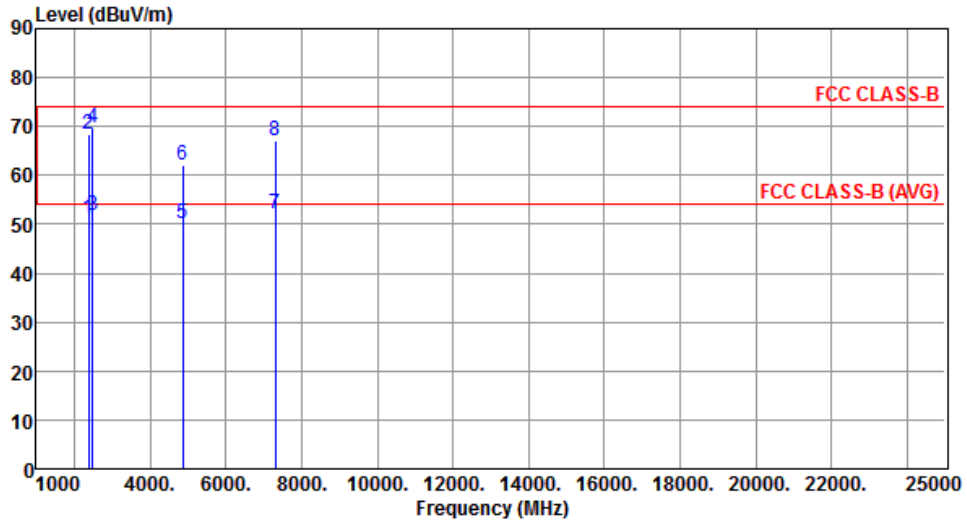


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.09	54.00	-2.91	53.79	-2.70	Average	116	192
2	2390.00	68.53	74.00	-5.47	71.23	-2.70	Peak	116	192
3	2483.50	51.75	54.00	-2.25	54.12	-2.37	Average	116	192
4	2483.50	69.62	74.00	-4.38	71.99	-2.37	Peak	116	192
5	4874.00	50.01	54.00	-3.99	44.93	5.08	Average	211	173
6	4874.00	62.02	74.00	-11.98	56.94	5.08	Peak	211	173
7	7311.00	52.26	54.00	-1.74	42.37	9.89	Average	229	155
8	7311.00	67.07	74.00	-6.93	57.18	9.89	Peak	229	155

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

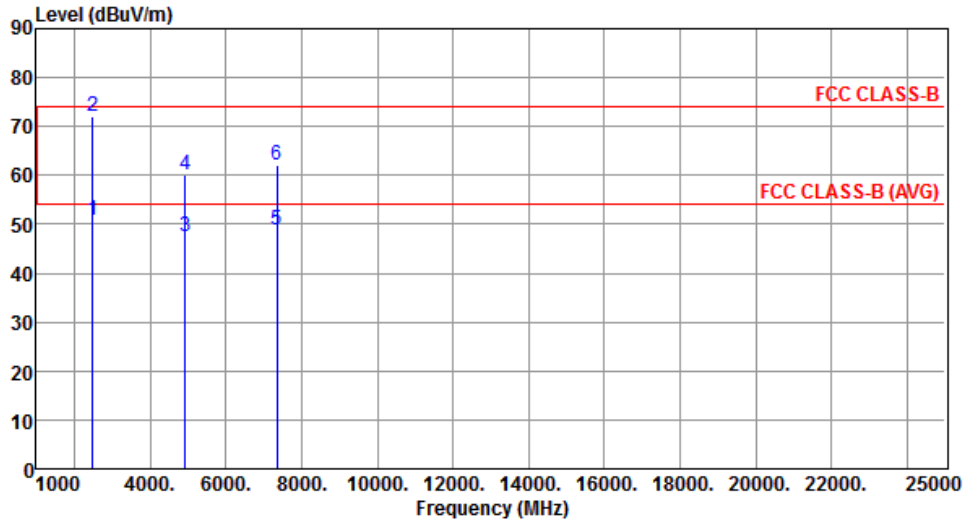


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	50.93	54.00	-3.07	53.30	-2.37	Average	163	190
2	2483.50	71.98	74.00	-2.02	74.35	-2.37	Peak	163	190
3	4924.00	47.41	54.00	-6.59	42.21	5.20	Average	245	31
4	4924.00	60.01	74.00	-13.99	54.81	5.20	Peak	245	31
5	7356.00	48.71	54.00	-5.29	38.73	9.98	Average	341	358
6	7356.00	62.12	74.00	-11.88	52.14	9.98	Peak	341	358

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

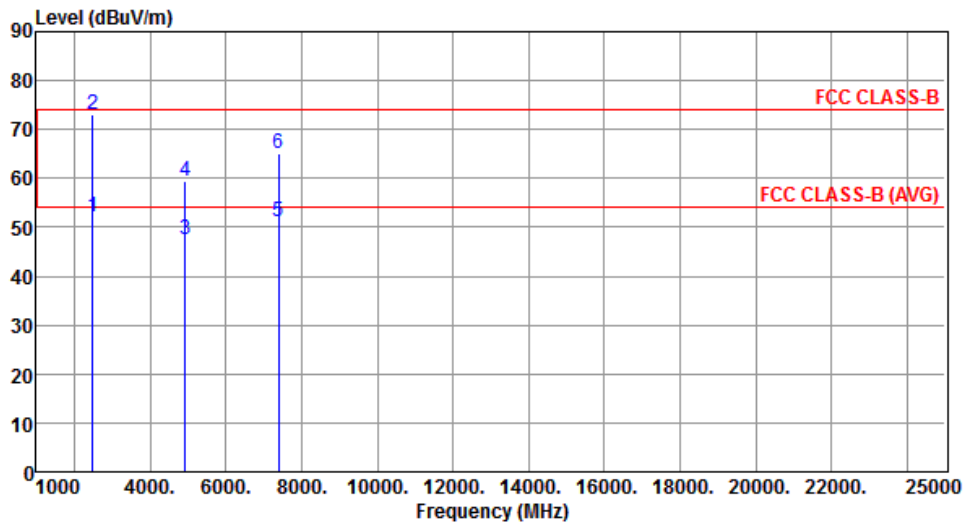

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.26	54.00	-1.74	54.63	-2.37	Average	115	177
2	2483.50	72.97	74.00	-1.03	75.34	-2.37	Peak	115	177
3	4924.00	47.42	54.00	-6.58	42.22	5.20	Average	189	341
4	4924.00	59.50	74.00	-14.50	54.30	5.20	Peak	189	341
5	7386.00	51.02	54.00	-2.98	40.96	10.06	Average	202	348
6	7386.00	65.01	74.00	-8.99	54.95	10.06	Peak	202	348

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

Modulation	HT40	Test Freq. (MHz)	2422						
Polarization	Horizontal								
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.98	54.00	-1.02	55.68	-2.70	Average	125	212
2	2390.00	69.30	74.00	-4.70	72.00	-2.70	Peak	125	212
3	4844.00	33.23	54.00	-20.77	28.21	5.02	Average	163	344
4	4844.00	46.99	74.00	-27.01	41.97	5.02	Peak	163	344
5	12110.00	43.23	54.00	-10.77	28.02	15.21	Average	158	325
6	12110.00	56.89	74.00	-17.11	41.68	15.21	Peak	158	325

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2422
<b>Polarization</b>	Vertical		

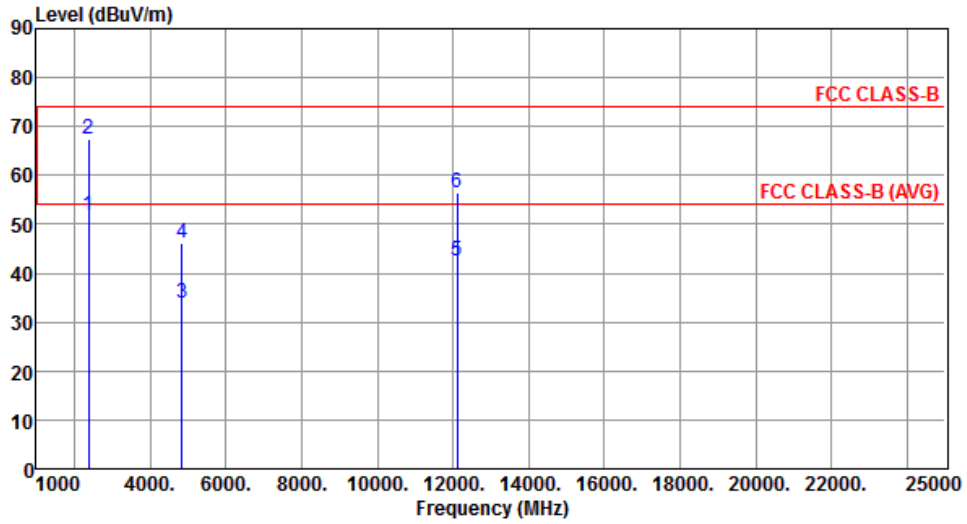


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	51.89	54.00	-2.11	54.59	-2.70	Average	108	175
2	2390.00	67.42	74.00	-6.58	70.12	-2.70	Peak	108	175
3	4844.00	33.90	54.00	-20.10	28.88	5.02	Average	177	319
4	4844.00	46.04	74.00	-27.96	41.02	5.02	Peak	177	319
5	12110.00	42.65	54.00	-11.35	27.44	15.21	Average	188	311
6	12110.00	56.33	74.00	-17.67	41.12	15.21	Peak	188	311

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

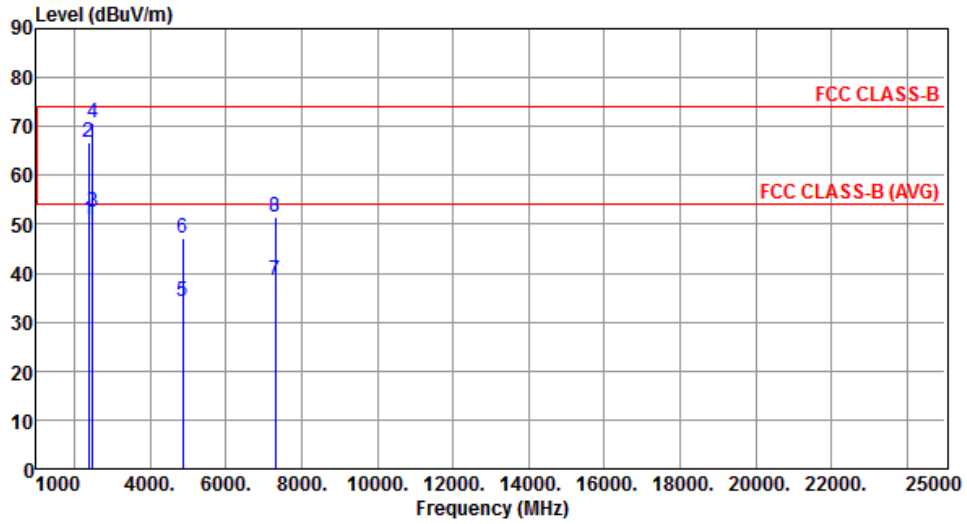


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	50.95	54.00	-3.05	53.65	-2.70	Average	130	172
2	2390.00	66.88	74.00	-7.12	69.58	-2.70	Peak	130	172
3	2483.50	52.41	54.00	-1.59	54.78	-2.37	Average	120	169
4	2483.50	70.70	74.00	-3.30	73.07	-2.37	Peak	120	169
5	4874.00	34.11	54.00	-19.89	29.03	5.08	Average	163	250
6	4874.00	47.32	74.00	-26.68	42.24	5.08	Peak	163	250
7	7311.00	38.47	54.00	-15.53	28.58	9.89	Average	145	233
8	7311.00	51.56	74.00	-22.44	41.67	9.89	Peak	145	233

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

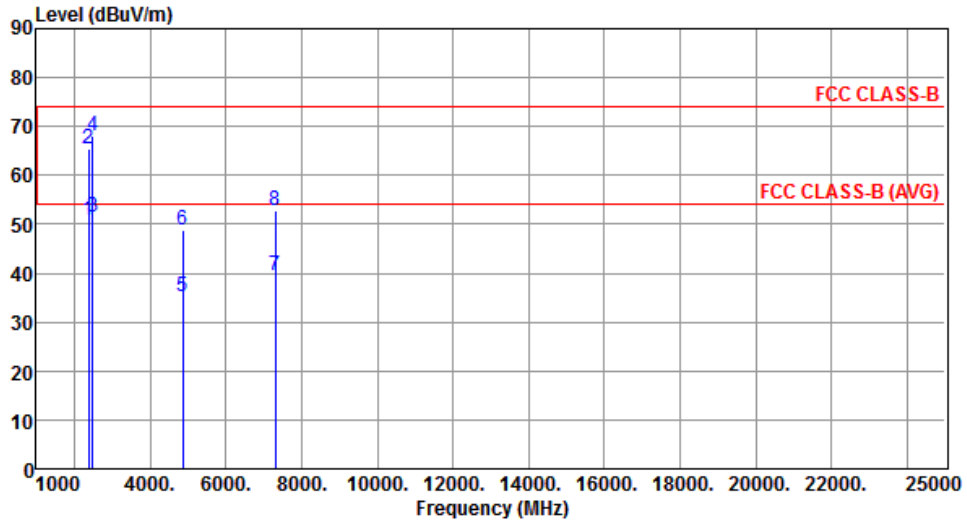


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	50.69	54.00	-3.31	53.39	-2.70	Average	107	193
2	2390.00	65.52	74.00	-8.48	68.22	-2.70	Peak	107	193
3	2483.50	51.62	54.00	-2.38	53.99	-2.37	Average	107	193
4	2483.50	68.02	74.00	-5.98	70.39	-2.37	Peak	107	193
5	4874.00	35.21	54.00	-18.79	30.13	5.08	Average	187	84
6	4874.00	48.66	74.00	-25.34	43.58	5.08	Peak	187	84
7	7311.00	39.39	54.00	-14.61	29.50	9.89	Average	211	93
8	7311.00	52.74	74.00	-21.26	42.85	9.89	Peak	211	93

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Horizontal		

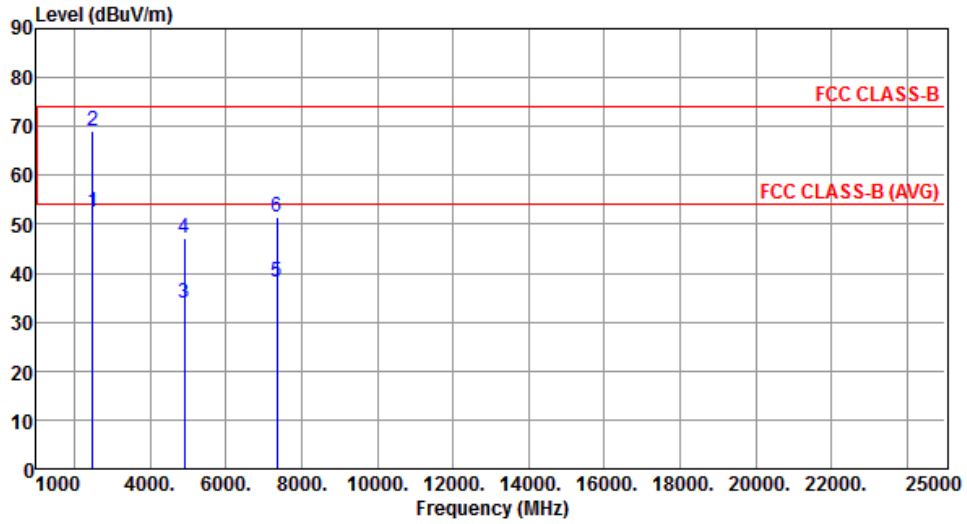

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.35	54.00	-1.65	54.72	-2.37	Average	185	2
2	2483.50	69.02	74.00	-4.98	71.39	-2.37	Peak	185	2
3	4904.00	33.87	54.00	-20.13	28.71	5.16	Average	161	253
4	4904.00	47.02	74.00	-26.98	41.86	5.16	Peak	161	253
5	7356.00	38.24	54.00	-15.76	28.26	9.98	Average	148	224
6	7356.00	51.34	74.00	-22.66	41.36	9.98	Peak	148	224


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Vertical		

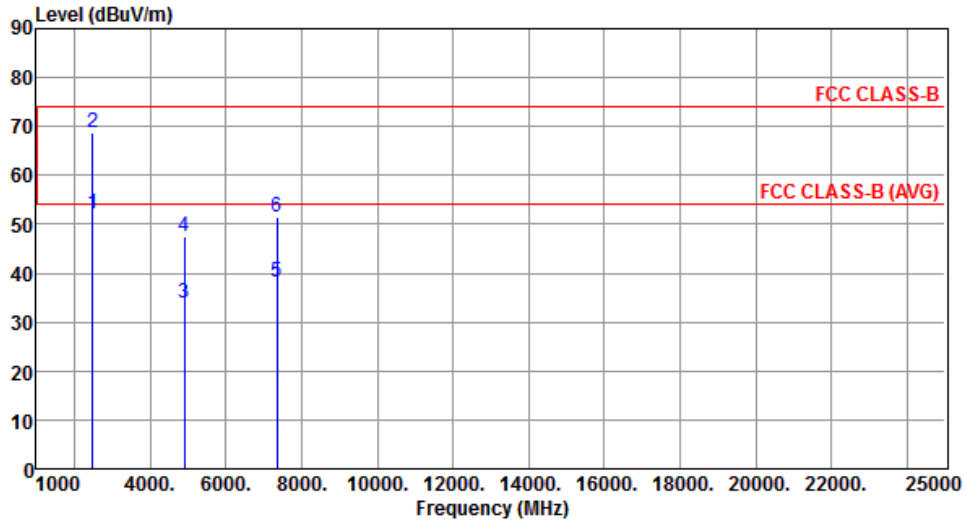

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.19	54.00	-1.81	54.56	-2.37	Average	100	7
2	2483.50	68.79	74.00	-5.21	71.16	-2.37	Peak	100	7
3	4904.00	34.02	54.00	-19.98	28.86	5.16	Average	183	86
4	4904.00	47.52	74.00	-26.48	42.36	5.16	Peak	183	86
5	7356.00	38.26	54.00	-15.74	28.28	9.98	Average	213	87
6	7356.00	51.64	74.00	-22.36	41.66	9.98	Peak	213	87

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Emissions in Non-Restricted Frequency Bands

### 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.6.4 Test Setup

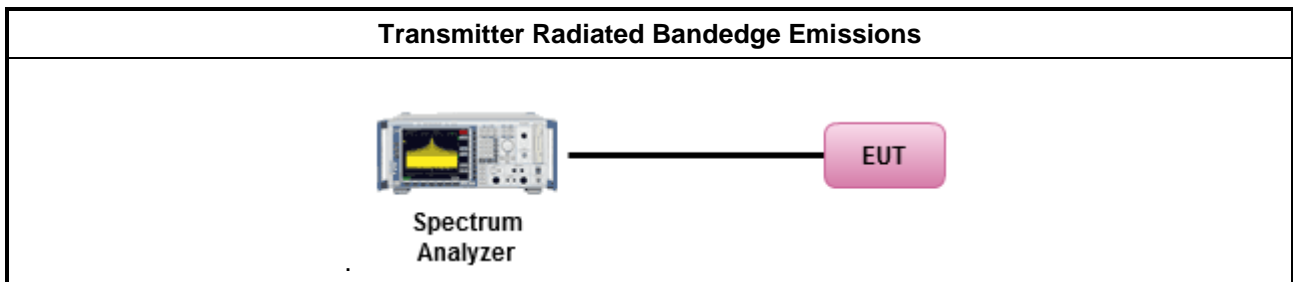



### 3.6.5 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding  $10 \log(N_{ANT})$  since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

### 3.6.6 Unwanted Emissions into Non-Restricted Frequency Bands


802.11b

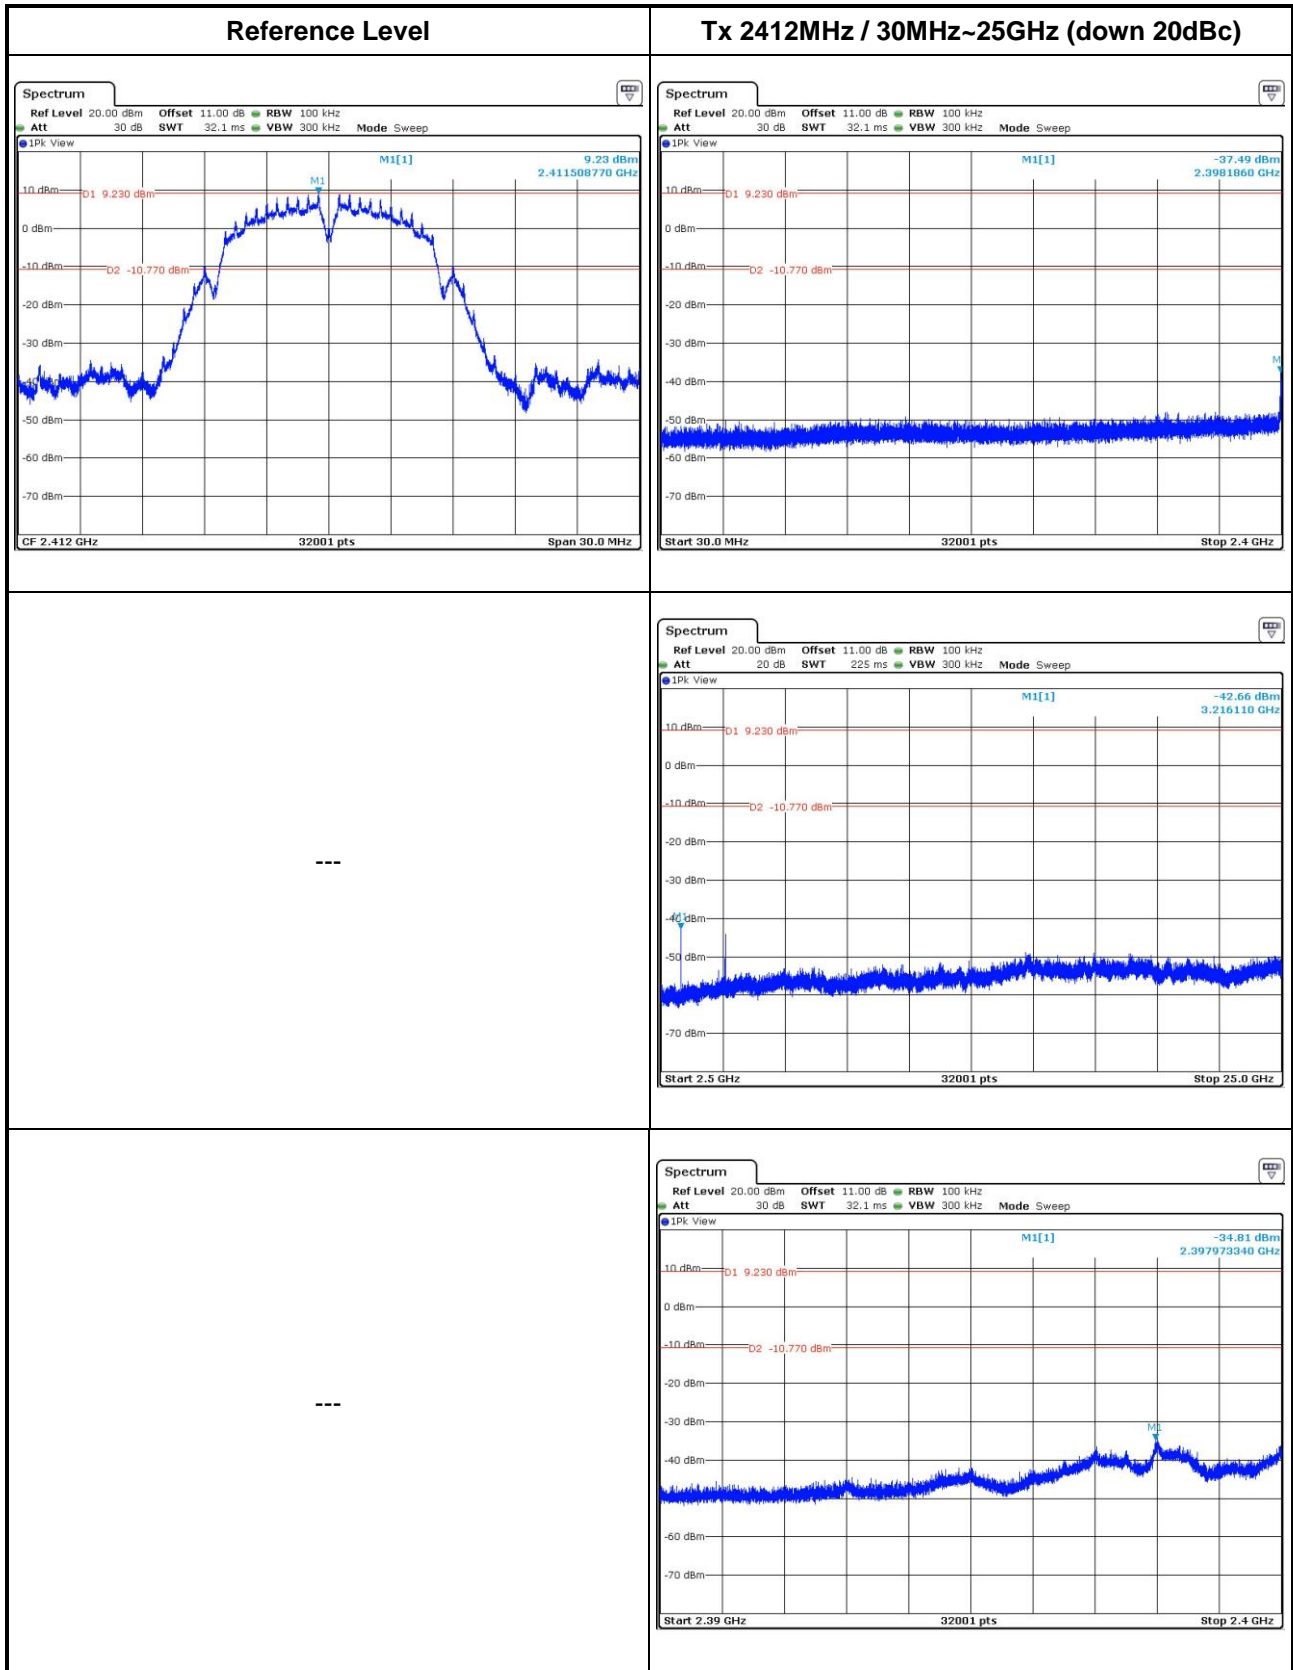


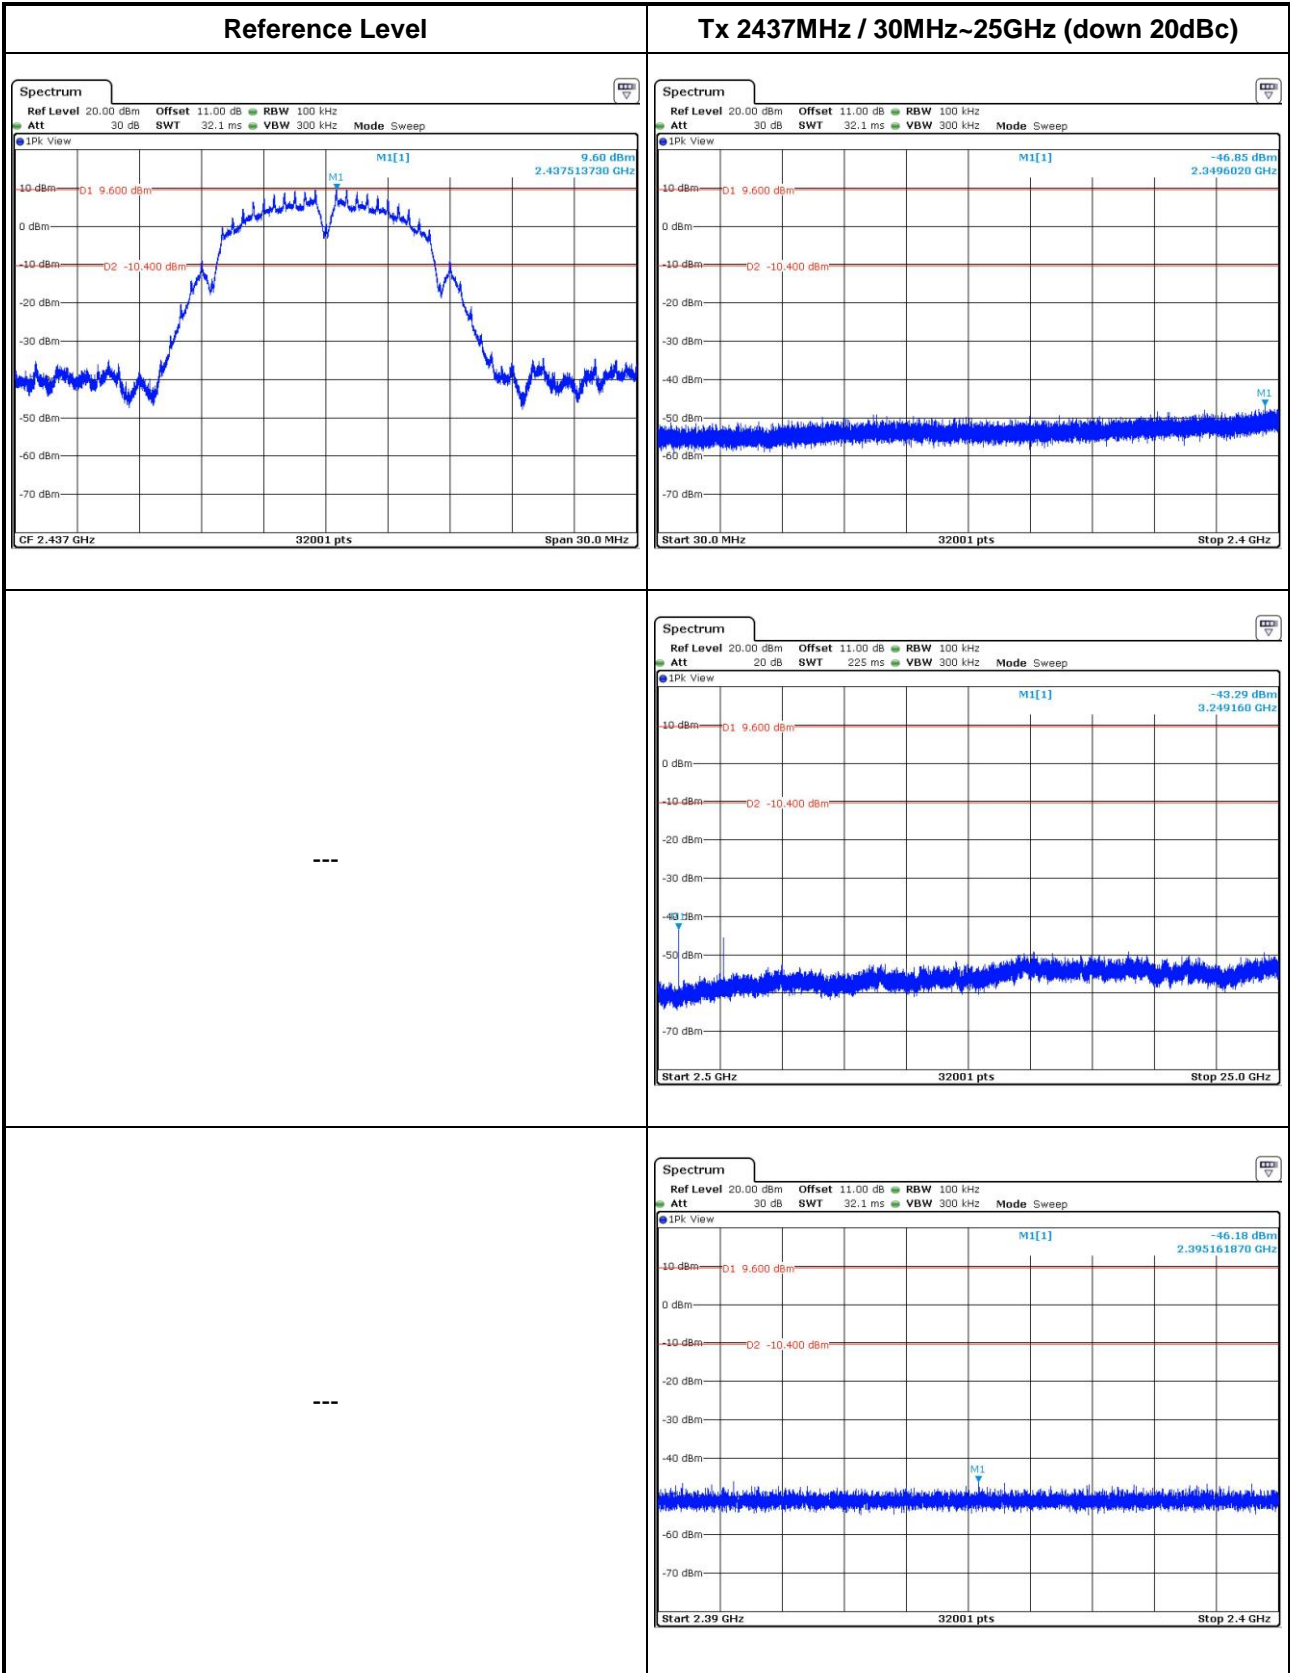


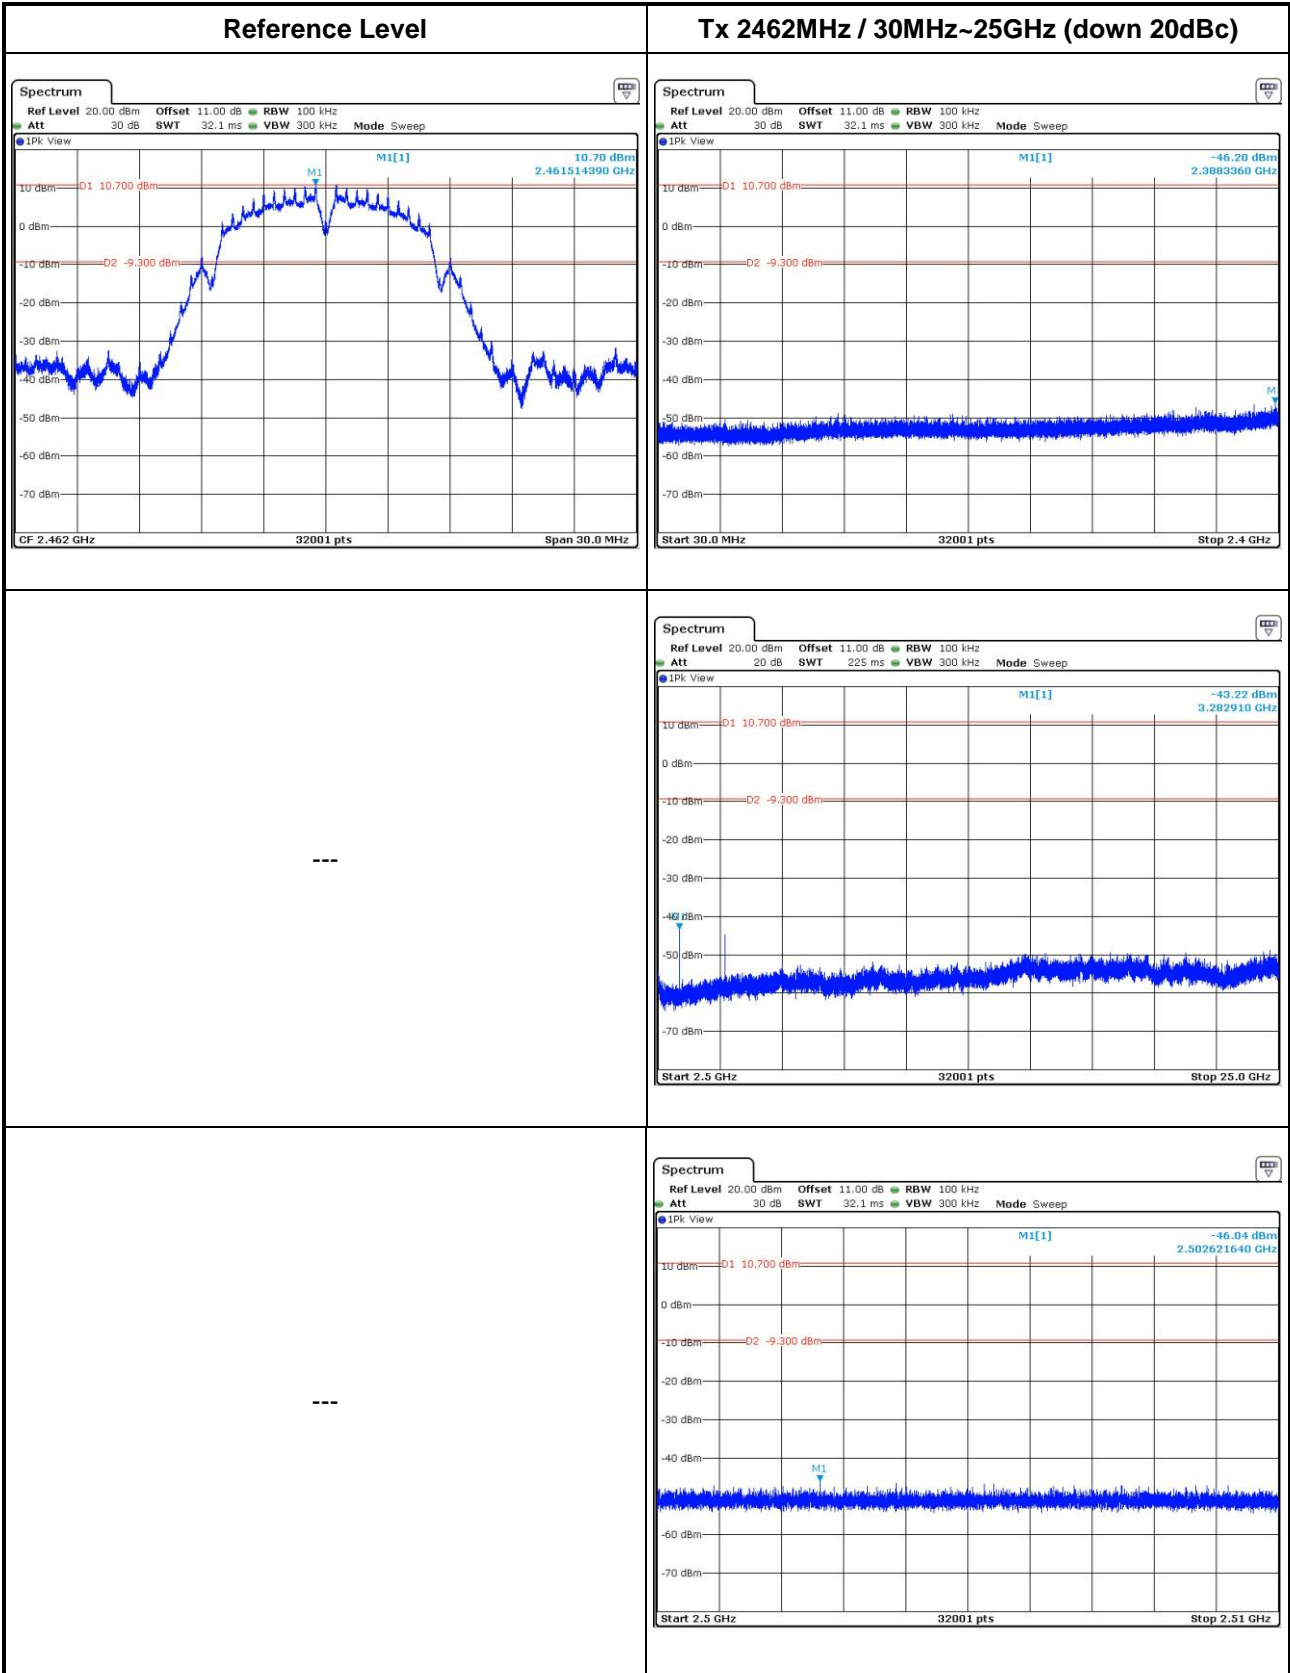

802.11g

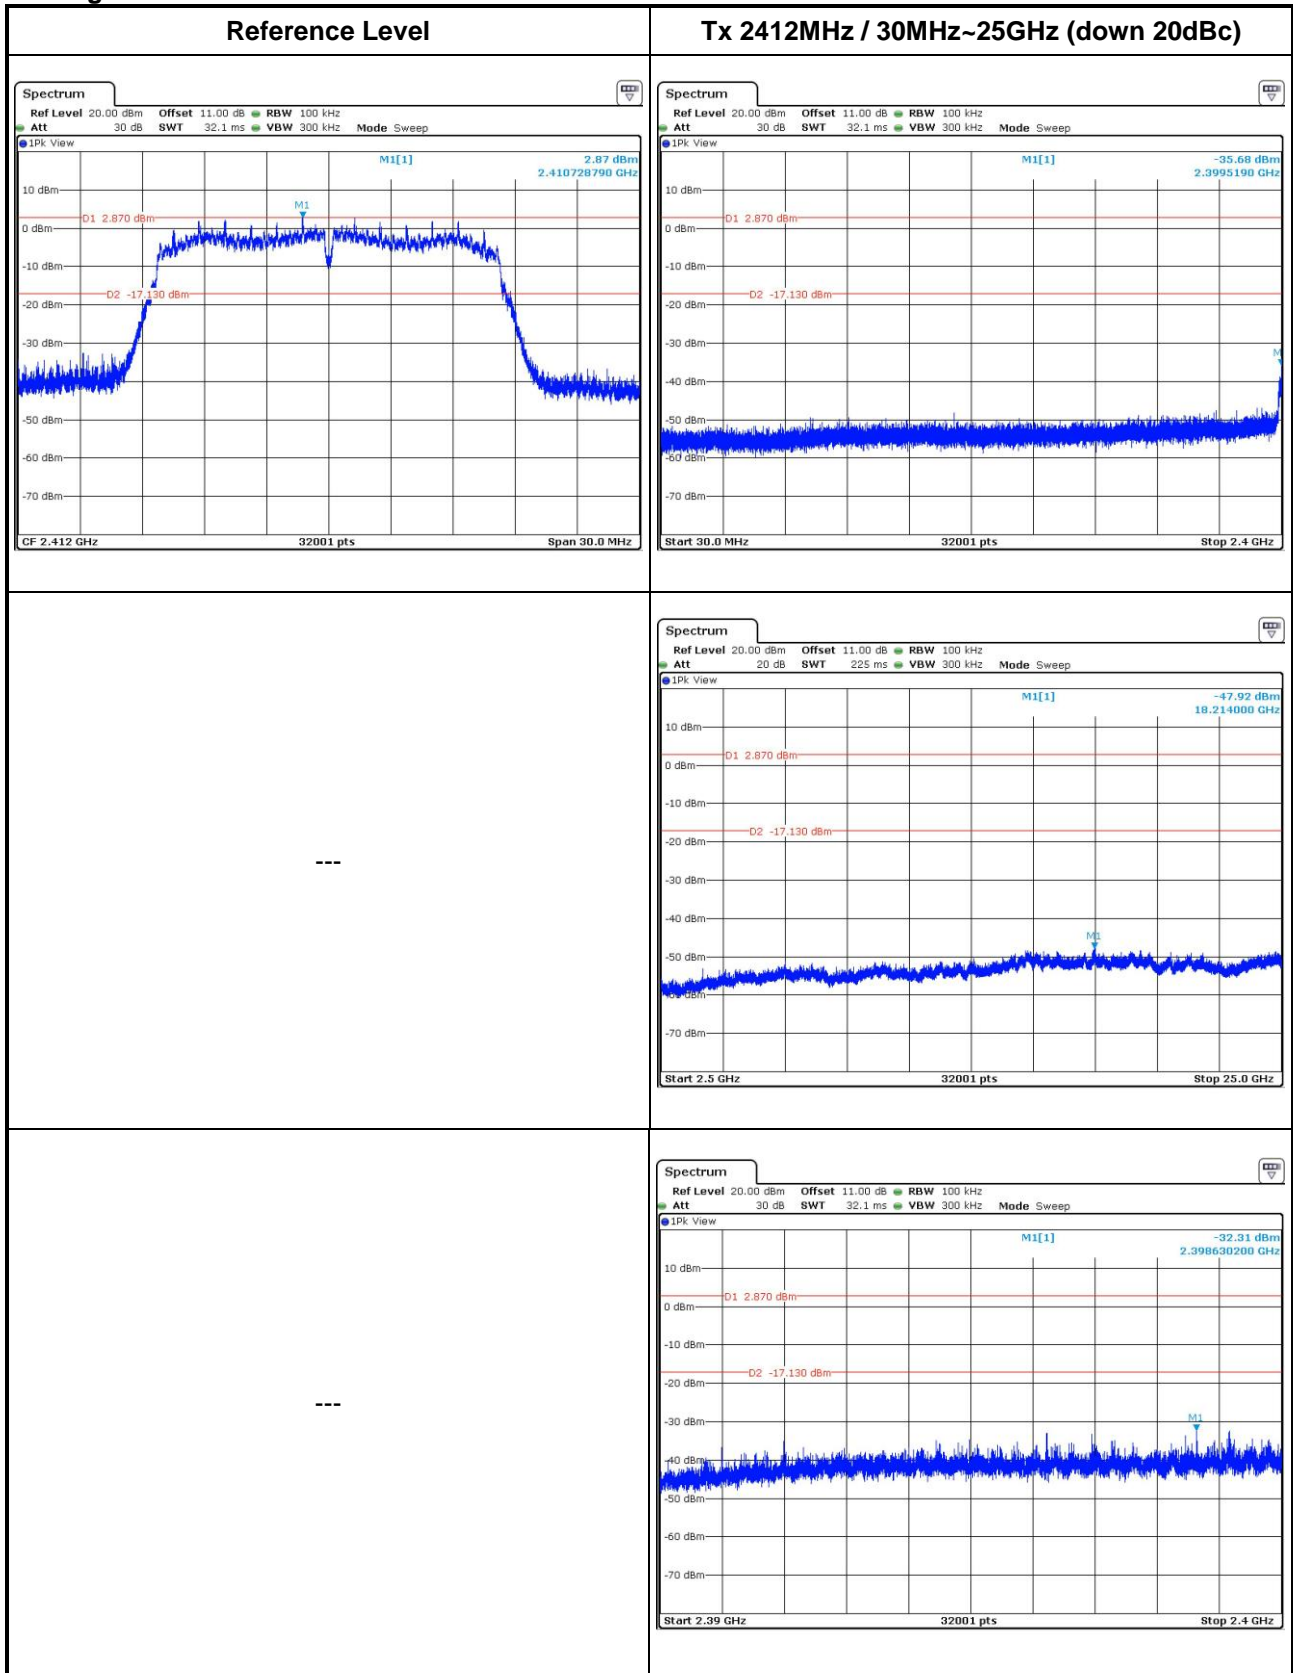


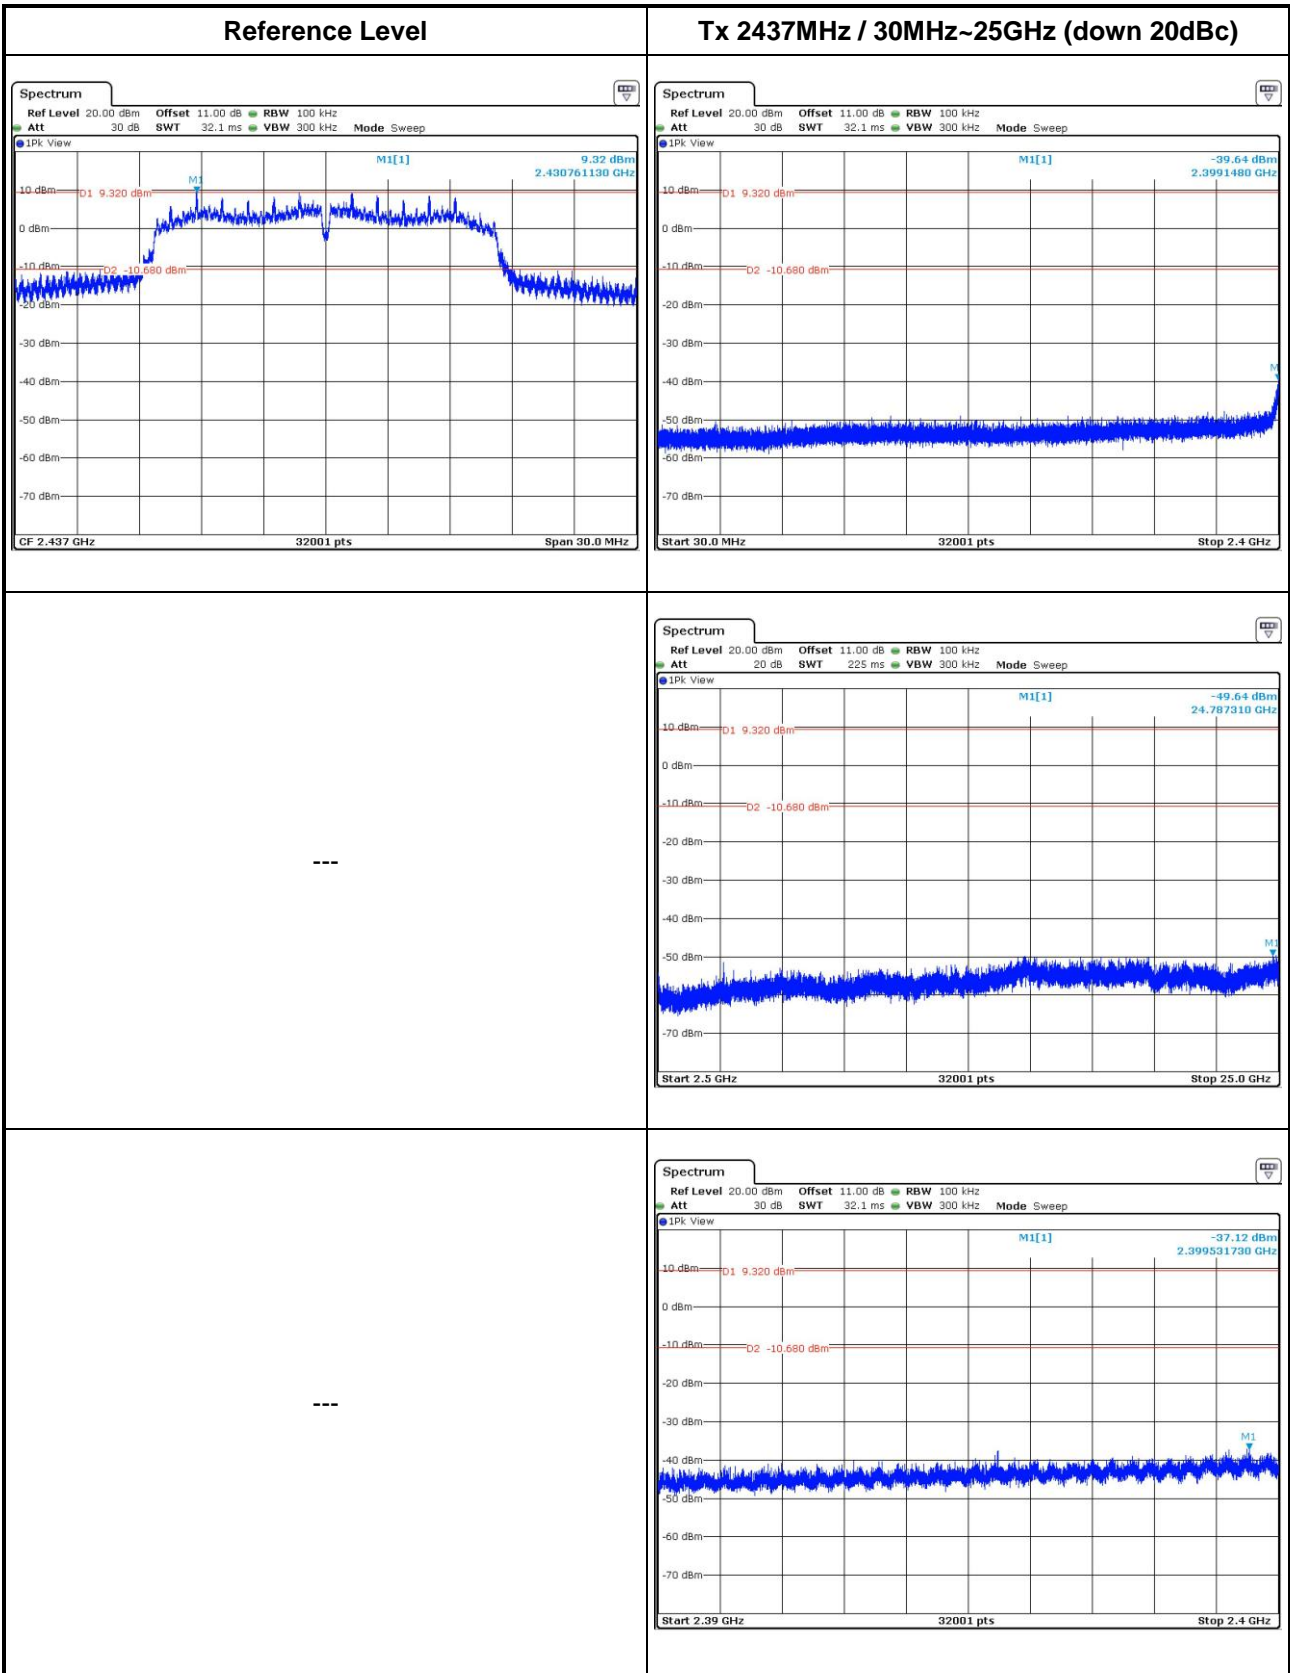


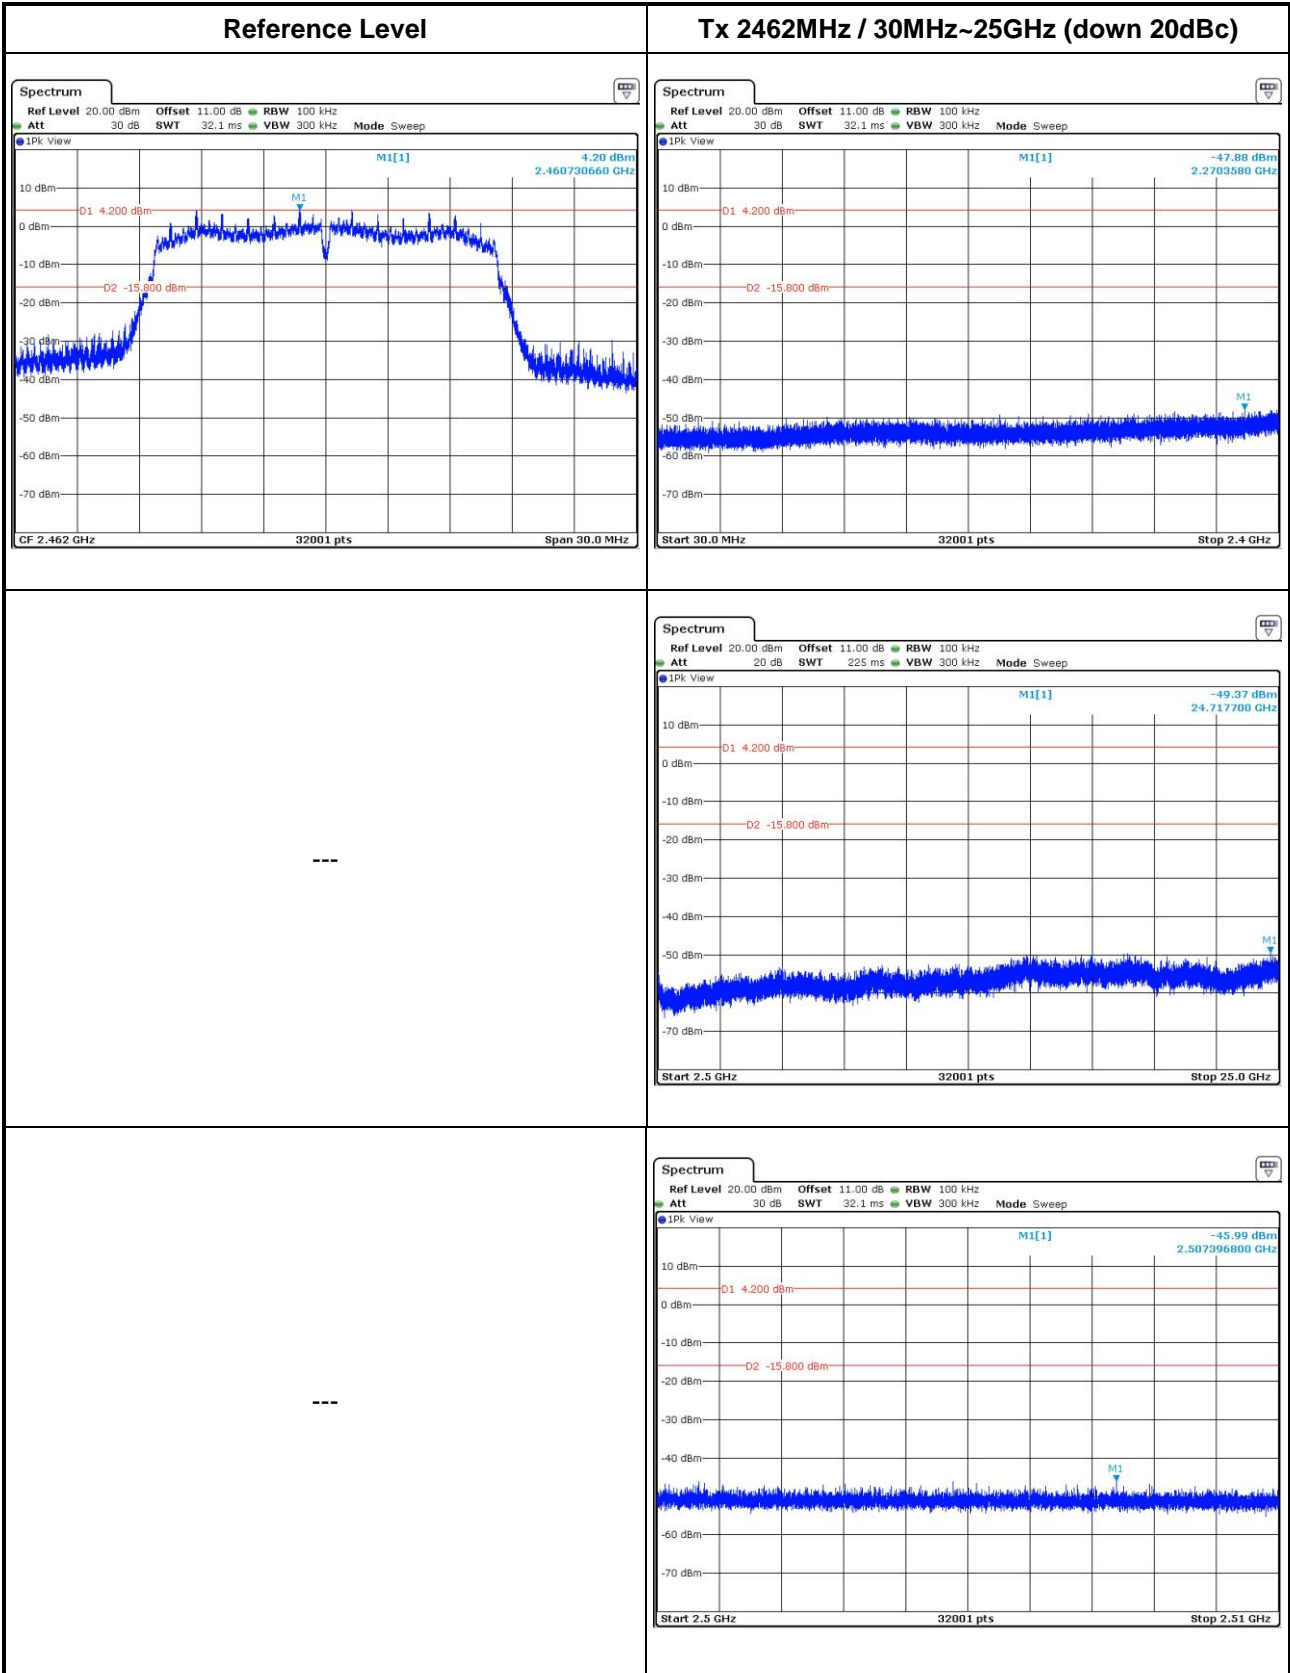





802.11n HT20

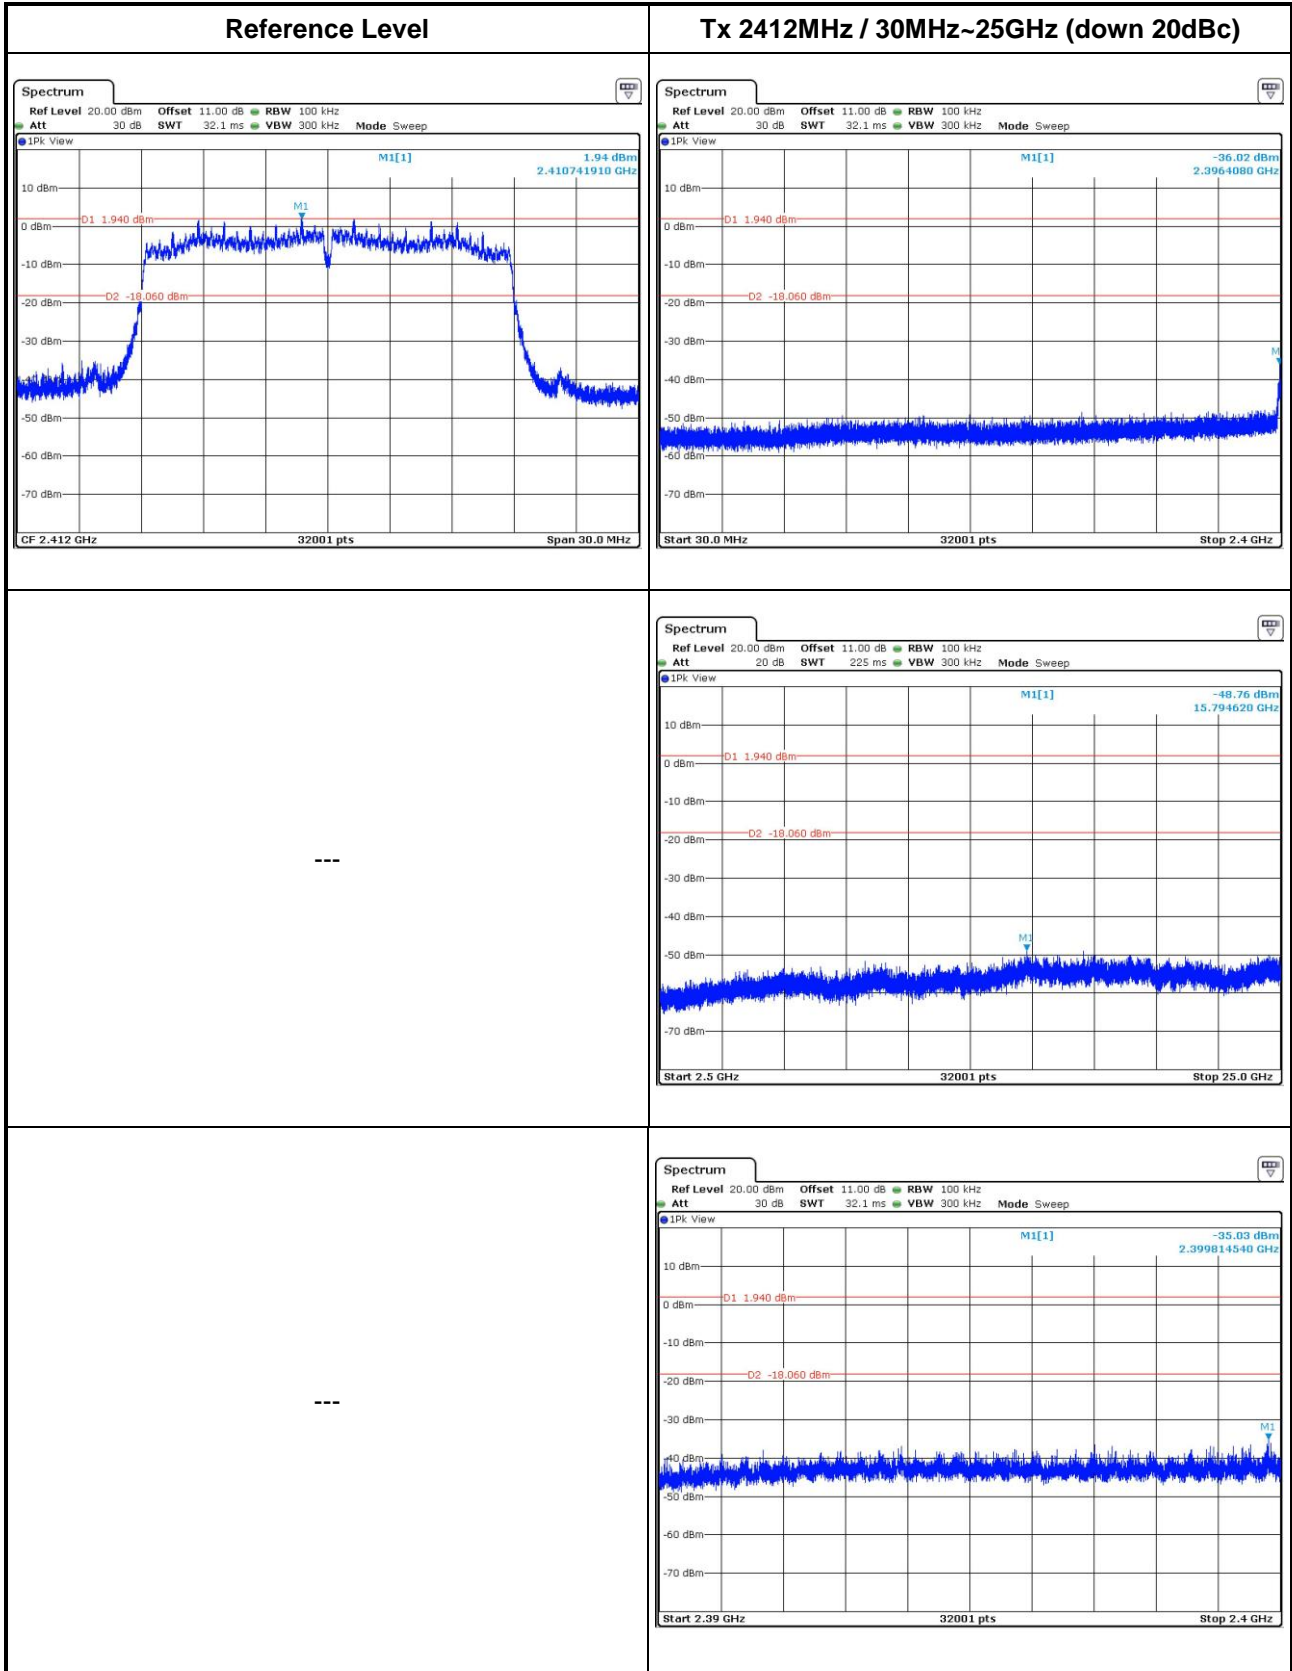


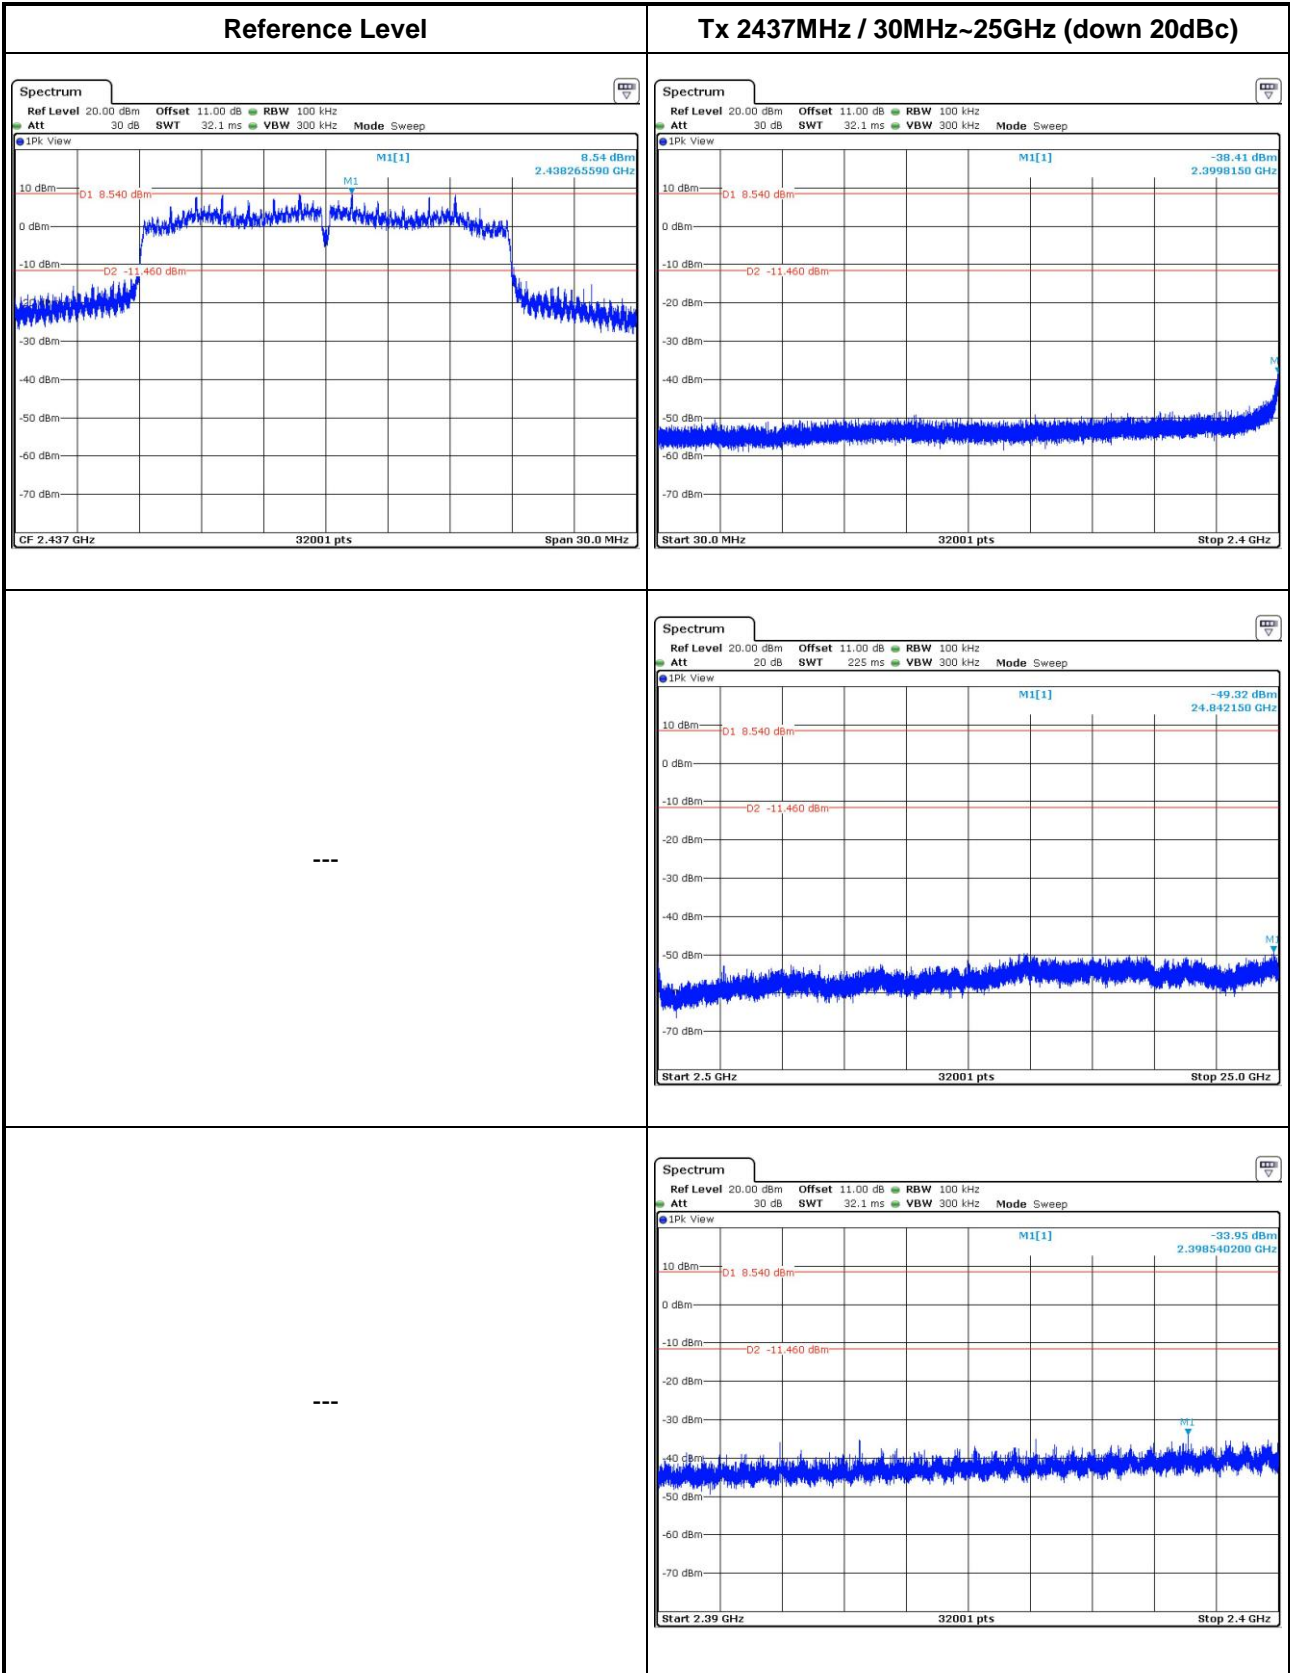


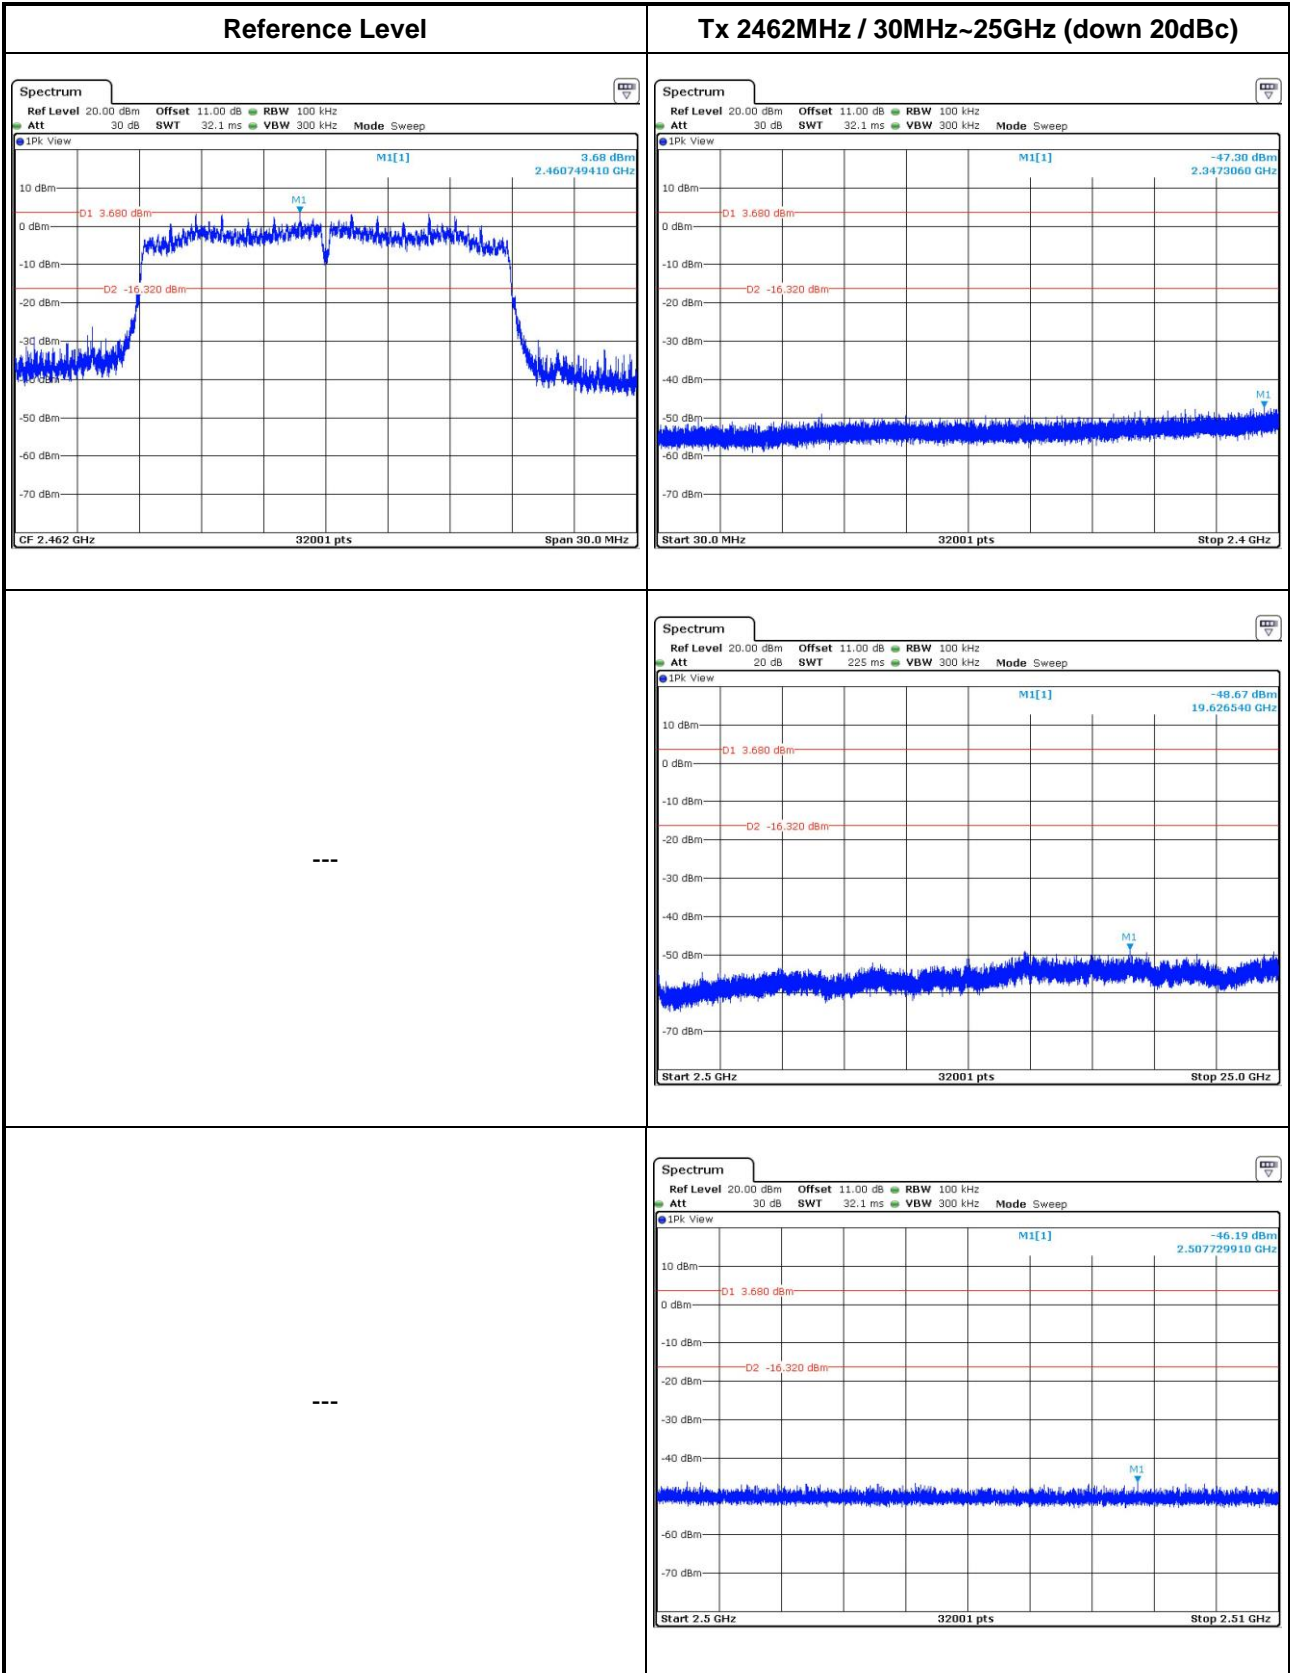

802.11n HT40

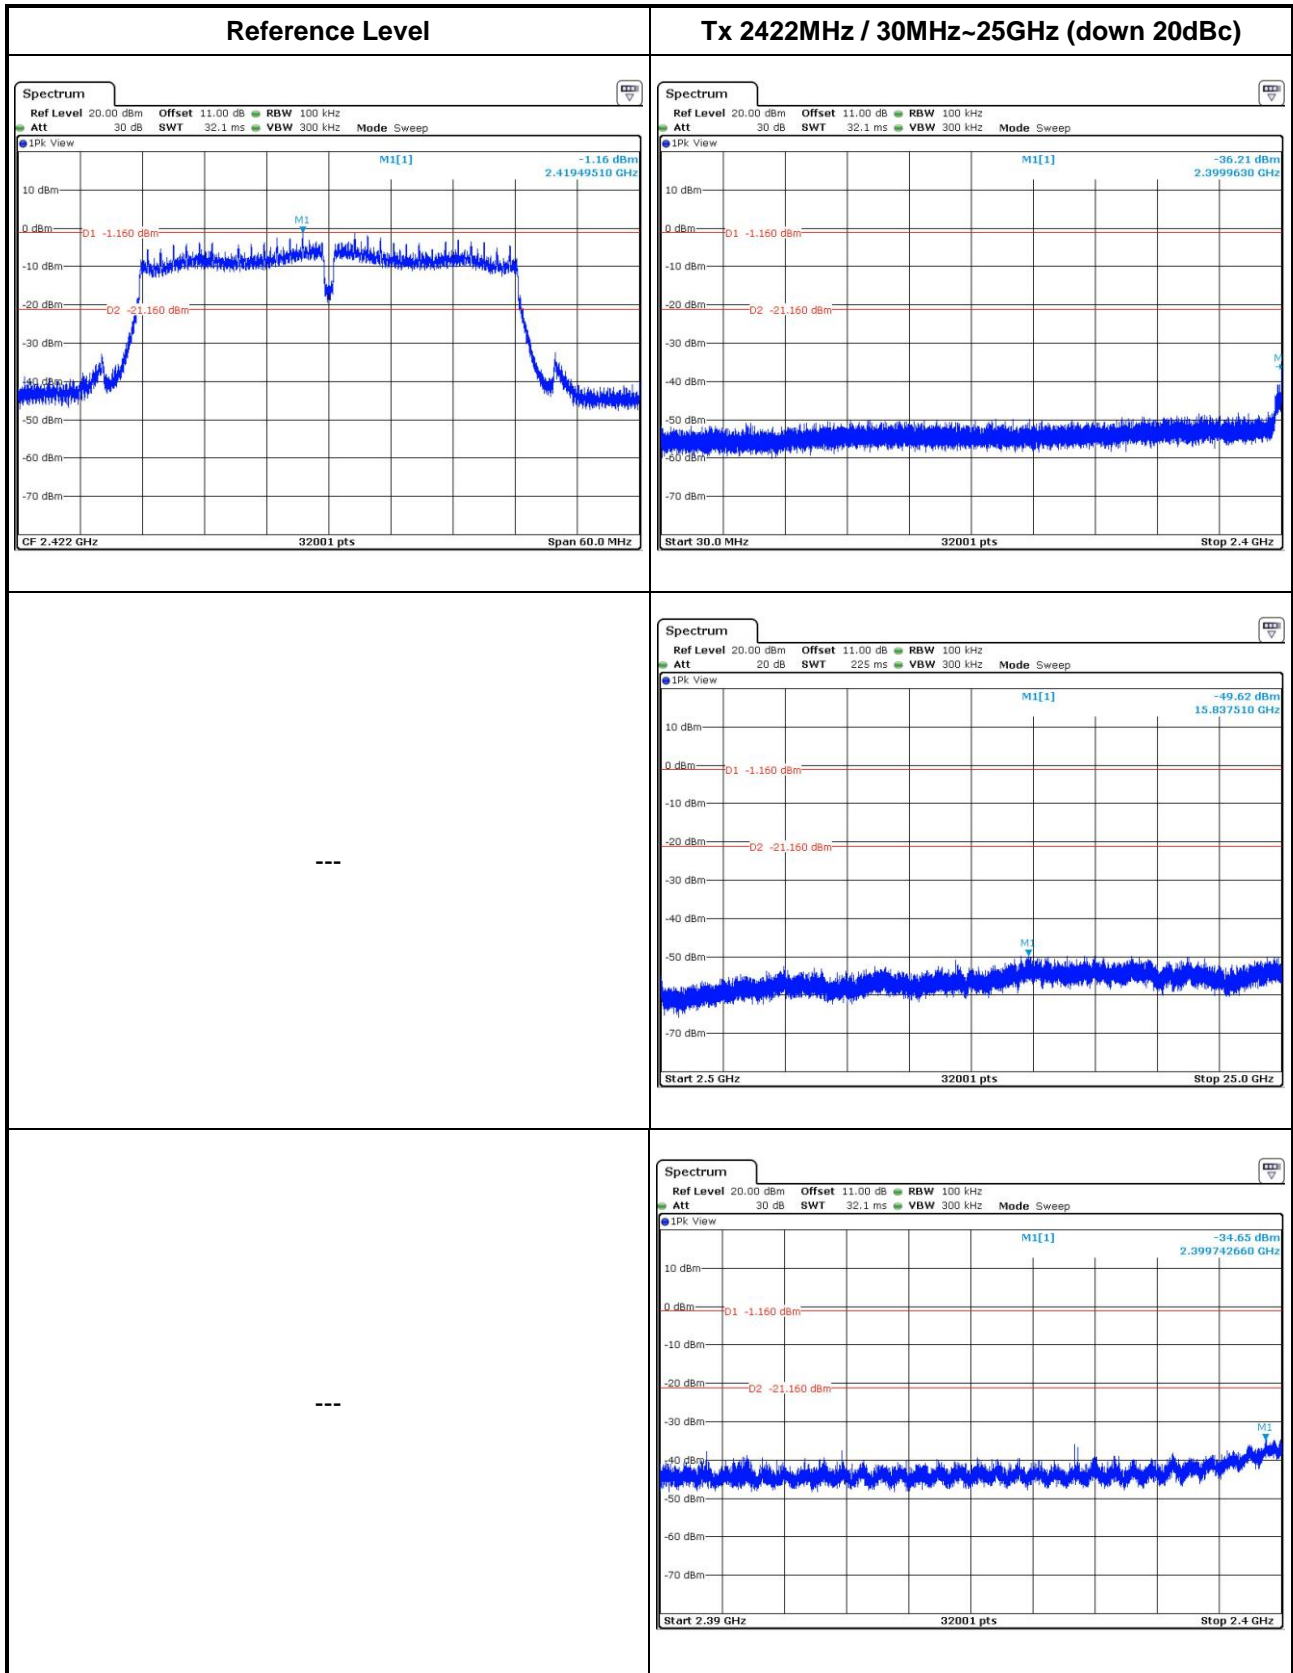

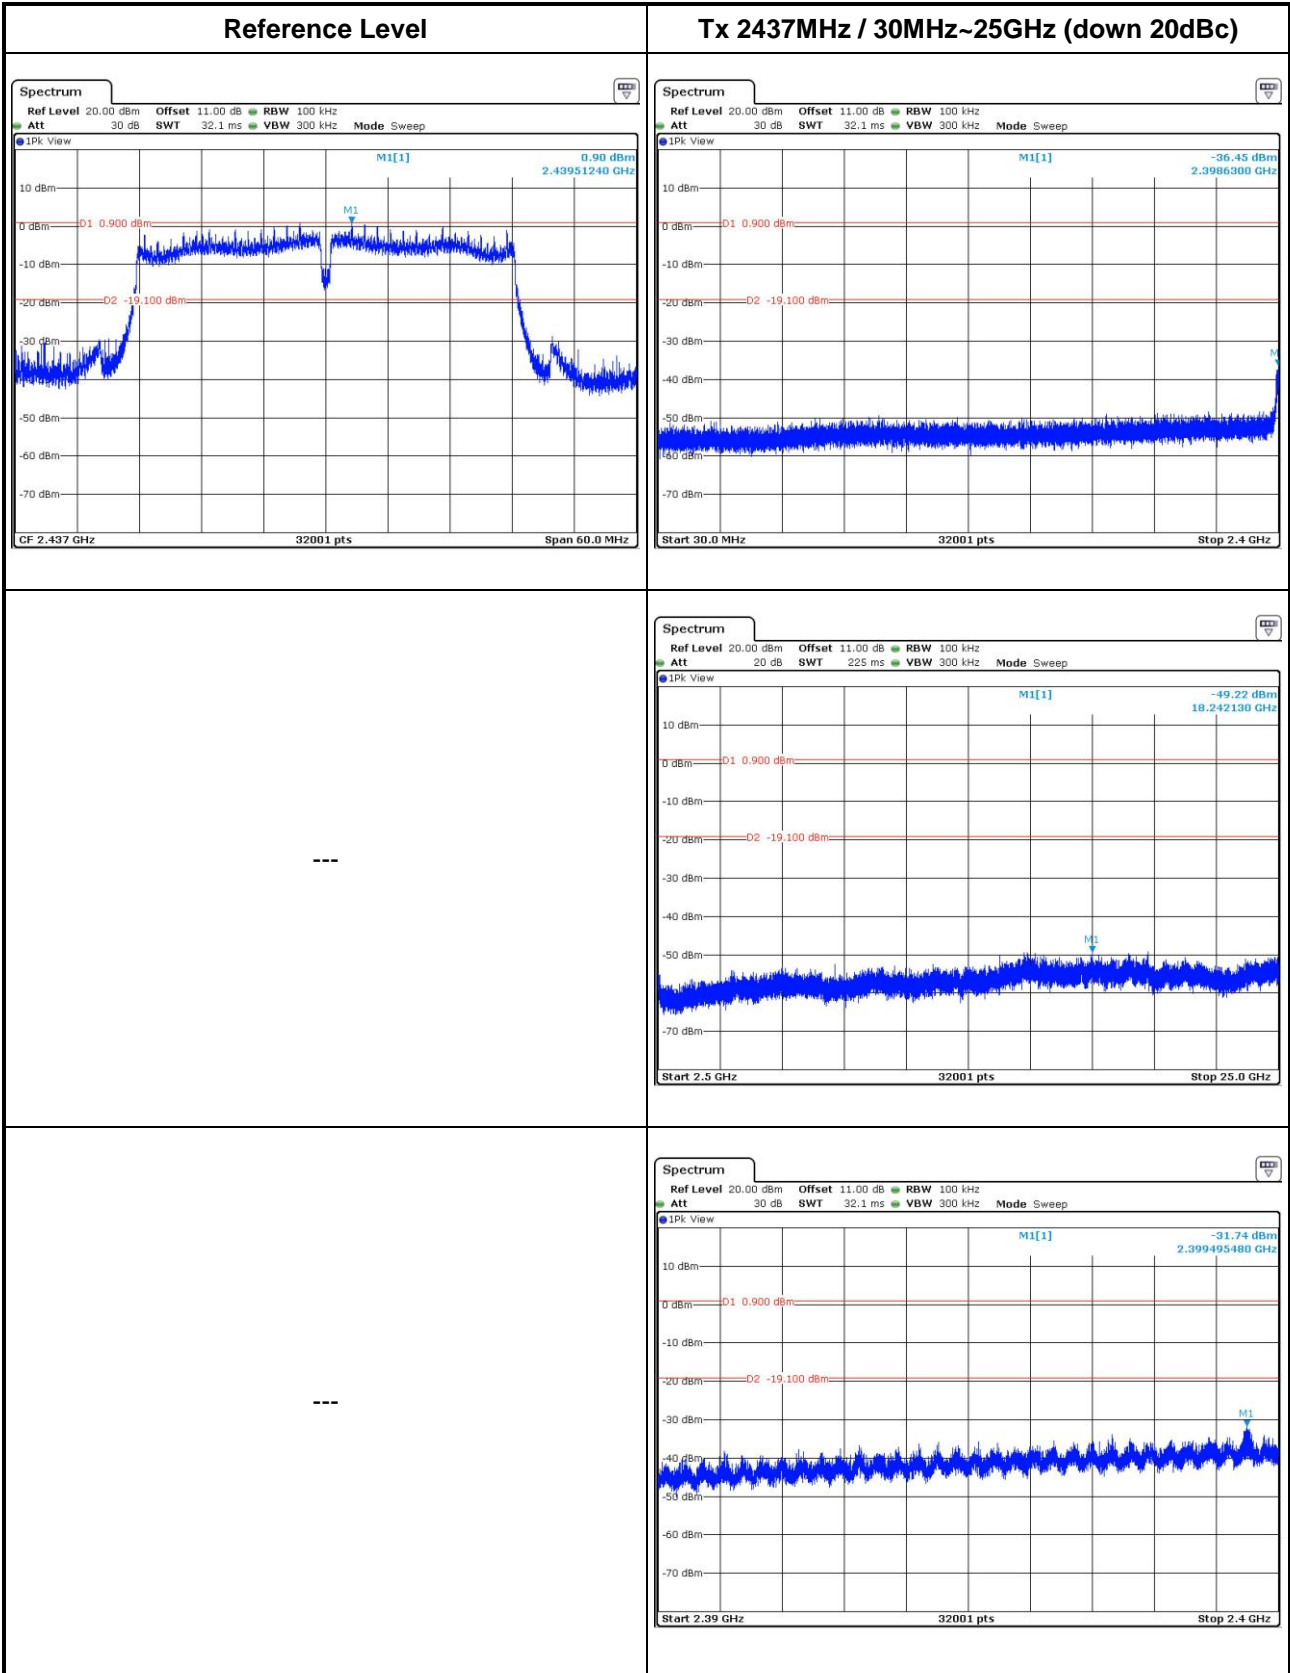

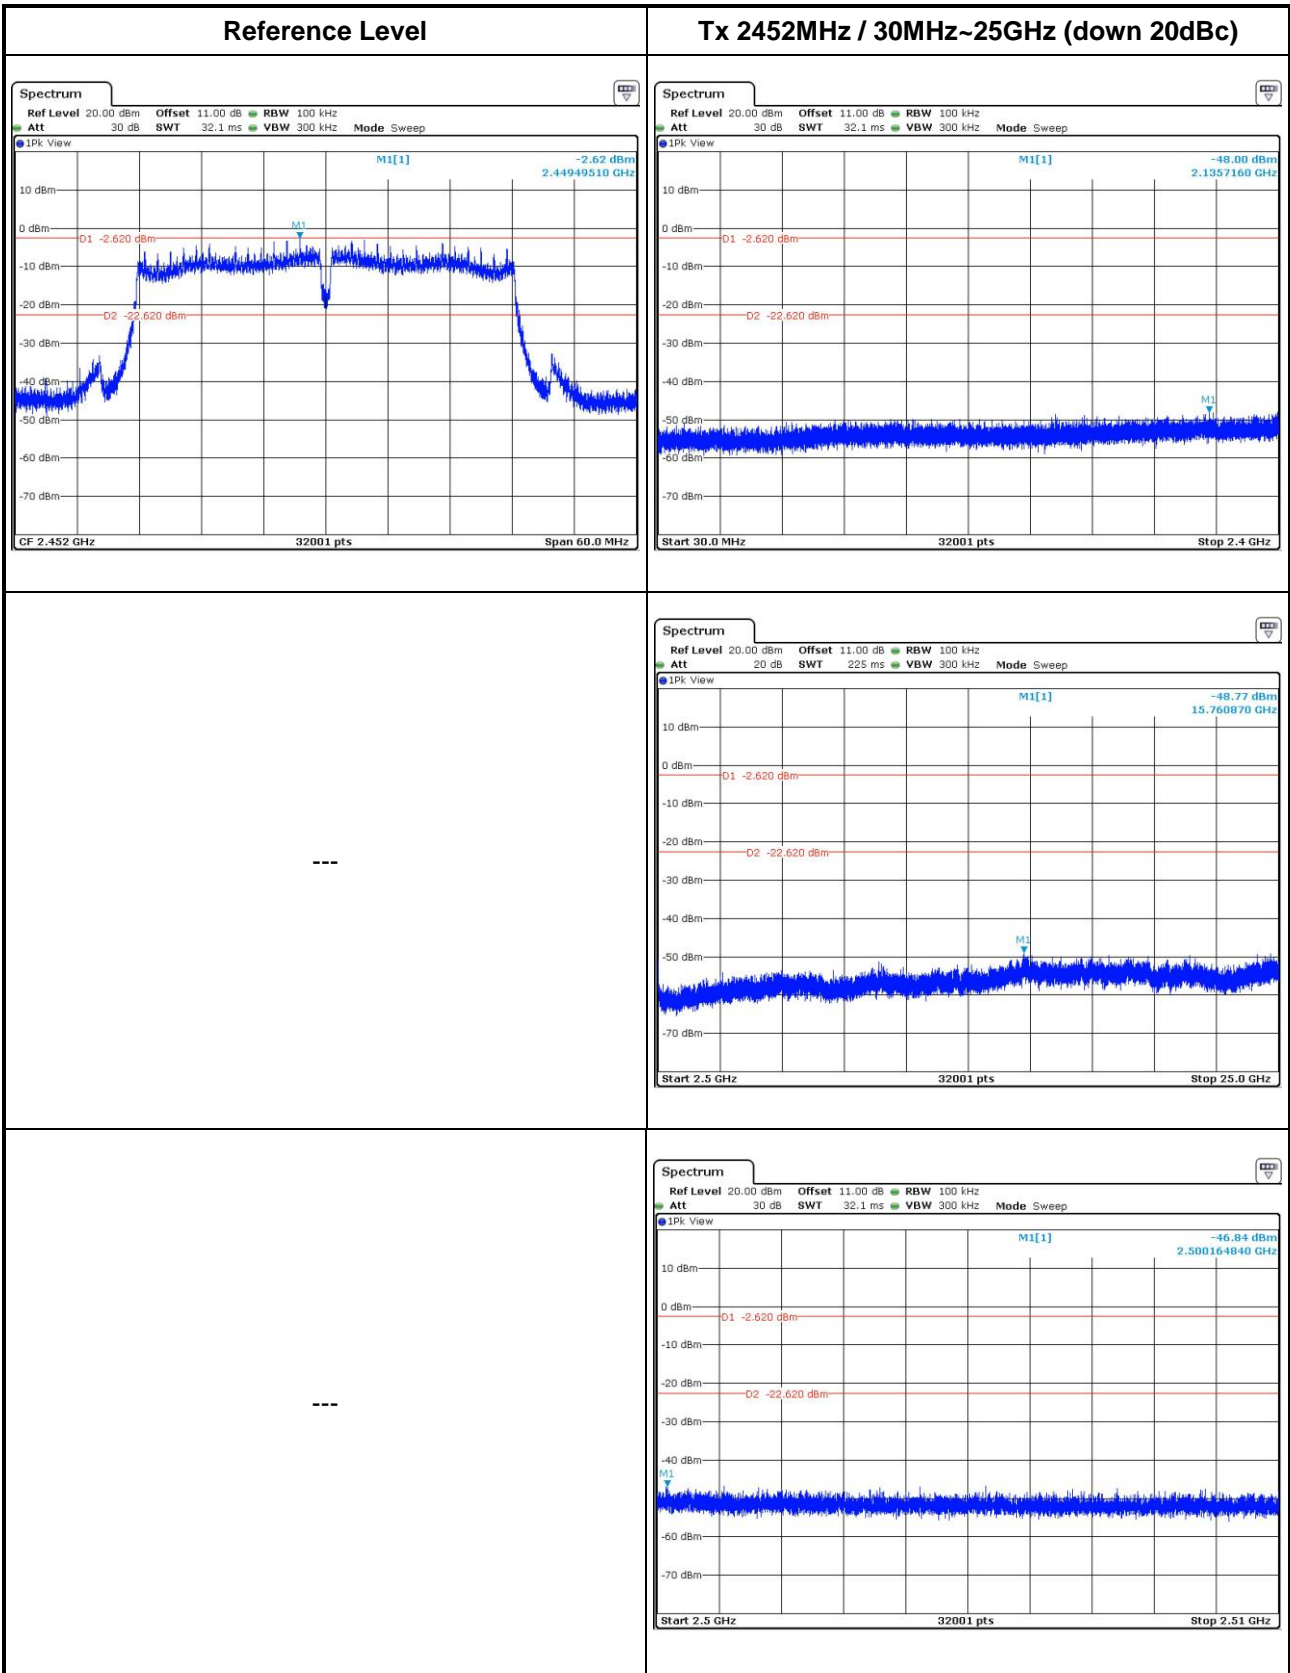

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan,  
R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==