



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372
13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

July 14, 2015

ARRIS Group, Inc.
3871 Lakefield Drive, Suite 300
Suwanee, GA 30024

Dear Tony Figueiredo,

Enclosed is the EMC Wireless Class II Permissive Change test report for compliance testing of the ARRIS Group, Inc., TG1662/TG1672 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407, Subpart E (UNII 3) for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\ARRIS Group, Inc.\ EMC85669-FCC407 UNII 3 Rev. 3)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

**Electromagnetic Compatibility Criteria
Class II Permissive Change Test Report**

for the

**ARRIS Group, Inc.
Model TG1662/TG1672**

Tested under

The FCC Certification Rules
contained in

Title 47 of the CFR, Part 15.407 for Intentional Radiators

MET Report: EMC85669-FCC407 UNII 3 Rev. 3

July 14, 2015

Prepared For:

**ARRIS Group, Inc.
3871 Lakefield Drive, Suite 300
Suwanee, GA 30024**

Prepared By:

MET Laboratories, Inc.
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Class II Permissive Change Test Report

for the

ARRIS Group, Inc.
Model TG1662/TG1672

Tested under

The FCC Certification Rules
contained in
Title 47 of the CFR, Part 15.407 for Intentional Radiators



Benjamin Taylor, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



Asad Bajwa,
Director, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	May 26, 2015	Initial Issue.
1	May 29, 2015	Engineer corrections.
2	July 7, 2015	Revised to update power measurements.
3	July 14, 2015	Revised to reflect updated MPE calculation.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	5
	D. Description of Test Sample.....	5
	E. Equipment Configuration.....	6
	F. Support Equipment	6
	G. Modifications	6
	a) Modifications to EUT.....	6
	b) Modifications to Test Standard.....	6
	H. Disposition of EUT	6
III.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	7
	§ 15.203 Antenna Requirement.....	8
	§ 15.403(c) 26dB Bandwidth.....	9
	§15.407(a)(3) RF Power Output.....	20
	§15.407(a)(1)(i) & §15.407(a)(3) Peak Power Spectral Density	31
	§15.407(b)(1), §15.407(b)(6), & §15.407(b)(7) Undesirable Emissions	42
	§ 15.407(f) RF Exposure	55
	§ 15.407(e) 6dB Bandwidth	56
IV.	Test Equipment	66
V.	Certification & User’s Manual Information	68
	A. Certification Information	69
	B. Label and User’s Manual Information	73

List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing	2
Table 2. EUT Summary.....	4
Table 3. References	5
Table 4. Equipment Configuration	6
Table 5. Support Equipment.....	6
Table 6. Occupied Bandwidth, Test Results.....	10
Table 7. RF Output Power, Test Results	21
Table 8. Power Spectral Density Test Results.....	32
Table 10. Test Equipment List	67

List of Figures

Figure 1. Occupied Bandwidth, Test Setup	9
Figure 2. Power Output Test Setup	20
Figure 3. Power Spectral Density Test Setup	31
Figure 4. Occupied Bandwidth, Test Setup	56

List of Photographs

Photograph 1. Radiated Spurious Emissions, Test Setup, 30 MHz – 1 GHz.....	52
Photograph 2. Radiated Spurious Emissions, Test Setup, 1 GHz – 18 GHz	53
Photograph 3. Radiated Spurious Emissions, Test Setup, 18 GHz – 40 GHz	54

List of Plots

Plot 1. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 0	11
Plot 2. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 0	11
Plot 3. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 0	11
Plot 4. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 1	12
Plot 5. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 1	12
Plot 6. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 1	12
Plot 7. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 2	13
Plot 8. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 2	13
Plot 9. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 2	13
Plot 10. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 0	14
Plot 11. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 0	14
Plot 12. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 0	14
Plot 13. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 1	15
Plot 14. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 1	15
Plot 15. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 1	15
Plot 16. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 2	16
Plot 17. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 2	16
Plot 18. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 2	16
Plot 19. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 0	17
Plot 20. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 0	17
Plot 21. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 0	17
Plot 22. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 1	18
Plot 23. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 1	18
Plot 24. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 1	18
Plot 25. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 2	19

Plot 26. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 2	19
Plot 27. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 2	19
Plot 28. RF Output Power, 802.11a, Low Channel, 5745 MHz, Antenna 0	22
Plot 29. RF Output Power, 802.11a, Mid Channel, 5785 MHz, Antenna 0	22
Plot 30. RF Output Power, 802.11a, High Channel, 5825 MHz, Antenna 0	22
Plot 31. RF Output Power, 802.11a, Low Channel, 5745 MHz, Antenna 1	23
Plot 32. RF Output Power, 802.11a, Mid Channel, 5785 MHz, Antenna 1	23
Plot 33. RF Output Power, 802.11a, High Channel, 5825 MHz, Antenna 1	23
Plot 34. RF Output Power, 802.11a, Low Channel, 5745 MHz, Antenna 2	24
Plot 35. RF Output Power, 802.11a, Mid Channel, 5785 MHz, Antenna 2	24
Plot 36. RF Output Power, 802.11a, High Channel, 5825 MHz, Antenna 2	24
Plot 37. RF Output Power, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 0	25
Plot 38. RF Output Power, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 0	25
Plot 39. RF Output Power, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 0	25
Plot 40. RF Output Power, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 1	26
Plot 41. RF Output Power, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 1	26
Plot 42. RF Output Power, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 1	26
Plot 43. RF Output Power, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 2	27
Plot 44. RF Output Power, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 2	27
Plot 45. RF Output Power, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 2	27
Plot 46. RF Output Power, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 0	28
Plot 47. RF Output Power, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 0	28
Plot 48. RF Output Power, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 0	28
Plot 49. RF Output Power, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 1	29
Plot 50. RF Output Power, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 1	29
Plot 51. RF Output Power, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 1	29
Plot 52. RF Output Power, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 2	30
Plot 53. RF Output Power, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 2	30
Plot 54. RF Output Power, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 2	30
Plot 55. Peak Power Spectral Density, 802.11a, Low Channel, 5745 MHz, Antenna 0	33
Plot 56. Peak Power Spectral Density, 802.11a, Mid Channel, 5785 MHz, Antenna 0	33
Plot 57. Peak Power Spectral Density, 802.11a, High Channel, 5825 MHz, Antenna 0	33
Plot 58. Peak Power Spectral Density, 802.11a, Low Channel, 5745 MHz, Antenna 1	34
Plot 59. Peak Power Spectral Density, 802.11a, Mid Channel, 5785 MHz, Antenna 1	34
Plot 60. Peak Power Spectral Density, 802.11a, High Channel, 5825 MHz, Antenna 1	34
Plot 61. Peak Power Spectral Density, 802.11a, Low Channel, 5745 MHz, Antenna 2	35
Plot 62. Peak Power Spectral Density, 802.11a, Mid Channel, 5785 MHz, Antenna 2	35
Plot 63. Peak Power Spectral Density, 802.11a, High Channel, 5825 MHz, Antenna 2	35
Plot 64. Peak Power Spectral Density, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 0	36
Plot 65. Peak Power Spectral Density, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 0	36
Plot 66. Peak Power Spectral Density, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 0	36
Plot 67. Peak Power Spectral Density, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 1	37
Plot 68. Peak Power Spectral Density, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 1	37
Plot 69. Peak Power Spectral Density, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 1	37
Plot 70. Peak Power Spectral Density, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 2	38
Plot 71. Peak Power Spectral Density, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 2	38
Plot 72. Peak Power Spectral Density, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 2	38
Plot 73. Peak Power Spectral Density, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 0	39
Plot 74. Peak Power Spectral Density, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 0	39
Plot 75. Peak Power Spectral Density, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 0	39
Plot 76. Peak Power Spectral Density, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 1	40
Plot 77. Peak Power Spectral Density, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 1	40
Plot 78. Peak Power Spectral Density, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 1	40
Plot 79. Peak Power Spectral Density, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 2	41
Plot 80. Peak Power Spectral Density, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 2	41
Plot 81. Peak Power Spectral Density, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 2	41

Plot 82. Radiated Spurious Emissions, 5745 MHz, 802.11a 20 MHz, 30 MHz – 1 GHz	43
Plot 83. Radiated Spurious Emissions, 5745 MHz, 802.11a 20 MHz, 1 GHz – 7 GHz	43
Plot 84. Radiated Spurious Emissions, 5745 MHz, 802.11a 20 MHz, 7 GHz – 18 GHz	43
Plot 85. Radiated Spurious Emissions, 5785 MHz, 802.11a 20 MHz, 30 MHz – 1 GHz	44
Plot 86. Radiated Spurious Emissions, 5785 MHz, 802.11a 20 MHz, 1 GHz – 7 GHz	44
Plot 87. Radiated Spurious Emissions, 5785 MHz, 802.11a 20 MHz, 7 GHz – 18 GHz	44
Plot 88. Radiated Spurious Emissions, 5825 MHz, 802.11a 20 MHz, 30 MHz – 1 GHz	45
Plot 89. Radiated Spurious Emissions, 5825 MHz, 802.11a 20 MHz, 1 GHz – 7 GHz	45
Plot 90. Radiated Spurious Emissions, 5825 MHz, 802.11a 20 MHz, 7 GHz – 18 GHz	45
Plot 91. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz	46
Plot 92. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz	46
Plot 93. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz	46
Plot 94. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz	47
Plot 95. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz	47
Plot 96. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz	47
Plot 97. Radiated Spurious Emissions, 5825 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz	48
Plot 98. Radiated Spurious Emissions, 5825 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz	48
Plot 99. Radiated Spurious Emissions, 5825 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz	48
Plot 100. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz	49
Plot 101. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz	49
Plot 102. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz	49
Plot 103. Radiated Spurious Emissions, 5785 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz	50
Plot 104. Radiated Spurious Emissions, 5785 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz	50
Plot 105. Radiated Spurious Emissions, 5785 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz	50
Plot 106. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz	51
Plot 107. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz	51
Plot 108. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz	51
Plot 109. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 0	57
Plot 110. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 0	57
Plot 111. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 0	57
Plot 112. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 1	58
Plot 113. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 1	58
Plot 114. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 1	58
Plot 115. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 2	59
Plot 116. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 2	59
Plot 117. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 2	59
Plot 118. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 0	60
Plot 119. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 0	60
Plot 120. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 0	60
Plot 121. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 1	61
Plot 122. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 1	61
Plot 123. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 1	61
Plot 124. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 2	62
Plot 125. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 2	62
Plot 126. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 2	62
Plot 127. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 0	63
Plot 128. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 0	63
Plot 129. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 0	63
Plot 130. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 1	64
Plot 131. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 1	64
Plot 132. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 1	64
Plot 133. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 2	65
Plot 134. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 2	65
Plot 135. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 2	65

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	Kilohertz
kPa	Kilopascal
kV	Kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	Microhenry
μ	Microfarad
μ s	Microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the ARRIS Group, Inc. TG1662/TG1672, with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the TG1662/TG1672. ARRIS Group, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the TG1662/TG1672, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with ARRIS Group, Inc., purchase order number 1ARR2703. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	Description	Results
§15.203	Antenna Requirements	Compliant
§15.403 (i)	26dB Occupied Bandwidth	Compliant
§15.407 (a)(3)	Conducted Transmitter Output Power	Compliant
§15.407 (a)(3)	Power Spectral Density	Compliant
§15.407 (b)(4), (6), (7)	Undesirable Emissions (15.205/15.209 - General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Compliant
§15.407 (e)	6 dB Bandwidth	Compliant
§15.407(f)	RF Exposure	Compliant

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by ARRIS Group, Inc. to perform testing on the TG1662/TG1672, under ARRIS Group, Inc.'s purchase order number 1ARR2703.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the ARRIS Group, Inc. TG1662/TG1672.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	TG1662/TG1672	
Model(s) Covered:	TG1662/TG1672	
EUT Specifications:	Primary Power: 120 VAC, 60 Hz	
	Class II Permissive Change FCC ID: UIDTG1672	
	Type of Modulations:	OFDM
	Equipment Code:	UNII
	Peak RF Output Power:	22.34dBm
	EUT Frequency Ranges:	5745MHz-5825 MHz 5755MHz-5795MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Benjamin Taylor	
Report Date(s):	July 14, 2015	

Table 2. EUT Summary

Note: This is a class II PC to transition from 5.8 GHz DTS to UNII-3.

B. References

CFR 47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices (UNII)
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices
KDB 789033 D02	General UNII Test Procedures

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The ARRIS Group, Inc. TG1662/TG1672, Equipment Under Test (EUT), combines two analog voice lines, a 4-port Gigabit Router, and 802.11n wireless access point with two independent, simultaneously operating 802.11n radios into a single device capable of supporting both home and small office applications. The TC1672G can achieve high bandwidth performance without affecting voice quality.

E. Equipment Configuration

Name / Description	Model Number	Serial Number
Telephony Gateway	TG1672G	CCFBSN222200200

Table 4. Equipment Configuration

F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Name / Description	Manufacturer	Model Number
Ethernet Cable Config / Control	Dell	Vostro
Telephone	Emerson	EM-2115RW
USB Flash Drive	Verbatim	4 GB

Table 5. Support Equipment

G. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

H. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to ARRIS Group, Inc. upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The EUT has integral antennas.

Test Engineer(s): Djed Mouada

Test Date(s): 04/23/15

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.403(i) 26dB Bandwidth

Test Requirements: § 15.403 (i): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Procedure: The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB, and 99% Bandwidth was measured and recorded. Sampling detector was not practical to obtain a clear measurement with this radio; peak detector was used for the 99% Bandwidth measurements as well.

Test Results The 26 dB and 99% Bandwidth were compliant with the requirements of this section and was determined from the plots on the following pages.

Test Engineer(s): Djed Mouada

Test Date(s): 04/27/15


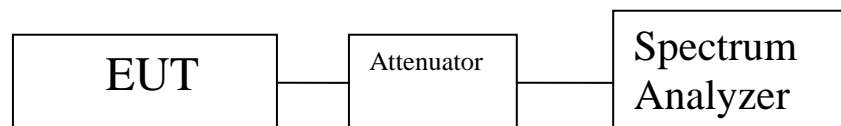


Figure 1. Occupied Bandwidth, Test Setup


	Frequency (MHz)	Occupied Bandwidth (MHz)
802.11a Antenna 0	5745	22.433
	5785	22.537
	5825	22.793
802.11a Antenna 1	5745	24.385
	5785	20.747
	5825	22.815
802.11a Antenna 2	5745	24.357
	5785	20.296
	5825	23.438
802.11n 20 MHz Antenna 0	5745	25.691
	5785	25.351
	5825	22.318
802.11n 20 MHz Antenna 1	5745	21.454
	5785	20.862
	5825	20.867
802.11n 20 MHz Antenna 2	5745	21.268
	5785	20.154
	5825	21.959
802.11n 40 MHz Antenna 0	5755	47.332
	5785	44.241
	5795	43.063
802.11n 40 MHz Antenna 1	5755	44.423
	5785	38.395
	5795	40.321
802.11n 40 MHz Antenna 2	5755	39.774
	5785	39.330
	5795	39.011

Table 6. Occupied Bandwidth, Test Results


Occupied Bandwidth, 802.11a, Antenna 0

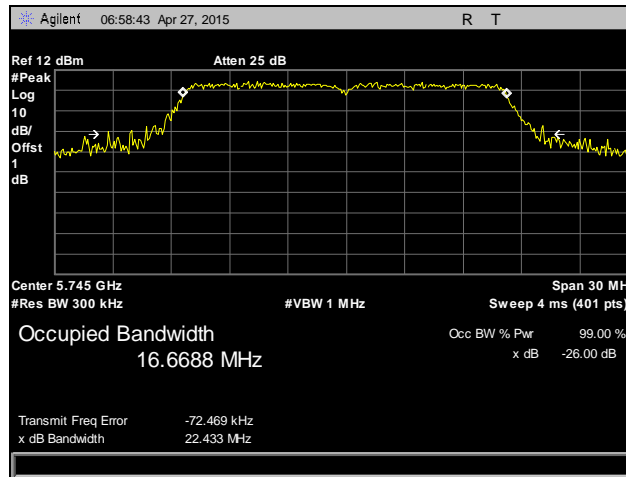

Plot 1. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 0

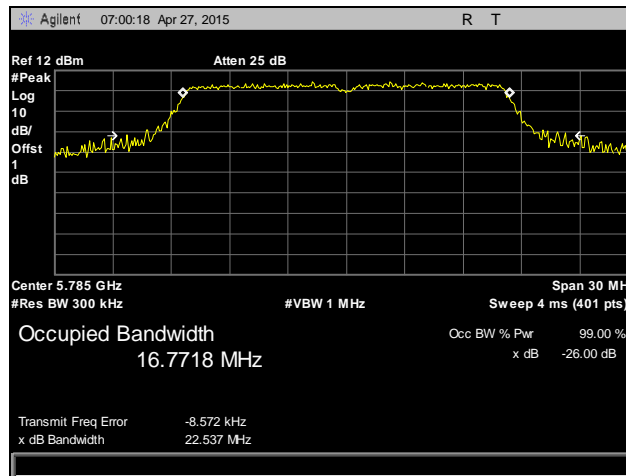


Plot 2. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 0

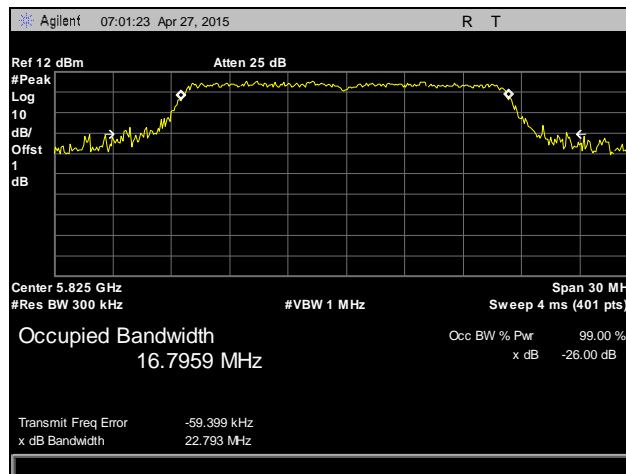


Plot 3. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 0


Occupied Bandwidth, 802.11a, Antenna 1

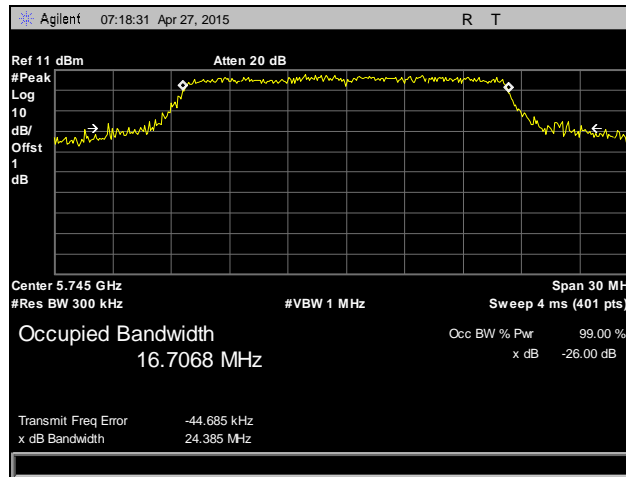

Plot 4. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 1

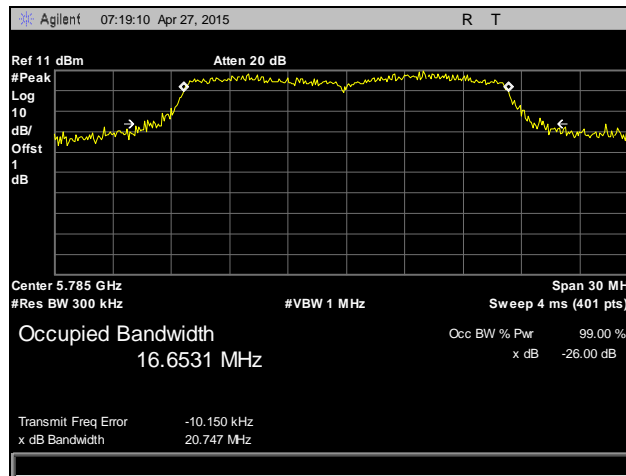


Plot 5. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 1

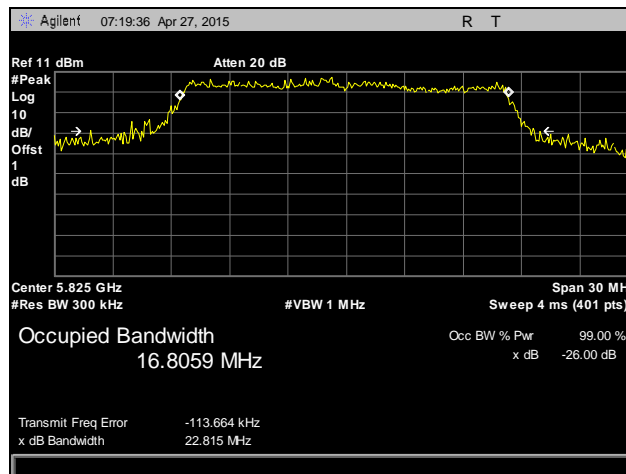


Plot 6. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 1


Occupied Bandwidth, 802.11a, Antenna 2

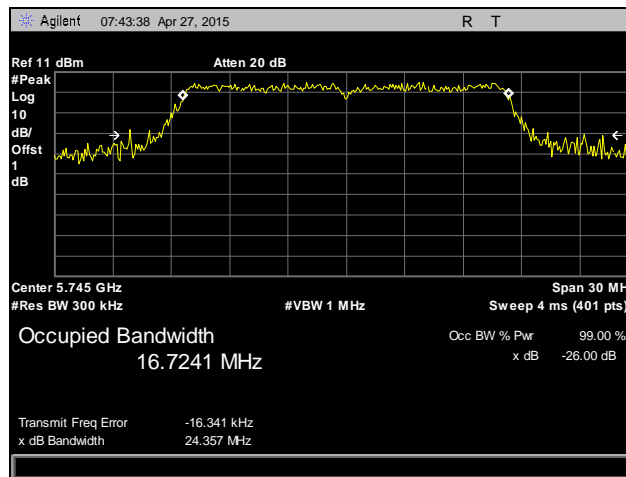

Plot 7. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 2

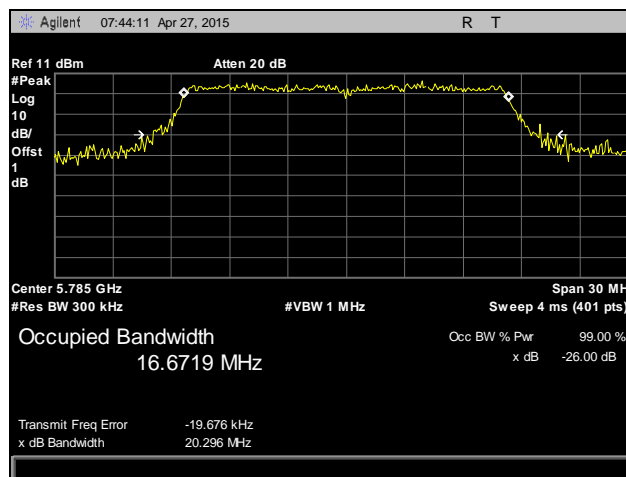


Plot 8. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 2

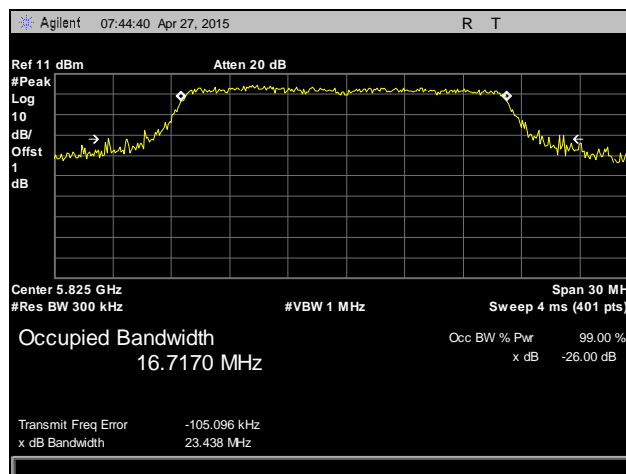


Plot 9. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 2


Occupied Bandwidth, 802.11n 20 MHz, Antenna 0

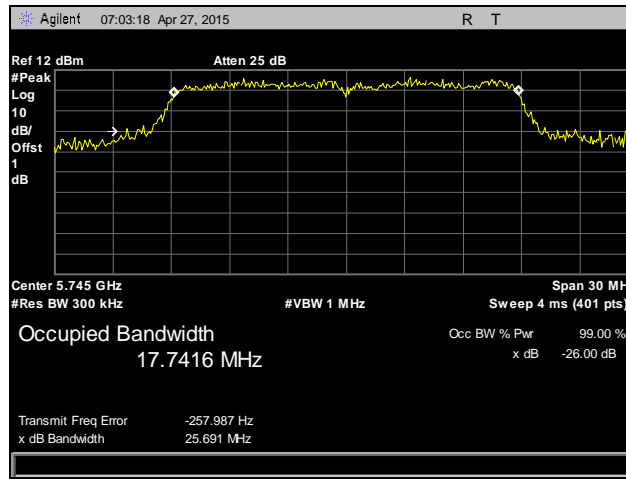

Plot 10. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 0

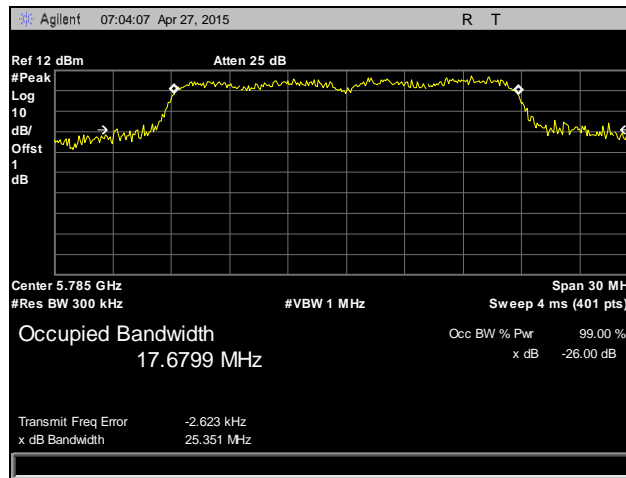


Plot 11. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 0

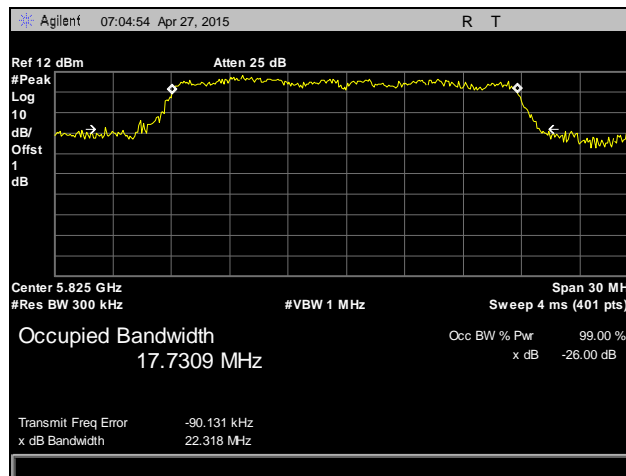


Plot 12. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 0


Occupied Bandwidth, 802.11n 20 MHz, Antenna 1

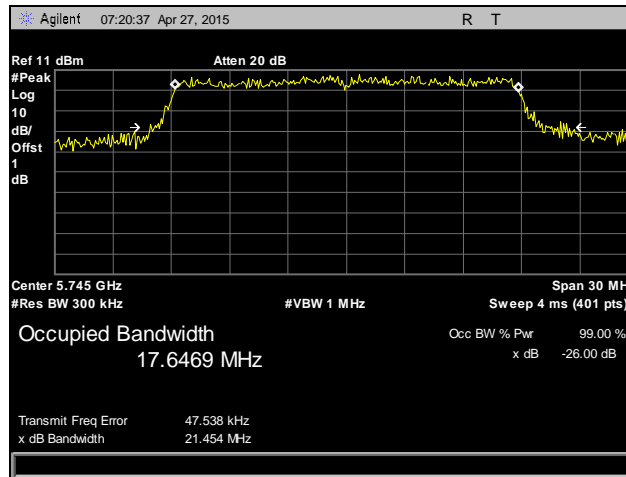

Plot 13. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 1

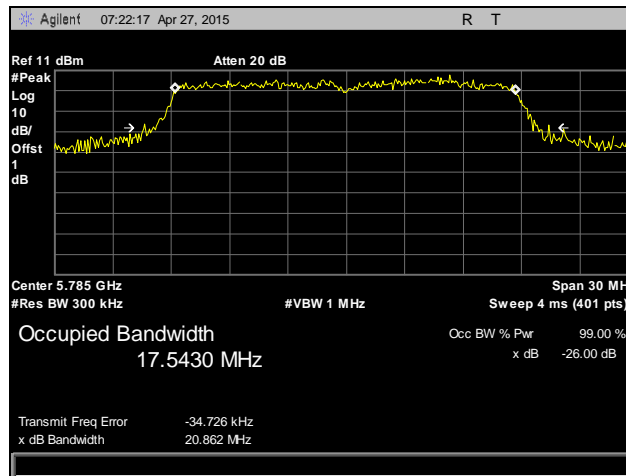


Plot 14. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 1

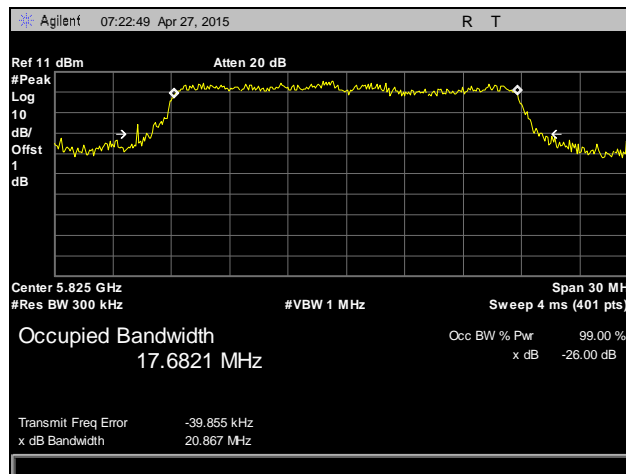


Plot 15. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 1


Occupied Bandwidth, 802.11n 20 MHz, Antenna 2

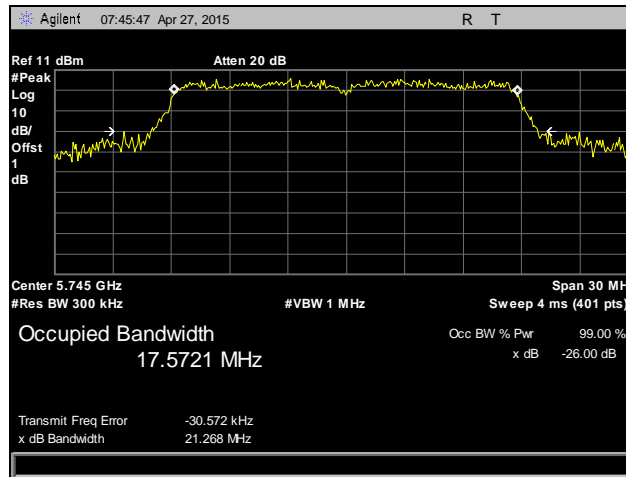

Plot 16. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 2

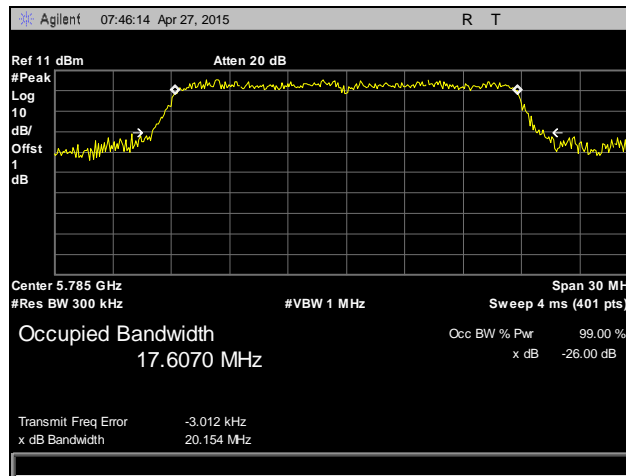


Plot 17. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 2

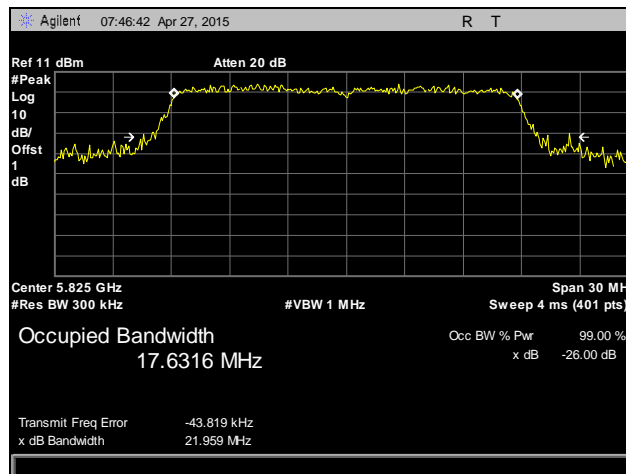


Plot 18. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 2


Occupied Bandwidth, 802.11n 40 MHz, Antenna 0

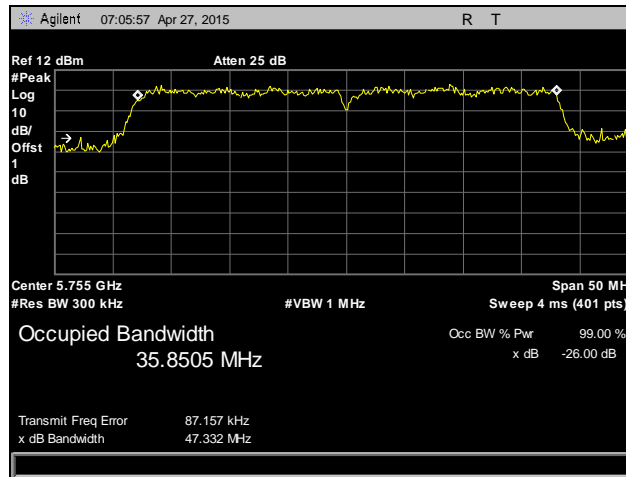

Plot 19. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 0

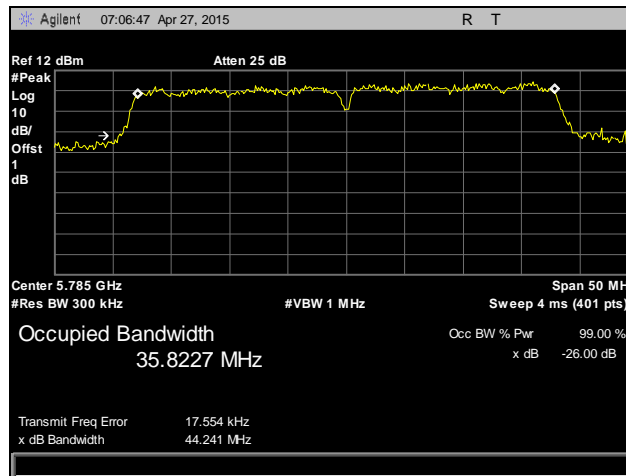


Plot 20. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 0

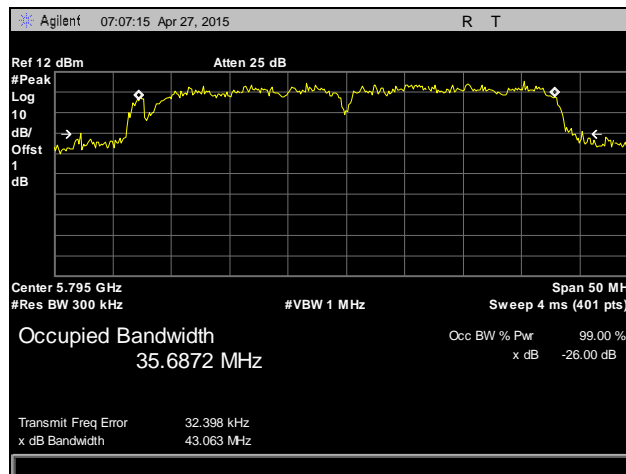


Plot 21. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 0


Occupied Bandwidth, 802.11n 40 MHz, Antenna 1

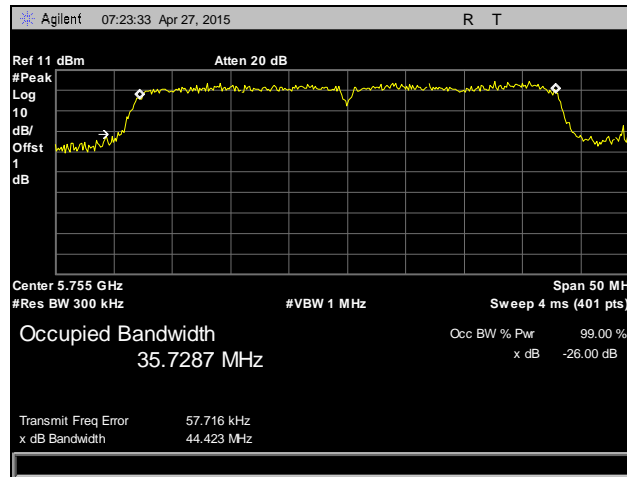

Plot 22. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 1

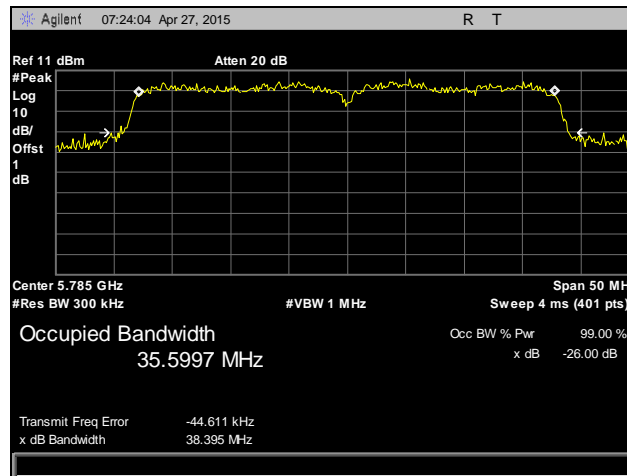


Plot 23. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 1

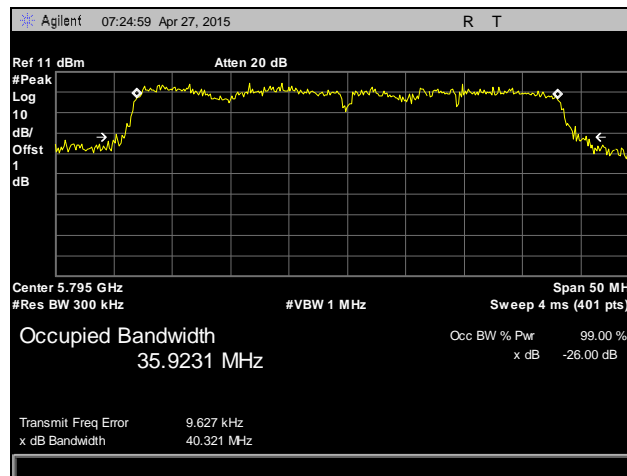


Plot 24. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 1


Occupied Bandwidth, 802.11n 40 MHz, Antenna 2

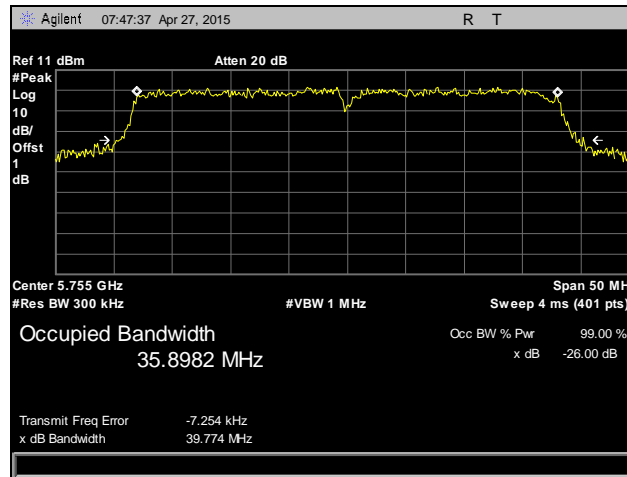

Plot 25. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 2

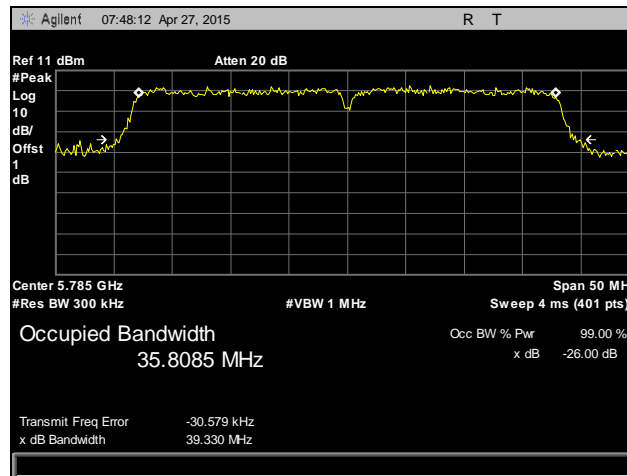

Plot 26. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 2

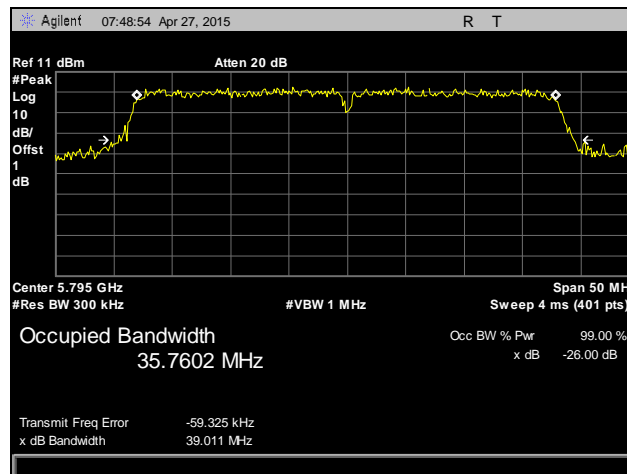

Plot 27. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 2

Electromagnetic Compatibility Criteria for Intentional Radiators

§§15.407(a)(3) RF Power Output

Test Requirements: §15.407(a)(3): For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

Test Procedure: The EUT was connected to a spectrum analyzer through an attenuator and set to transmit continuously on the low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in 789033 D02 General UNII Test Procedures New Rule v01. Plots were corrected for attenuator and cable loss.

Test Results: Equipment was compliant with the Peak Power Output limits of §15.407(a)(3).

Test Engineer(s): Djed Mouada

Test Date(s): 04/27/15

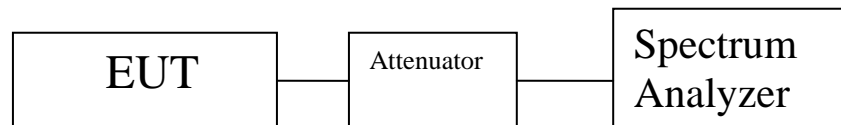



Figure 2. Power Output Test Setup

	Frequency (MHz)	Raw RF Output Power (dBm)	Measurement Cabling Loss (dB)	Corrected Output Power (dBm)
802.11a Antenna 0	5745	19.74	1.78	21.52
	5785	18.74	1.78	20.52
	5825	18.42	1.78	20.2
802.11a Antenna 1	5745	18.68	1.78	20.46
	5785	18.24	1.78	20.02
	5825	18.54	1.78	20.32
802.11a Antenna 2	5745	20.43	1.78	22.21
	5785	19.87	1.78	21.65
	5825	20.41	1.78	22.19
802.11n 20 MHz Antenna 0	5745	19.51	1.78	21.29
	5785	19.04	1.78	20.82
	5825	18.42	1.78	20.2
802.11n 20 MHz Antenna 1	5745	18.49	1.78	20.27
	5785	18.68	1.78	20.46
	5825	18.53	1.78	20.31
802.11n 20 MHz Antenna 2	5745	20.56	1.78	22.34
	5785	19.43	1.78	21.21
	5825	18.23	1.78	20.01
802.11n 40 MHz Antenna 0	5755	18.57	1.78	20.35
	5785	18.52	1.78	20.3
	5795	18.44	1.78	20.22
802.11n 40 MHz Antenna 1	5755	18.56	1.78	20.34
	5785	18.68	1.78	20.46
	5795	18.68	1.78	20.46
802.11n 40 MHz Antenna 2	5755	19.82	1.78	21.6
	5785	18.61	1.78	20.39
	5795	19.16	1.78	20.94


Table 7. RF Output Power, Test Results

Note: The values displayed in the power plots seen below, does not account for 1.78dB of measurement cabling loss. That, and the final corrected power values can be seen in table 7.


RF Output Power, 802.11a, Antenna 0

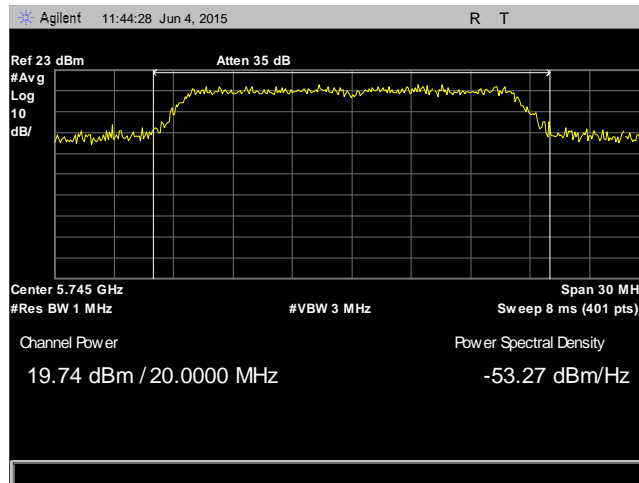

Plot 28. RF Output Power, 802.11a, Low Channel, 5745 MHz, Antenna 0

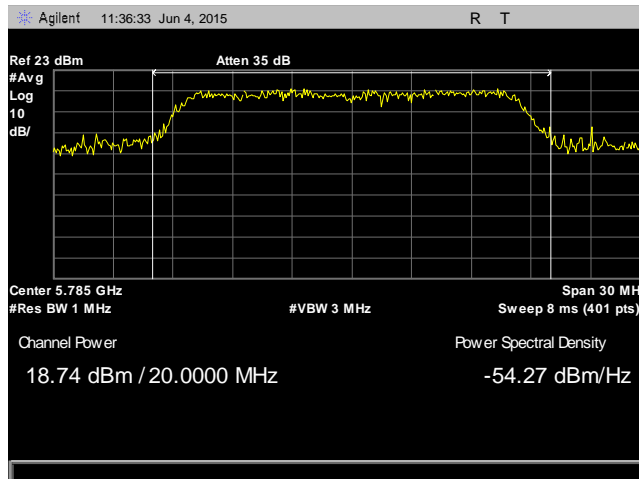


Plot 29. RF Output Power, 802.11a, Mid Channel, 5785 MHz, Antenna 0

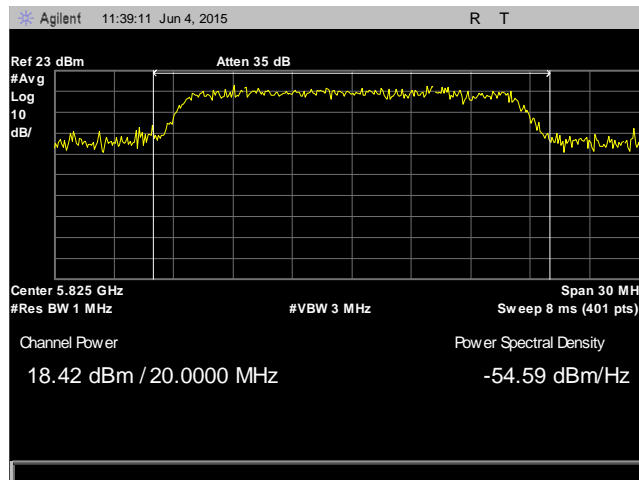


Plot 30. RF Output Power, 802.11a, High Channel, 5825 MHz, Antenna 0


RF Output Power, 802.11a, Antenna 1

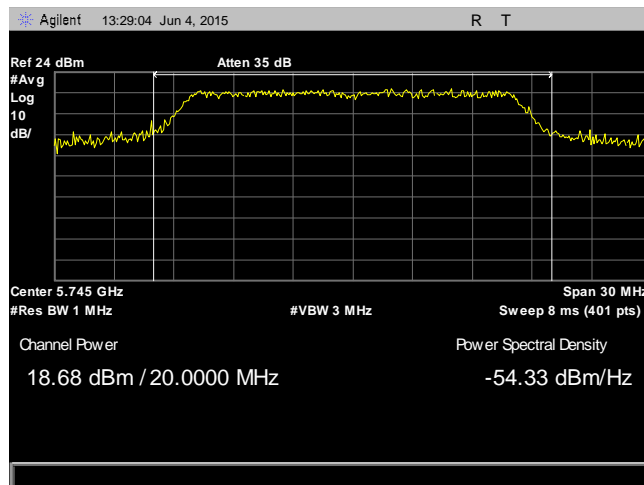

Plot 31. RF Output Power, 802.11a, Low Channel, 5745 MHz, Antenna 1

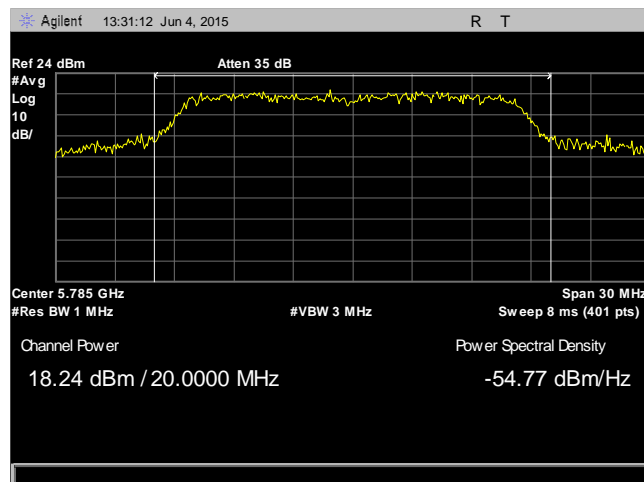


Plot 32. RF Output Power, 802.11a, Mid Channel, 5785 MHz, Antenna 1

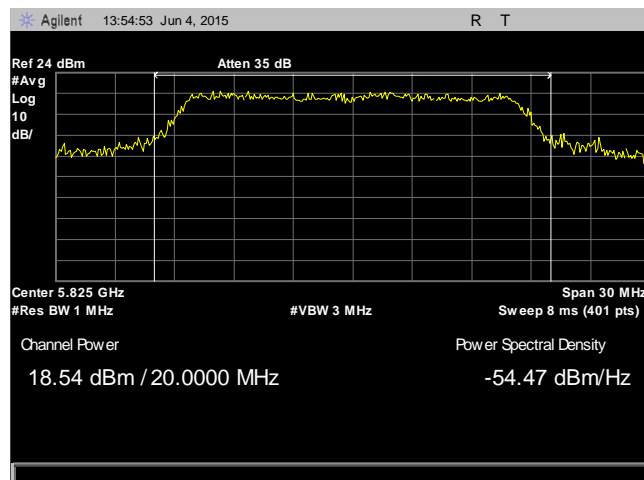


Plot 33. RF Output Power, 802.11a, High Channel, 5825 MHz, Antenna 1


RF Output Power, 802.11a, Antenna 2

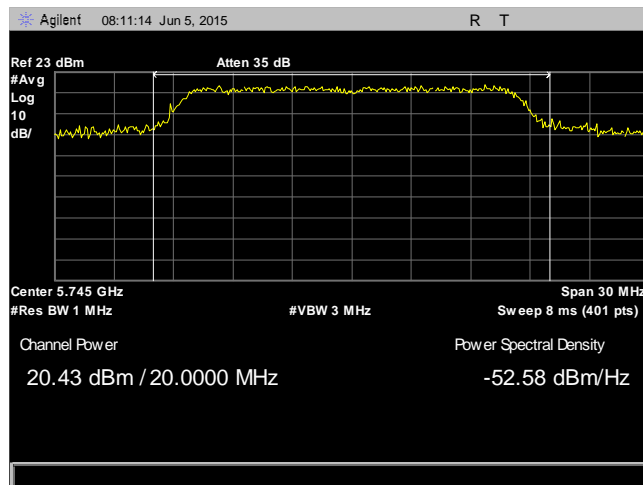

Plot 34. RF Output Power, 802.11a, Low Channel, 5745 MHz, Antenna 2

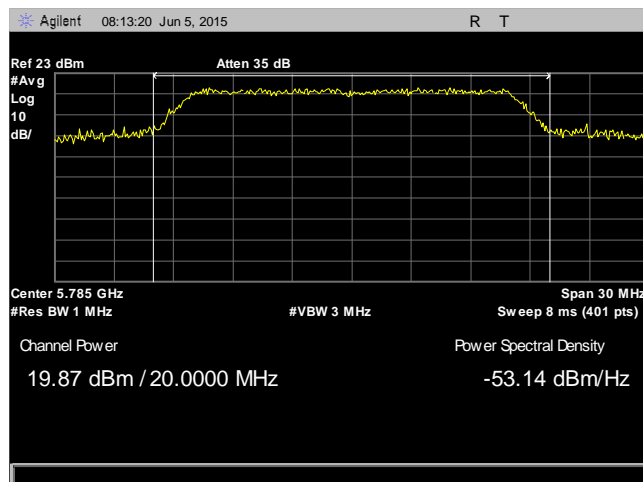


Plot 35. RF Output Power, 802.11a, Mid Channel, 5785 MHz, Antenna 2

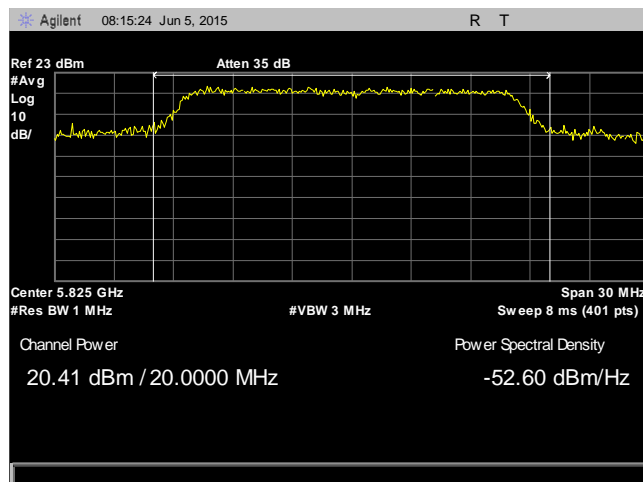


Plot 36. RF Output Power, 802.11a, High Channel, 5825 MHz, Antenna 2


RF Output Power, 802.11n 20 MHz, Antenna 0

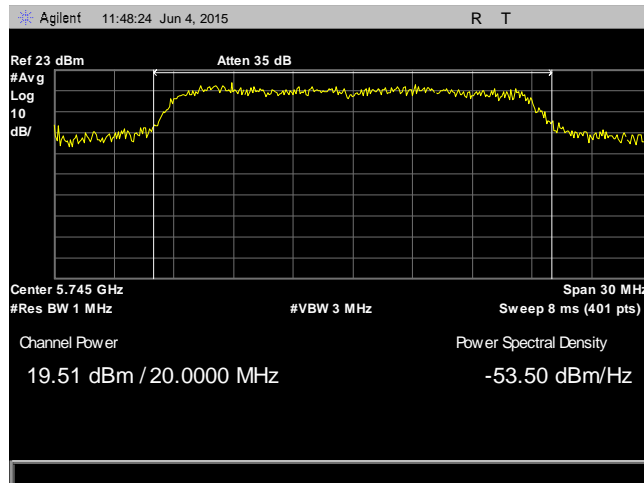

Plot 37. RF Output Power, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 0

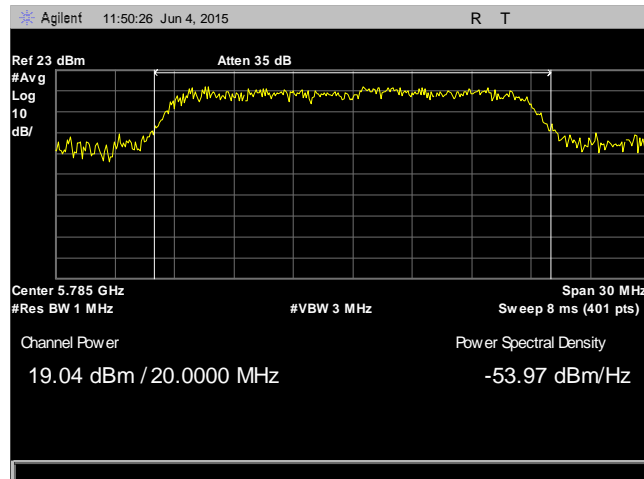


Plot 38. RF Output Power, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 0

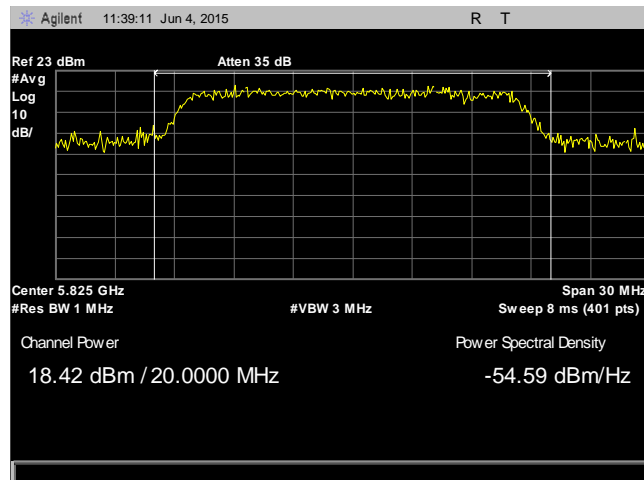


Plot 39. RF Output Power, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 0


RF Output Power, 802.11n 20 MHz, Antenna 1

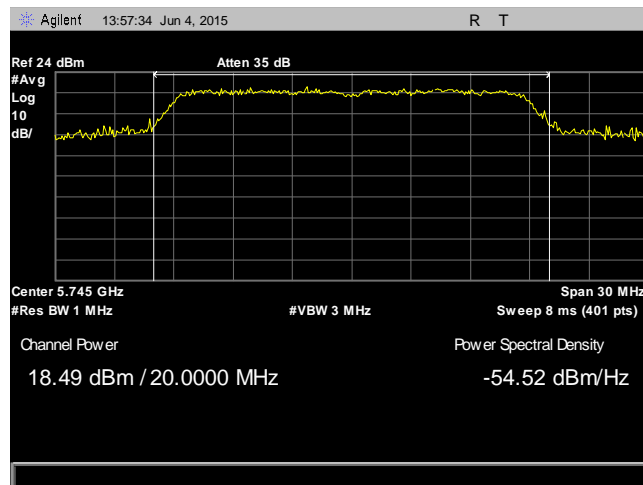

Plot 40. RF Output Power, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 1

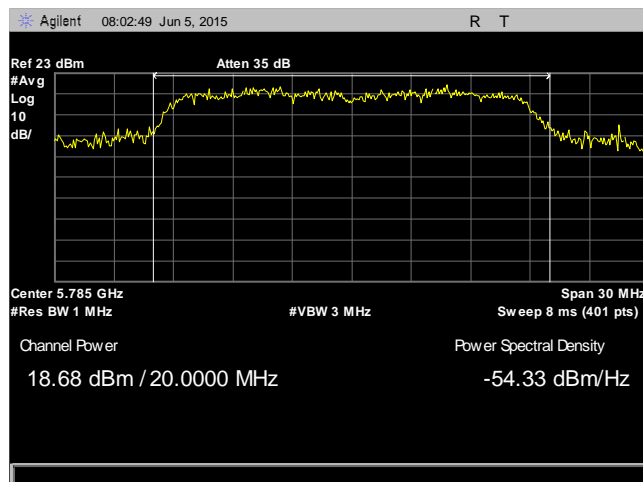


Plot 41. RF Output Power, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 1

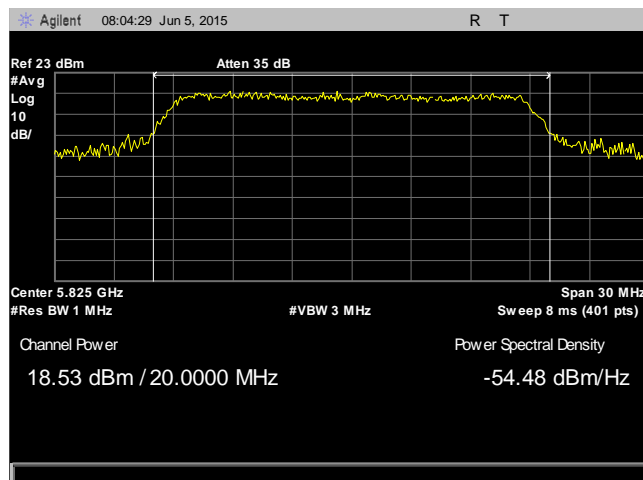


Plot 42. RF Output Power, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 1


RF Output Power, 802.11n 20 MHz, Antenna 2

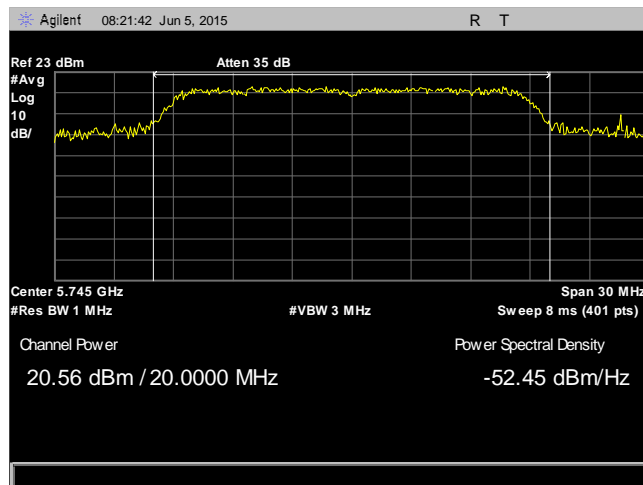

Plot 43. RF Output Power, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 2

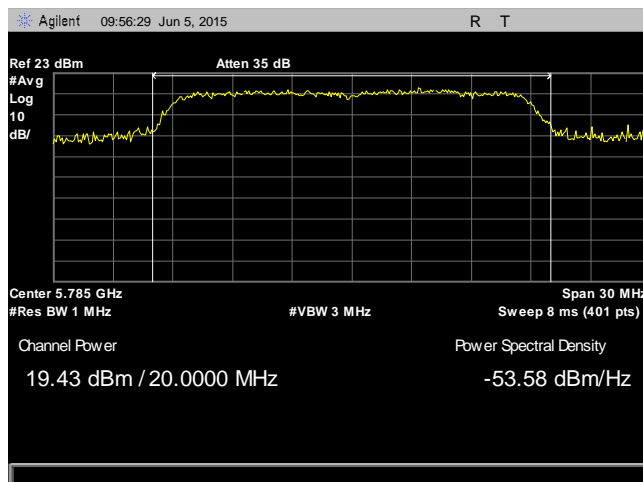


Plot 44. RF Output Power, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 2

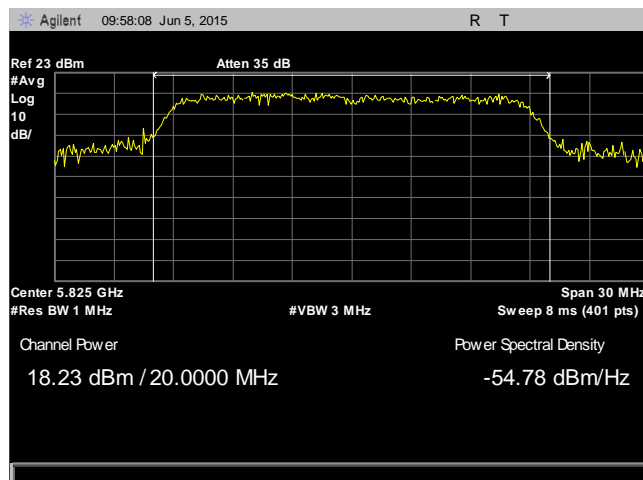


Plot 45. RF Output Power, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 2


RF Output Power, 802.11n 40 MHz, Antenna 0

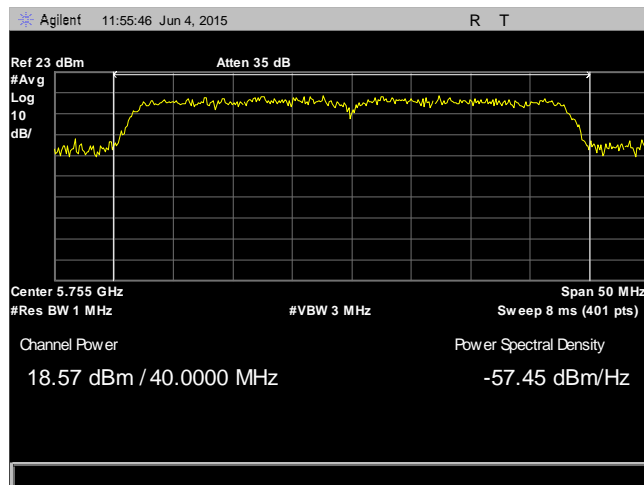

Plot 46. RF Output Power, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 0

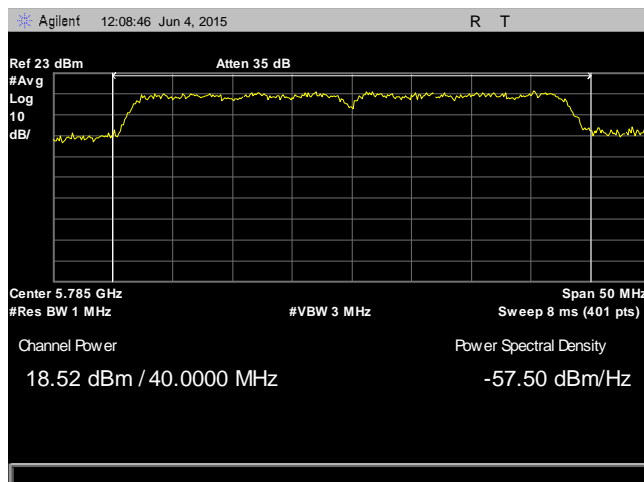


Plot 47. RF Output Power, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 0

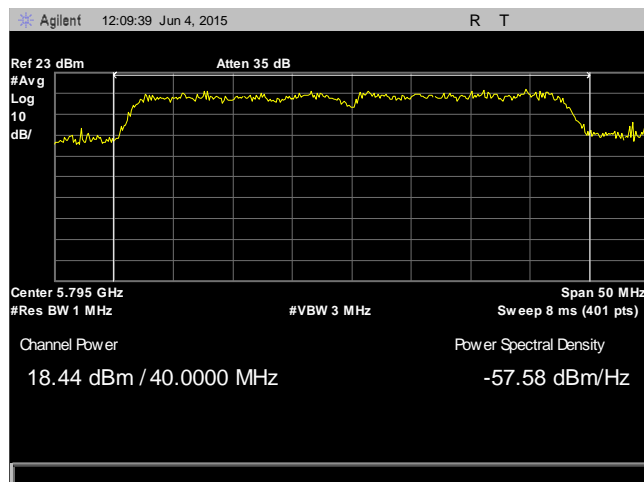


Plot 48. RF Output Power, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 0


RF Output Power, 802.11n 40 MHz, Antenna 1

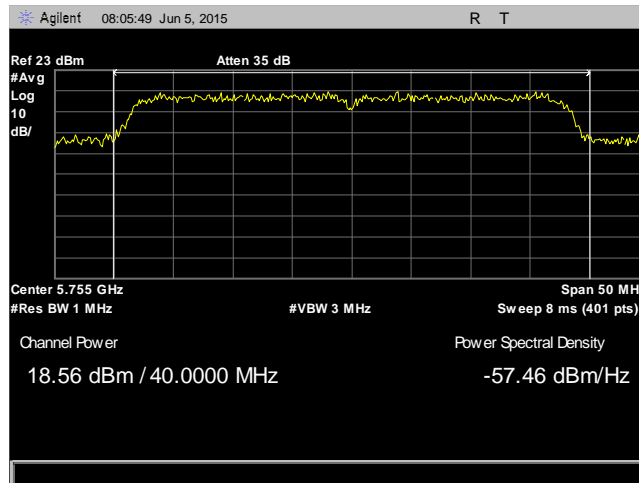

Plot 49. RF Output Power, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 1

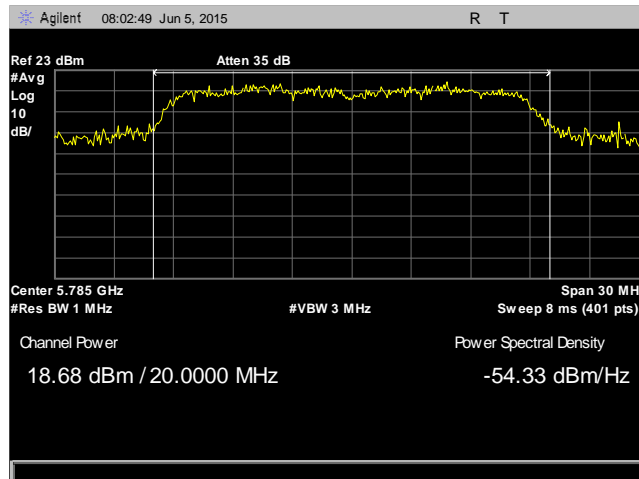


Plot 50. RF Output Power, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 1

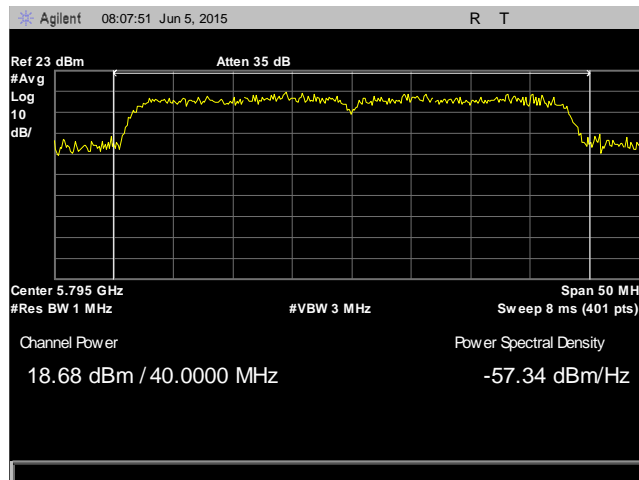


Plot 51. RF Output Power, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 1


RF Output Power, 802.11n 40 MHz, Antenna 2

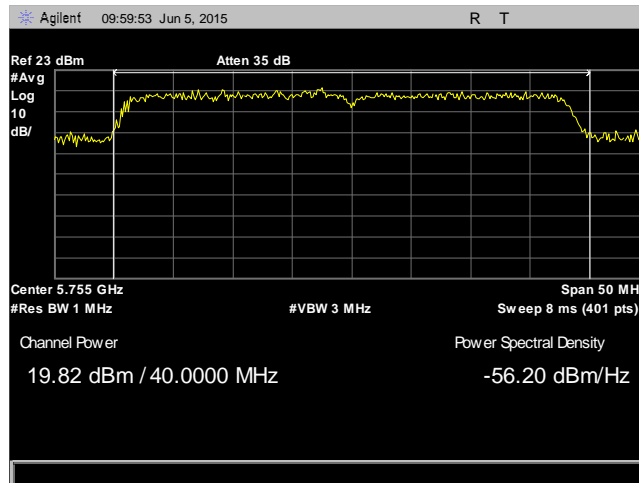

Plot 52. RF Output Power, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 2

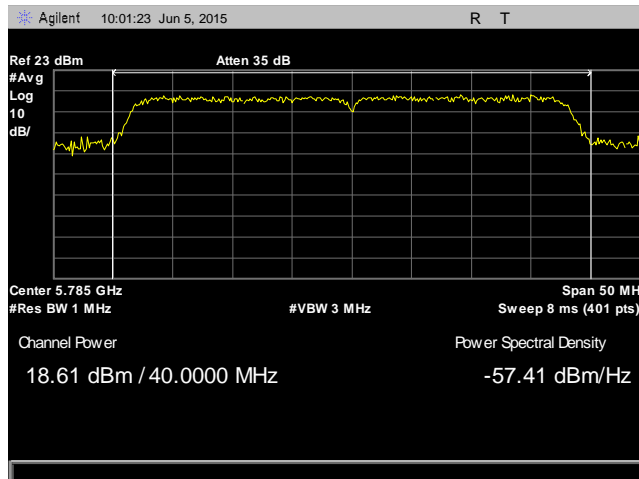

Plot 53. RF Output Power, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 2

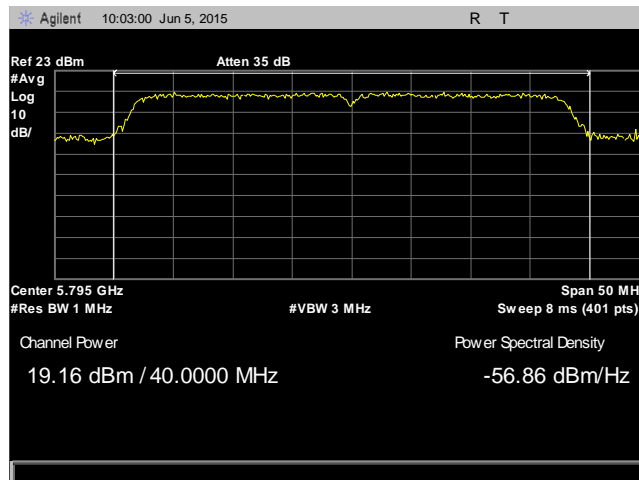

Plot 54. RF Output Power, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 2

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(a)(3) Peak Power Spectral Density

Test Requirements: §15.407(a)(3): In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level on the EUT. The RBW was set to 1MHz and the VBW was set to 3MHz. The method of measurement used was method SA-1 from 789033 D02 General UNII Test Procedures New Rule v01. Data was correct to account for attenuators and cable loss.

Test Results: Equipment was compliant with the peak power spectral density limits of §15.407(a)(3) The peak power spectral density was determined from plots on the following page(s).

Test Engineer(s): Benjamin Taylor

Test Date(s): 05/05/15


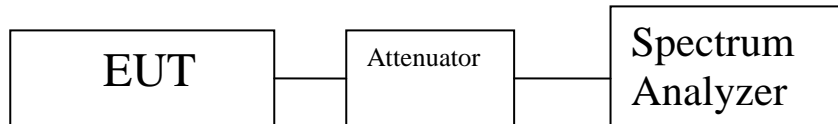


Figure 3. Power Spectral Density Test Setup


	Frequency (MHz)	PSD (dBm)
802.11a Antenna 0	5745	15.69
	5785	17.68
	5825	14.53
802.11a Antenna 1	5745	17
	5785	17.6
	5825	14.65
802.11a Antenna 2	5745	16.55
	5785	16.2
	5825	15.6
802.11n 20 MHz Antenna 0	5745	15.01
	5785	14
	5825	15.01
802.11n 20 MHz Antenna 1	5745	16.94
	5785	16.57
	5825	14.06
802.11n 20 MHz Antenna 2	5745	16.87
	5785	16.35
	5825	15.24
802.11n 40 MHz Antenna 0	5755	14.35
	5785	13.94
	5795	13.9
802.11n 40 MHz Antenna 1	5755	13.19
	5785	13.56
	5795	13.2
802.11n 40 MHz Antenna 2	5755	14.36
	5785	12.82
	5795	13.47

Table 8. Power Spectral Density Test Results


Peak Power Spectral Density, 802.11a, Antenna 0

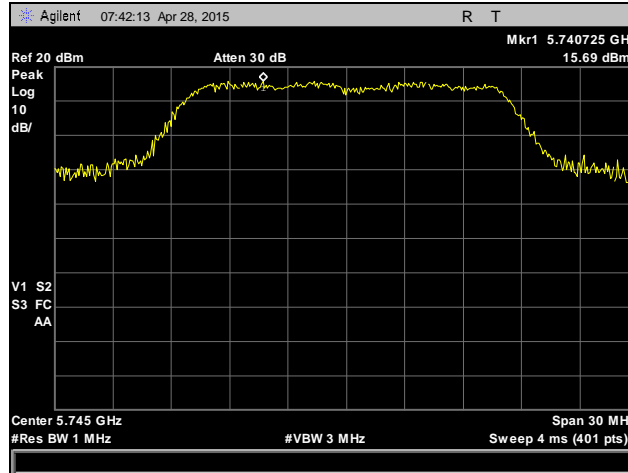

Plot 55. Peak Power Spectral Density, 802.11a, Low Channel, 5745 MHz, Antenna 0

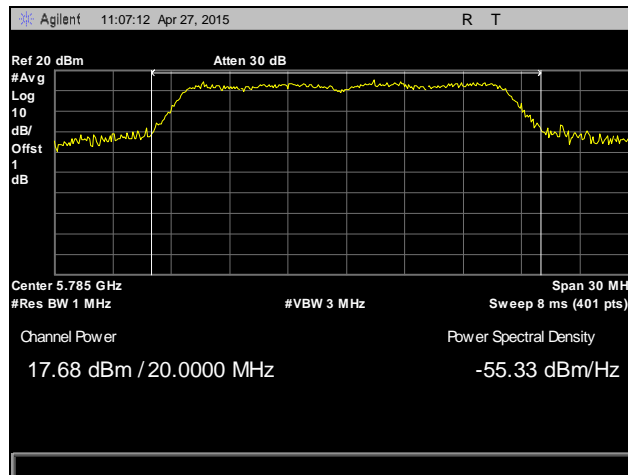


Plot 56. Peak Power Spectral Density, 802.11a, Mid Channel, 5785 MHz, Antenna 0

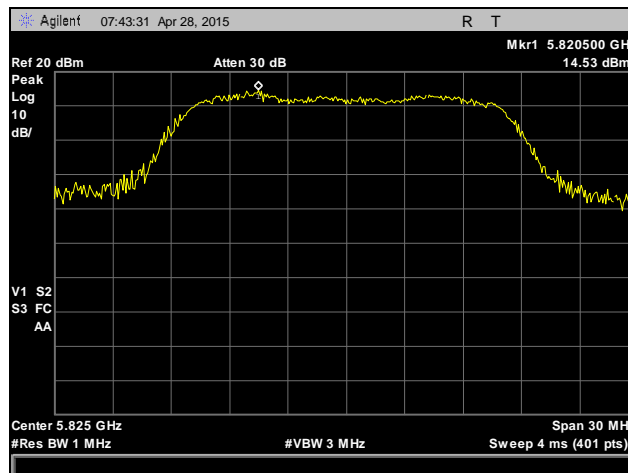


Plot 57. Peak Power Spectral Density, 802.11a, High Channel, 5825 MHz, Antenna 0


Peak Power Spectral Density, 802.11a, Antenna 1

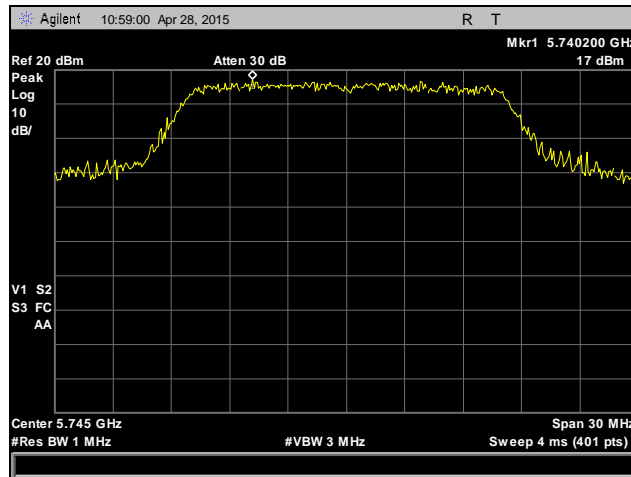

Plot 58. Peak Power Spectral Density, 802.11a, Low Channel, 5745 MHz, Antenna 1

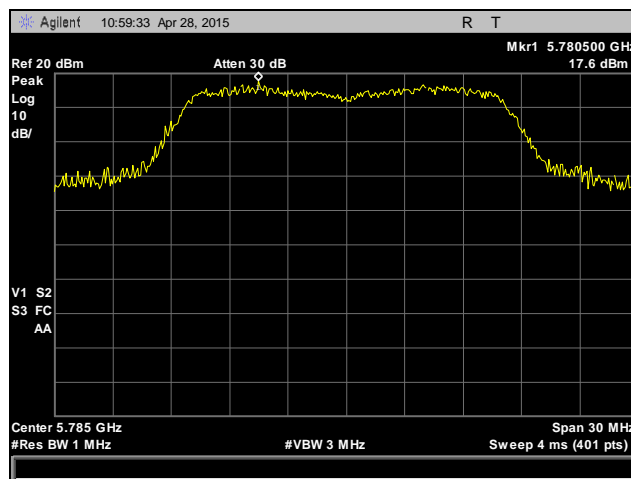


Plot 59. Peak Power Spectral Density, 802.11a, Mid Channel, 5785 MHz, Antenna 1

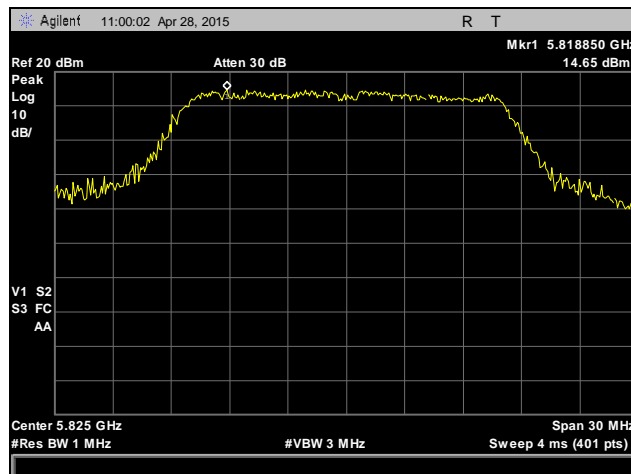


Plot 60. Peak Power Spectral Density, 802.11a, High Channel, 5825 MHz, Antenna 1


Peak Power Spectral Density, 802.11a, Antenna 2

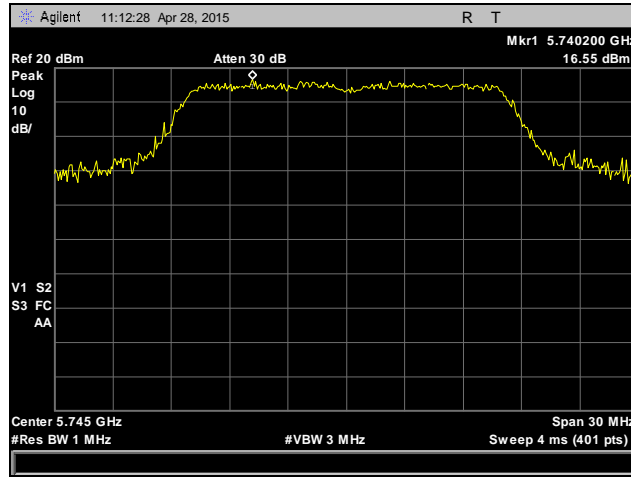

Plot 61. Peak Power Spectral Density, 802.11a, Low Channel, 5745 MHz, Antenna 2

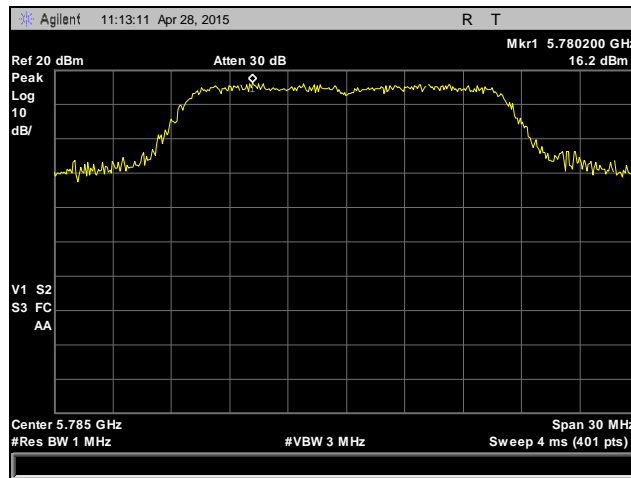


Plot 62. Peak Power Spectral Density, 802.11a, Mid Channel, 5785 MHz, Antenna 2

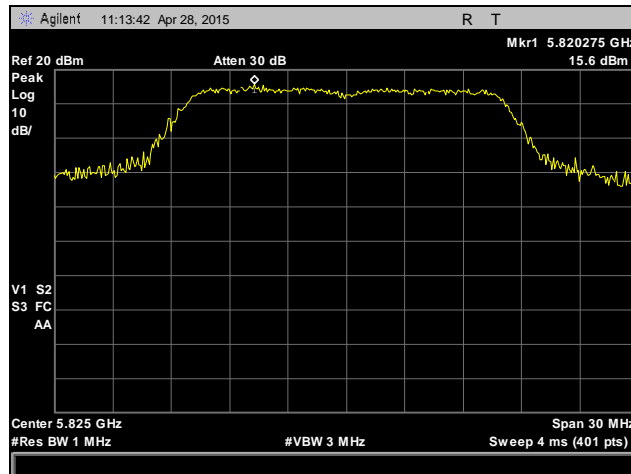


Plot 63. Peak Power Spectral Density, 802.11a, High Channel, 5825 MHz, Antenna 2


Peak Power Spectral Density, 802.11n 20 MHz, Antenna 0

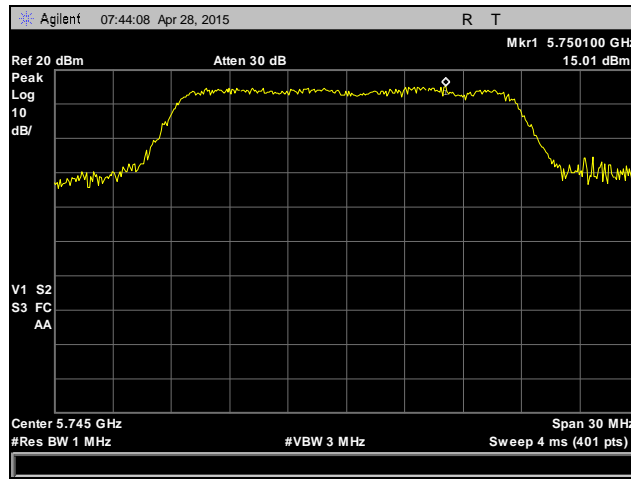

Plot 64. Peak Power Spectral Density, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 0

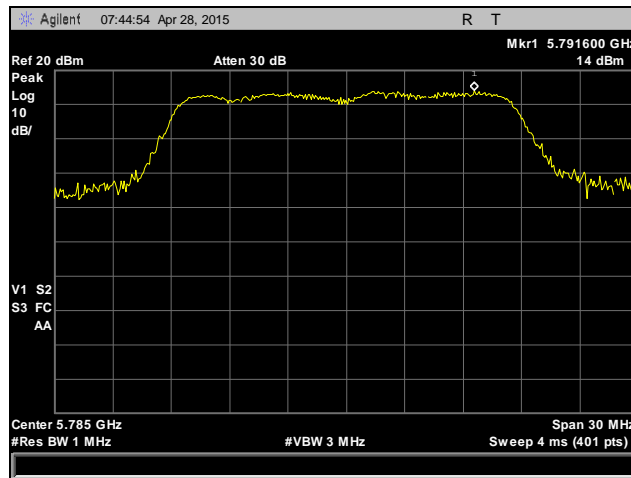


Plot 65. Peak Power Spectral Density, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 0

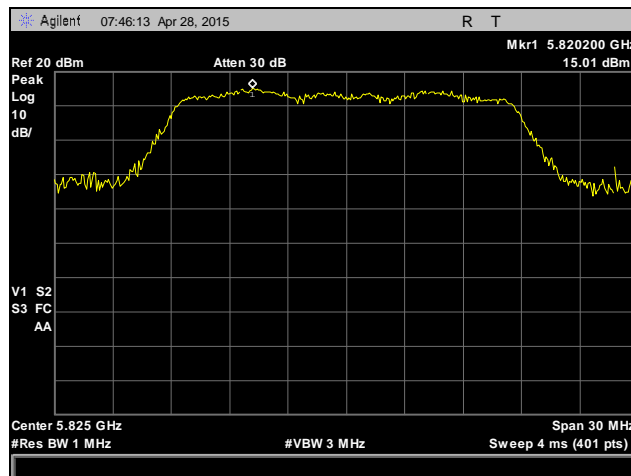


Plot 66. Peak Power Spectral Density, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 0


Peak Power Spectral Density, 802.11n 20 MHz, Antenna 1

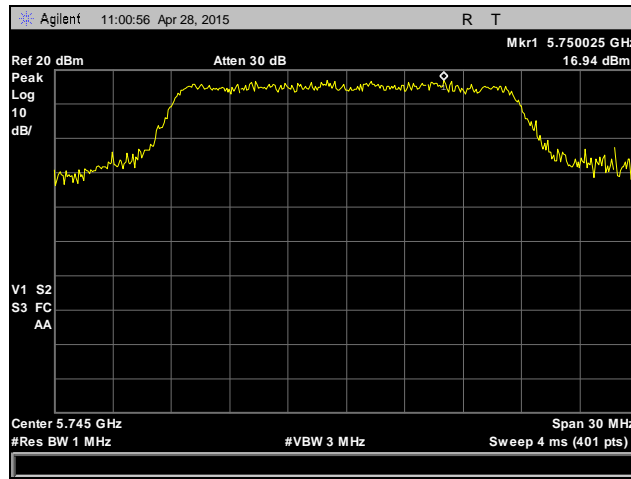

Plot 67. Peak Power Spectral Density, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 1

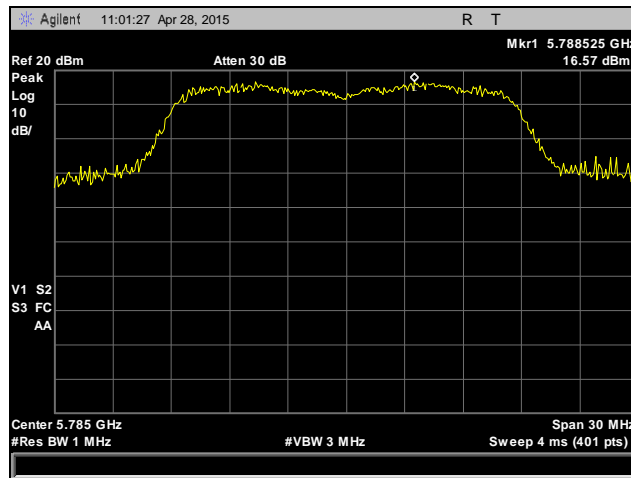


Plot 68. Peak Power Spectral Density, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 1

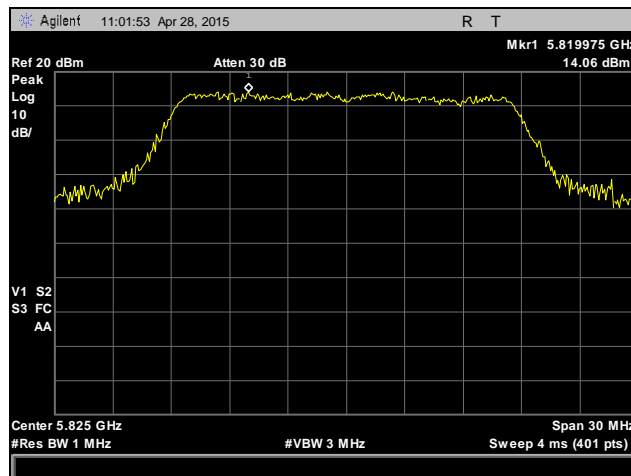


Plot 69. Peak Power Spectral Density, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 1


Peak Power Spectral Density, 802.11n 20 MHz, Antenna 2

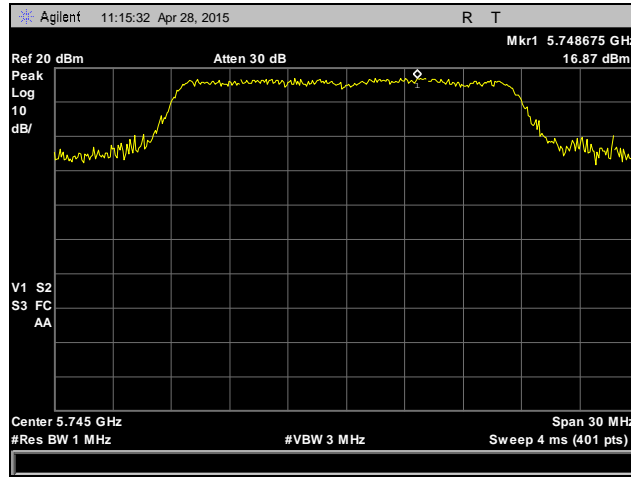

Plot 70. Peak Power Spectral Density, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 2

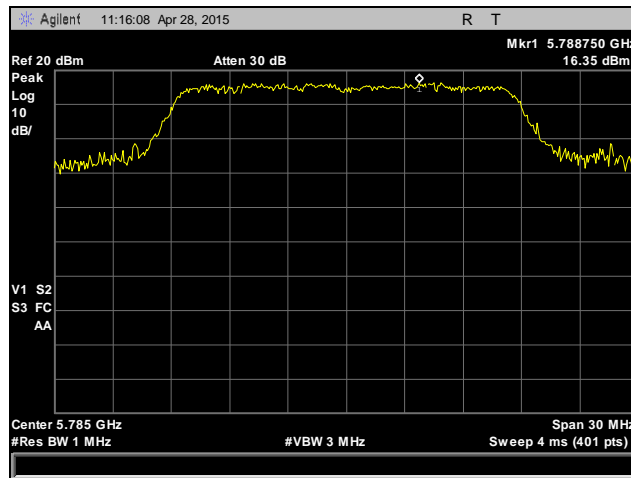


Plot 71. Peak Power Spectral Density, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 2

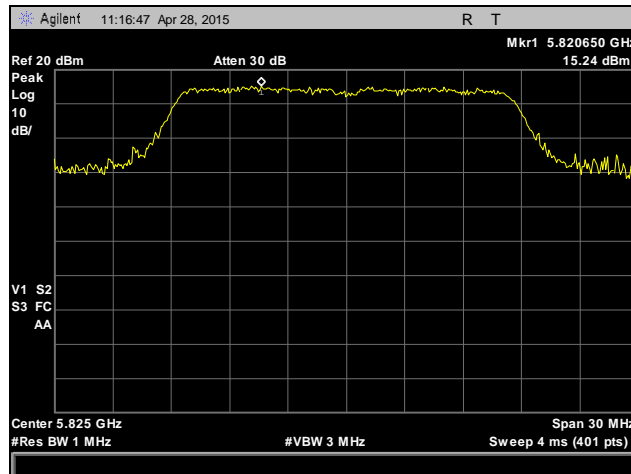


Plot 72. Peak Power Spectral Density, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 2


Peak Power Spectral Density, 802.11n 40 MHz, Antenna 0

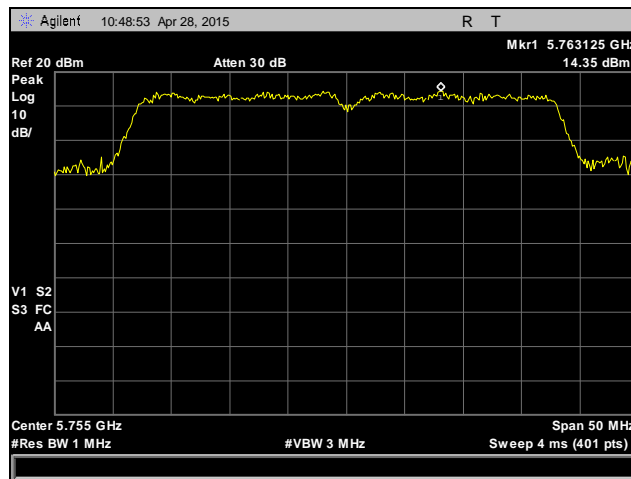

Plot 73. Peak Power Spectral Density, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 0

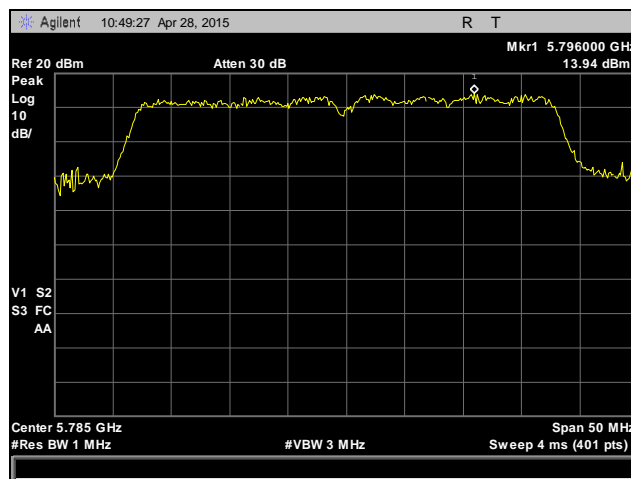


Plot 74. Peak Power Spectral Density, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 0

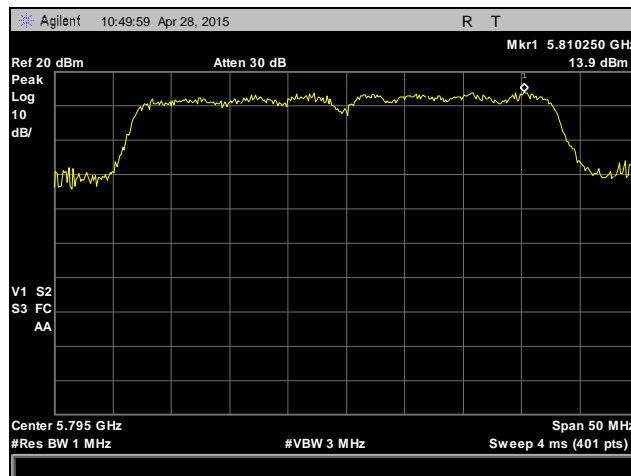


Plot 75. Peak Power Spectral Density, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 0


Peak Power Spectral Density, 802.11n 40 MHz, Antenna 1

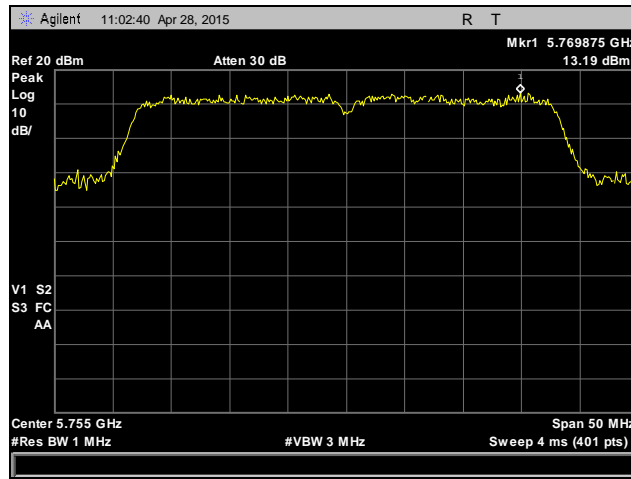

Plot 76. Peak Power Spectral Density, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 1

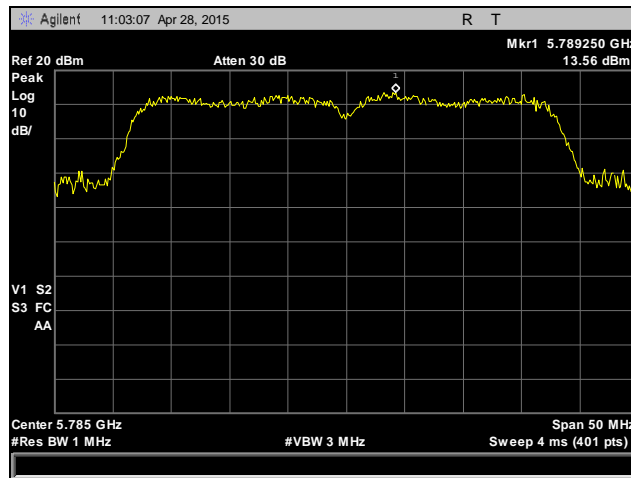


Plot 77. Peak Power Spectral Density, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 1

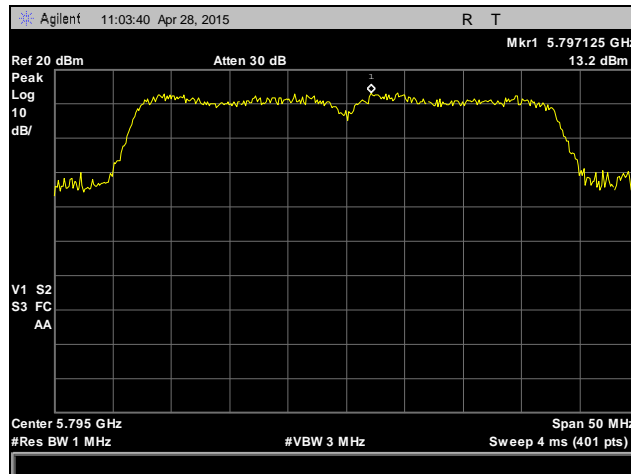


Plot 78. Peak Power Spectral Density, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 1


Peak Power Spectral Density, 802.11n 40 MHz, Antenna 2

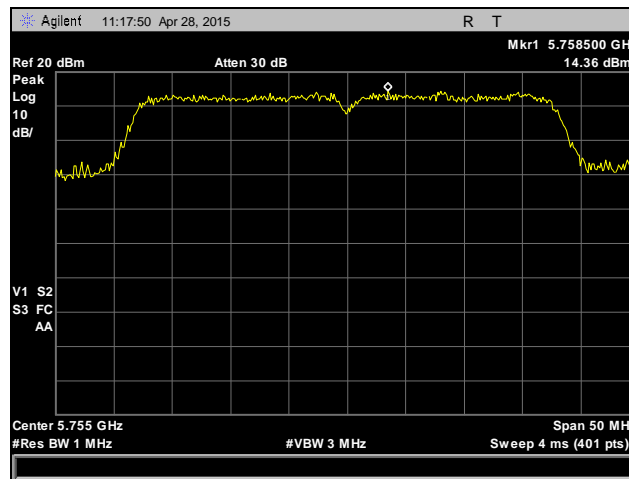

Plot 79. Peak Power Spectral Density, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 2

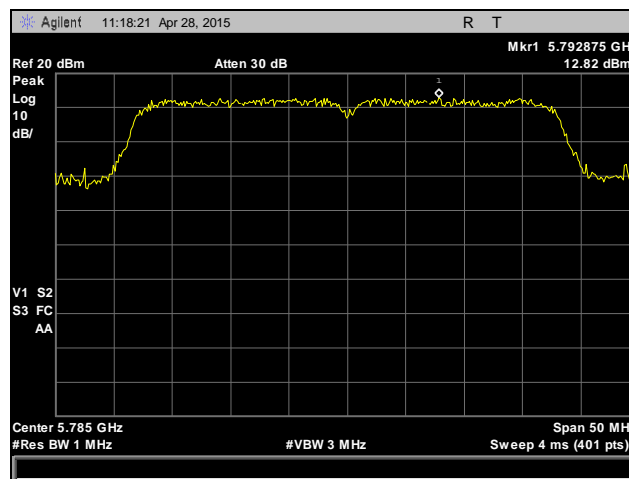

Plot 80. Peak Power Spectral Density, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 2

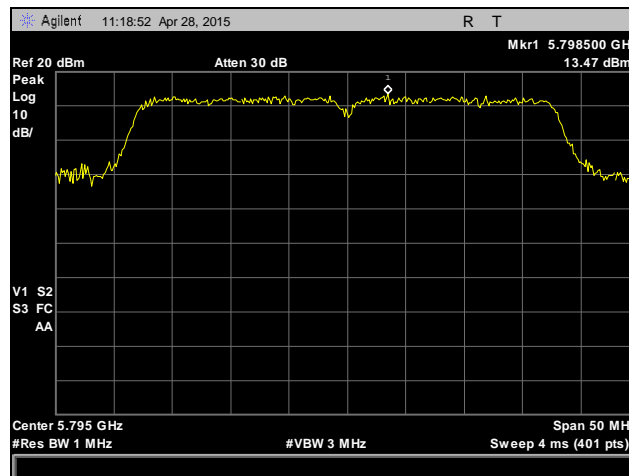

Plot 81. Peak Power Spectral Density, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 2

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(b)(1), §15.407(b)(6), & §15.407(b)(7) Undesirable Emissions

Test Requirements: §15.407(b)(1), § 15.407(b)(6), § 15.407(b)(7); §15.205: Emissions outside the frequency band.

§15.407(b)(1): For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

§15.407(b)(1): For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of –27 dBm/MHz.

§15.407(b)(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of –17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of –27 dBm/MHz.

§15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Test Procedure: The transmitter was placed on an 80cm wooden table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast height to determine worst case orientation for maximum emissions. A preamp was used in the range from 7-18GHz to improve noise floor. Plots were corrected for cable loss, antenna, and preamp gain.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth. The procedure was used for average.

For measurements above 1 GHz, measurements were made with a Peak detector with 1 MHz resolution bandwidth. A notch filter was use to filter out the transmitting channel. Where the spurious emissions fell into a restricted band, measurements were also made with an average detector to make sure they complied with 15.209 limits. Only noise floor was seen above 18 GHz. Worst case emissions shown by antenna.


Test Results: The EUT was compliant with the Radiated Emission limits for Intentional Radiators. See following pages for detailed test results. All emissions above 18 GHz were at the noise floor of the receiver.

Notes(s): Emissions that appear to be in excess of the limit within the 30 MHz – 1 GHz plots are exclusively digital; and not subject to the 15.209 limits. These emissions are addressed in the 15.109 section of the original filing test report (as this is a Class II PC).


Test Engineer(s): Benjamin Taylor

Test Date(s): 05/05/15


Radiated Spurious Emissions

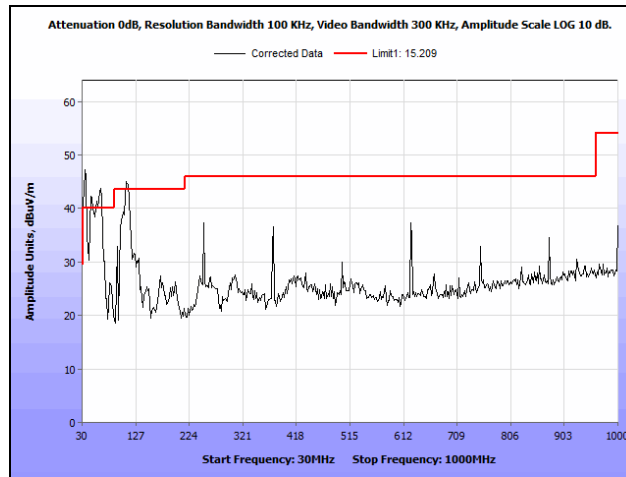


Plot 82. Radiated Spurious Emissions, 5745 MHz, 802.11a 20 MHz, 30 MHz – 1 GHz

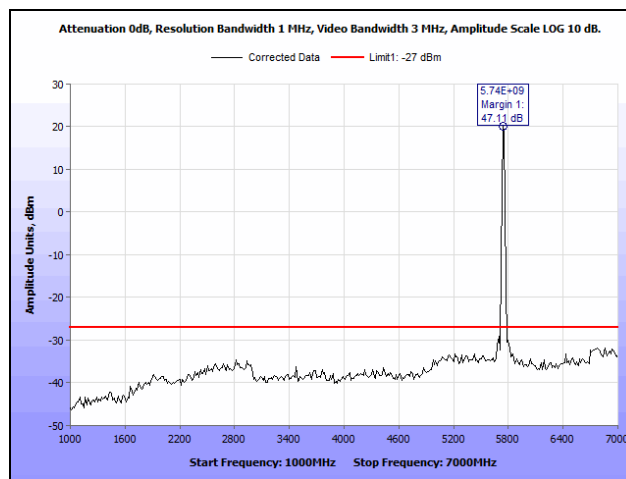


Plot 83. Radiated Spurious Emissions, 5745 MHz, 802.11a 20 MHz, 1 GHz – 7 GHz

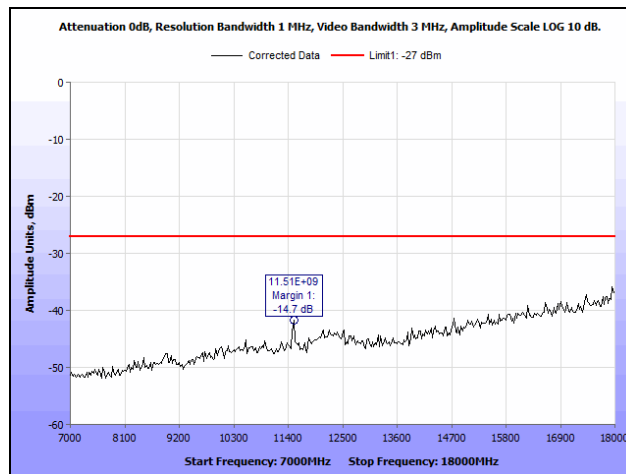


Plot 84. Radiated Spurious Emissions, 5745 MHz, 802.11a 20 MHz, 7 GHz – 18 GHz

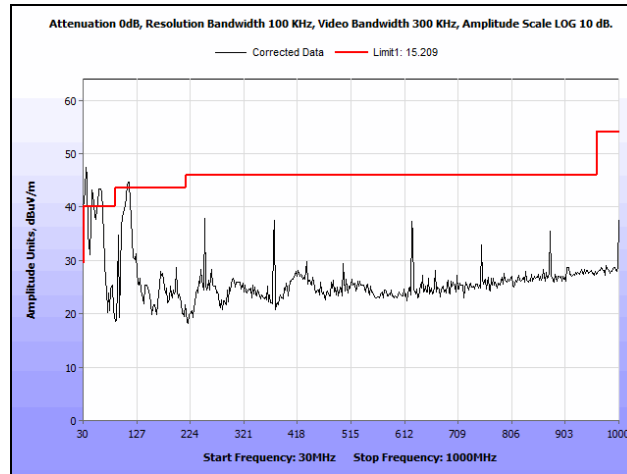


Plot 85. Radiated Spurious Emissions, 5785 MHz, 802.11a 20 MHz, 30 MHz – 1 GHz

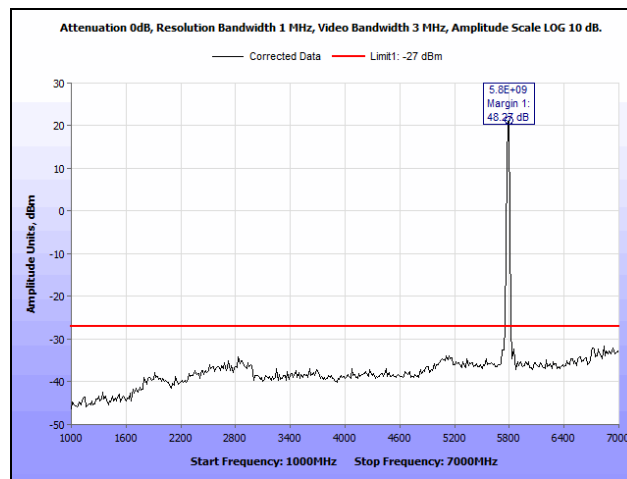


Plot 86. Radiated Spurious Emissions, 5785 MHz, 802.11a 20 MHz, 1 GHz – 7 GHz

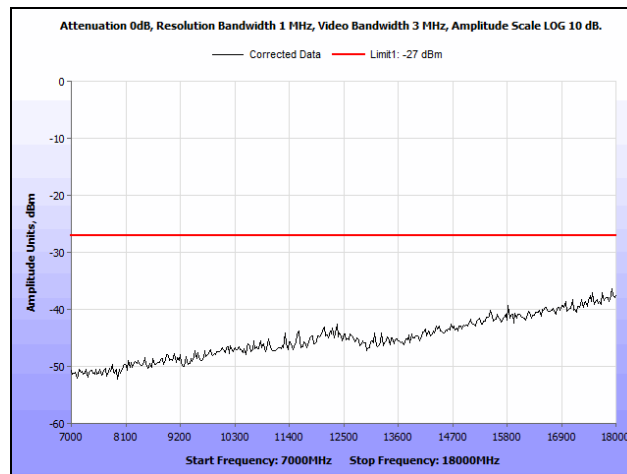


Plot 87. Radiated Spurious Emissions, 5785 MHz, 802.11a 20 MHz, 7 GHz – 18 GHz

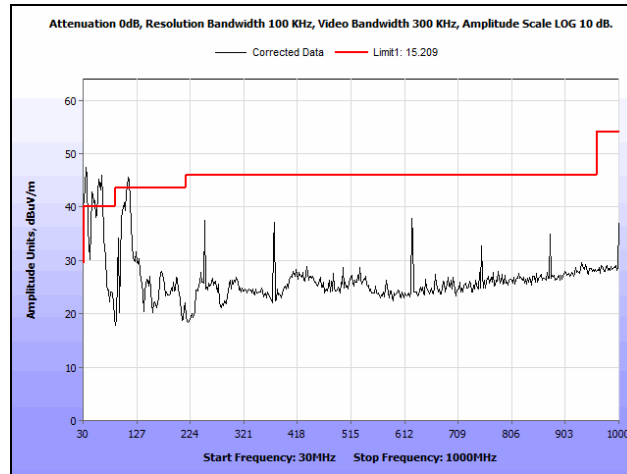


Plot 88. Radiated Spurious Emissions, 5825 MHz, 802.11a 20 MHz, 30 MHz – 1 GHz

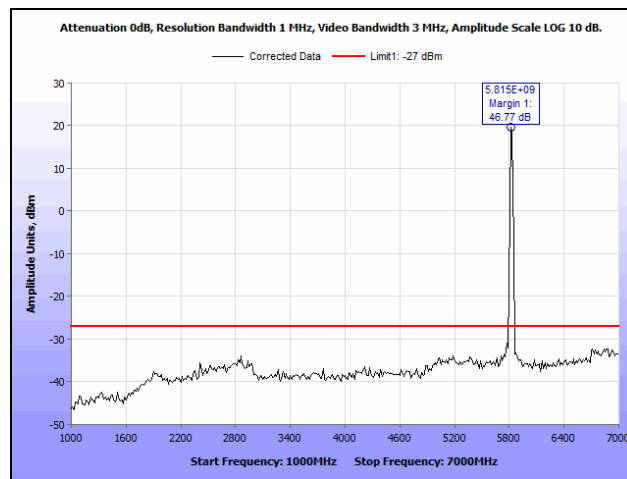


Plot 89. Radiated Spurious Emissions, 5825 MHz, 802.11a 20 MHz, 1 GHz – 7 GHz

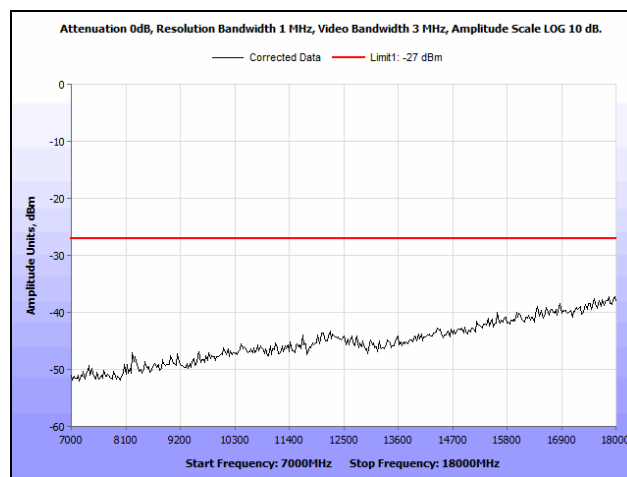


Plot 90. Radiated Spurious Emissions, 5825 MHz, 802.11a 20 MHz, 7 GHz – 18 GHz

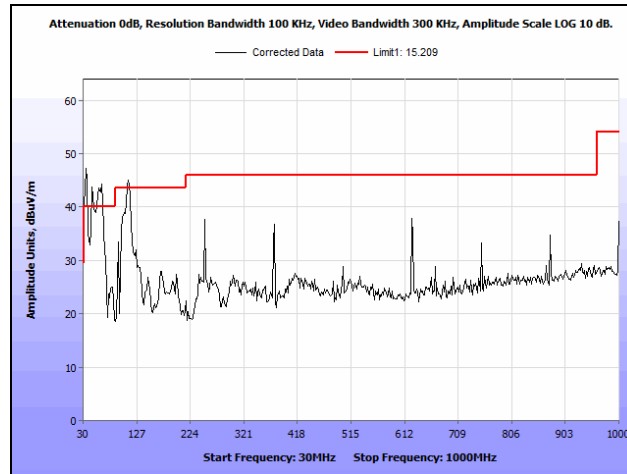


Plot 91. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz

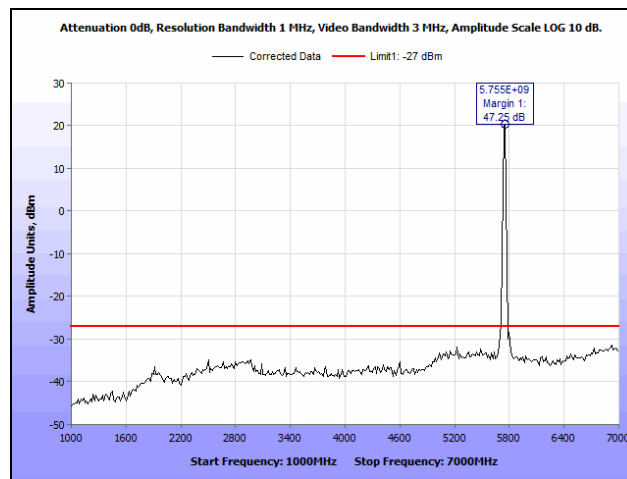


Plot 92. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz

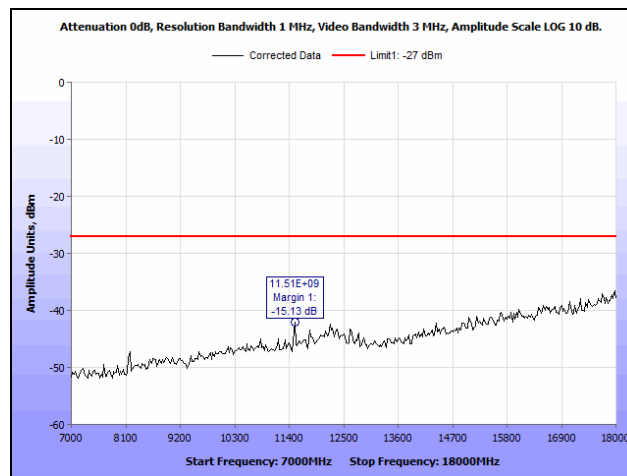


Plot 93. Radiated Spurious Emissions, 5745 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz

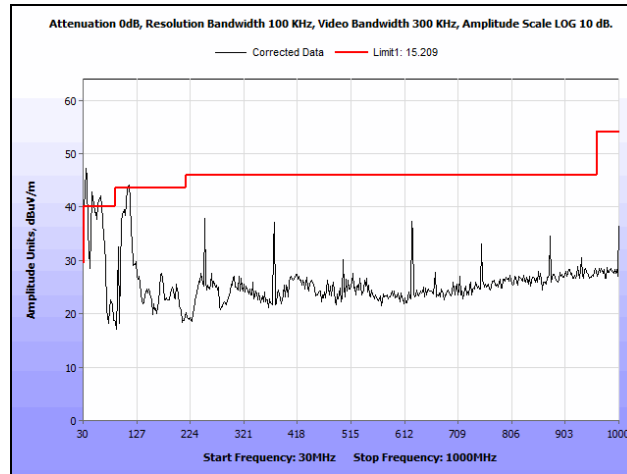


Plot 94. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz

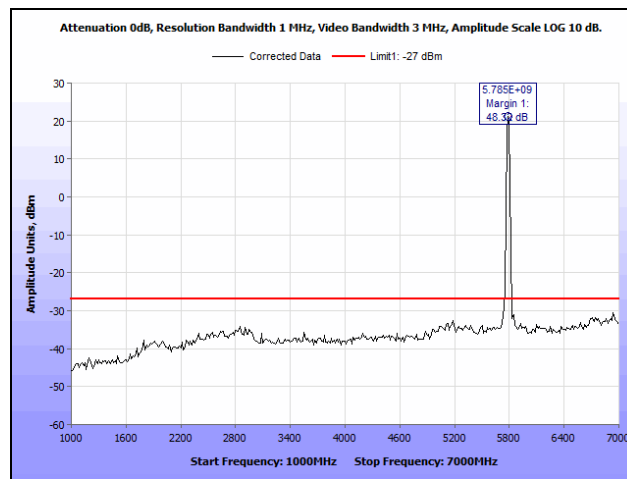


Plot 95. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz

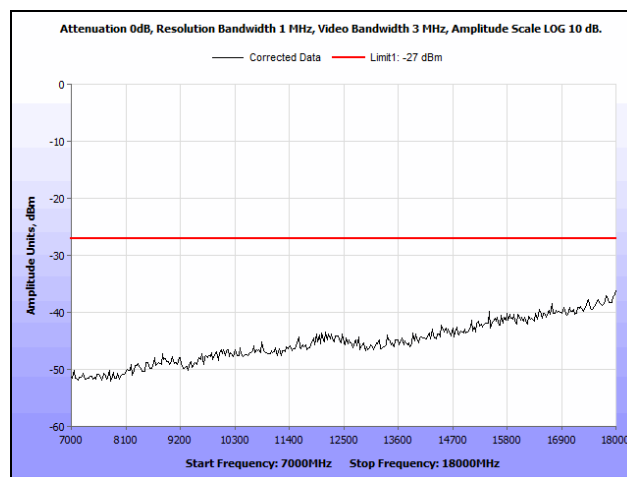


Plot 96. Radiated Spurious Emissions, 5785 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz

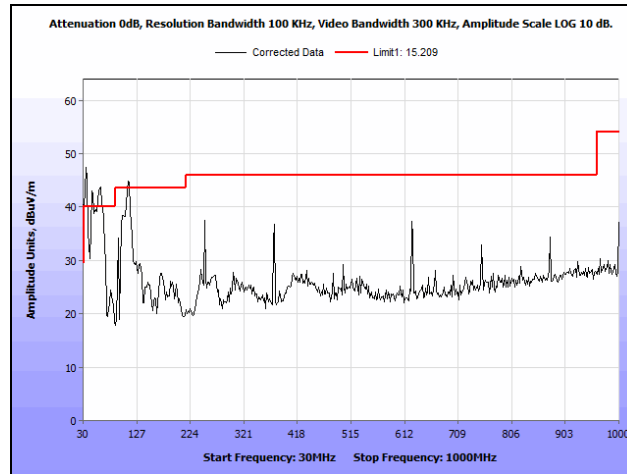


Plot 97. Radiated Spurious Emissions, 5825 MHz, 802.11n 20 MHz, 30 MHz – 1 GHz

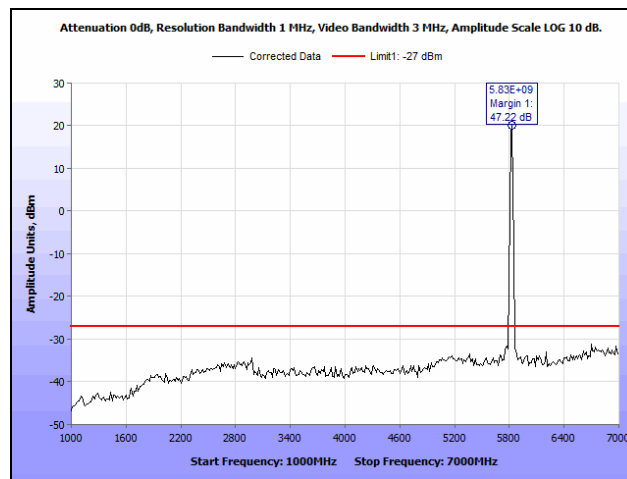


Plot 98. Radiated Spurious Emissions, 5825 MHz, 802.11n 20 MHz, 1 GHz – 7 GHz

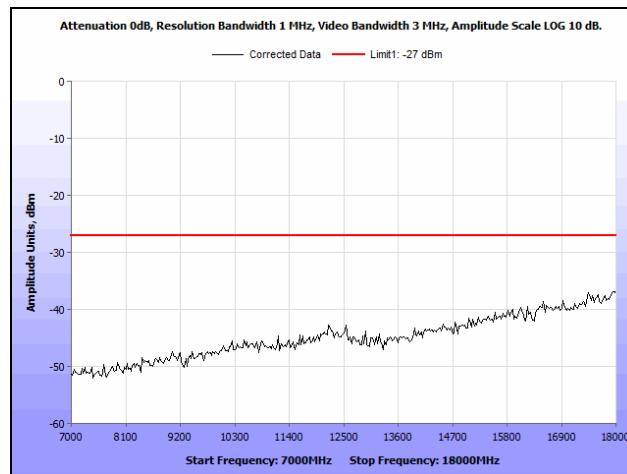


Plot 99. Radiated Spurious Emissions, 5825 MHz, 802.11n 20 MHz, 7 GHz – 18 GHz

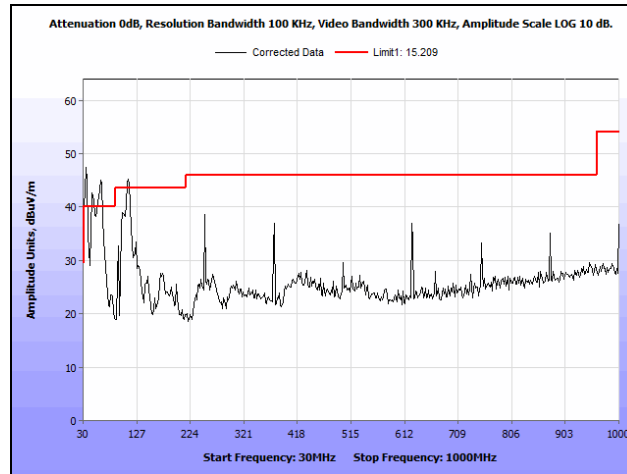


Plot 100. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz

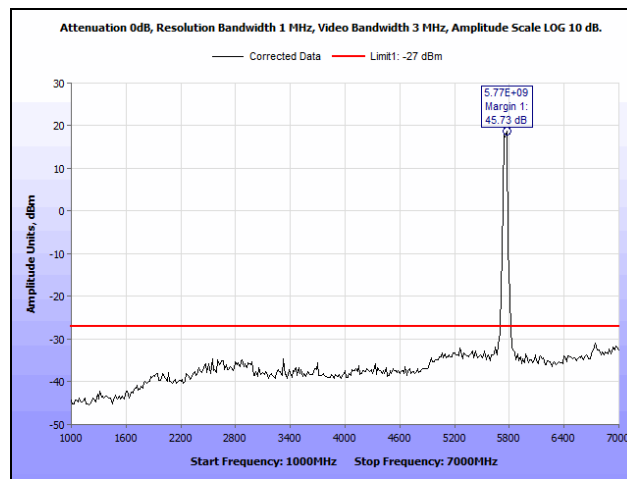


Plot 101. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz

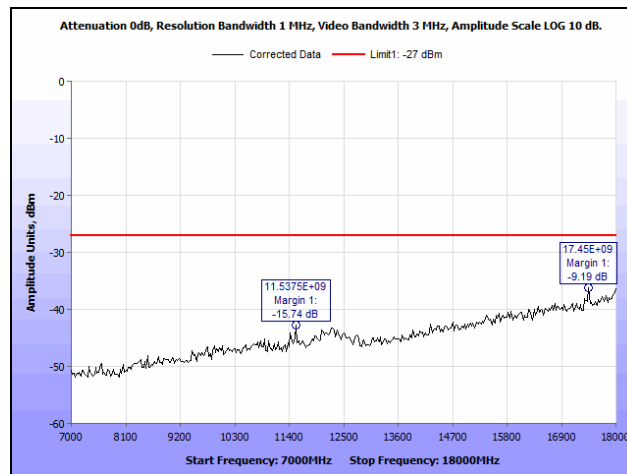


Plot 102. Radiated Spurious Emissions, 5755 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz

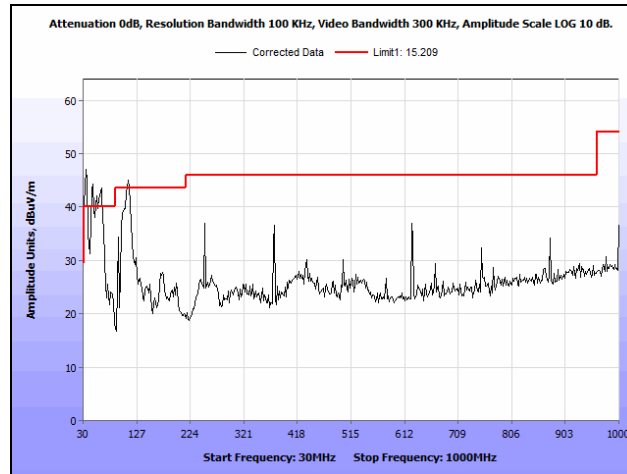


Plot 103. Radiated Spurious Emissions, 5785 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz

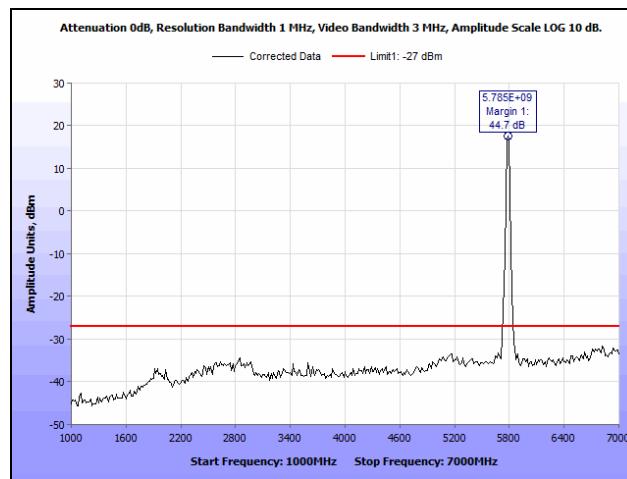


Plot 104. Radiated Spurious Emissions, 5785 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz

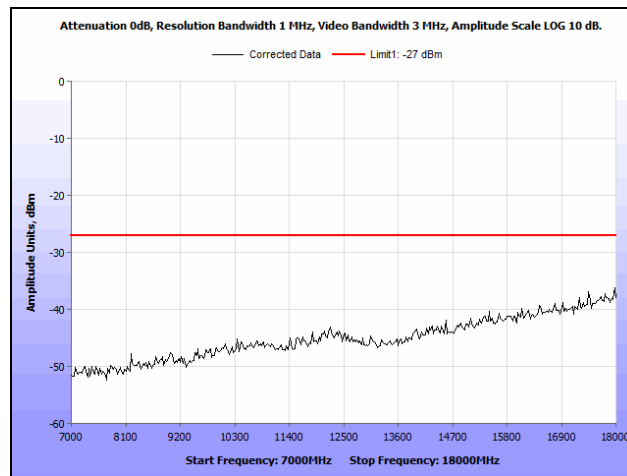


Plot 105. Radiated Spurious Emissions, 5785 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz

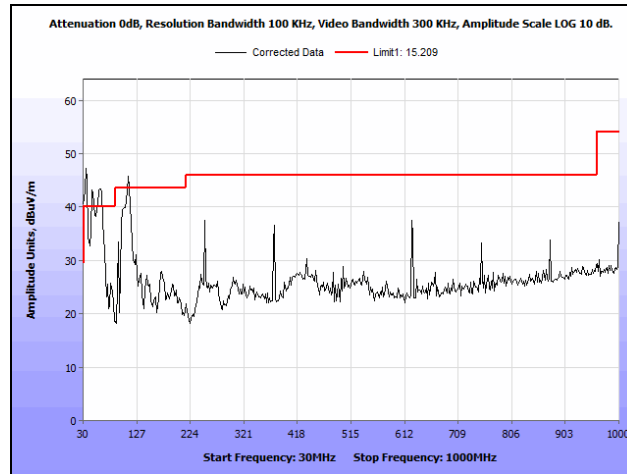


Plot 106. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 30 MHz – 1 GHz

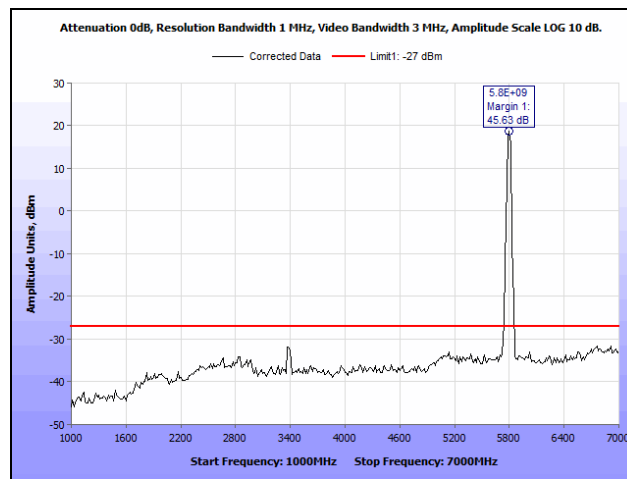


Plot 107. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 1 GHz – 7 GHz

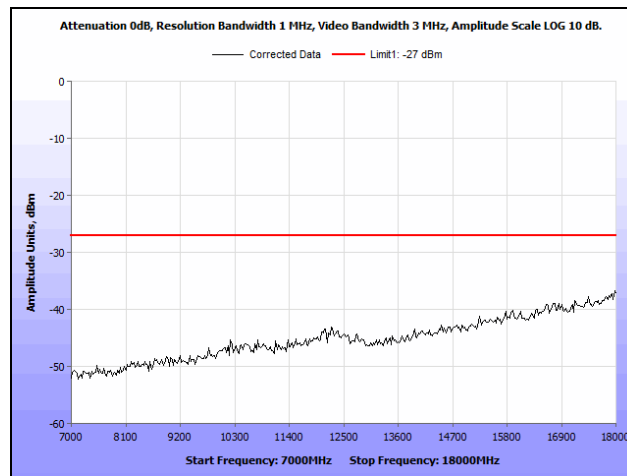


Plot 108. Radiated Spurious Emissions, 5795 MHz, 802.11n 40 MHz, 7 GHz – 18 GHz

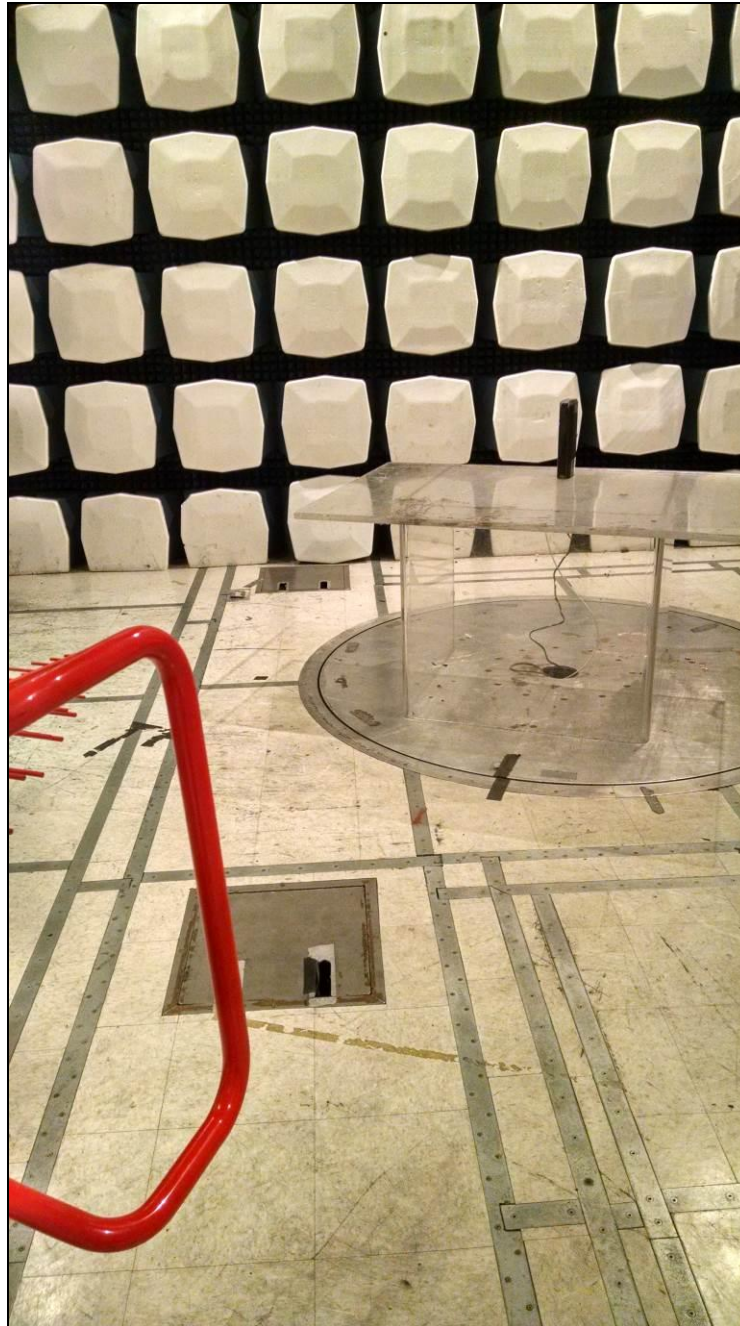

Photograph 1. Radiated Spurious Emissions, Test Setup, 30 MHz – 1 GHz

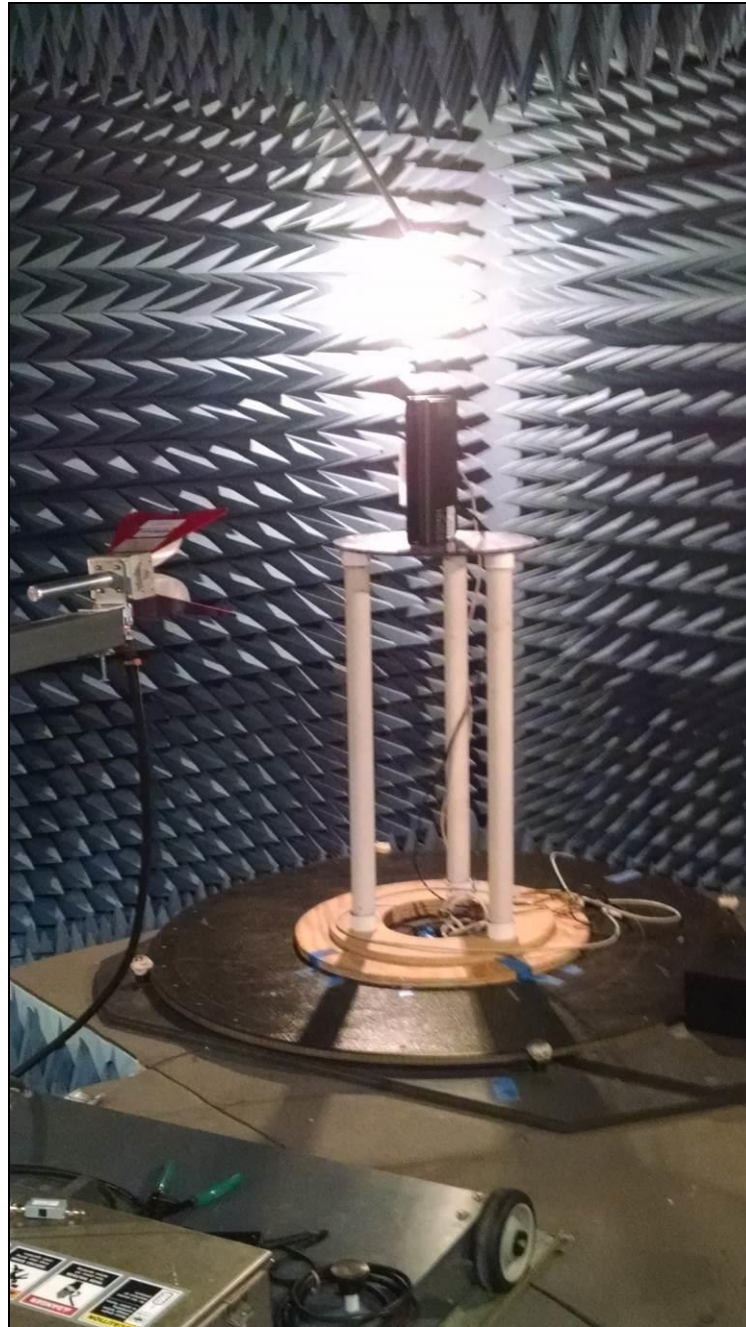

Photograph 2. Radiated Spurious Emissions, Test Setup, 1 GHz – 18 GHz

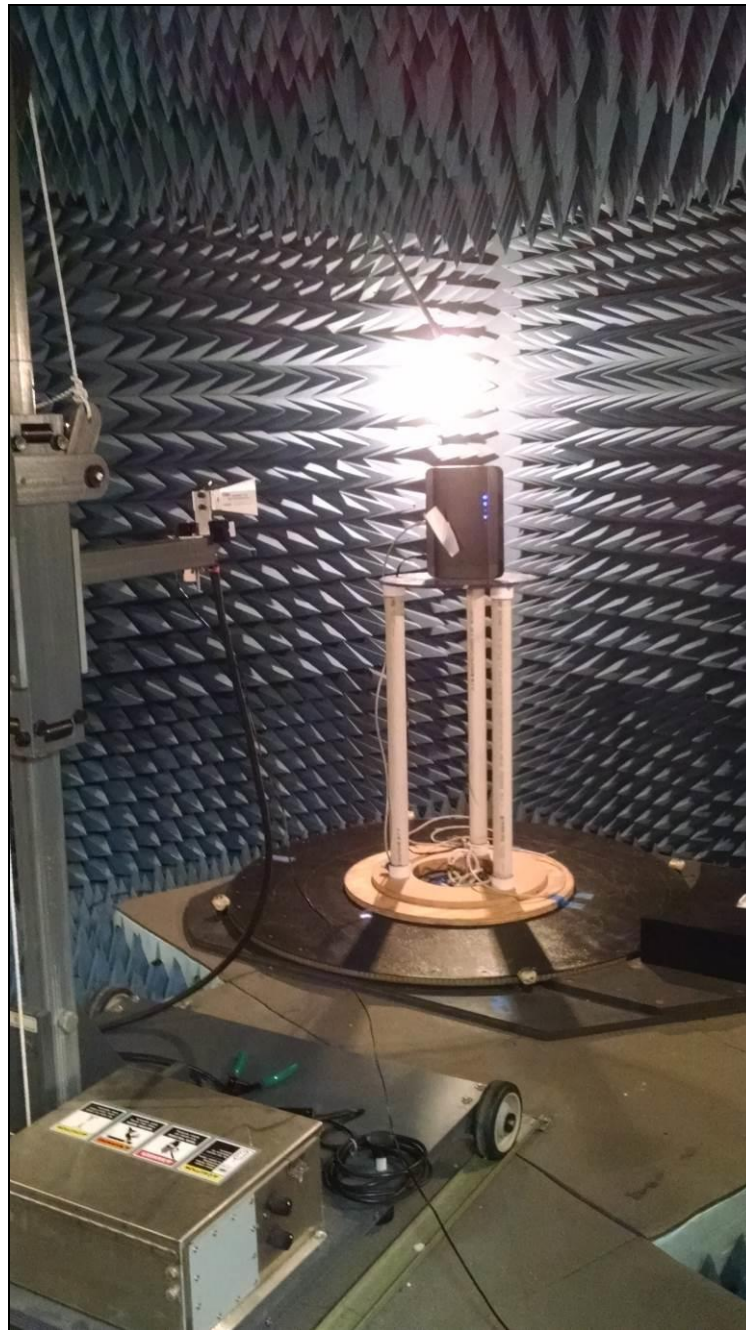

Photograph 3. Radiated Spurious Emissions, Test Setup, 18 GHz – 40 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(f) RF Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 5745-5825 MHz; **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density

P = Power Input to antenna = 22.34 dBm = 171.4 mW

G = Antenna Gain 3 dBi (1.99 linear)

R = Minimum Distance between User and Antenna (20 cm)

$$S = (171.4 * 1.99) / (4 * 3.14 * 400) = 0.067859 \text{ mW/cm}^2$$

Therefore the uncontrolled exposure limit is achieved at 20 cm.

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(e) 6dB Bandwidth

Test Requirements: § 15.407 (e): Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure: The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, $VBW > RBW$.

Test Results The EUT was compliant with the requirements of this section; the following plots illustrate the -6dB bandwidth is greater than 500 kHz, in accordance with § 15.407 (e).

Test Engineer(s): Djed Mouada

Test Date(s): 04/27/15



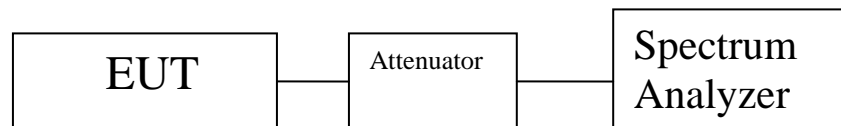


Figure 4. Occupied Bandwidth, Test Setup


Occupied Bandwidth, 802.11a, Antenna 0

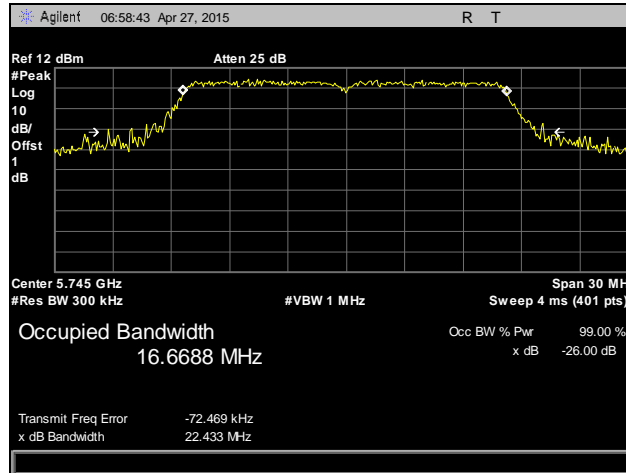

Plot 109. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 0

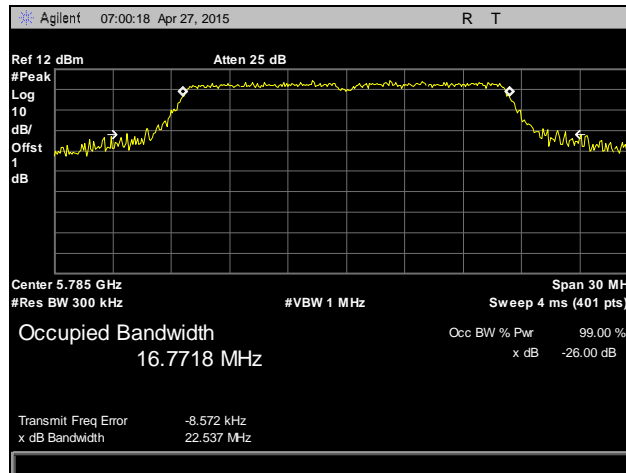


Plot 110. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 0

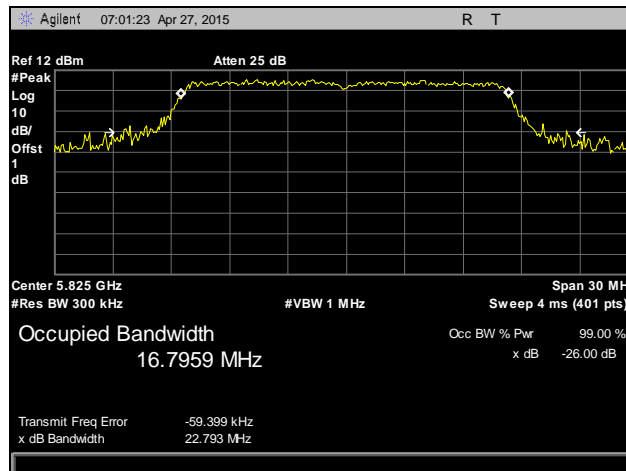


Plot 111. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 0


Occupied Bandwidth, 802.11a, Antenna 1

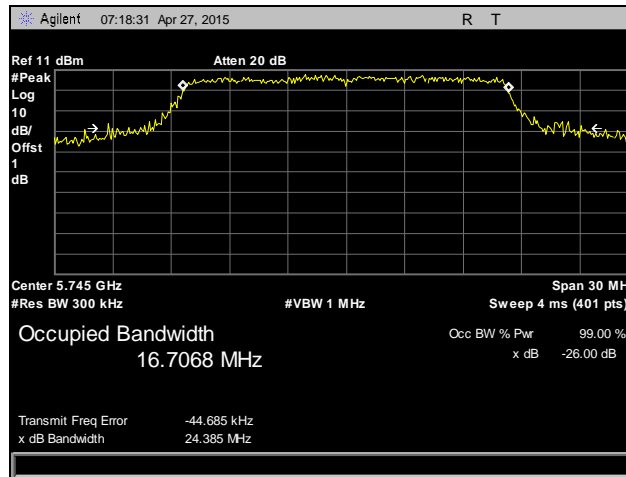

Plot 112. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 1

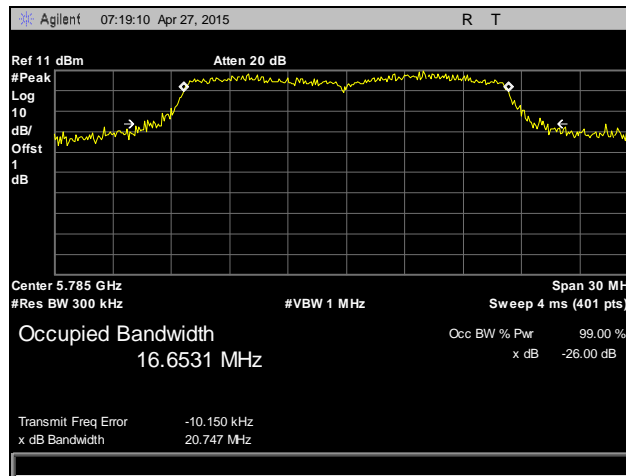


Plot 113. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 1

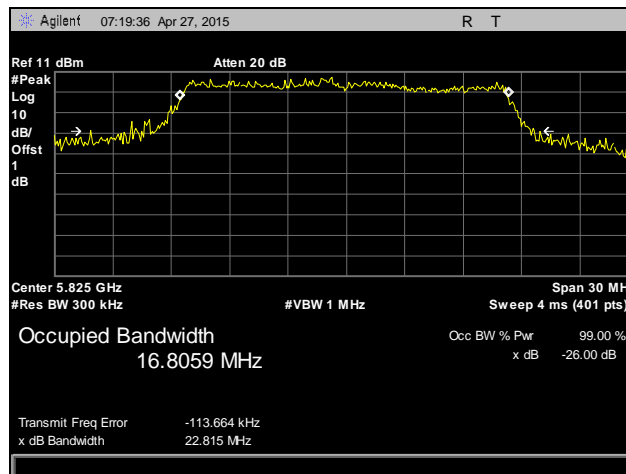


Plot 114. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 1


Occupied Bandwidth, 802.11a, Antenna 2

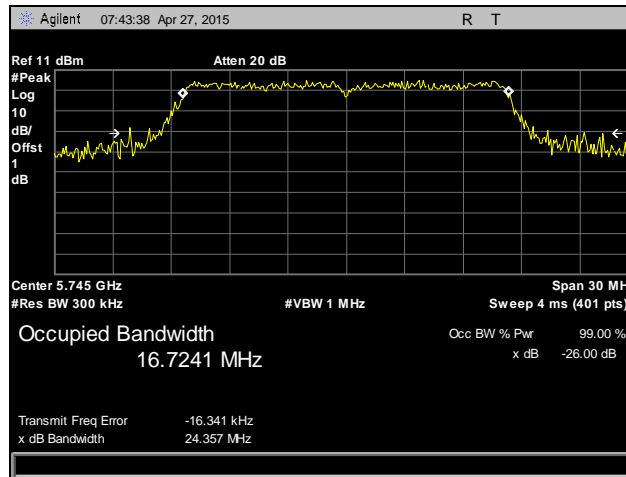

Plot 115. Occupied Bandwidth, 802.11a, Low Channel, 5745 MHz, Antenna 2

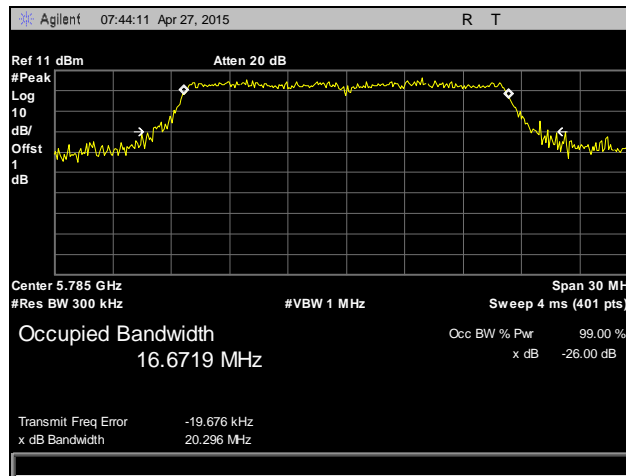


Plot 116. Occupied Bandwidth, 802.11a, Mid Channel, 5785 MHz, Antenna 2

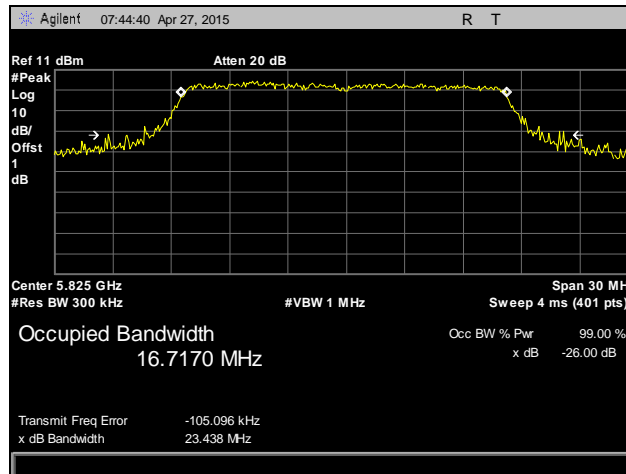


Plot 117. Occupied Bandwidth, 802.11a, High Channel, 5825 MHz, Antenna 2


Occupied Bandwidth, 802.11n 20 MHz, Antenna 0

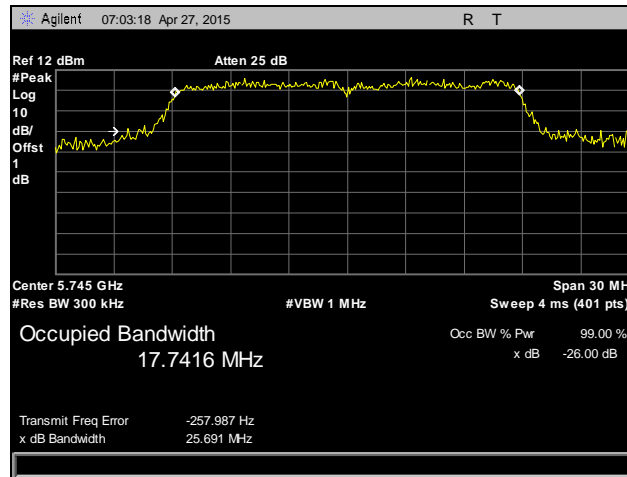

Plot 118. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 0

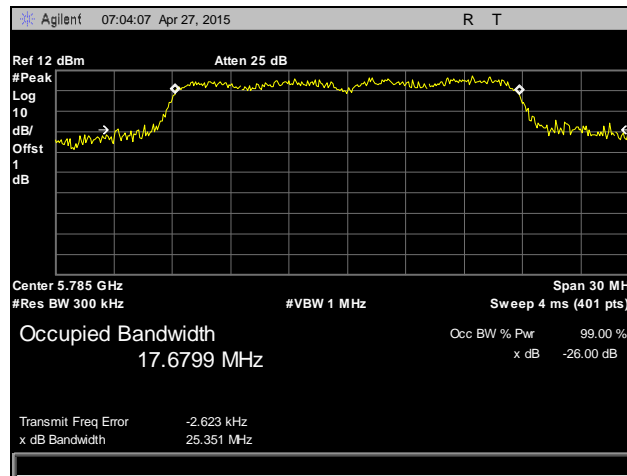


Plot 119. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 0

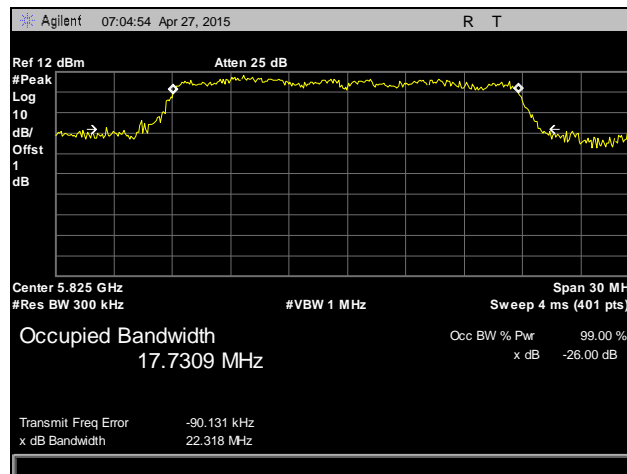


Plot 120. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 0


Occupied Bandwidth, 802.11n 20 MHz, Antenna 1

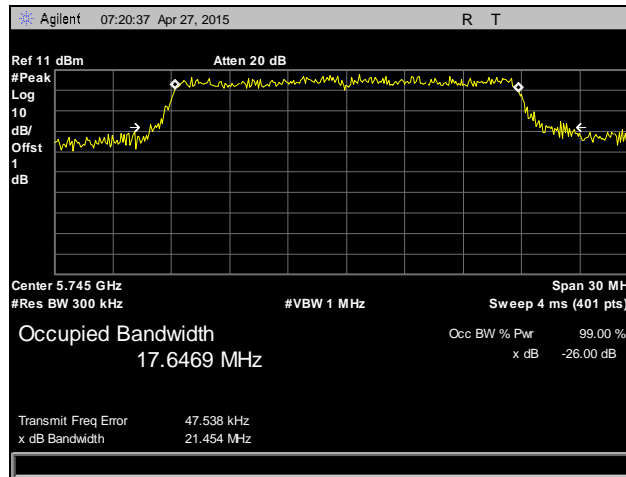

Plot 121. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 1

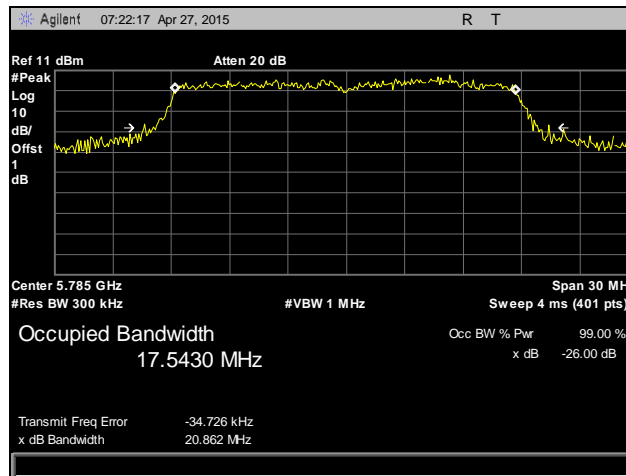


Plot 122. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 1

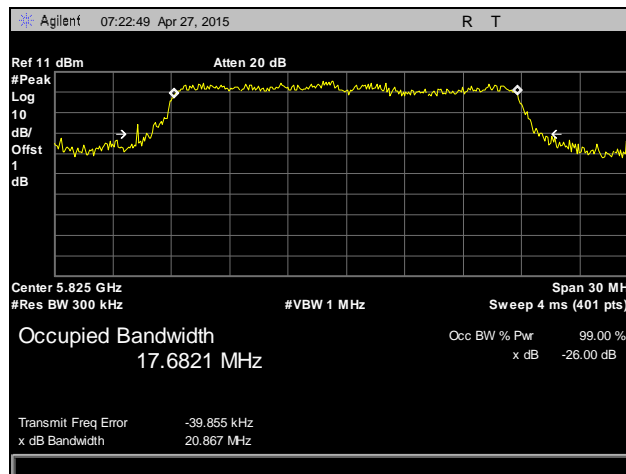


Plot 123. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 1


Occupied Bandwidth, 802.11n 20 MHz, Antenna 2

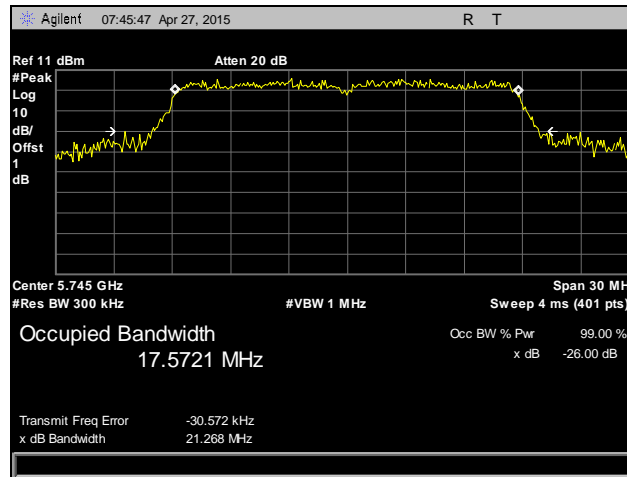

Plot 124. Occupied Bandwidth, 802.11n 20 MHz, Low Channel, 5745 MHz, Antenna 2

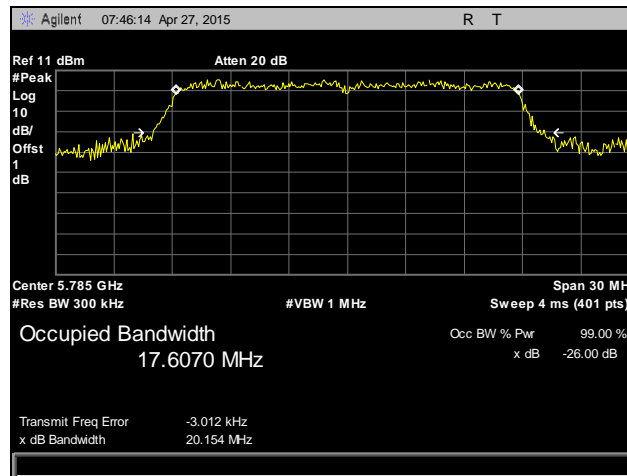


Plot 125. Occupied Bandwidth, 802.11n 20 MHz, Mid Channel, 5785 MHz, Antenna 2

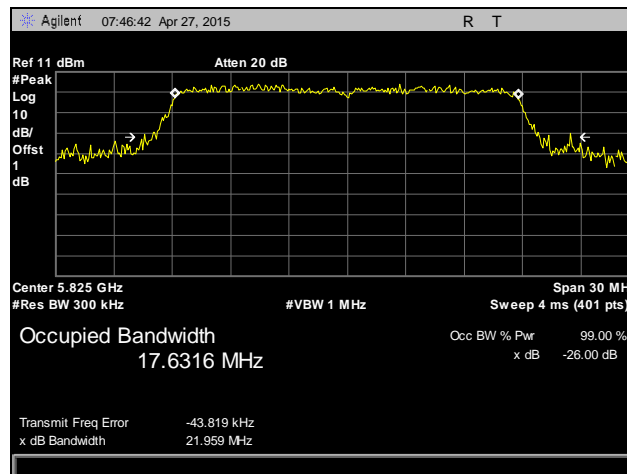


Plot 126. Occupied Bandwidth, 802.11n 20 MHz, High Channel, 5825 MHz, Antenna 2


Occupied Bandwidth, 802.11n 40 MHz, Antenna 0

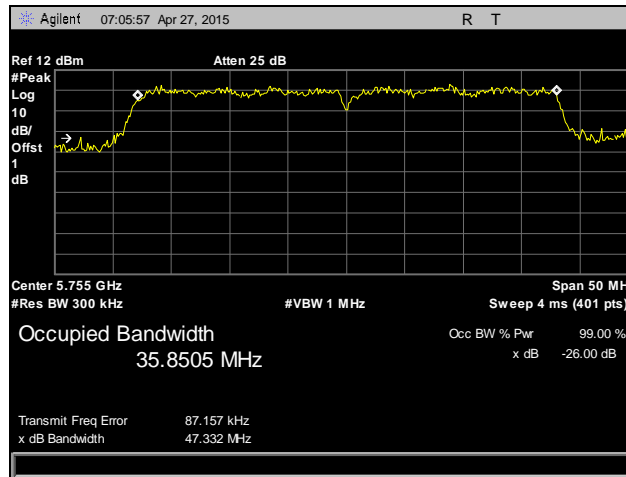

Plot 127. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 0

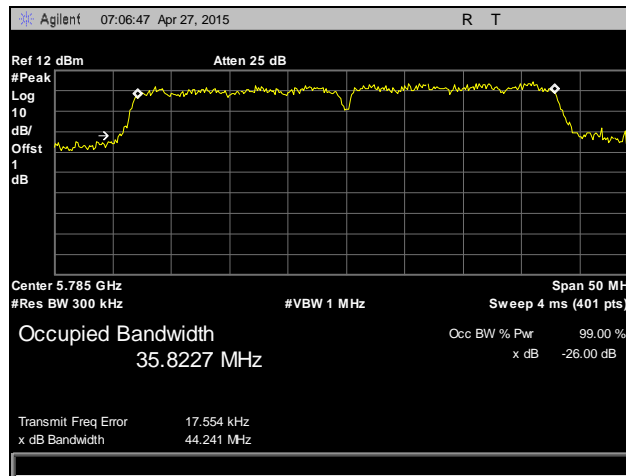


Plot 128. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 0

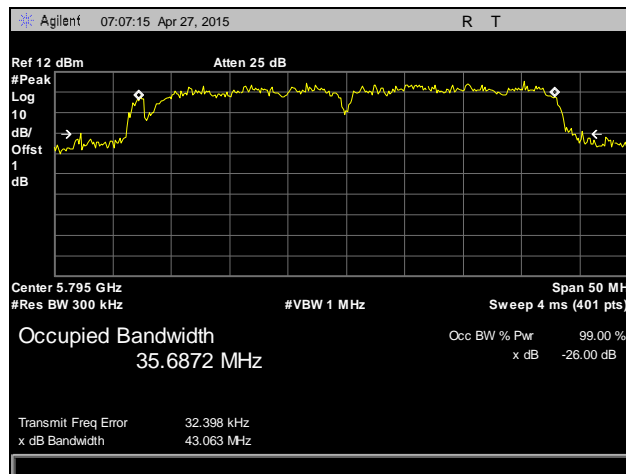


Plot 129. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 0


Occupied Bandwidth, 802.11n 40 MHz, Antenna 1

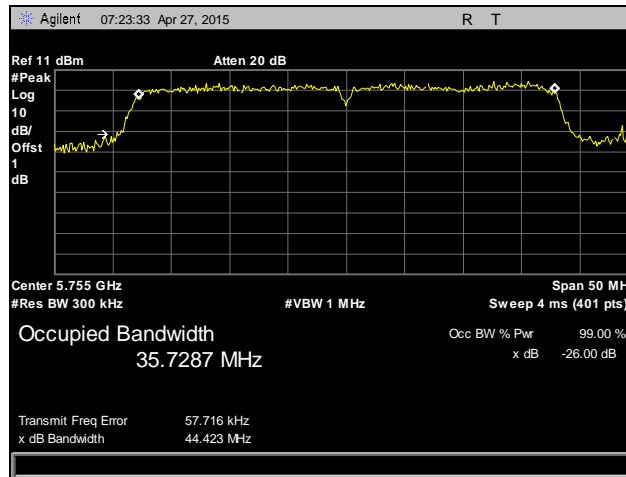

Plot 130. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 1

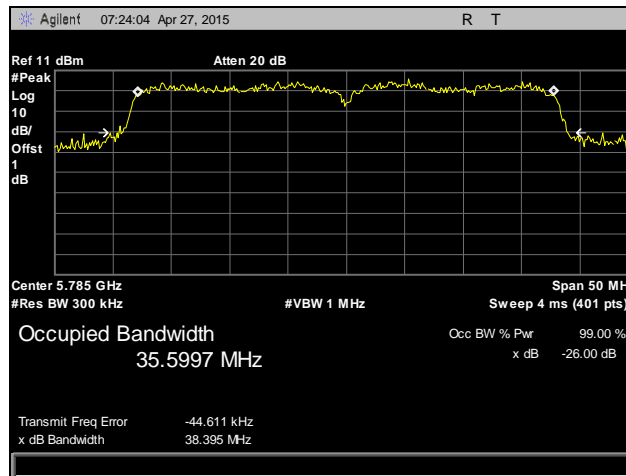


Plot 131. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 1

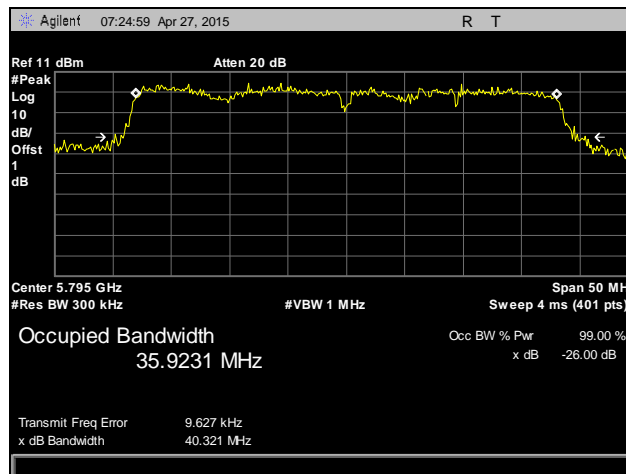


Plot 132. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 1


Occupied Bandwidth, 802.11n 40 MHz, Antenna 2

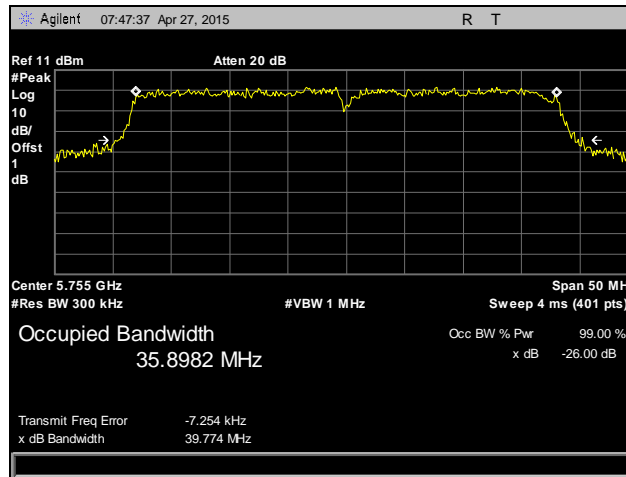

Plot 133. Occupied Bandwidth, 802.11n 40 MHz, Low Channel, 5755 MHz, Antenna 2

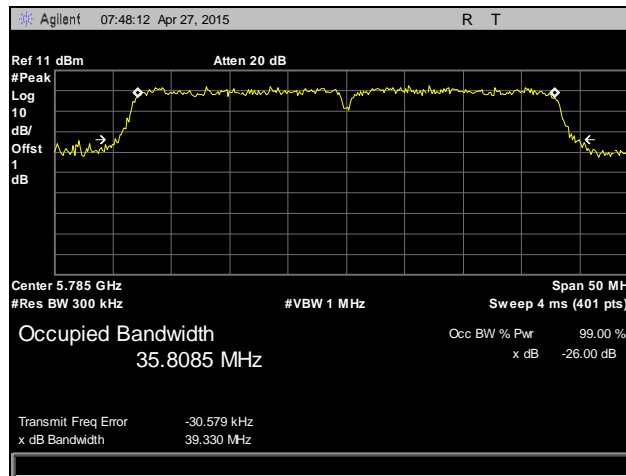

Plot 134. Occupied Bandwidth, 802.11n 40 MHz, Mid Channel, 5785 MHz, Antenna 2

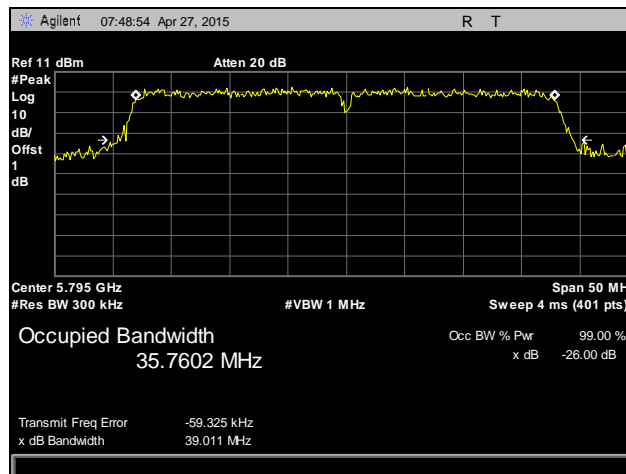

Plot 135. Occupied Bandwidth, 802.11n 40 MHz, High Channel, 5795 MHz, Antenna 2

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4771	PSA SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4446A	11/25/2014	5/25/2016
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	7/18/2014	7/18/2016
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	7/20/2014	1/20/2016
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	2/28/2014	8/28/2015
1T4300A	SEMI-ANECHOIC CHAMBER # 1 (FCC)	EMC TEST SYSTEMS	NONE	7/24/2012	7/24/2015

Table 9. Test Equipment List

V. Certification & User's Manual Information

Certification & User's Manual Information

I. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
- (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
- (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
- (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.