



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372
13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

January 31, 2017

ARRIS Group, Inc.
3871 Lakefield Drive Suite 300
Suwanee, GA 30024

Dear Tony Figueiredo,

Enclosed is the EMC Wireless test report for compliance testing of the ARRIS Group, Inc., TG3482 (ER3) as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Title 47 of the CFR, Part 15.407, Subpart E (UNII 1).

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\ARRIS Group, Inc.\EMC89082B-FCC407 UNII 1 Rev. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13501 MCCALLEN PASS • AUSTIN, TX 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

Electromagnetic Compatibility Criteria Test Report

for the

**ARRIS Group, Inc.
Model TG3482 (ER3)**

Tested under
The FCC Certification Rules
contained in
Title 47 of the CFR
15.407 Subpart E

MET Report: EMC89082B-FCC407 UNII 1 Rev. 1

January 31, 2017

Prepared For:

**ARRIS Group, Inc.
3871 Lakefield Drive Suite 300
Suwanee, GA 30024**

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report


for the

**ARRIS Group, Inc.
Model TG3482 (ER3)**

Tested under
The FCC Certification Rules
contained in
Title 47 of the CFR
15.407 Subpart E



Hadid Jones, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Parts 15B, 15.407, of the FCC Rules under normal use and maintenance.



Asad Bajwa,
Director, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	November 11, 2016	Initial Issue.
1	January 31, 2017	Editorial correction.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview	4
	B. References	5
	C. Test Site	5
	D. Description of Test Sample	5
	E. Equipment Configuration	6
	F. Support Equipment	6
	G. Ports and Cabling Information	7
	H. Mode of Operation	7
	I. Method of Monitoring EUT Operation	7
	J. Modifications	7
	a) Modifications to EUT	7
	b) Modifications to Test Standard	7
	K. Disposition of EUT	7
III.	Electromagnetic Compatibility Criteria for Intentional Radiators	8
	§ 15.203 Antenna Requirement	9
	§ 15.403(i) 26dB Bandwidth	10
	§ 15.407(a)(1) Maximum Conducted Output Power	18
	§ 15.407(a)(1) Maximum Power Spectral Density	33
	§ 15.407(b) & (6 - 7) Undesirable Emissions	48
	§ 15.407(b)(6) Conducted Emissions	95
	§ 15.247(i) Maximum Permissible Exposure	98
IV.	Test Equipment	99
V.	Certification & User's Manual Information	101
	A. Certification Information	102
	B. Label and User's Manual Information	106

List of Tables

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing	2
Table 2. EUT Summary.....	4
Table 3. References	5
Table 4. Equipment Configuration	6
Table 5. Support Equipment.....	6
Table 6. Ports and Cabling Information	7
Table 7. Occupied Bandwidth, Test Results.....	11
Table 8. Output Power, Test Results, 4x8	19
Table 9. Output Power, Test Results, 8x8	20
Table 10. Power Spectral Density, Test Results, 4x8.....	34
Table 11. Power Spectral Density, Test Results, 8x8.....	35
Table 12. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	95
Table 13. Conducted Emissions, 15.207(a), Neutral Line, Test Results	96
Table 14. Conducted Emissions, 15.207(a), Phase Line, Test Results	97
Table 15. MPE, 8x8.....	98
Table 16. Test Equipment List	100

List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
--	---

List of Plots

Plot 1. Occupied Bandwidth, 802.11a, 5180 MHz, 6M	12
Plot 2. Occupied Bandwidth, 802.11a, 5200 MHz, 6M	12
Plot 3. Occupied Bandwidth, 802.11a, 5240 MHz, 6M	12
Plot 4. Occupied Bandwidth, 802.11ac 20 MHz, Channel 5180 MHz, MCS0 NSS1	13
Plot 5. Occupied Bandwidth, 802.11ac 20 MHz, Channel 5200 MHz, MCS0 NSS1	13
Plot 6. Occupied Bandwidth, 802.11ac 20 MHz, Channel 5240 MHz, MCS0 NSS1	13
Plot 7. Occupied Bandwidth, 802.11ac 40 MHz, Channel 5190 MHz, MCS0 NSS1	14
Plot 8. Occupied Bandwidth, 802.11ac 40 MHz, Channel 5230 MHz, MCS0 NSS1	14
Plot 9. Occupied Bandwidth, 802.11ac 80 MHz, Channel 5190 MHz, MCS0 NSS1	15
Plot 10. Occupied Bandwidth, 802.11n 20 MHz, Channel 5180 MHz, MCS0	16
Plot 11. Occupied Bandwidth, 802.11n 20 MHz, Channel 5200 MHz, MCS0	16
Plot 12. Occupied Bandwidth, 802.11n 20 MHz, Channel 5240 MHz, MCS0	16
Plot 13. Occupied Bandwidth, 802.11n 40 MHz, Channel 5190 MHz, MCS0	17
Plot 14. Occupied Bandwidth, 802.11n 40 MHz, Channel 5230 MHz, MCS0	17
Plot 15. Output Power, 802.11a, Channel 5180 MHz, 4x8 MCS0 CH3	21
Plot 16. Output Power, 802.11a, Channel 5200 MHz, 4x8 MCS0 CH3	21
Plot 17. Output Power, 802.11a, Channel 5240 MHz, 4x8 MCS0 CH3	21
Plot 18. Output Power, 802.11ac 20 MHz, Channel 5180 MHz, 4x8 MCS0 CH3	22
Plot 19. Output Power, 802.11ac 20 MHz, Channel 5200 MHz, 4x8 MCS0 CH3	22
Plot 20. Output Power, 802.11ac 20 MHz, Channel 5240 MHz, 4x8 MCS0 CH3	22
Plot 21. Output Power, 802.11ac 40 MHz, Channel 5190 MHz, 4x8 MCS0 CH3	23
Plot 22. Output Power, 802.11ac 40 MHz, Channel 5230 MHz, 4x8 MCS0 CH3	23
Plot 23. Output Power, 802.11ac 80 MHz, Channel 5210 MHz, 4x8 MCS0 CH3	24
Plot 24. Output Power, 802.11n 20 MHz, Channel 5180 MHz, 4x8 MCS0 CH3	25
Plot 25. Output Power, 802.11n 20 MHz, Channel 5200 MHz, 4x8 MCS0 CH3	25
Plot 26. Output Power, 802.11n 20 MHz, Channel 5240 MHz, 4x8 MCS0 CH3	25
Plot 27. Output Power, 802.11n 40 MHz, Channel 5190 MHz, 4x8 MCS0 CH3	26
Plot 28. Output Power, 802.11n 40 MHz, Channel 5230 MHz, 4x8 MCS0 CH3	26

Plot 29. Output Power, 802.11a, Channel 5180 MHz, 8x8 6M CH1	27
Plot 30. Output Power, 802.11a, Channel 5200 MHz, 8x8 6M CH1	27
Plot 31. Output Power, 802.11a, Channel 5240 MHz, 8x8 6M CH1	27
Plot 32. Output Power, 802.11ac 20 MHz, Channel 5180 MHz, 8x8 MCS0 NSS1 CH1	28
Plot 33. Output Power, 802.11ac 20 MHz, Channel 5200 MHz, 8x8 MCS0 NSS1 CH1	28
Plot 34. Output Power, 802.11ac 20 MHz, Channel 5240 MHz, 8x8 MCS0 NSS1 CH1	28
Plot 35. Output Power, 802.11ac 40 MHz, Channel 5190 MHz, 8x8 MCS0 NSS1 CH1	29
Plot 36. Output Power, 802.11ac 40 MHz, Channel 5230 MHz, 8x8 MCS0 NSS1 CH1	29
Plot 37. Output Power, 802.11ac 80 MHz, Channel 5210 MHz, 8x8 MCS0 NSS1 CH1	30
Plot 38. Output Power, 802.11n 20 MHz, Channel 5180 MHz, 8x8 MCS0 CH1	31
Plot 39. Output Power, 802.11n 20 MHz, Channel 5200 MHz, 8x8 MCS0 CH1	31
Plot 40. Output Power, 802.11n 20 MHz, Channel 5240 MHz, 8x8 MCS0 CH1	31
Plot 41. Output Power, 802.11n 40 MHz, Channel 5190 MHz, 8x8 MCS0 CH1	32
Plot 42. Output Power, 802.11n 40 MHz, Channel 5230 MHz, 8x8 MCS0 CH1	32
Plot 43. Power Spectral Density, 802.11a, Channel 5180 MHz, 4x8 6M CH3	36
Plot 44. Power Spectral Density, 802.11a, Channel 5200 MHz, 4x8 6M CH3	36
Plot 45. Power Spectral Density, 802.11a, Channel 5240 MHz, 4x8 6M CH3	36
Plot 46. Power Spectral Density, 802.11ac 20 MHz, Channel 5180 MHz, 4x8 MCS0 CH3	37
Plot 47. Power Spectral Density, 802.11ac 20 MHz, Channel 5200 MHz, 4x8 MCS0 CH3	37
Plot 48. Power Spectral Density, 802.11ac 20 MHz, Channel 5240 MHz, 4x8 MCS0 CH3	37
Plot 49. Power Spectral Density, 802.11ac 40 MHz, Channel 5190 MHz, 4x8 MCS0 CH3	38
Plot 50. Power Spectral Density, 802.11ac 40 MHz, Channel 5230 MHz, 4x8 MCS0 CH3	38
Plot 51. Power Spectral Density, 802.11ac 80 MHz, Channel 5210 MHz, 4x8 MCS0 CH3	39
Plot 52. Power Spectral Density, 802.11n 20 MHz, Channel 5180 MHz, 4x8 MCS0 CH3	40
Plot 53. Power Spectral Density, 802.11n 20 MHz, Channel 5200 MHz, 4x8 MCS0 CH3	40
Plot 54. Power Spectral Density, 802.11n 20 MHz, Channel 5240 MHz, 4x8 MCS0 CH3	40
Plot 55. Power Spectral Density, 802.11n 40 MHz, Channel 5190 MHz, 4x8 MCS0 CH3	41
Plot 56. Power Spectral Density, 802.11n 40 MHz, Channel 5230 MHz, 4x8 MCS0 CH3	41
Plot 57. Power Spectral Density, 802.11a, Channel 5180 MHz, 8x8 6M CH1	42
Plot 58. Power Spectral Density, 802.11a, Channel 5200 MHz, 8x8 MCS0 NSS1 CH1	42
Plot 59. Power Spectral Density, 802.11a, Channel 5240 MHz, 8x8 MCS0 NSS1 CH1	42
Plot 60. Power Spectral Density, 802.11ac 20 MHz, Channel 5180 MHz, 8x8 MCS0 NSS1 CH1	43
Plot 61. Power Spectral Density, 802.11ac 20 MHz, Channel 5200 MHz, 8x8 MCS0 NSS1 CH1	43
Plot 62. Power Spectral Density, 802.11ac 20 MHz, Channel 5240 MHz, 8x8 MCS0 NSS1 CH1	43
Plot 63. Power Spectral Density, 802.11ac 40 MHz, Channel 5190 MHz, 8x8 MCS0 NSS1 CH1	44
Plot 64. Power Spectral Density, 802.11ac 40 MHz, Channel 5230 MHz, 8x8 MCS0 NSS1 CH1	44
Plot 65. Power Spectral Density, 802.11ac 80 MHz, Channel 5210 MHz, 8x8 MCS0 NSS1 CH1	45
Plot 66. Power Spectral Density, 802.11n 20 MHz, Channel 5180 MHz, 8x8 MCS0 NSS1 CH1	46
Plot 67. Power Spectral Density, 802.11n 20 MHz, Channel 5200 MHz, 8x8 MCS0 NSS1 CH1	46
Plot 68. Power Spectral Density, 802.11n 20 MHz, Channel 5240 MHz, 8x8 MCS0 NSS1 CH1	46
Plot 69. Power Spectral Density, 802.11n 40 MHz, Channel 5190 MHz, 8x8 MCS0 NSS1 CH1	47
Plot 70. Power Spectral Density, 802.11n 40 MHz, Channel 5230 MHz, 8x8 MCS0 NSS1 CH1	47
Plot 71. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio Off	49
Plot 72. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio On	49
Plot 73. Radiated Spurious Emissions, 802.11a, 5180 MHz, 4x8, 6M, 1 GHz – 7 GHz, Average	50
Plot 74. Radiated Spurious Emissions, 802.11a, 5180 MHz, 4x8, 6M, 1 GHz – 7 GHz, Peak	50
Plot 75. Radiated Spurious Emissions, 802.11a, 5240 MHz, 4x8, 6M, 1 GHz – 7 GHz, Average	51
Plot 76. Radiated Spurious Emissions, 802.11a, 5240 MHz, 4x8, 6M, 1 GHz – 7 GHz, Peak	51
Plot 77. Radiated Spurious Emissions, 802.11ac 20 MHz, 5180 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average	52
Plot 78. Radiated Spurious Emissions, 802.11ac 20 MHz, 5180 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	52
Plot 79. Radiated Spurious Emissions, 802.11ac 20 MHz, 5240 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average	53
Plot 80. Radiated Spurious Emissions, 802.11ac 20 MHz, 5240 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	53
Plot 81. Radiated Spurious Emissions, 802.11ac 40 MHz, 5190 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average	54
Plot 82. Radiated Spurious Emissions, 802.11ac 40 MHz, 5190 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	54
Plot 83. Radiated Spurious Emissions, 802.11ac 40 MHz, 5230 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average	55
Plot 84. Radiated Spurious Emissions, 802.11ac 40 MHz, 5230 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	55
Plot 85. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average	56

Plot 86. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	56
Plot 87. Radiated Spurious Emissions, 802.11n 20 MHz, 5180 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average	57
Plot 88. Radiated Spurious Emissions, 802.11n 20 MHz, 5180 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak	57
Plot 89. Radiated Spurious Emissions, 802.11n 20 MHz, 5240 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average	58
Plot 90. Radiated Spurious Emissions, 802.11n 20 MHz, 5240 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak	58
Plot 91. Radiated Spurious Emissions, 802.11n 40 MHz, 5190 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average	59
Plot 92. Radiated Spurious Emissions, 802.11n 40 MHz, 5190 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak	59
Plot 93. Radiated Spurious Emissions, 802.11n 40 MHz, 5230 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average	60
Plot 94. Radiated Spurious Emissions, 802.11n 40 MHz, 5230 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	60
Plot 95. Radiated Spurious Emissions, 802.11a, 5180 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average	61
Plot 96. Radiated Spurious Emissions, 802.11a, 5180 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	61
Plot 97. Radiated Spurious Emissions, 802.11a, 5240 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average	62
Plot 98. Radiated Spurious Emissions, 802.11a, 5240 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	62
Plot 99. Radiated Spurious Emissions, 802.11ac 20 MHz, 5180 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average	63
Plot 100. Radiated Spurious Emissions, 802.11ac 20 MHz, 5180 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	63
Plot 101. Radiated Spurious Emissions, 802.11ac 20 MHz, 5240 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average ...	64
Plot 102. Radiated Spurious Emissions, 802.11ac 20 MHz, 5240 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	64
Plot 103. Radiated Spurious Emissions, 802.11ac 40 MHz, 5190 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average ...	65
Plot 104. Radiated Spurious Emissions, 802.11ac 40 MHz, 5190 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	65
Plot 105. Radiated Spurious Emissions, 802.11ac 40 MHz, 5230 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average ...	66
Plot 106. Radiated Spurious Emissions, 802.11ac 40 MHz, 5230 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	66
Plot 107. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average ...	67
Plot 108. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak	67
Plot 109. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 8x8, MCS0 NSS1, 7 GHz – 18 GHz, Average ..	68
Plot 110. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 8x8, MCS0 NSS1, 7 GHz – 18 GHz, Peak	68
Plot 111. Radiated Spurious Emissions, 802.11n 20 MHz, 5180 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average	69
Plot 112. Radiated Spurious Emissions, 802.11n 20 MHz, 5180 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak	69
Plot 113. Radiated Spurious Emissions, 802.11n 20 MHz, 5240 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average	70
Plot 114. Radiated Spurious Emissions, 802.11n 20 MHz, 5240 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak	70
Plot 115. Radiated Spurious Emissions, 802.11n 40 MHz, 5190 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average	71
Plot 116. Radiated Spurious Emissions, 802.11n 40 MHz, 5190 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak	71
Plot 117. Radiated Spurious Emissions, 802.11n 40 MHz, 5230 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average	72
Plot 118. Radiated Spurious Emissions, 802.11n 40 MHz, 5230 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak	72
Plot 119. Radiated Band Edge, 802.11a, Channel 5180 MHz, 4x8, Average, 6M	73
Plot 120. Radiated Band Edge, 802.11a, Channel 5180 MHz, 4x8, Peak, 6M	73
Plot 121. Radiated Band Edge, 802.11a, Channel 5240 MHz, 4x8, Average, 6M	74
Plot 122. Radiated Band Edge, 802.11a, Channel 5240 MHz, 4x8, Peak, 6M	74
Plot 123. Radiated Band Edge, 802.11ac 20 MHz, Channel 5180 MHz, 4x8, Average, MCS0 NSS1	75
Plot 124. Radiated Band Edge, 802.11ac 20 MHz, Channel 5180 MHz, 4x8, Peak, MCS0 NSS1	75
Plot 125. Radiated Band Edge, 802.11ac 20 MHz, Channel 5240 MHz, 4x8, Average, MCS0 NSS1	76
Plot 126. Radiated Band Edge, 802.11ac 20 MHz, Channel 5240 MHz, 4x8, Peak, MCS0 NSS1	76
Plot 127. Radiated Band Edge, 802.11ac 40 MHz, Channel 5190 MHz, 4x8, Average, MCS0 NSS1	77
Plot 128. Radiated Band Edge, 802.11ac 40 MHz, Channel 5190 MHz, 4x8, Peak, MCS0 NSS1	77
Plot 129. Radiated Band Edge, 802.11ac 40 MHz, Channel 5230 MHz, 4x8, Average, MCS0 NSS1	78
Plot 130. Radiated Band Edge, 802.11ac 40 MHz, Channel 5230 MHz, 4x8, Peak, MCS0 NSS1	78
Plot 131. Radiated Band Edge, 802.11ac 80 MHz, Channel 5210 MHz, 4x8, Average, MCS0 NSS1	79
Plot 132. Radiated Band Edge, 802.11ac 80 MHz, Channel 5210 MHz, 4x8, Peak, MCS0 NSS1	79
Plot 133. Radiated Band Edge, 802.11n 20 MHz, Channel 5180 MHz, 4x8, Average, MCS0	80
Plot 134. Radiated Band Edge, 802.11n 20 MHz, Channel 5180 MHz, 4x8, Peak	80
Plot 135. Radiated Band Edge, 802.11n 20 MHz, Channel 5240 MHz, 4x8, Average, MCS0	81
Plot 136. Radiated Band Edge, 802.11n 20 MHz, Channel 5240 MHz, 4x8, Peak	81
Plot 137. Radiated Band Edge, 802.11n 40 MHz, Channel 5190 MHz, 4x8, Average, MCS0	82
Plot 138. Radiated Band Edge, 802.11n 40 MHz, Channel 5190 MHz, 4x8, Peak, MCS0, P17-15	82
Plot 139. Radiated Band Edge, 802.11n 40 MHz, Channel 5230 MHz, 4x8, Average, MCS0	83
Plot 140. Radiated Band Edge, 802.11n 40 MHz, Channel 5230 MHz, 4x8, Peak, MCS0	83
Plot 141. Radiated Band Edge, 802.11a, Channel 5180 MHz, 8x8, Average	84
Plot 142. Radiated Band Edge, 802.11a, Channel 5180 MHz, 8x8, Peak	84

Plot 143. Radiated Band Edge, 802.11a, Channel 5240 MHz, 8x8, Average	85
Plot 144. Radiated Band Edge, 802.11a, Channel 5240 MHz, 8x8, Peak	85
Plot 145. Radiated Band Edge, 802.11ac 20 MHz, Channel 5180 MHz, 8x8, Average.....	86
Plot 146. Radiated Band Edge, 802.11ac 20 MHz, Channel 5180 MHz, 8x8, Peak	86
Plot 147. Radiated Band Edge, 802.11ac 20 MHz, Channel 5240 MHz, 8x8, Average.....	87
Plot 148. Radiated Band Edge, 802.11ac 20 MHz, Channel 5240 MHz, 8x8, Peak	87
Plot 149. Radiated Band Edge, 802.11ac 40 MHz, Channel 5190 MHz, 8x8, Average, MCS0 NSS1	88
Plot 150. Radiated Band Edge, 802.11ac 40 MHz, Channel 5190 MHz, 8x8, Peak, MCS0 NSS1	88
Plot 151. Radiated Band Edge, 802.11ac 40 MHz, Channel 5230 MHz, 8x8, Average, MCS0 NSS1	89
Plot 152. Radiated Band Edge, 802.11ac 40 MHz, Channel 5230 MHz, 8x8, Peak, MCS0 NSS1	89
Plot 153. Radiated Band Edge, 802.11ac 80 MHz, Channel 5210 MHz, 8x8, Average, MCS0 NSS1	90
Plot 154. Radiated Band Edge, 802.11ac 80 MHz, Channel 5210 MHz, 8x8, Peak, MCS0 NSS1	90
Plot 155. Radiated Band Edge, 802.11n 20 MHz, Channel 5180 MHz, 8x8, Average, NSS1	91
Plot 156. Radiated Band Edge, 802.11n 20 MHz, Channel 5180 MHz, 8x8, Peak, NSS1	91
Plot 157. Radiated Band Edge, 802.11n 20 MHz, Channel 5240 MHz, 8x8, Average, NSS1	92
Plot 158. Radiated Band Edge, 802.11n 20 MHz, Channel 5240 MHz, 8x8, Peak, NSS1	92
Plot 159. Radiated Band Edge, 802.11n 40 MHz, Channel 5190 MHz, 8x8, Average, MCS0 NSS1	93
Plot 160. Radiated Band Edge, 802.11n 40 MHz, Channel 5190 MHz, 8x8, Peak, MCS0 NSS1	93
Plot 161. Radiated Band Edge, 802.11n 40 MHz, Channel 5230 MHz, 8x8, Average, MCS0 NSS1	94
Plot 162. Radiated Band Edge, 802.11n 40 MHz, Channel 5230 MHz, 8x8, Peak, MCS0 NSS1	94
Plot 163. Conducted Emissions, Neutral Line	96
Plot 164. Conducted Emissions, Phase Line	97

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	Kilohertz
kPa	Kilopascal
kV	Kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	Microhenry
μ	Microfarad
μs	Microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the ARRIS Group, Inc. TG3482 (ER3), with the requirements of Part 15, §15.407. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the TG3482 (ER3). ARRIS Group, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the TG3482 (ER3), has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.407, in accordance with ARRIS Group, Inc., purchase order number AR1079104. All tests were conducted using measurement procedure ANSI C63.4-2014.

FCC Reference	Description	Results
§15.203	Antenna Requirement	Compliant
§15.403(i)	26dB Occupied Bandwidth	Compliant
§15.407 (a)(1)	Maximum Conducted Output Power	Compliant
§15.407 (a)(1)	Maximum Power Spectral Density	Compliant
§15.407 (b)(1)& (6 - 7)	Undesirable Emissions	Compliant
§15.407(b)(6)	Conducted Emission Limits	Compliant
§15.407(f)	RF Exposure	Compliant

Table 1. Executive Summary of EMC Part 15.407 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by ARRIS Group, Inc. to perform testing on the TG3482 (ER3), under ARRIS Group, Inc.'s purchase order number AR1079104.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the ARRIS Group, Inc. TG3482 (ER3).

The results obtained relate only to the item(s) tested.

Model(s) Tested:	TG3482 (ER3)	
Model(s) Covered:	TG3482 (ER3)	
EUT Specifications:	Primary Power: 115 VAC, 60 Hz	
	FCC ID: UIDTG3482ER3	
	Type of Modulations:	QAM, QPSK
	Equipment Code:	NII
	Max. RF Output Power:	26.22dBm @ 5230MHz
	EUT Frequency Ranges:	5180 – 5240 MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Type of Filing:	Original	
Evaluated by:	Hadid Jones	
Report Date(s):	January 31, 2017	

Table 2. EUT Summary

B. References

CFR 47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices (UNII)
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
789033 D02 General UNII Test Procedures New Rules v01r03	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The ARRIS Group, Inc. TG3482 (ER3) Telephony Wireless Gateway supporting DOCSIS 3.1, Equipment Under Test (EUT), along with its 8x8 802.11ac Dual Band Wireless radios. The IoT subsystem is capable of supporting personal area networks based on ZigBee, Thread and BTLE.

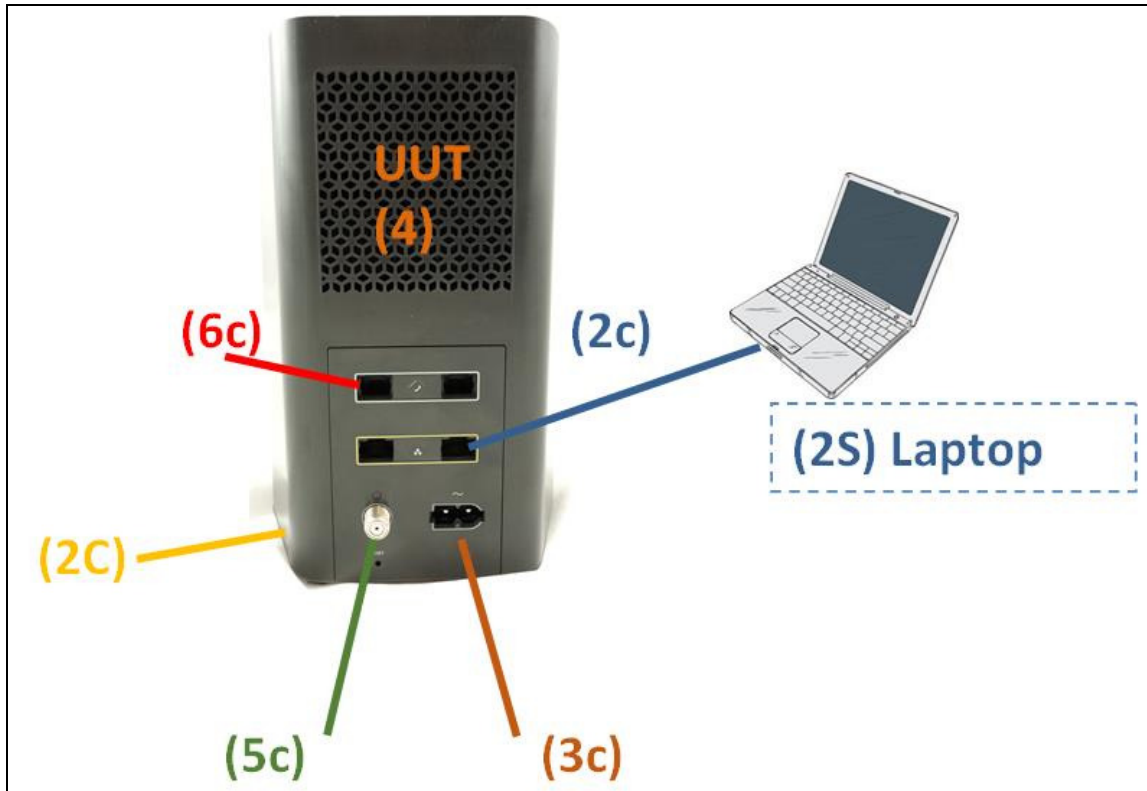


Figure 1. Block Diagram of Test Configuration

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Revision
--	TG3482 (ER3)	TG3482	--	--	--

Table 4. Equipment Configuration

F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
2s	Laptop	Assorted	N/A

Table 5. Support Equipment

G. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
2C	USB	USB-to-Serial	1	1	No	--
3C	AC Input	2 conductor, 18 AWG	1	2	No	(115v/60hz)
4C	Ethernet	5e Modular 8 pin only one Ethernet cord needed for WiFi testing	Up to 4	1	No	--
5C	Coax	Coax. Not used for WiFi testing	1	0	Yes	--
6C	Telephony	Not used for WiFi testing	Up to 2	0	No	--

Table 6. Ports and Cabling Information

H. Mode of Operation

The provided instructions and software will configure the TG3482 (ER3) for operation at each required test mode.

I. Method of Monitoring EUT Operation

The measured emission value is over the specified FCC limits.

J. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to ARRIS Group, Inc. upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The EUT has an integral antenna

Test Engineer(s): Hadid Jones

Test Date(s): 11/03/16

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.403(i) 26dB Bandwidth


Test Requirements: § 15.403(i): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Procedure: The transmitter was set to low, mid, and high operating frequencies at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth, VBW > RBW. The 26 dB Bandwidth was measured and recorded.

Test Results The 26 dB Bandwidth was compliant with the requirements of this section.

Test Engineer(s): Hadid Jones


Test Date(s): 11/03/16




Bandwidth		
EUT Mode	26dB	99%
26dB_BW 20M_Ch 5180M_A_6M	26.684	17.29
26dB_BW 20M_Ch 5180M_AC_NSS1_MSC0	29.743	18.73
26dB_BW 20M_Ch 5180M_N_MSC0	30.654	18.62
26dB_BW 20M_Ch 5200M_A_6M	29.18	17.4
26dB_BW 20M_Ch 5200M_AC_NSS1_MSC0	33.435	18.8
26dB_BW 20M_Ch 5200M_N_MSC0	27.464	18.55
26dB_BW 20M_Ch 5240M_A_6M	31.239	17.33
26dB_BW 20M_Ch 5240M_AC_NSS1_MSC0	28.456	18.84
26dB_BW 20M_Ch 5240M_N_MSC0	29.743	18.63
26dB_BW 40M_Ch 5190M_AC_NSS1_MSC0	62.273	37.43
26dB_BW 40M_Ch 5190M_N_MSC0	52.439	37.1
26dB_BW 40M_Ch 5230M_AC_NSS1_MSC0	52.556	37.38
26dB_BW 40M_Ch 5230M_N_MSC0	50.464	37.13
26dB_BW 80M_Ch 5210M_AC_NSS1_MSC0	113.523	75.92

Table 7. Occupied Bandwidth, Test Results


Occupied Bandwidth, 802.11a

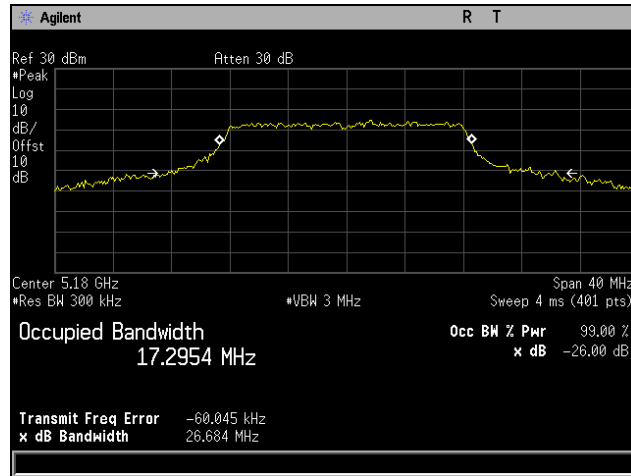

Plot 1. Occupied Bandwidth, 802.11a, 5180 MHz, 6M

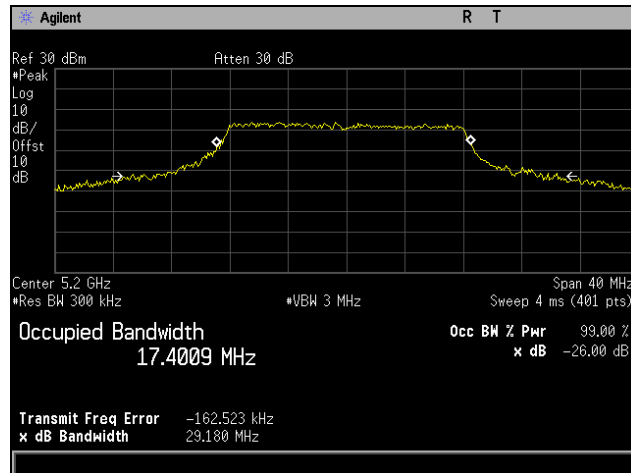


Plot 2. Occupied Bandwidth, 802.11a, 5200 MHz, 6M

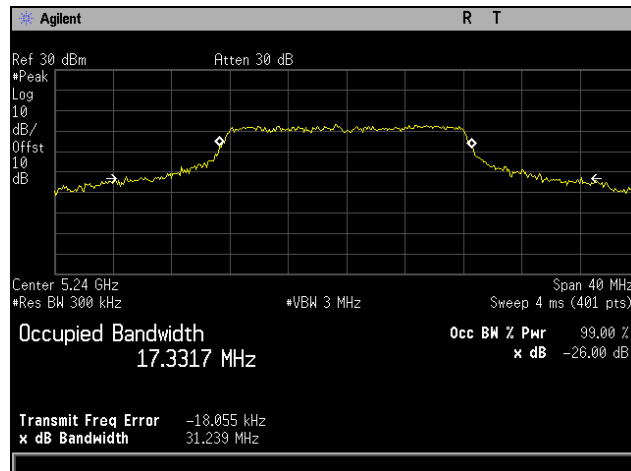


Plot 3. Occupied Bandwidth, 802.11a, 5240 MHz, 6M


Occupied Bandwidth, 802.11ac 20 MHz

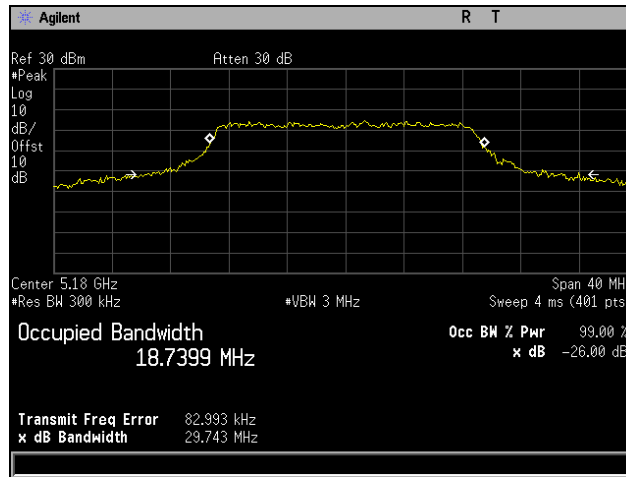

Plot 4. Occupied Bandwidth, 802.11ac 20 MHz, Channel 5180 MHz, MCS0 NSS1

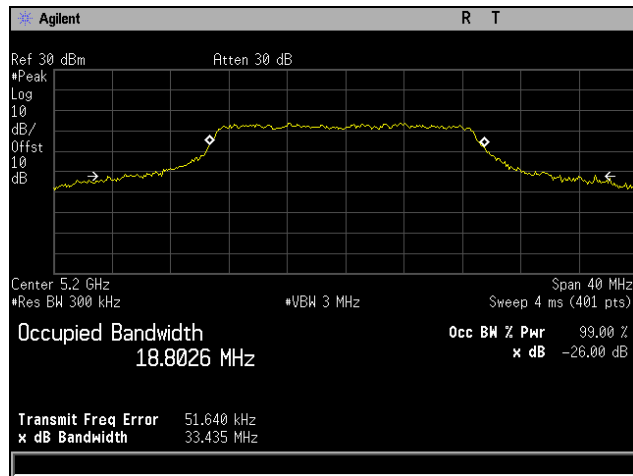


Plot 5. Occupied Bandwidth, 802.11ac 20 MHz, Channel 5200 MHz, MCS0 NSS1

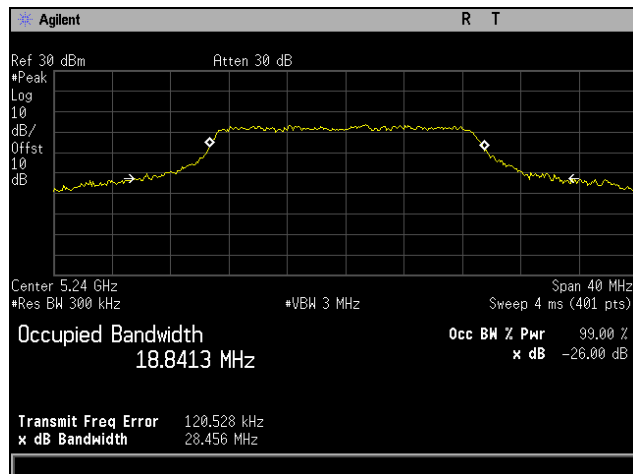


Plot 6. Occupied Bandwidth, 802.11ac 20 MHz, Channel 5240 MHz, MCS0 NSS1

Occupied Bandwidth, 802.11ac 40 MHz

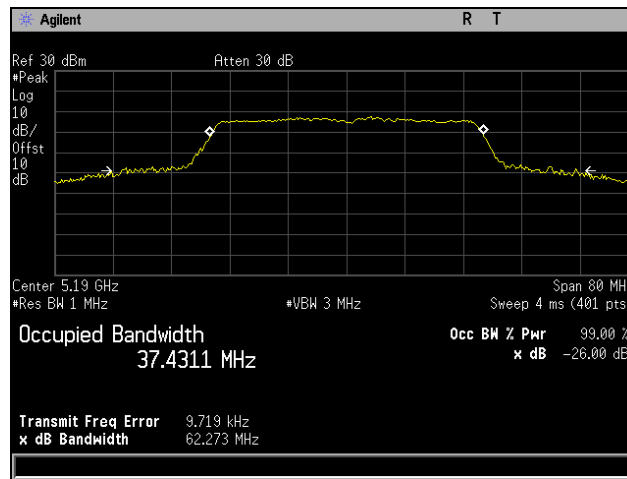


Plot 7. Occupied Bandwidth, 802.11ac 40 MHz, Channel 5190 MHz, MCS0 NSS1

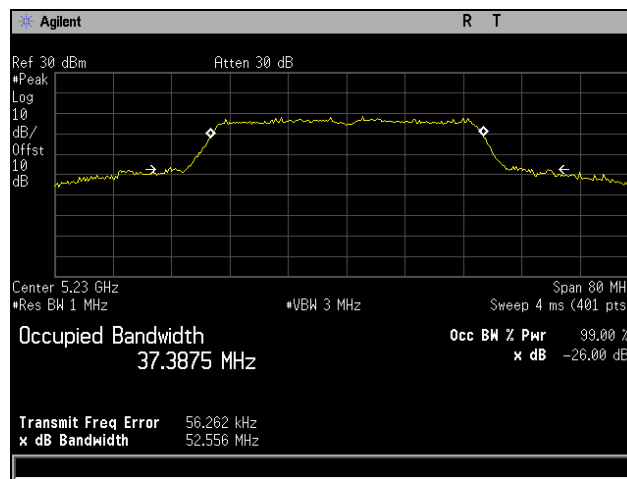


Plot 8. Occupied Bandwidth, 802.11ac 40 MHz, Channel 5230 MHz, MCS0 NSS1

Occupied Bandwidth, 802.11ac 80 MHz

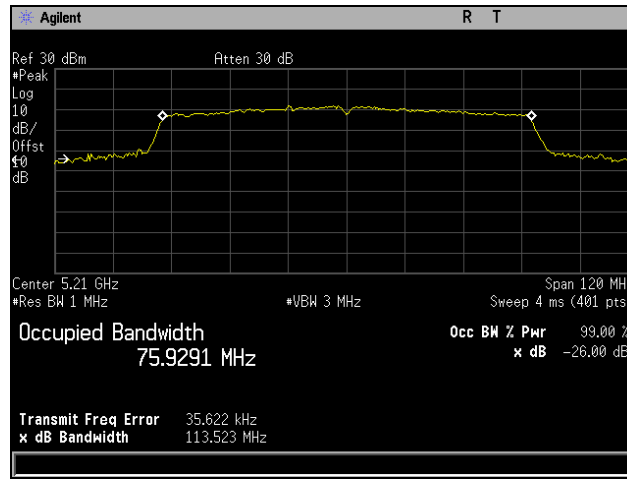


Plot 9. Occupied Bandwidth, 802.11ac 80 MHz, Channel 5190 MHz, MCS0 NSS1


Occupied Bandwidth, 802.11n 20 MHz

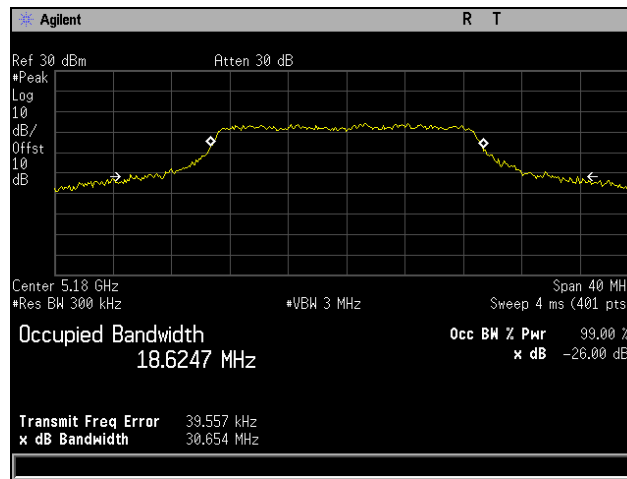

Plot 10. Occupied Bandwidth, 802.11n 20 MHz, Channel 5180 MHz, MCS0

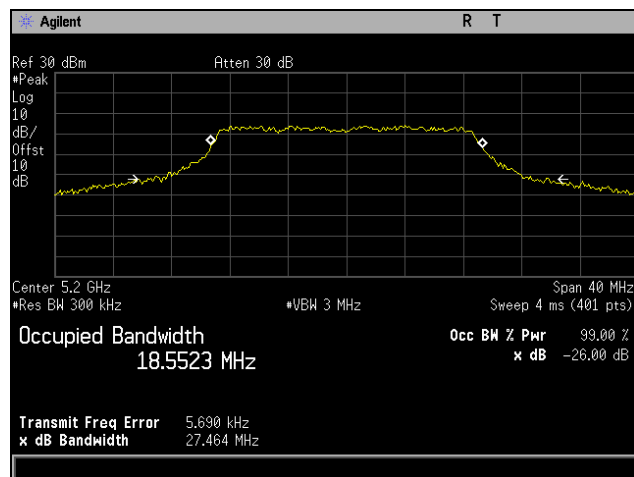


Plot 11. Occupied Bandwidth, 802.11n 20 MHz, Channel 5200 MHz, MCS0

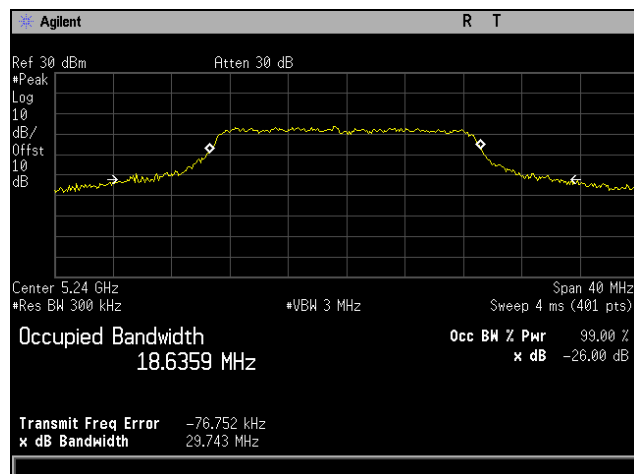


Plot 12. Occupied Bandwidth, 802.11n 20 MHz, Channel 5240 MHz, MCS0

Occupied Bandwidth, 802.11n 40 MHz

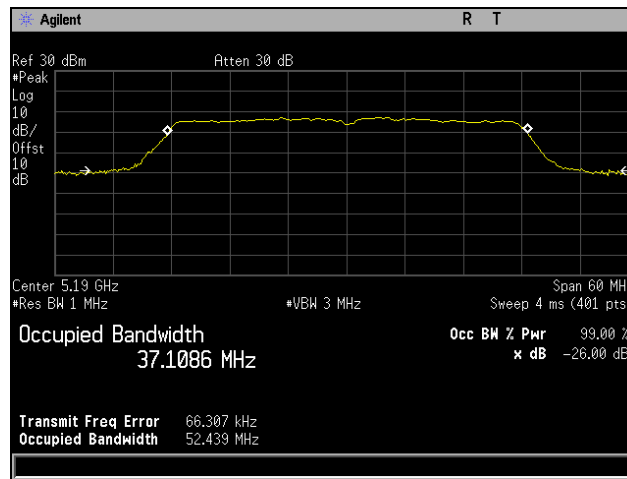

Plot 13. Occupied Bandwidth, 802.11n 40 MHz, Channel 5190 MHz, MCS0

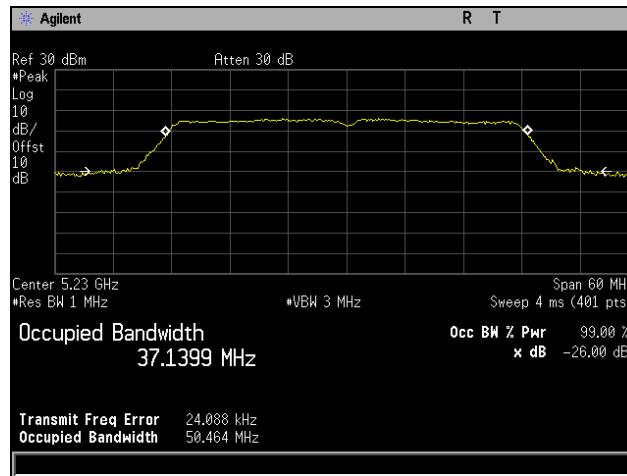

Plot 14. Occupied Bandwidth, 802.11n 40 MHz, Channel 5230 MHz, MCS0

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(a)(1) Maximum Conducted Output Power

Test Requirements:

§15.407(a)(1)(i): For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407(a)(1)(ii): For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407(a)(1)(iii): For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

§15.407(a)(1)(iv): For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Procedure:

The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according to measurement method SA-1, as described in 789033 D02 General UNII Test Procedures v01r03.

Test Results:


The EUT as tested is compliant with the requirements of this section.

Test Engineer(s):

Hadid Jones

Test Date(s):

11/03/16




4x8 MIMO Power									
Mode	Port 3 dBm	Port 4 dBm	Port 5 dBm	Port 6 dBm	Pwr Σ dBm	Limit	Antenna Gain	Final limit	Margin dB
BW 20M_Ch 5180M_4x8 A 6M	16.08	19.58	17.73	13.19	23.26	30	6.1	29.9	-6.64
BW 20M_Ch 5180M_4x8 AC NSS1 MCS0	17.12	20.2	15.96	11.63	23.23	30	6.1	29.9	-6.67
BW 20M_Ch 5180M_4x8 N MSC0	15.12	18.46	14.95	10.18	21.6	30	6.1	29.9	-8.3
BW 20M_Ch 5200M_4x8 A 6M	16.08	19.48	17.52	13.41	23.18	30	6.1	29.9	-6.72
BW 20M_Ch 5200M_4x8 AC NSS1 MCS0	16.58	20.97	16.08	11.71	23.54	30	6.1	29.9	-6.36
BW 20M_Ch 5200M_4x8 N MSC0	15.2	18.86	14.34	9.42	21.65	30	6.1	29.9	-8.25
BW 20M_Ch 5240M_4x8 A 6M CH3	15.89	19.76	20.95	16.22	24.77	30	6.1	29.9	-5.13
BW 20M_Ch 5240M_4x8 AC NSS1 MCS0	17.52	20.26	21.62	17.6	25.63	30	6.1	29.9	-4.27
BW 20M_Ch 5240M_4x8 N MSC0	16.17	19.18	20.96	16.81	24.73	30	6.1	29.9	-5.17
BW 40M_Ch 5190M_4x8 AC NSS1 MCS0	9.93	13.18	11.85	8.27	17.22	30	6.1	29.9	-12.68
BW 40M_Ch 5190M_4x8 N MSC0	6.08	8.95	11.85	7.21	15.12	30	6.1	29.9	-14.78
BW 40M_Ch 5230M_4x8 AC NSS1 MCS0	17.23	20.96	22.19	18.77	26.22	30	6.1	29.9	-3.68
BW 40M_Ch 5230M_4x8 N MSC0	16.77	19.64	20.79	16.13	24.78	30	6.1	29.9	-5.12
BW 80M_Ch 5210M_4x8 AC NSS1 MCS0	8.96	12.23	12.17	7.46	16.69	30	6.1	29.9	-13.21

Table 8. Output Power, Test Results, 4x8


8x8 MIMO Power													
Mode	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Port 5 (dBm)	Port 6 (dBm)	Port 7 (dBm)	Port 8 (dBm)	Σ PWR (dBm)	Limit (dBm)	Antenna Gain	Final limit	Margin dB
BW 20M_Ch 5180M_8x8 A 6M	17.12	15.81	13.03	16.7	13.66	9.69	10.11	10.07	23.22	30	8.5	27.5	-4.28
BW 20M_Ch 5180M_8x8 AC NSS1 MSC0	16.12	16.64	13.56	16.55	15.74	11.03	14.33	12.89	24.01	30	8.5	27.5	-3.49
BW 20M_Ch 5180M_8x8 N MSC0	16.26	14.67	14.71	17.77	15.82	10.29	12.1	11.35	23.8	30	8.5	27.5	-3.7
BW 20M_Ch 5200M_8x8 A 6M	15.48	12.4	13.28	16.91	13.78	9.35	11.06	10.65	22.56	30	8.5	27.5	-4.94
BW 20M_Ch 5200M_8x8 AC NSS1 MSC0	16.7	15.98	13.56	17.34	15.52	11.39	13.41	13.55	24.11	30	8.5	27.5	-3.39
BW 20M_Ch 5200M_8x8 N MSC0	15.16	12.59	13.42	17.08	15.53	10.87	11.41	11.27	23	30	8.5	27.5	-4.5
BW 20M_Ch 5240M_8x8 A 6M	17.47	17.22	14.36	17.18	17.3	13.01	14.04	14.3	24.98	30	8.5	27.5	-2.52
BW 20M_Ch 5240M_8x8 AC NSS1 MSC0	17.09	17.08	15.08	15.17	17.46	13.52	15.3	15.3	24.96	30	8.5	27.5	-2.54
BW 20M_Ch 5240M_8x8 N MSC0	17.1	17.41	16.24	17.24	14.26	11.41	11.42	13.15	24.42	30	8.5	27.5	-3.08
BW 40M_Ch 5190M_8x8 AC NSS1 MSC0	11.58	11.51	7.96	11.22	13.53	8.65	10.5	9.1	19.88	30	8.5	27.5	-7.62
BW 40M_Ch 5190M_8x8 N MSC0	8.14	7.86	5.55	8.44	11.05	6.56	8.96	8.89	17.49	30	8.5	27.5	-10.01
BW 40M_Ch 5230M_8x8 AC NSS1 MSC0	17.41	16.33	14.46	17.24	18.34	14.09	14.97	15.25	25.29	30	8.5	27.5	-2.21
BW 40M_Ch 5230M_8x8 N MSC0	17.12	17.01	14.59	18.23	18.84	14.69	16.11	15.02	25.75	30	8.5	27.5	-1.75
BW 80M_Ch 5210M_8x8 AC NSS1 MSC0	8.75	9.07	6.05	8.89	11.64	6.57	7.22	8.33	17.68	30	8.5	27.5	-9.82

Table 9. Output Power, Test Results, 8x8


Output Power, 802.11a, 4x8, CH3

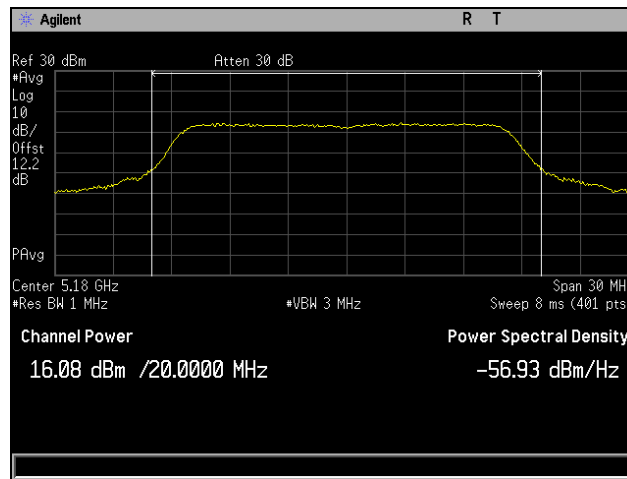

Plot 15. Output Power, 802.11a, Channel 5180 MHz, 4x8 MCS0 CH3

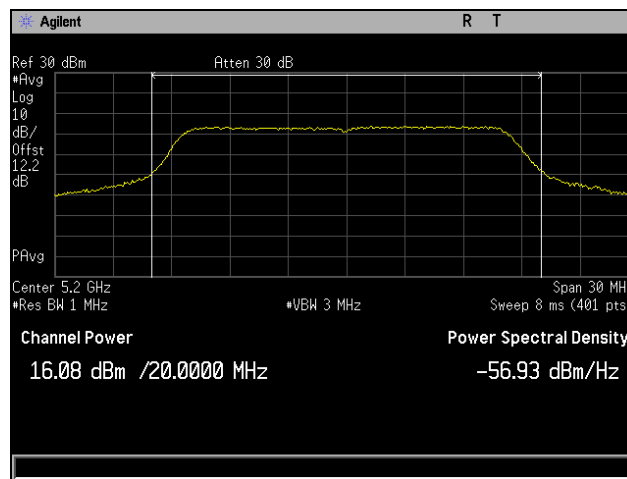


Plot 16. Output Power, 802.11a, Channel 5200 MHz, 4x8 MCS0 CH3

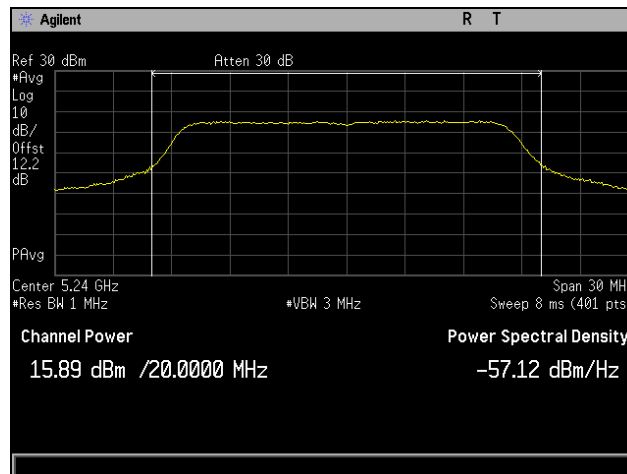


Plot 17. Output Power, 802.11a, Channel 5240 MHz, 4x8 MCS0 CH3


Output Power, 802.11ac 20 MHz, 4x8, CH3

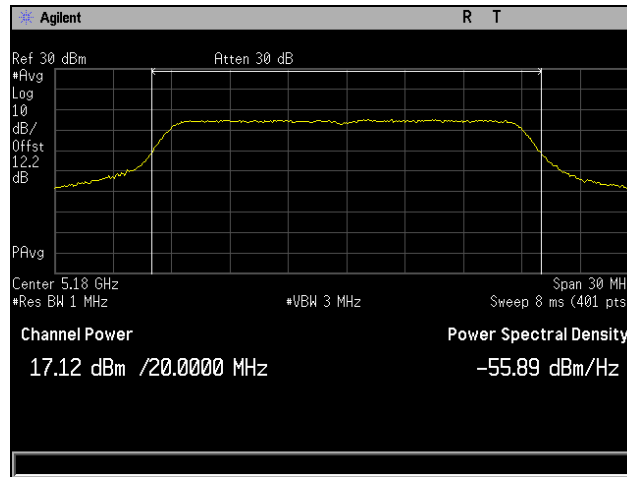

Plot 18. Output Power, 802.11ac 20 MHz, Channel 5180 MHz, 4x8 MCS0 CH3

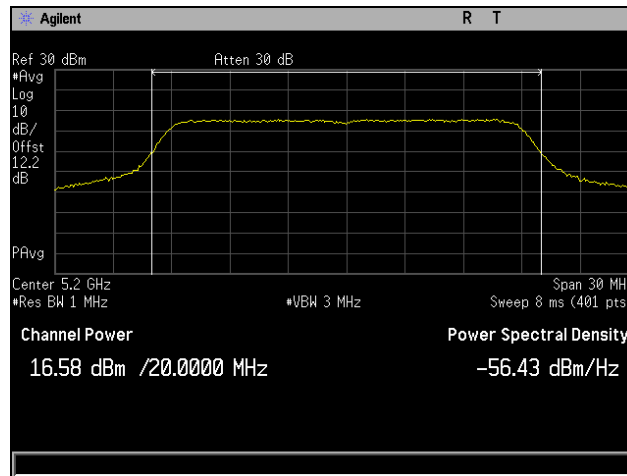


Plot 19. Output Power, 802.11ac 20 MHz, Channel 5200 MHz, 4x8 MCS0 CH3

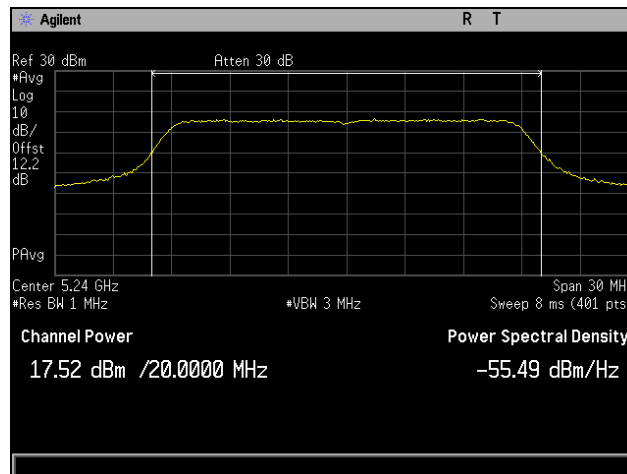


Plot 20. Output Power, 802.11ac 20 MHz, Channel 5240 MHz, 4x8 MCS0 CH3

Output Power, 802.11ac 40 MHz, 4x8, CH3

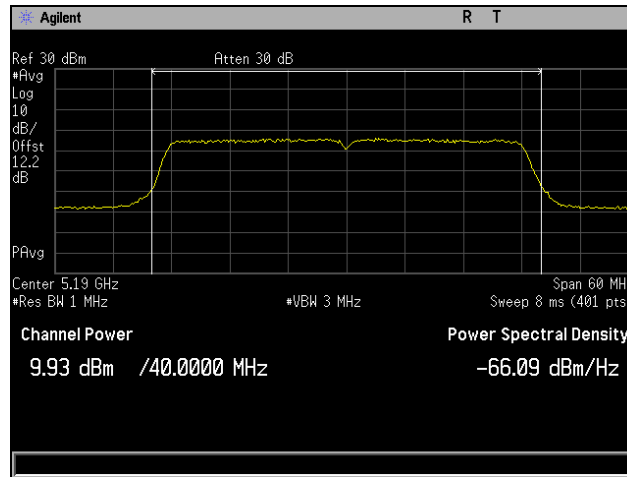


Plot 21. Output Power, 802.11ac 40 MHz, Channel 5190 MHz, 4x8 MCS0 CH3

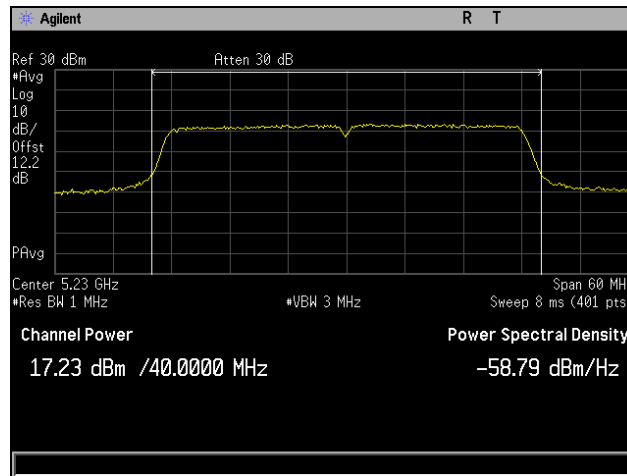


Plot 22. Output Power, 802.11ac 40 MHz, Channel 5230 MHz, 4x8 MCS0 CH3

Output Power, 802.11ac 80 MHz, 4x8

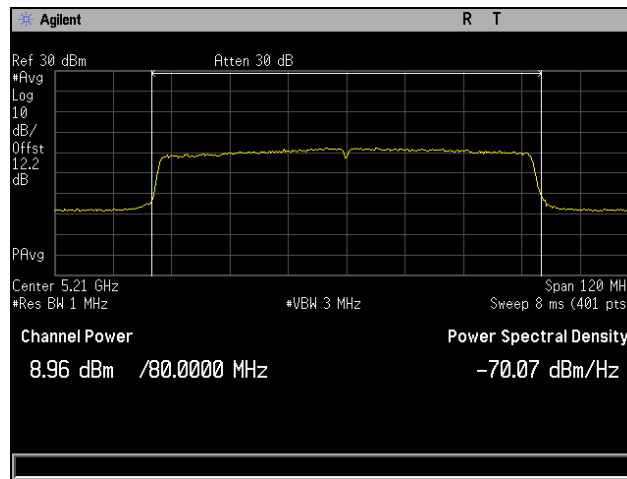


Plot 23. Output Power, 802.11ac 80 MHz, Channel 5210 MHz, 4x8 MCS0 CH3


Output Power, 802.11n 20 MHz, 4x8, CH3

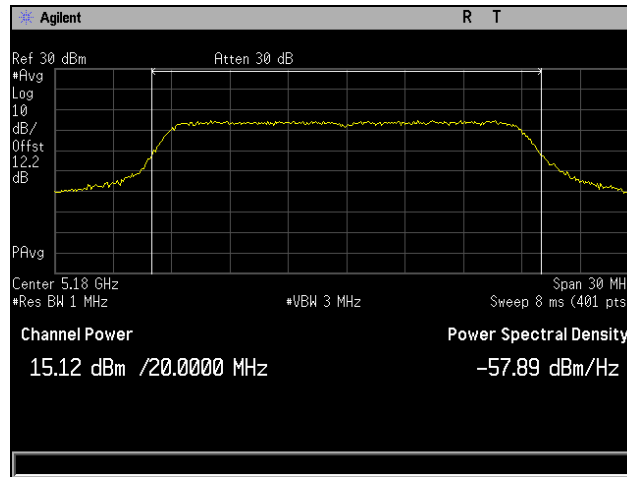

Plot 24. Output Power, 802.11n 20 MHz, Channel 5180 MHz, 4x8 MCS0 CH3

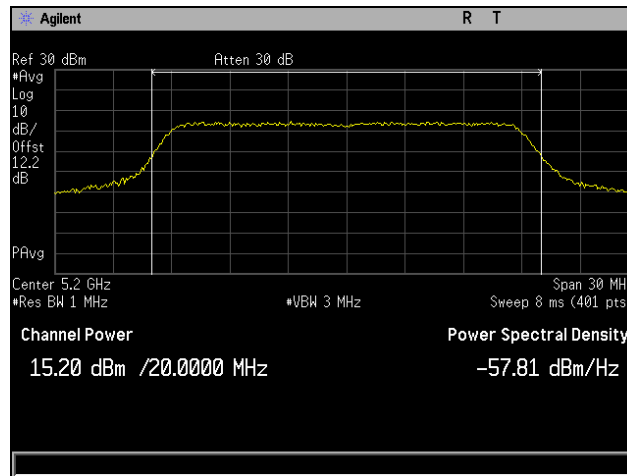


Plot 25. Output Power, 802.11n 20 MHz, Channel 5200 MHz, 4x8 MCS0 CH3

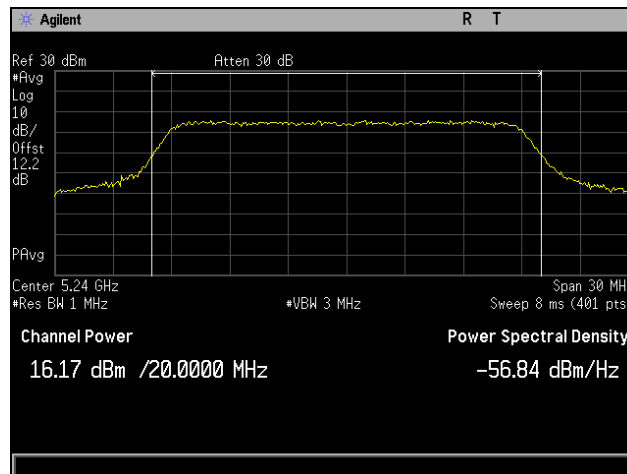


Plot 26. Output Power, 802.11n 20 MHz, Channel 5240 MHz, 4x8 MCS0 CH3

Output Power, 802.11n 40 MHz, 4x8, CH3

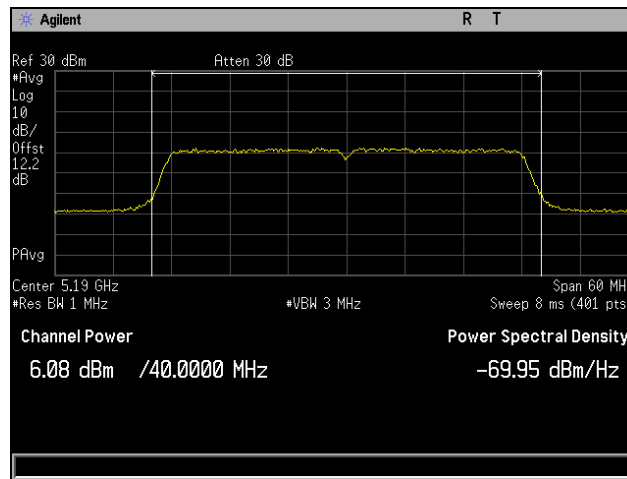


Plot 27. Output Power, 802.11n 40 MHz, Channel 5190 MHz, 4x8 MCS0 CH3

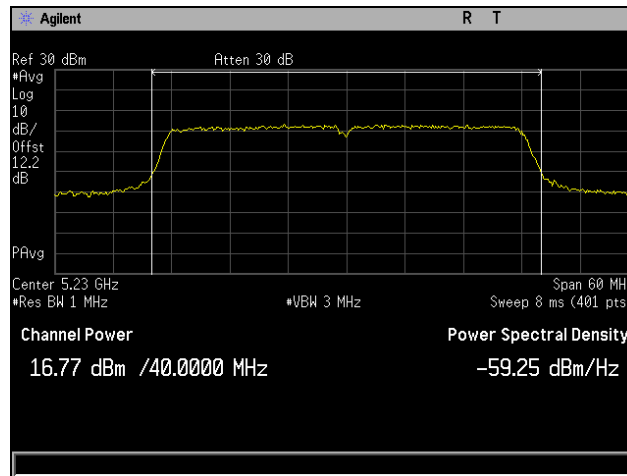


Plot 28. Output Power, 802.11n 40 MHz, Channel 5230 MHz, 4x8 MCS0 CH3


Output Power, 802.11a, 8x8, CH1

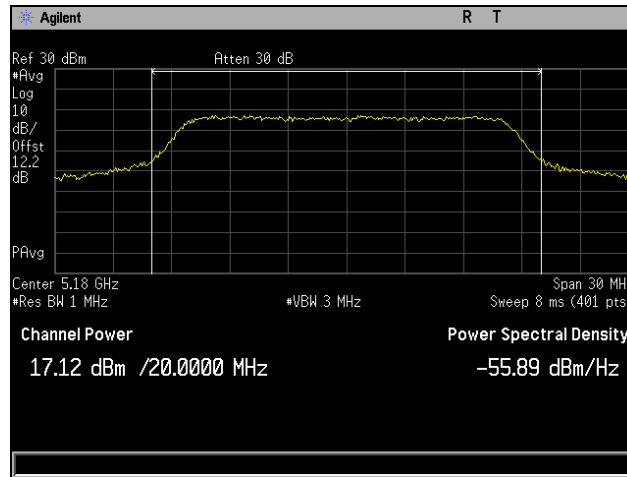

Plot 29. Output Power, 802.11a, Channel 5180 MHz, 8x8 6M CH1

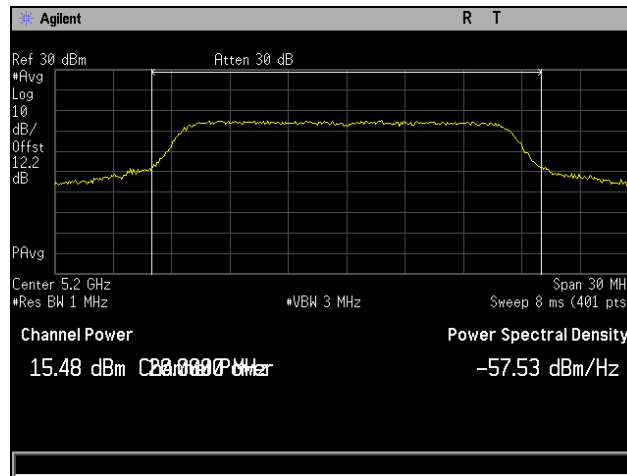


Plot 30. Output Power, 802.11a, Channel 5200 MHz, 8x8 6M CH1

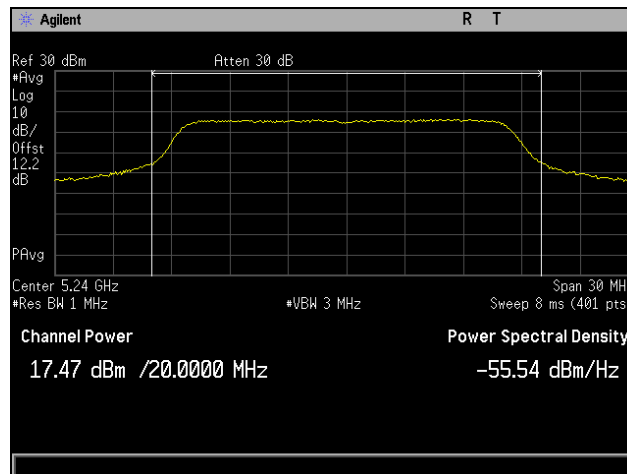


Plot 31. Output Power, 802.11a, Channel 5240 MHz, 8x8 6M CH1


Output Power, 802.11ac 20 MHz, 8x8, CH1

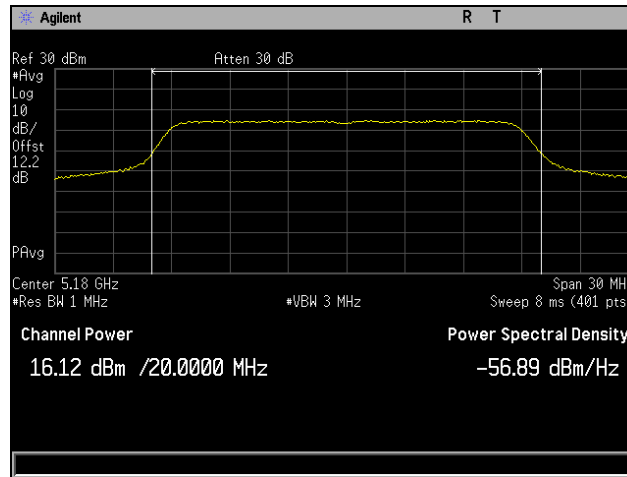

Plot 32. Output Power, 802.11ac 20 MHz, Channel 5180 MHz, 8x8 MCS0 NSS1 CH1

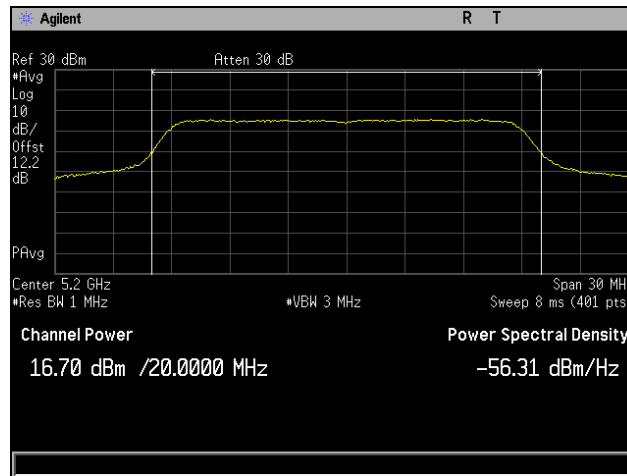


Plot 33. Output Power, 802.11ac 20 MHz, Channel 5200 MHz, 8x8 MCS0 NSS1 CH1

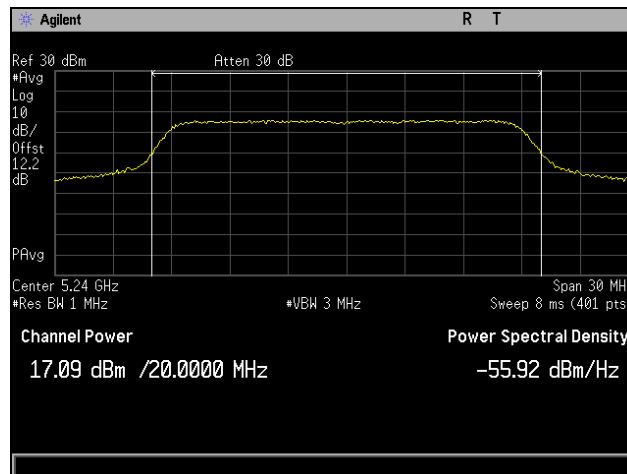


Plot 34. Output Power, 802.11ac 20 MHz, Channel 5240 MHz, 8x8 MCS0 NSS1 CH1

Output Power, 802.11ac 40 MHz, 8x8, CH1

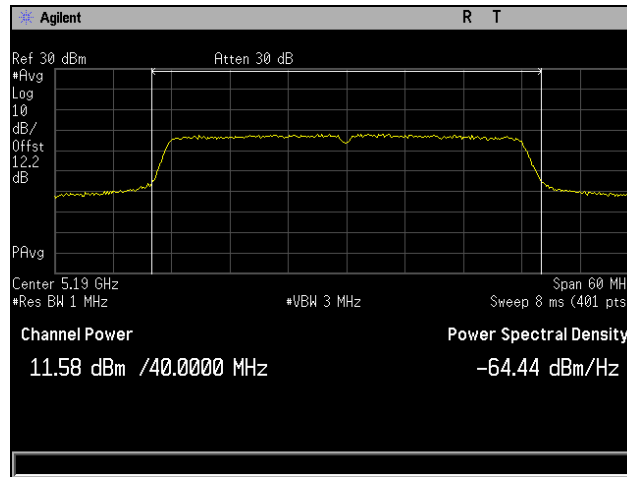


Plot 35. Output Power, 802.11ac 40 MHz, Channel 5190 MHz, 8x8 MCS0 NSS1 CH1

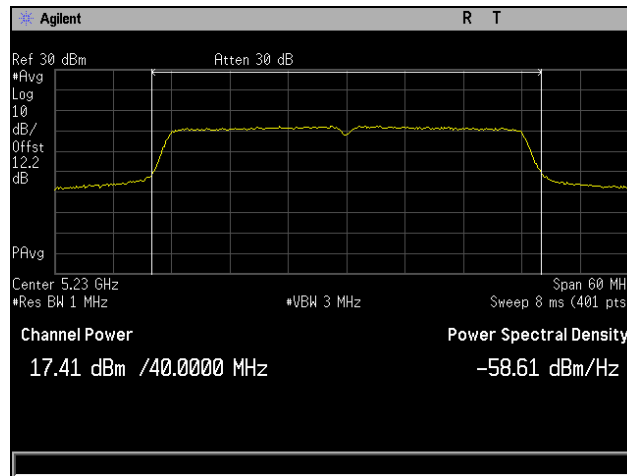


Plot 36. Output Power, 802.11ac 40 MHz, Channel 5230 MHz, 8x8 MCS0 NSS1 CH1

Output Power, 802.11ac 80 MHz, 8x8

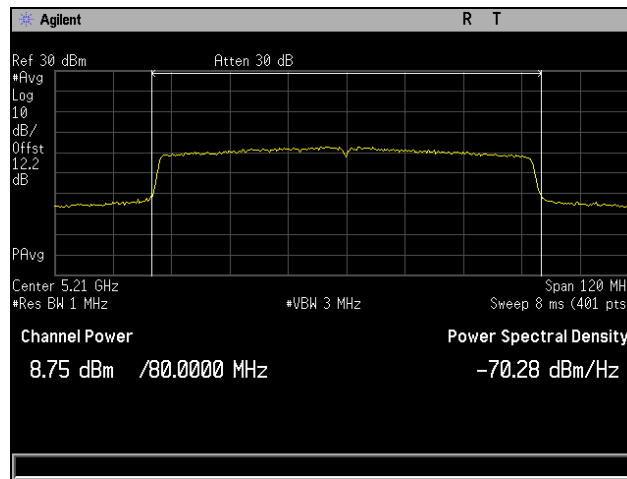


Plot 37. Output Power, 802.11ac 80 MHz, Channel 5210 MHz, 8x8 MCS0 NSS1 CH1


Output Power, 802.11n 20 MHz, 8x8, CH1

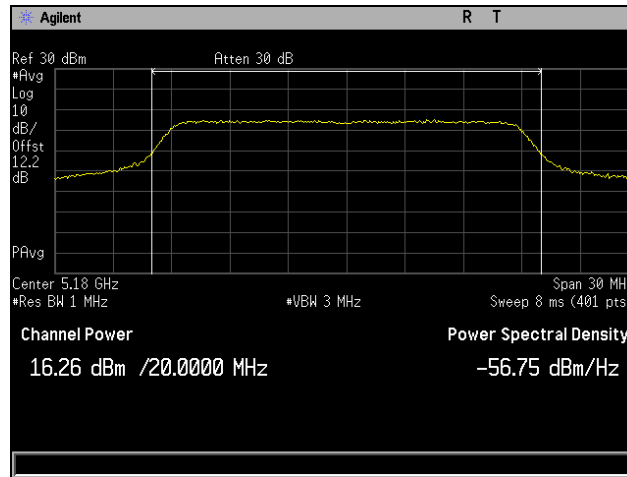

Plot 38. Output Power, 802.11n 20 MHz, Channel 5180 MHz, 8x8 MCS0 CH1

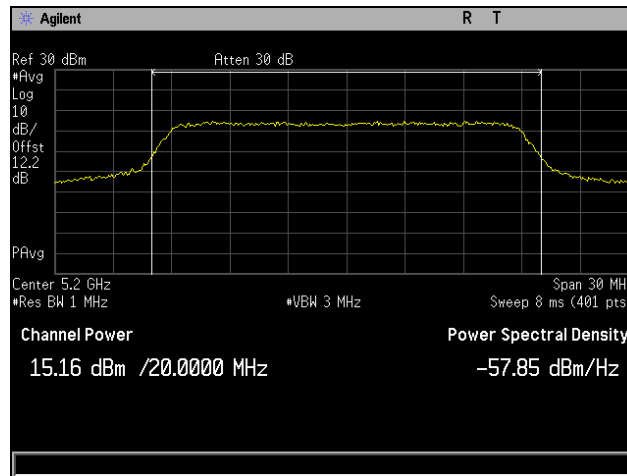


Plot 39. Output Power, 802.11n 20 MHz, Channel 5200 MHz, 8x8 MCS0 CH1

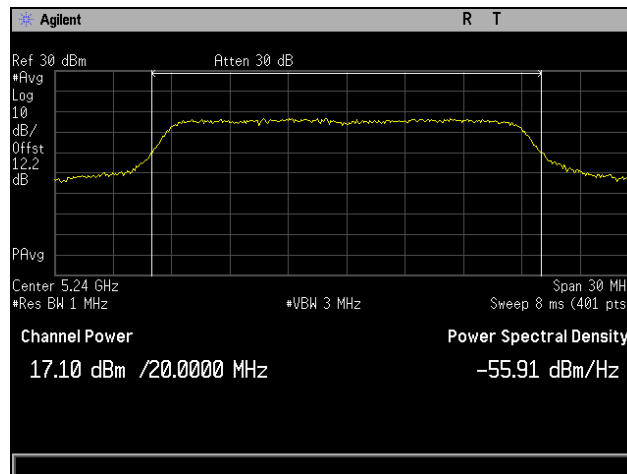


Plot 40. Output Power, 802.11n 20 MHz, Channel 5240 MHz, 8x8 MCS0 CH1

Output Power, 802.11n 40 MHz, 8x8, CH1

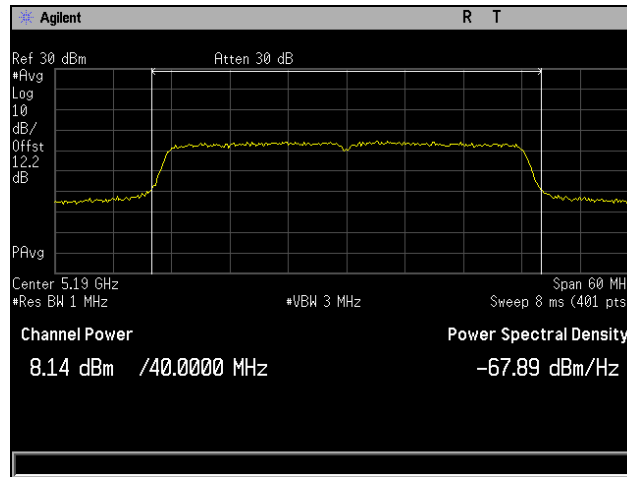

Plot 41. Output Power, 802.11n 40 MHz, Channel 5190 MHz, 8x8 MCS0 CH1

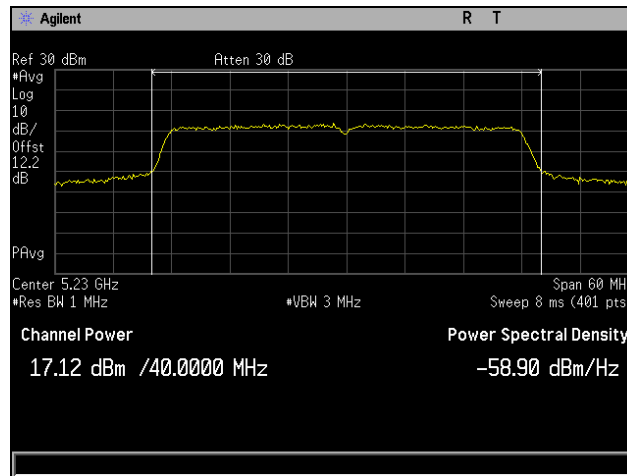

Plot 42. Output Power, 802.11n 40 MHz, Channel 5230 MHz, 8x8 MCS0 CH1

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(a)(1) Maximum Power Spectral Density

Test Requirements: §15.407(a)(1)(i): In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.407(a)(1)(ii): In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi..

§15.407(a)(1)(iii): In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

§15.407(a)(1)(iv): In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Procedure: The EUT was connected to a spectrum analyzer through a cable and attenuator. Measurements were taken with the EUT set to transmit continuously on its low, mid, and high channels. Its power was measured according KDB 789033 D02 General UNII Test Procedures v01.

Test Results: The EUT as tested is compliant with the requirements of this section.

Test Engineer(s): Hadid Jones

Test Date(s): 11/03/16




4x8 MIMO PSD									
Center Frequency	Port 3 (dBm)	Port 4 (dBm)	Port 5 (dBm)	Port 6 (dBm)	Σ PSD (dBm)	Limit (dBm)	Gain (dBi)	Final limit (dBm)	Margin dB
BW 20M_Ch 5180M_4x8 A 6M	5.587	8.569	5.217	3.731	12.18	17	6.1	16.9	-4.72
BW 20M_Ch 5180M_4x8 AC NSS1 MCS0	5.883	8.944	3.927	-0.238	11.8	17	6.1	16.9	-5.1
BW 20M_Ch 5180M_4x8 N MSC0	2.674	6.633	3.726	-0.971	9.83	17	6.1	16.9	-7.07
BW 20M_Ch 5200M_4x8 A 6M	4.84	9.071	4.634	2.625	12.01	17	6.1	16.9	-4.89
BW 20M_Ch 5200M_4x8 AC NSS1 MCS0	5.422	9.544	3.839	4.246	12.45	17	6.1	16.9	-4.45
BW 20M_Ch 5200M_4x8 N MSC0	4.095	6.348	3.371	-1.653	9.89	17	6.1	16.9	-7.01
BW 20M_Ch 5240M_4x8 A 6M	4.635	8.773	7.042	5.904	12.88	17	6.1	16.9	-4.02
BW 20M_Ch 5240M_4x8 AC NSS1 MCS0	5.428	9.043	7.984	6.675	13.52	17	6.1	16.9	-3.38
BW 20M_Ch 5240M_4x8 N MSC0	5.241	8.592	9.156	5.403	13.48	17	6.1	16.9	-3.42
BW 40M_Ch 5190M_4x8 AC NSS1 MCS0	-4.172	-2.072	-1.964	-6.28	2.73	17	6.1	16.9	-14.17
BW 40M_Ch 5190M_4x8 N MSC0	-9.672	-4.056	-1.581	-7.121	1.43	17	6.1	16.9	-15.47
BW 40M_Ch 5230M_4x8 AC NSS1 MCS0	3	5.976	8.041	4.919	11.89	17	6.1	16.9	-5.01
BW 40M_Ch 5230M_4x8 N MSC0	2.767	4.701	6.579	2.032	10.41	17	6.1	16.9	-6.49
BW 80M_Ch 5210M_4x8 AC NSS1 MCS0	-8.629	-3.741	-5.634	-8.88	-0.16	17	6.1	16.9	-17.06

Table 10. Power Spectral Density, Test Results, 4x8


8x8 MIMO PSD													
Mode	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Port 5 (dBm)	Port 6 (dBm)	Port 7 (dBm)	Port 8 (dBm)	Σ PSD (dBm)	Limit (dBm)	Antenna Gain	Final limit	Margin dB
BW 20M_Ch 5180M_8x8 A 6M	5.635	3.5	2.425	6.036	2.926	-0.664	-1.631	0.065	12.1	17	8.5	14.5	-2.4
BW 20M_Ch 5180M_8x8 AC NSS1 MSC0	5.004	4.959	2.302	5.122	4.851	0.776	2.423	1.558	12.72	17	8.5	14.5	-1.78
BW 20M_Ch 5180M_8x8 N MSC0	5.212	3.572	2.542	6.499	3.917	-1.07	0.656	0.709	12.42	17	8.5	14.5	-2.08
BW 20M_Ch 5200M_8x8 A 6M	4.278	1.854	2.175	6.206	3.317	-1.567	-0.534	0.476	11.73	17	8.5	14.5	-2.77
BW 20M_Ch 5200M_8x8 AC NSS1 MSC0	5.125	4.684	2.594	5.039	4.699	0.395	2.212	1.597	12.64	17	8.5	14.5	-1.86
BW 20M_Ch 5200M_8x8 N MSC0	0.709	1.863	2.437	6.115	3.75	-0.685	-0.058	0.259	11.41	17	8.5	14.5	-3.09
BW 20M_Ch 5240M_8x8 A 6M	6.655	6.106	3.905	5.985	6.791	2.403	3.364	3.754	14.19	17	8.5	14.5	-0.31
BW 20M_Ch 5240M_8x8 AC NSS1 MSC0	5.533	6.152	3.598	4.523	6.166	2.367	2.804	3.904	13.63	17	8.5	14.5	-0.87
BW 20M_Ch 5240M_8x8 N MSC0	6.19	6.49	4.019	6.318	4.174	-0.001	0.312	1.645	13.34	17	8.5	14.5	-1.16
BW 40M_Ch 5190M_8x8 AC NSS1 MSC0	-3.514	-3.257	-6.616	-3.041	-0.676	-5.532	-4.518	-4.69	5.4	17	8.5	14.5	-9.1
BW 40M_Ch 5190M_8x8 N MSC0	-6.681	-5.941	-8.681	-5.738	-4.045	-7.47	-5.584	-5.041	3.09	17	8.5	14.5	-11.41
BW 40M_Ch 5230M_8x8 AC NSS1 MSC0	3.263	2.011	1.164	2.407	4.265	-0.729	1.353	1.348	11.14	17	8.5	14.5	-3.36
BW 40M_Ch 5230M_8x8 N MSC0	1.87	2.648	0.706	4.875	3.69	0.458	1.511	1.696	11.46	17	8.5	14.5	-3.04
BW 80M_Ch 5210M_8x8 AC NSS1 MSC0	-7.552	-7.801	-11.71	-7.137	-6.345	-10.18	-9.721	-7.483	0.85	17	8.5	14.5	-13.65

Table 11. Power Spectral Density, Test Results, 8x8


Power Spectral Density, 802.11a, 4x8, CH3

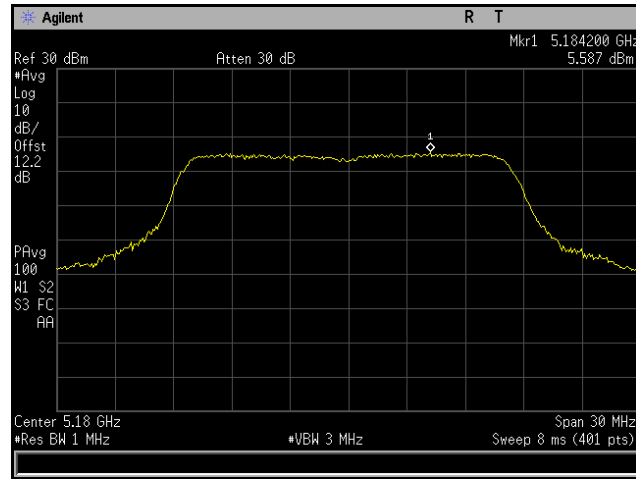

Plot 43. Power Spectral Density, 802.11a, Channel 5180 MHz, 4x8 6M CH3

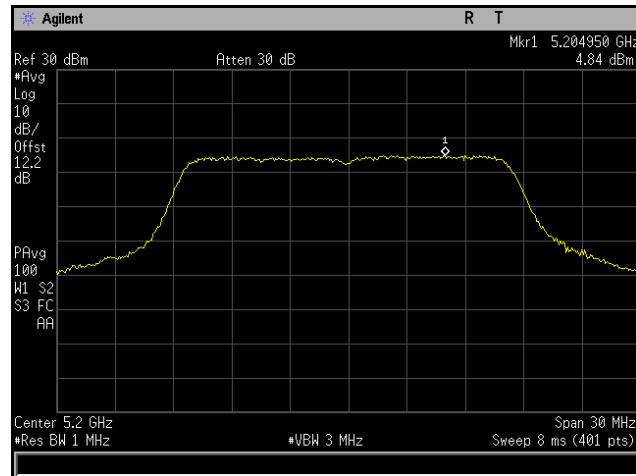


Plot 44. Power Spectral Density, 802.11a, Channel 5200 MHz, 4x8 6M CH3

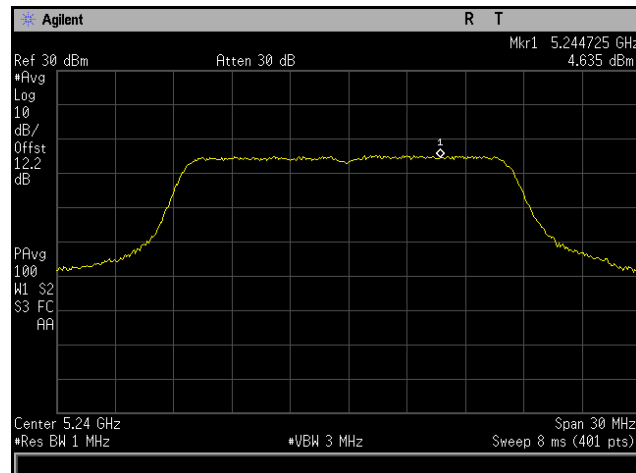


Plot 45. Power Spectral Density, 802.11a, Channel 5240 MHz, 4x8 6M CH3


Power Spectral Density, 802.11ac 20 MHz, 4x8, CH3

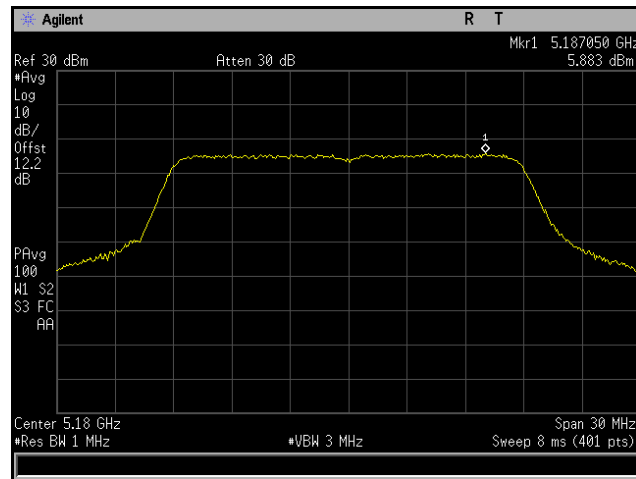

Plot 46. Power Spectral Density, 802.11ac 20 MHz, Channel 5180 MHz, 4x8 MCS0 CH3

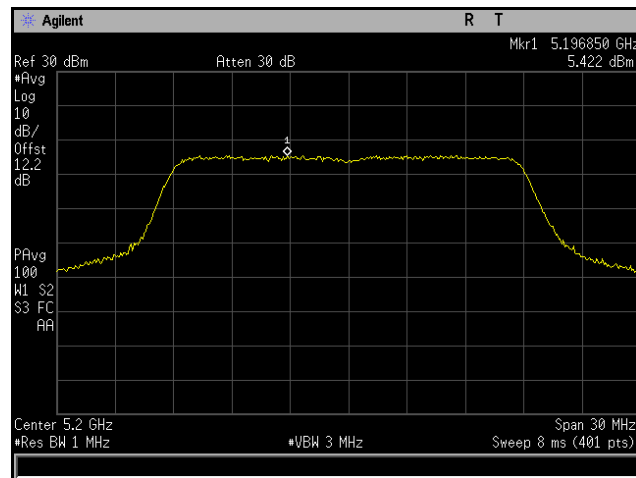


Plot 47. Power Spectral Density, 802.11ac 20 MHz, Channel 5200 MHz, 4x8 MCS0 CH3

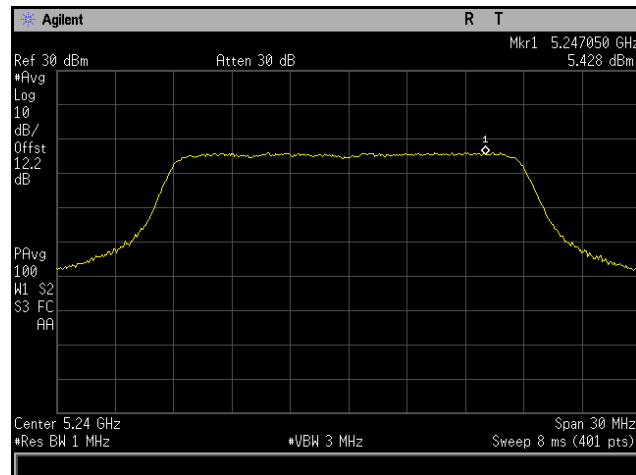


Plot 48. Power Spectral Density, 802.11ac 20 MHz, Channel 5240 MHz, 4x8 MCS0 CH3

Power Spectral Density, 802.11ac 40 MHz, 4x8, CH3

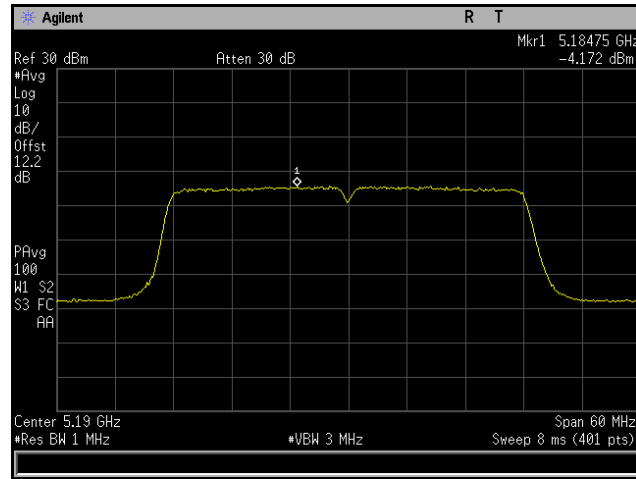


Plot 49. Power Spectral Density, 802.11ac 40 MHz, Channel 5190 MHz, 4x8 MCS0 CH3

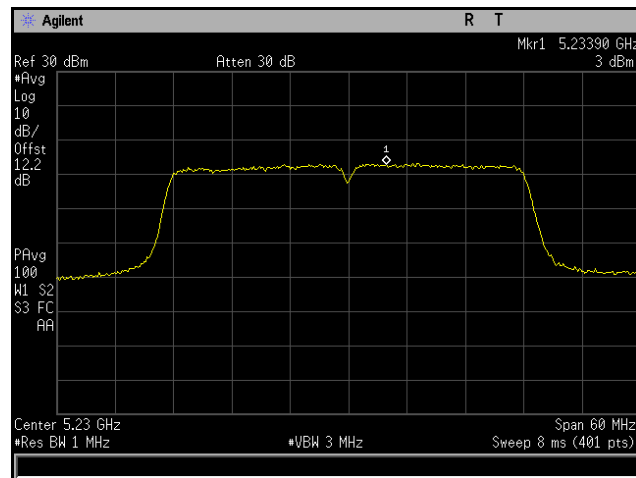


Plot 50. Power Spectral Density, 802.11ac 40 MHz, Channel 5230 MHz, 4x8 MCS0 CH3

Power Spectral Density, 802.11ac 80 MHz, 4x8

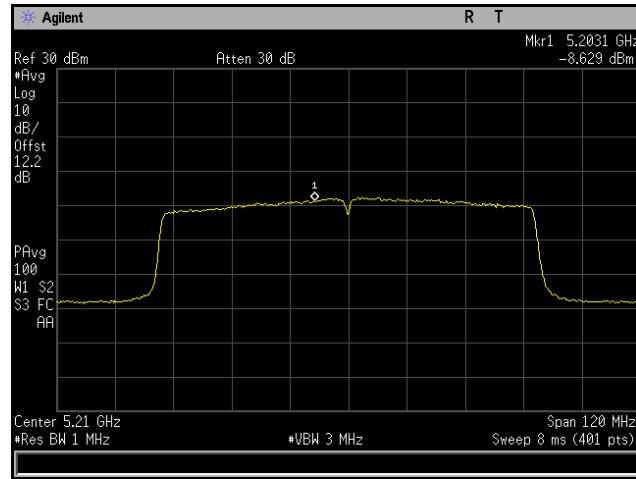


Plot 51. Power Spectral Density, 802.11ac 80 MHz, Channel 5210 MHz, 4x8 MCS0 CH3


Power Spectral Density, 802.11n 20 MHz, 4x8, CH3

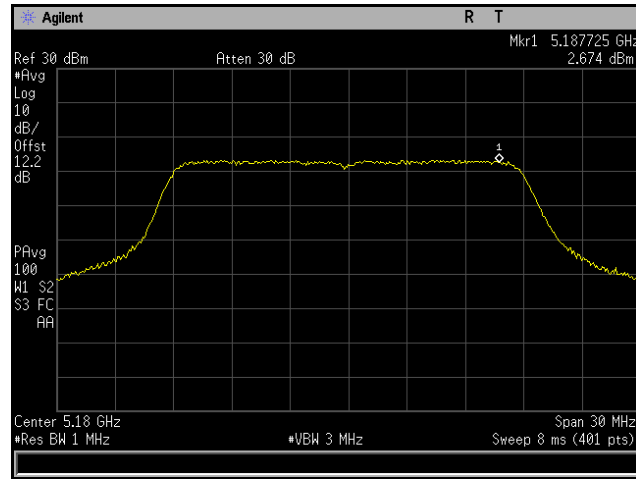

Plot 52. Power Spectral Density, 802.11n 20 MHz, Channel 5180 MHz, 4x8 MCS0 CH3

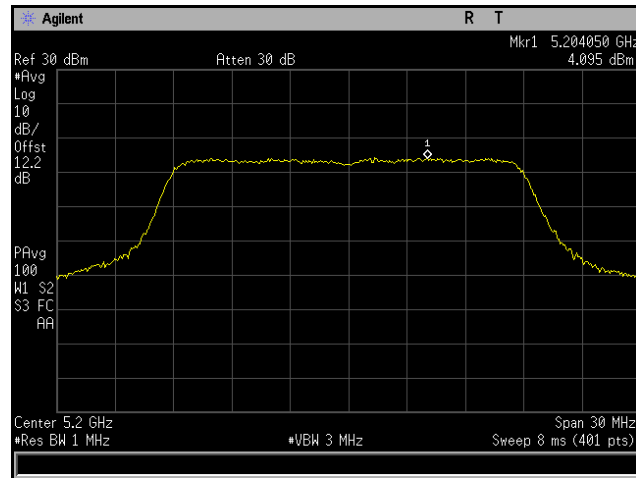


Plot 53. Power Spectral Density, 802.11n 20 MHz, Channel 5200 MHz, 4x8 MCS0 CH3

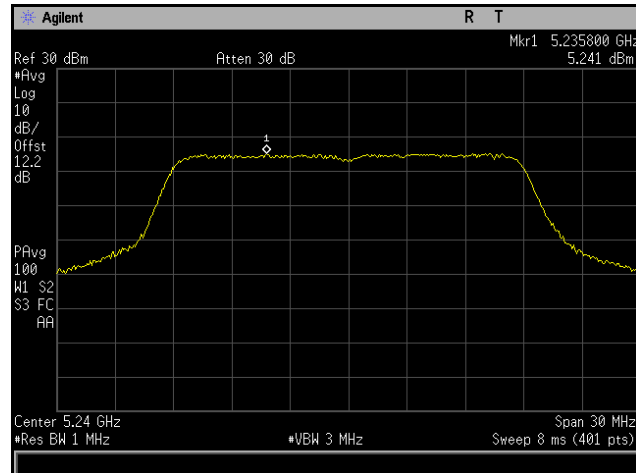


Plot 54. Power Spectral Density, 802.11n 20 MHz, Channel 5240 MHz, 4x8 MCS0 CH3

Power Spectral Density, 802.11n 40 MHz, 4x8, CH3

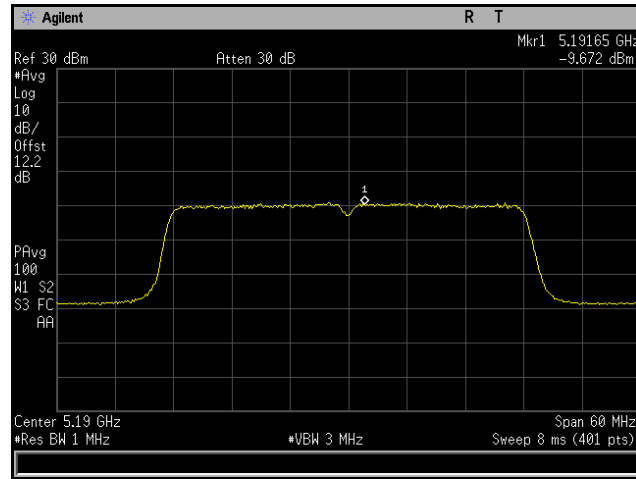


Plot 55. Power Spectral Density, 802.11n 40 MHz, Channel 5190 MHz, 4x8 MCS0 CH3

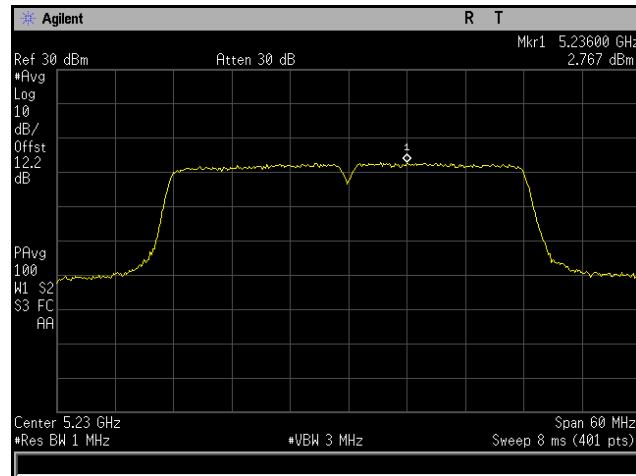


Plot 56. Power Spectral Density, 802.11n 40 MHz, Channel 5230 MHz, 4x8 MCS0 CH3


Power Spectral Density, 802.11a, 8x8, CH1

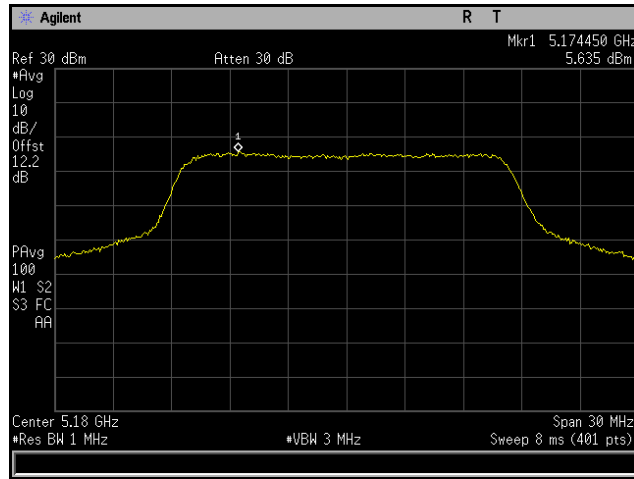

Plot 57. Power Spectral Density, 802.11a, Channel 5180 MHz, 8x8 6M CH1

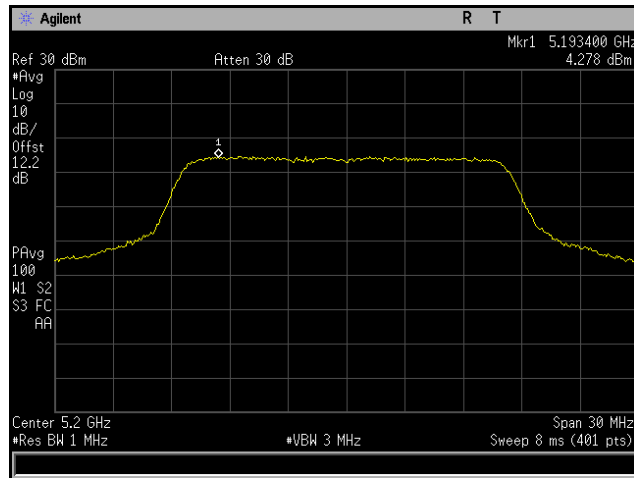


Plot 58. Power Spectral Density, 802.11a, Channel 5200 MHz, 8x8 MCS0 NSS1 CH1

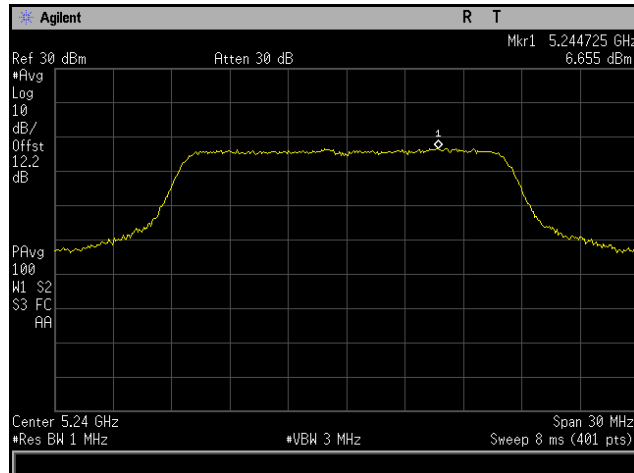


Plot 59. Power Spectral Density, 802.11a, Channel 5240 MHz, 8x8 MCS0 NSS1 CH1


Power Spectral Density, 802.11ac 20 MHz, 8x8, CH1

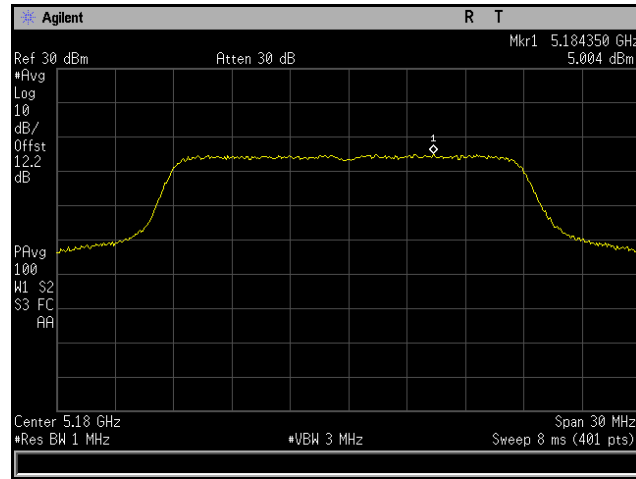

Plot 60. Power Spectral Density, 802.11ac 20 MHz, Channel 5180 MHz, 8x8 MCS0 NSS1 CH1

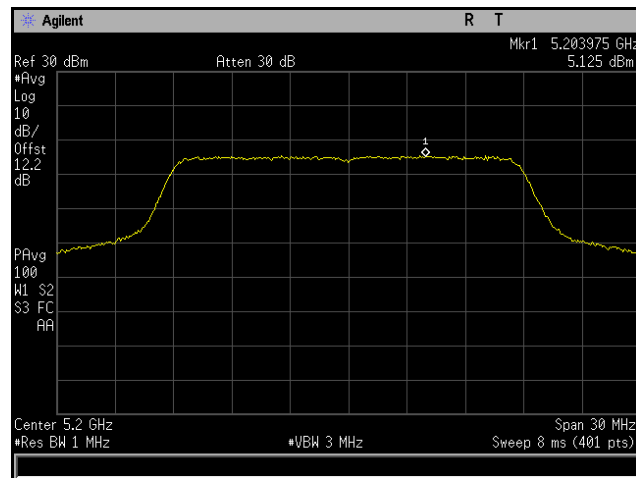


Plot 61. Power Spectral Density, 802.11ac 20 MHz, Channel 5200 MHz, 8x8 MCS0 NSS1 CH1

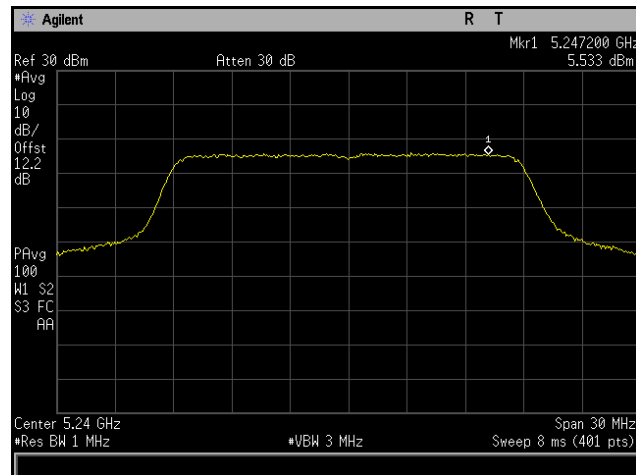


Plot 62. Power Spectral Density, 802.11ac 20 MHz, Channel 5240 MHz, 8x8 MCS0 NSS1 CH1

Power Spectral Density, 802.11ac 40 MHz, 8x8, CH1

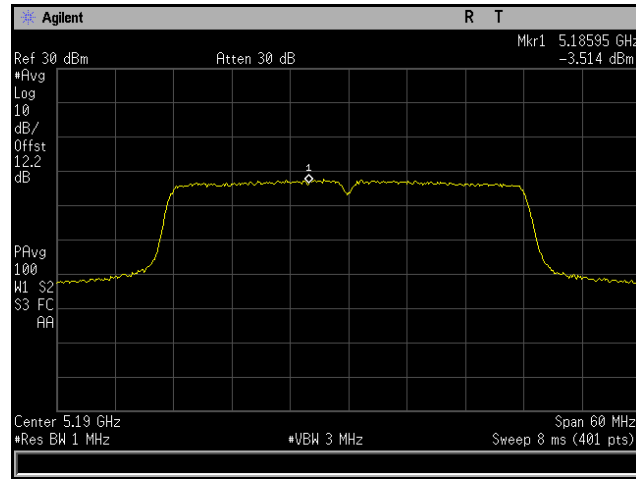


Plot 63. Power Spectral Density, 802.11ac 40 MHz, Channel 5190 MHz, 8x8 MCS0 NSS1 CH1

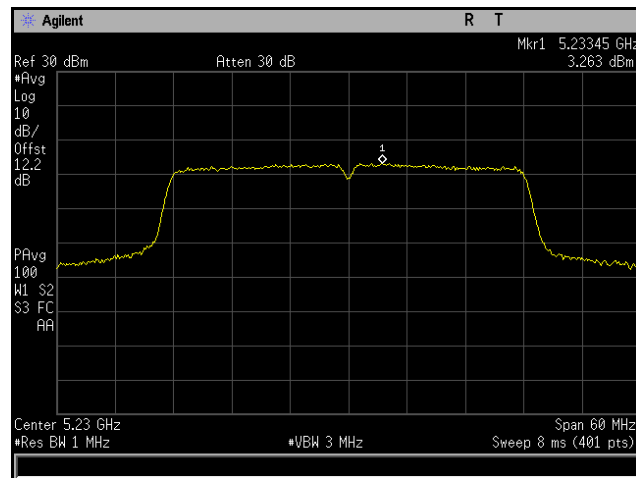


Plot 64. Power Spectral Density, 802.11ac 40 MHz, Channel 5230 MHz, 8x8 MCS0 NSS1 CH1

Power Spectral Density, 802.11ac 80 MHz, 8x8

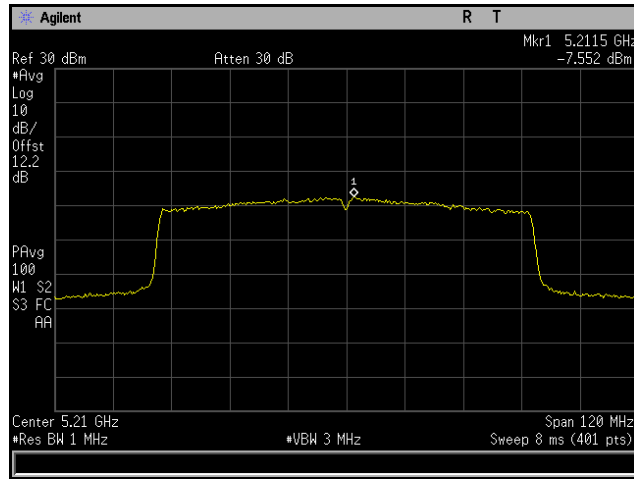


Plot 65. Power Spectral Density, 802.11ac 80 MHz, Channel 5210 MHz, 8x8 MCS0 NSS1 CH1


Power Spectral Density, 802.11n 20 MHz, 8x8, CH1

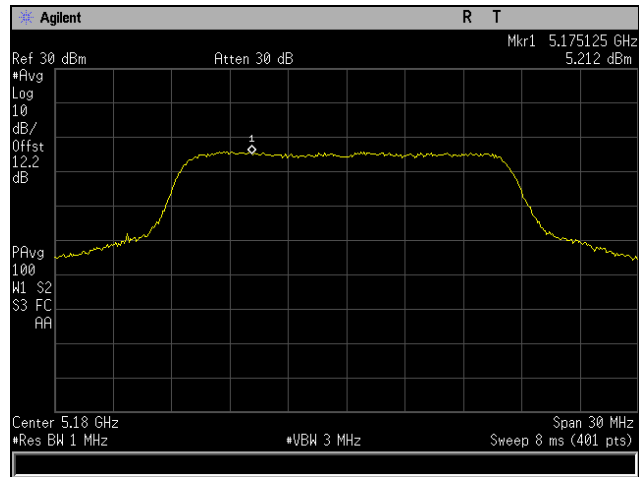

Plot 66. Power Spectral Density, 802.11n 20 MHz, Channel 5180 MHz, 8x8 MCS0 NSS1 CH1

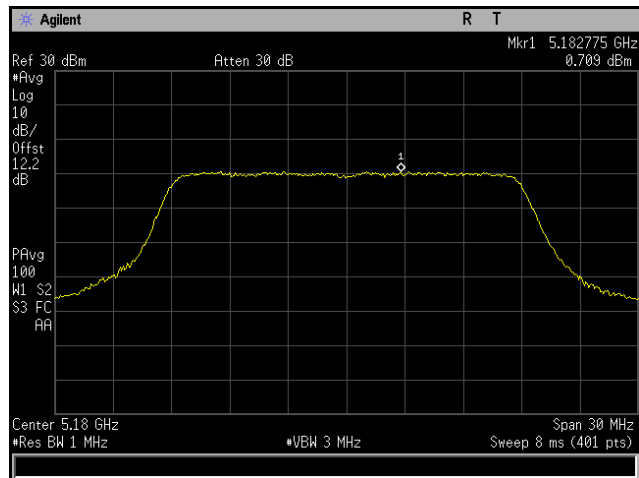


Plot 67. Power Spectral Density, 802.11n 20 MHz, Channel 5200 MHz, 8x8 MCS0 NSS1 CH1

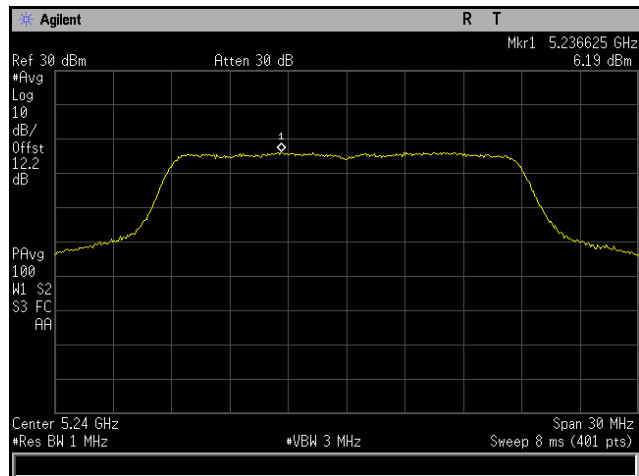


Plot 68. Power Spectral Density, 802.11n 20 MHz, Channel 5240 MHz, 8x8 MCS0 NSS1 CH1

Power Spectral Density, 802.11n 40 MHz, 8x8, CH1

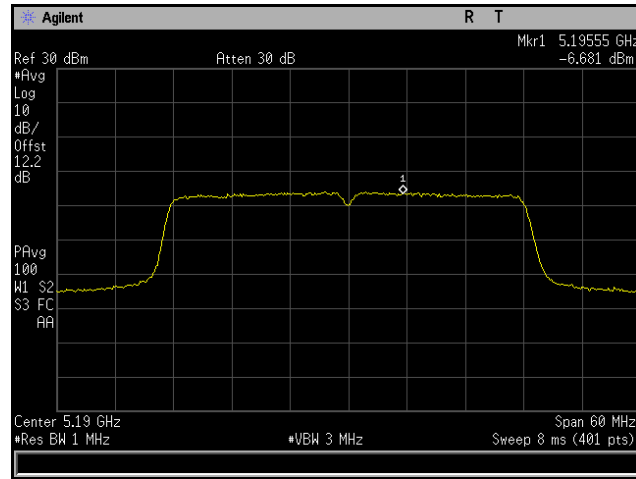

Plot 69. Power Spectral Density, 802.11n 40 MHz, Channel 5190 MHz, 8x8 MCS0 NSS1 CH1

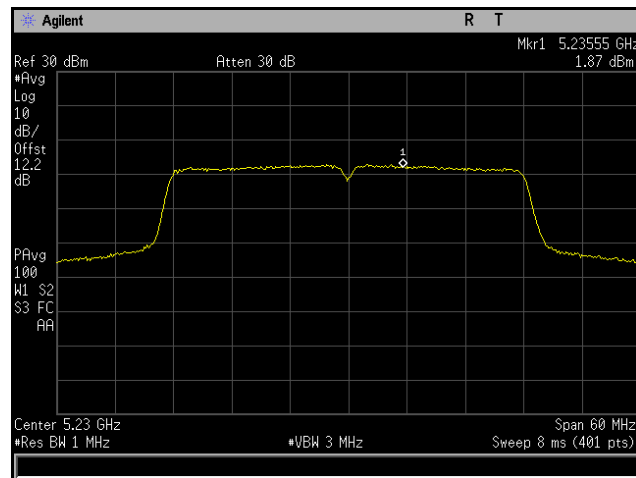

Plot 70. Power Spectral Density, 802.11n 40 MHz, Channel 5230 MHz, 8x8 MCS0 NSS1 CH1

Electromagnetic Compatibility Criteria for Intentional Radiators

§15.407(b)(1) & (6 – 7) Undesirable Emissions

Test Requirements: § 15.407(b)(1): For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

§ 15.407(b)(6): Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.

§ 15.407(b)(7): The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Test Procedure: The EUT was placed on a non-conducting stand on a turntable in a chamber. To find the maximum emission the EUT was set to transmit on low, mid, and high channels. Additionally, the turntable was rotated 360 degrees, the EUT was oriented through its three orthogonal axes, and the receive antenna height was varied in order to maximize emissions.

For frequencies from 30 MHz to 1 GHz, measurements were first made using a peak detector with a 100 kHz resolution bandwidth. Emissions which exceeded the limits were re-measured using a quasi-peak detector with a 120 kHz resolution bandwidth.

Above 1 GHz, measurements were made pursuant the method described in FCC KDB 789033 D02 General UNII Test Procedure New Rules v01. The equation, $EIRP = E + 20 \log D - 104.8$ was used to convert field strength to EIRP (E = field strength (dB μ V/m) and D = Reference measurement distance).

For emissions above 1 GHz and in restricted bands, measurements of the field strength were made with a peak detector and an average detector and compared with the limits of 15.209.

As an alternative, according to FCC KDB 789033 D02 General UNII Test Procedure New Rules v01, all emissions above 1 GHz that comply with the peak and average limits of 15.209 satisfy the requirements of unwanted emissions in 15.407.

Test Results: For below 1 GHz, the EUT was compliant with the requirements of this section.

Note: the emissions presented are digital emissions, that are present in the absence of transmission.

For above 1 GHz, the EUT was compliant with the requirements of this section.


Note: from 7-18GHz the worse-case is reported.

Note: only the noise floor was observed above 18GHz.


Note; all y-axis units are dB μ V/m

Test Engineer(s): Hadid Jones

Test Date(s): 11/03/16

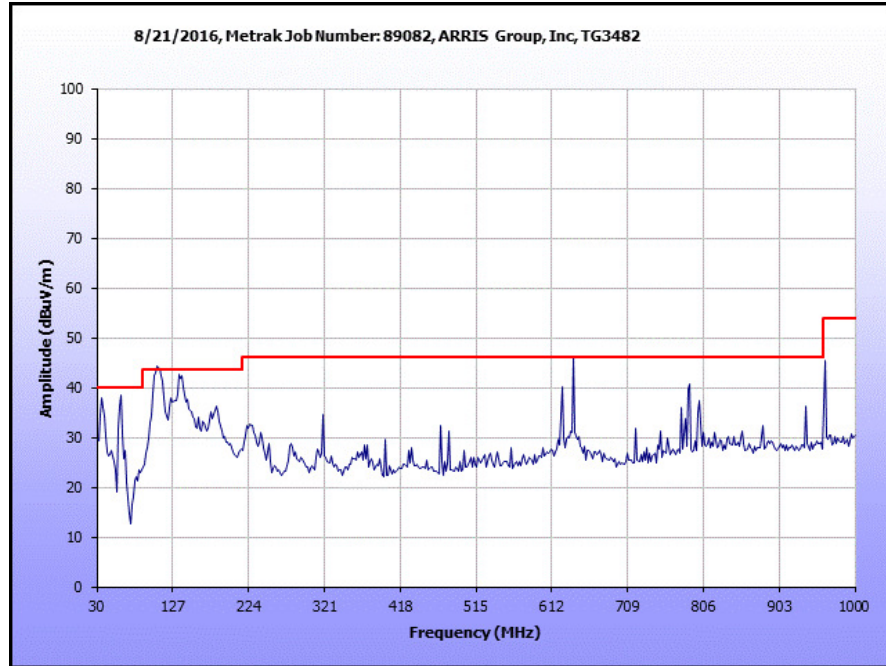


Plot 71. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio Off

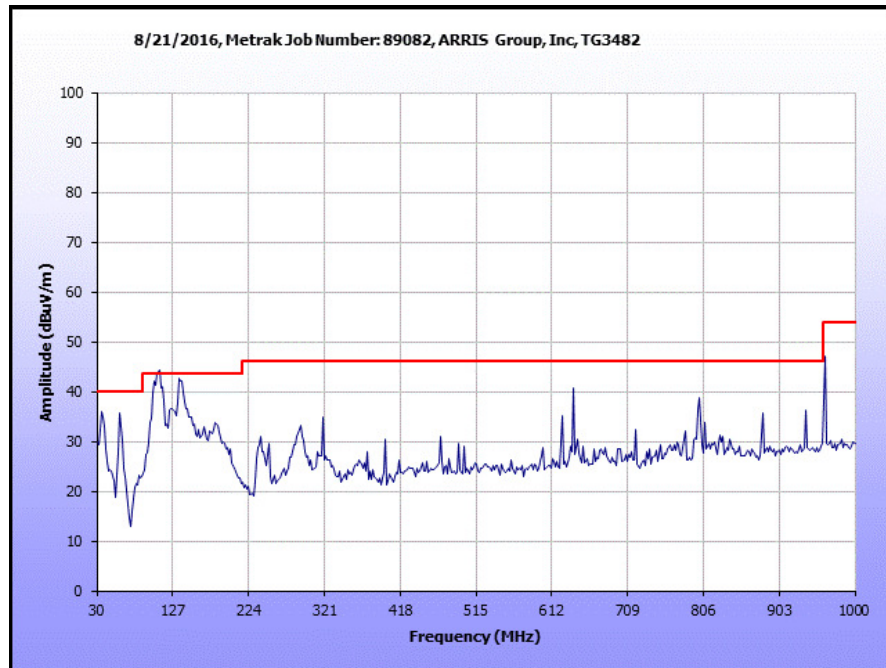


Plot 72. Radiated Spurious Emissions, 30 MHz – 1 GHz, Radio On


Radiated Spurious Emissions, 802.11a, 4x8

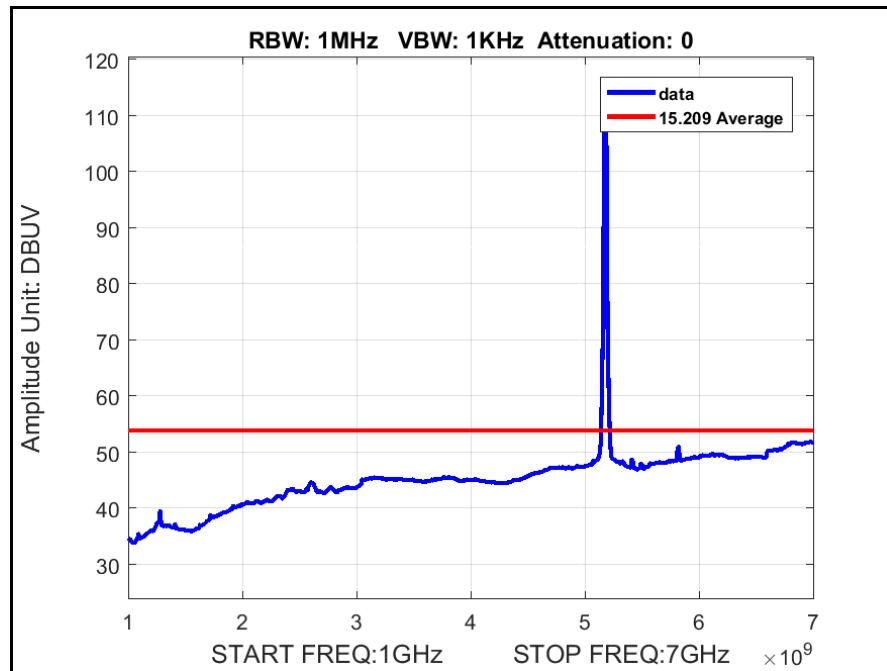


Plot 73. Radiated Spurious Emissions, 802.11a, 5180 MHz, 4x8, 6M, 1 GHz – 7 GHz, Average

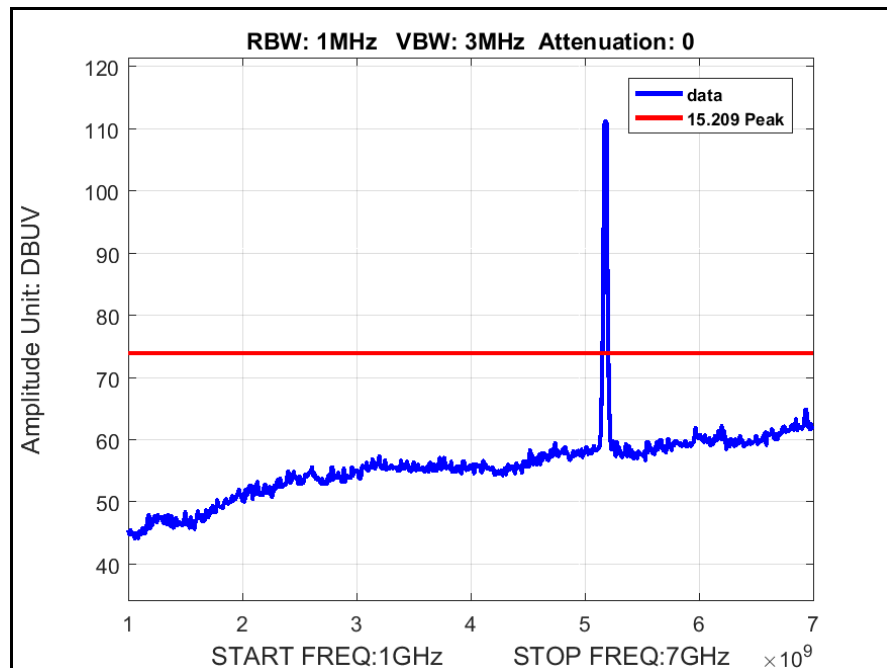

Plot 74. Radiated Spurious Emissions, 802.11a, 5180 MHz, 4x8, 6M, 1 GHz – 7 GHz, Peak

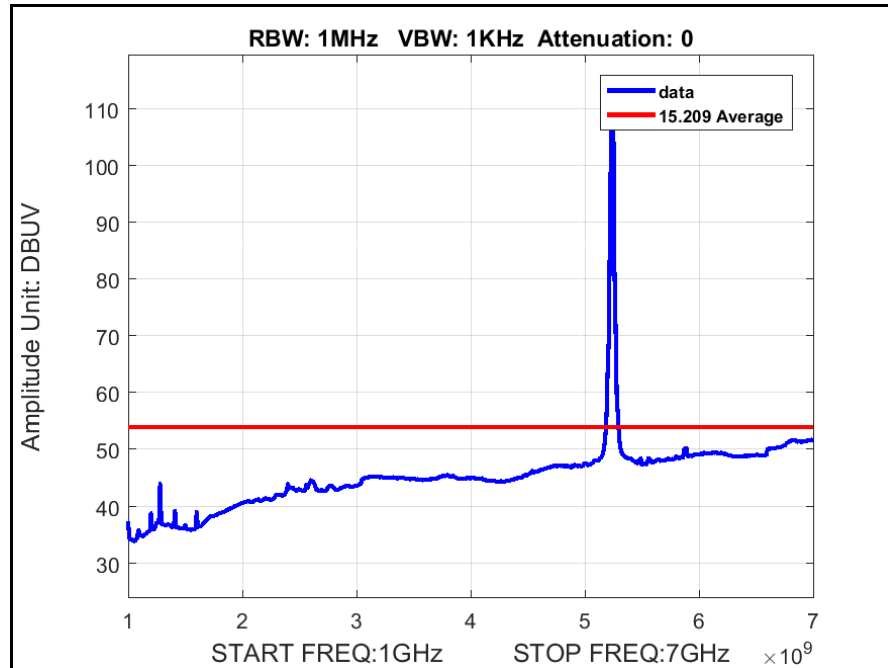


Plot 75. Radiated Spurious Emissions, 802.11a, 5240 MHz, 4x8, 6M, 1 GHz – 7 GHz, Average

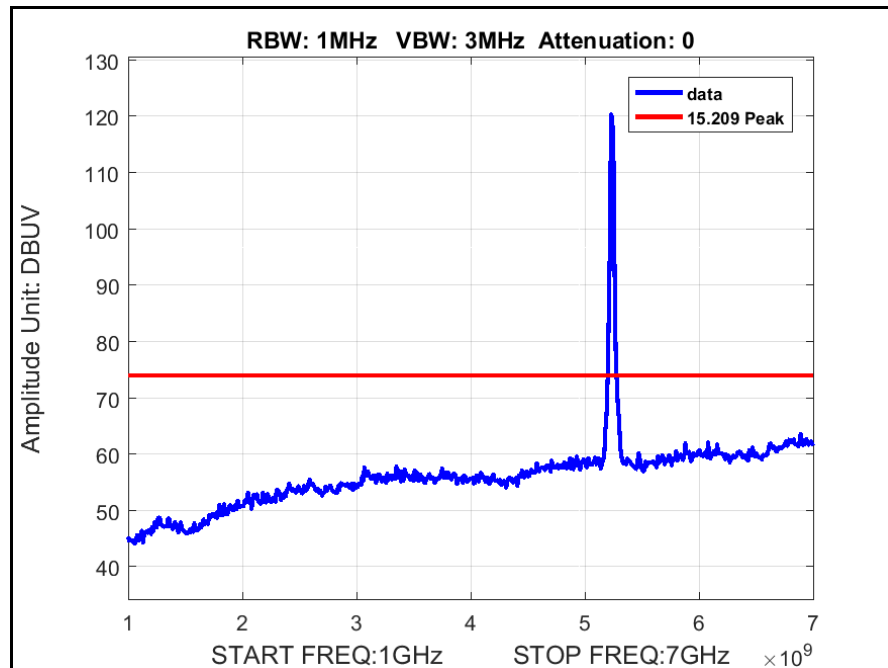


Plot 76. Radiated Spurious Emissions, 802.11a, 5240 MHz, 4x8, 6M, 1 GHz – 7 GHz, Peak


Radiated Spurious Emissions, 802.11ac 20 MHz, 4x8

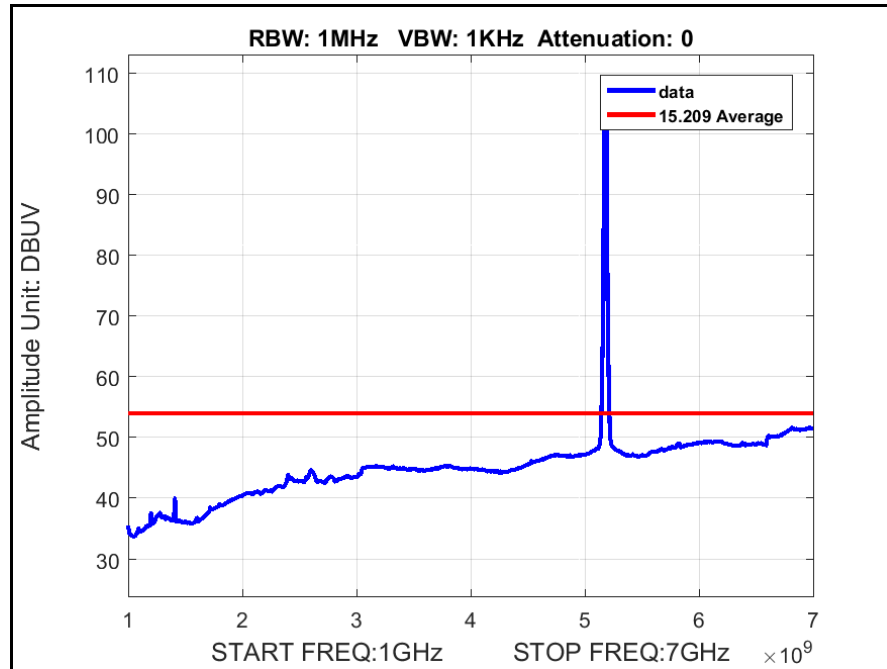


Plot 77. Radiated Spurious Emissions, 802.11ac 20 MHz, 5180 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

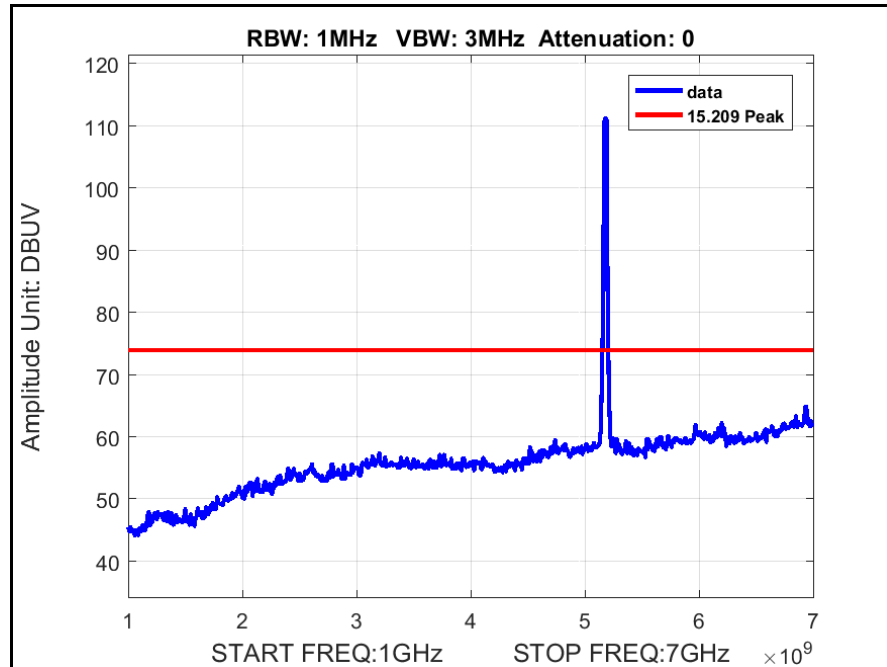

Plot 78. Radiated Spurious Emissions, 802.11ac 20 MHz, 5180 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak

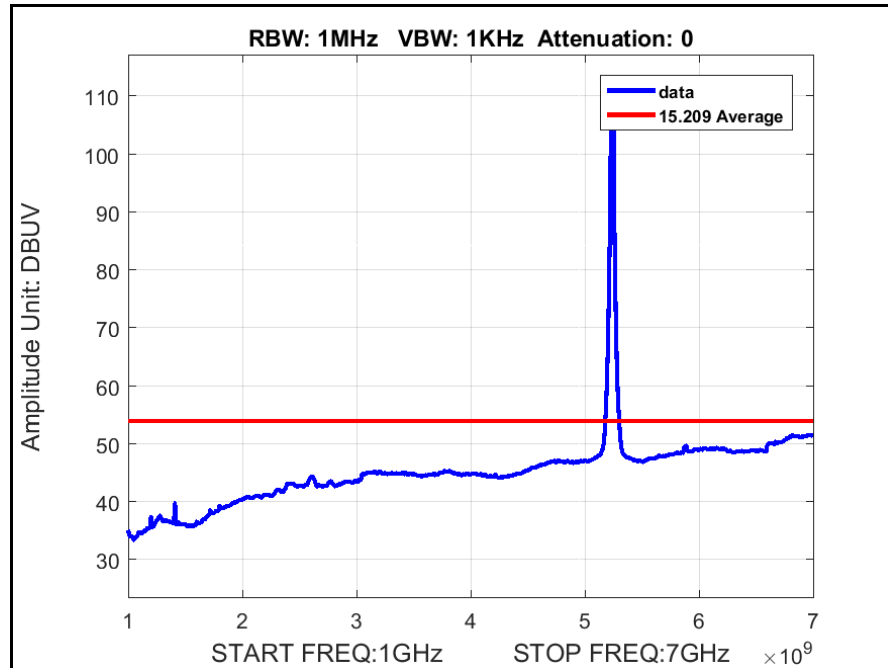


Plot 79. Radiated Spurious Emissions, 802.11ac 20 MHz, 5240 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

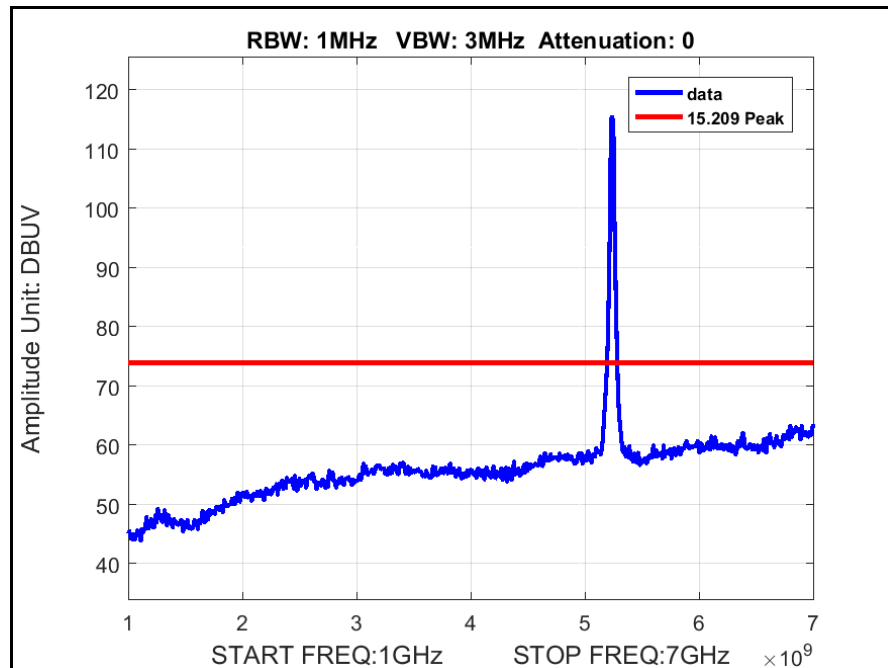


Plot 80. Radiated Spurious Emissions, 802.11ac 20 MHz, 5240 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak


Radiated Spurious Emissions, 802.11ac 40 MHz, 4x8

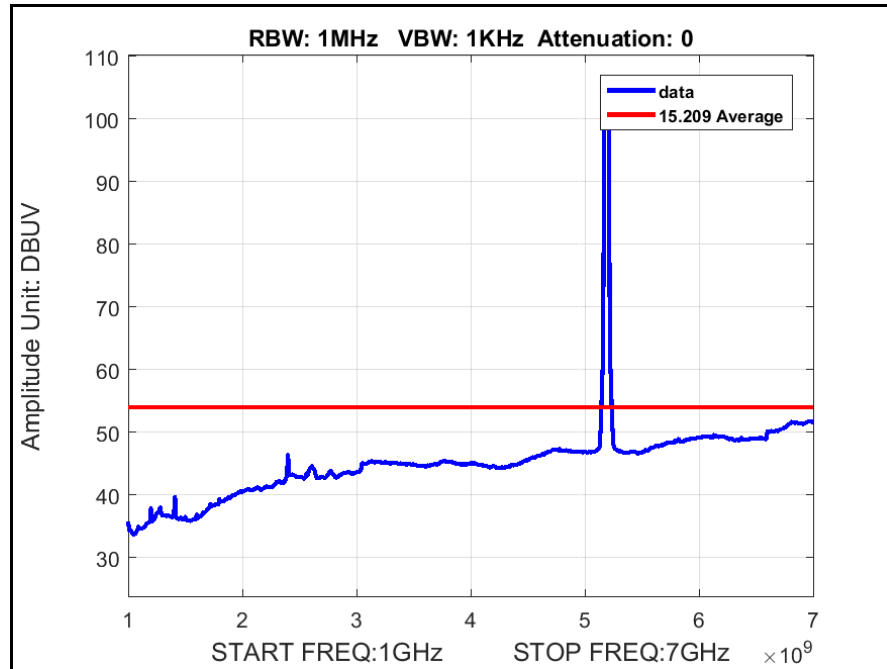


Plot 81. Radiated Spurious Emissions, 802.11ac 40 MHz, 5190 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

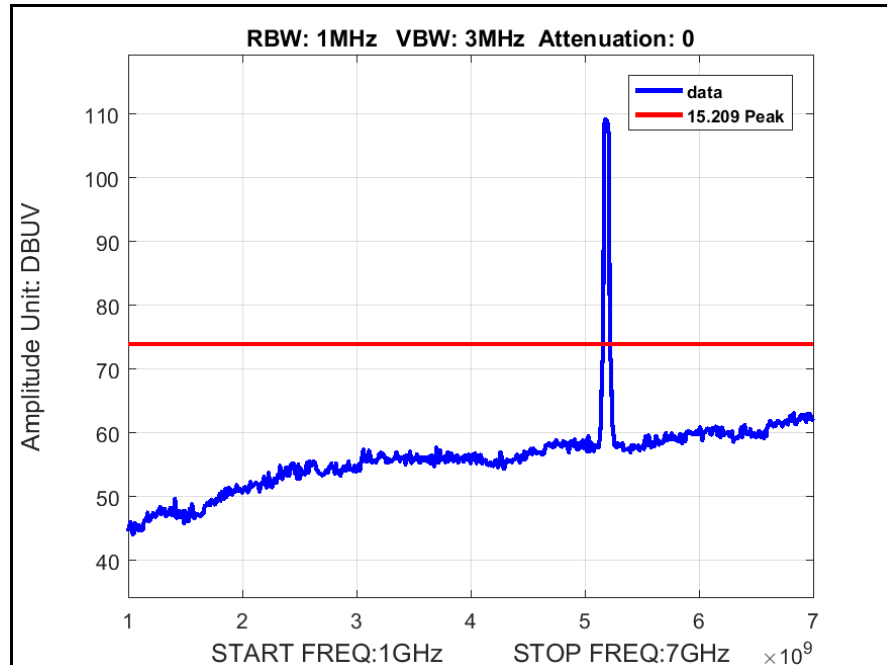

Plot 82. Radiated Spurious Emissions, 802.11ac 40 MHz, 5190 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak

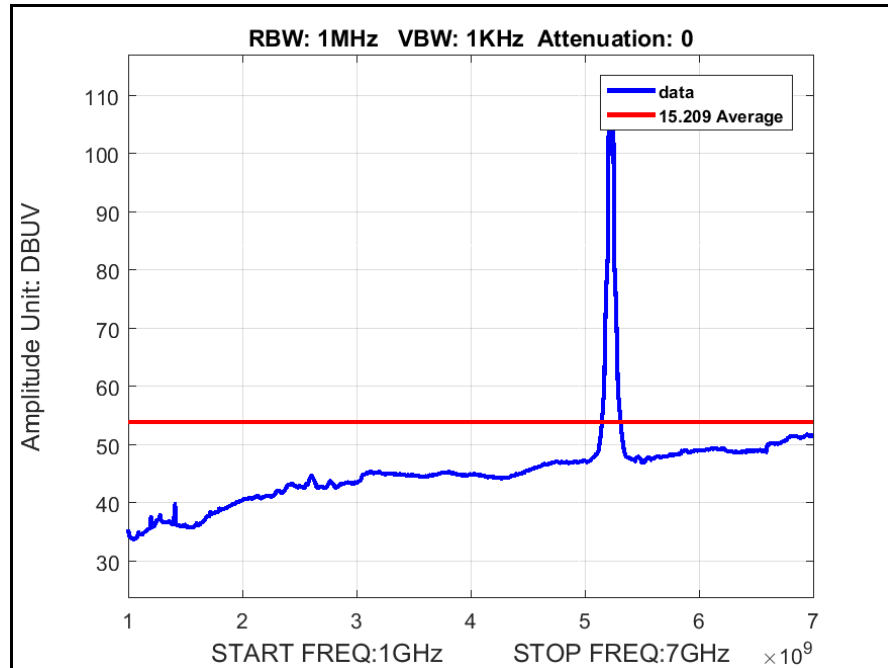


Plot 83. Radiated Spurious Emissions, 802.11ac 40 MHz, 5230 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

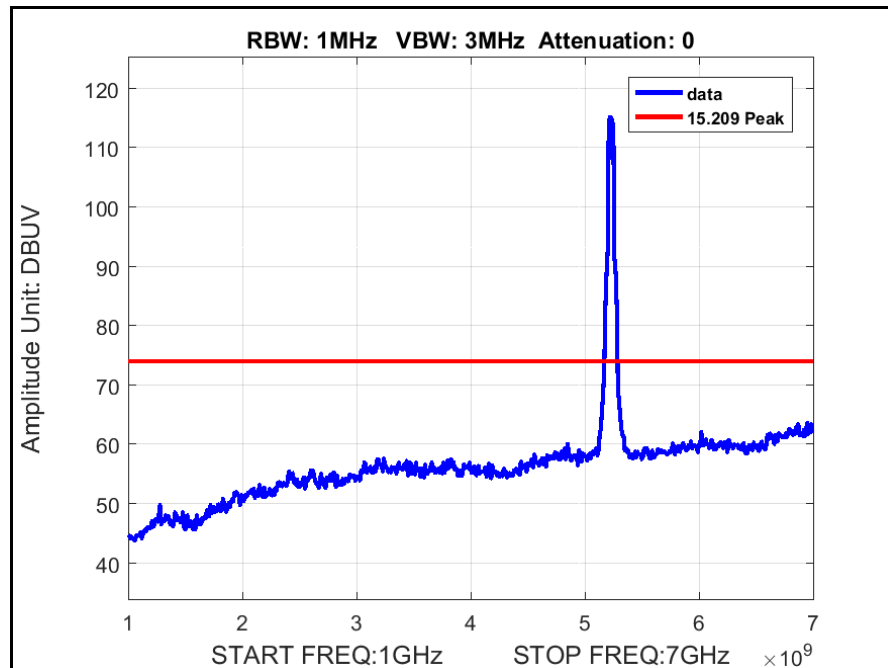


Plot 84. Radiated Spurious Emissions, 802.11ac 40 MHz, 5230 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak

Radiated Spurious Emissions, 802.11ac 80 MHz, 4x8

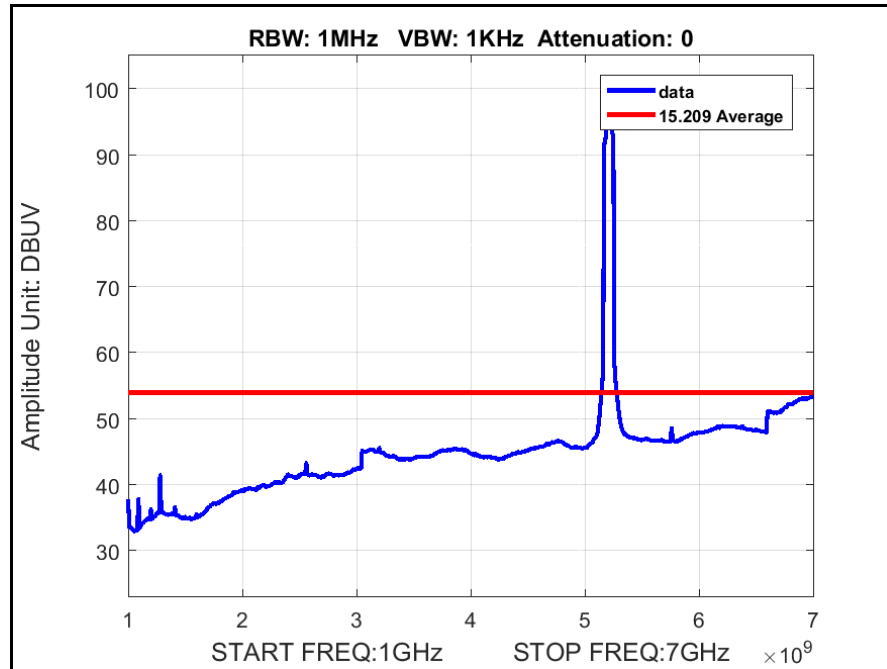


Plot 85. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

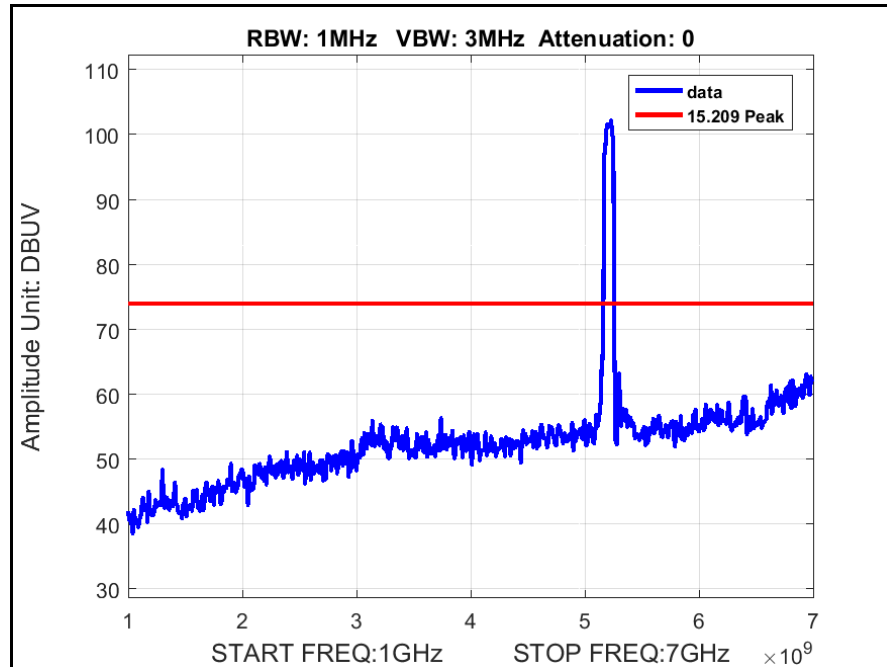


Plot 86. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak


Radiated Spurious Emissions, 802.11n 20 MHz, 4x8

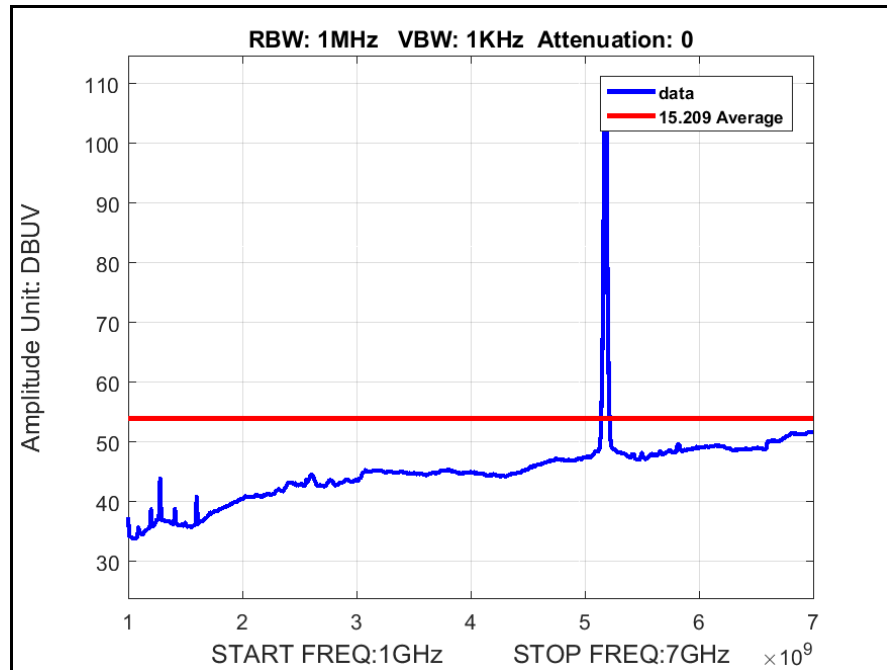


Plot 87. Radiated Spurious Emissions, 802.11n 20 MHz, 5180 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average

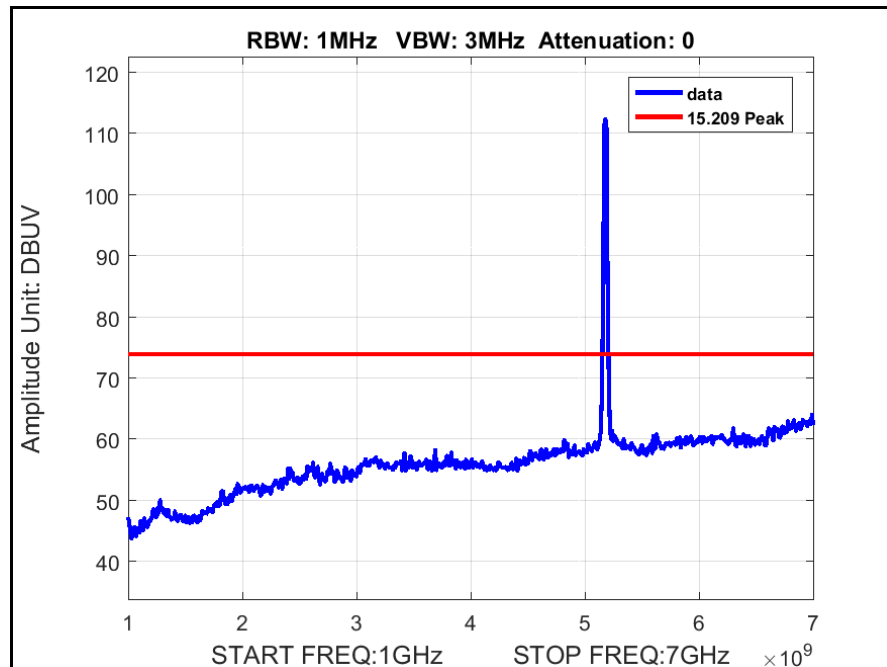

Plot 88. Radiated Spurious Emissions, 802.11n 20 MHz, 5180 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak

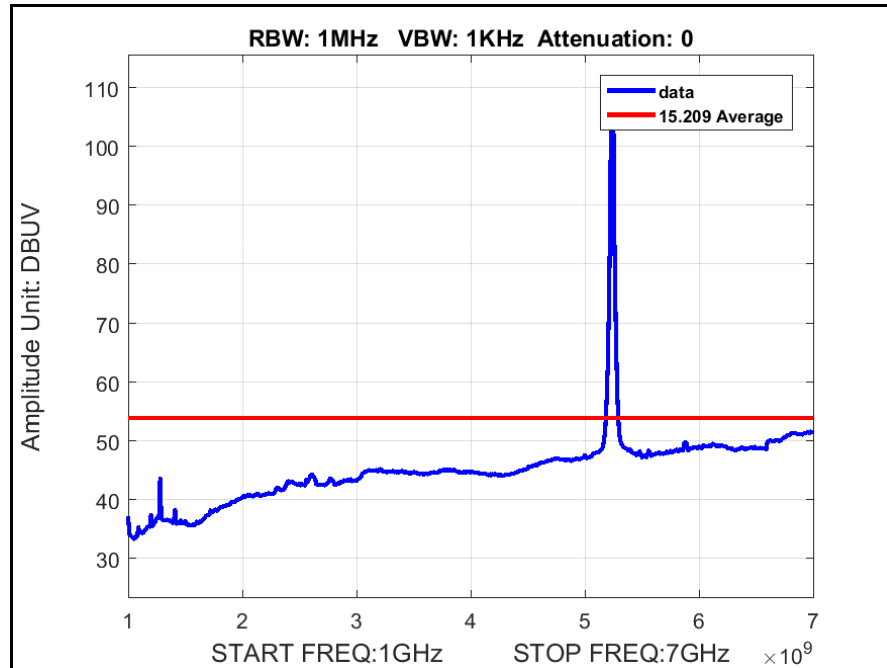


Plot 89. Radiated Spurious Emissions, 802.11n 20 MHz, 5240 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average

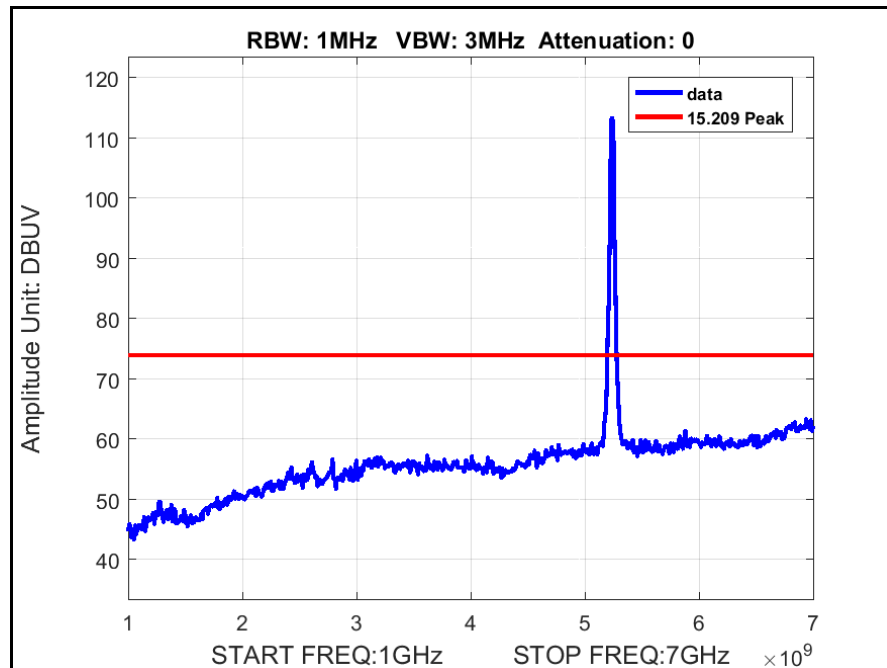


Plot 90. Radiated Spurious Emissions, 802.11n 20 MHz, 5240 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak


Radiated Spurious Emissions, 802.11n 40 MHz, 4x8

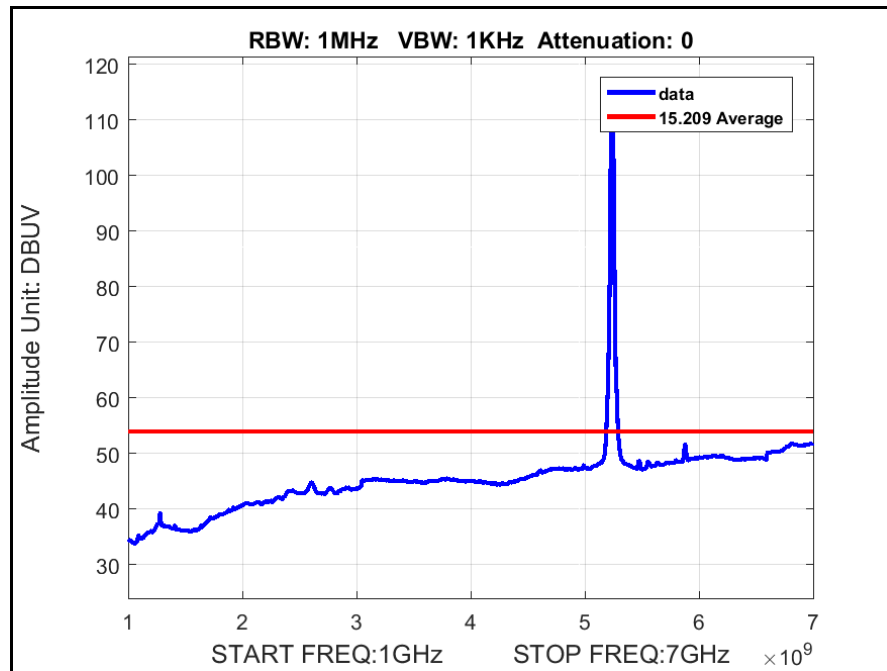


Plot 91. Radiated Spurious Emissions, 802.11n 40 MHz, 5190 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Average

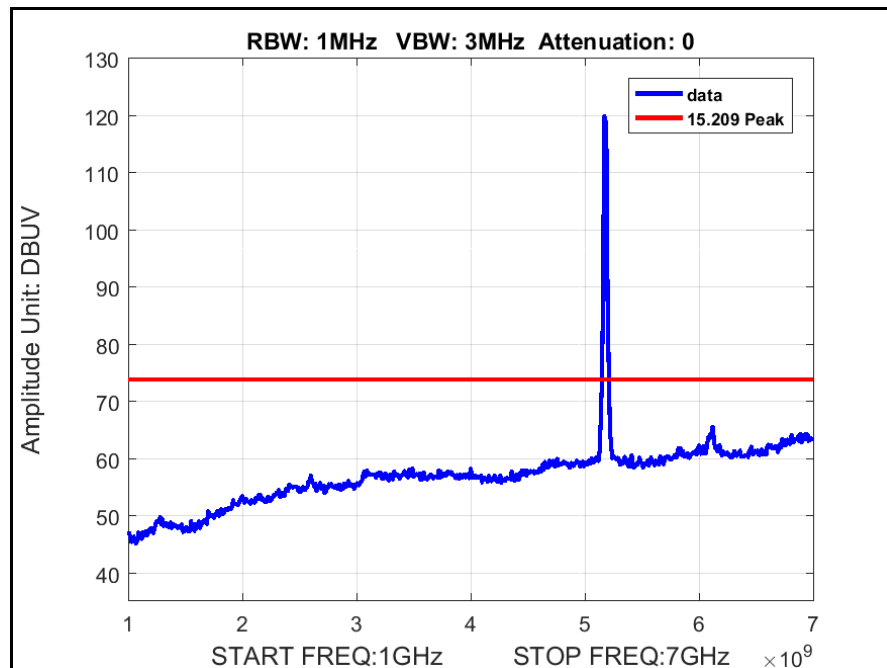

Plot 92. Radiated Spurious Emissions, 802.11n 40 MHz, 5190 MHz, 4x8, MCS0, 1 GHz – 7 GHz, Peak

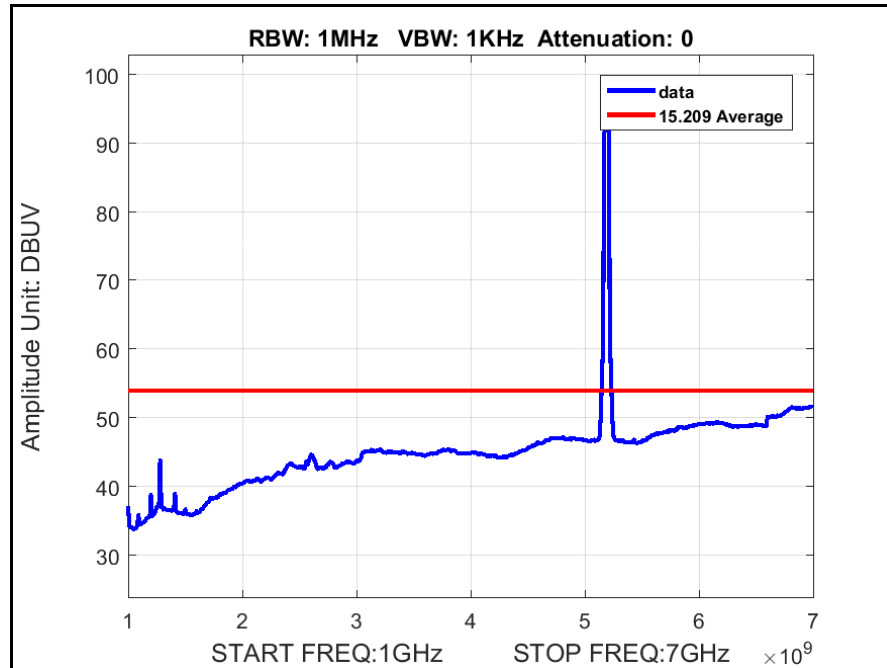


Plot 93. Radiated Spurious Emissions, 802.11n 40 MHz, 5230 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

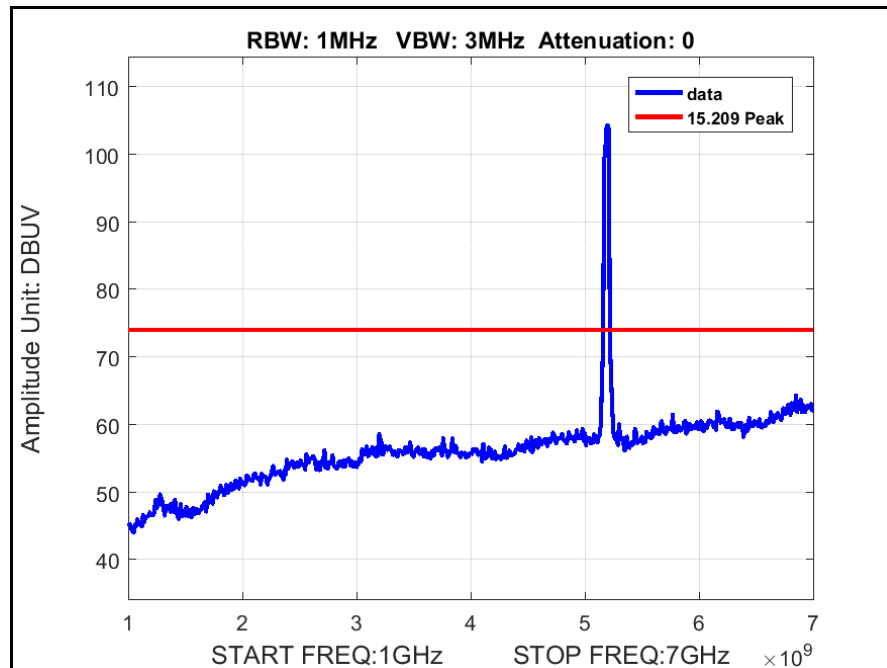


Plot 94. Radiated Spurious Emissions, 802.11n 40 MHz, 5230 MHz, 4x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak


Radiated Spurious Emissions, 802.11a, 8x8

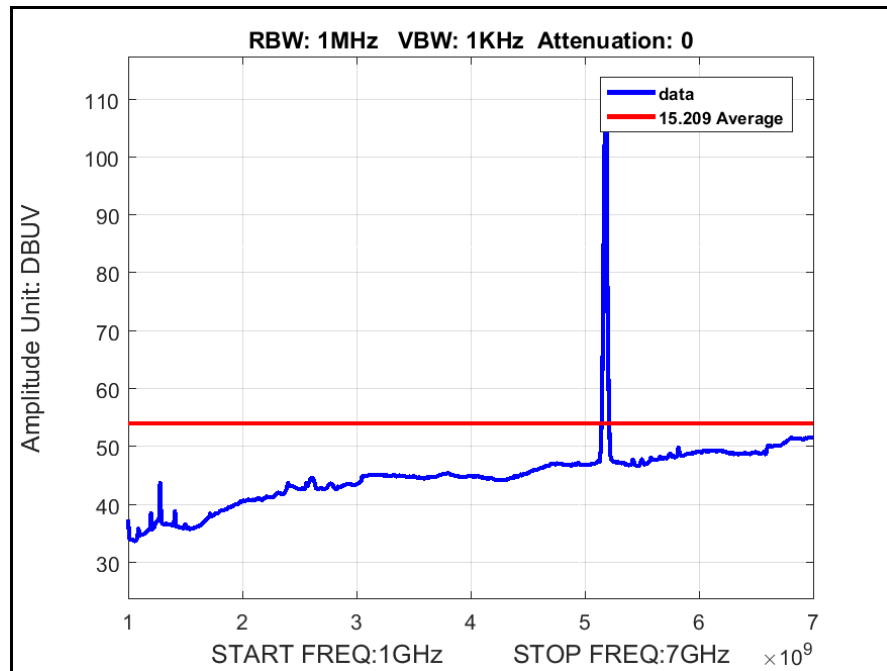


Plot 95. Radiated Spurious Emissions, 802.11a, 5180 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

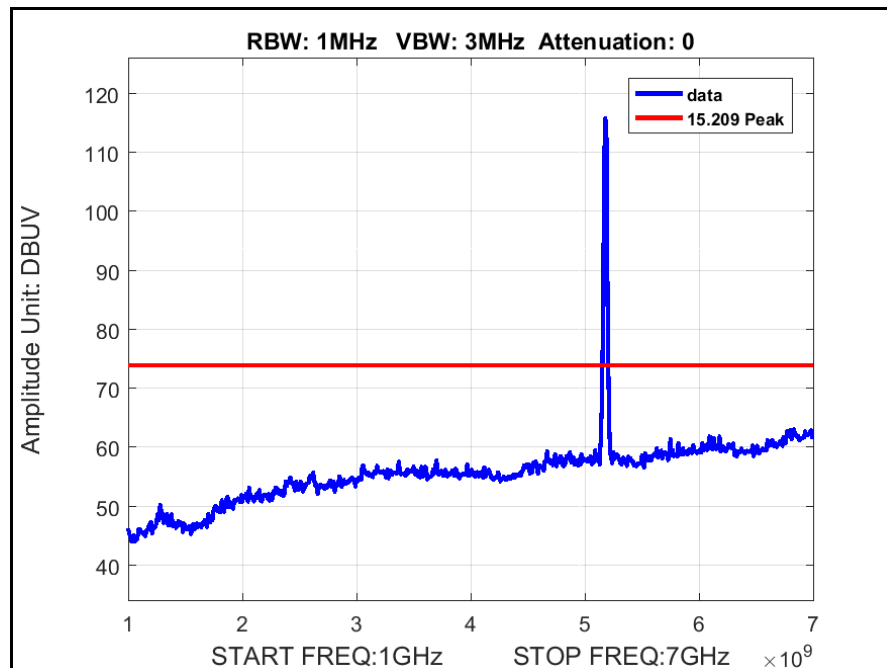

Plot 96. Radiated Spurious Emissions, 802.11a, 5180 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak

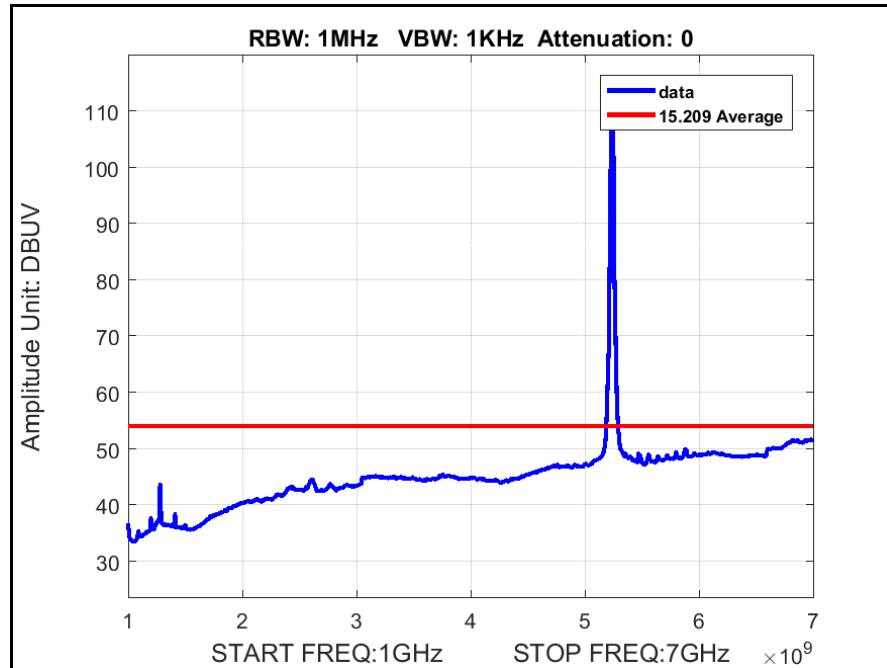


Plot 97. Radiated Spurious Emissions, 802.11a, 5240 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

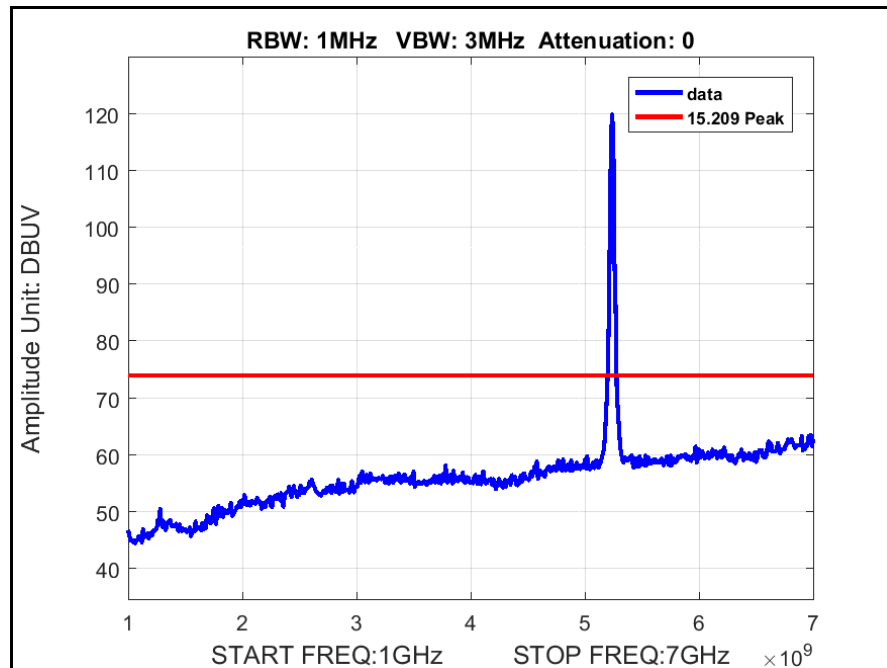


Plot 98. Radiated Spurious Emissions, 802.11a, 5240 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak


Radiated Spurious Emissions, 802.11ac 20 MHz, 8x8

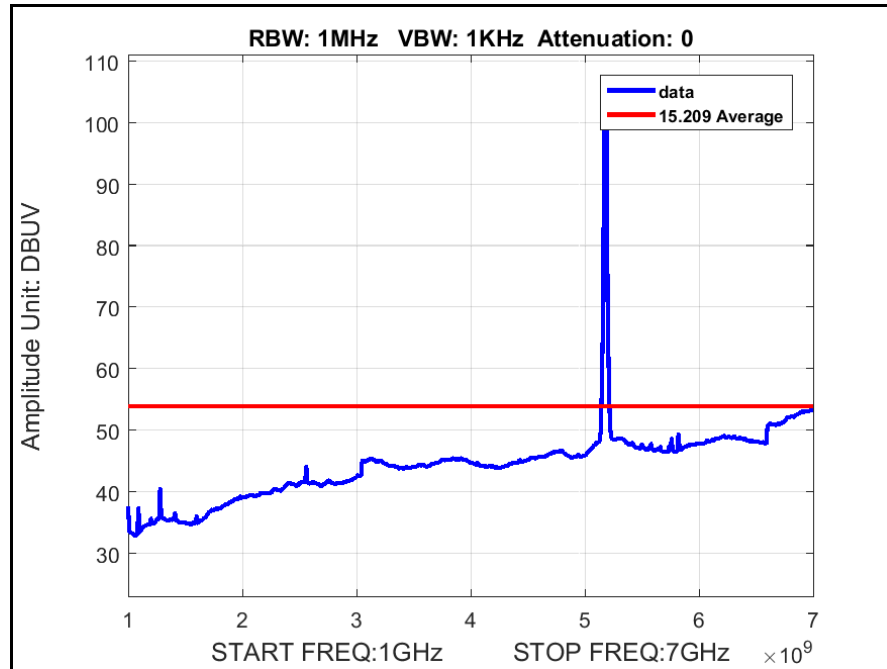


Plot 99. Radiated Spurious Emissions, 802.11ac 20 MHz, 5180 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

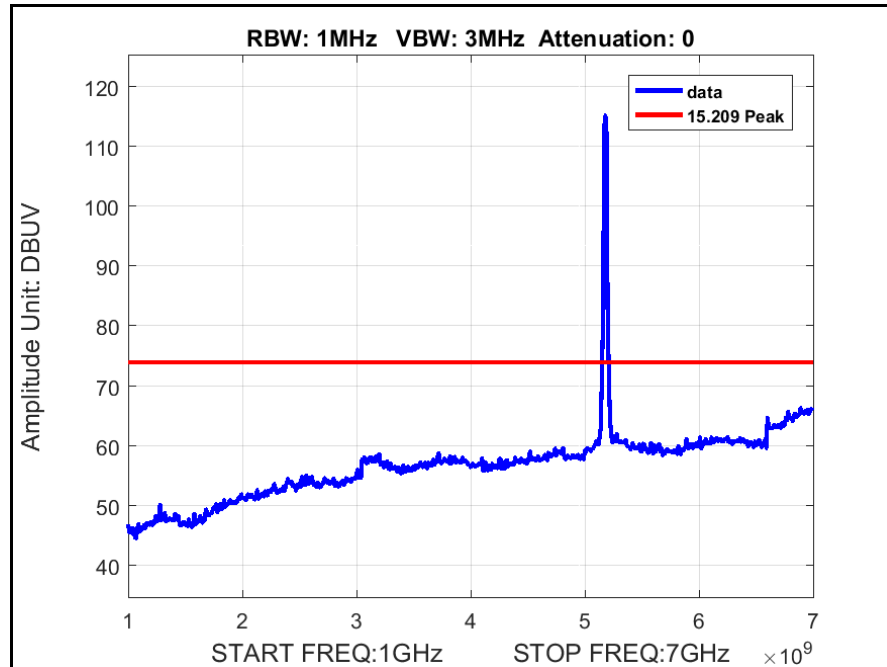

Plot 100. Radiated Spurious Emissions, 802.11ac 20 MHz, 5180 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak

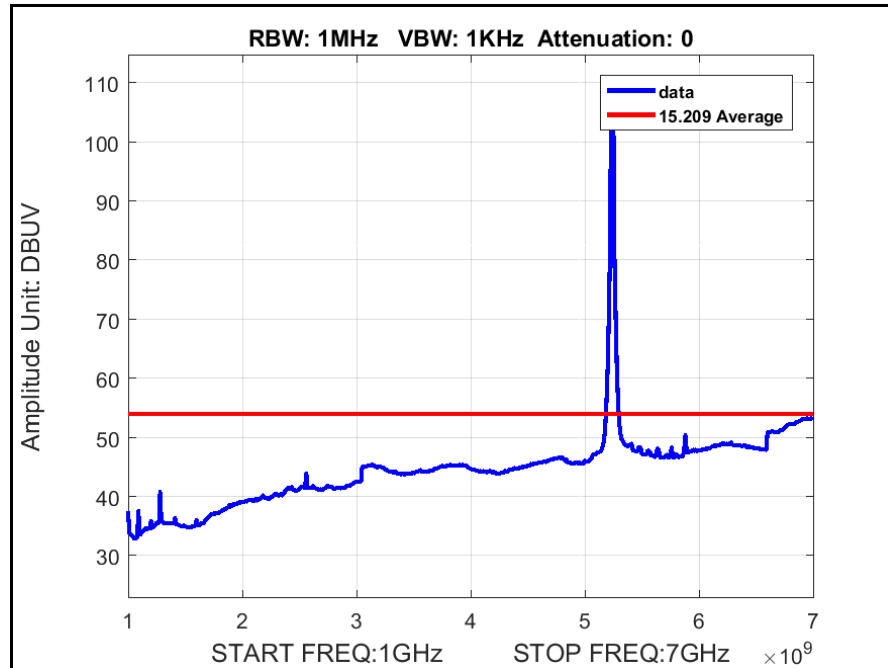


Plot 101. Radiated Spurious Emissions, 802.11ac 20 MHz, 5240 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

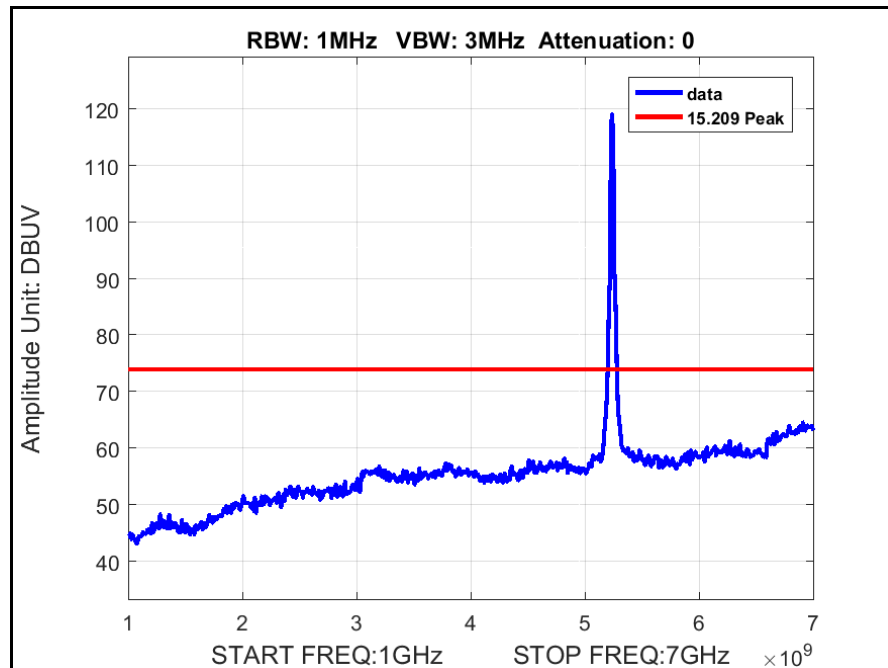


Plot 102. Radiated Spurious Emissions, 802.11ac 20 MHz, 5240 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak


Radiated Spurious Emissions, 802.11ac 40 MHz, 8x8

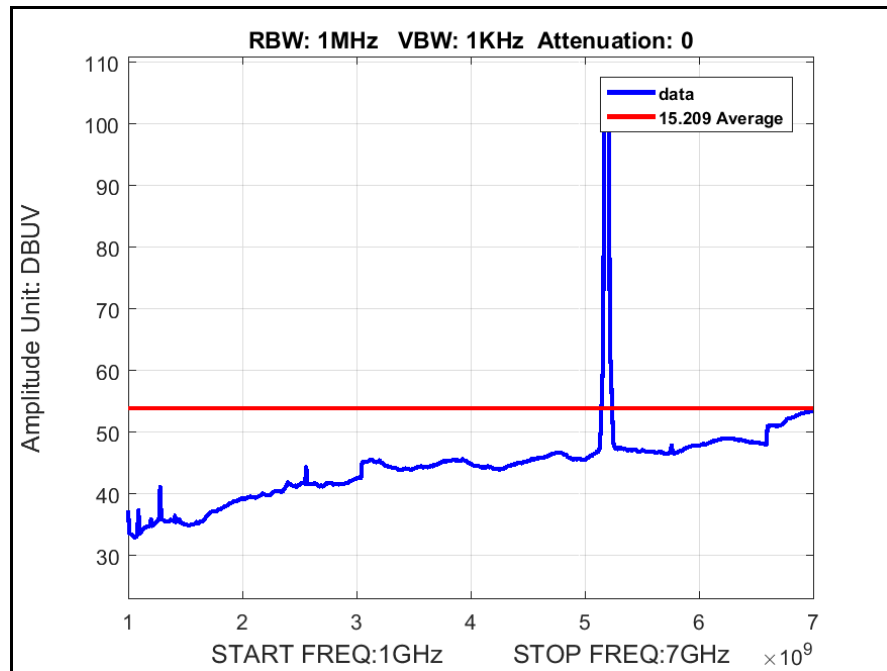


Plot 103. Radiated Spurious Emissions, 802.11ac 40 MHz, 5190 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

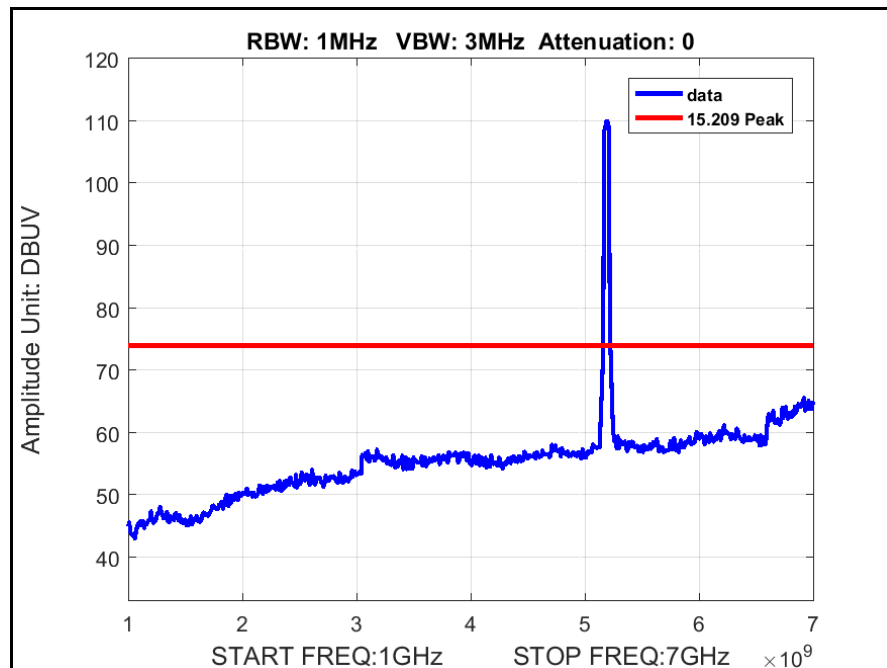

Plot 104. Radiated Spurious Emissions, 802.11ac 40 MHz, 5190 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak

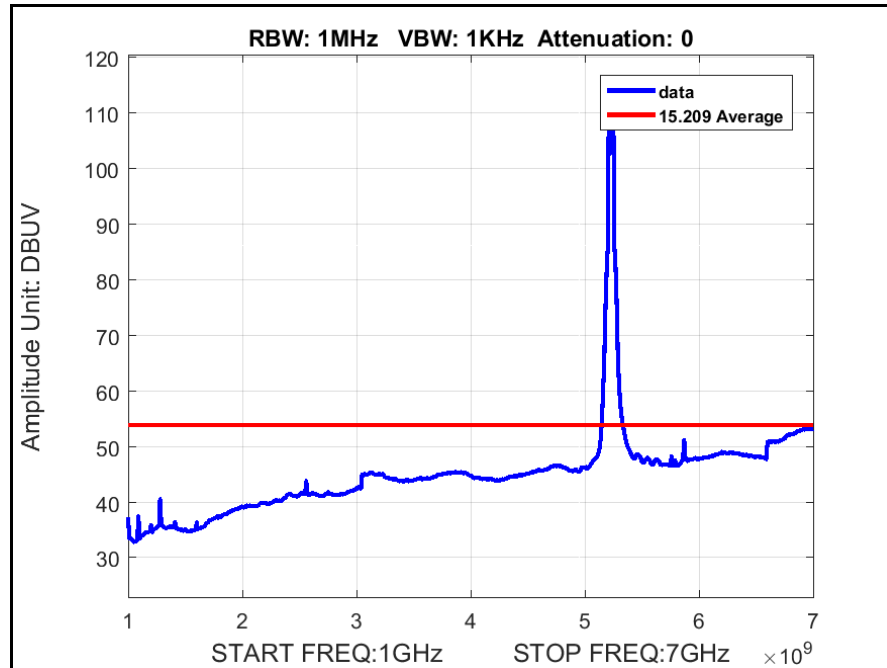


Plot 105. Radiated Spurious Emissions, 802.11ac 40 MHz, 5230 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

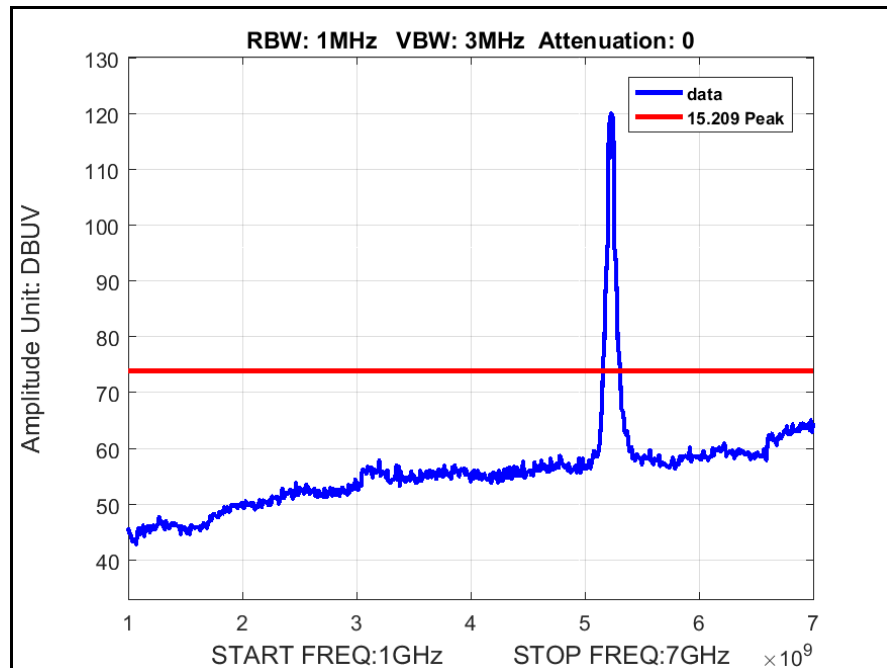


Plot 106. Radiated Spurious Emissions, 802.11ac 40 MHz, 5230 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak


Radiated Spurious Emissions, 802.11ac 80 MHz, 8x8

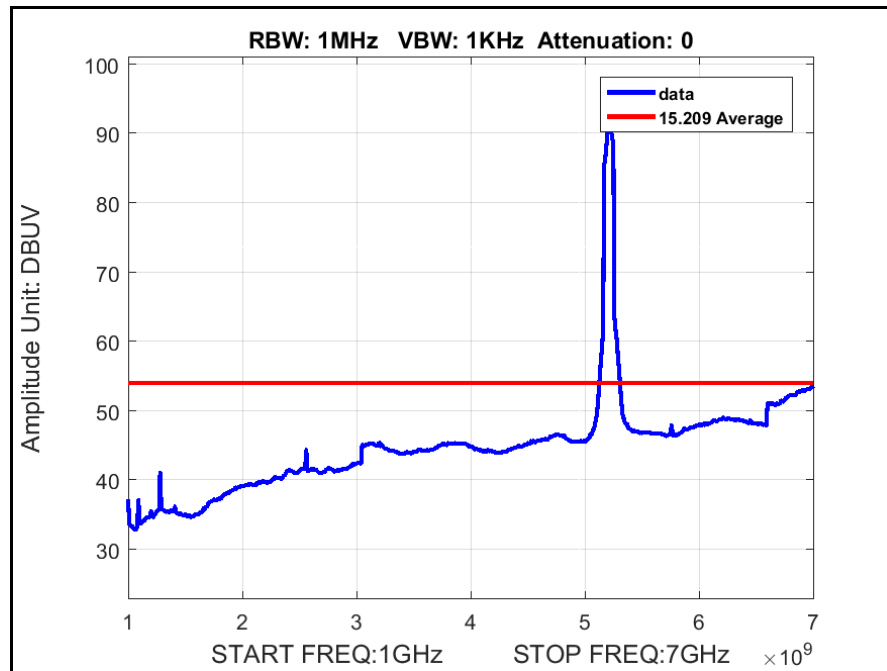


Plot 107. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Average

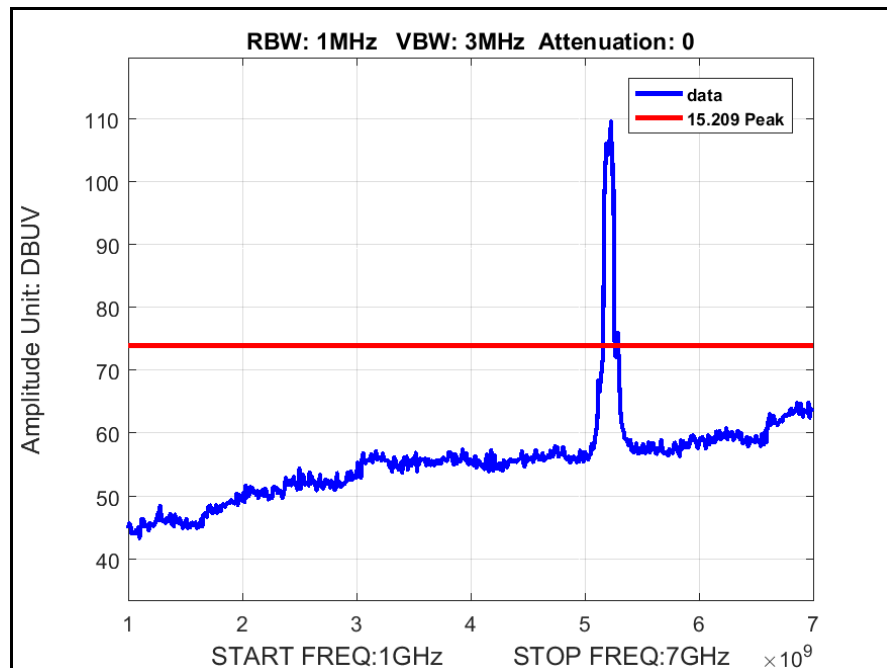

Plot 108. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 8x8, MCS0 NSS1, 1 GHz – 7 GHz, Peak

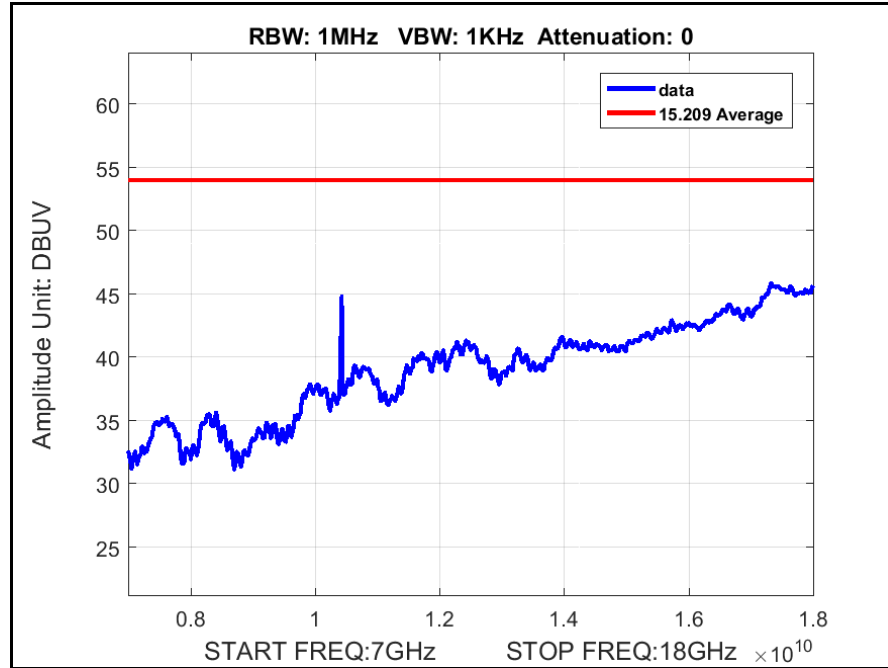


Plot 109. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 8x8, MCS0 NSS1, 7 GHz – 18 GHz, Average

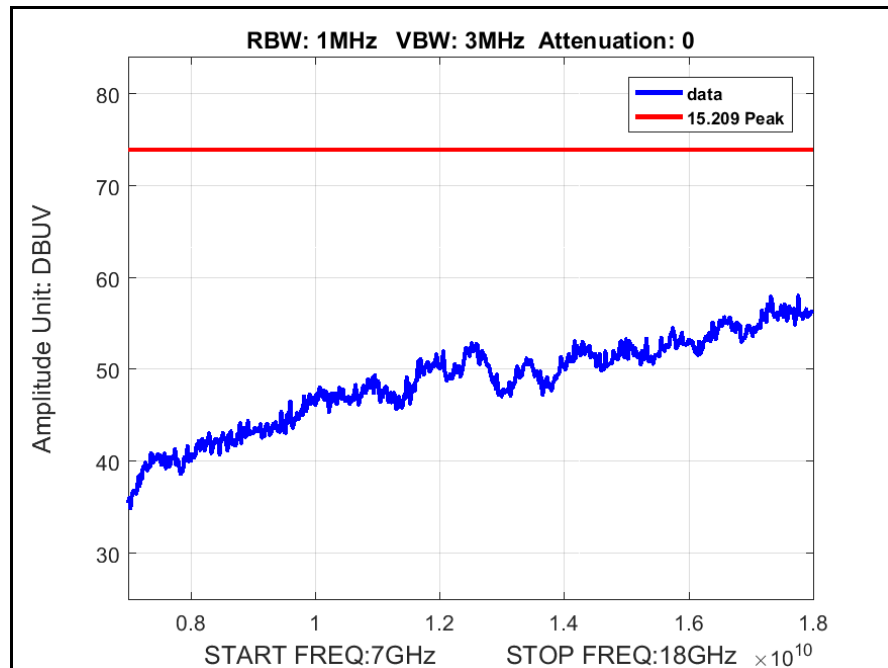


Plot 110. Radiated Spurious Emissions, 802.11ac 80 MHz, 5210 MHz, 8x8, MCS0 NSS1, 7 GHz – 18 GHz, Peak


Radiated Spurious Emissions, 802.11n 20 MHz, 8x8

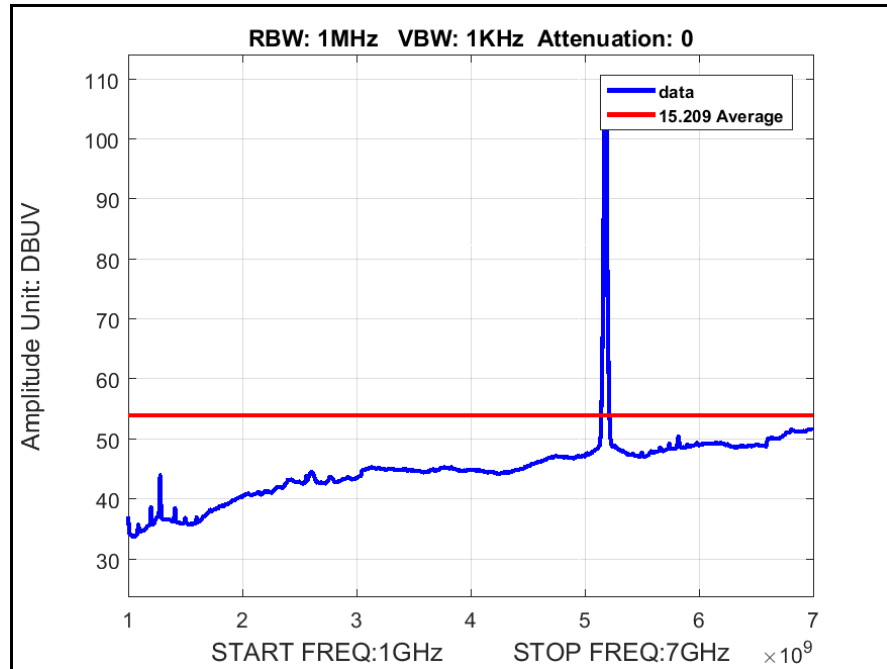


Plot 111. Radiated Spurious Emissions, 802.11n 20 MHz, 5180 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average

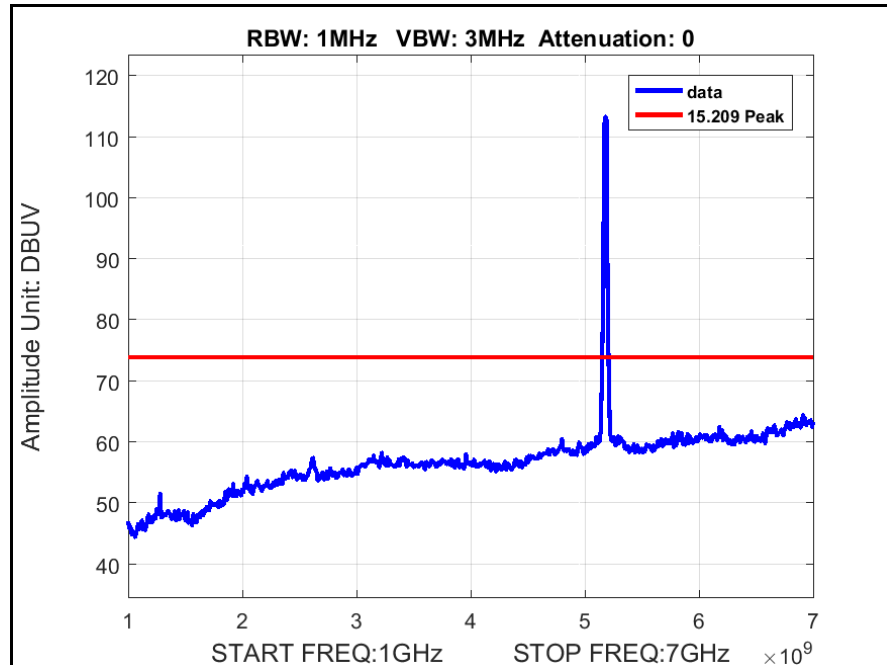

Plot 112. Radiated Spurious Emissions, 802.11n 20 MHz, 5180 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak

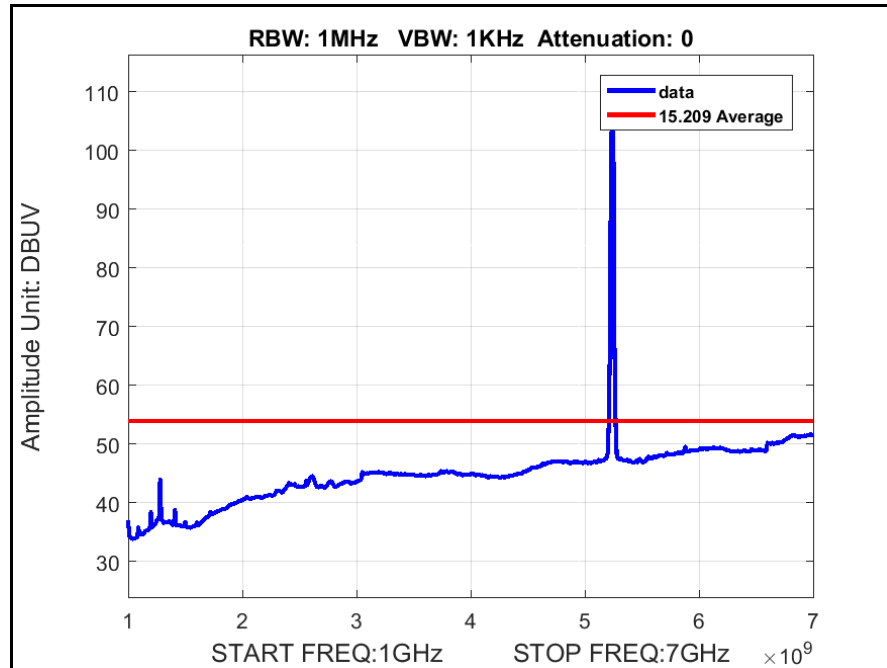


Plot 113. Radiated Spurious Emissions, 802.11n 20 MHz, 5240 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average

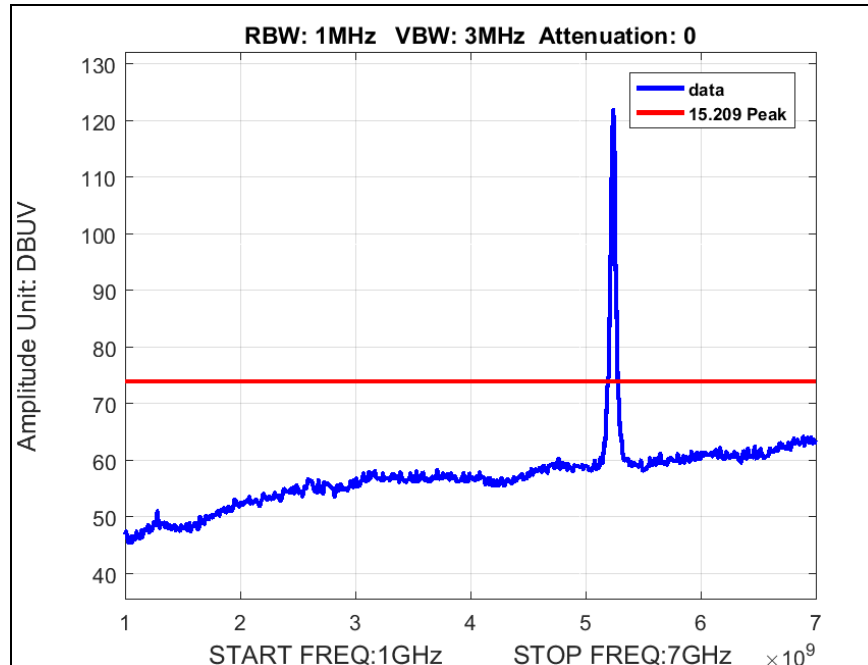


Plot 114. Radiated Spurious Emissions, 802.11n 20 MHz, 5240 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak


Radiated Spurious Emissions, 802.11n 40 MHz, 8x8

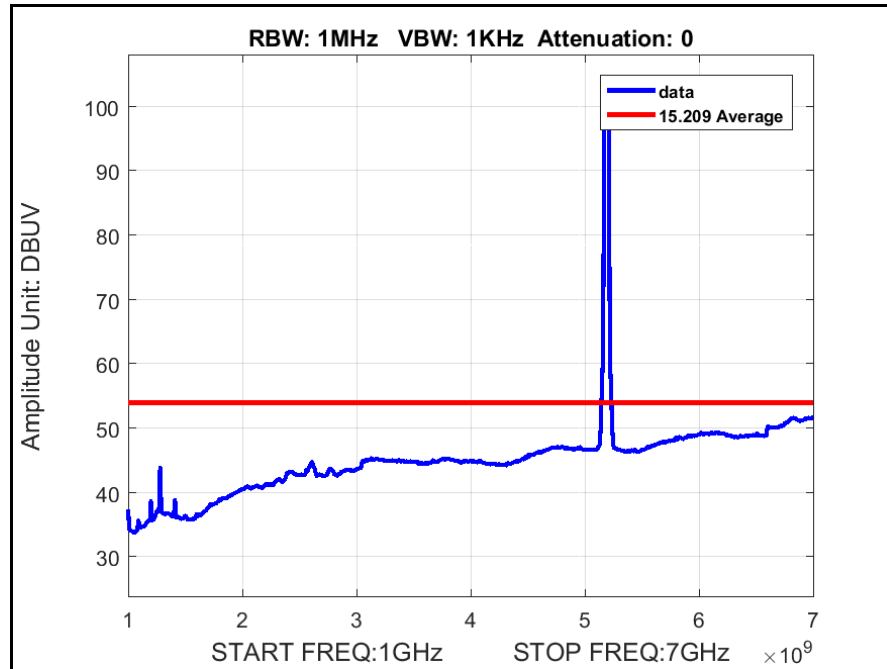


Plot 115. Radiated Spurious Emissions, 802.11n 40 MHz, 5190 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average

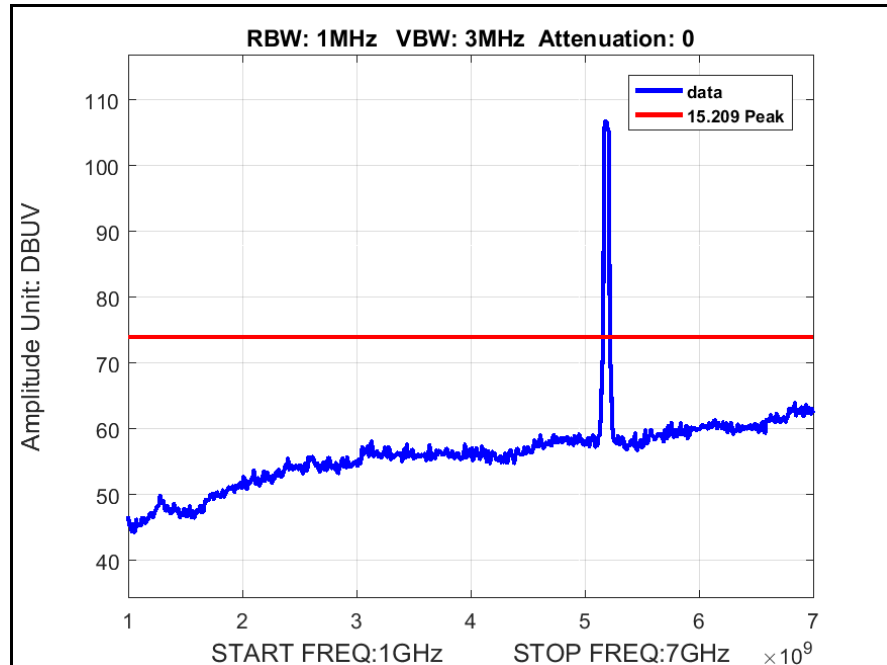

Plot 116. Radiated Spurious Emissions, 802.11n 40 MHz, 5190 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak

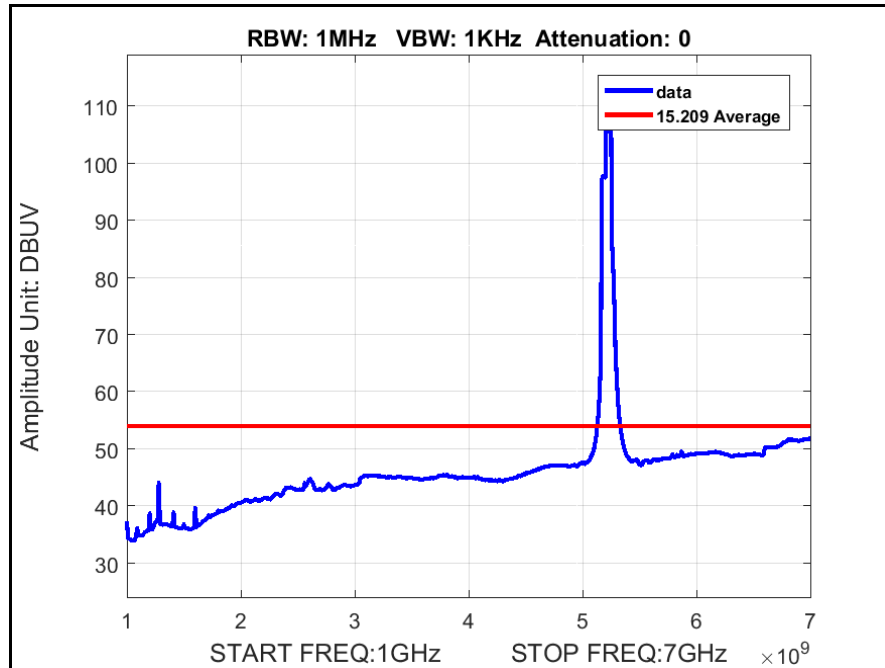


Plot 117. Radiated Spurious Emissions, 802.11n 40 MHz, 5230 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Average

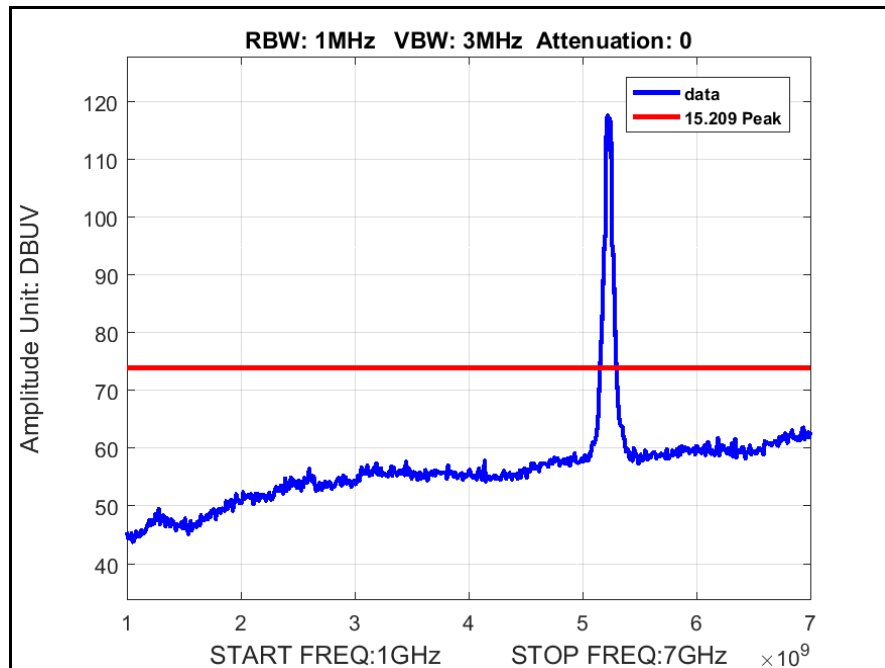


Plot 118. Radiated Spurious Emissions, 802.11n 40 MHz, 5230 MHz, 8x8, MCS0, 1 GHz – 7 GHz, Peak


Radiated Band Edge, 802.11a, 4x8

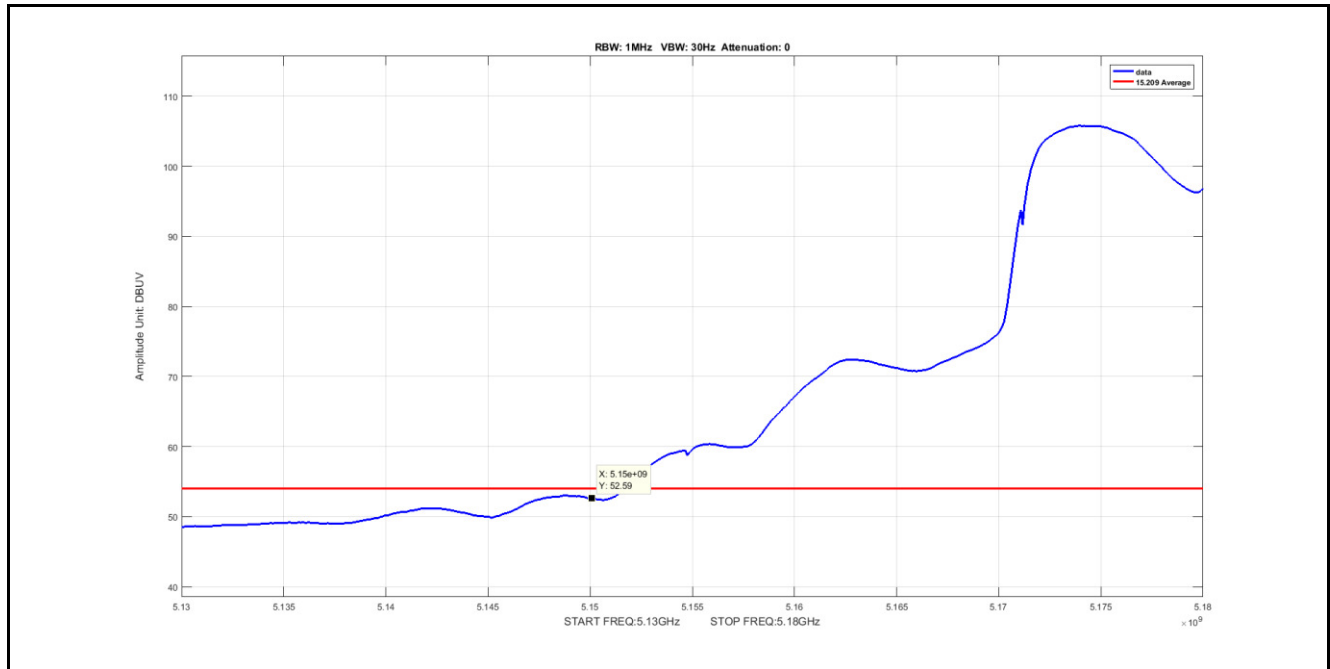


Plot 119. Radiated Band Edge, 802.11a, Channel 5180 MHz, 4x8, Average, 6M

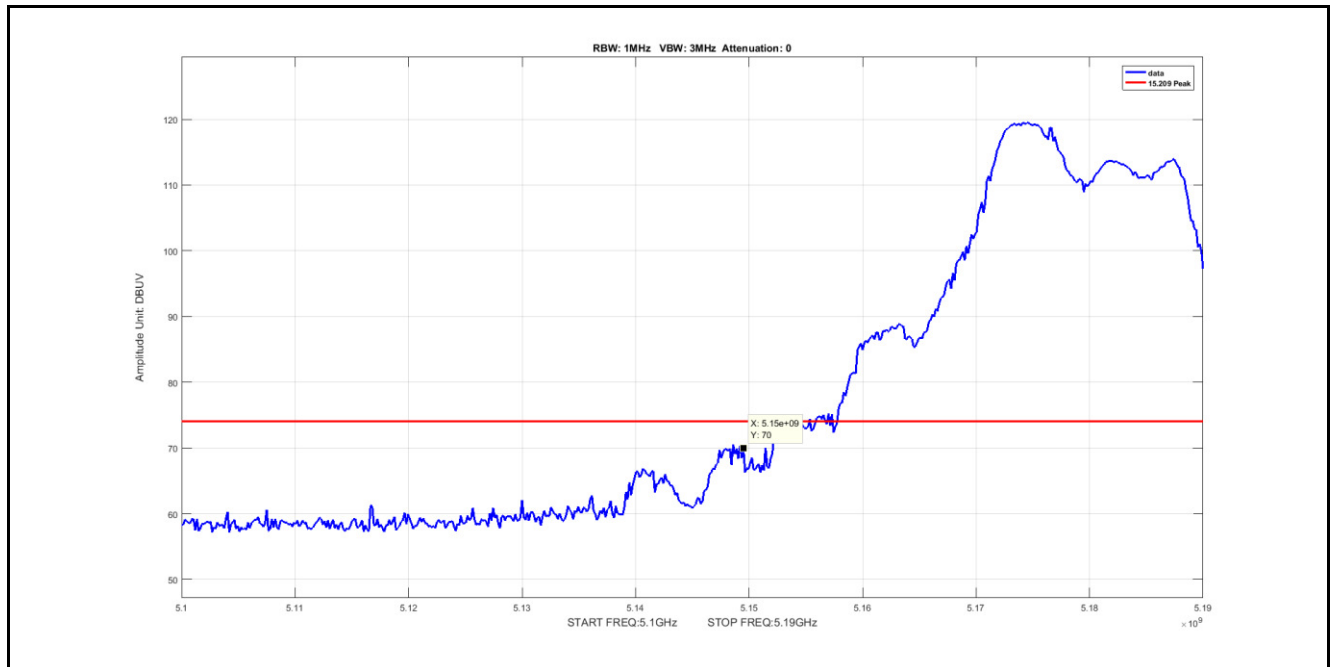

Plot 120. Radiated Band Edge, 802.11a, Channel 5180 MHz, 4x8, Peak, 6M

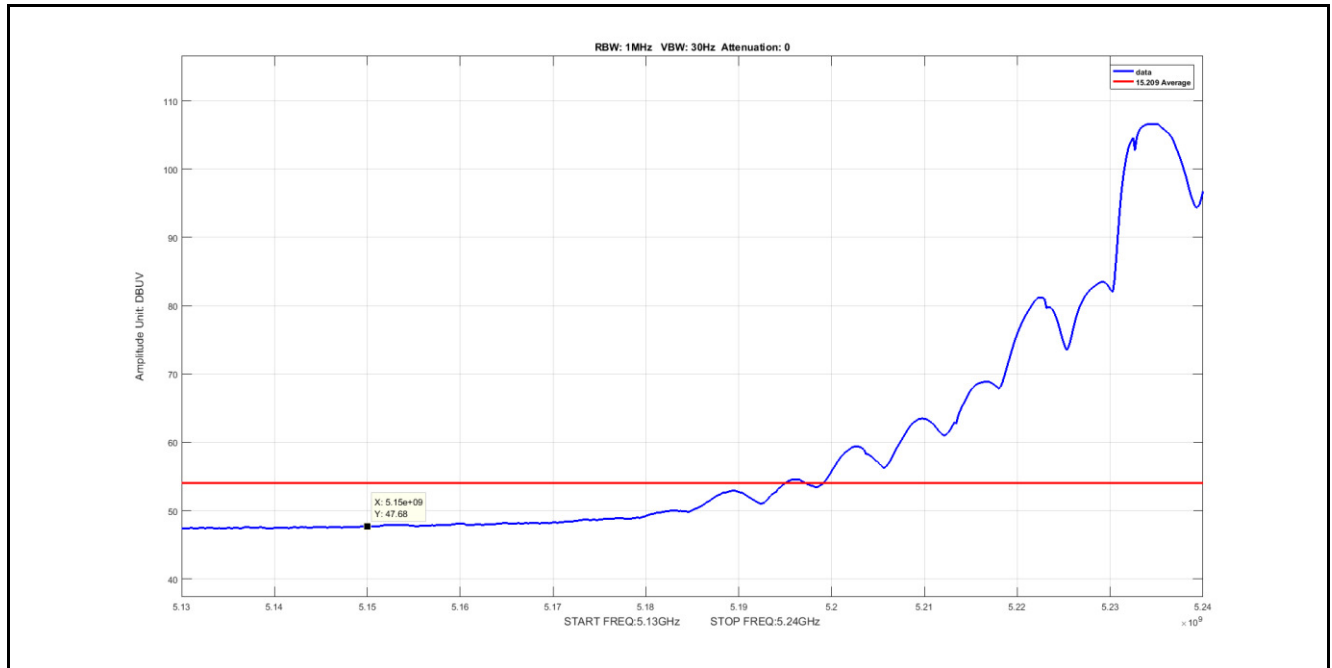


Plot 121. Radiated Band Edge, 802.11a, Channel 5240 MHz, 4x8, Average, 6M

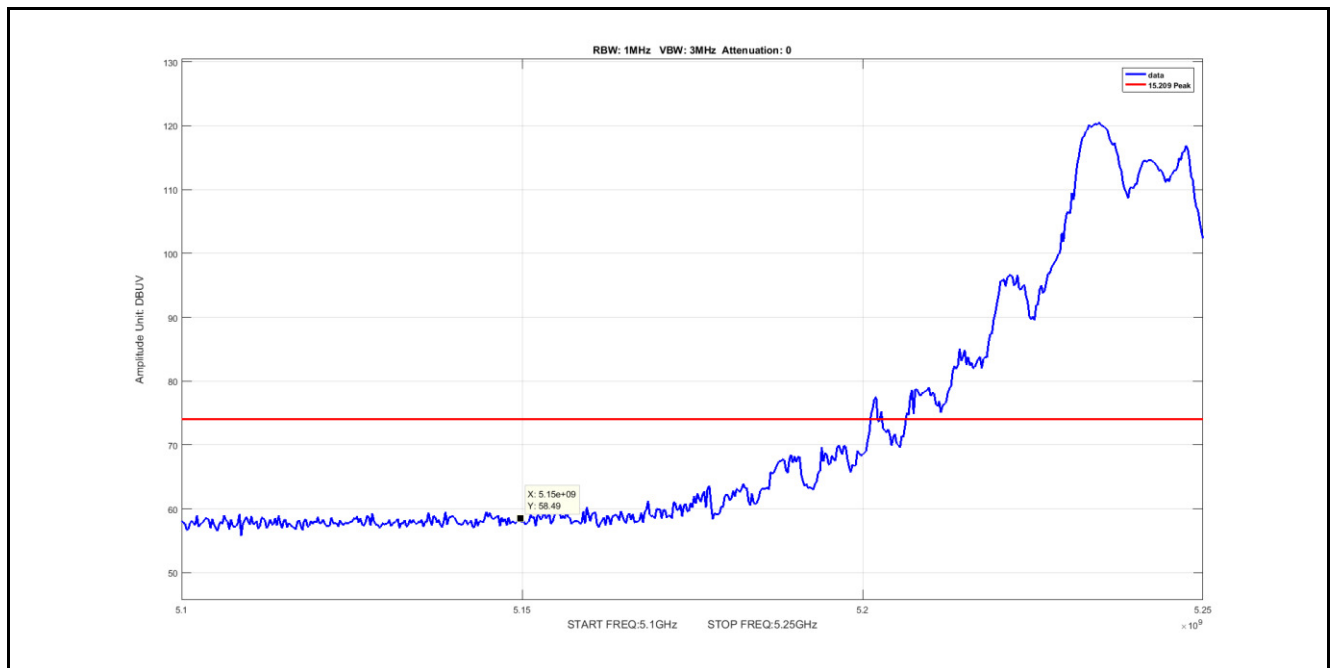


Plot 122. Radiated Band Edge, 802.11a, Channel 5240 MHz, 4x8, Peak, 6M


Radiated Band Edge, 802.11ac 20 MHz, 4x8

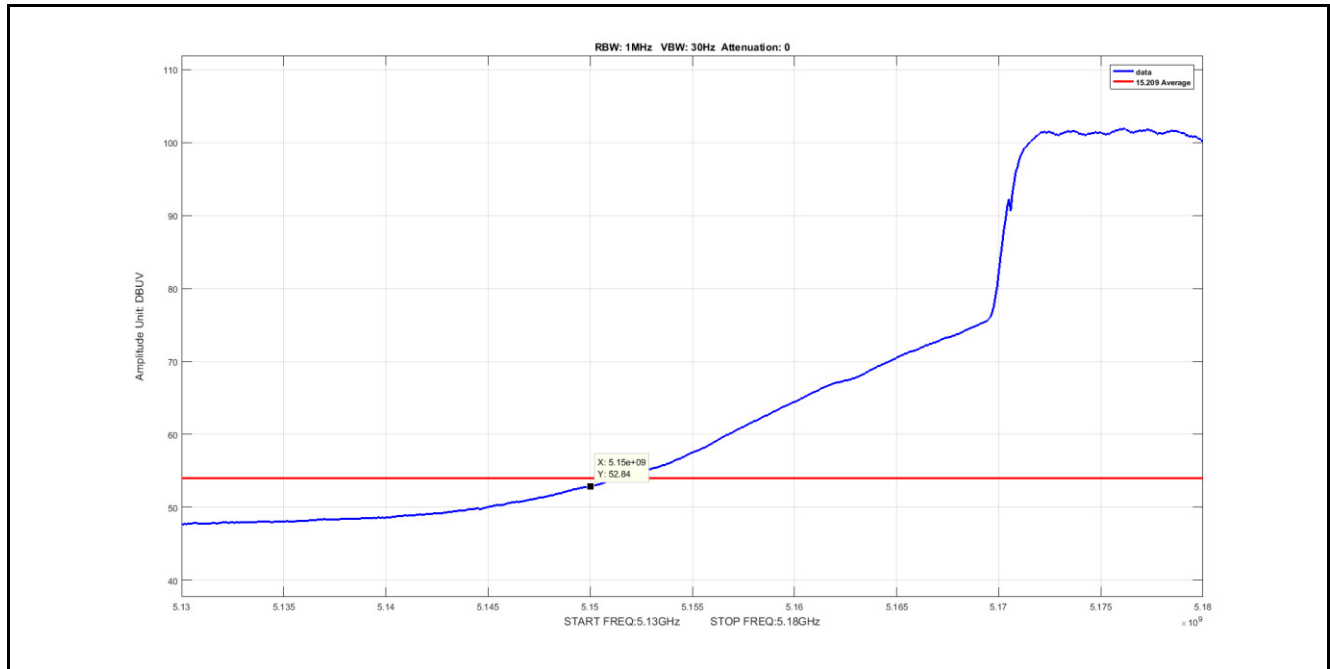


Plot 123. Radiated Band Edge, 802.11ac 20 MHz, Channel 5180 MHz, 4x8, Average, MCS0 NSS1

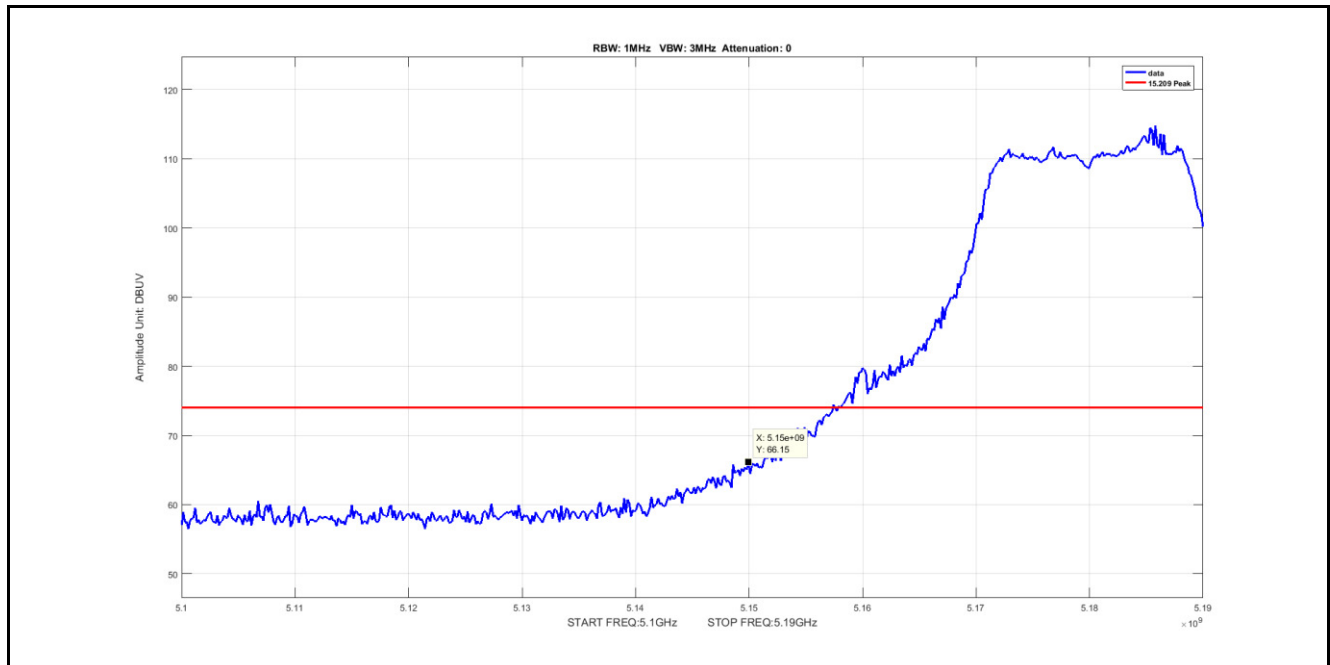

Plot 124. Radiated Band Edge, 802.11ac 20 MHz, Channel 5180 MHz, 4x8, Peak, MCS0 NSS1

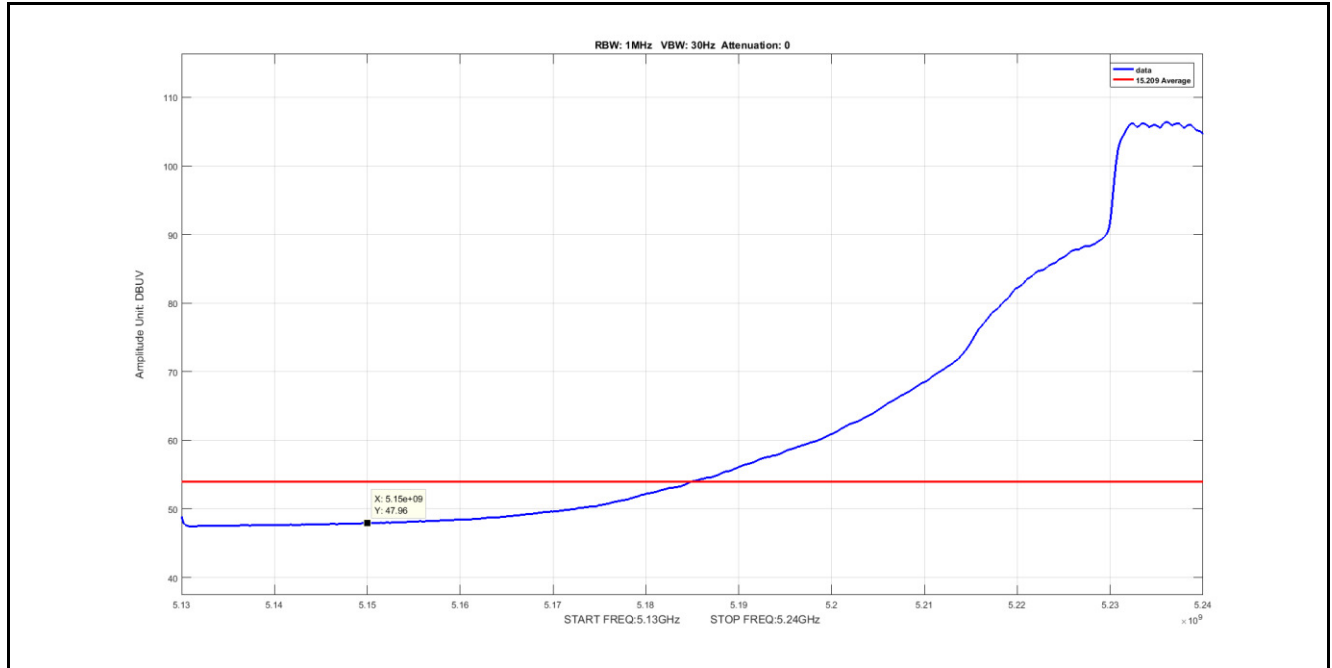


Plot 125. Radiated Band Edge, 802.11ac 20 MHz, Channel 5240 MHz, 4x8, Average, MCS0 NSS1

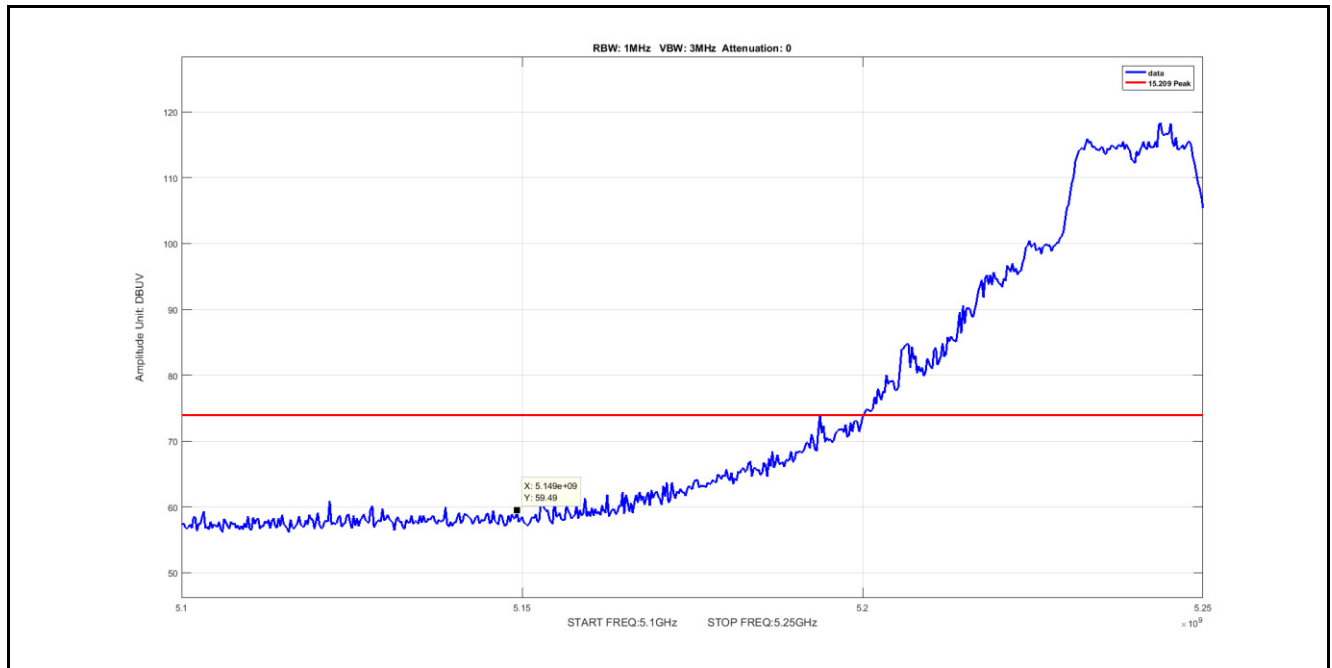


Plot 126. Radiated Band Edge, 802.11ac 20 MHz, Channel 5240 MHz, 4x8, Peak, MCS0 NSS1


Radiated Band Edge, 802.11ac 40 MHz, 4x8

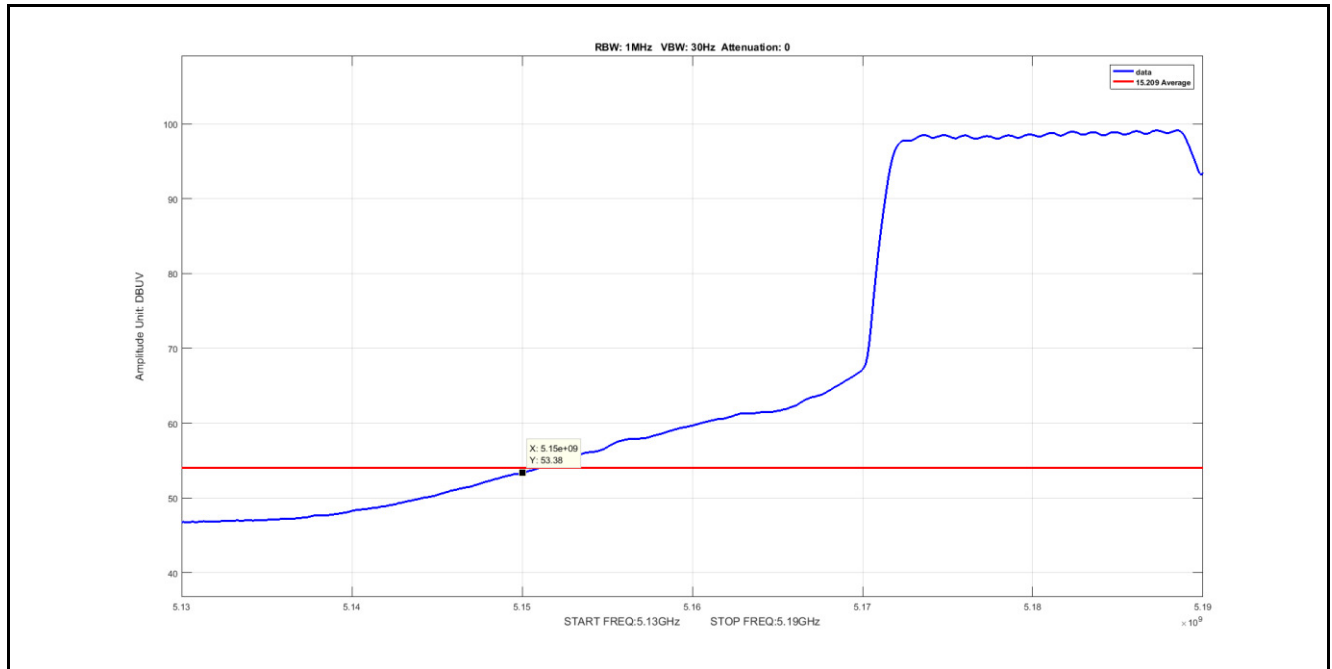


Plot 127. Radiated Band Edge, 802.11ac 40 MHz, Channel 5190 MHz, 4x8, Average, MCS0 NSS1

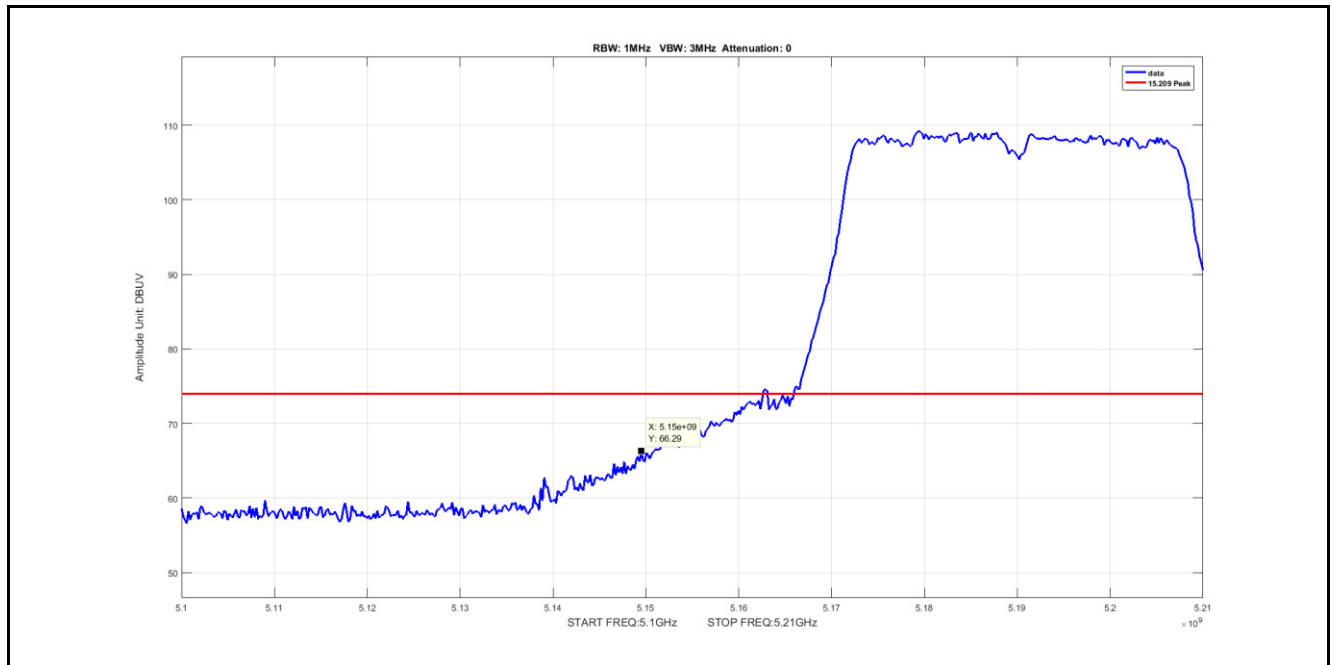

Plot 128. Radiated Band Edge, 802.11ac 40 MHz, Channel 5190 MHz, 4x8, Peak, MCS0 NSS1

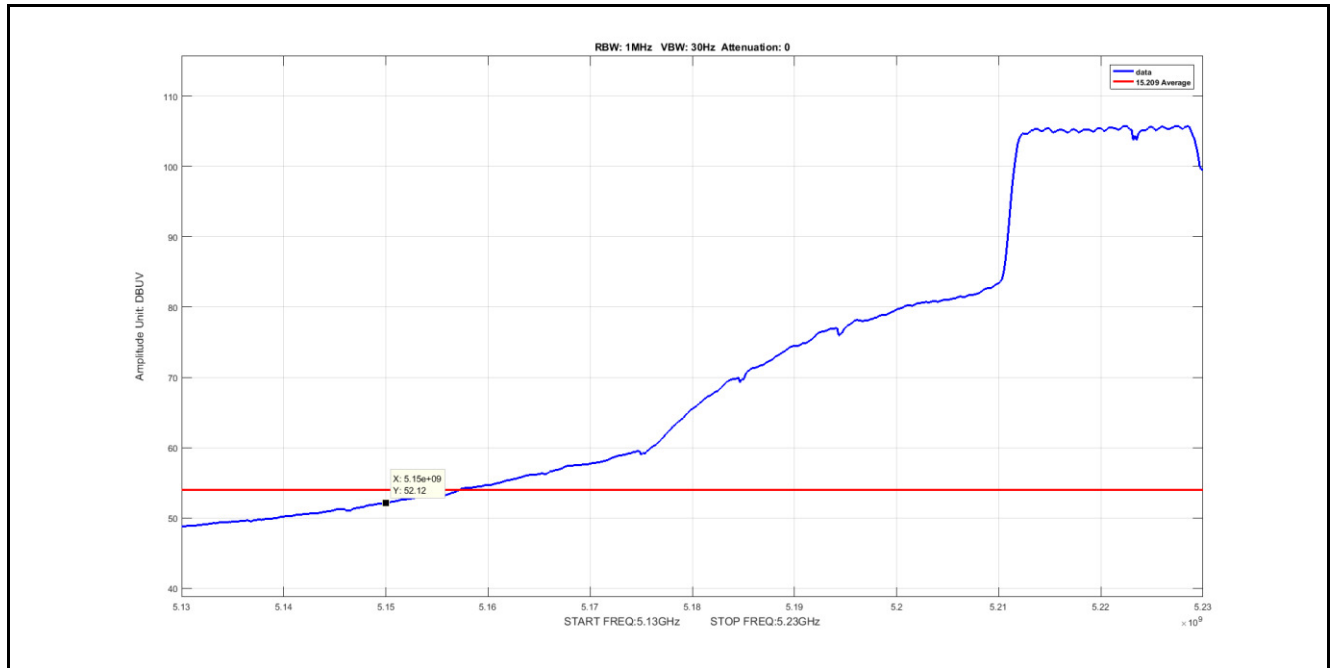


Plot 129. Radiated Band Edge, 802.11ac 40 MHz, Channel 5230 MHz, 4x8, Average, MCS0 NSS1

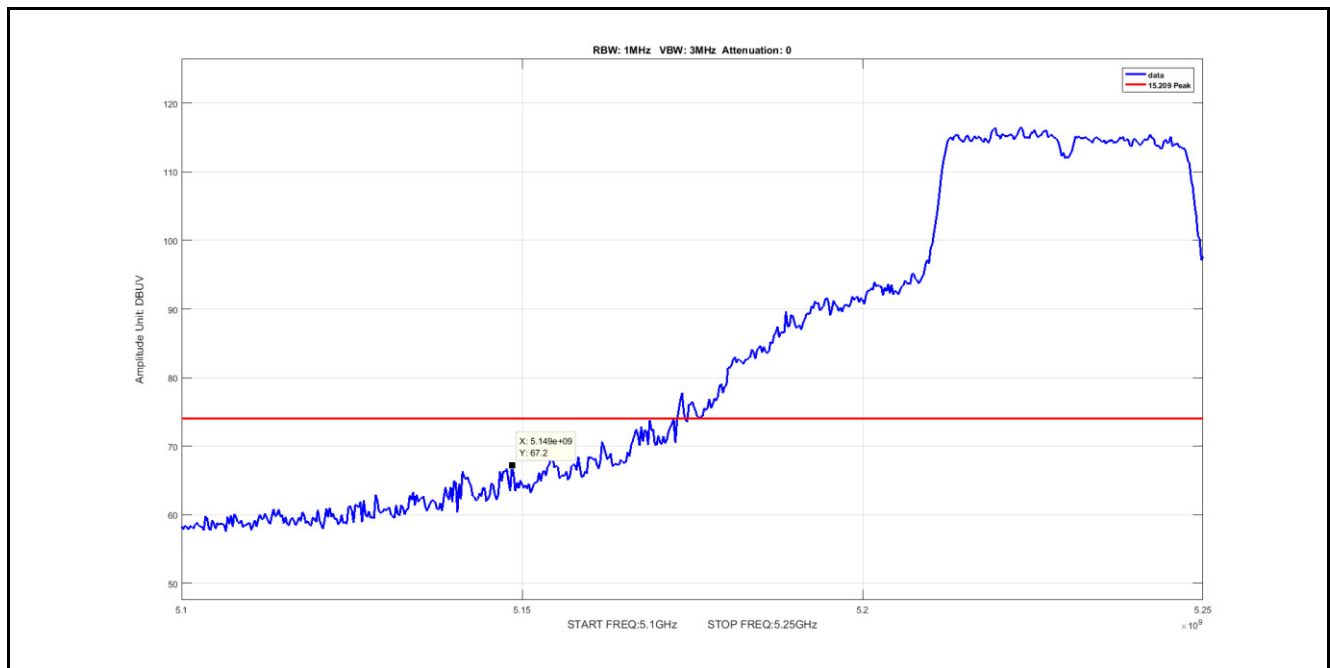


Plot 130. Radiated Band Edge, 802.11ac 40 MHz, Channel 5230 MHz, 4x8, Peak, MCS0 NSS1

Radiated Band Edge, 802.11ac 80 MHz, 4x8

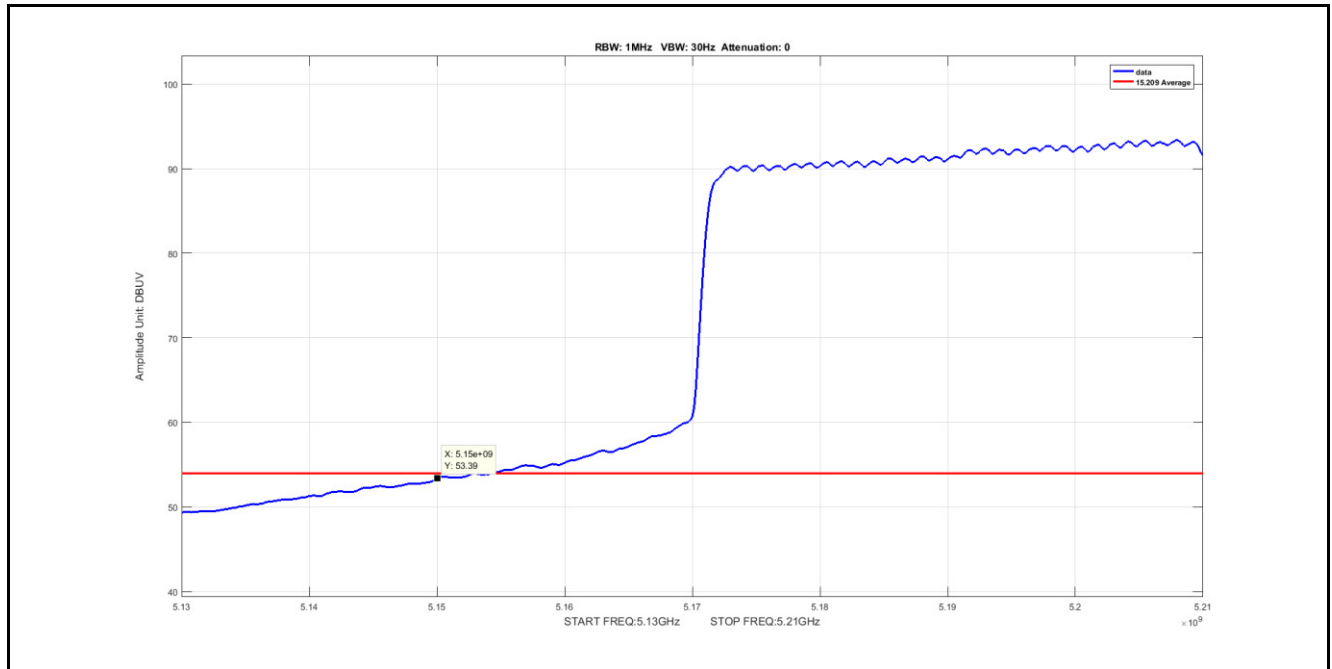


Plot 131. Radiated Band Edge, 802.11ac 80 MHz, Channel 5210 MHz, 4x8, Average, MCS0 NSS1

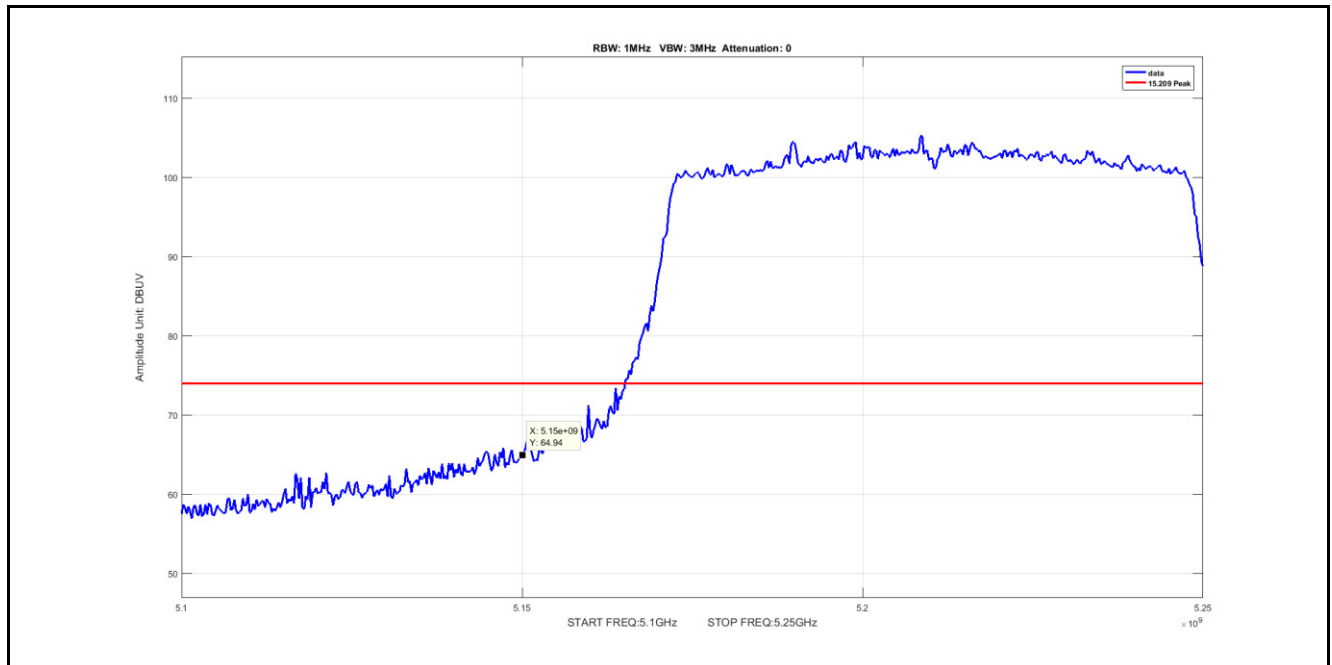


Plot 132. Radiated Band Edge, 802.11ac 80 MHz, Channel 5210 MHz, 4x8, Peak, MCS0 NSS1


Radiated Band Edge, 802.11n 20 MHz, 4x8

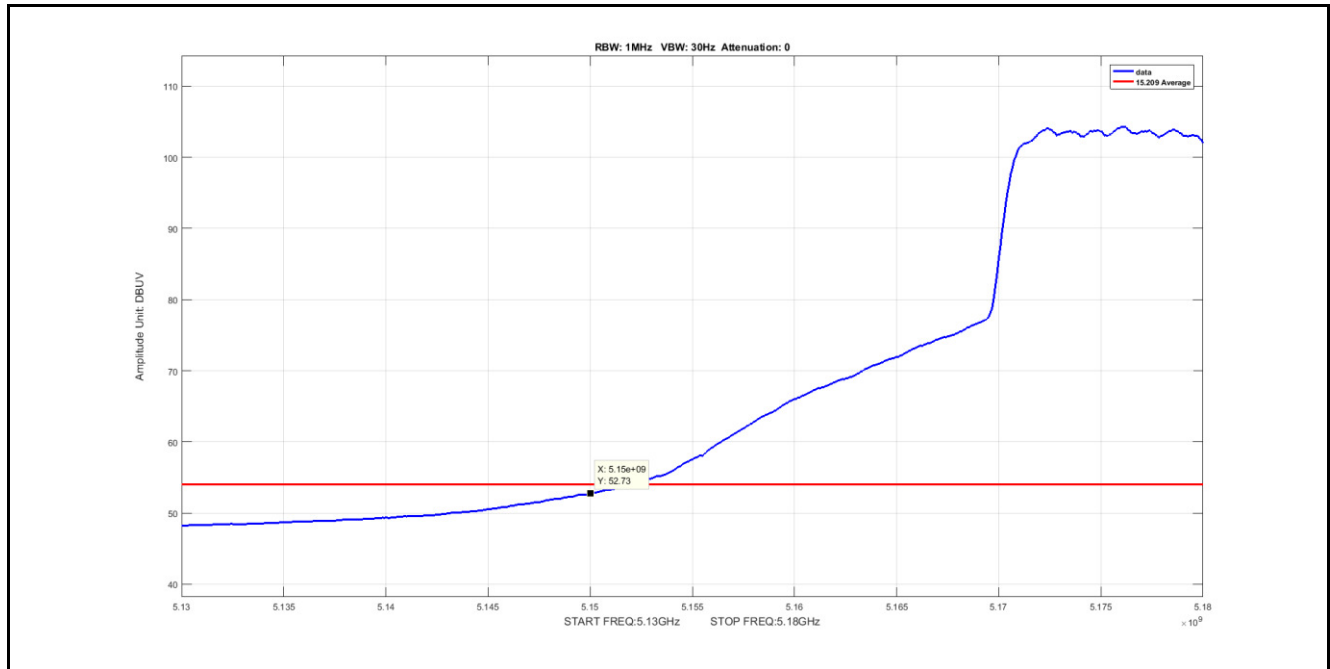


Plot 133. Radiated Band Edge, 802.11n 20 MHz, Channel 5180 MHz, 4x8, Average, MCS0

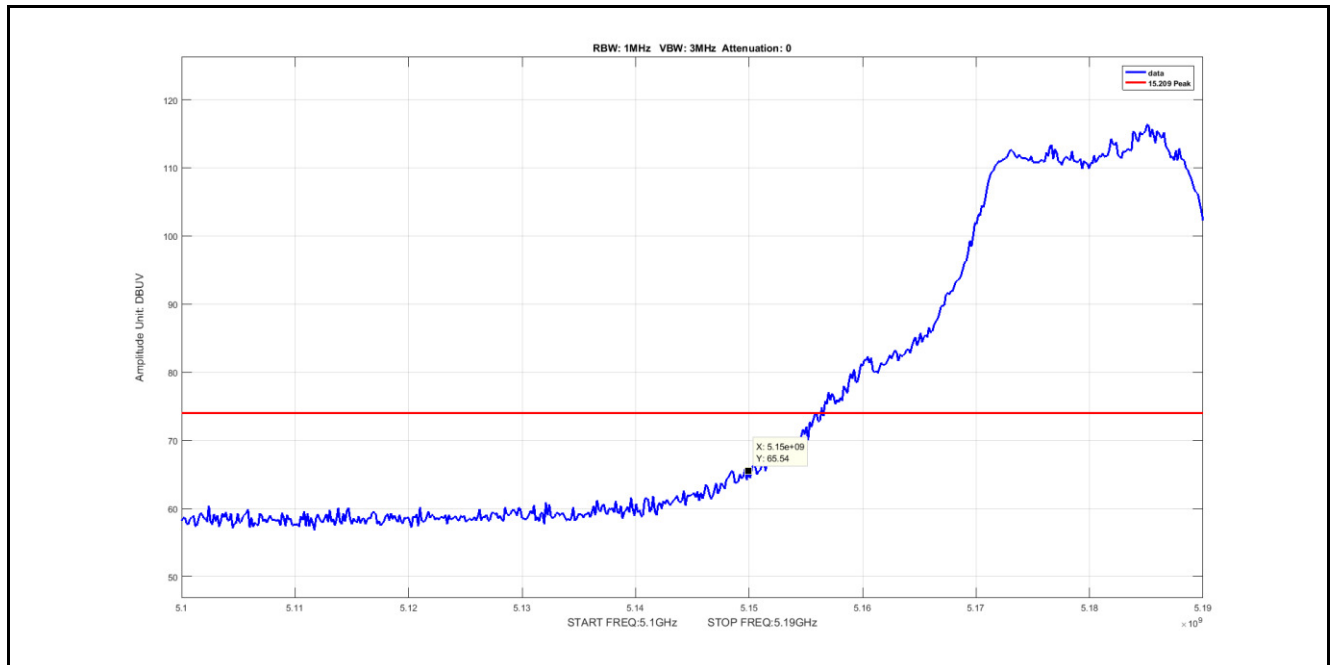

Plot 134. Radiated Band Edge, 802.11n 20 MHz, Channel 5180 MHz, 4x8, Peak

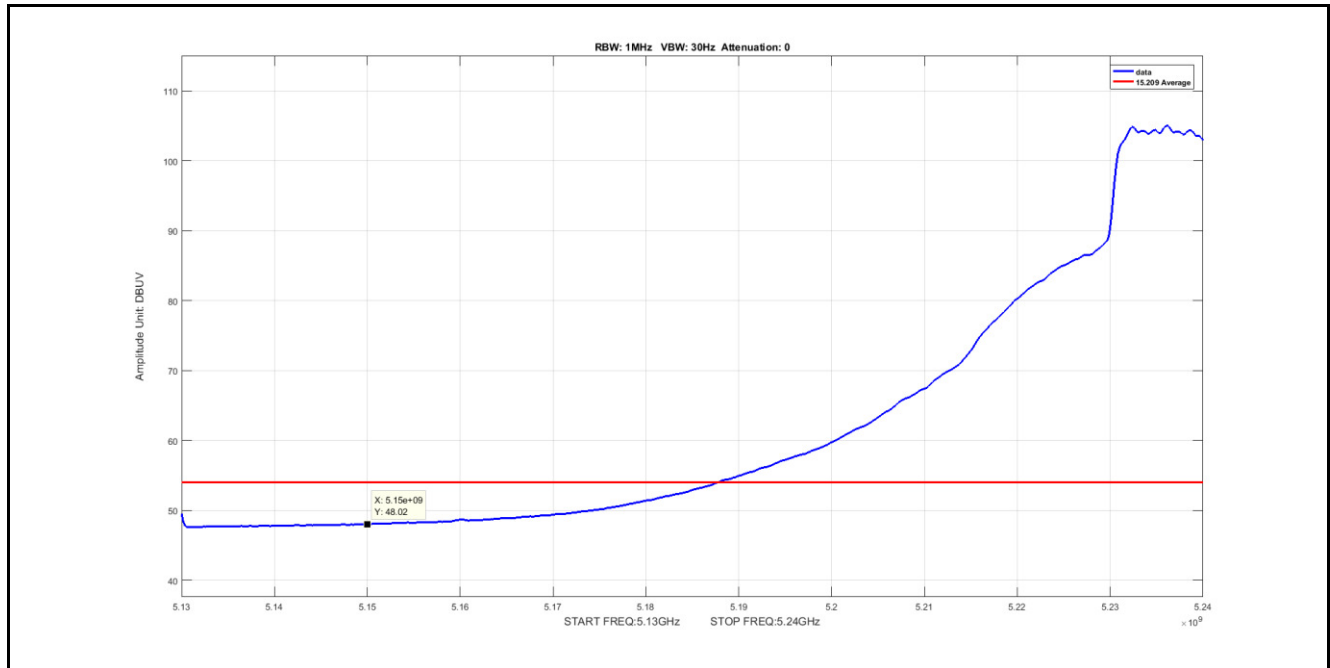


Plot 135. Radiated Band Edge, 802.11n 20 MHz, Channel 5240 MHz, 4x8, Average, MCS0

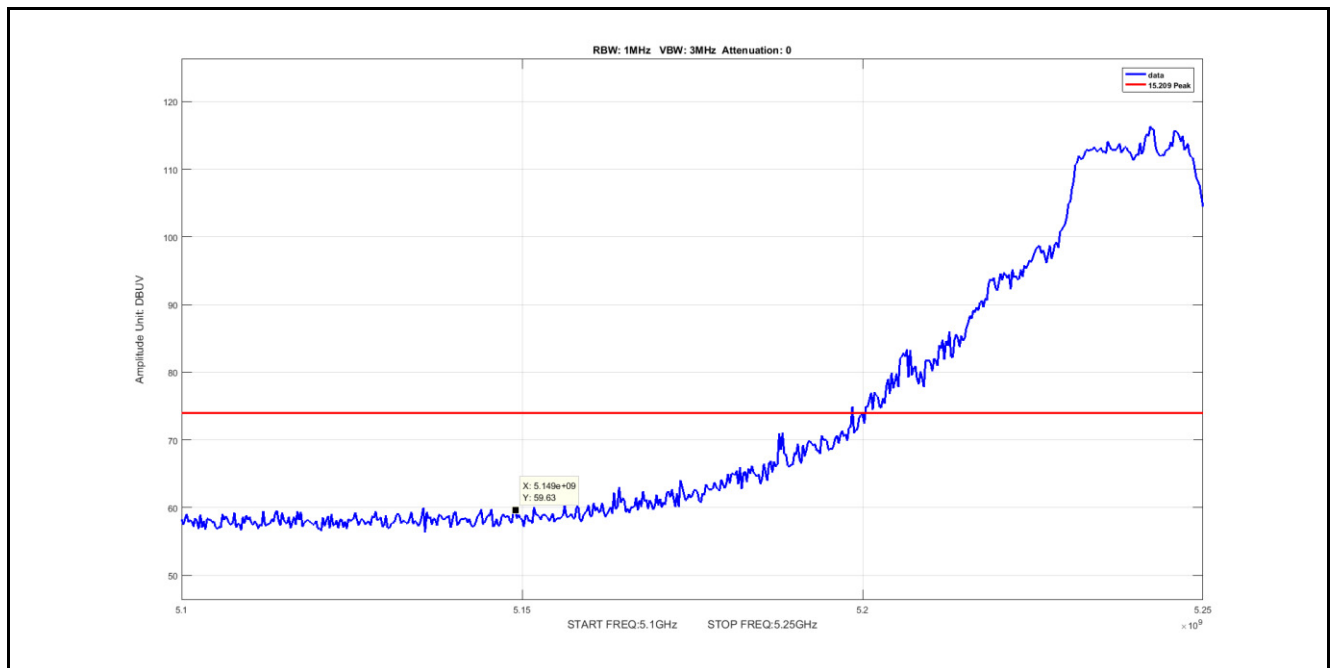


Plot 136. Radiated Band Edge, 802.11n 20 MHz, Channel 5240 MHz, 4x8, Peak


Radiated Band Edge, 802.11n 40 MHz, 4x8

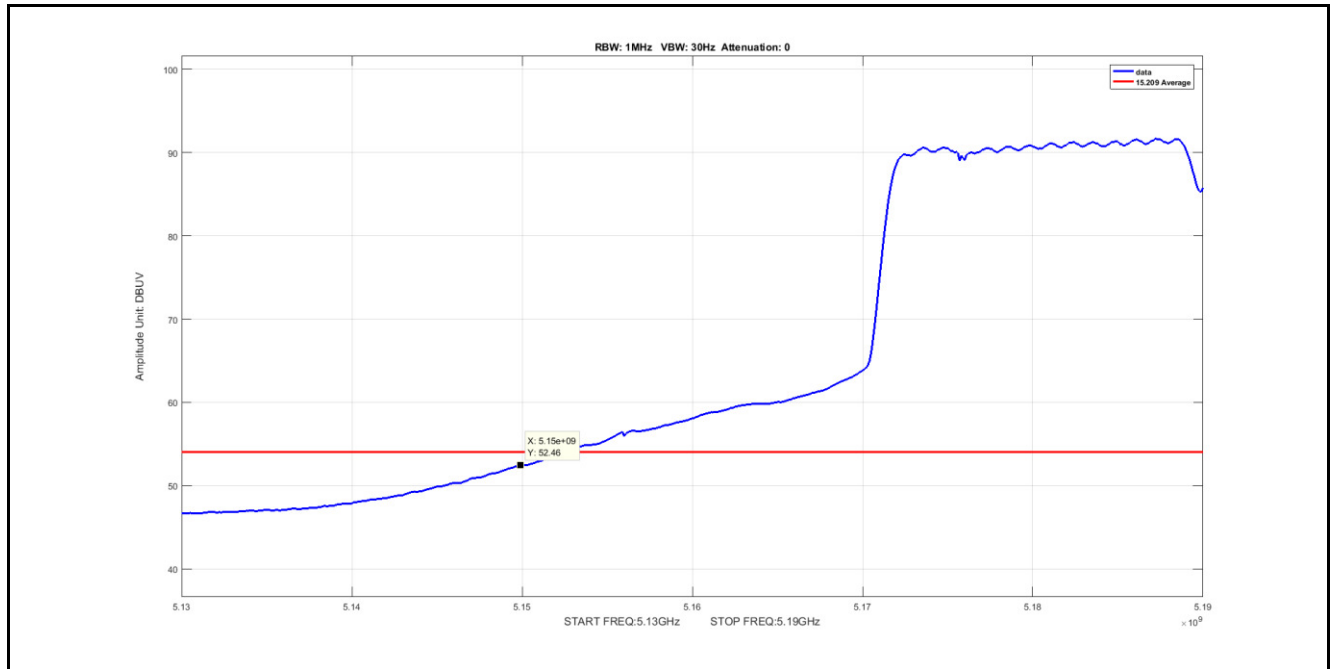


Plot 137. Radiated Band Edge, 802.11n 40 MHz, Channel 5190 MHz, 4x8, Average, MCS0

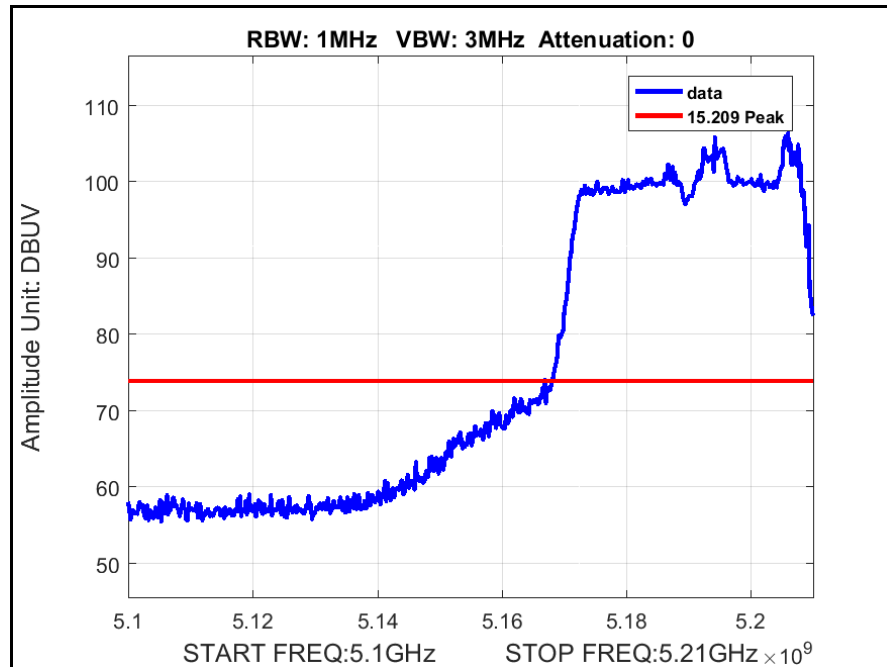

Plot 138. Radiated Band Edge, 802.11n 40 MHz, Channel 5190 MHz, 4x8, Peak, MCS0, P17-15

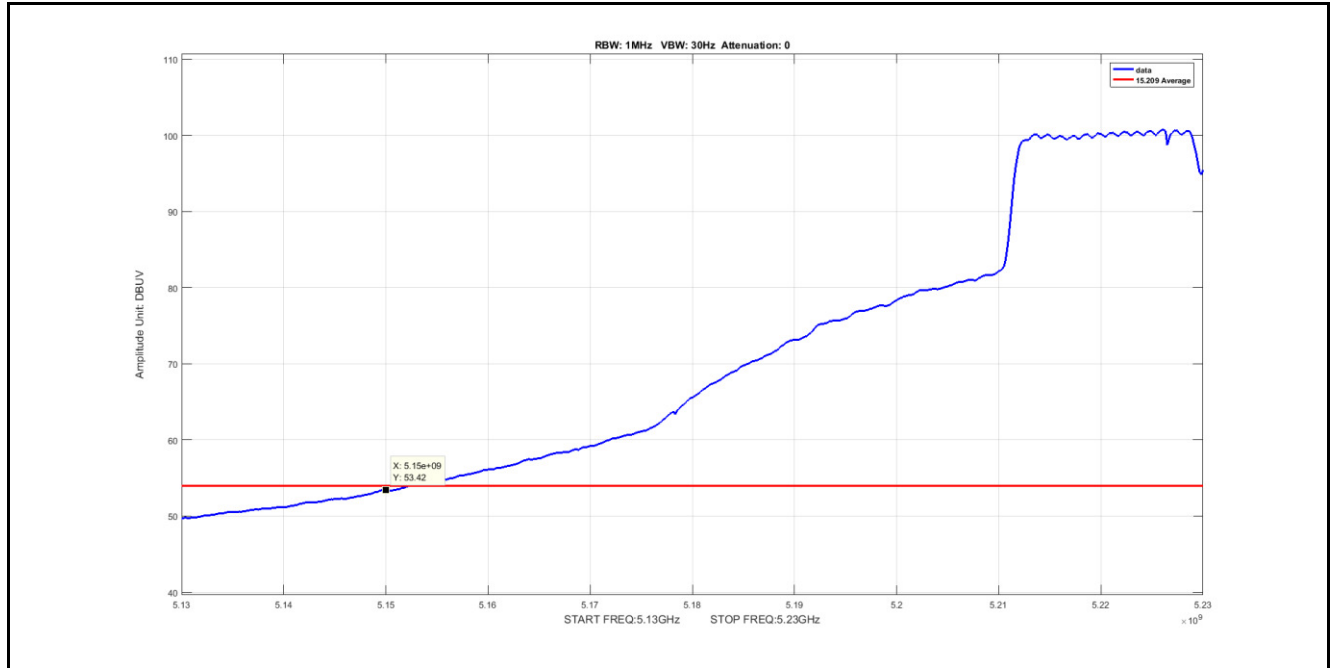


Plot 139. Radiated Band Edge, 802.11n 40 MHz, Channel 5230 MHz, 4x8, Average, MCS0

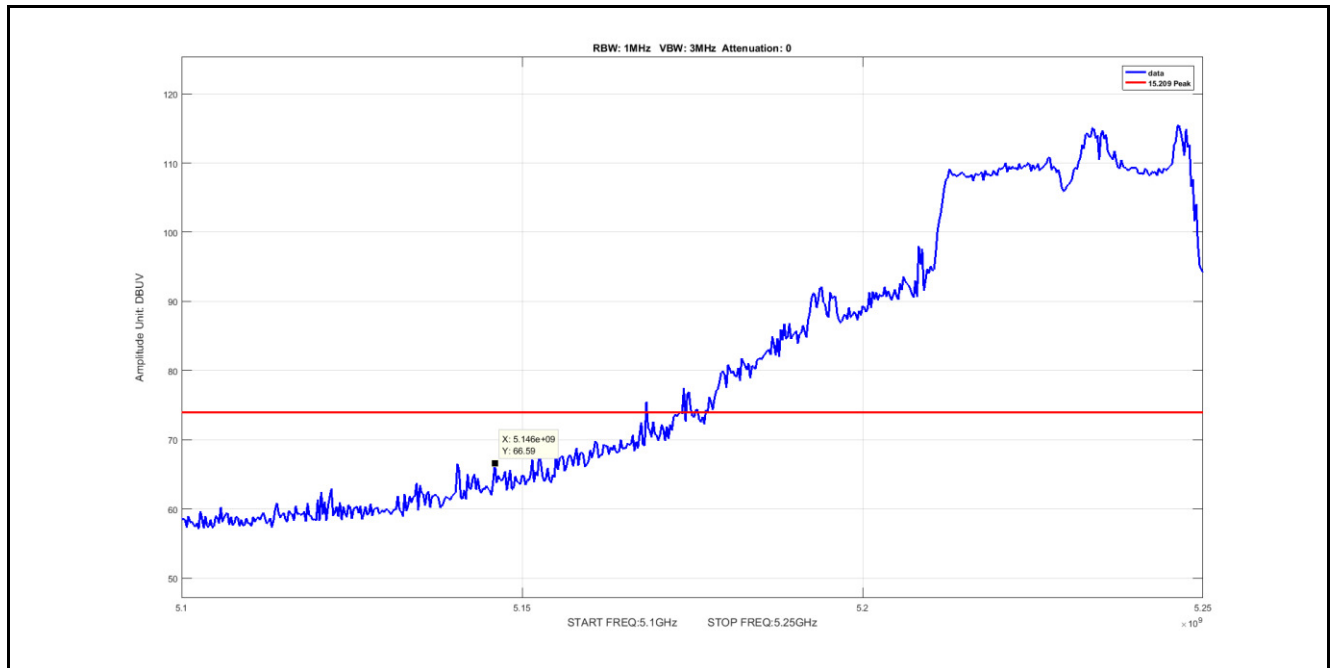


Plot 140. Radiated Band Edge, 802.11n 40 MHz, Channel 5230 MHz, 4x8, Peak, MCS0


Radiated Band Edge, 802.11a, 8x8

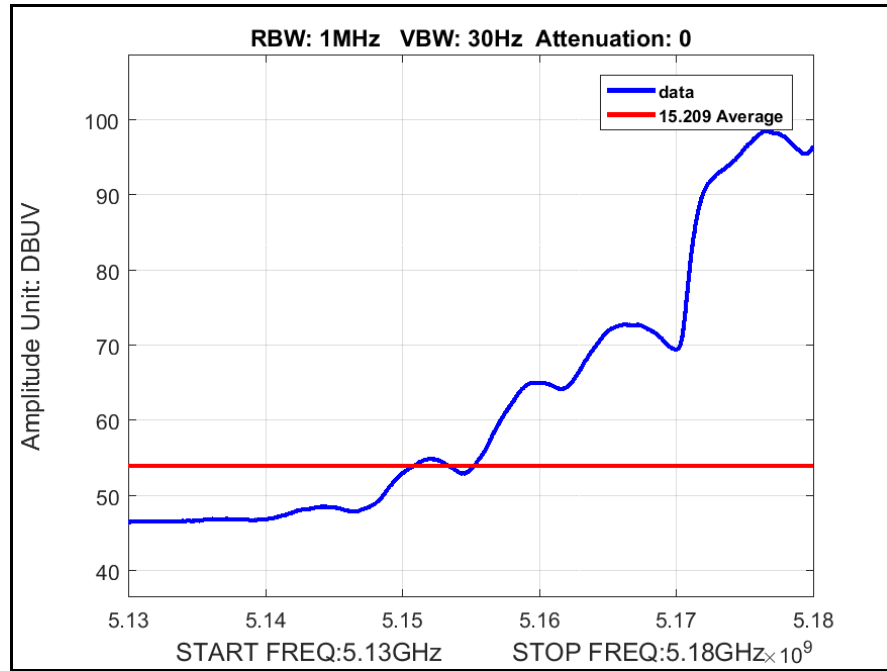


Plot 141. Radiated Band Edge, 802.11a, Channel 5180 MHz, 8x8, Average

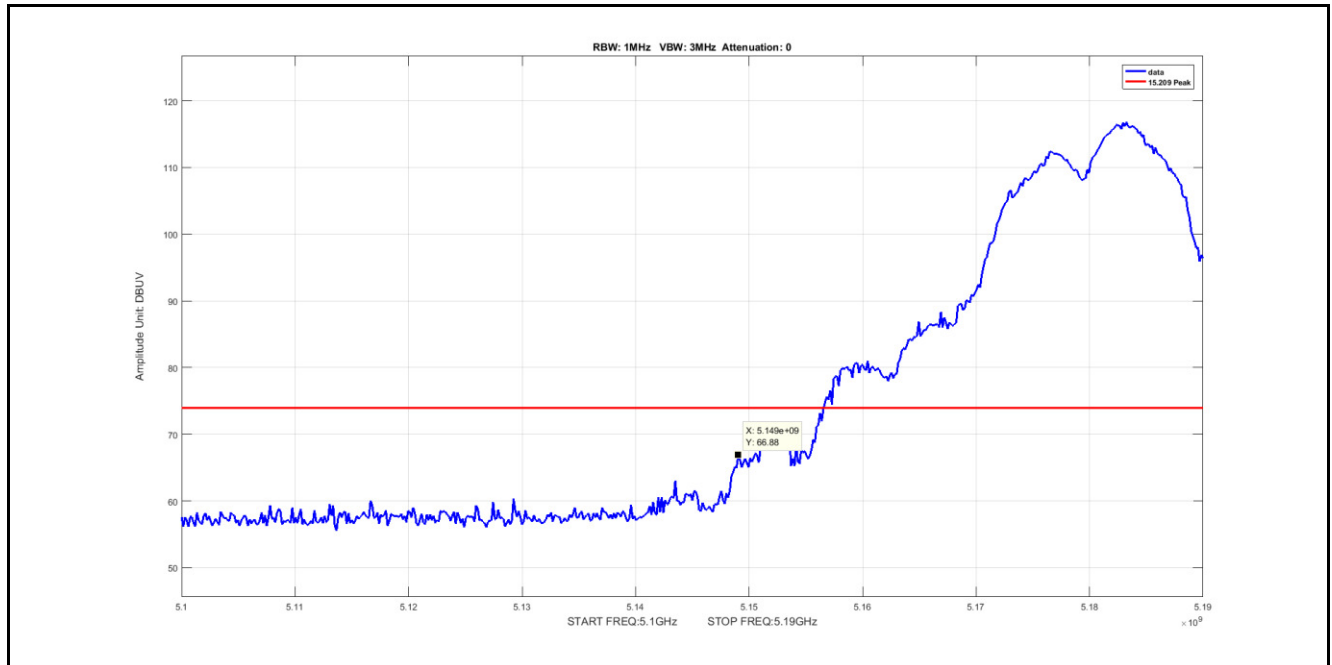

Plot 142. Radiated Band Edge, 802.11a, Channel 5180 MHz, 8x8, Peak

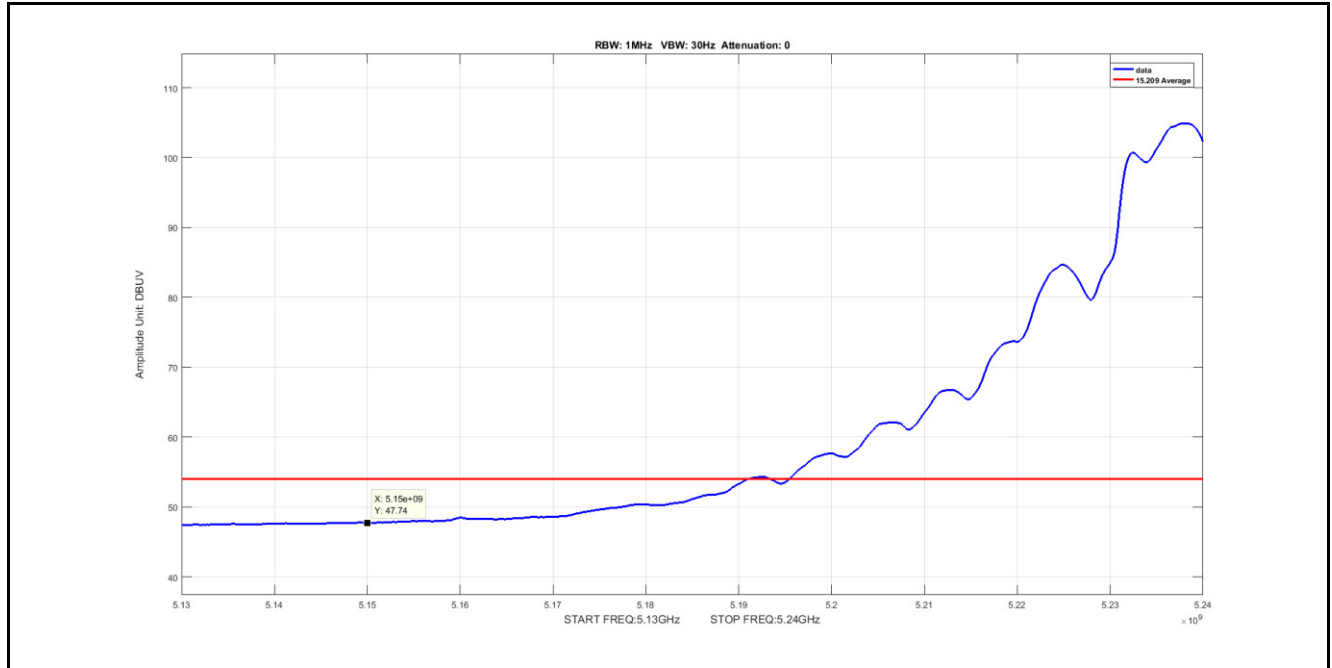


Plot 143. Radiated Band Edge, 802.11a, Channel 5240 MHz, 8x8, Average

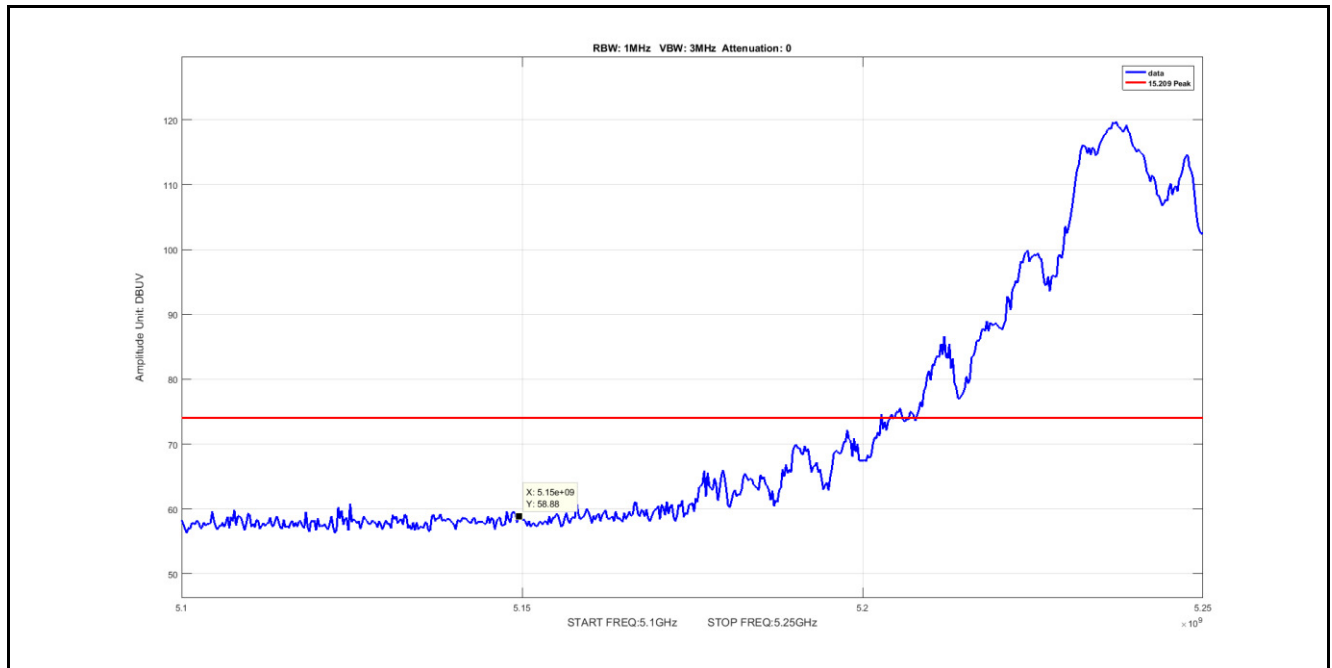


Plot 144. Radiated Band Edge, 802.11a, Channel 5240 MHz, 8x8, Peak


Radiated Band Edge, 802.11ac 20 MHz, 8x8

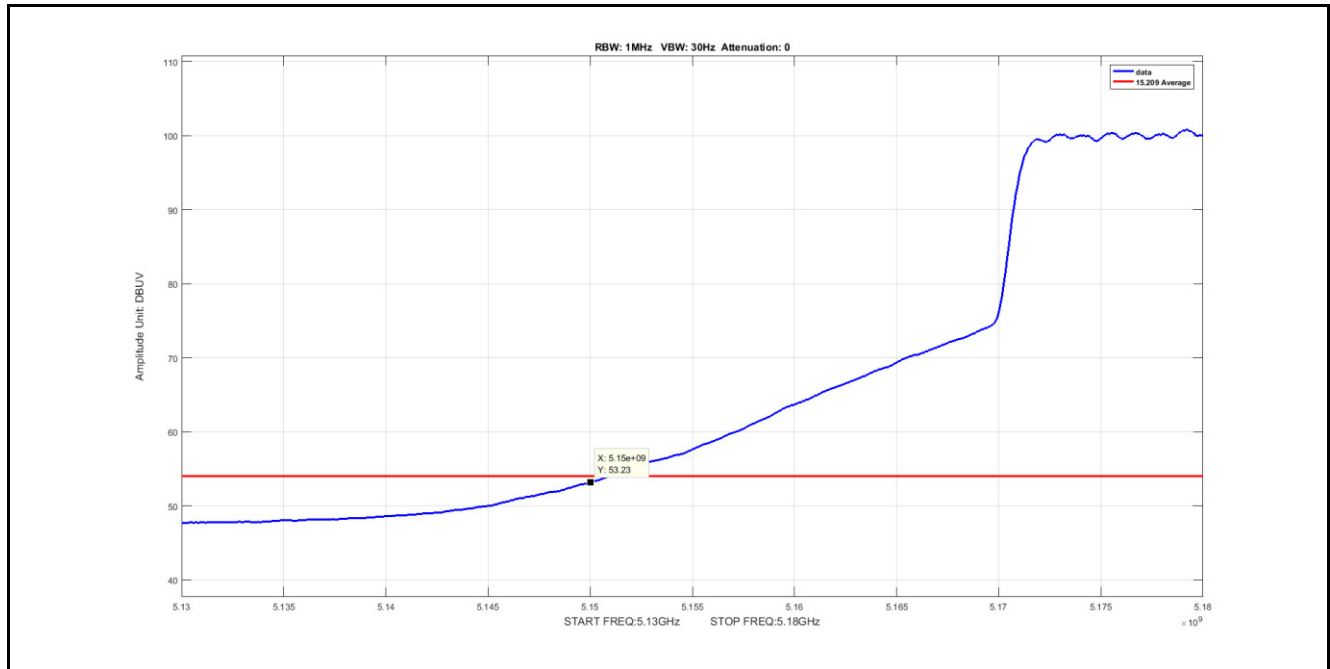


Plot 145. Radiated Band Edge, 802.11ac 20 MHz, Channel 5180 MHz, 8x8, Average

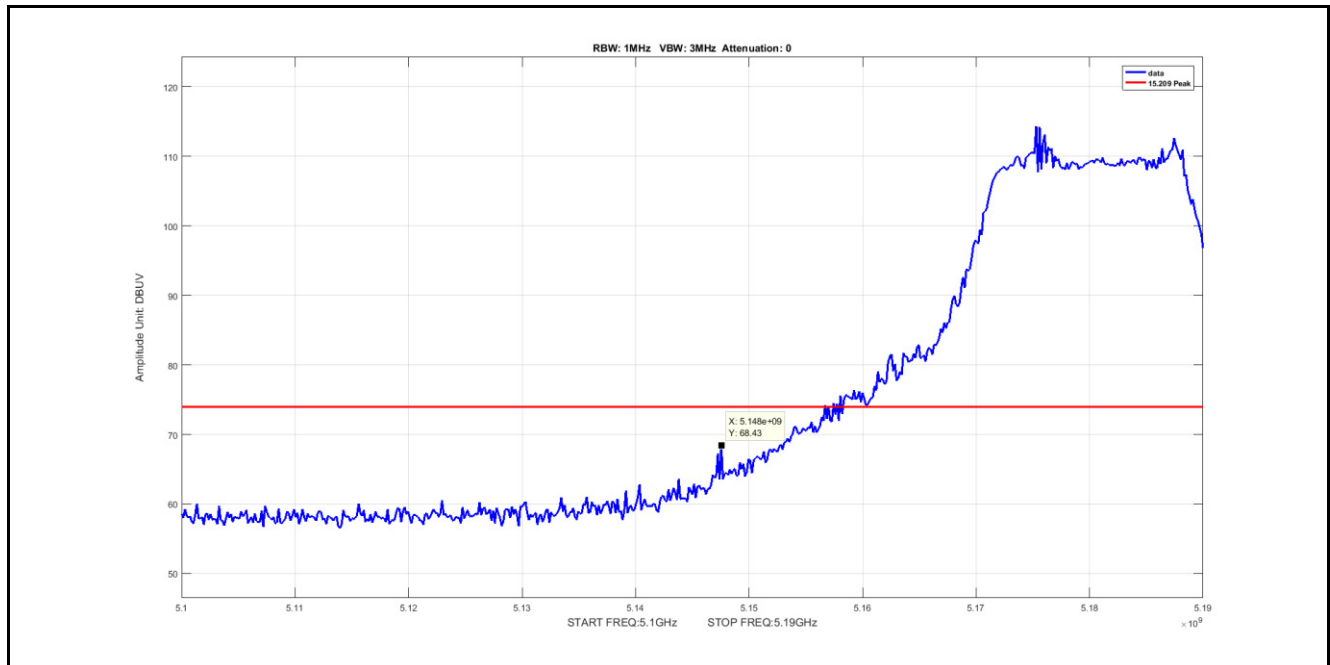

Plot 146. Radiated Band Edge, 802.11ac 20 MHz, Channel 5180 MHz, 8x8, Peak

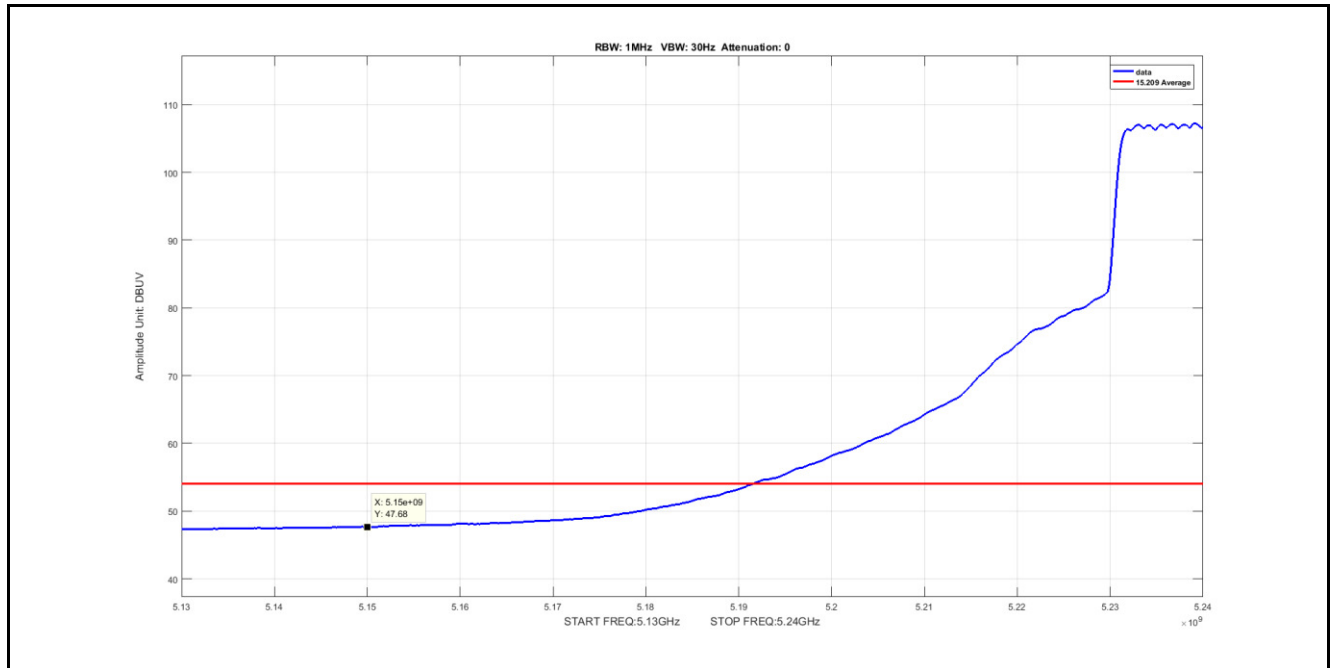


Plot 147. Radiated Band Edge, 802.11ac 20 MHz, Channel 5240 MHz, 8x8, Average

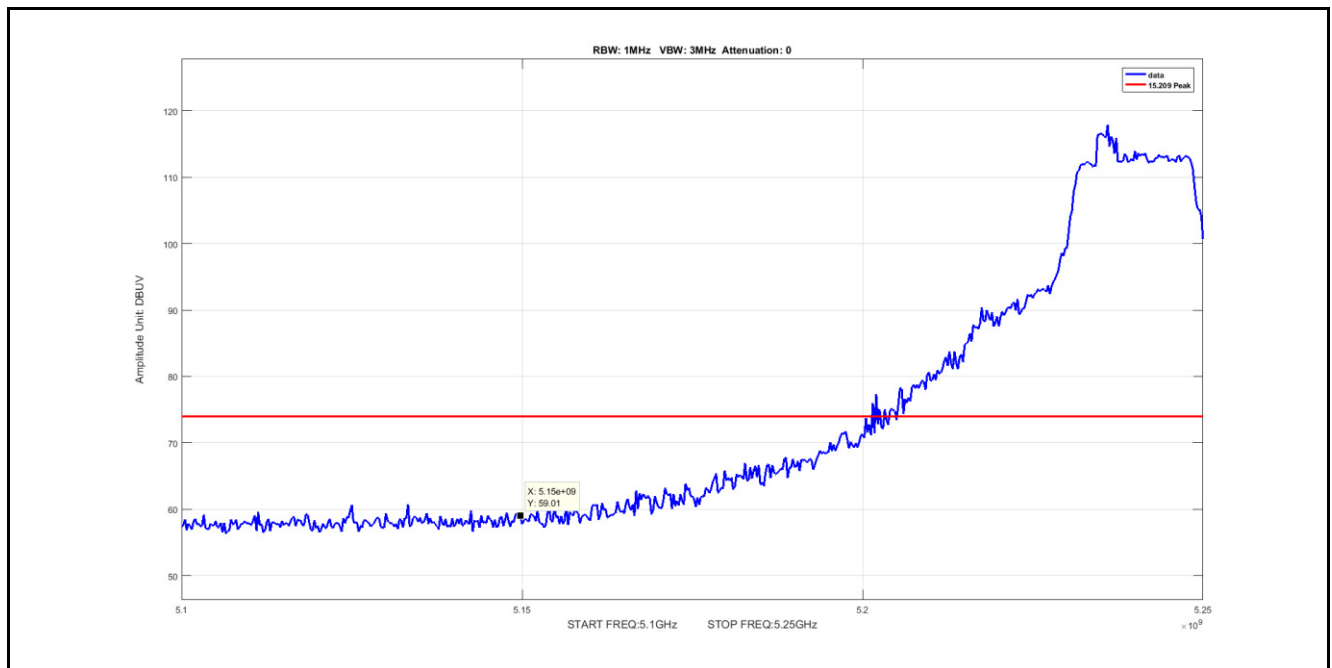


Plot 148. Radiated Band Edge, 802.11ac 20 MHz, Channel 5240 MHz, 8x8, Peak


Radiated Band Edge, 802.11ac 40 MHz, 8x8

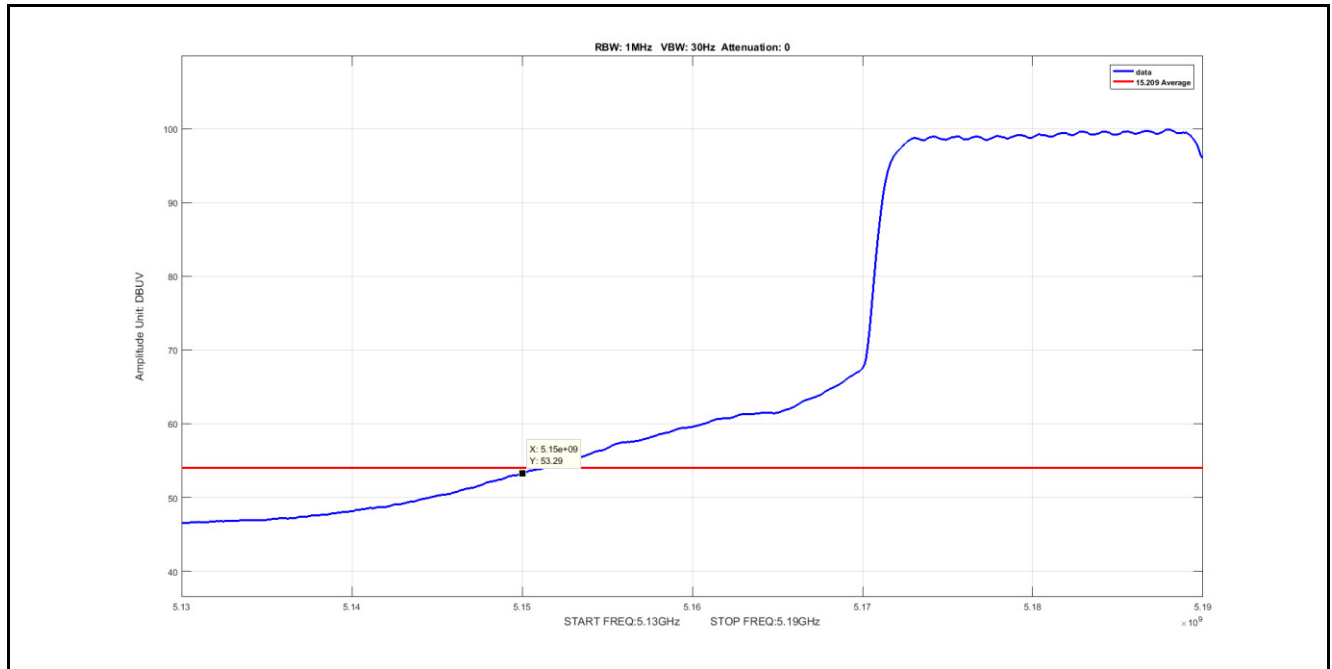


Plot 149. Radiated Band Edge, 802.11ac 40 MHz, Channel 5190 MHz, 8x8, Average, MCS0 NSS1

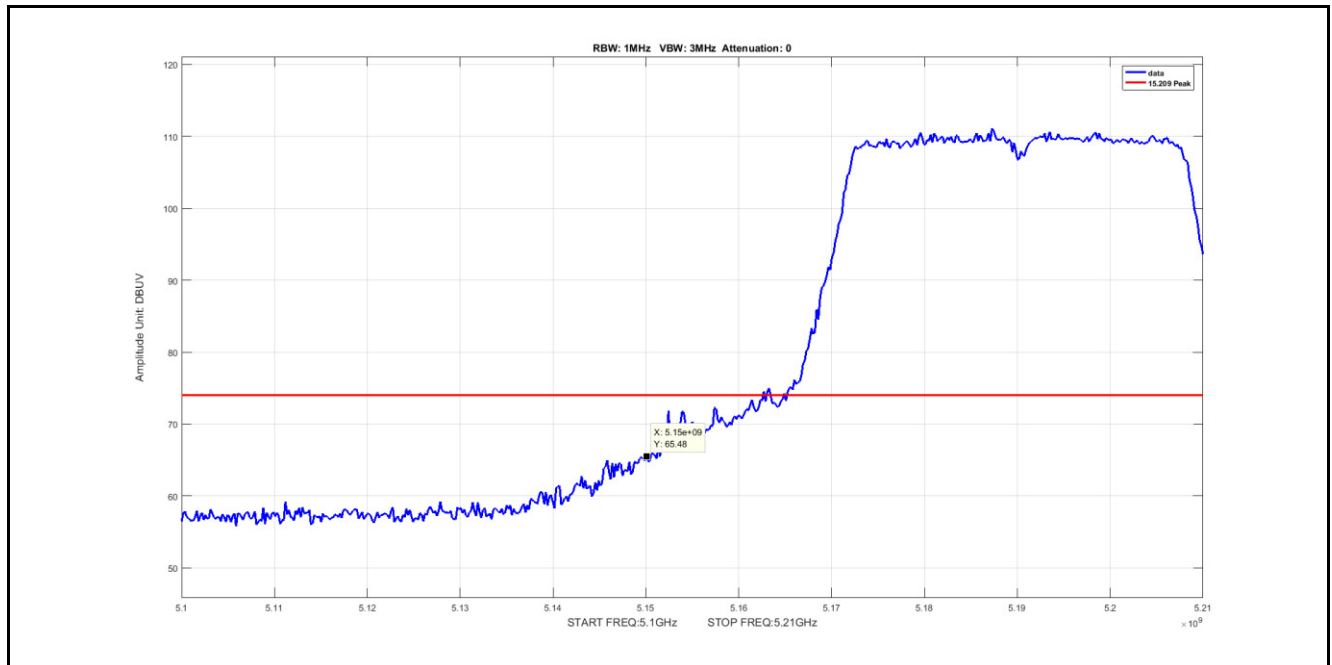

Plot 150. Radiated Band Edge, 802.11ac 40 MHz, Channel 5190 MHz, 8x8, Peak, MCS0 NSS1

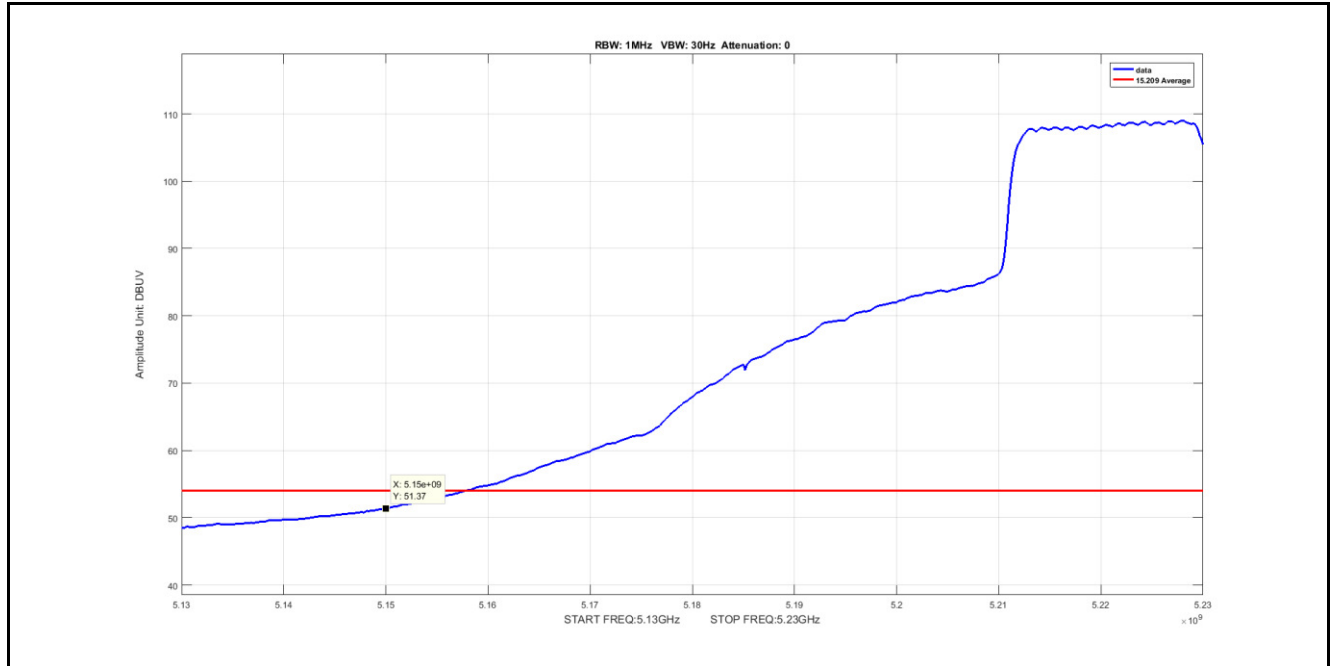


Plot 151. Radiated Band Edge, 802.11ac 40 MHz, Channel 5230 MHz, 8x8, Average, MCS0 NSS1

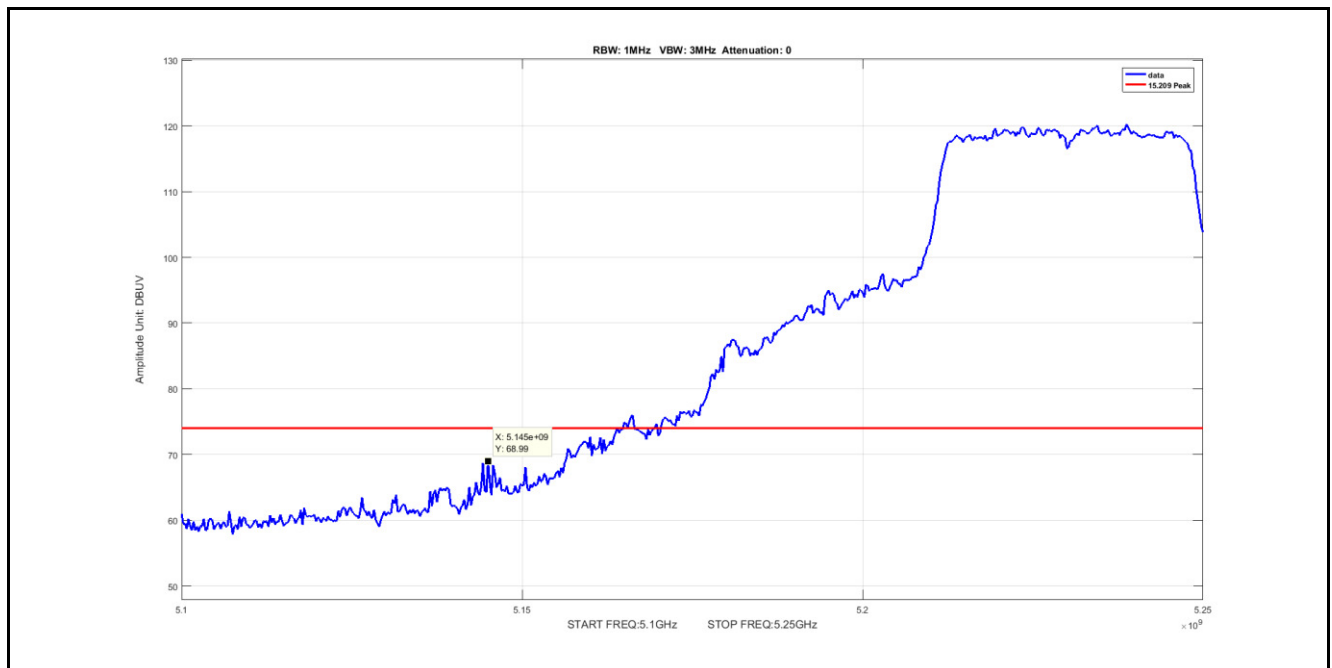


Plot 152. Radiated Band Edge, 802.11ac 40 MHz, Channel 5230 MHz, 8x8, Peak, MCS0 NSS1

Radiated Band Edge, 802.11ac 80 MHz, 8x8

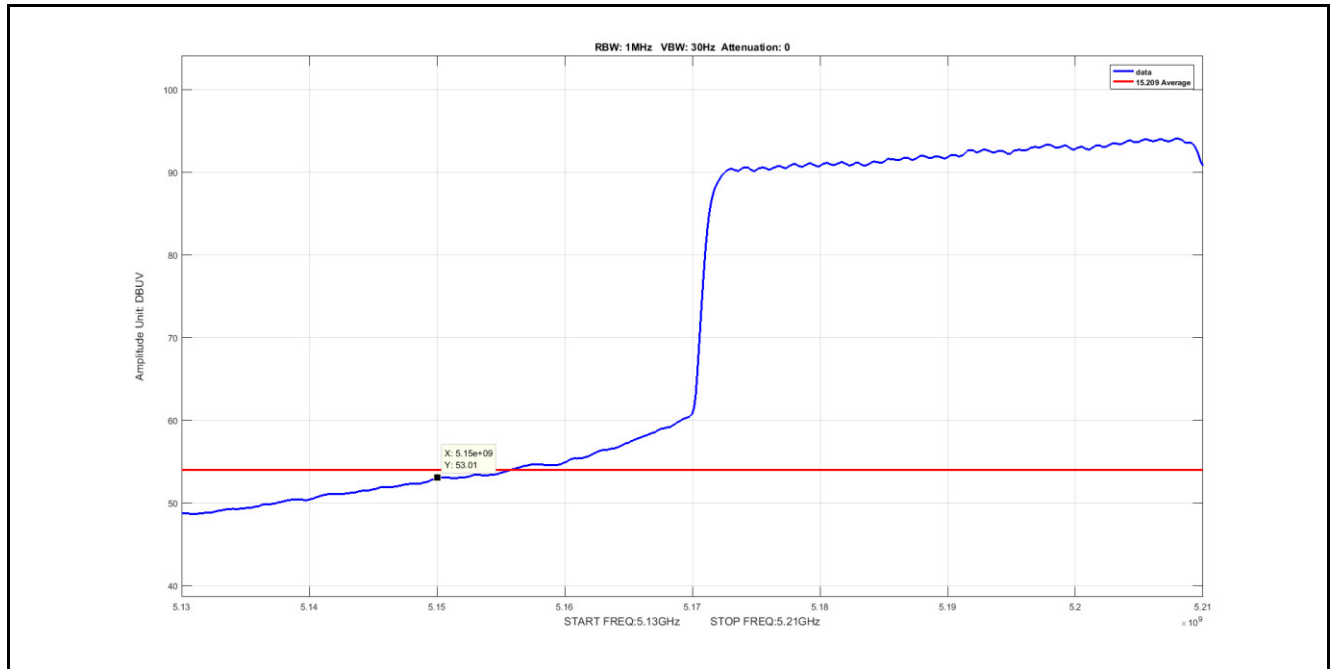


Plot 153. Radiated Band Edge, 802.11ac 80 MHz, Channel 5210 MHz, 8x8, Average, MCS0 NSS1

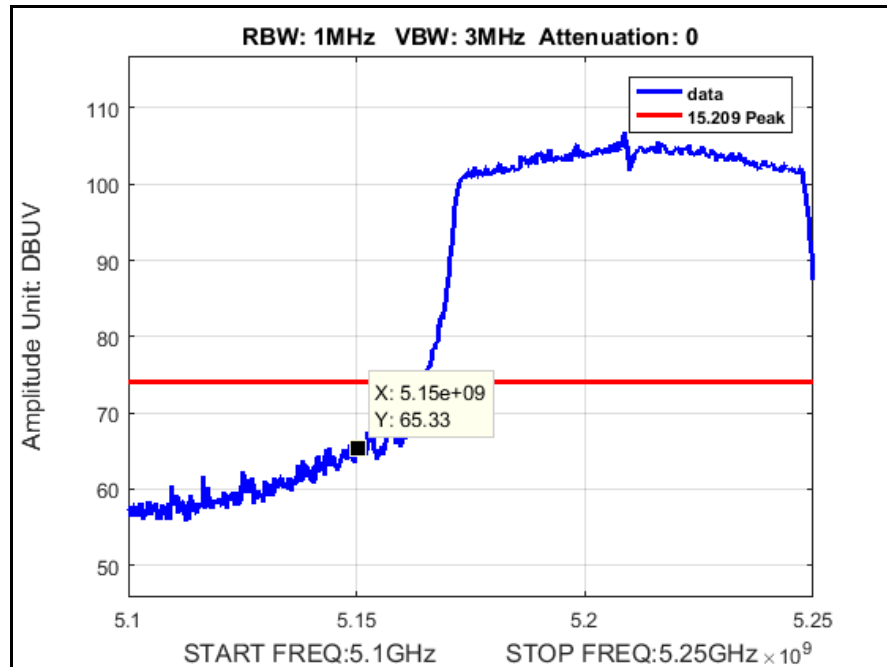


Plot 154. Radiated Band Edge, 802.11ac 80 MHz, Channel 5210 MHz, 8x8, Peak, MCS0 NSS1


Radiated Band Edge, 802.11n 20 MHz, 8x8

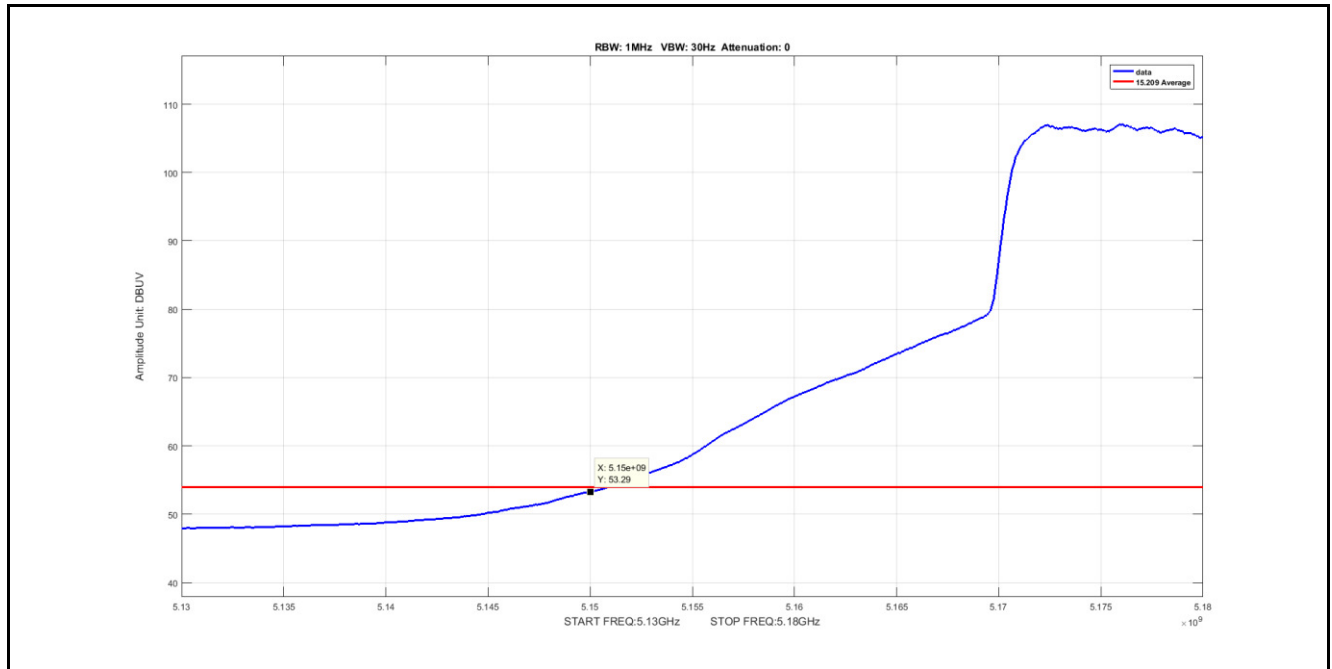


Plot 155. Radiated Band Edge, 802.11n 20 MHz, Channel 5180 MHz, 8x8, Average, NSS1

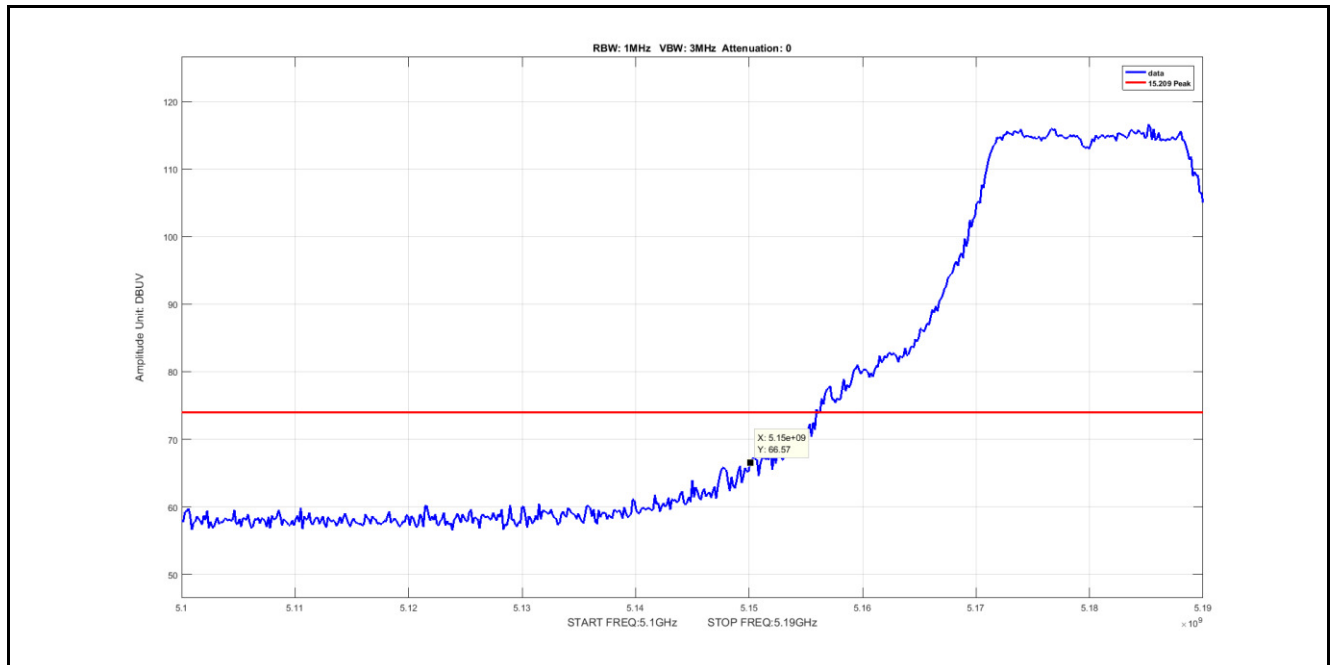

Plot 156. Radiated Band Edge, 802.11n 20 MHz, Channel 5180 MHz, 8x8, Peak, NSS1

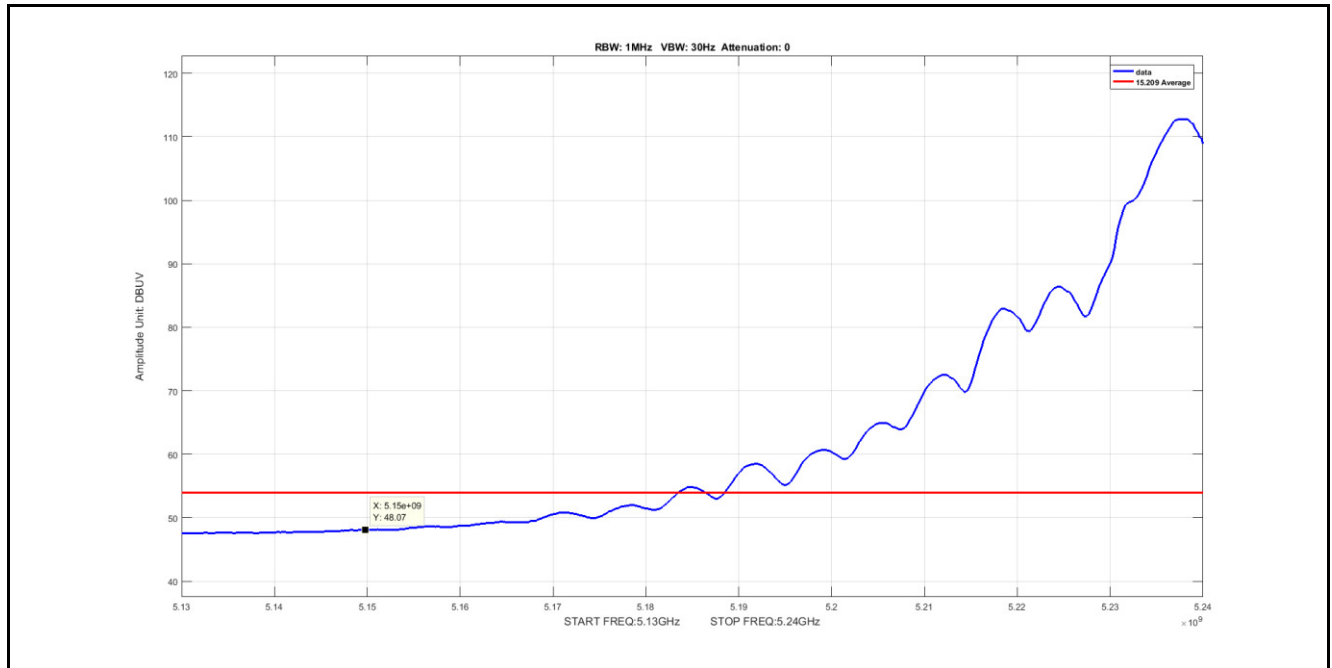


Plot 157. Radiated Band Edge, 802.11n 20 MHz, Channel 5240 MHz, 8x8, Average, NSS1

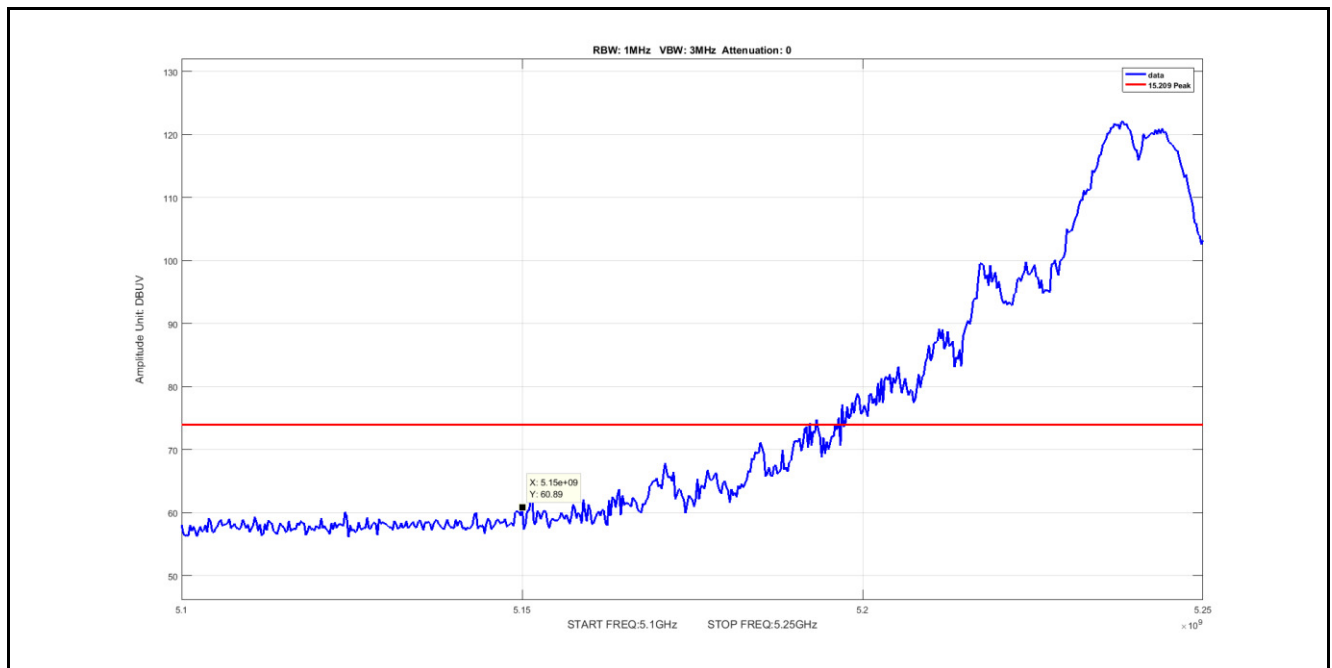


Plot 158. Radiated Band Edge, 802.11n 20 MHz, Channel 5240 MHz, 8x8, Peak, NSS1


Radiated Band Edge, 802.11n 40 MHz, 8x8

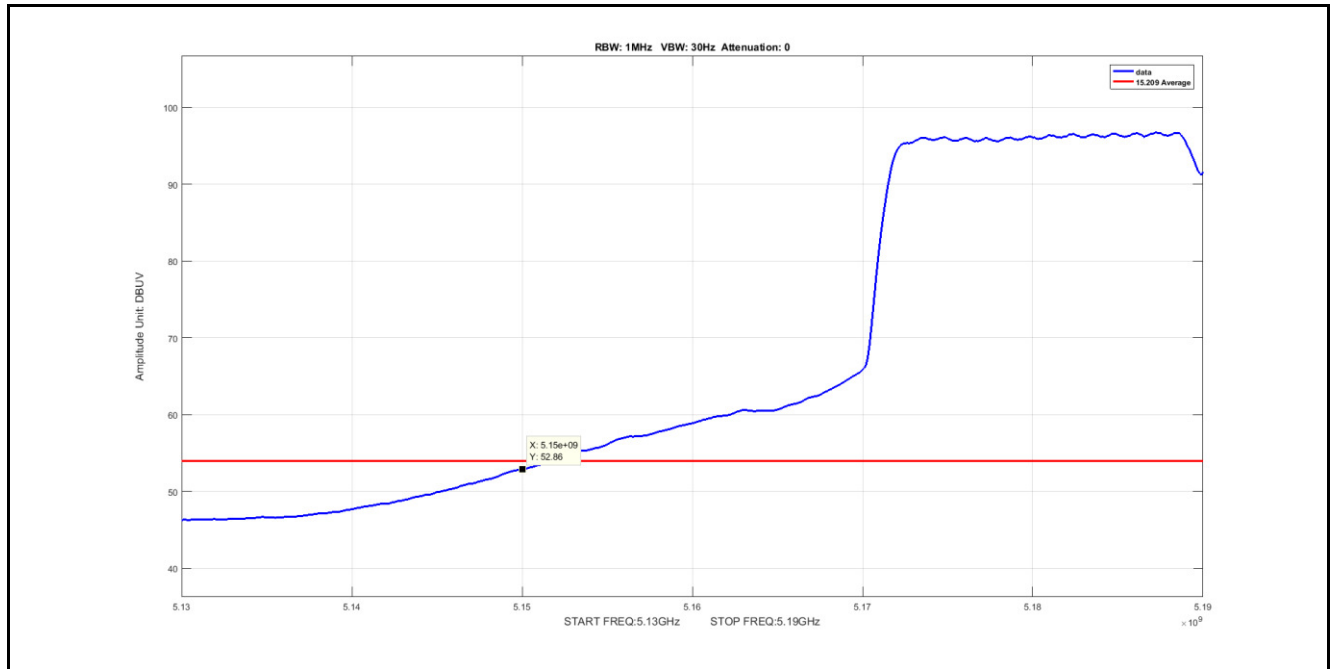


Plot 159. Radiated Band Edge, 802.11n 40 MHz, Channel 5190 MHz, 8x8, Average, MCS0 NSS1

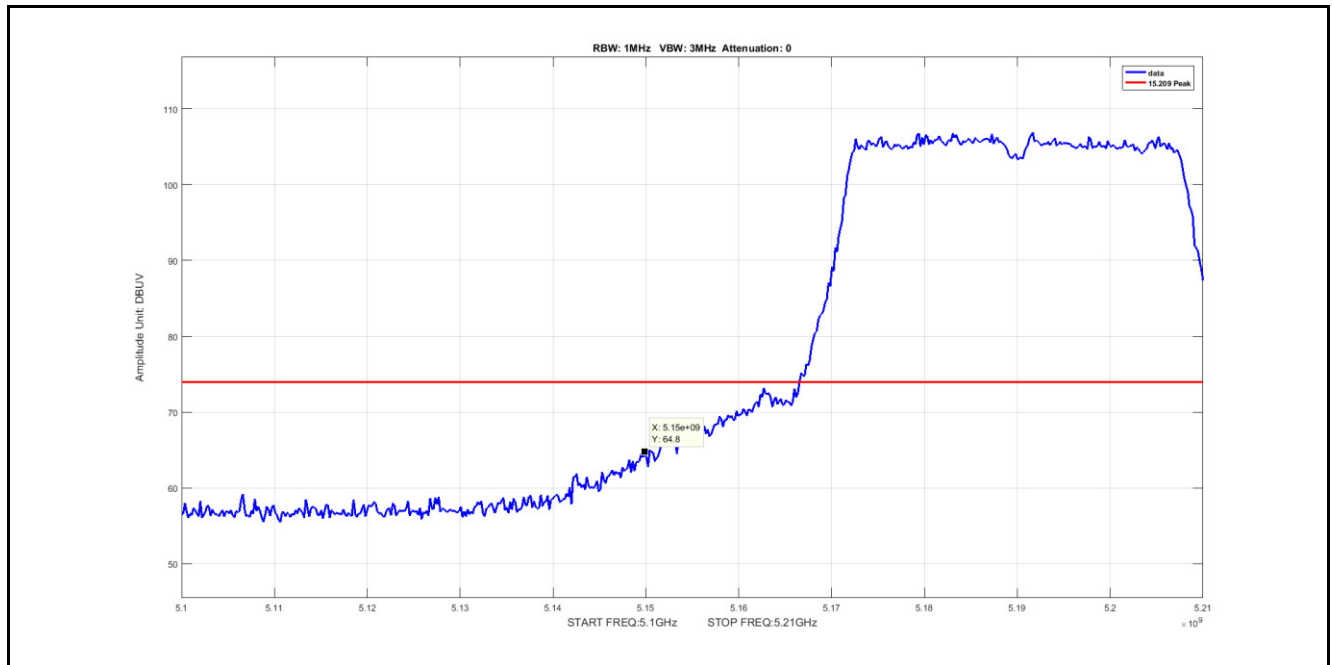

Plot 160. Radiated Band Edge, 802.11n 40 MHz, Channel 5190 MHz, 8x8, Peak, MCS0 NSS1

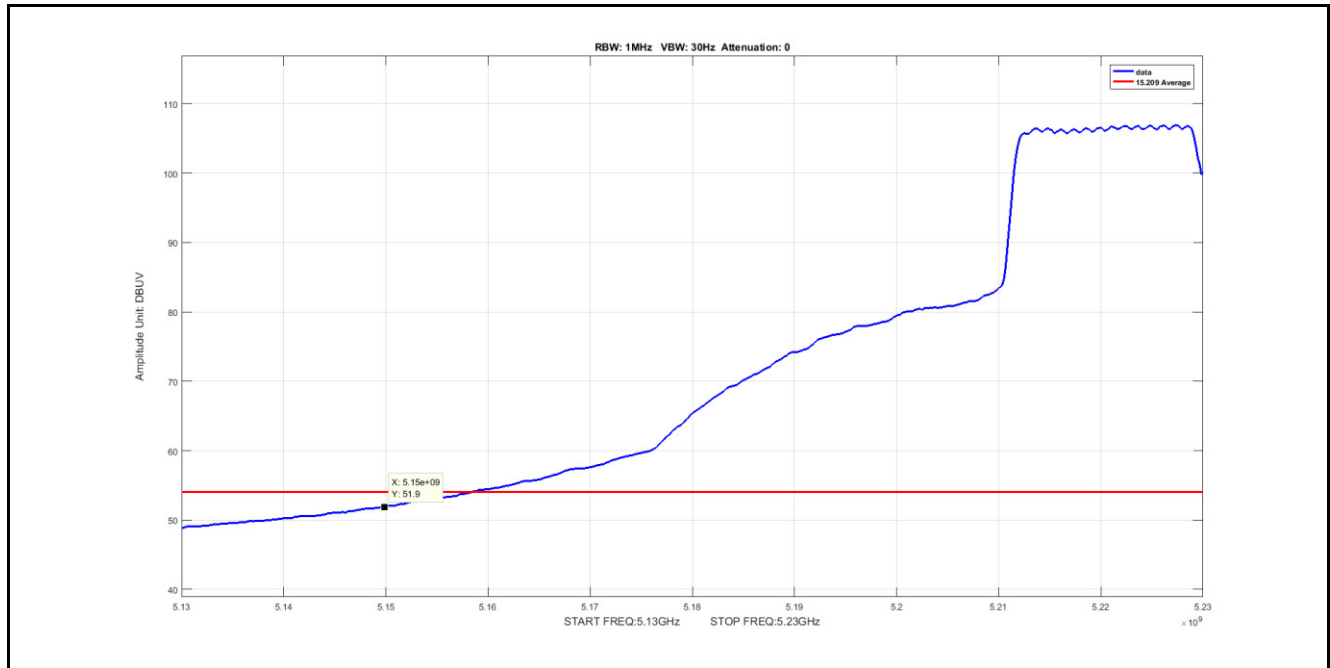

Plot 161. Radiated Band Edge, 802.11n 40 MHz, Channel 5230 MHz, 8x8, Average, MCS0 NSS1

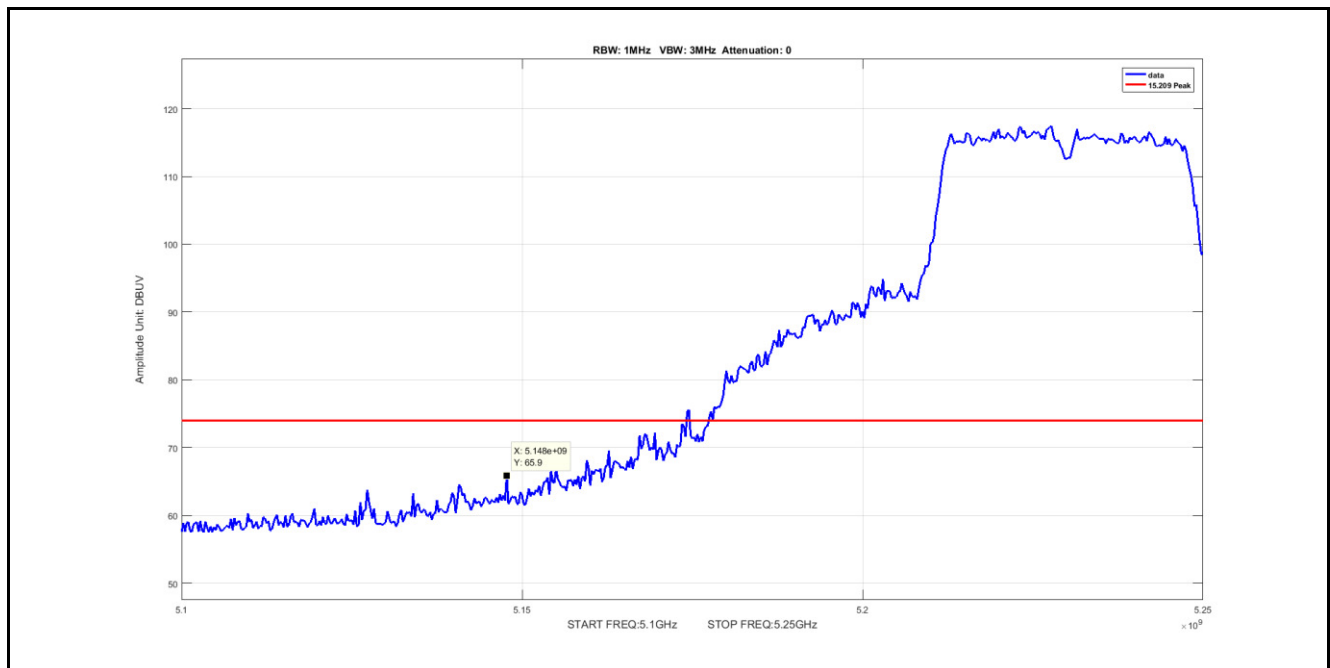

Plot 162. Radiated Band Edge, 802.11n 40 MHz, Channel 5230 MHz, 8x8, Peak, MCS0 NSS1

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(b)(6) Conducted Emissions

Test Requirement(s): § 15.407 (b)(6): Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

§ 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Σ line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 – 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 12. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a non-metallic table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-2014 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz". Scans were performed with the transmitter on.

Test Results: The EUT was compliant with requirements of this section.


Test Engineer(s): Hadid Jones

Test Date(s): 08/21/16

15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBμV) QP	Cable Loss (dB)	Corrected Measurement (dBμV) QP	Limit (dBμV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBμV) Avg.	Cable Loss (dB)	Corrected Measurement (dBμV) AVG	Limit (dBμV) AVG	Margin (dB) AVG
0.3	46.23	0	46.23	60.24	-14.01	29.56	0	29.56	50.24	-20.68
2.504	47.3	0	47.3	56	-8.7	35.11	0	35.11	46	-10.89
6.6	48.26	0	48.26	60	-11.74	37.59	0	37.59	50	-12.41
20.68	52.32	0	52.32	60	-7.68	46.24	0	46.24	50	-3.76
23.99	46.05	0	46.05	60	-13.95	39.54	0	39.54	50	-10.46
27.32	41.89	0	41.89	60	-18.11	36.44	0	36.44	50	-13.56


Table 13. Conducted Emissions, 15.207(a), Neutral Line, Test Results

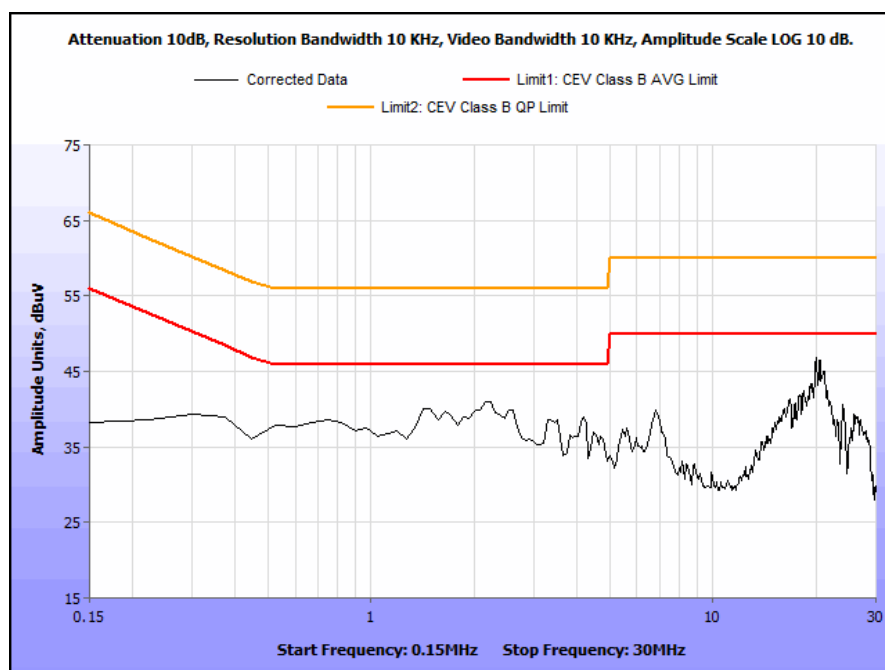

Plot 163. Conducted Emissions, Neutral Line

Frequency (MHz)	Uncorrected Meter Reading (dBμV) QP	Cable Loss (dB)	Corrected Measurement (dBμV) QP	Limit (dBμV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBμV) Avg.	Cable Loss (dB)	Corrected Measurement (dBμV) AVG	Limit (dBμV) AVG	Margin (dB) AVG
0.155	58.48	0	58.48	65.73	-7.25	51.78	0	51.78	55.73	-3.95
2.53	49.96	0	49.96	56	-6.04	37.71	0	37.71	46	-8.29
6.79	48.6	0	48.6	60	-11.4	35.93	0	35.93	50	-14.07
20.18	51.66	0	51.66	60	-8.34	46.63	0	46.63	50	-3.37
24.5	40.2	0	40.2	60	-19.8	35.44	0	35.44	50	-14.56
26.88	40.32	0	40.32	60	-19.68	34.78	0	34.78	50	-15.22

Table 14. Conducted Emissions, 15.207(a), Phase Line, Test Results

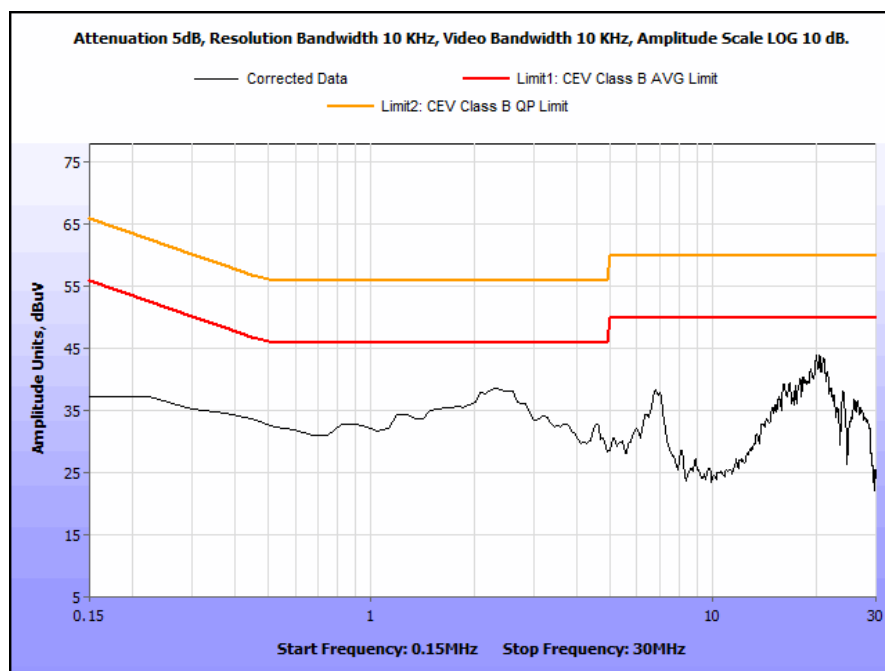

Plot 164. Conducted Emissions, Phase Line

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.407(f) Maximum Permissible Exposure

Test Requirement(s): §15.407(f): U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment.

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit: EUT’s operating frequencies @ 5150-5250 MHz; **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$
 where, S = Power Density (mW/cm²)
 P = Power Input to antenna (mW)
 G = Antenna Gain (numeric value)
 R = Distance (cm)

Test Results:

FCC									
Frequency (MHz)	Con. Pwr. (dBm)	Con. Pwr. (mW)	Ant. Gain (dBi)	Ant. Gain numeric	Pwr. Density (mW/cm ²)	Limit (mW/cm ²)	Margin	Distance (cm)	Result
5230	25.75	375.837	8.5	7.079	0.52933	1	0.47067	20	Pass

Table 15. MPE, 8x8

The safe distance where Power Density is less than the MPE Limit listed above was found to be 20 cm.

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	2/26/2016	8/26/2017
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	10/29/2014	10/29/2016
1T4818	COMB GENERATOR	COM-POWER	CGO-520	SEE NOTE	
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	10/8/2015	4/8/2017
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T6658	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	12/9/2015	12/9/2016
1T4745	ANTENNA, HORN	ETS-LINDGREN	3116	6/27/2015	12/27/2016
1T4752	PRE-AMPLIFIER	MITEQ	JS44-18004000-35-8P	SEE NOTE	
1T4300A	SEMI-ANECHOIC CHAMBER # 1 (FCC)	EMC TEST SYSTEMS	NONE	1/31/2014	01/31/2017
1T4504	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	NOT REQUIRED	
1T4563	LISN (10 AMP)	SOLAR ELECTRONICS COMPANY	9322-50-R-10-BNC	8/27/2015	2/27/2017

Table 16. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information

Certification & User's Manual Information

L. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.