


Site: NS-AC1	Test Date: 2022-06-09
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_VULB9162	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

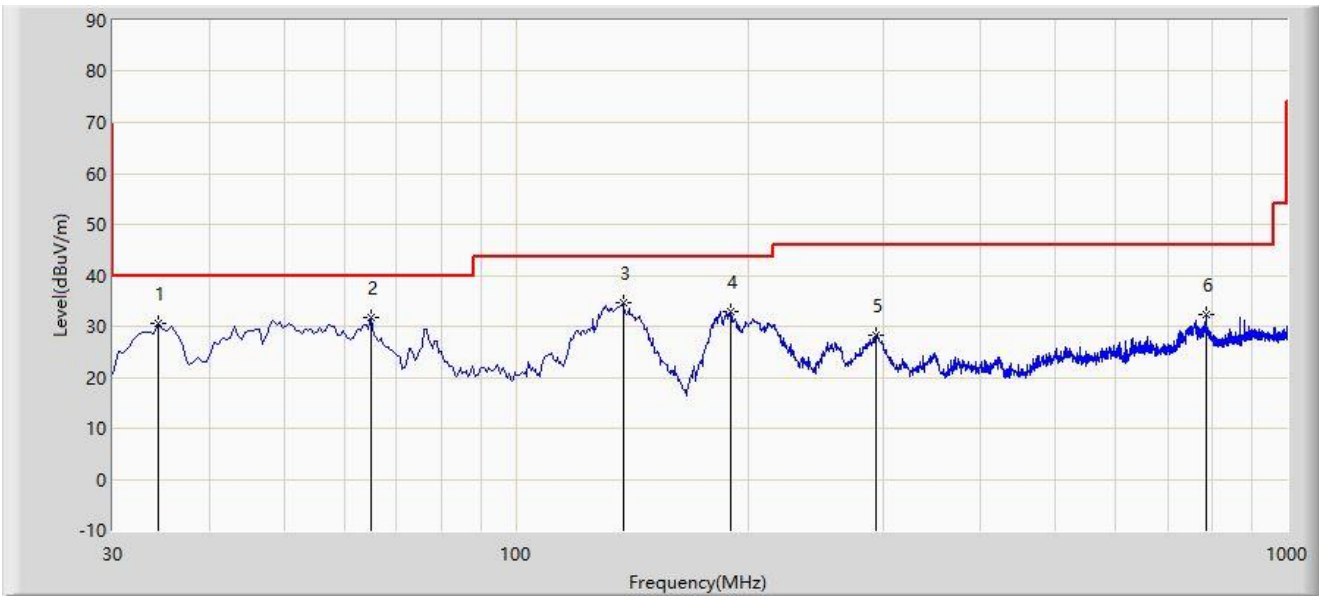

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		34.365	30.607	16.121	-9.393	40.000	14.486	PK
2	*	64.920	31.872	17.184	-8.128	40.000	14.688	PK
3		137.670	34.608	22.862	-8.892	43.500	11.746	PK
4		189.565	32.999	18.599	-10.501	43.500	14.400	PK
5		293.355	28.373	11.461	-17.627	46.000	16.912	PK
6		785.630	32.214	6.515	-13.786	46.000	25.699	PK

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)


Note 2: QP measurement was not performed when peak measure level was lower than the QP limit.

Note 3: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

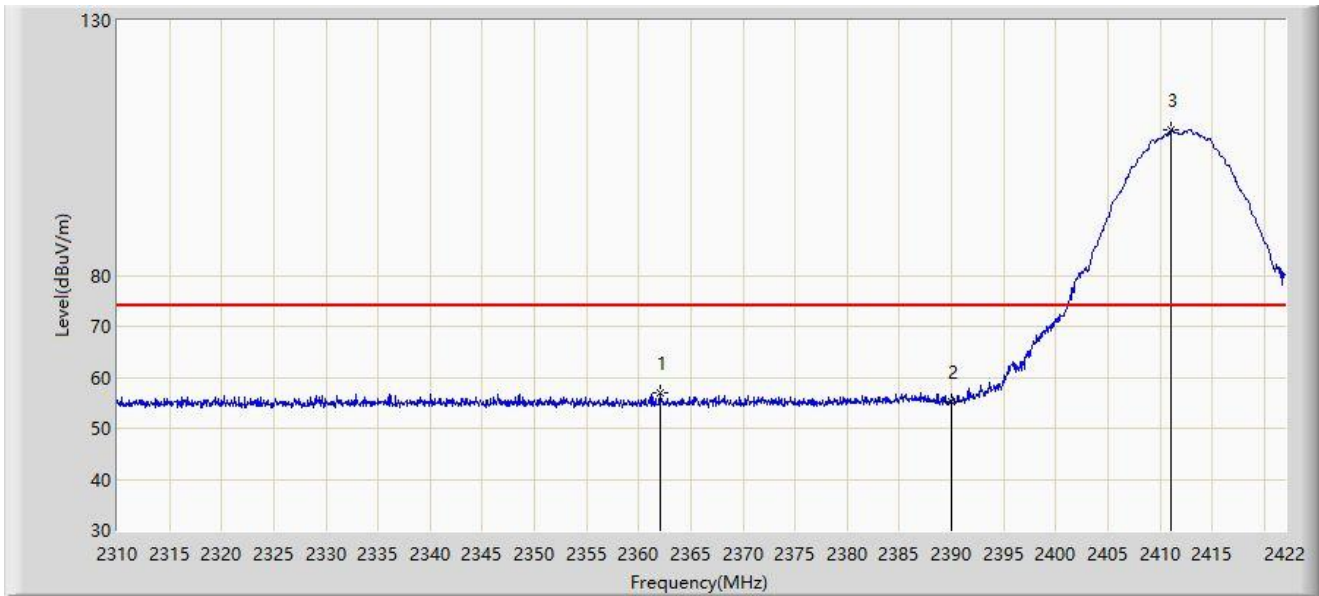


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2362.024	57.043	26.057	-16.957	74.000	30.986	PK
2		2390.000	55.239	24.322	-18.761	74.000	30.917	PK
3		2411.080	108.466	77.472	N/A	N/A	30.994	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

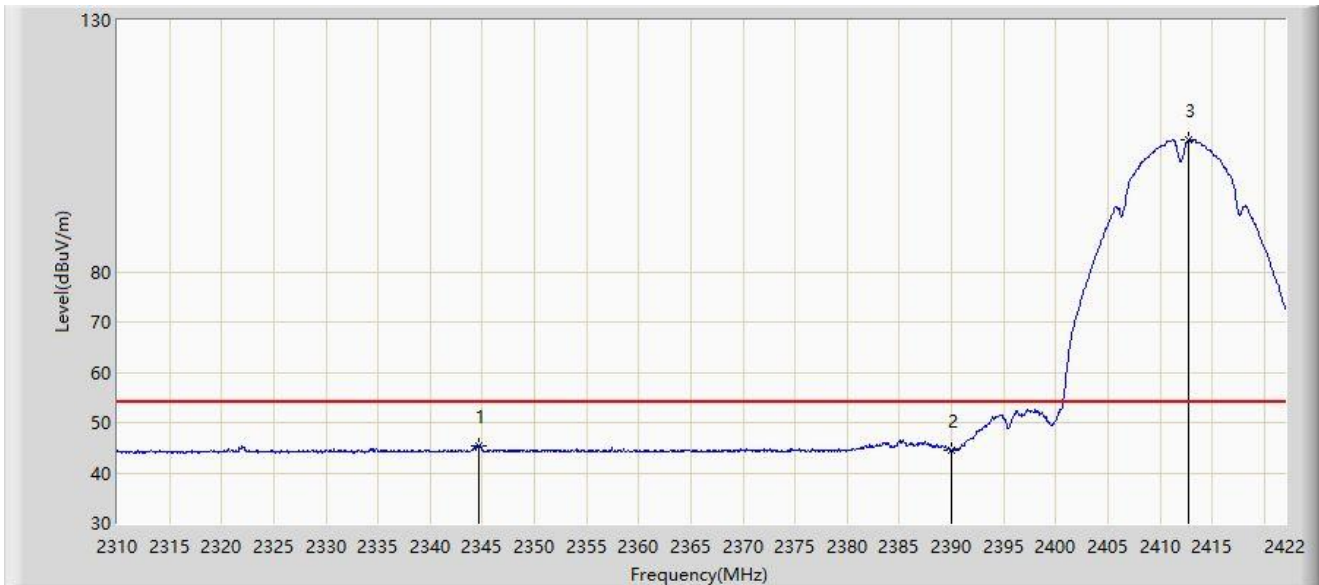


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2344.608	45.401	14.220	-8.599	54.000	31.181	AV
2		2390.000	44.476	13.559	-9.524	54.000	30.917	AV
3		2412.760	106.351	75.363	N/A	N/A	30.988	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

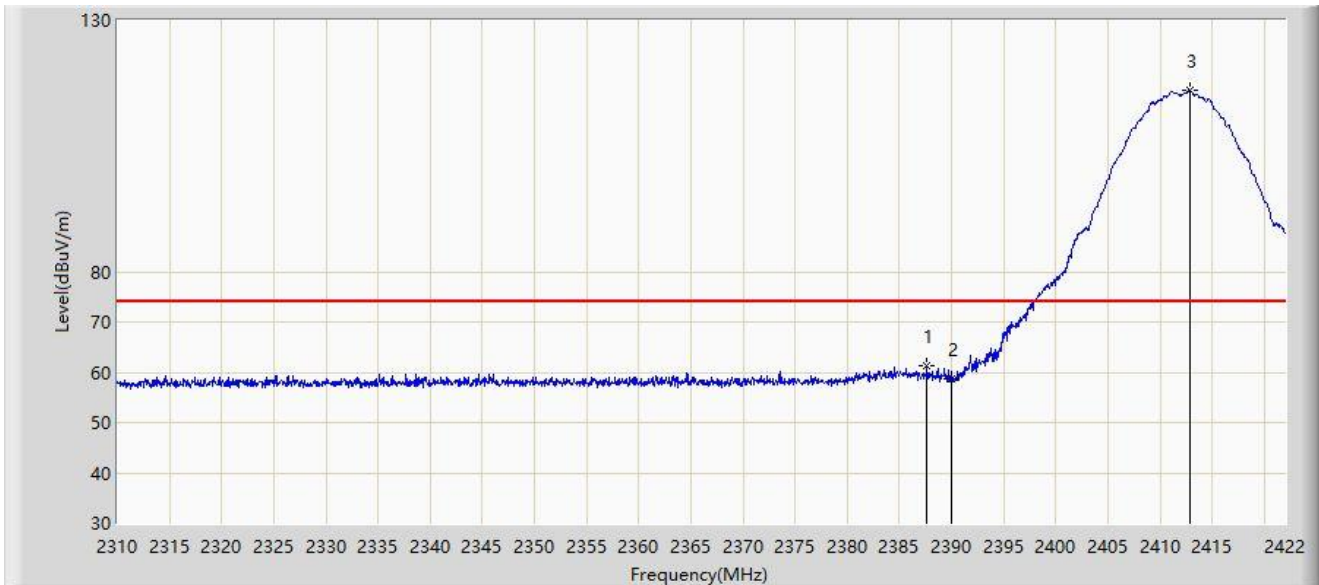


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2387.672	61.320	30.402	-12.680	74.000	30.917	PK
2		2390.000	58.821	27.904	-15.179	74.000	30.917	PK
3		2412.872	116.080	85.092	N/A	N/A	30.988	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2412MHz	

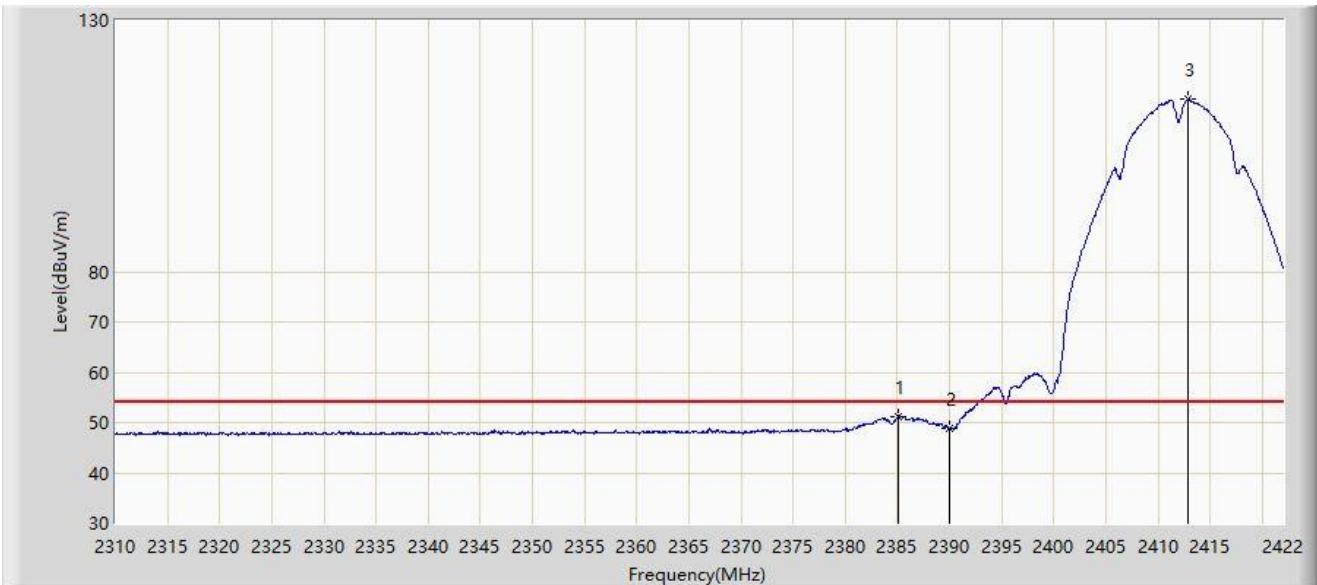


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2385.096	51.291	20.373	-2.709	54.000	30.918	AV
2		2390.000	48.930	18.013	-5.070	54.000	30.917	AV
3		2412.872	114.258	83.270	N/A	N/A	30.988	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

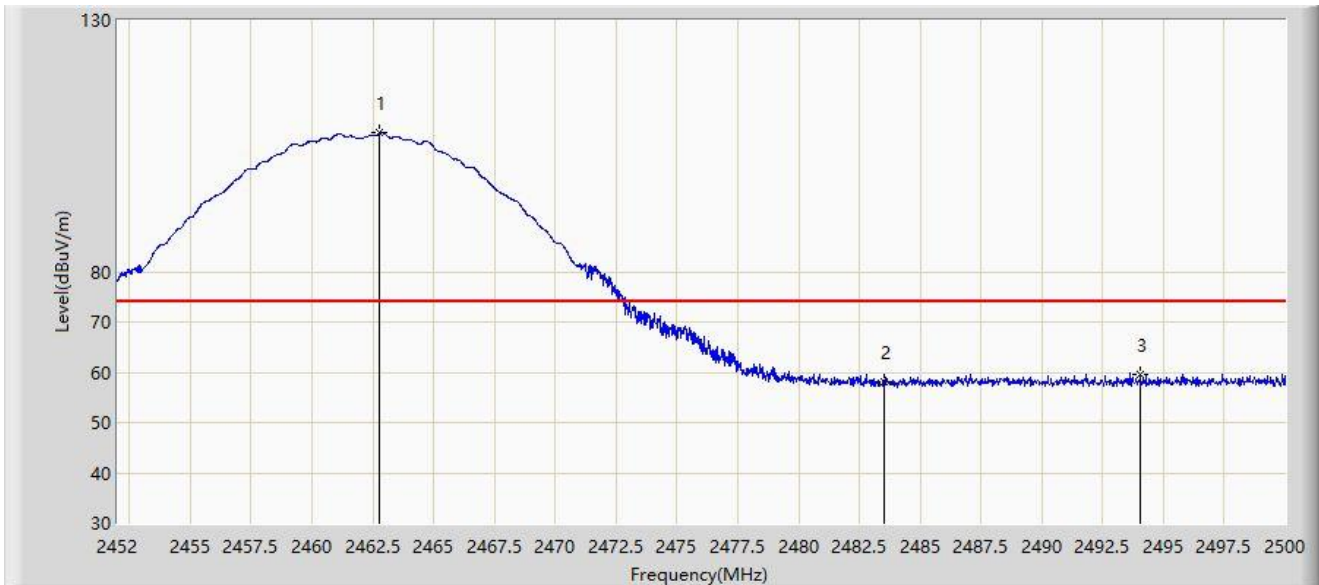


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2462.776	107.539	76.658	N/A	N/A	30.881	PK
2		2483.500	58.135	27.261	-15.865	74.000	30.874	PK
3	*	2494.048	59.687	28.765	-14.313	74.000	30.922	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

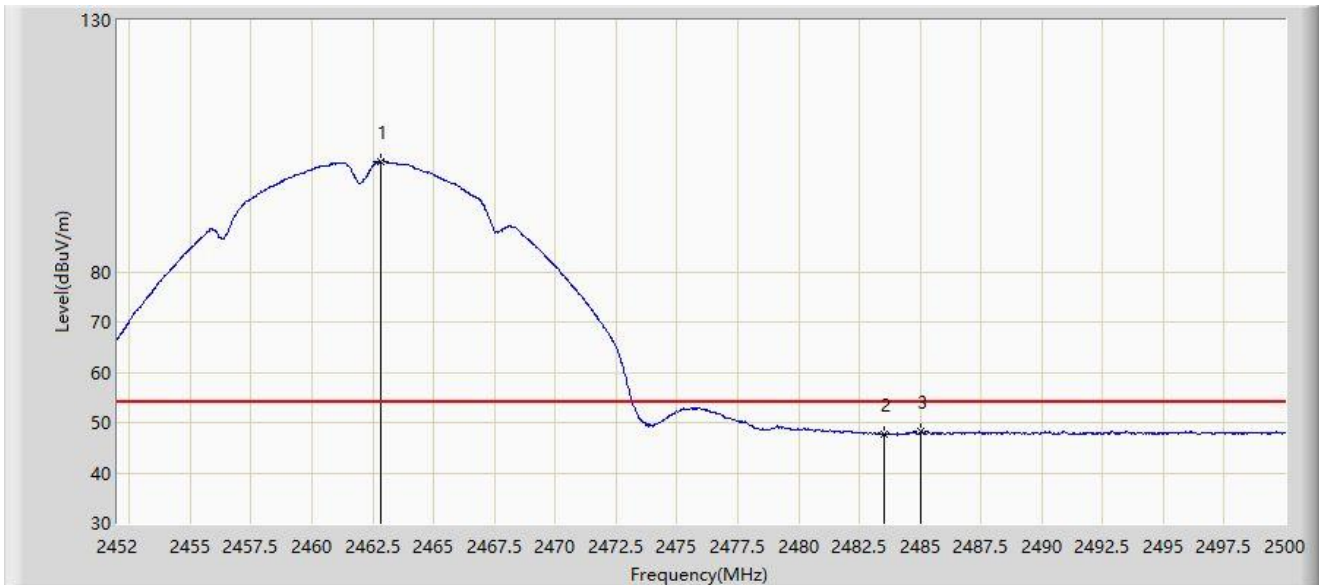


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2462.848	101.978	71.097	N/A	N/A	30.881	AV
2		2483.500	47.604	16.730	-6.396	54.000	30.874	AV
3	*	2485.048	48.239	17.358	-5.761	54.000	30.882	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

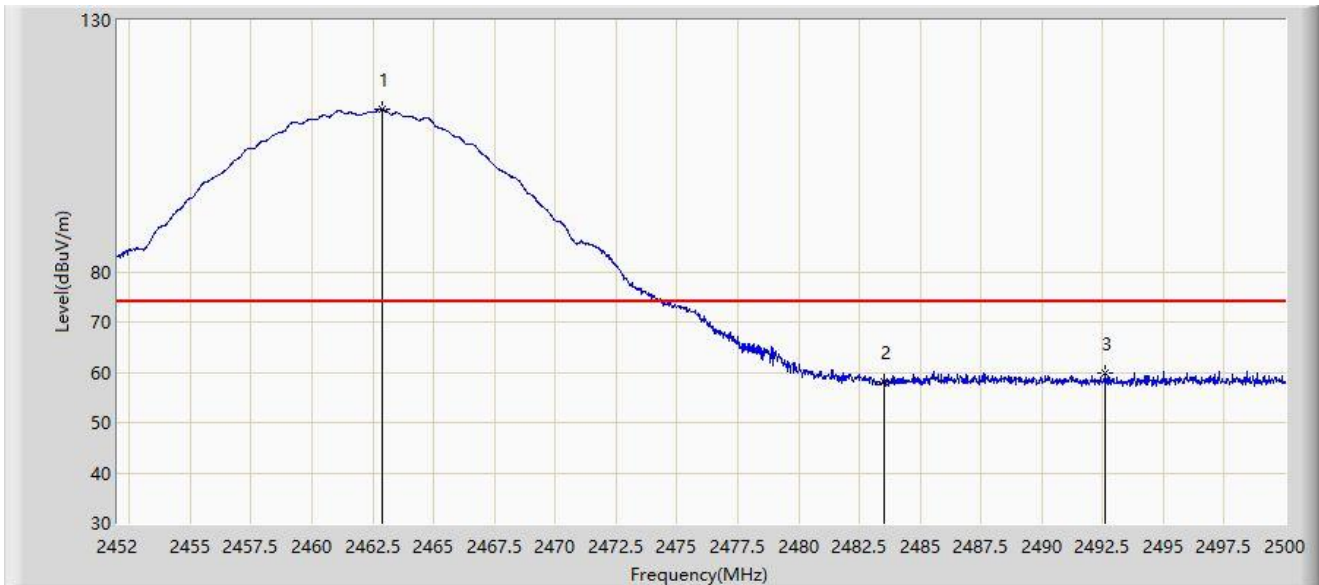


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2462.872	112.339	81.458	N/A	N/A	30.881	PK
2		2483.500	58.127	27.253	-15.873	74.000	30.874	PK
3	*	2492.608	59.749	28.833	-14.251	74.000	30.915	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11b at 2462MHz	

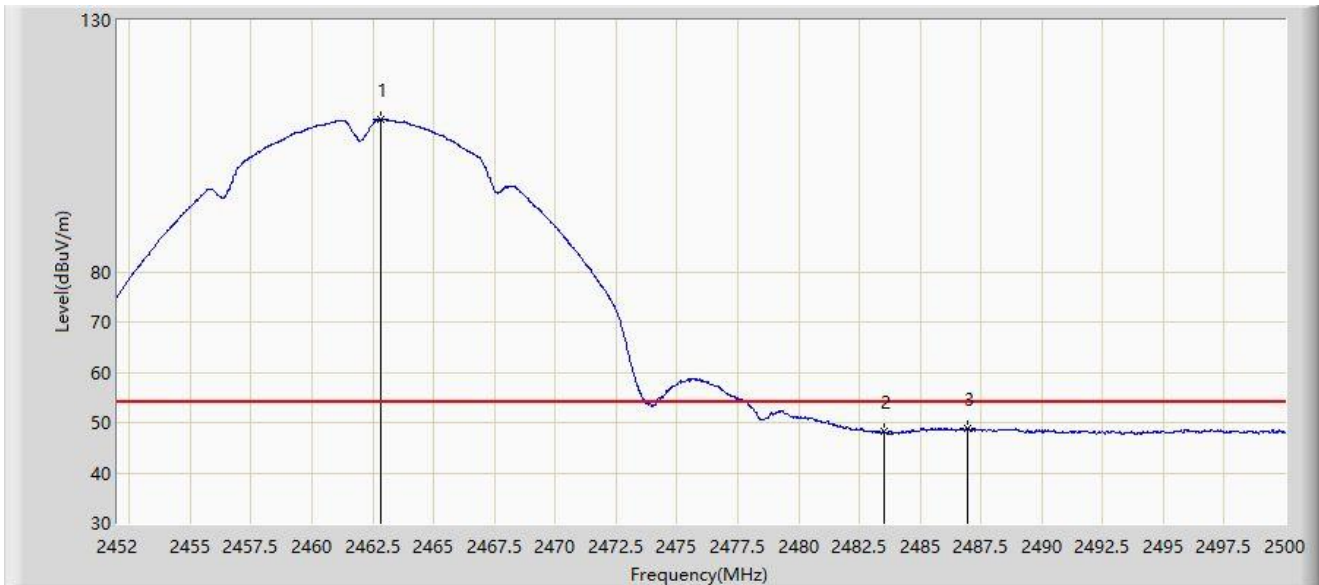


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2462.824	110.303	79.422	N/A	N/A	30.881	AV
2		2483.500	48.222	17.348	-5.778	54.000	30.874	AV
3	*	2486.968	48.907	18.017	-5.093	54.000	30.890	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

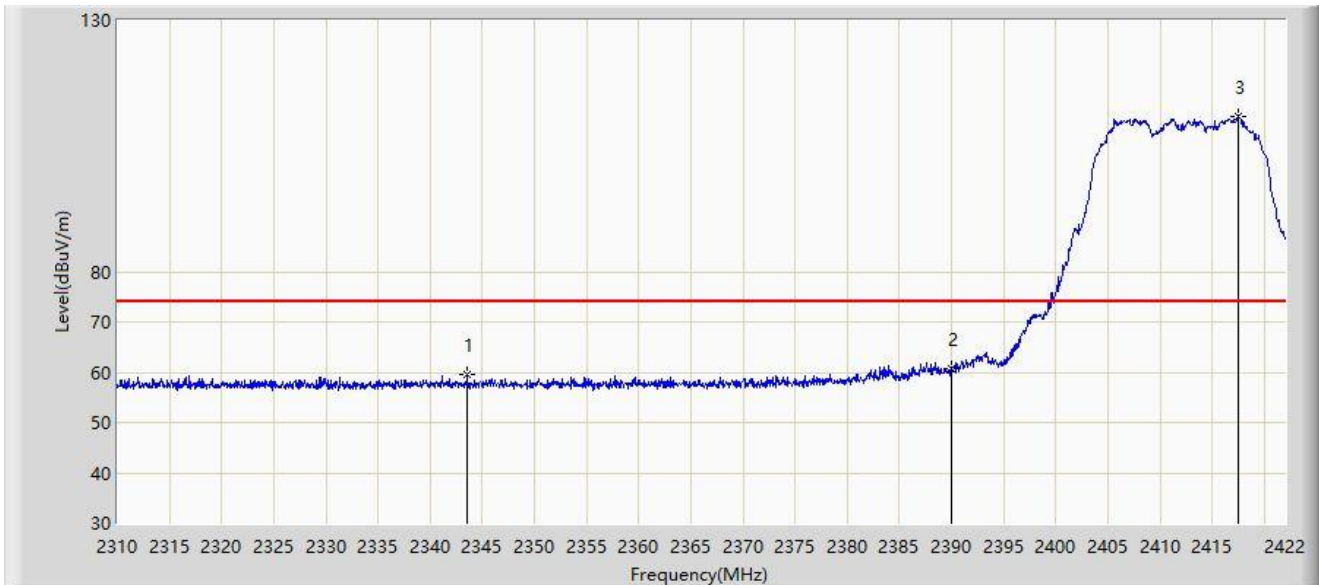


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2343.544	59.582	28.388	-14.418	74.000	31.194	PK
2	*	2390.000	60.640	29.723	-13.360	74.000	30.917	PK
3		2417.464	110.917	79.946	N/A	N/A	30.972	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

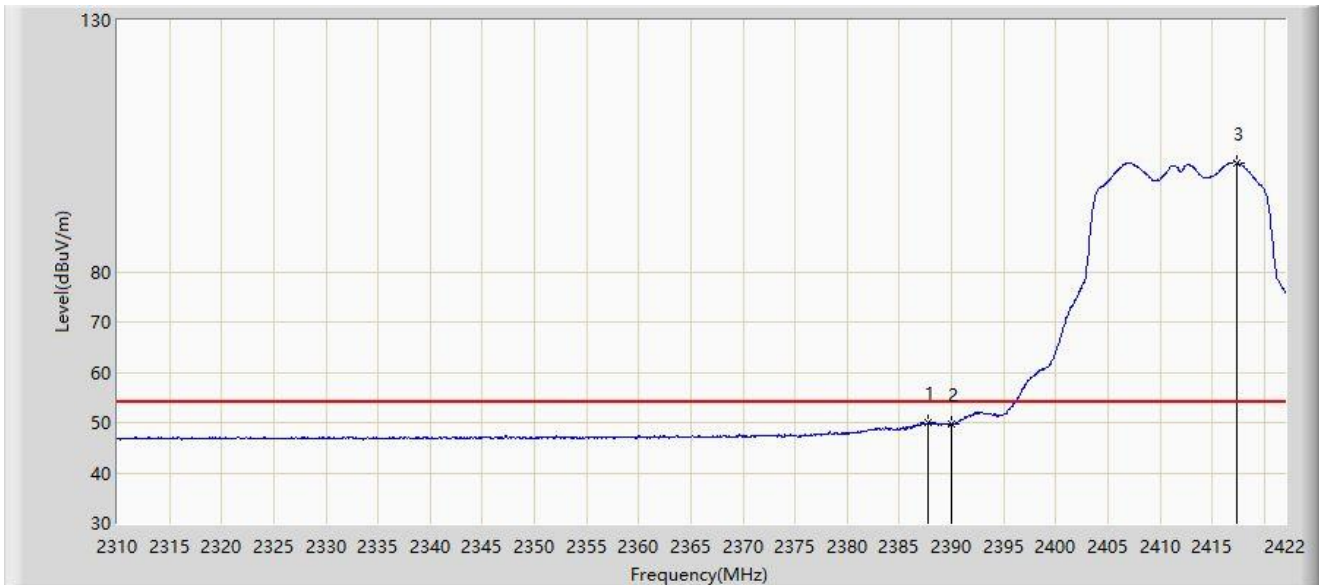


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.728	50.000	19.082	-4.000	54.000	30.918	AV
2		2390.000	49.582	18.665	-4.418	54.000	30.917	AV
3		2417.408	101.628	70.656	N/A	N/A	30.972	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

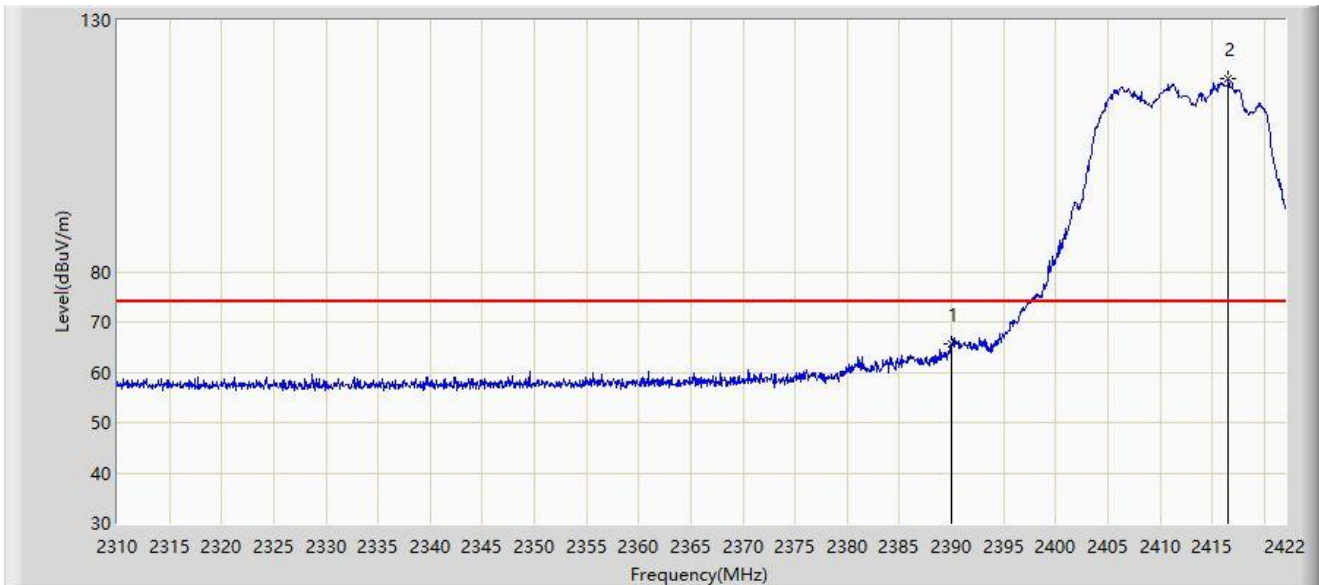


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	65.508	34.591	-8.492	74.000	30.917	PK
2		2416.568	118.386	87.411	N/A	N/A	30.975	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2412MHz	

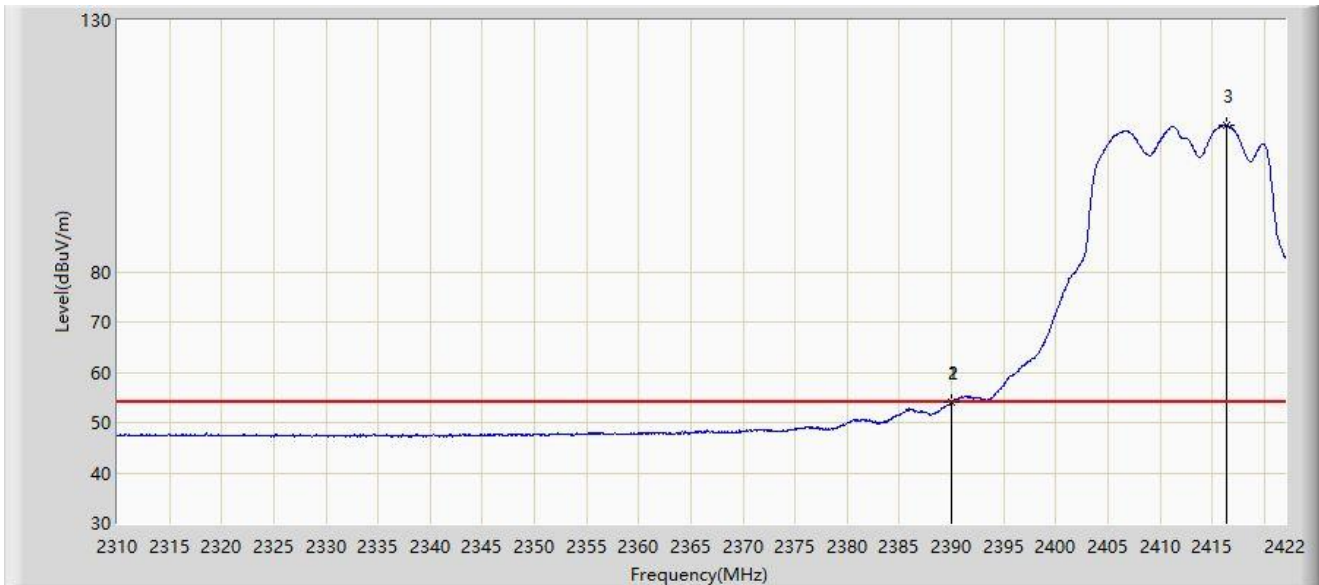


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.968	53.942	23.025	-0.058	54.000	30.917	AV
2		2390.000	53.941	23.024	-0.059	54.000	30.917	AV
3		2416.344	109.101	78.126	N/A	N/A	30.975	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

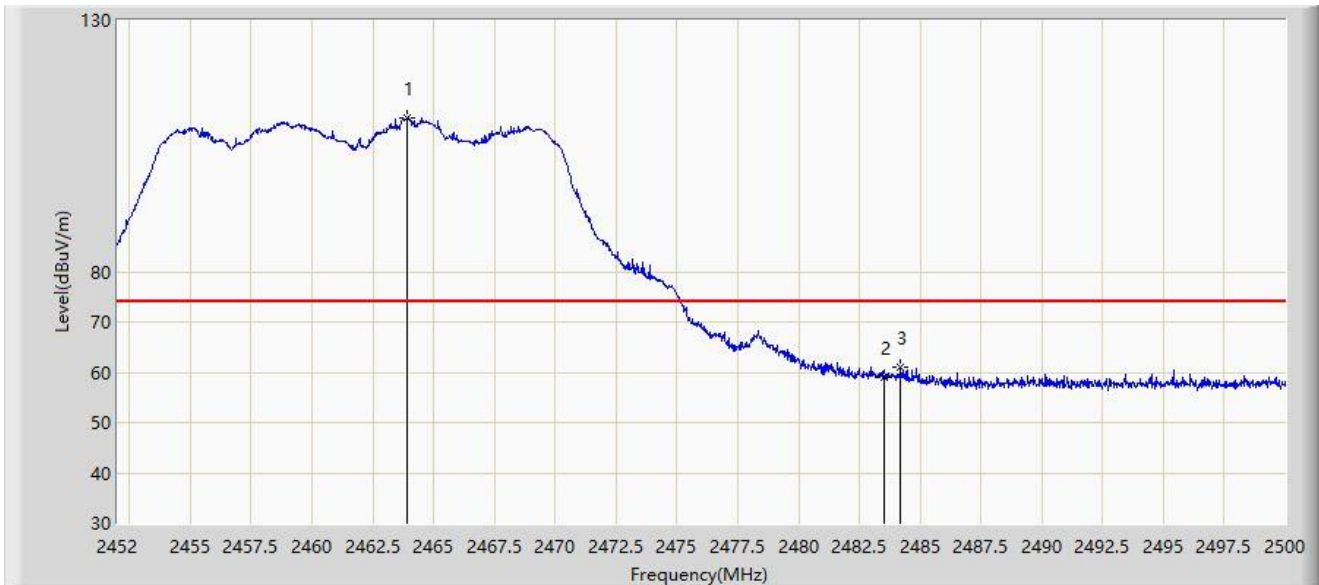


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2463.928	110.618	79.739	N/A	N/A	30.879	PK
2		2483.500	58.951	28.077	-15.049	74.000	30.874	PK
3	*	2484.208	61.122	30.245	-12.878	74.000	30.877	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

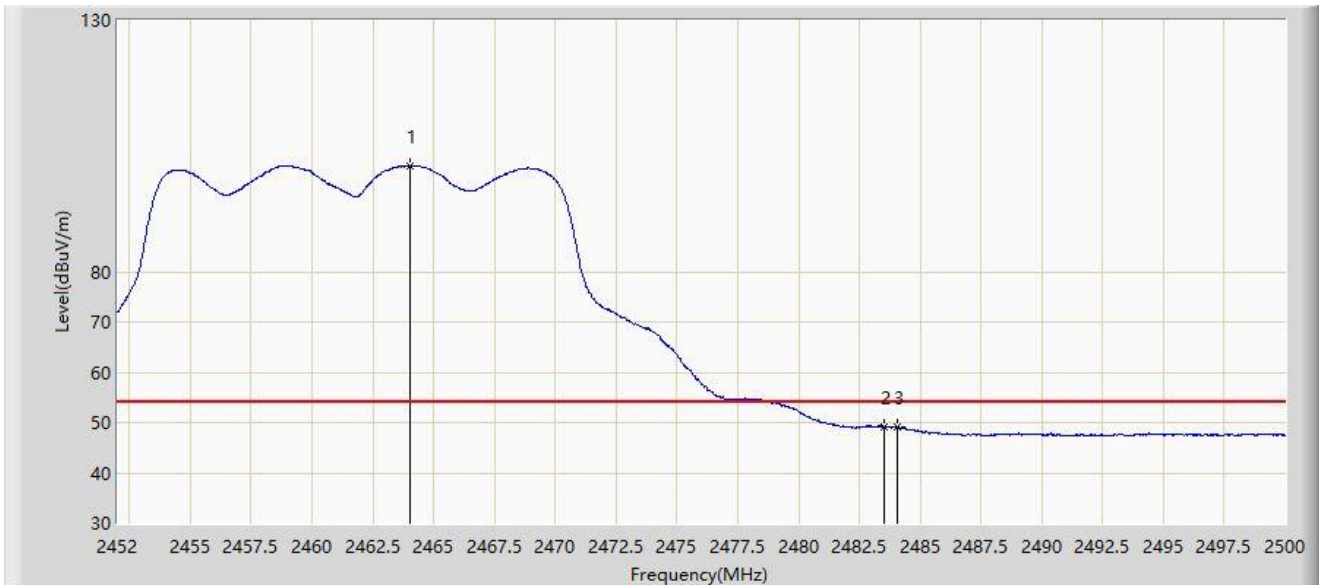


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2464.000	101.069	70.190	N/A	N/A	30.879	AV
2		2483.500	49.028	18.154	-4.972	54.000	30.874	AV
3	*	2484.088	49.203	18.326	-4.797	54.000	30.877	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

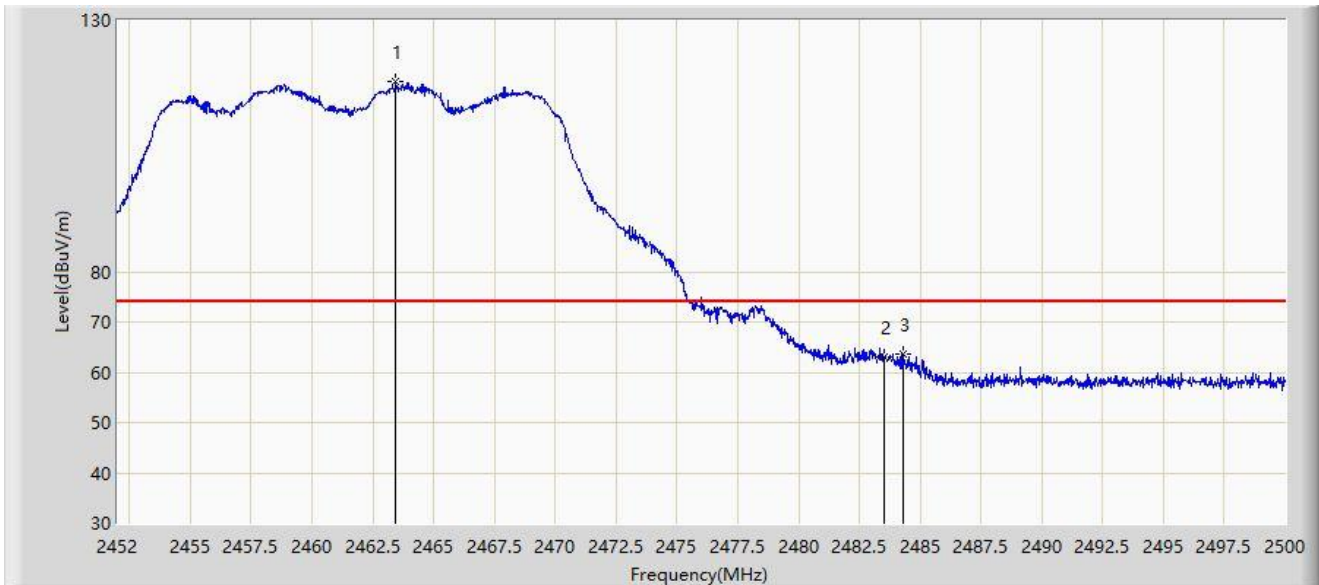


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2463.448	117.816	86.936	N/A	N/A	30.880	PK
2		2483.500	63.055	32.181	-10.945	74.000	30.874	PK
3	*	2484.328	63.606	32.728	-10.394	74.000	30.878	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11g at 2462MHz	

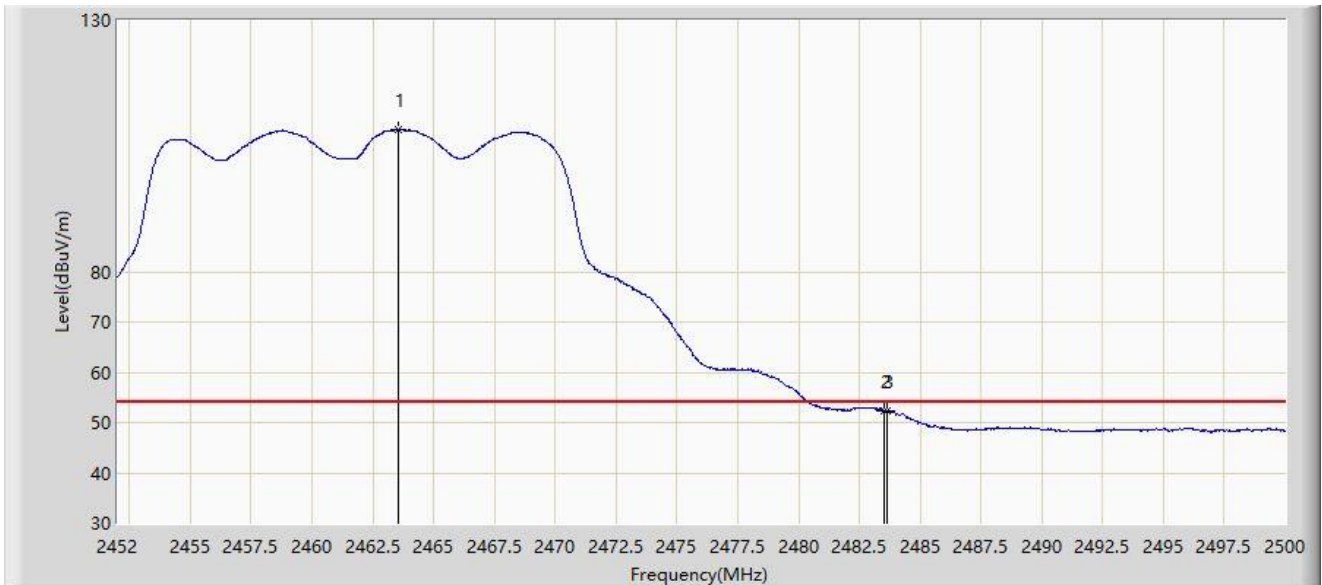


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2463.544	108.227	77.347	N/A	N/A	30.879	AV
2		2483.500	52.322	21.448	-1.678	54.000	30.874	AV
3	*	2483.632	52.460	21.585	-1.540	54.000	30.874	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

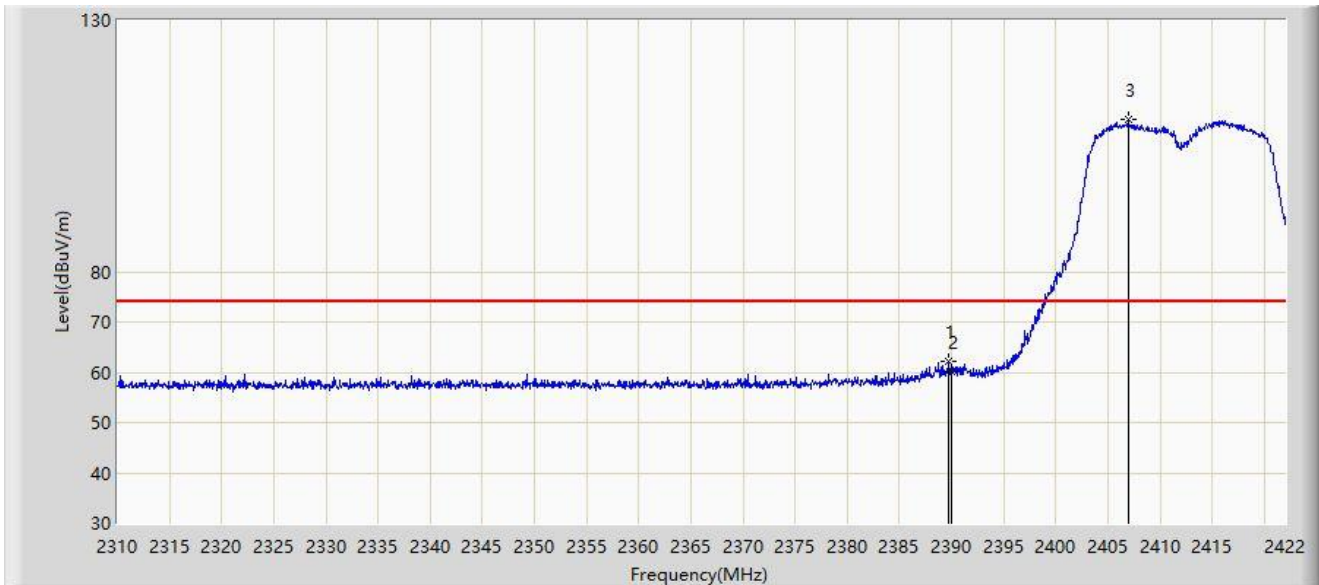


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.744	62.280	31.363	-11.720	74.000	30.917	PK
2		2390.000	60.052	29.135	-13.948	74.000	30.917	PK
3		2406.992	110.400	79.424	N/A	N/A	30.976	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

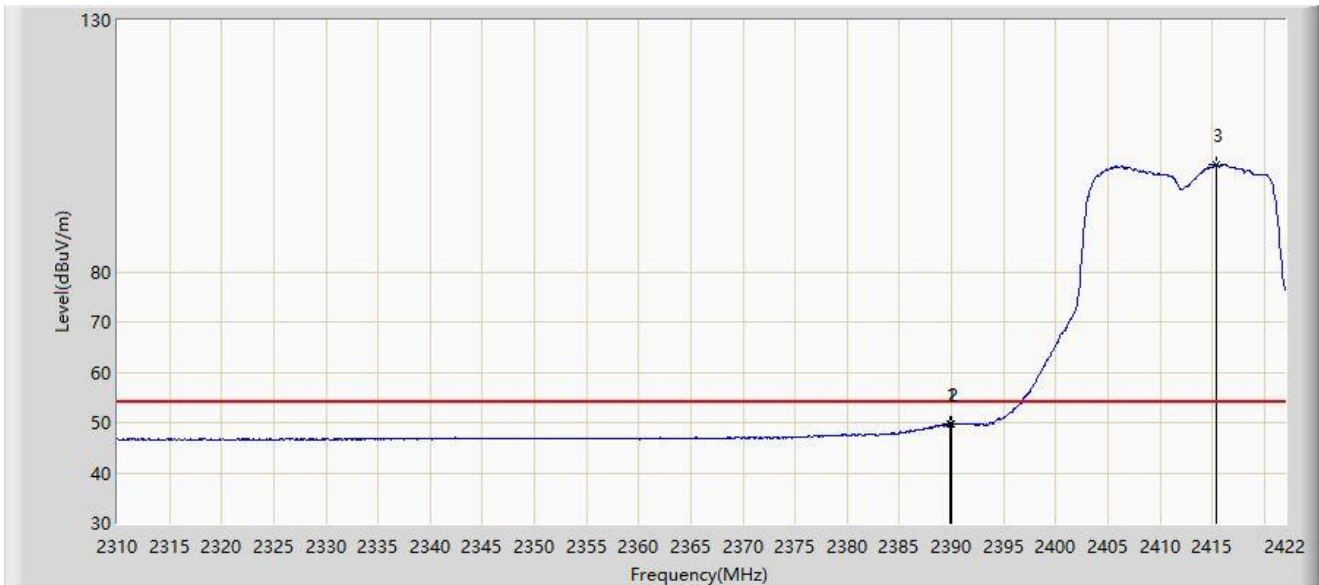


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.800	49.708	18.791	-4.292	54.000	30.917	AV
2		2390.000	49.600	18.683	-4.400	54.000	30.917	AV
3		2415.392	101.285	70.306	N/A	N/A	30.979	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

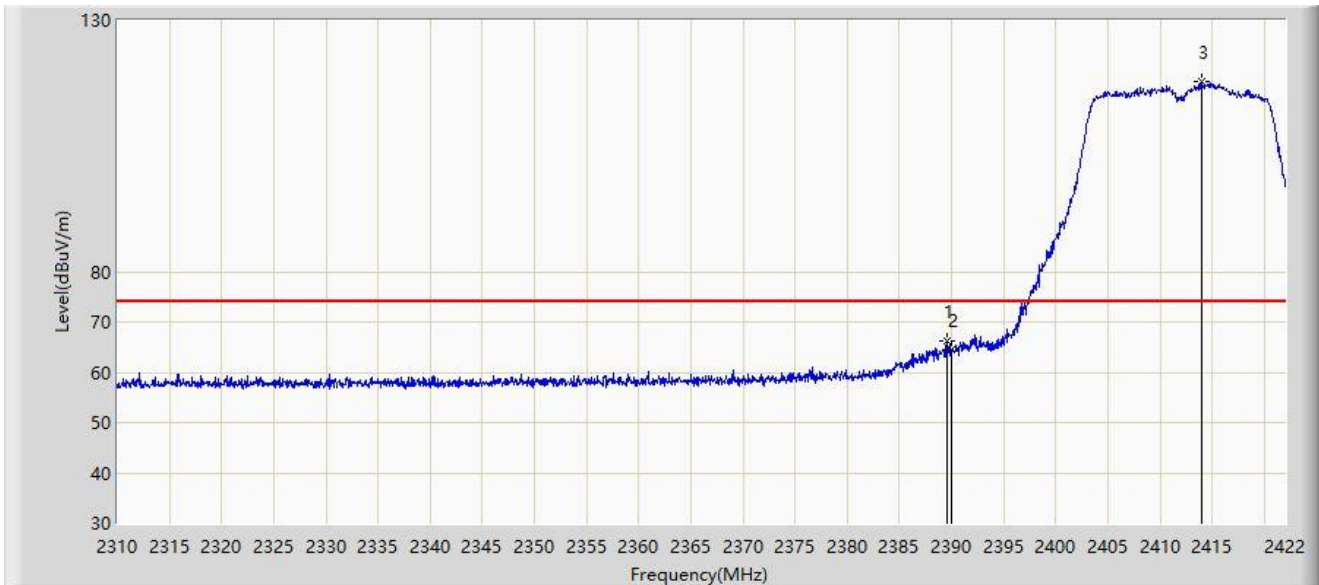


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.576	66.230	35.313	-7.770	74.000	30.917	PK
2		2390.000	64.497	33.580	-9.503	74.000	30.917	PK
3		2413.936	117.785	86.801	N/A	N/A	30.984	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2412MHz	

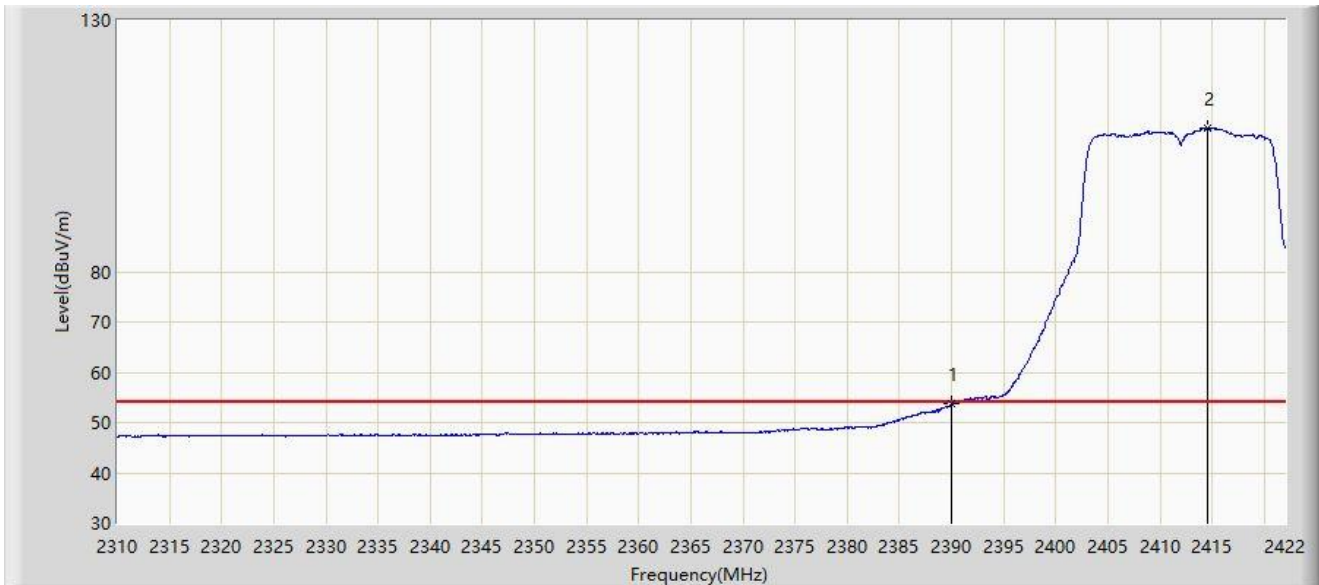


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	53.630	22.713	-0.370	54.000	30.917	AV
2		2414.608	108.513	77.531	N/A	N/A	30.982	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

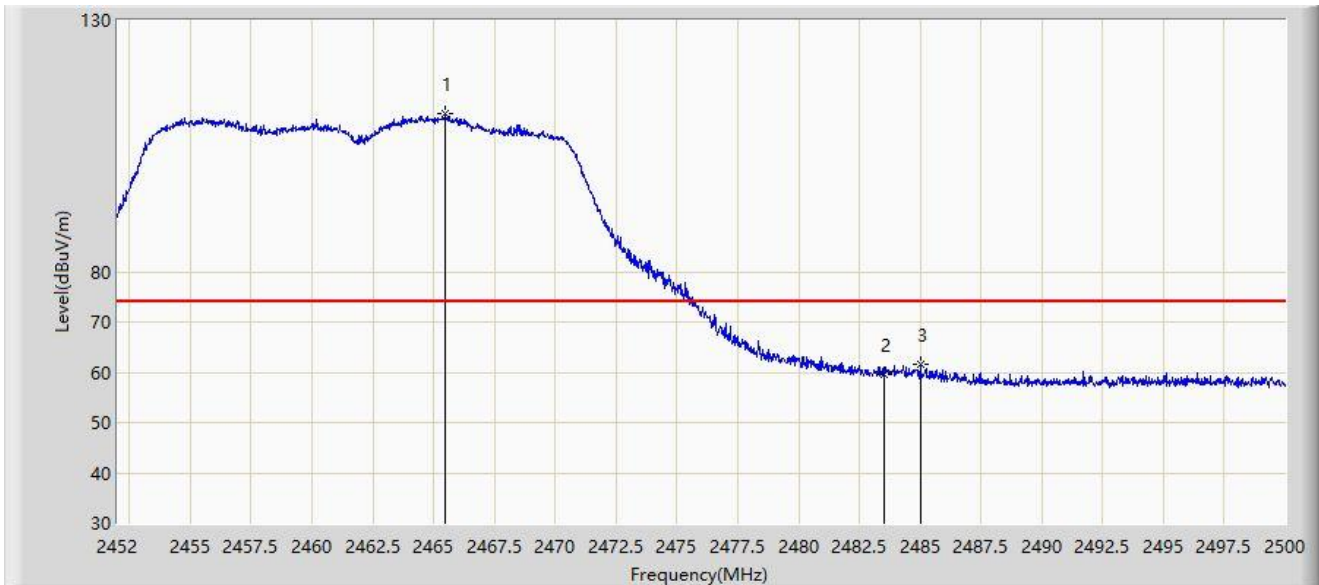


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2465.488	111.352	80.475	N/A	N/A	30.877	PK
2		2483.500	59.486	28.612	-14.514	74.000	30.874	PK
3	*	2485.000	61.697	30.816	-12.303	74.000	30.881	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

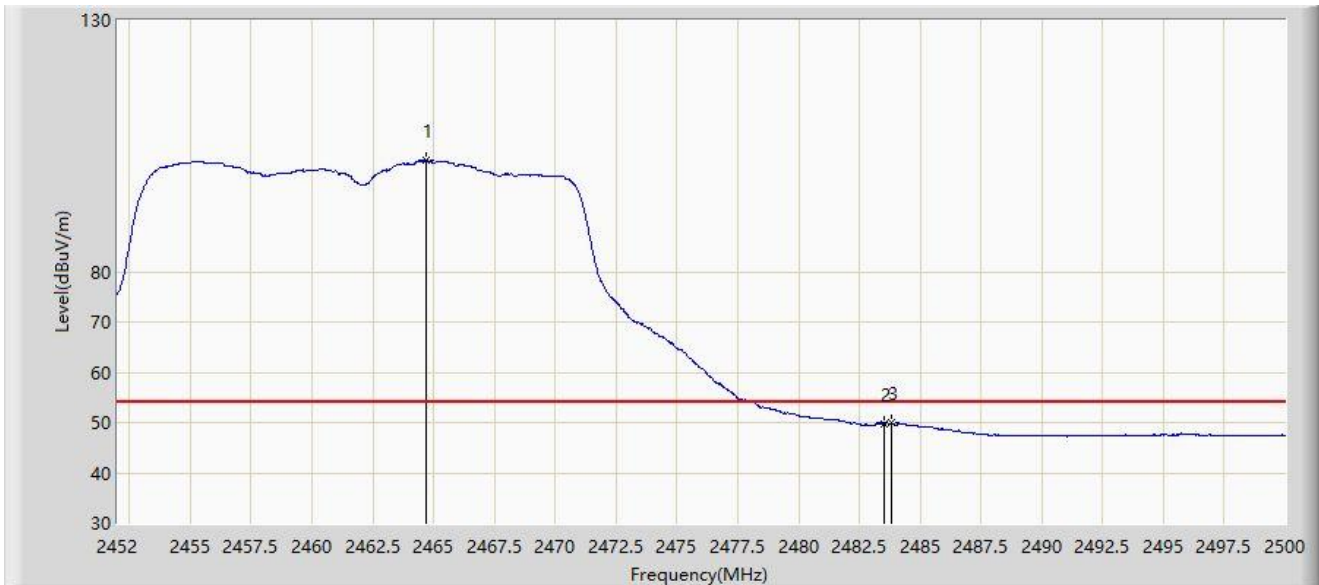


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2464.672	102.042	71.164	N/A	N/A	30.878	AV
2		2483.500	49.854	18.980	-4.146	54.000	30.874	AV
3	*	2483.848	49.912	19.036	-4.088	54.000	30.876	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

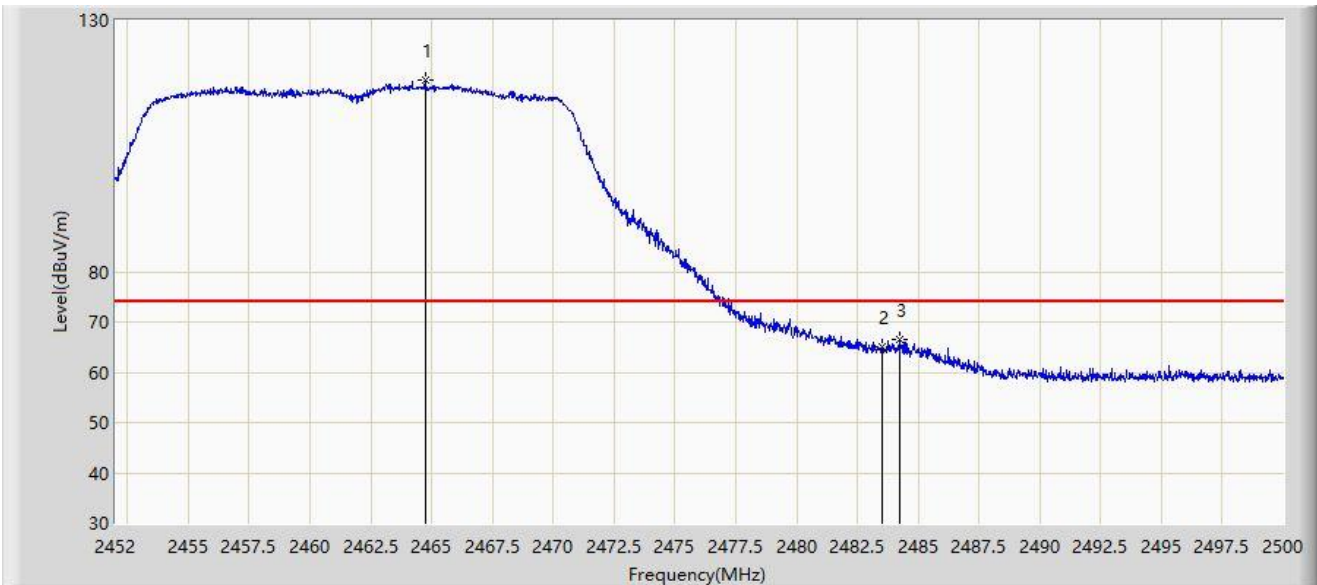


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2464.744	118.107	87.229	N/A	N/A	30.878	PK
2		2483.500	64.980	34.106	-9.020	74.000	30.874	PK
3	*	2484.232	66.525	35.648	-7.475	74.000	30.877	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at 2462MHz	

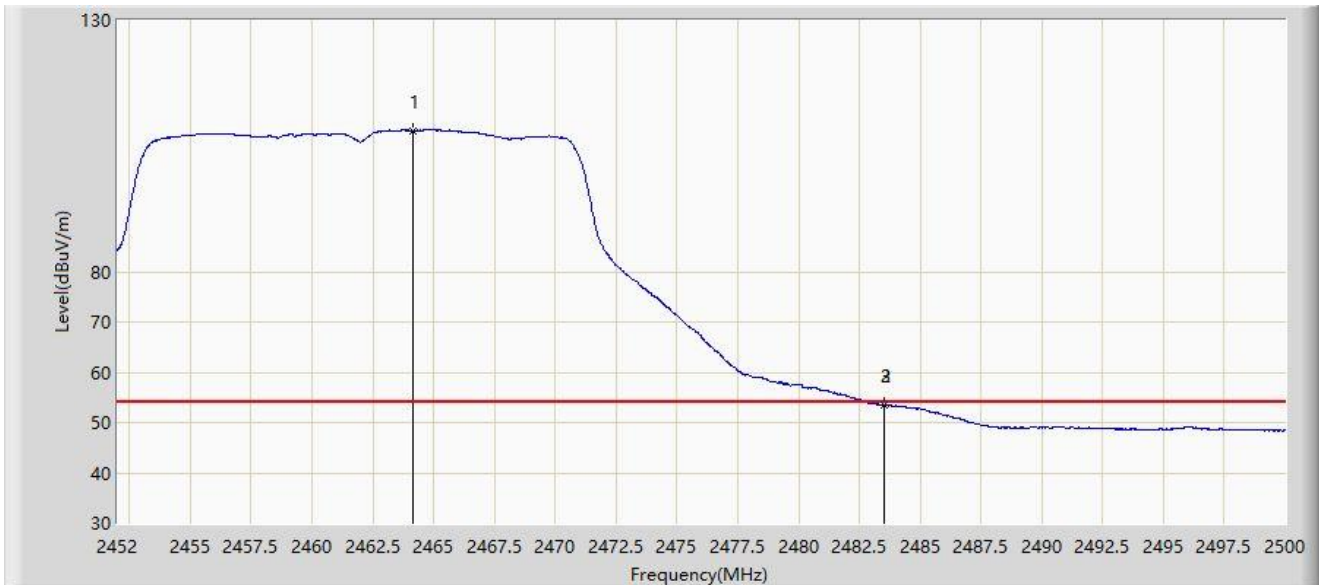


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		2464.168	108.115	77.236	N/A	N/A	30.879	AV
2		2483.500	53.440	22.566	-0.560	54.000	30.874	AV
3	*	2483.536	53.486	22.612	-0.514	54.000	30.874	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

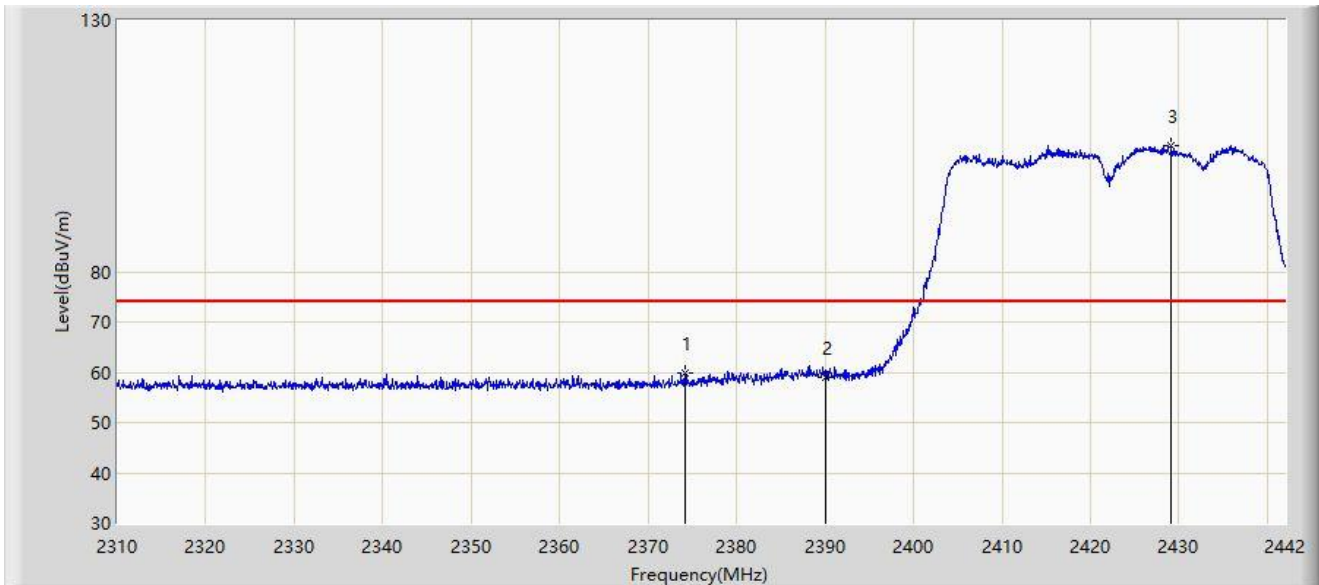


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2374.152	59.720	28.787	-14.280	74.000	30.934	PK
2		2390.000	58.938	28.021	-15.062	74.000	30.917	PK
3		2429.130	105.034	74.103	N/A	N/A	30.931	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

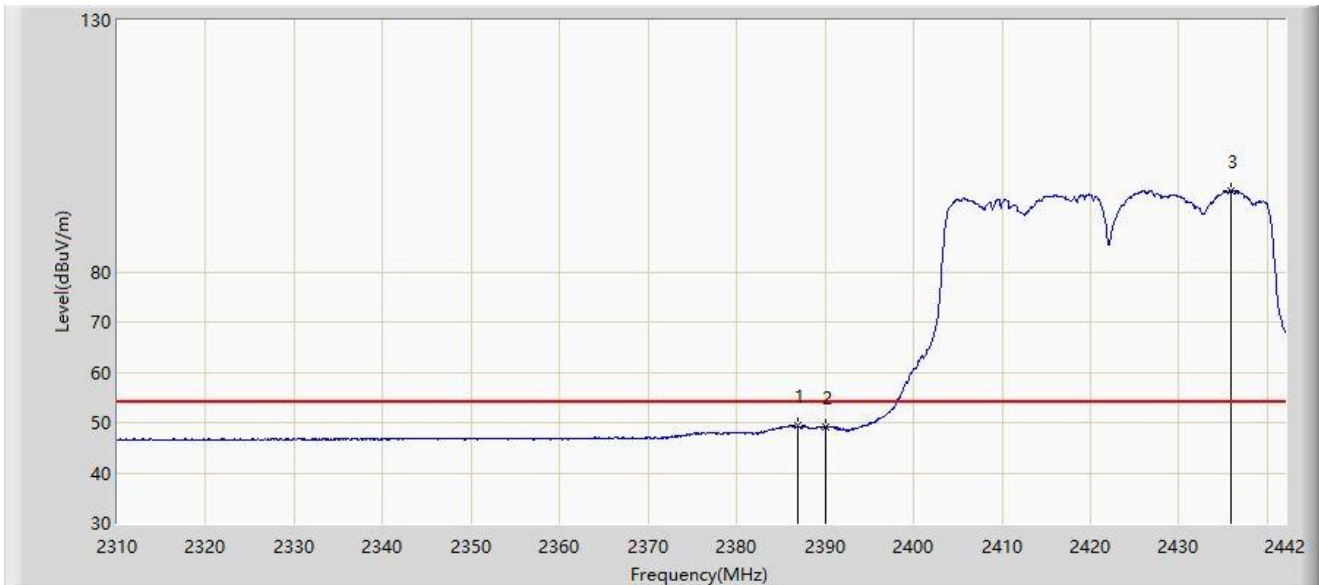


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2386.890	49.400	18.482	-4.600	54.000	30.918	AV
2		2390.000	49.121	18.204	-4.879	54.000	30.917	AV
3		2435.862	96.057	65.141	N/A	N/A	30.915	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

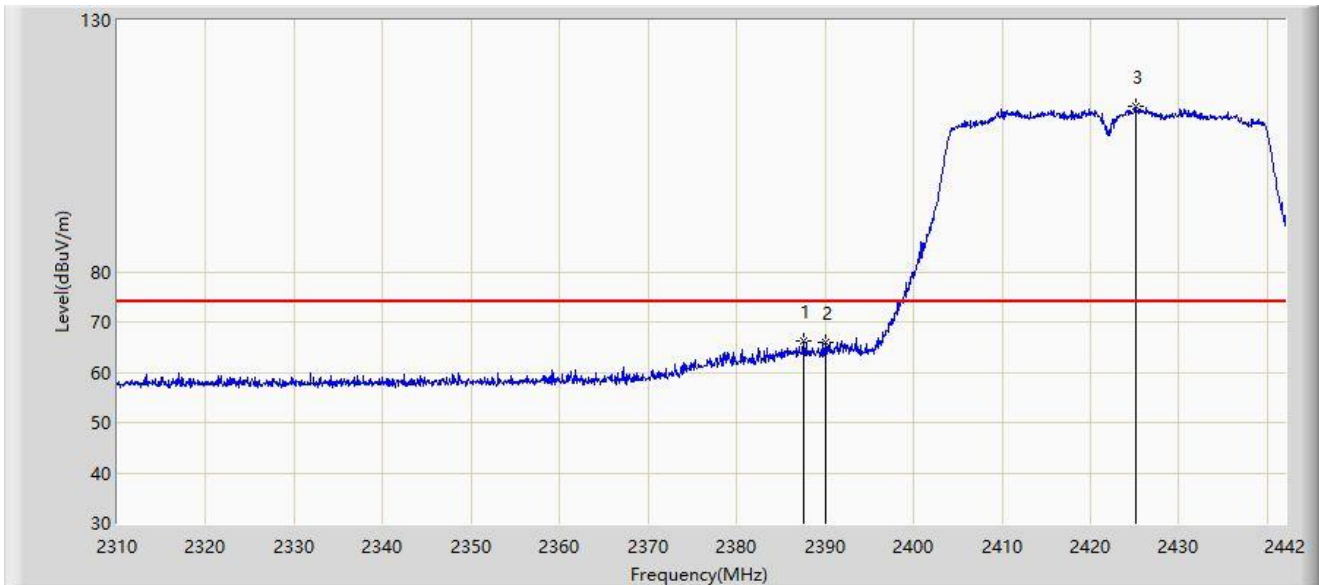


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2387.550	66.123	35.205	-7.877	74.000	30.918	PK
2		2390.000	65.835	34.918	-8.165	74.000	30.917	PK
3		2425.104	112.830	81.886	N/A	N/A	30.944	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-01
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2422MHz	

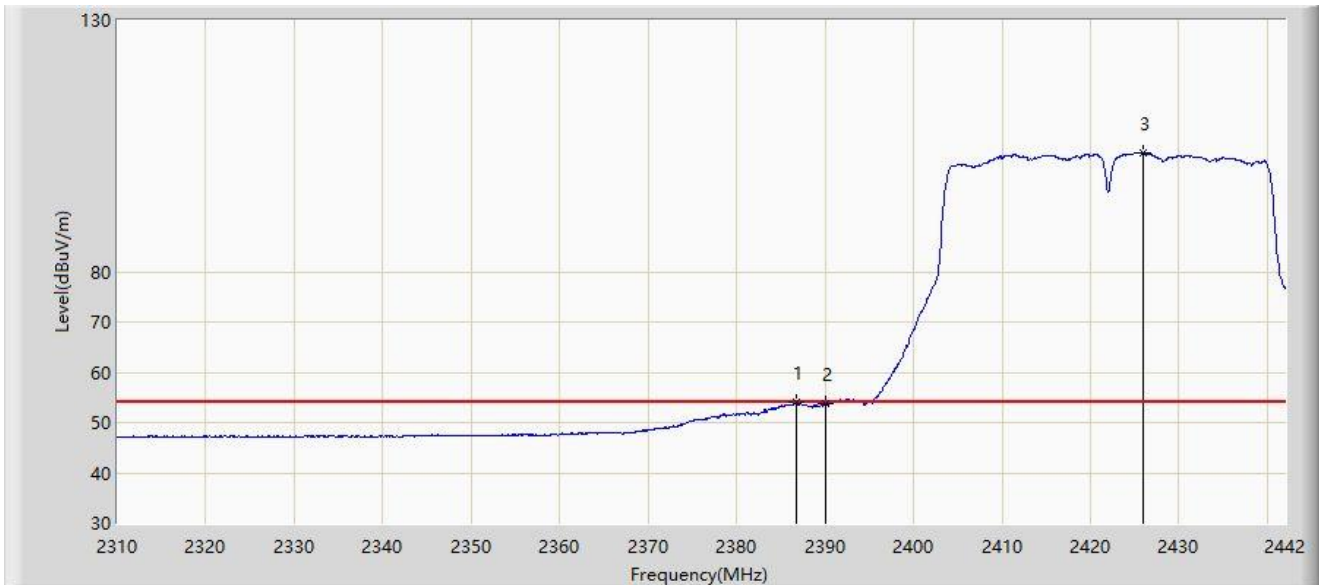


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2386.758	53.920	23.002	-0.080	54.000	30.917	AV
2		2390.000	53.733	22.816	-0.267	54.000	30.917	AV
3		2425.896	103.566	72.625	N/A	N/A	30.941	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-06
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical (Worst Polarity)
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2427MHz	

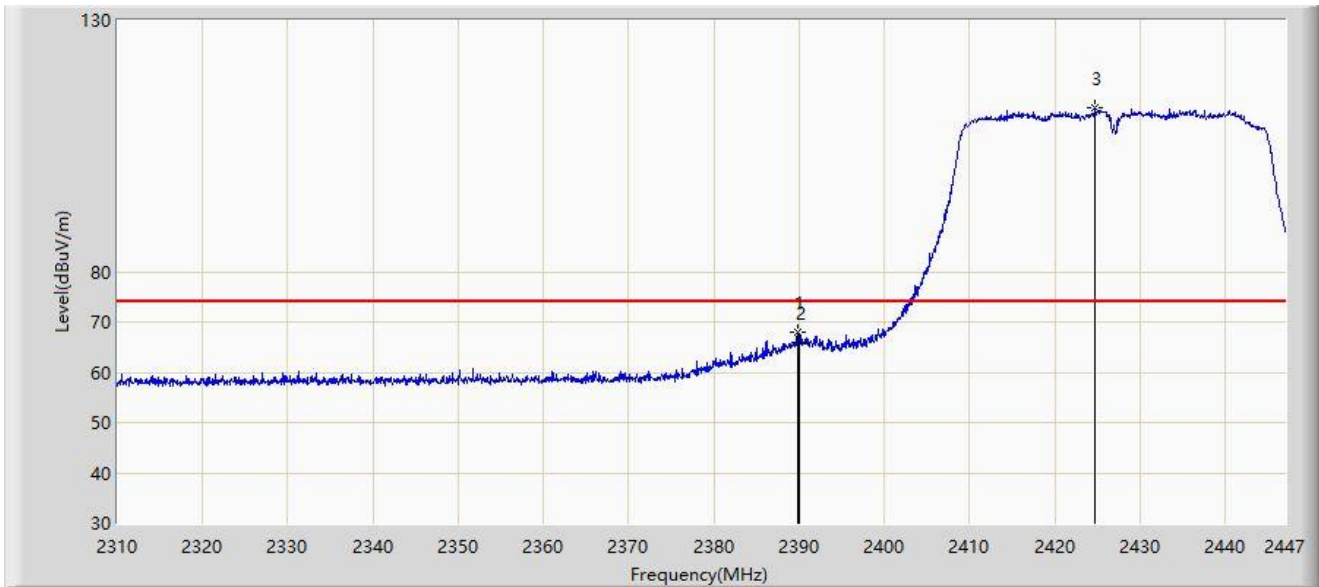


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.802	67.915	36.998	-6.085	74.000	30.917	PK
2		2390.000	65.925	35.008	-8.075	74.000	30.917	PK
3		2424.669	112.478	81.532	N/A	N/A	30.946	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-06
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical (Worst Polarity)
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2427MHz	

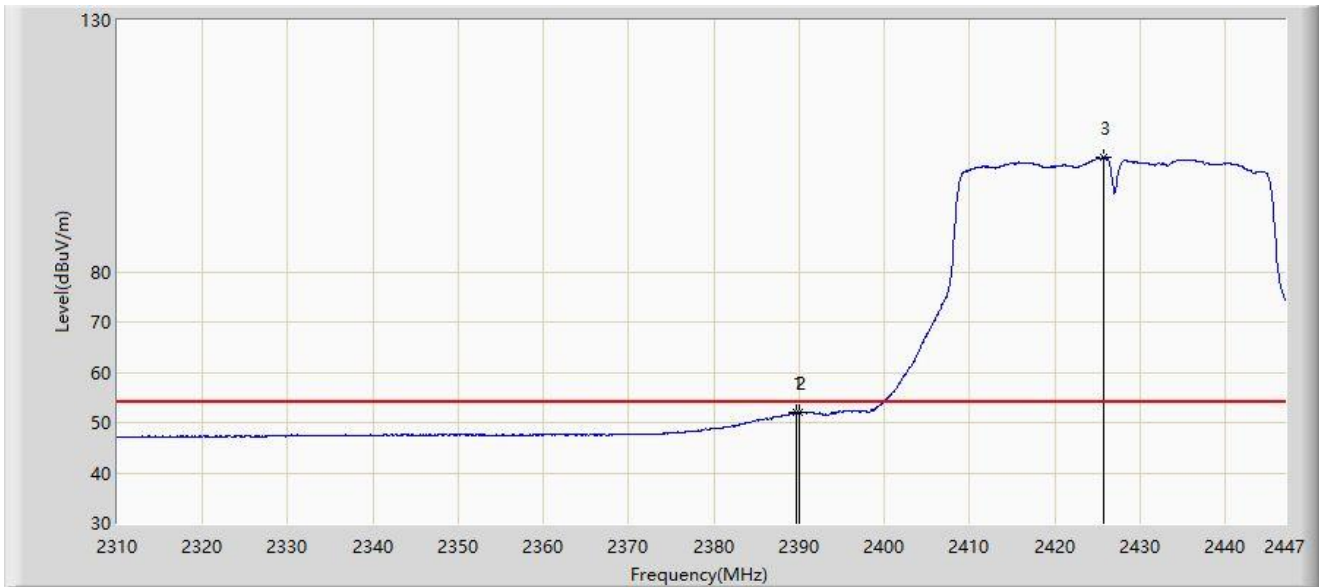


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.734	52.037	21.120	-1.963	54.000	30.917	AV
2		2390.000	51.904	20.987	-2.096	54.000	30.917	AV
3		2425.697	102.758	71.816	N/A	N/A	30.942	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-21
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical (Worst Polarity)
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2432MHz	

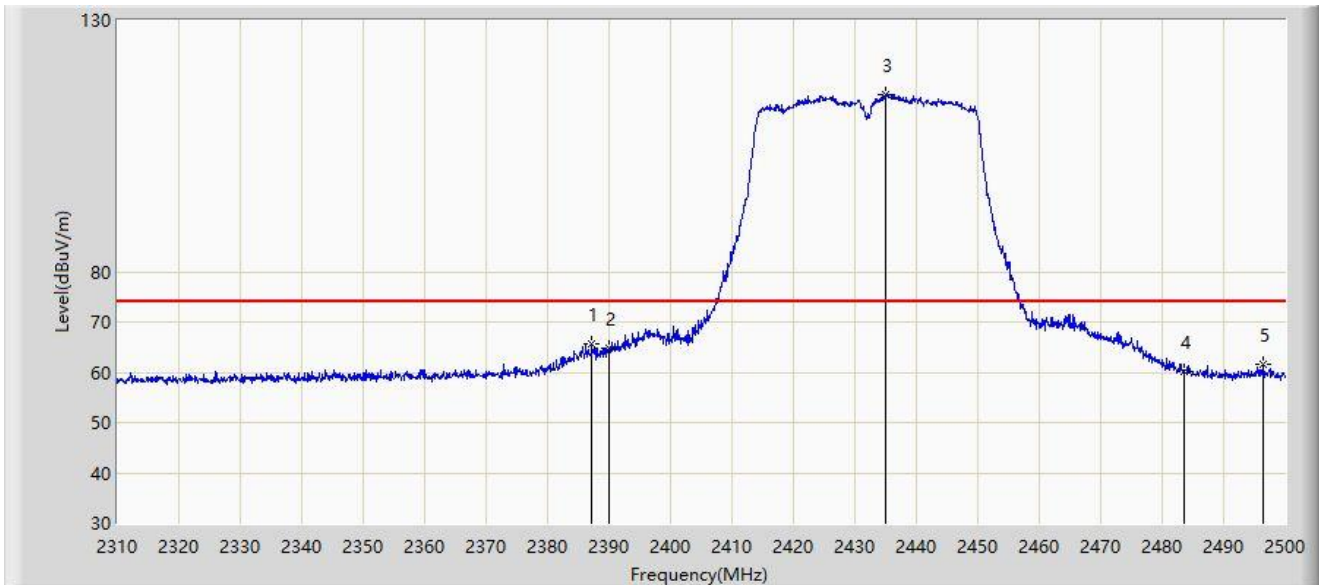


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2387.140	65.573	34.655	-8.427	74.000	30.918	PK
2		2390.000	64.663	33.746	-9.337	74.000	30.917	PK
3		2435.115	115.361	84.444	N/A	N/A	30.917	PK
4		2483.500	60.265	29.391	-13.735	74.000	30.874	PK
5		2496.390	61.719	30.789	-12.281	74.000	30.930	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-21
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical (Worst Polarity)
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2432MHz	

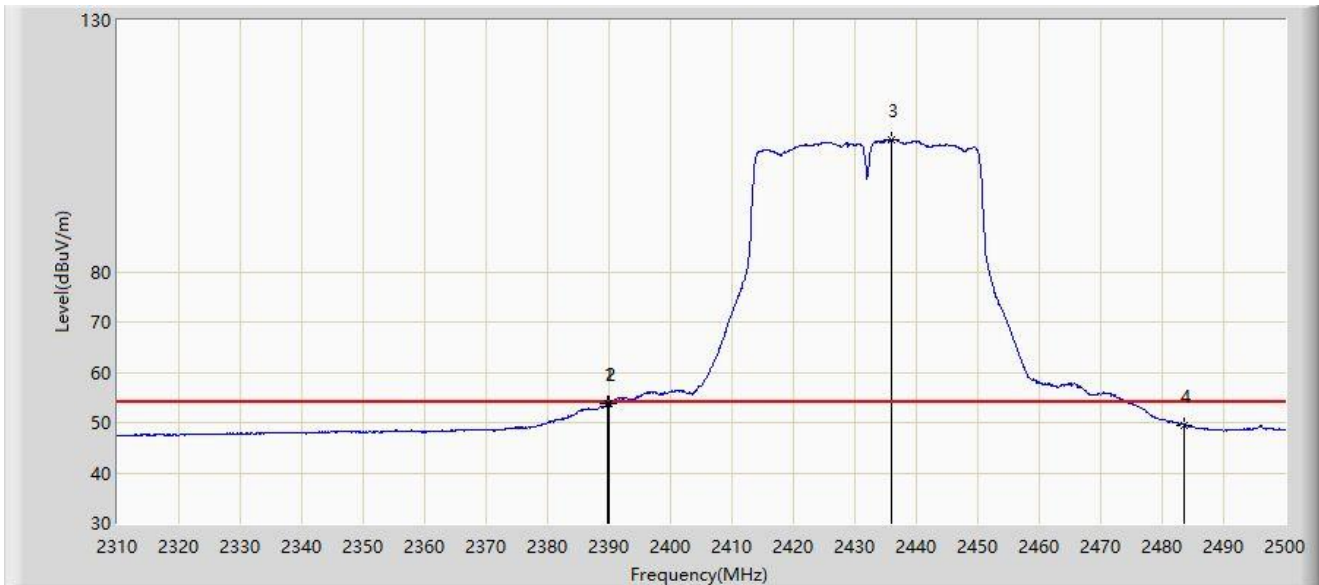


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.705	53.721	22.804	-0.279	54.000	30.917	AV
2		2390.000	53.657	22.740	-0.343	54.000	30.917	AV
3		2435.970	106.181	75.266	N/A	N/A	30.915	AV
4		2483.500	49.530	18.656	-4.470	54.000	30.874	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-06
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

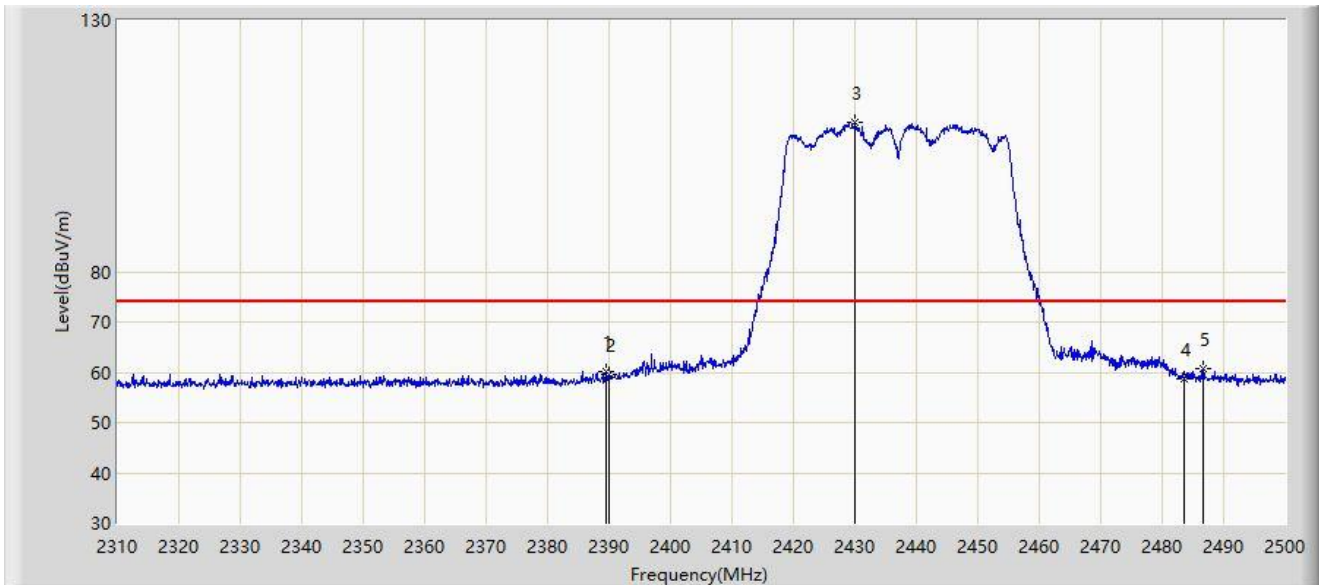


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.515	60.240	29.323	-13.760	74.000	30.917	PK
2		2390.000	59.585	28.668	-14.415	74.000	30.917	PK
3		2430.080	109.855	78.926	N/A	N/A	30.929	PK
4		2483.500	58.677	27.803	-15.323	74.000	30.874	PK
5	*	2486.605	60.700	29.812	-13.300	74.000	30.888	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-06
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

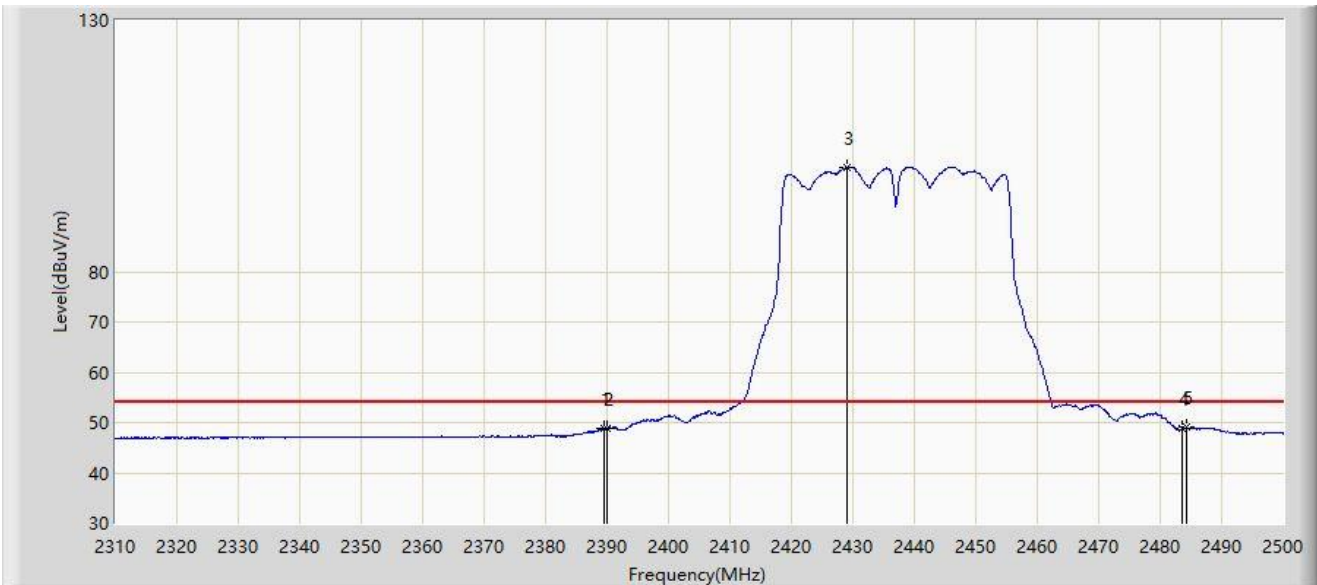


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2389.610	48.952	18.035	-5.048	54.000	30.917	AV
2		2390.000	48.863	17.946	-5.137	54.000	30.917	AV
3		2428.940	100.813	69.881	N/A	N/A	30.932	AV
4		2483.500	48.864	17.990	-5.136	54.000	30.874	AV
5	*	2484.325	48.987	18.109	-5.013	54.000	30.878	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-06
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

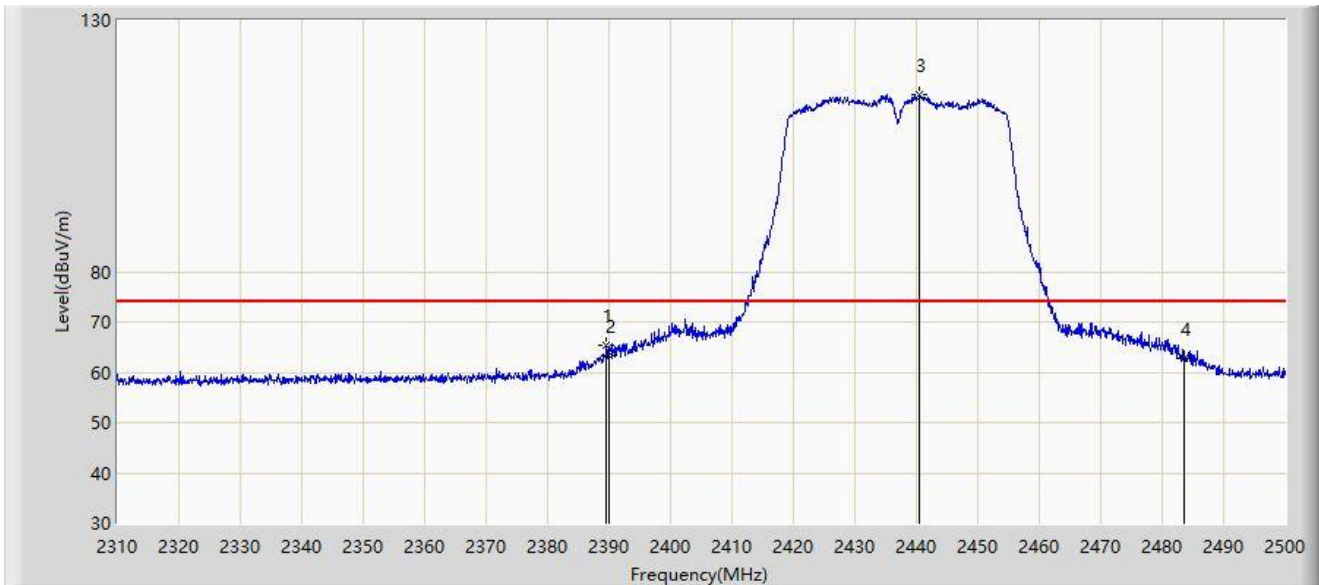


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2389.515	65.484	34.567	-8.516	74.000	30.917	PK
2		2390.000	63.339	32.422	-10.661	74.000	30.917	PK
3		2440.530	115.180	84.275	N/A	N/A	30.905	PK
4		2483.500	62.840	31.966	-11.160	74.000	30.874	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Test Date: 2022-06-06
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at 2437MHz	

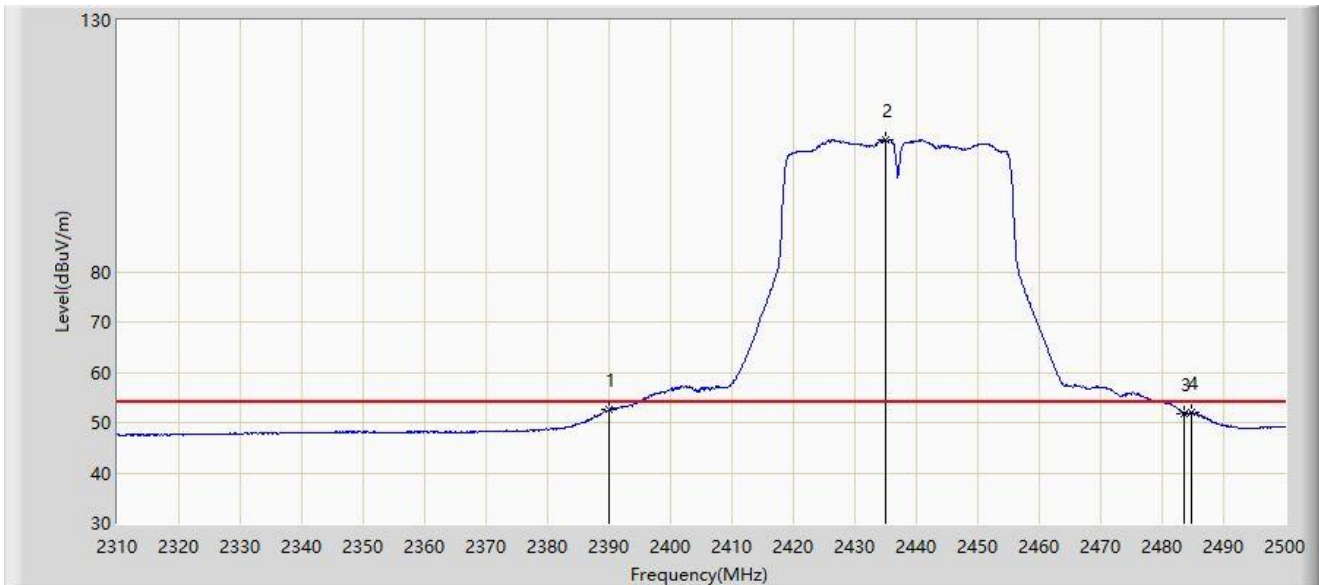

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	2390.000	52.469	21.552	-1.531	54.000	30.917	AV
2		2434.925	106.340	75.422	N/A	N/A	30.918	AV
3		2483.500	51.790	20.916	-2.210	54.000	30.874	AV
4		2484.800	52.170	21.290	-1.830	54.000	30.880	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).