



## Test Result of EUT ceased transmission (NII-5 Band)


802.11ax-HE20 / CH33

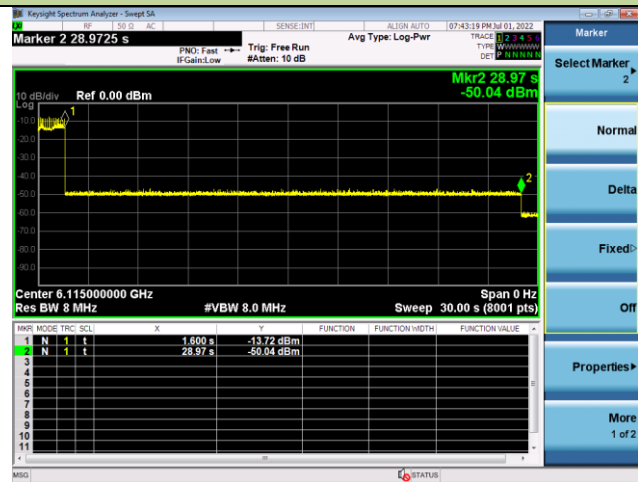


802.11ax-HE160 / CH47 (Low Edge)

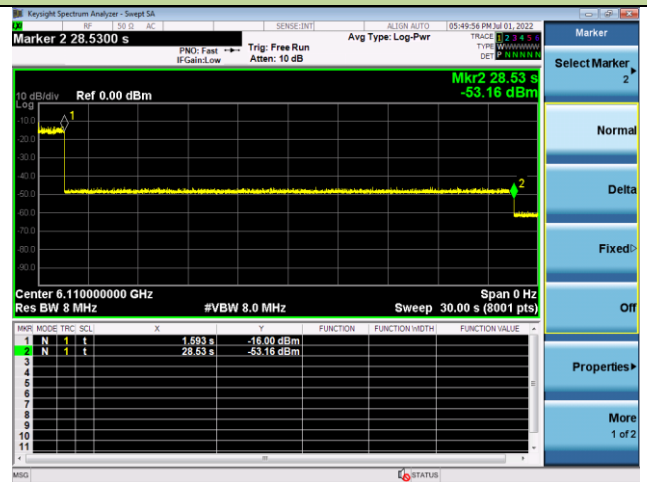

802.11ax-HE160 / CH47 (Middle)

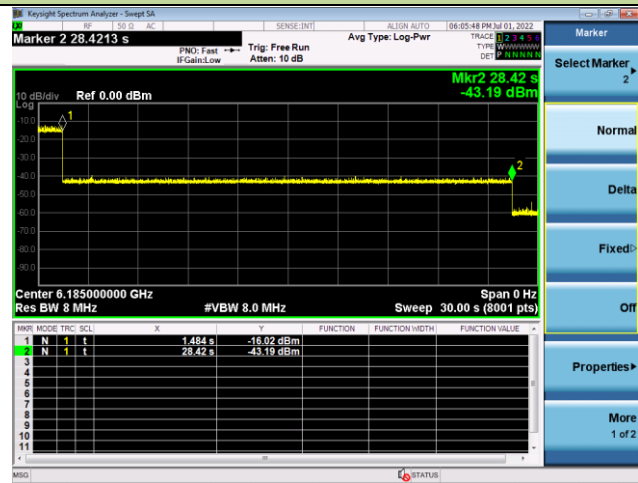



802.11ax-HE160 / CH47 (High Edge)

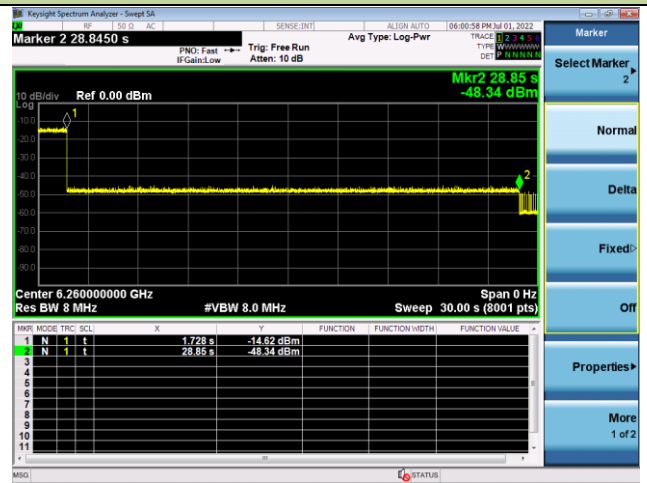

Test Result of EUT ceased transmission (NII-6 Band)



802.11ax-HE20 / CH97

802.11ax-HE80 / CH103 (Low Edge)

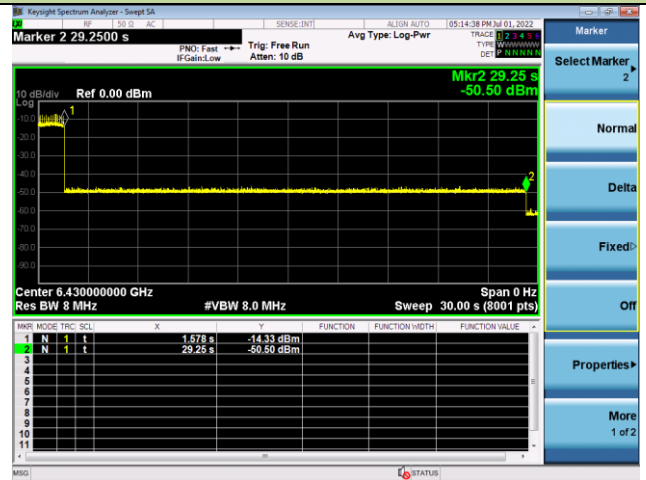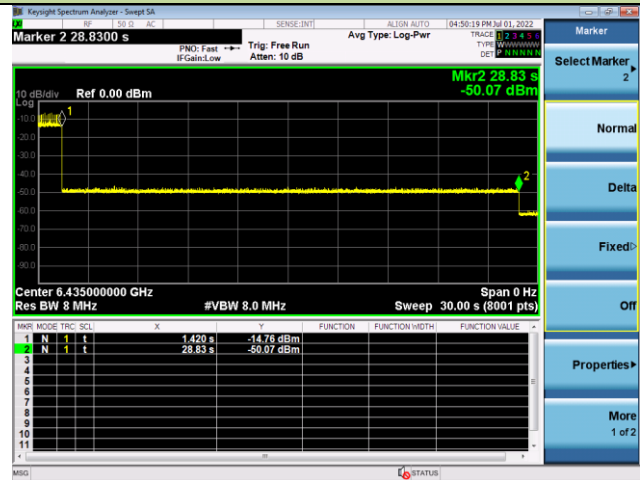


802.11ax-HE80 / CH103 (Middle)

802.11ax-HE80 / CH103 (High Edge)

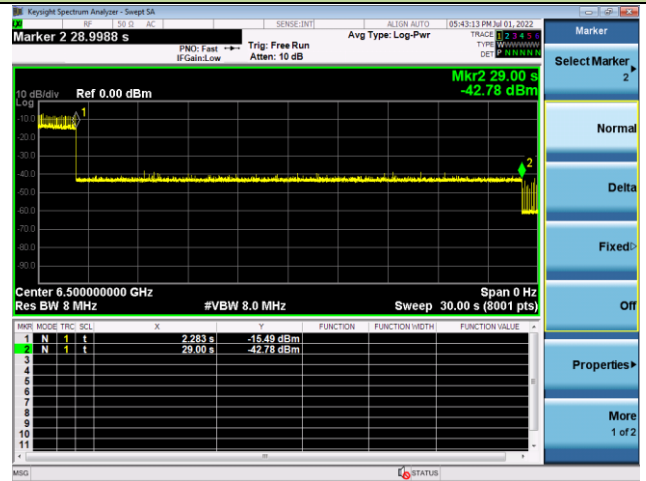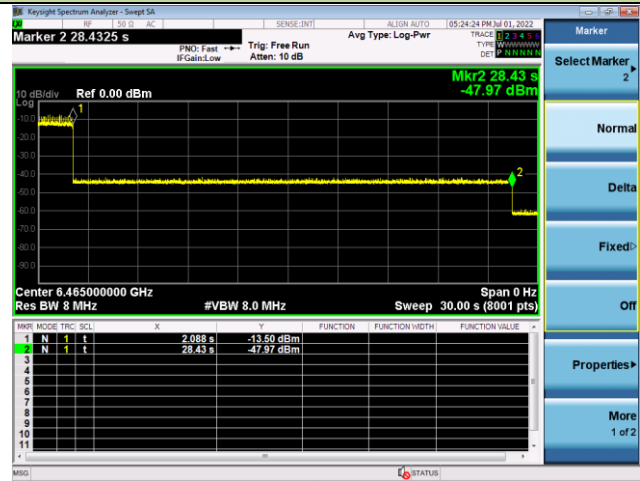


Test Result of EUT ceased transmission (NII-7 Band)


802.11ax-HE20 / CH153

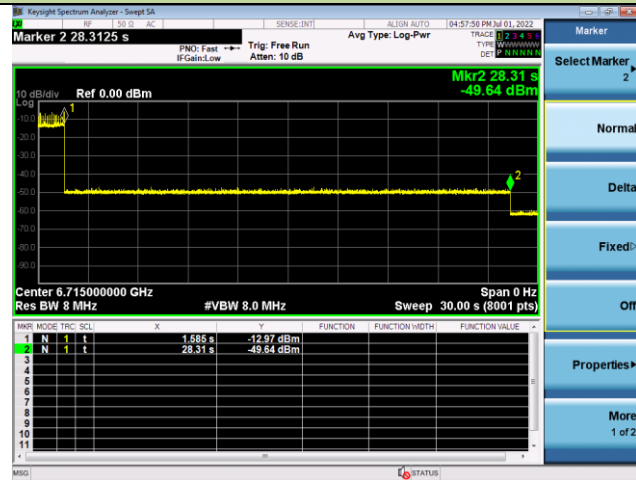


802.11ax-HE160 / CH143 (Low Edge)

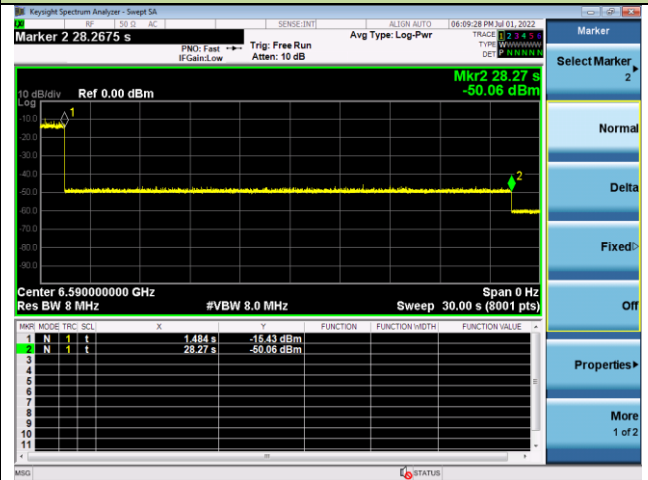

802.11ax-HE160 / CH143 (Middle)

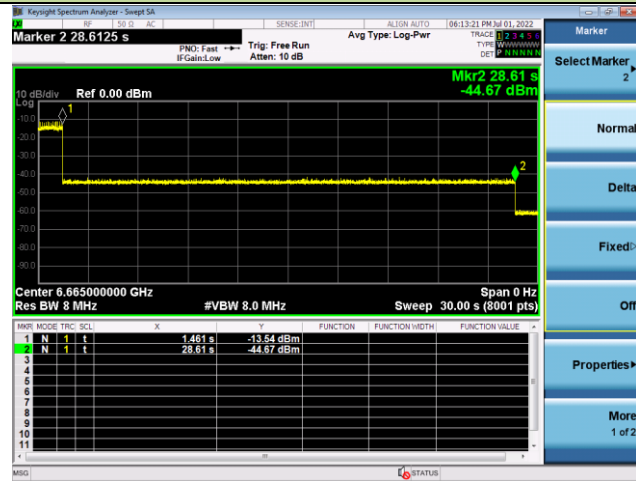


802.11ax-HE160 / CH143 (High Edge)

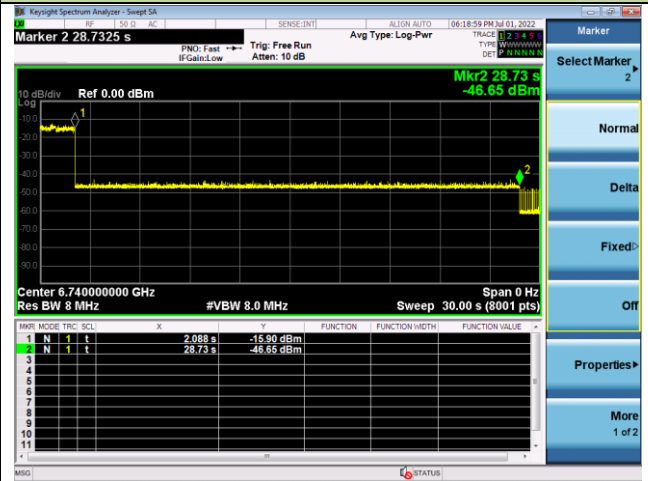


## Test Result of EUT ceased transmission (NII-8 Band)


## 802.11ax-HE20 / CH213

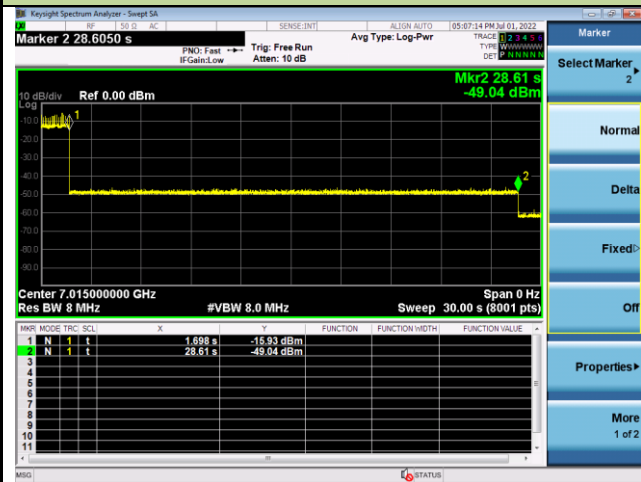


## 802.11ax-HE160 / CH207 (Low Edge)

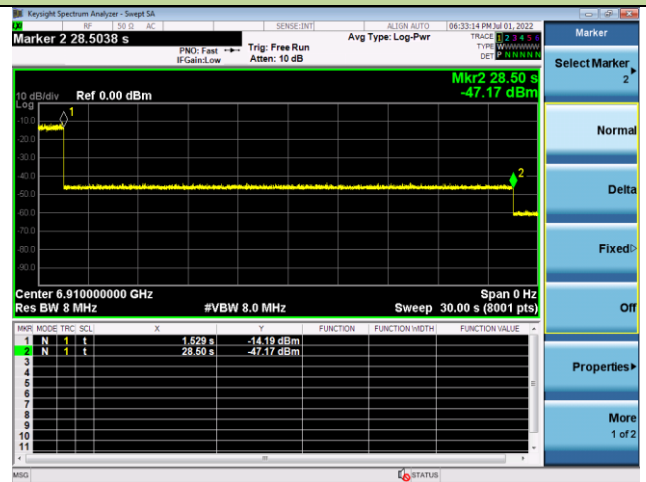

## 802.11ax-HE160 / CH207 (Middle)

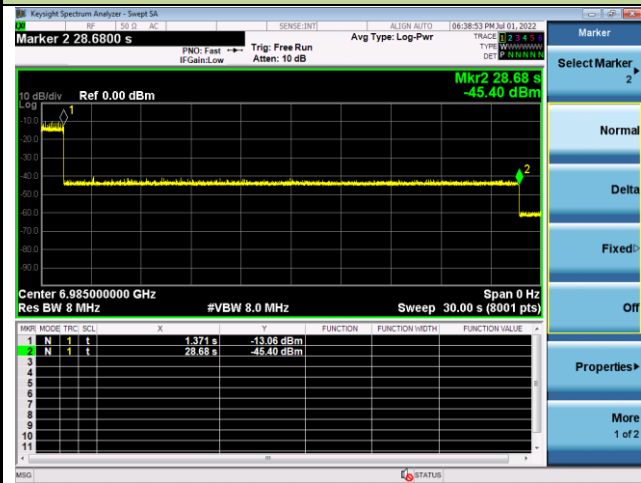

## 802.11ax-HE160 / CH207 (High Edge)

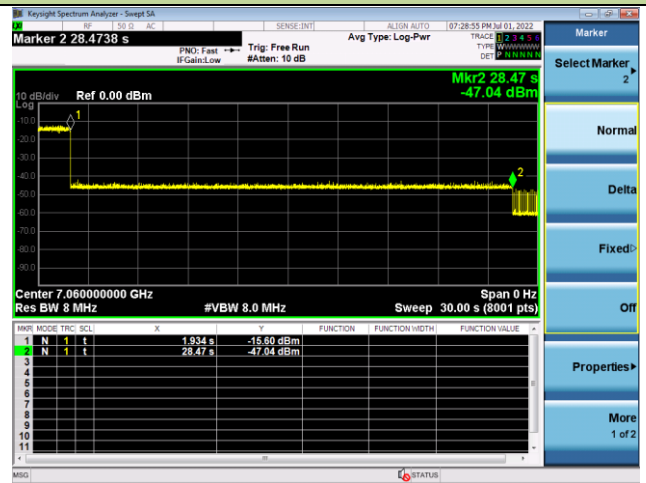

**A.8 Radiated Spurious Emission Test Result**

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	1
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8735.0	33.4	13.0	46.4	88.2	-41.8	Peak	Horizontal
*	10035.5	36.4	14.1	50.6	88.2	-37.6	Peak	Horizontal
	10970.5	33.7	16.6	50.3	74.0	-23.7	Peak	Horizontal
	11557.0	33.5	17.3	50.9	74.0	-23.1	Peak	Horizontal
*	8769.0	34.7	13.2	47.9	88.2	-40.3	Peak	Vertical
*	9814.5	36.0	13.9	49.9	88.2	-38.3	Peak	Vertical
	10613.5	35.5	15.9	51.4	74.0	-22.6	Peak	Vertical
	11438.0	33.1	17.5	50.6	74.0	-23.4	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	49
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8752.0	34.0	13.0	47.0	88.2	-41.2	Peak	Horizontal
*	9661.5	35.4	13.7	49.1	88.2	-39.1	Peak	Horizontal
	10919.5	33.9	16.7	50.5	74.0	-23.5	Peak	Horizontal
	11531.5	33.2	17.6	50.8	74.0	-23.2	Peak	Horizontal
*	8777.5	34.2	13.3	47.5	88.2	-40.7	Peak	Vertical
*	10010.0	34.8	13.9	48.7	88.2	-39.5	Peak	Vertical
	11183.0	33.6	16.9	50.5	74.0	-23.5	Peak	Vertical
	11608.0	33.3	17.5	50.8	74.0	-23.2	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8769.0	34.1	13.2	47.3	88.2	-40.9	Peak	Horizontal
*	9942.0	36.3	14.1	50.4	88.2	-37.8	Peak	Horizontal
	11064.0	33.2	16.9	50.1	74.0	-23.9	Peak	Horizontal
	11761.0	33.6	17.3	50.9	74.0	-23.1	Peak	Horizontal
*	8828.5	34.3	13.2	47.5	88.2	-40.7	Peak	Vertical
*	9670.0	35.8	13.9	49.7	88.2	-38.5	Peak	Vertical
	11149.0	33.3	17.1	50.4	74.0	-23.6	Peak	Vertical
	12254.0	33.3	17.9	51.2	74.0	-22.8	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8641.5	34.8	12.7	47.5	88.2	-40.7	Peak	Horizontal
*	9576.5	35.9	13.9	49.7	88.2	-38.5	Peak	Horizontal
	11438.0	33.9	17.5	51.4	74.0	-22.6	Peak	Horizontal
	11905.5	33.4	17.2	50.6	74.0	-23.4	Peak	Horizontal
*	8803.0	34.6	13.3	47.9	88.2	-40.3	Peak	Vertical
*	9976.0	35.1	14.2	49.3	88.2	-38.9	Peak	Vertical
	11217.0	34.1	17.2	51.4	74.0	-22.6	Peak	Vertical
	11914.0	33.0	17.1	50.1	74.0	-23.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8590.5	34.2	12.5	46.7	88.2	-41.5	Peak	Horizontal
*	9959.0	35.2	14.1	49.3	88.2	-38.9	Peak	Horizontal
	10877.0	35.6	16.4	52.0	74.0	-22.0	Peak	Horizontal
	12143.5	34.0	17.3	51.3	74.0	-22.7	Peak	Horizontal
*	8588.5	35.3	11.8	47.1	88.2	-41.1	Peak	Vertical
*	9848.5	36.2	13.7	49.9	88.2	-38.3	Peak	Vertical
	10919.5	34.9	16.7	51.5	74.0	-22.5	Peak	Vertical
	12356.0	33.8	17.3	51.1	74.0	-22.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8701.0	34.5	13.1	47.6	88.2	-40.6	Peak	Horizontal
*	9899.5	35.9	13.9	49.8	88.2	-38.4	Peak	Horizontal
	11208.5	33.9	17.2	51.2	74.0	-22.8	Peak	Horizontal
	12237.0	34.3	17.6	51.9	74.0	-22.1	Peak	Horizontal
*	8794.5	33.9	13.3	47.3	88.2	-40.9	Peak	Vertical
*	9857.0	34.3	13.8	48.1	88.2	-40.1	Peak	Vertical
	10945.0	33.9	16.5	50.4	74.0	-23.6	Peak	Vertical
	11914.0	32.4	17.1	49.5	74.0	-24.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8709.5	34.7	13.0	47.7	88.2	-40.5	Peak	Horizontal
*	10120.5	35.4	14.0	49.3	88.2	-38.9	Peak	Horizontal
	11013.0	34.5	16.6	51.0	74.0	-23.0	Peak	Horizontal
	11497.5	34.1	17.4	51.5	74.0	-22.5	Peak	Horizontal
*	8794.5	32.4	13.3	45.8	88.2	-42.4	Peak	Vertical
*	9976.0	34.2	14.2	48.5	88.2	-39.7	Peak	Vertical
	10979.0	33.3	16.6	49.8	74.0	-24.2	Peak	Vertical
	11820.5	32.4	17.2	49.6	74.0	-24.4	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	153
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8794.5	35.6	13.3	49.0	88.2	-39.2	Peak	Horizontal
*	9984.5	34.8	14.2	49.0	88.2	-39.2	Peak	Horizontal
	10987.5	33.3	16.5	49.9	74.0	-24.1	Peak	Horizontal
	12220.0	34.8	17.7	52.4	74.0	-21.6	Peak	Horizontal
*	8692.5	33.9	13.1	47.1	88.2	-41.1	Peak	Vertical
*	10273.5	34.8	14.9	49.6	88.2	-38.6	Peak	Vertical
	10928.0	34.4	16.7	51.1	74.0	-22.9	Peak	Vertical
	11582.5	34.0	17.5	51.5	74.0	-22.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8718.0	34.9	13.0	47.9	88.2	-40.3	Peak	Horizontal
*	10018.5	35.4	14.1	49.6	88.2	-38.6	Peak	Horizontal
	10936.5	33.8	16.6	50.5	74.0	-23.5	Peak	Horizontal
	12296.5	33.5	17.3	50.8	74.0	-23.2	Peak	Horizontal
*	8769.0	34.1	13.2	47.3	88.2	-40.9	Peak	Vertical
*	10579.5	34.0	15.5	49.5	88.2	-38.7	Peak	Vertical
	11276.5	31.9	17.1	49.0	74.0	-25.0	Peak	Vertical
	12245.5	31.7	17.8	49.5	74.0	-24.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8718.0	34.7	13.0	47.7	88.2	-40.5	Peak	Horizontal
*	9899.5	36.2	13.9	50.1	88.2	-38.1	Peak	Horizontal
	10962.0	33.9	16.5	50.4	74.0	-23.6	Peak	Horizontal
	12024.5	34.0	17.1	51.1	74.0	-22.9	Peak	Horizontal
*	8709.5	34.7	13.0	47.7	88.2	-40.5	Peak	Vertical
*	9670.0	35.4	13.9	49.2	88.2	-39.0	Peak	Vertical
	10945.0	34.1	16.5	50.6	74.0	-23.4	Peak	Vertical
	12118.0	33.7	17.5	51.2	74.0	-22.8	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8760.5	34.7	13.1	47.9	88.2	-40.3	Peak	Horizontal
*	10010.0	35.2	13.9	49.0	88.2	-39.2	Peak	Horizontal
	10970.5	34.8	16.6	51.4	74.0	-22.6	Peak	Horizontal
	12228.5	33.3	17.6	50.8	74.0	-23.2	Peak	Horizontal
*	8786.0	34.3	13.3	47.7	88.2	-40.5	Peak	Vertical
*	9908.0	34.5	13.8	48.3	88.2	-39.9	Peak	Vertical
	11072.5	33.1	16.8	50.0	74.0	-24.0	Peak	Vertical
	12118.0	32.7	17.5	50.2	74.0	-23.8	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	213
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	34.2	13.3	47.4	88.2	-40.8	Peak	Horizontal
*	10120.5	35.2	14.0	49.2	88.2	-39.0	Peak	Horizontal
	11030.0	34.1	16.4	50.5	74.0	-23.5	Peak	Horizontal
	11684.5	33.6	17.5	51.1	74.0	-22.9	Peak	Horizontal
*	8701.0	33.7	13.1	46.9	88.2	-41.3	Peak	Vertical
*	10069.5	34.8	14.0	48.7	88.2	-39.5	Peak	Vertical
	10783.5	34.5	16.5	50.9	74.0	-23.1	Peak	Vertical
	11506.0	33.8	17.6	51.4	74.0	-22.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE20	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8684.0	33.7	13.0	46.7	88.2	-41.5	Peak	Horizontal
*	10001.5	35.6	13.9	49.4	88.2	-38.8	Peak	Horizontal
	11370.0	33.2	17.5	50.7	74.0	-23.3	Peak	Horizontal
	11931.0	33.4	16.9	50.3	74.0	-23.7	Peak	Horizontal
*	8701.0	33.7	13.1	46.8	88.2	-41.4	Peak	Vertical
*	9746.5	35.2	13.7	48.9	88.2	-39.3	Peak	Vertical
	11064.0	34.5	16.9	51.4	74.0	-22.6	Peak	Vertical
	11761.0	33.0	17.3	50.3	74.0	-23.7	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	3
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8811.5	34.4	13.3	47.8	88.2	-40.4	Peak	Horizontal
*	9984.5	36.4	14.2	50.7	88.2	-37.5	Peak	Horizontal
	11506.0	33.7	17.6	51.2	74.0	-22.8	Peak	Horizontal
	11863.0	33.6	17.0	50.6	74.0	-23.4	Peak	Horizontal
*	8726.5	34.6	13.1	47.6	88.2	-40.6	Peak	Vertical
*	10282.0	35.2	14.8	50.0	88.2	-38.2	Peak	Vertical
	11489.0	33.7	17.2	50.9	74.0	-23.1	Peak	Vertical
	12288.0	33.9	17.3	51.1	74.0	-22.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	51
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	34.9	13.3	48.1	88.2	-40.1	Peak	Horizontal
*	10571.0	35.0	15.5	50.5	88.2	-37.7	Peak	Horizontal
	11225.5	33.7	17.2	50.8	74.0	-23.2	Peak	Horizontal
	12245.5	33.0	17.8	50.8	74.0	-23.2	Peak	Horizontal
*	8811.5	35.1	13.3	48.4	88.2	-39.8	Peak	Vertical
*	10069.5	35.1	14.0	49.1	88.2	-39.1	Peak	Vertical
	10613.5	35.2	15.9	51.1	74.0	-22.9	Peak	Vertical
	11650.5	33.3	17.8	51.1	74.0	-22.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8803.0	34.7	13.3	48.0	88.2	-40.2	Peak	Horizontal
*	9746.5	36.0	13.7	49.6	88.2	-38.6	Peak	Horizontal
	10996.0	34.6	16.6	51.2	74.0	-22.8	Peak	Horizontal
	11667.5	33.5	17.7	51.1	74.0	-22.9	Peak	Horizontal
*	8828.5	35.1	13.2	48.3	88.2	-39.9	Peak	Vertical
*	10197.0	35.6	14.4	50.0	88.2	-38.2	Peak	Vertical
	11531.5	33.6	17.6	51.2	74.0	-22.8	Peak	Vertical
	12118.0	33.6	17.5	51.1	74.0	-22.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8769.0	33.9	13.2	47.1	88.2	-41.1	Peak	Horizontal
*	9984.5	34.6	14.2	48.9	88.2	-39.3	Peak	Horizontal
	11191.5	33.3	17.1	50.4	74.0	-23.6	Peak	Horizontal
	12194.5	33.4	17.8	51.2	74.0	-22.8	Peak	Horizontal
*	8718.0	34.4	13.0	47.4	88.2	-40.8	Peak	Vertical
*	10358.5	35.3	15.3	50.6	88.2	-37.6	Peak	Vertical
	10928.0	33.7	16.7	50.5	74.0	-23.5	Peak	Vertical
	11897.0	34.2	17.1	51.3	74.0	-22.7	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8811.5	34.4	13.3	47.7	88.2	-40.5	Peak	Horizontal
*	10086.5	35.1	13.9	49.1	88.2	-39.1	Peak	Horizontal
	11072.5	34.2	16.8	51.0	74.0	-23.0	Peak	Horizontal
	11523.0	33.4	17.6	51.0	74.0	-23.0	Peak	Horizontal
*	8786.0	34.0	13.3	47.3	88.2	-40.9	Peak	Vertical
*	10205.5	34.6	14.3	48.9	88.2	-39.3	Peak	Vertical
	10885.5	34.6	16.3	50.9	74.0	-23.1	Peak	Vertical
	11667.5	33.5	17.7	51.2	74.0	-22.8	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	115
Remark	3. Average measurement was not performed if peak level lower than average limit. 4. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8726.5	34.4	13.1	47.5	88.2	-40.7	Peak	Horizontal
*	9942.0	34.8	14.1	48.9	88.2	-39.3	Peak	Horizontal
	11140.5	33.9	16.7	50.6	74.0	-23.4	Peak	Horizontal
	11650.5	32.9	17.8	50.7	74.0	-23.3	Peak	Horizontal
*	8701.0	34.2	13.1	47.4	88.2	-40.8	Peak	Vertical
*	9976.0	34.4	14.2	48.6	88.2	-39.6	Peak	Vertical
	10783.5	34.3	16.5	50.7	74.0	-23.3	Peak	Vertical
	11616.5	33.8	17.5	51.4	74.0	-22.7	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8726.5	34.5	13.1	47.6	88.2	-40.6	Peak	Horizontal
*	10418.0	34.7	15.5	50.2	88.2	-38.0	Peak	Horizontal
	10928.0	34.3	16.7	51.0	74.0	-23.0	Peak	Horizontal
	11659.0	32.6	17.9	50.4	74.0	-23.6	Peak	Horizontal
*	8760.5	34.5	13.1	47.6	88.2	-40.6	Peak	Vertical
*	9806.0	34.7	14.0	48.7	88.2	-39.5	Peak	Vertical
	10911.0	34.1	16.6	50.7	74.0	-23.3	Peak	Vertical
	11625.0	33.5	17.5	51.0	74.0	-23.0	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8769.0	33.8	13.2	47.0	88.2	-41.2	Peak	Horizontal
*	10392.5	35.0	15.5	50.5	88.2	-37.7	Peak	Horizontal
	10970.5	33.7	16.6	50.3	74.0	-23.7	Peak	Horizontal
	12203.0	32.9	17.8	50.7	74.0	-23.3	Peak	Horizontal
*	8709.5	34.7	13.0	47.7	88.2	-40.5	Peak	Vertical
*	9993.0	34.5	14.1	48.6	88.2	-39.6	Peak	Vertical
	10817.5	33.9	16.5	50.5	74.0	-23.5	Peak	Vertical
	11650.5	34.0	17.8	51.8	74.0	-22.2	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8752.0	34.5	13.0	47.5	88.2	-40.7	Peak	Horizontal
*	10095.0	35.5	13.9	49.4	88.2	-38.8	Peak	Horizontal
	10885.5	34.1	16.3	50.4	74.0	-23.6	Peak	Horizontal
	11939.5	33.8	17.0	50.7	74.0	-23.3	Peak	Horizontal
*	8760.5	34.5	13.1	47.7	88.2	-40.5	Peak	Vertical
*	9933.5	35.6	14.0	49.6	88.2	-38.6	Peak	Vertical
	11208.5	33.6	17.2	50.8	74.0	-23.2	Peak	Vertical
	12135.0	33.8	17.3	51.1	74.0	-22.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8718.0	34.6	13.0	47.6	88.2	-40.6	Peak	Horizontal
*	10452.0	34.8	15.4	50.2	88.2	-38.0	Peak	Horizontal
	10877.0	33.4	16.4	49.8	74.0	-24.2	Peak	Horizontal
	11914.0	33.7	17.1	50.8	74.0	-23.2	Peak	Horizontal
*	8769.0	33.6	13.2	46.8	88.2	-41.4	Peak	Vertical
*	10027.0	35.3	14.2	49.5	88.2	-38.7	Peak	Vertical
	11081.0	33.7	16.7	50.4	74.0	-23.6	Peak	Vertical
	11684.5	33.7	17.5	51.2	74.0	-22.8	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	34.2	13.3	47.5	88.2	-40.7	Peak	Horizontal
*	10061.0	34.9	14.0	48.9	88.2	-39.3	Peak	Horizontal
	10996.0	33.3	16.6	49.9	74.0	-24.1	Peak	Horizontal
	11514.5	33.4	17.6	51.0	74.0	-23.0	Peak	Horizontal
*	8777.5	34.5	13.3	47.8	88.2	-40.4	Peak	Vertical
*	9976.0	34.2	14.2	48.4	88.2	-39.8	Peak	Vertical
	10987.5	34.0	16.5	50.6	74.0	-23.4	Peak	Vertical
	11599.5	34.0	17.5	51.5	74.0	-22.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8769.0	34.6	13.2	47.8	88.2	-40.4	Peak	Horizontal
*	10010.0	35.2	13.9	49.0	88.2	-39.2	Peak	Horizontal
	11208.5	33.2	17.2	50.4	74.0	-23.6	Peak	Horizontal
	11684.5	33.3	17.5	50.8	74.0	-23.2	Peak	Horizontal
*	8820.0	33.7	13.3	47.0	88.2	-41.2	Peak	Vertical
*	9993.0	35.2	14.1	49.3	88.2	-38.9	Peak	Vertical
	10928.0	33.4	16.7	50.1	74.0	-23.9	Peak	Vertical
	11616.5	33.2	17.5	50.7	74.0	-23.3	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE40	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8709.5	34.4	13.0	47.4	88.2	-40.8	Peak	Horizontal
*	10001.5	35.0	13.9	48.9	88.2	-39.3	Peak	Horizontal
	10690.0	34.9	15.7	50.6	74.0	-23.4	Peak	Horizontal
	11667.5	33.6	17.7	51.3	74.0	-22.7	Peak	Horizontal
*	8718.0	34.8	13.0	47.8	88.2	-40.4	Peak	Vertical
*	10358.5	34.7	15.3	50.0	88.2	-38.2	Peak	Vertical
	11013.0	34.0	16.6	50.6	74.0	-23.4	Peak	Vertical
	11480.5	34.8	17.2	52.0	74.0	-22.0	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE80	Test Channel	7
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8760.5	35.3	13.1	48.5	88.2	-39.7	Peak	Horizontal
*	10486.0	34.5	15.6	50.2	88.2	-38.0	Peak	Horizontal
	11055.5	34.1	16.7	50.9	74.0	-23.1	Peak	Horizontal
	12050.0	33.5	17.2	50.7	74.0	-23.3	Peak	Horizontal
*	8786.0	35.4	13.3	48.7	88.2	-39.5	Peak	Vertical
*	9644.5	37.7	13.7	51.4	88.2	-36.8	Peak	Vertical
	11234.0	33.5	17.3	50.7	74.0	-23.3	Peak	Vertical
	12526.0	33.9	17.2	51.1	74.0	-22.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8760.5	34.6	13.1	47.8	88.2	-40.4	Peak	Horizontal
*	10035.5	35.4	14.1	49.5	88.2	-38.7	Peak	Horizontal
	11242.5	33.8	17.2	51.0	74.0	-23.0	Peak	Horizontal
	11897.0	33.9	17.1	51.0	74.0	-23.0	Peak	Horizontal
*	8777.5	34.7	13.3	48.0	88.2	-40.2	Peak	Vertical
*	9891.0	36.1	14.0	50.1	88.2	-38.1	Peak	Vertical
	11208.5	33.6	17.2	50.9	74.0	-23.1	Peak	Vertical
	12313.5	33.9	17.4	51.4	74.0	-22.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8820.0	34.0	13.3	47.3	88.2	-40.9	Peak	Horizontal
*	10435.0	35.3	15.4	50.7	88.2	-37.5	Peak	Horizontal
	11089.5	33.8	16.7	50.5	74.0	-23.5	Peak	Horizontal
	11820.5	33.4	17.2	50.6	74.0	-23.4	Peak	Horizontal
*	8820.0	34.8	13.3	48.1	88.2	-40.1	Peak	Vertical
*	10299.0	35.5	14.8	50.3	88.2	-37.9	Peak	Vertical
	11242.5	33.7	17.2	50.9	74.0	-23.1	Peak	Vertical
	11650.5	33.9	17.8	51.7	74.0	-22.3	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE80	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8811.5	34.2	13.3	47.5	88.2	-40.7	Peak	Horizontal
*	9831.5	36.0	13.8	49.8	88.2	-38.4	Peak	Horizontal
	10911.0	33.5	16.6	50.0	74.0	-24.0	Peak	Horizontal
	11608.0	32.8	17.5	50.3	74.0	-23.7	Peak	Horizontal
*	8675.5	34.7	12.8	47.5	88.2	-40.7	Peak	Vertical
*	10129.0	34.8	14.0	48.8	88.2	-39.4	Peak	Vertical
	10953.5	33.3	16.4	49.8	74.0	-24.2	Peak	Vertical
	11531.5	33.7	17.6	51.3	74.0	-22.7	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE80	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8718.0	35.5	13.0	48.5	88.2	-39.7	Peak	Horizontal
*	10027.0	35.7	14.2	49.9	88.2	-38.3	Peak	Horizontal
	10928.0	32.9	16.7	49.6	74.0	-24.4	Peak	Horizontal
	11642.0	34.0	17.7	51.6	74.0	-22.4	Peak	Horizontal
*	8777.5	33.8	13.3	47.1	88.2	-41.1	Peak	Vertical
*	9916.5	34.4	13.7	48.2	88.2	-40.0	Peak	Vertical
	10639.0	33.4	15.8	49.2	74.0	-24.8	Peak	Vertical
	11336.0	32.6	17.2	49.8	74.0	-24.2	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8786.0	34.5	13.3	47.8	88.2	-40.4	Peak	Horizontal
*	10035.5	34.9	14.1	49.0	88.2	-39.2	Peak	Horizontal
	10749.5	34.3	16.2	50.5	74.0	-23.5	Peak	Horizontal
	11642.0	33.6	17.7	51.3	74.0	-22.7	Peak	Horizontal
*	8726.5	35.1	13.1	48.2	88.2	-40.0	Peak	Vertical
*	9984.5	35.0	14.2	49.2	88.2	-39.0	Peak	Vertical
	10877.0	33.4	16.4	49.8	74.0	-24.2	Peak	Vertical
	11659.0	34.1	17.9	51.9	74.0	-22.1	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8692.5	33.3	13.1	46.4	88.2	-41.8	Peak	Horizontal
*	10078.0	34.9	14.0	48.9	88.2	-39.3	Peak	Horizontal
	10622.0	34.5	15.9	50.4	74.0	-23.6	Peak	Horizontal
	11302.0	33.1	17.2	50.4	74.0	-23.6	Peak	Horizontal
*	8854.0	34.2	13.4	47.6	88.2	-40.6	Peak	Vertical
*	10520.0	34.4	15.4	49.8	88.2	-38.4	Peak	Vertical
	11225.5	33.6	17.2	50.8	74.0	-23.2	Peak	Vertical
	11718.5	33.4	17.1	50.5	74.0	-23.5	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE80	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8726.5	34.2	13.1	47.3	88.2	-40.9	Peak	Horizontal
*	10027.0	34.7	14.2	48.9	88.2	-39.3	Peak	Horizontal
	10783.5	34.2	16.5	50.7	74.0	-23.3	Peak	Horizontal
	11378.5	33.8	17.4	51.2	74.0	-22.8	Peak	Horizontal
*	8786.0	33.0	13.3	46.4	88.2	-41.8	Peak	Vertical
*	10231.0	34.7	14.4	49.2	88.2	-39.0	Peak	Vertical
	11055.5	33.2	16.7	49.9	74.0	-24.1	Peak	Vertical
	11574.0	33.6	17.5	51.1	74.0	-22.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE80	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8692.5	34.7	13.1	47.9	88.2	-40.3	Peak	Horizontal
*	10256.5	35.5	14.7	50.2	88.2	-38.0	Peak	Horizontal
	10902.5	34.2	16.4	50.6	74.0	-23.4	Peak	Horizontal
	11667.5	33.3	17.7	50.9	74.0	-23.1	Peak	Horizontal
*	8794.5	33.7	13.3	47.1	88.2	-41.1	Peak	Vertical
*	10146.0	34.9	14.1	49.0	88.2	-39.2	Peak	Vertical
	11234.0	33.6	17.3	50.9	74.0	-23.1	Peak	Vertical
	12194.5	33.3	17.8	51.0	74.0	-23.0	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE80	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8879.5	33.9	13.1	47.0	88.2	-41.2	Peak	Horizontal
*	10180.0	34.6	14.5	49.1	88.2	-39.1	Peak	Horizontal
	11055.5	33.5	16.7	50.2	74.0	-23.8	Peak	Horizontal
	12203.0	33.4	17.8	51.1	74.0	-22.9	Peak	Horizontal
*	8862.5	34.1	13.2	47.4	88.2	-40.8	Peak	Vertical
*	10375.5	34.0	15.3	49.3	88.2	-38.9	Peak	Vertical
	10860.0	33.4	16.6	50.0	74.0	-24.0	Peak	Vertical
	11642.0	33.1	17.7	50.8	74.0	-23.2	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)



Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE160	Test Channel	15
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8828.5	34.3	13.2	47.5	88.2	-40.7	Peak	Horizontal
*	9687.0	35.8	13.8	49.6	88.2	-38.6	Peak	Horizontal
	10996.0	33.6	16.6	50.2	74.0	-23.8	Peak	Horizontal
	11591.0	33.4	17.6	51.0	74.0	-23.0	Peak	Horizontal
*	8794.5	34.4	13.3	47.8	88.2	-40.4	Peak	Vertical
*	10579.5	35.3	15.5	50.8	88.2	-37.4	Peak	Vertical
	11480.5	33.5	17.2	50.7	74.0	-23.3	Peak	Vertical
	12220.0	33.8	17.7	51.4	74.0	-22.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8811.5	34.3	13.3	47.6	88.2	-40.6	Peak	Horizontal
*	10256.5	35.2	14.7	49.9	88.2	-38.3	Peak	Horizontal
	10868.5	34.1	16.6	50.7	74.0	-23.4	Peak	Horizontal
	11557.0	33.6	17.3	50.9	74.0	-23.1	Peak	Horizontal
*	8803.0	34.2	13.3	47.5	88.2	-40.7	Peak	Vertical
*	10171.5	34.4	14.4	48.9	88.2	-39.3	Peak	Vertical
	10996.0	34.2	16.6	50.8	74.0	-23.2	Peak	Vertical
	11599.5	33.3	17.5	50.9	74.0	-23.1	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8777.5	34.6	13.3	47.9	88.2	-40.3	Peak	Horizontal
*	10265.0	35.0	14.9	49.8	88.2	-38.4	Peak	Horizontal
	10851.5	34.5	16.6	51.0	74.0	-23.0	Peak	Horizontal
	12033.0	33.5	17.3	50.8	74.0	-23.2	Peak	Horizontal
*	8777.5	34.1	13.3	47.4	88.2	-40.8	Peak	Vertical
*	10392.5	34.4	15.5	49.9	88.2	-38.3	Peak	Vertical
	11472.0	33.2	17.2	50.4	74.0	-23.6	Peak	Vertical
	12271.0	32.9	17.6	50.4	74.0	-23.6	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE160	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8811.5	34.5	13.3	47.8	88.2	-40.4	Peak	Horizontal
*	9933.5	34.6	14.0	48.6	88.2	-39.6	Peak	Horizontal
	10851.5	33.9	16.6	50.5	74.0	-23.5	Peak	Horizontal
	11778.0	34.1	17.2	51.3	74.0	-22.7	Peak	Horizontal
*	8743.5	34.3	12.9	47.3	88.2	-40.9	Peak	Vertical
*	9967.5	34.7	14.2	48.9	88.2	-39.3	Peak	Vertical
	10817.5	32.8	16.5	49.3	74.0	-24.7	Peak	Vertical
	12101.0	32.7	17.4	50.1	74.0	-23.9	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8692.5	33.3	13.1	46.4	88.2	-41.8	Peak	Horizontal
*	9993.0	35.4	14.1	49.5	88.2	-38.7	Peak	Horizontal
	10877.0	34.0	16.4	50.4	74.0	-23.6	Peak	Horizontal
	11701.5	34.0	17.2	51.1	74.0	-22.9	Peak	Horizontal
*	8794.5	34.7	13.3	48.0	88.2	-40.2	Peak	Vertical
*	9942.0	34.8	14.1	48.9	88.2	-39.3	Peak	Vertical
	10613.5	35.3	15.9	51.2	74.0	-22.8	Peak	Vertical
	11659.0	32.9	17.9	50.7	74.0	-23.3	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE160	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8675.5	33.6	12.8	46.4	88.2	-41.8	Peak	Horizontal
*	9984.5	34.4	14.2	48.6	88.2	-39.6	Peak	Horizontal
	10970.5	33.9	16.6	50.5	74.0	-23.5	Peak	Horizontal
	11531.5	33.1	17.6	50.8	74.0	-23.2	Peak	Horizontal
*	8726.5	35.2	13.1	48.3	88.2	-39.9	Peak	Vertical
*	10027.0	36.3	14.2	50.6	88.2	-37.6	Peak	Vertical
	10979.0	34.3	16.6	50.9	74.0	-23.1	Peak	Vertical
	12237.0	33.6	17.6	51.3	74.0	-22.7	Peak	Vertical

Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

Product	Wireless Router	Test Engineer	Edith Yu
Test Site	WZ-AC2	Test Date	2022-06-08 ~ 2022-06-11
Test Mode	802.11ax-HE160	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBuV)	Factor (dB/m)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Polarization
*	8760.5	33.9	13.1	47.1	88.2	-41.1	Peak	Horizontal
*	10078.0	35.3	14.0	49.2	88.2	-39.0	Peak	Horizontal
	10885.5	34.3	16.3	50.7	74.0	-23.3	Peak	Horizontal
	11531.5	32.5	17.6	50.1	74.0	-23.9	Peak	Horizontal
*	8692.5	34.0	13.1	47.1	88.2	-41.1	Peak	Vertical
*	10035.5	34.7	14.1	48.9	88.2	-39.3	Peak	Vertical
	10800.5	34.2	16.3	50.5	74.0	-23.5	Peak	Vertical
	11761.0	33.2	17.3	50.5	74.0	-23.5	Peak	Vertical


Note 1: "\*" is not in restricted band.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

**The Worst-Case Result of Radiated Emission below 1GHz:**

Site: WZ-AC2	Test Date: 2022-06-25
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: VULB9162_30-7000MHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6505MHz	

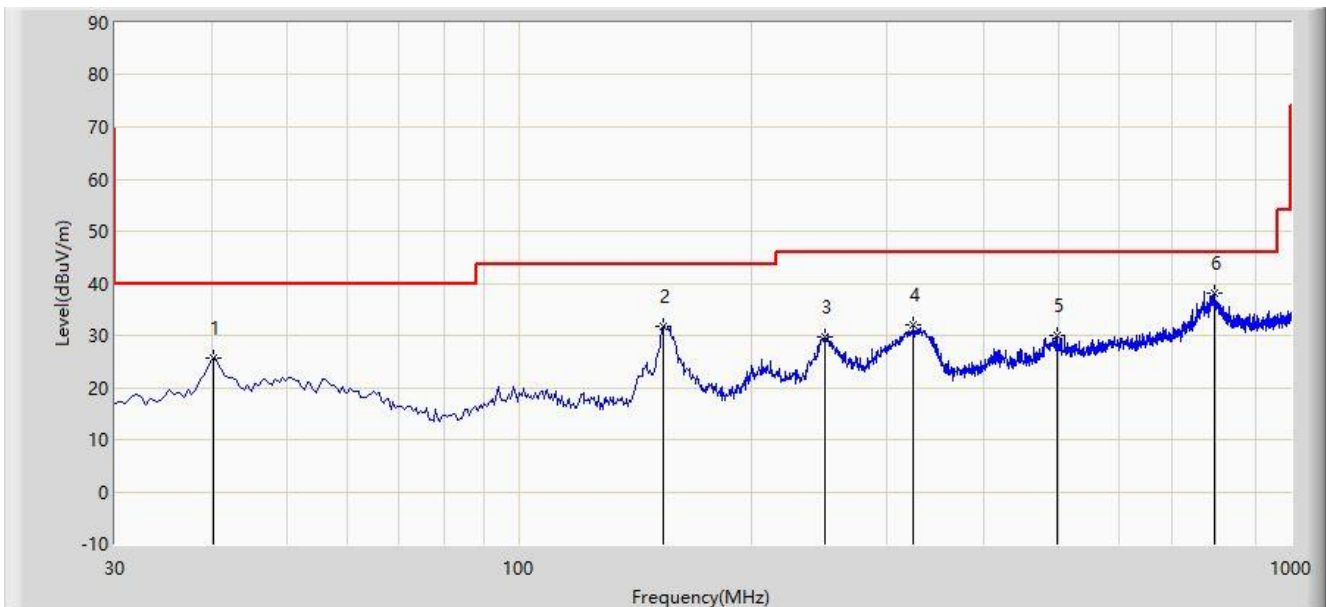

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		40.185	25.644	6.137	-14.356	40.000	19.508	PK
2		154.160	31.797	16.274	-11.703	43.500	15.523	PK
3		248.735	29.745	9.700	-16.255	46.000	20.045	PK
4		324.880	31.946	10.135	-14.054	46.000	21.810	PK
5		498.025	29.998	4.662	-16.002	46.000	25.337	PK
6	*	796.300	38.084	8.393	-7.916	46.000	29.691	PK

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.



Site: WZ-AC2	Test Date: 2022-06-25
Limit: FCC_Part15.209_RE(3m)	Engineer: Charles Zhang
Probe: VULB9162_30-7000MHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6505MHz	

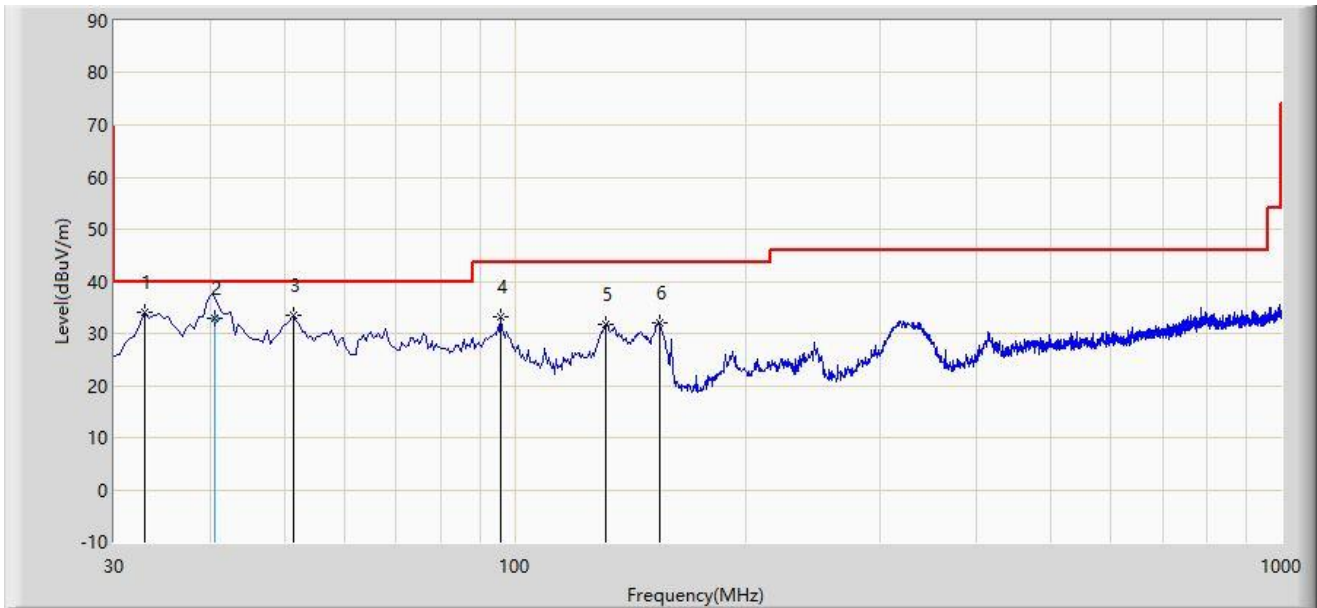

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	32.910	34.075	16.456	-5.925	40.000	17.620	PK
2		40.590	32.815	13.200	-7.185	40.000	19.615	QP
3		51.340	33.572	12.818	-6.428	40.000	20.754	PK
4		95.960	33.092	14.991	-10.408	43.500	18.101	PK
5		131.365	31.772	16.022	-11.728	43.500	15.751	PK
6		154.645	32.066	16.520	-11.434	43.500	15.546	PK

Note 1: " \* ", means this data is the worst emission level.


Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 4: Quasi-Peak measurement was not performed when peak measure level was lower than the quasi-peak limit.

**A.9 Radiated Restricted Band Edge Test Result**

Site: WZ-AC2	Test Date: 2022-06-04 - 16:41
Limit: FCC_Band Edge(3m)_6G_PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

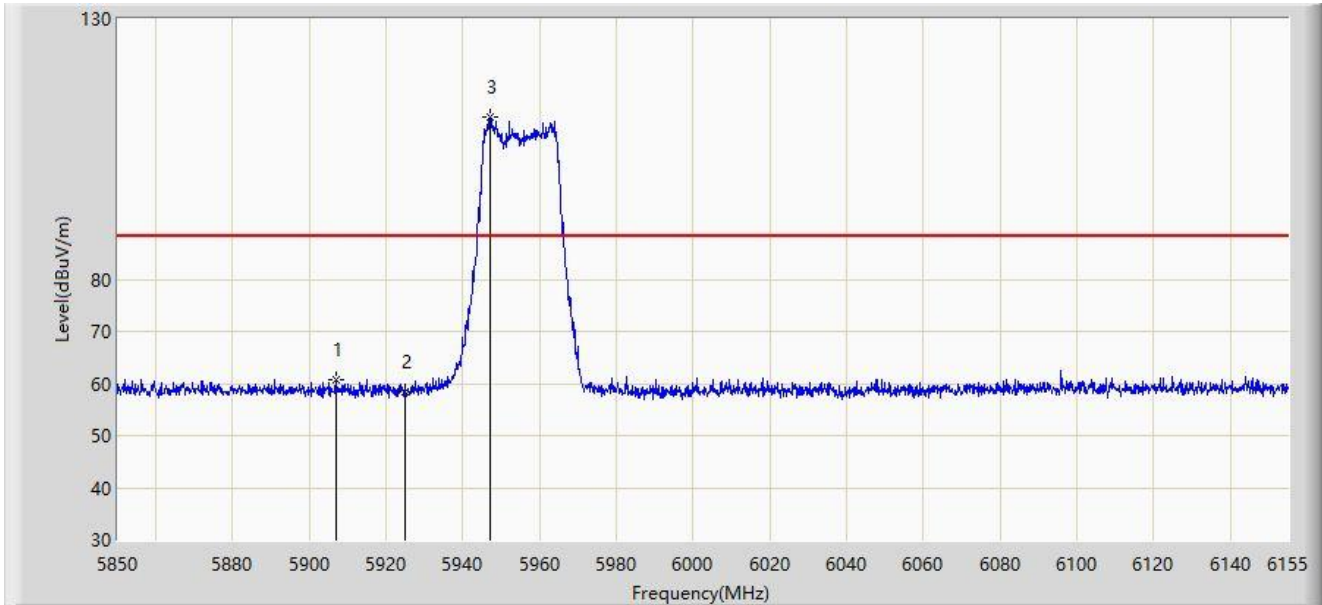


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5906.882	60.780	55.002	-27.420	88.200	5.778	PK
2		5925.000	58.483	52.458	-29.717	88.200	6.025	PK
3		5947.143	111.228	105.007	N/A	N/A	6.221	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 16:53
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

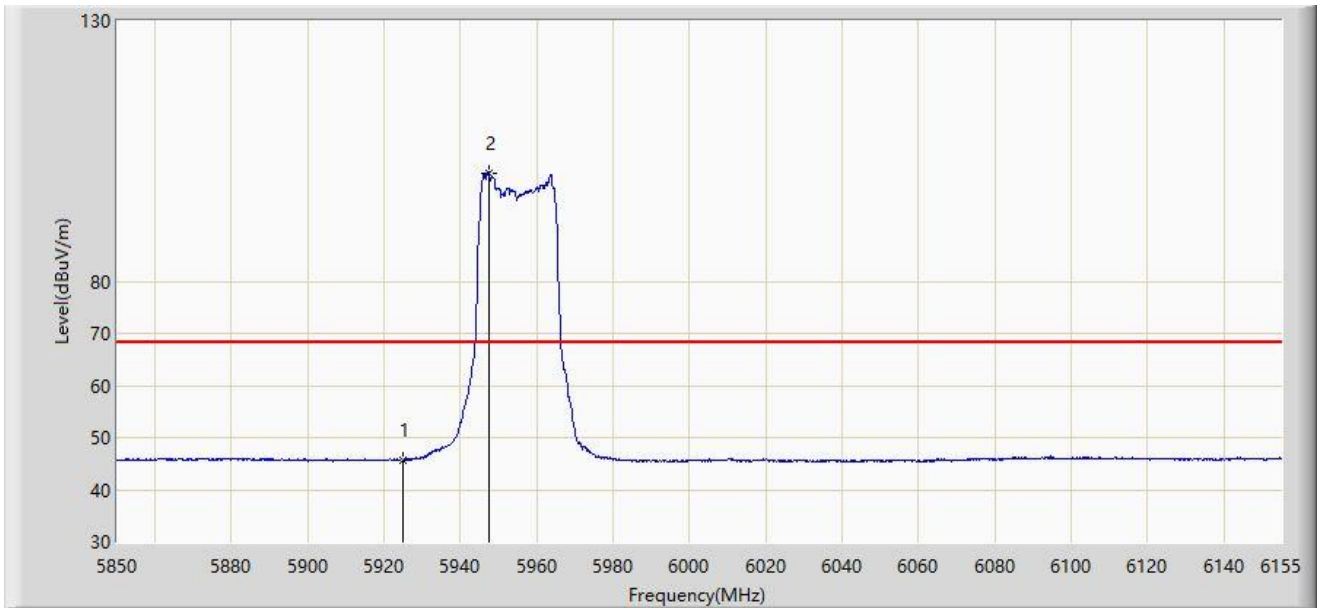


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	45.763	39.738	-22.437	68.200	6.025	AV
2		5947.600	100.812	94.594	N/A	N/A	6.218	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 16:54
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

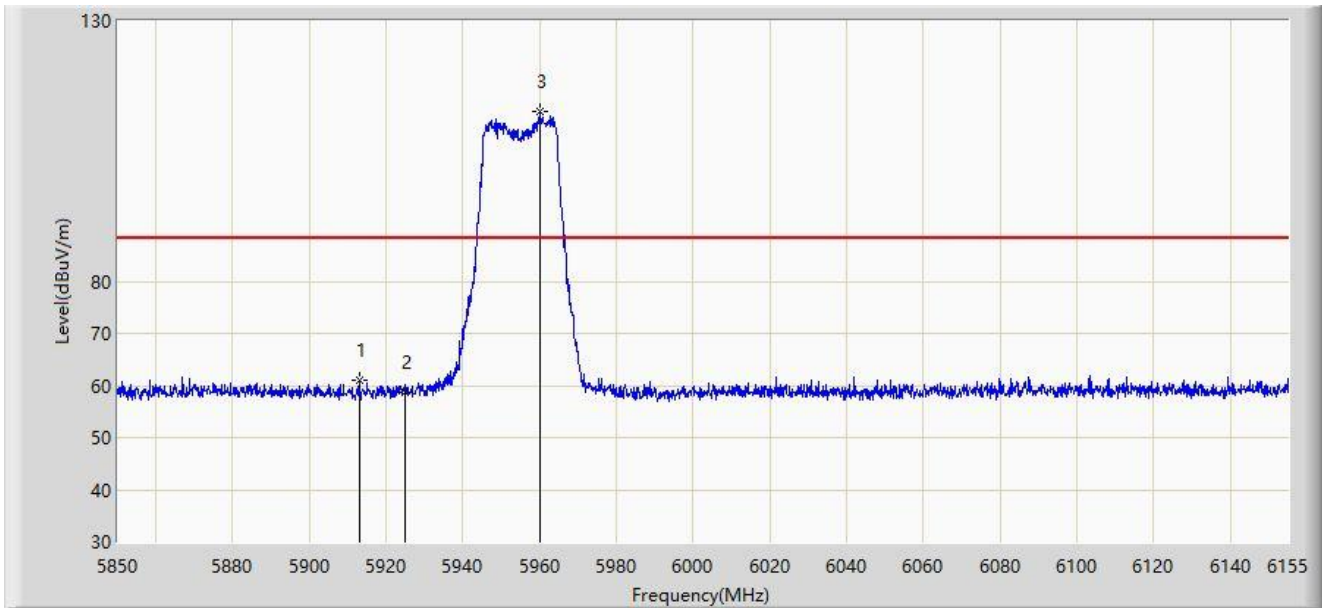


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5912.982	61.085	55.304	-27.115	88.200	5.781	PK
2		5925.000	58.782	52.757	-29.418	88.200	6.025	PK
3		5960.105	112.580	106.451	N/A	N/A	6.129	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 16:56
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 5955MHz	

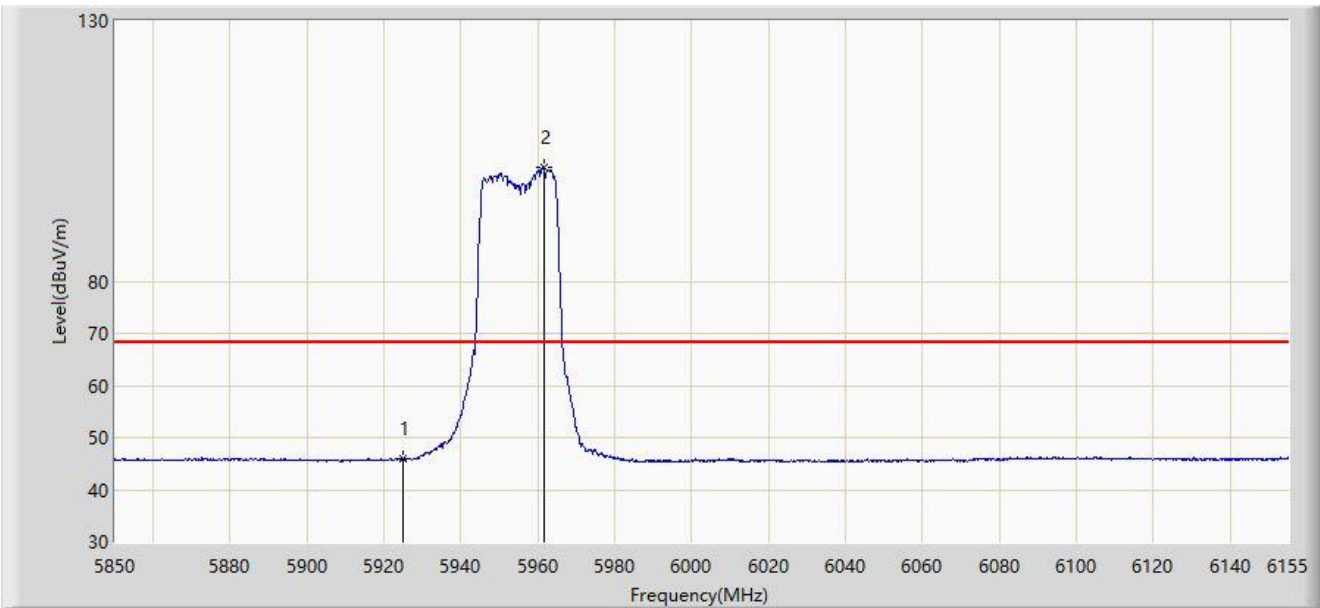


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1	*	5925.000	45.837	39.812	-22.363	68.200	6.025	AV
2		5961.783	101.869	95.743	N/A	N/A	6.126	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 16:57
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 7095MHz	

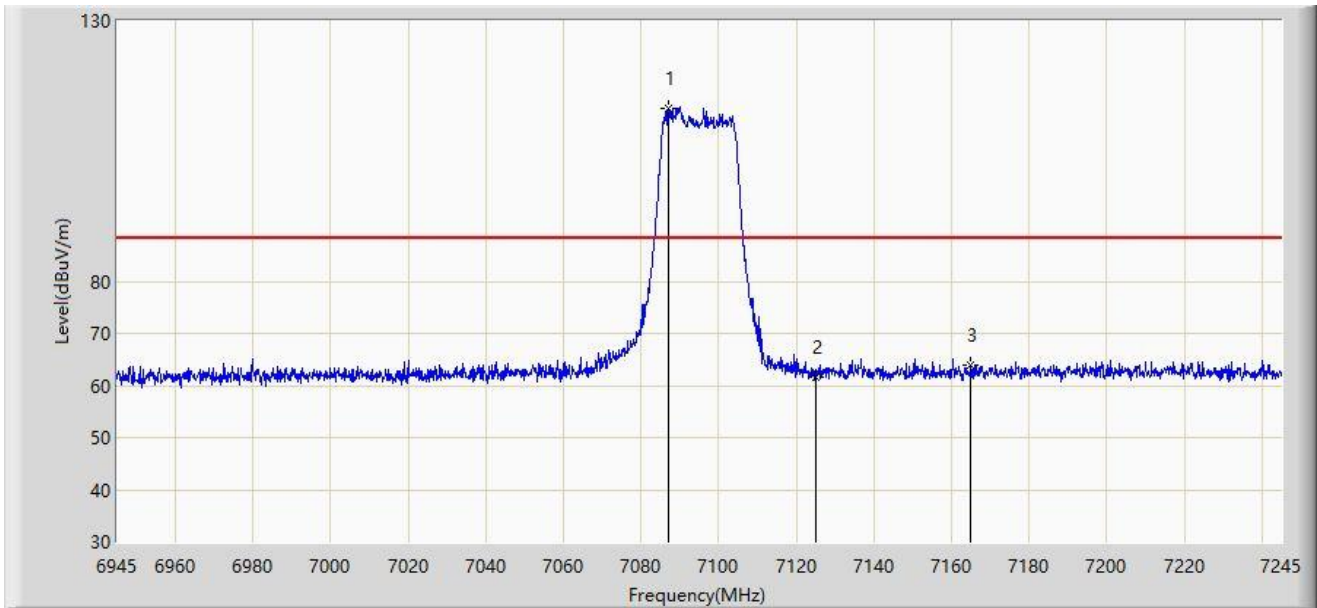


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7087.050	113.117	102.257	N/A	N/A	10.861	PK
2		7125.000	61.724	50.628	-26.476	88.200	11.096	PK
3	*	7165.050	63.917	52.746	-24.283	88.200	11.170	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:03
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 7095MHz	

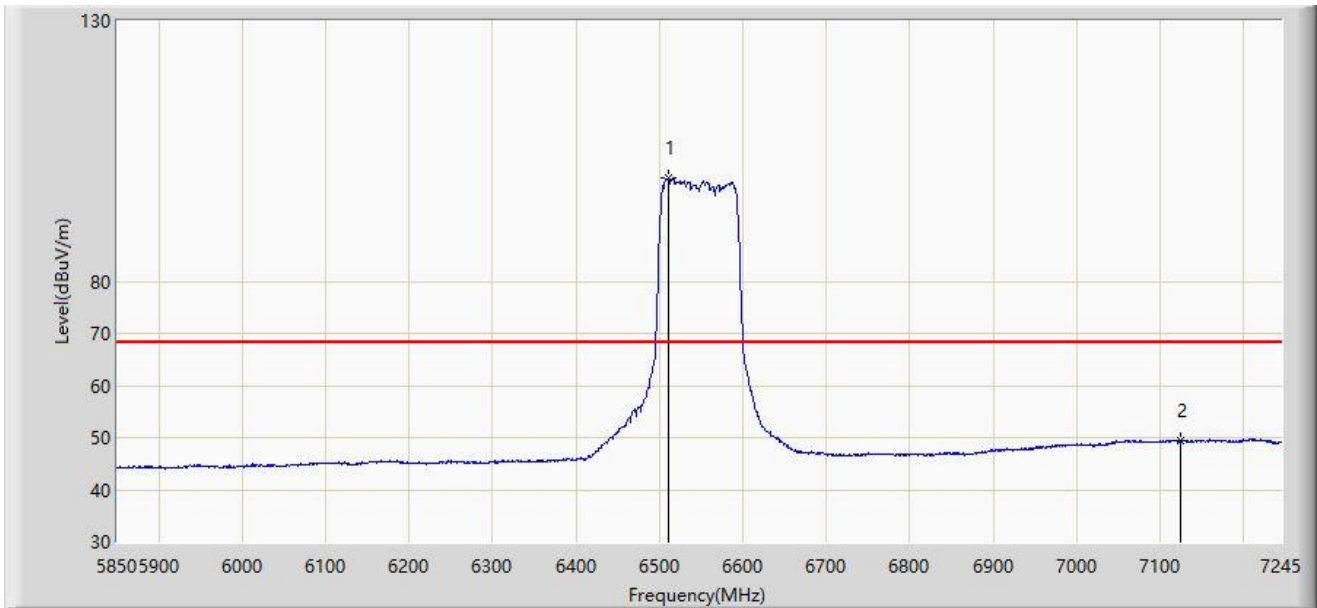


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6510.533	99.764	91.980	N/A	N/A	7.785	AV
2	*	7125.000	49.372	38.276	-18.828	68.200	11.096	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:08
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 7095MHz	

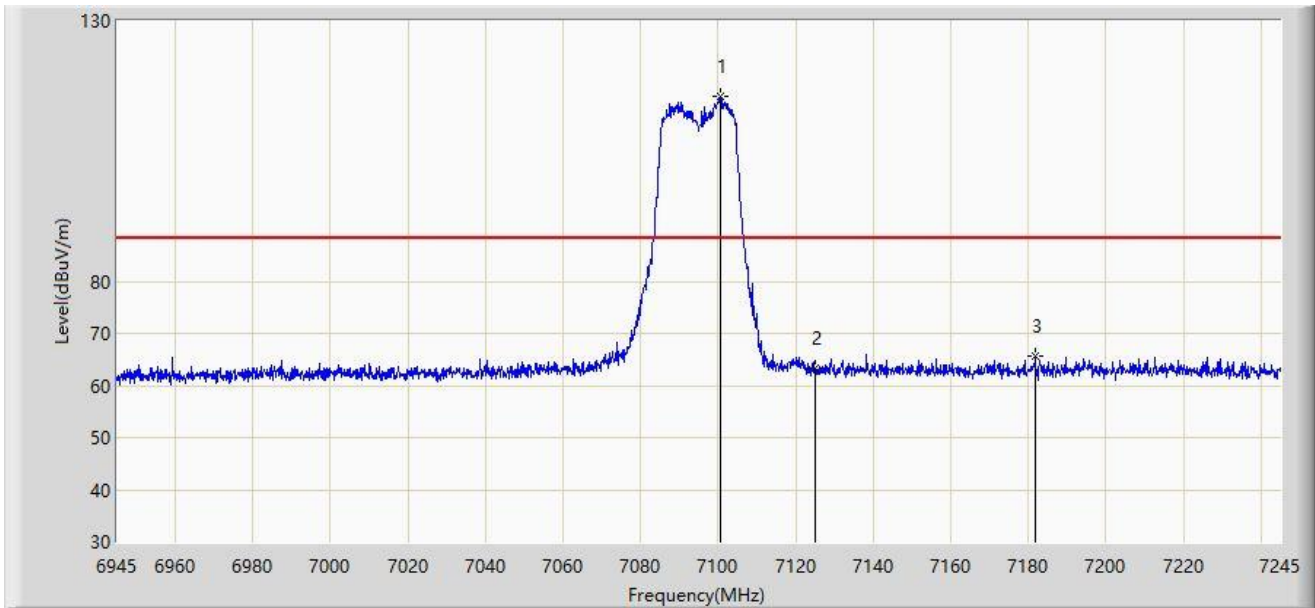

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7100.550	115.363	104.502	N/A	N/A	10.860	PK
2		7125.000	63.283	52.187	-24.917	88.200	11.096	PK
3	*	7181.850	65.719	54.547	-22.481	88.200	11.172	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2022-06-04 - 17:10
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at 7095MHz	

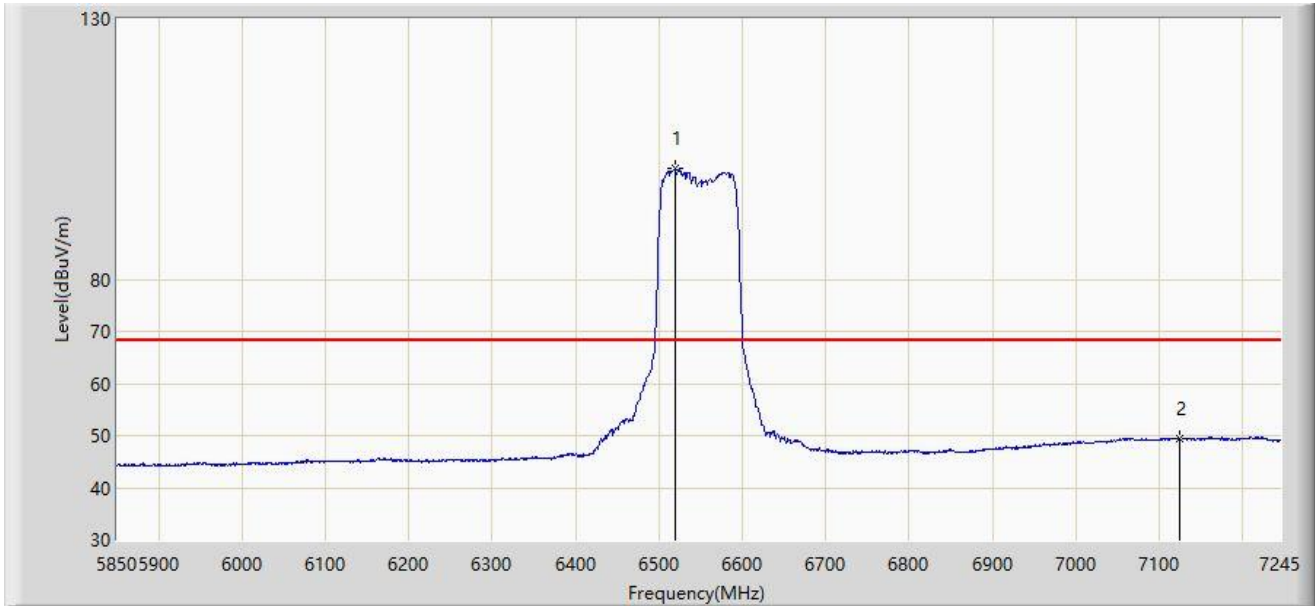


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6519.600	101.278	93.369	N/A	N/A	7.909	AV
2	*	7125.000	49.378	38.282	-18.822	68.200	11.096	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:13
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

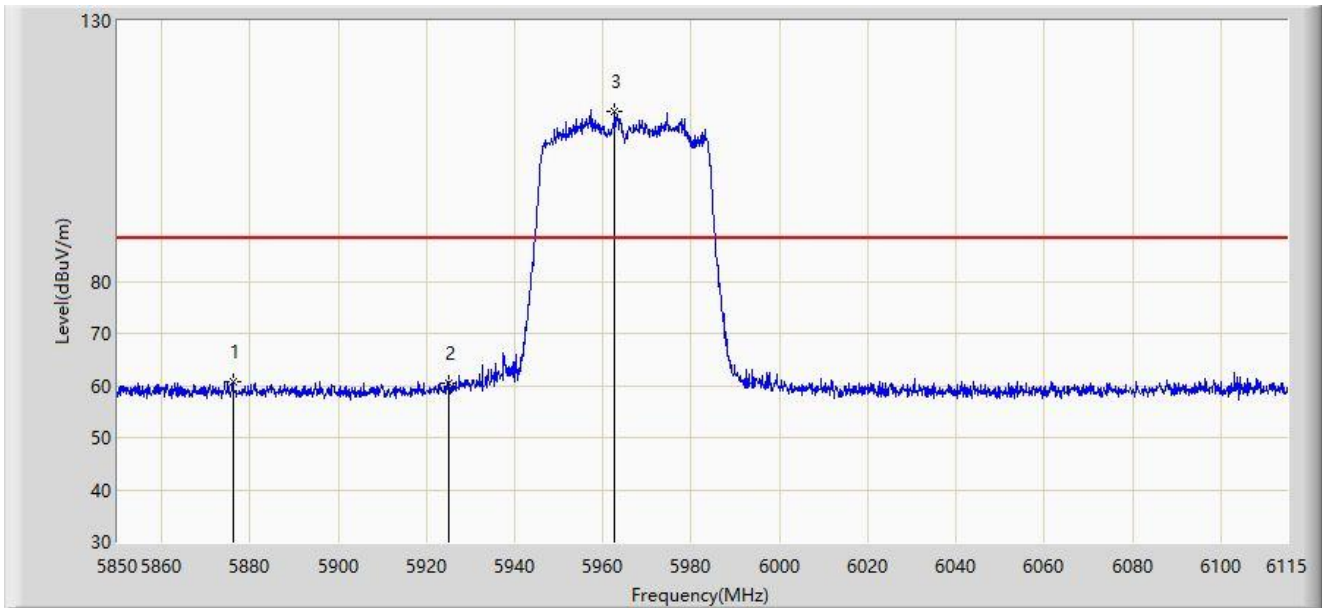


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5876.103	60.591	54.653	-27.609	88.200	5.937	PK
2		5925.000	60.451	54.426	-27.749	88.200	6.025	PK
3		5962.625	112.477	106.353	N/A	N/A	6.124	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:15
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

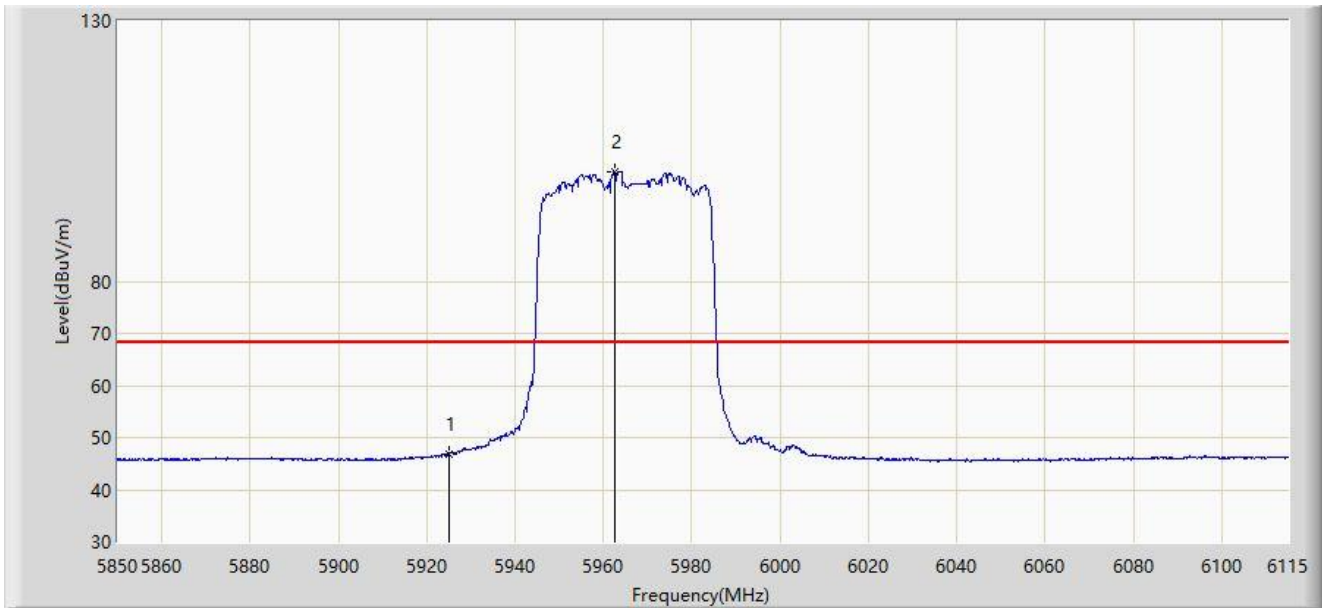


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	46.703	40.678	-21.497	68.200	6.025	AV
2		5962.493	100.974	94.850	N/A	N/A	6.124	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:17
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

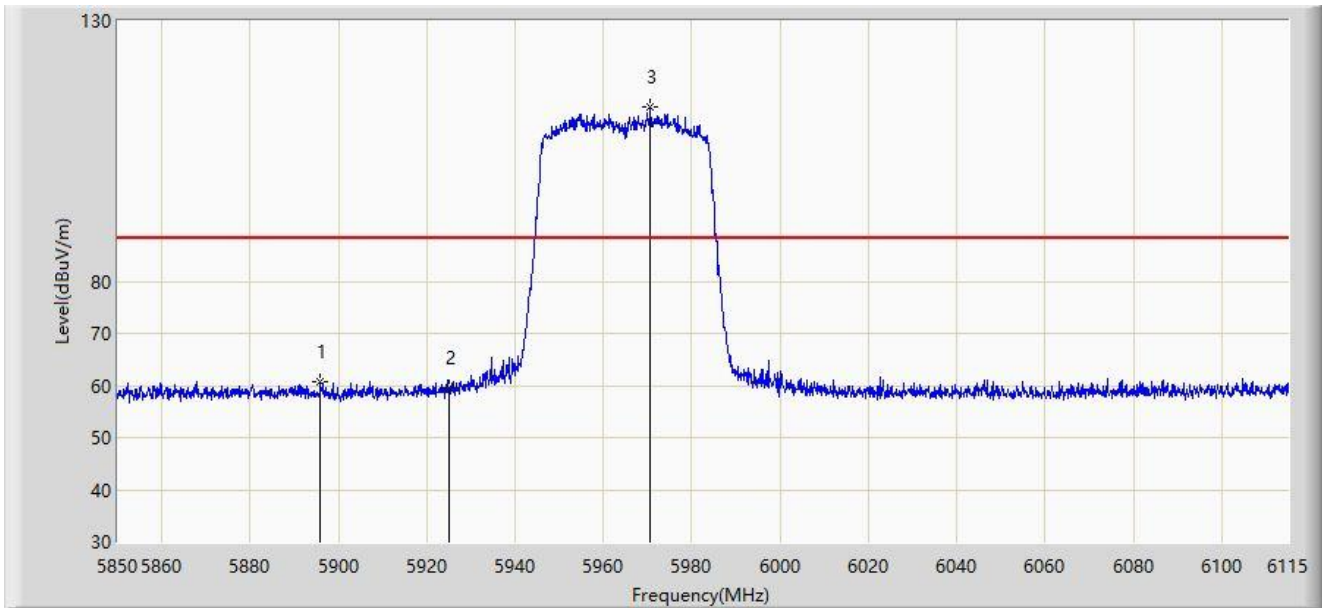


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5895.978	60.805	54.973	-27.395	88.200	5.832	PK
2		5925.000	59.432	53.407	-28.768	88.200	6.025	PK
3		5970.708	113.490	107.399	N/A	N/A	6.091	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:20
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5965MHz	

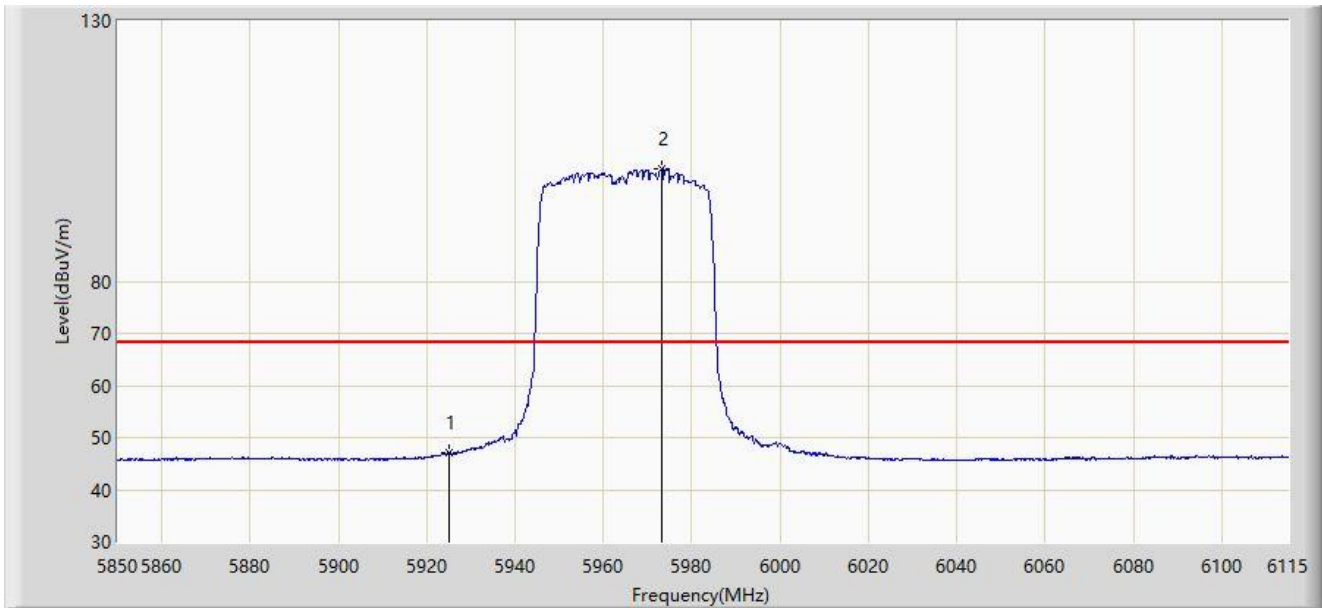


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5925.000	47.006	40.981	-21.194	68.200	6.025	AV
2		5973.225	101.609	95.529	N/A	N/A	6.080	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:25
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 7085MHz	

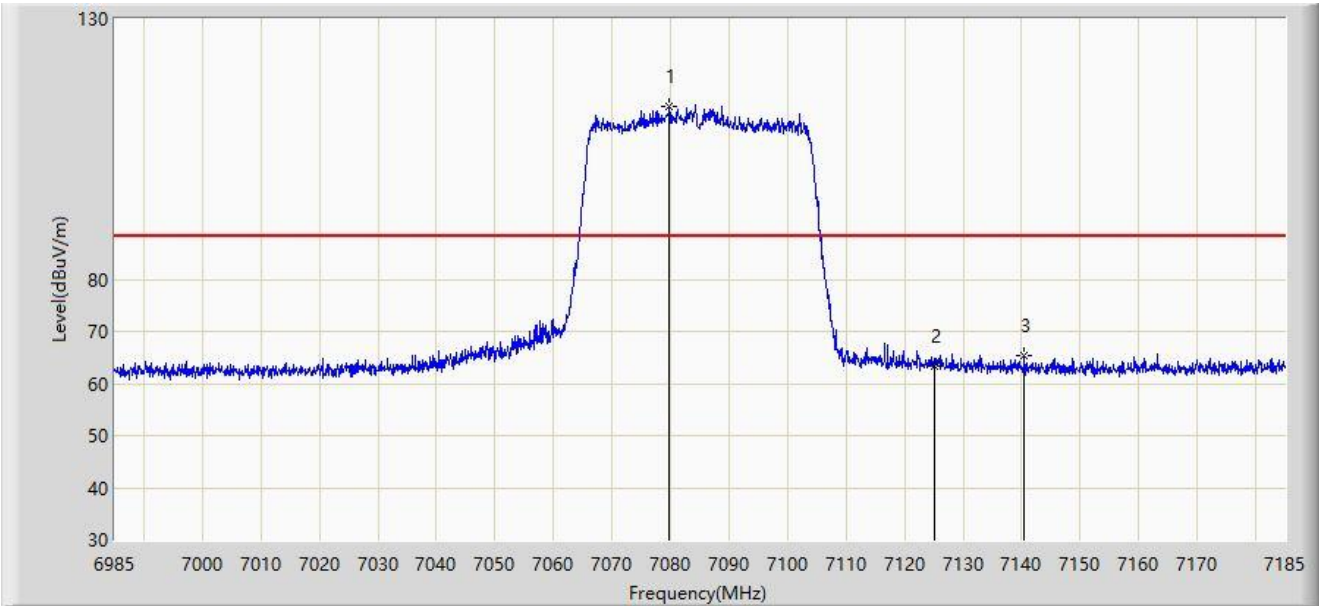


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7079.800	113.237	102.343	N/A	N/A	10.894	PK
2		7125.000	63.447	52.351	-24.753	88.200	11.096	PK
3	*	7140.500	65.372	54.203	-22.828	88.200	11.169	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:28
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 7085MHz	

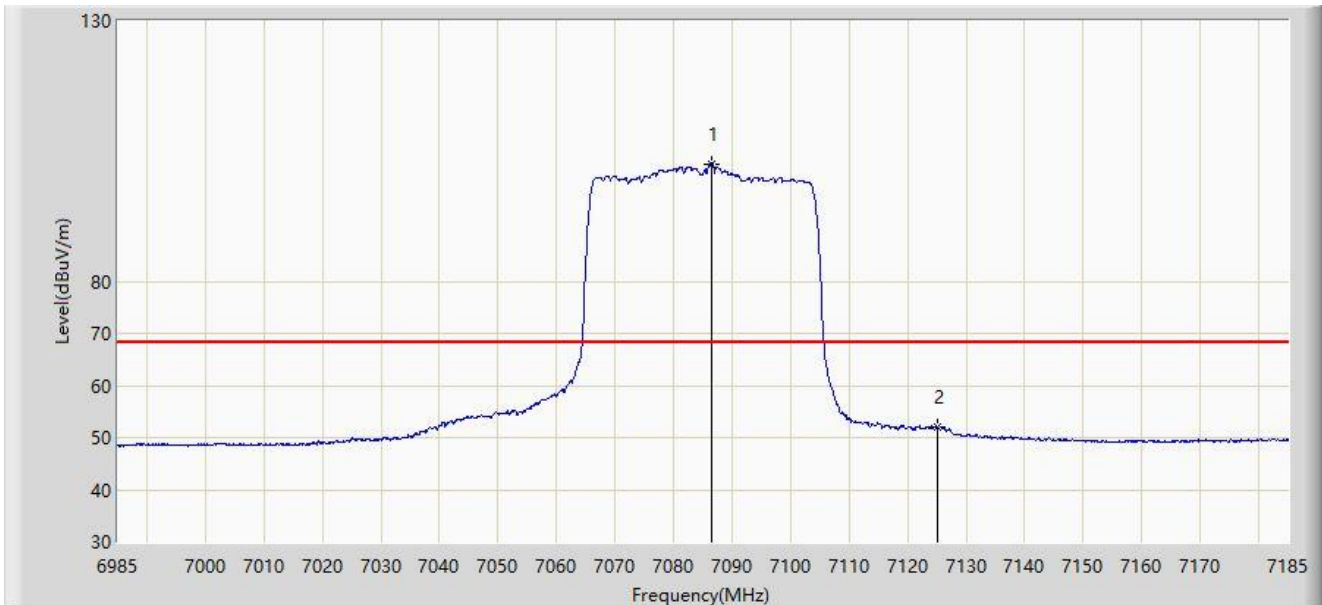


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7086.600	102.560	91.699	N/A	N/A	10.861	AV
2	*	7125.000	52.160	41.064	-16.040	68.200	11.096	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:30
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 7085MHz	

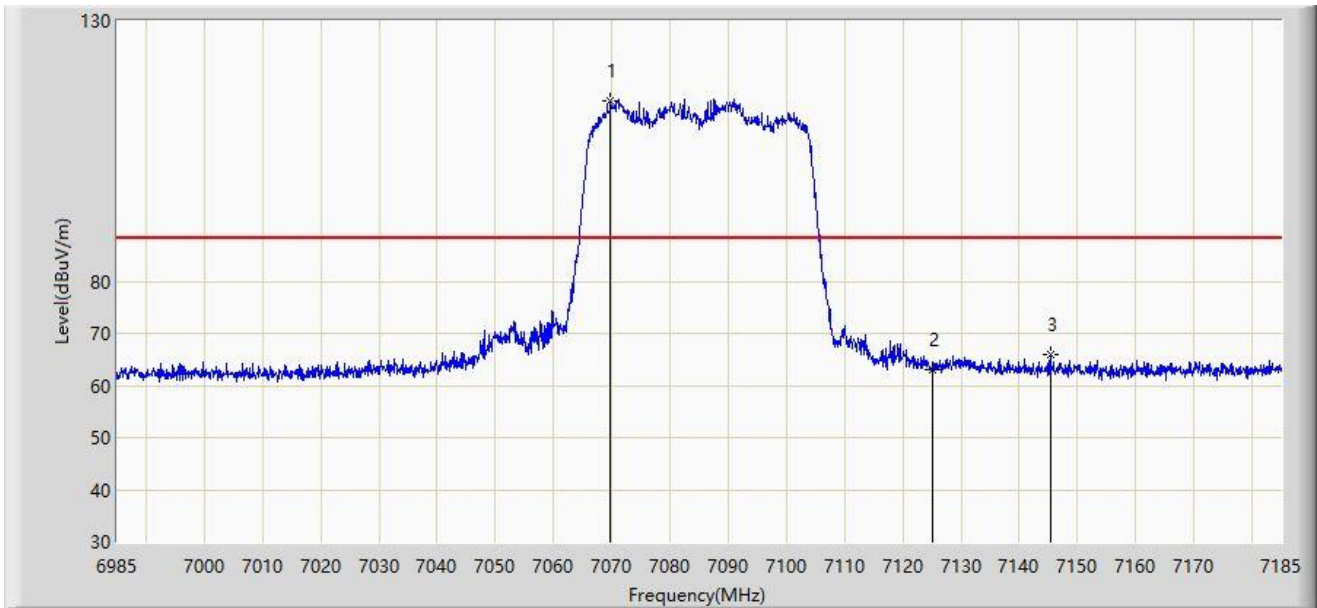

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7069.800	114.765	103.812	N/A	N/A	10.954	PK
2		7125.000	63.089	51.993	-25.111	88.200	11.096	PK
3	*	7145.300	65.938	54.773	-22.262	88.200	11.165	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2022-06-04 - 17:31
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 7085MHz	

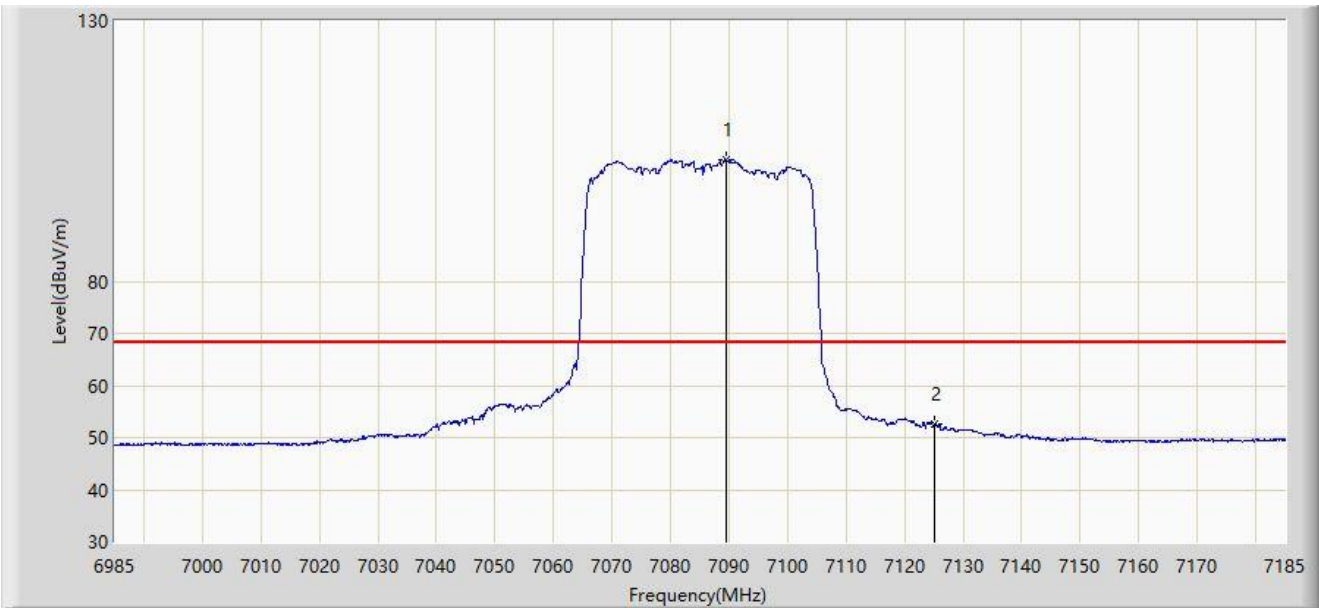


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7089.600	103.478	92.620	N/A	N/A	10.858	AV
2	*	7125.000	52.503	41.407	-15.697	68.200	11.096	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:33
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

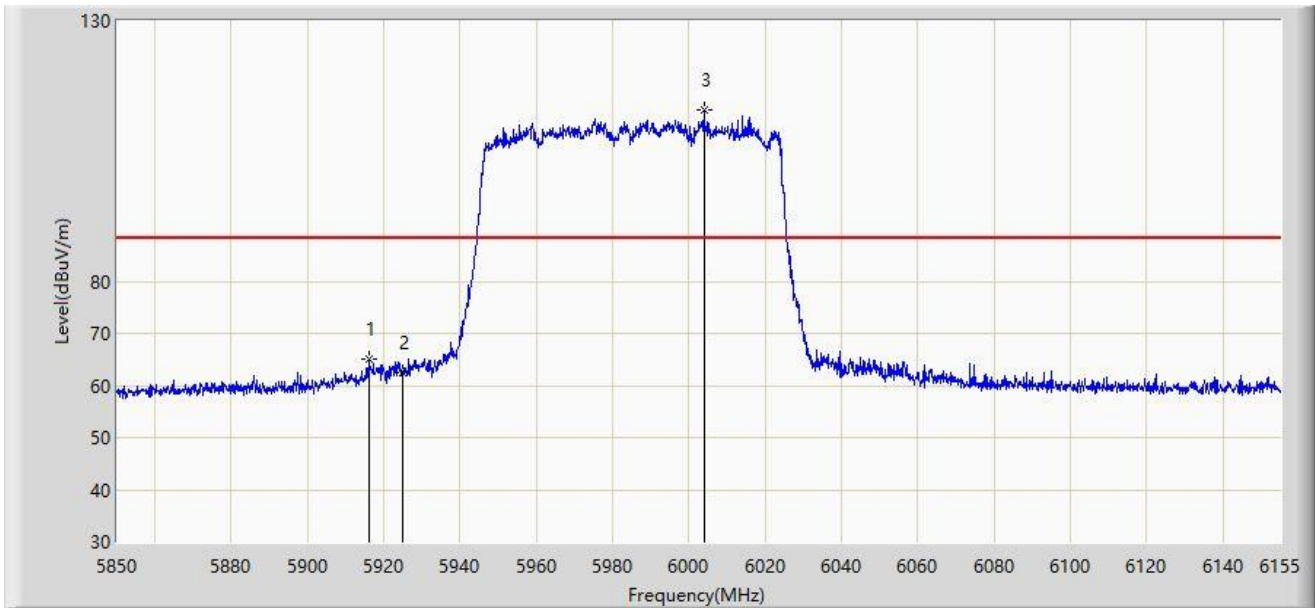


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5916.033	65.037	59.194	-23.163	88.200	5.843	PK
2		5925.000	62.587	56.562	-25.613	88.200	6.025	PK
3		6003.873	112.776	106.616	N/A	N/A	6.160	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:37
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

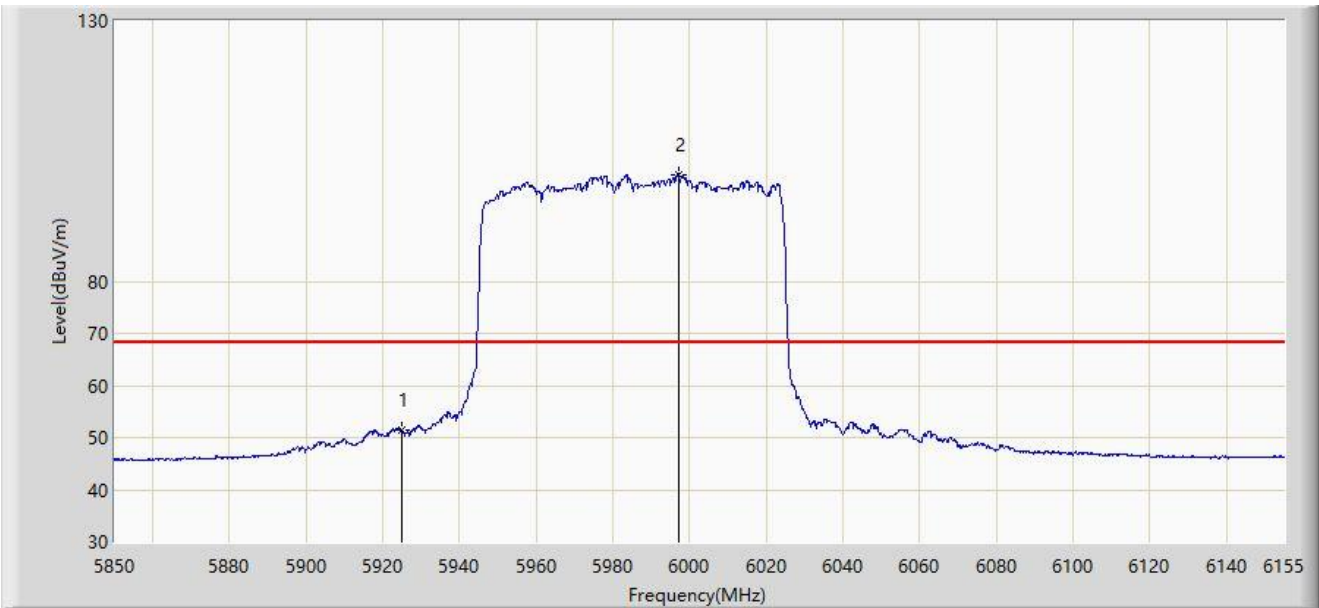


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	51.338	45.313	-16.862	68.200	6.025	AV
2		5997.315	100.569	94.513	N/A	N/A	6.056	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:38
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

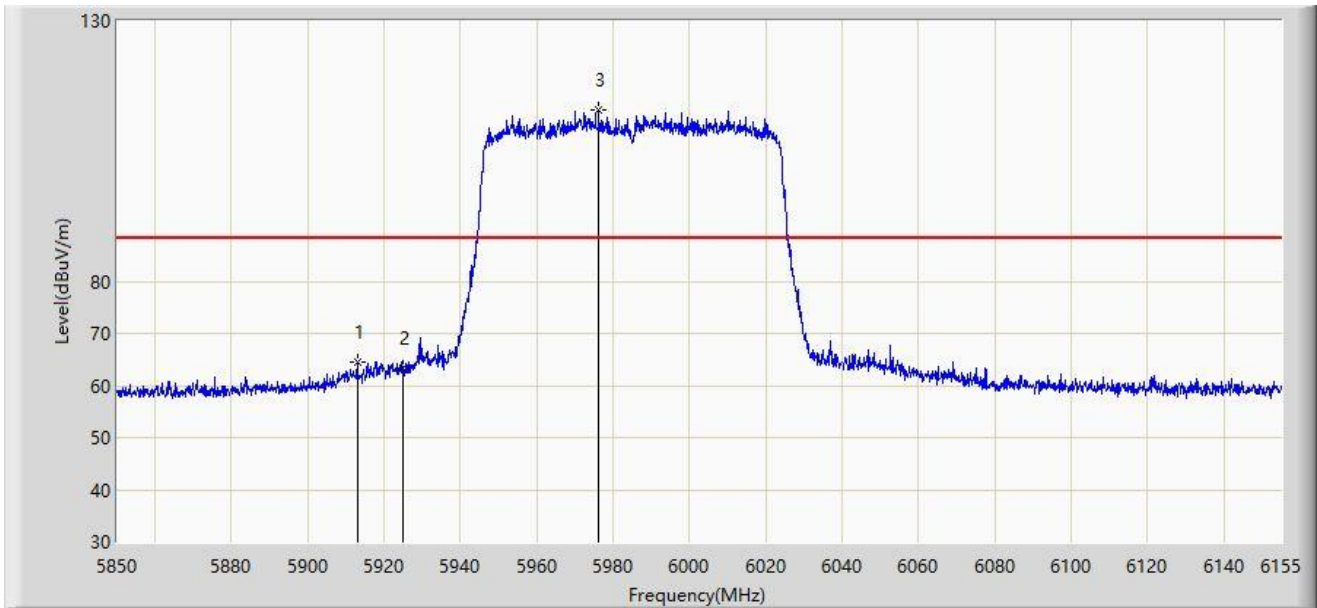


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5912.982	64.474	58.693	-23.726	88.200	5.781	PK
2		5925.000	63.358	57.333	-24.842	88.200	6.025	PK
3		5976.118	112.867	106.801	N/A	N/A	6.067	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:40
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5985MHz	

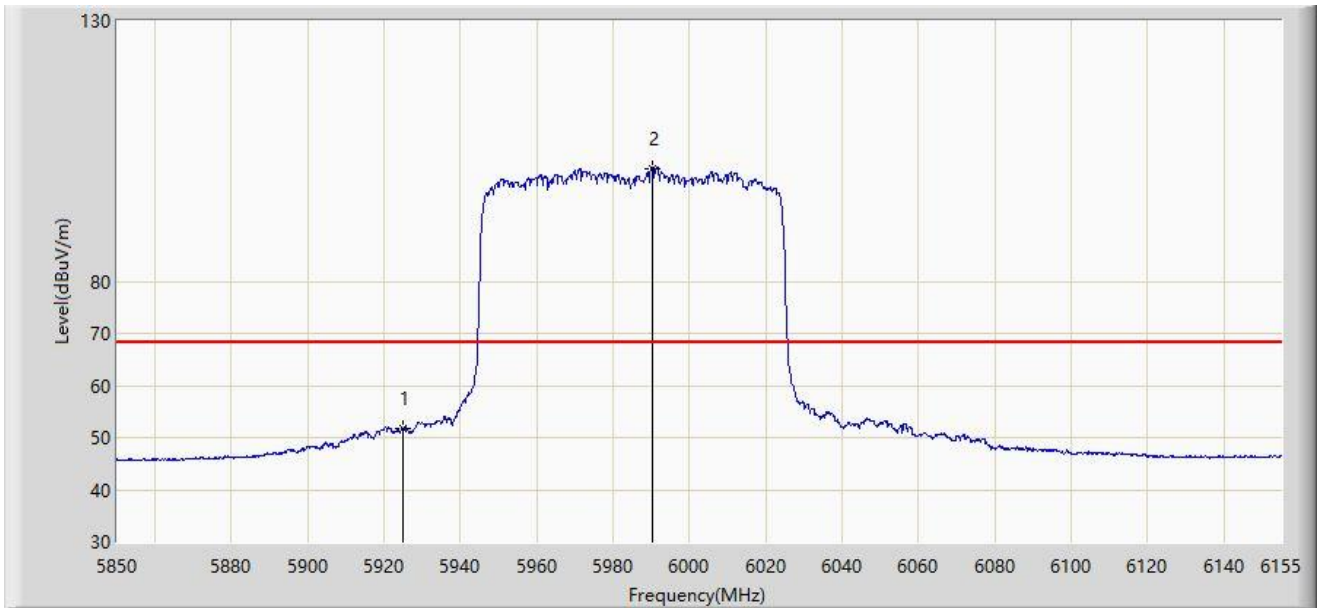


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5925.000	51.667	45.642	-16.533	68.200	6.025	AV
2		5990.147	101.634	95.585	N/A	N/A	6.049	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:41
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 7025MHz	

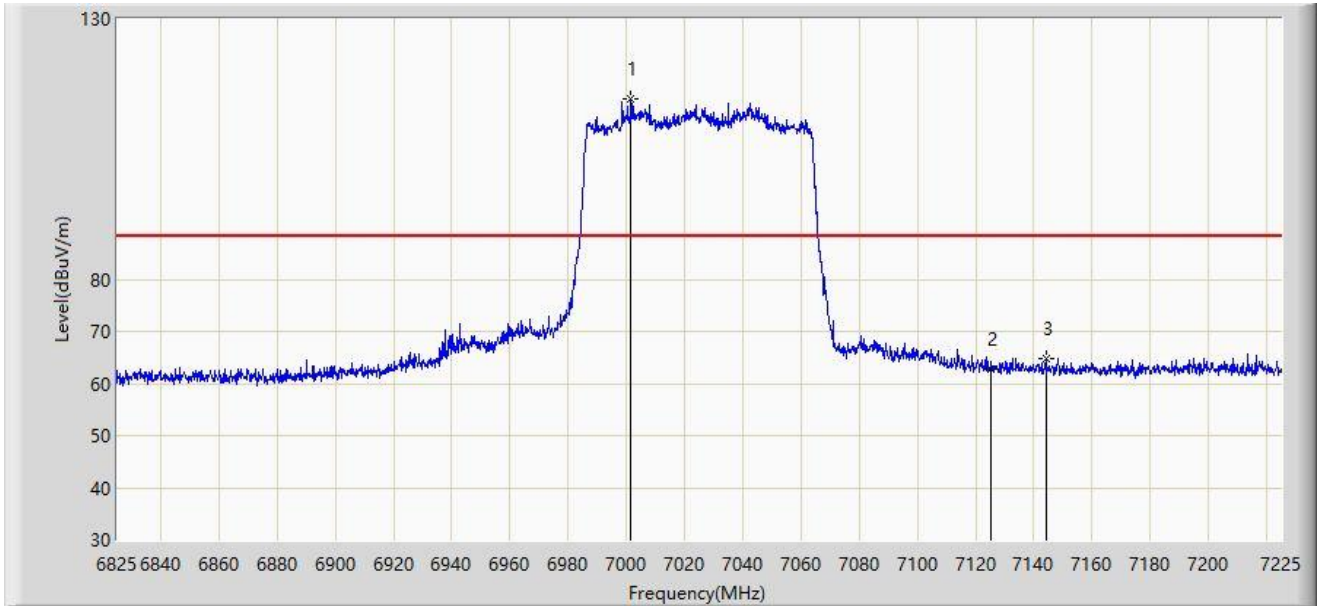


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7001.600	114.750	104.492	N/A	N/A	10.258	PK
2		7125.000	62.874	51.778	-25.326	88.200	11.096	PK
3	*	7144.200	64.860	53.694	-23.340	88.200	11.167	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:43
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 7025MHz	

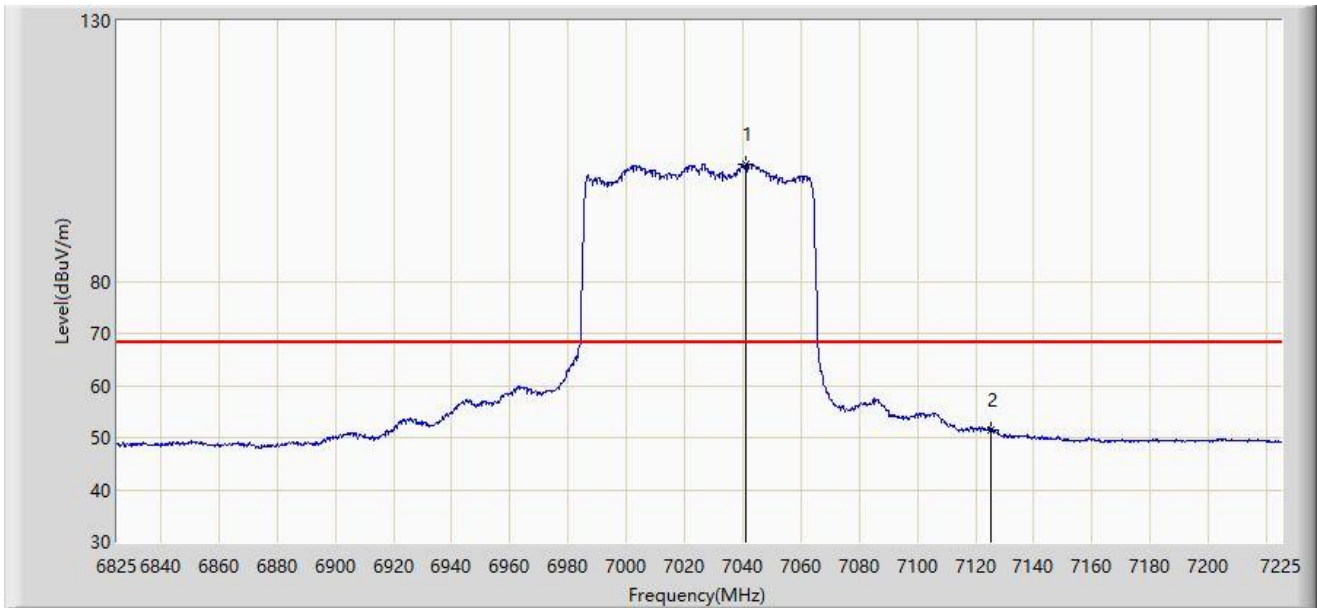


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7041.200	102.522	91.930	N/A	N/A	10.591	AV
2	*	7125.000	51.521	40.425	-16.679	68.200	11.096	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:44
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 7025MHz	

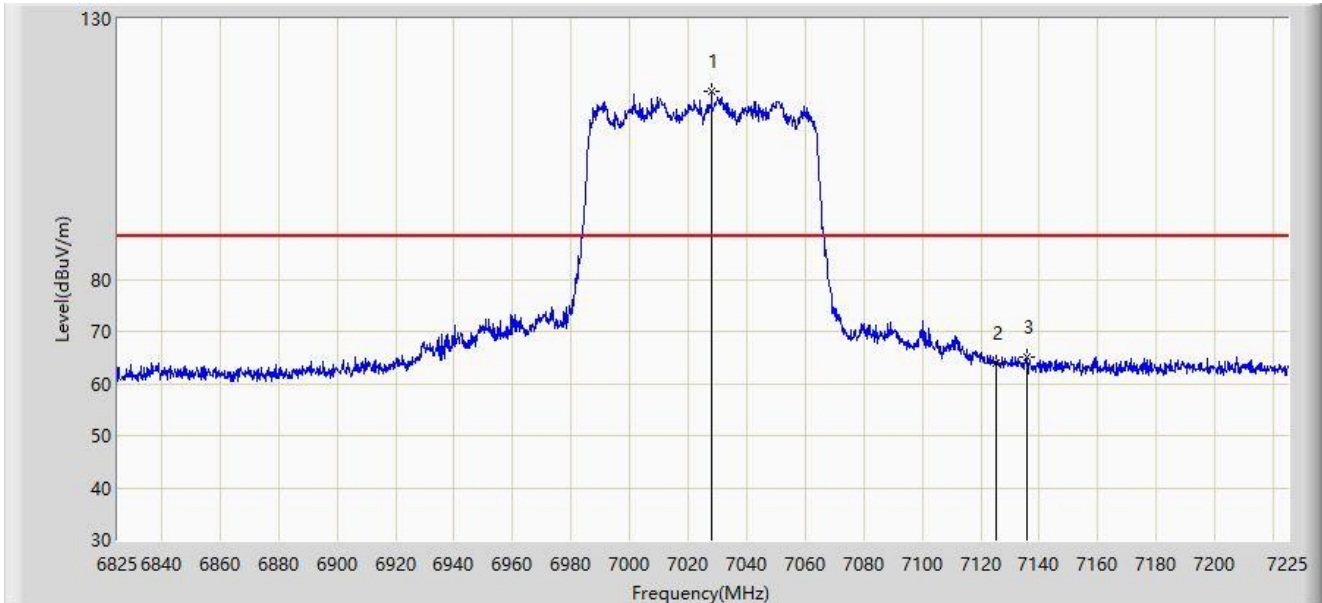

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7028.000	116.059	105.709	N/A	N/A	10.350	PK
2		7125.000	63.838	52.742	-24.362	88.200	11.096	PK
3	*	7136.000	65.120	53.957	-23.080	88.200	11.163	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2022-06-04 - 17:47
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 7025MHz	

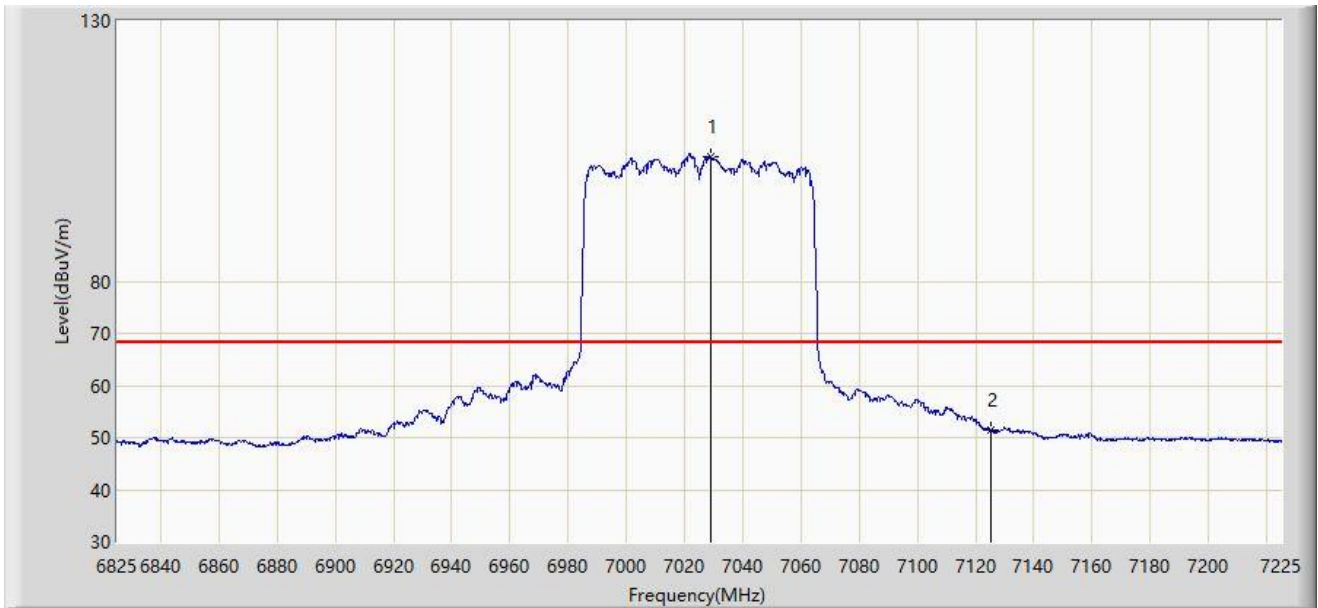


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7028.800	103.899	93.537	N/A	N/A	10.361	AV
2	*	7125.000	51.373	40.277	-16.827	68.200	11.096	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:49
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

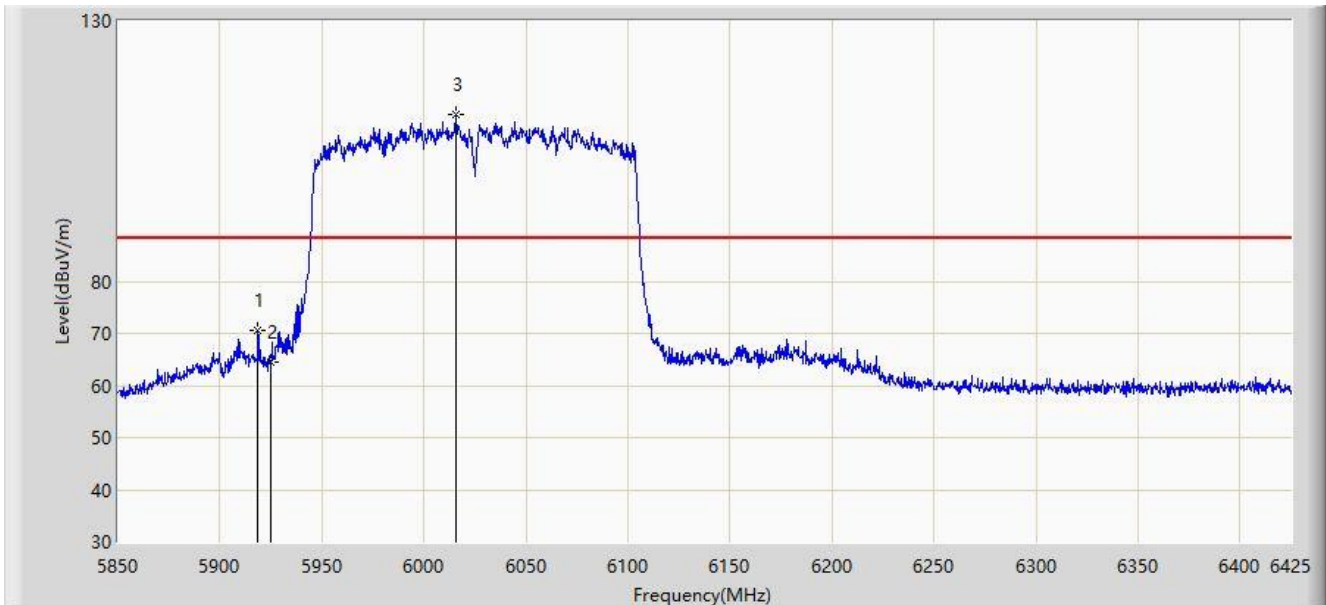


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5918.712	70.555	64.657	-17.645	88.200	5.898	PK
2		5925.000	64.493	58.468	-23.707	88.200	6.025	PK
3		6015.600	112.001	105.652	N/A	N/A	6.349	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:56
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

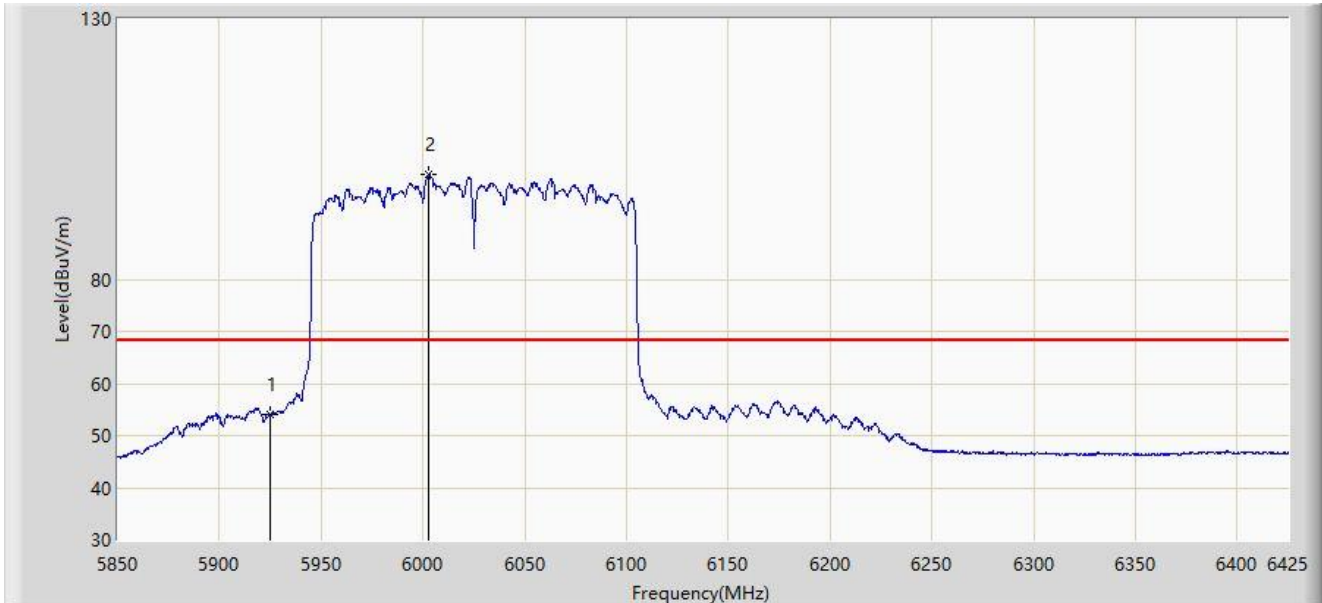


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5925.000	54.039	48.014	-14.161	68.200	6.025	AV
2		6002.950	100.109	93.966	N/A	N/A	6.144	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:57
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

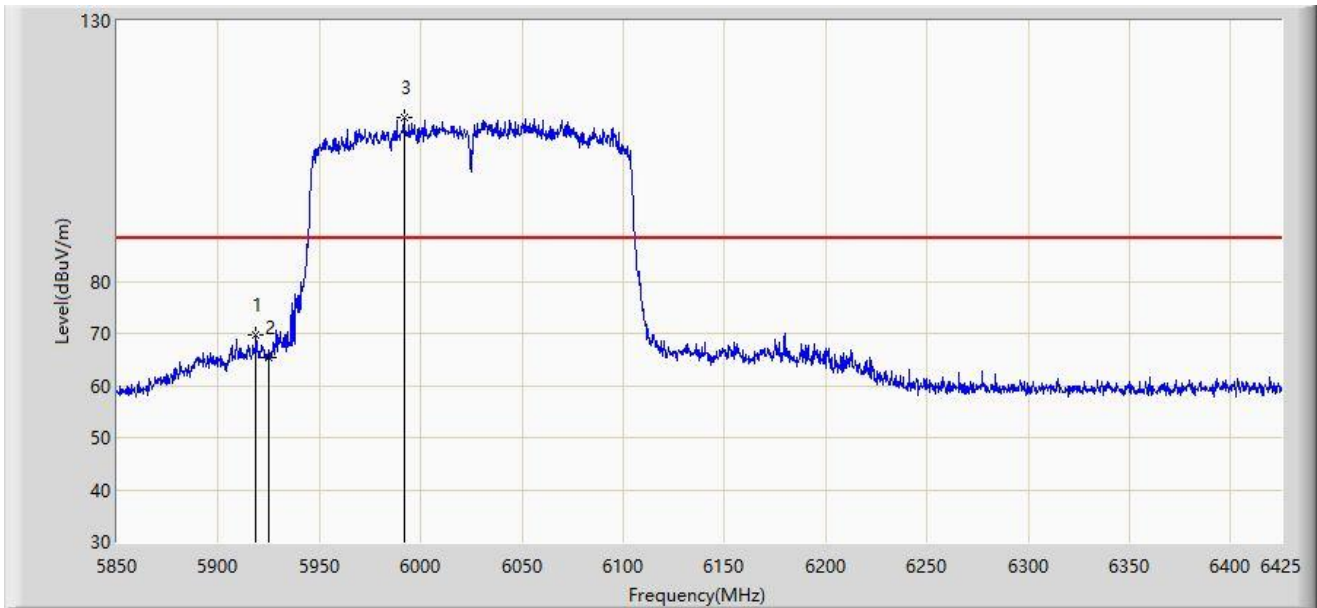


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5918.712	69.748	63.850	-18.452	88.200	5.898	PK
2		5925.000	65.467	59.442	-22.733	88.200	6.025	PK
3		5991.737	111.333	105.283	N/A	N/A	6.050	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 17:58
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6025MHz	

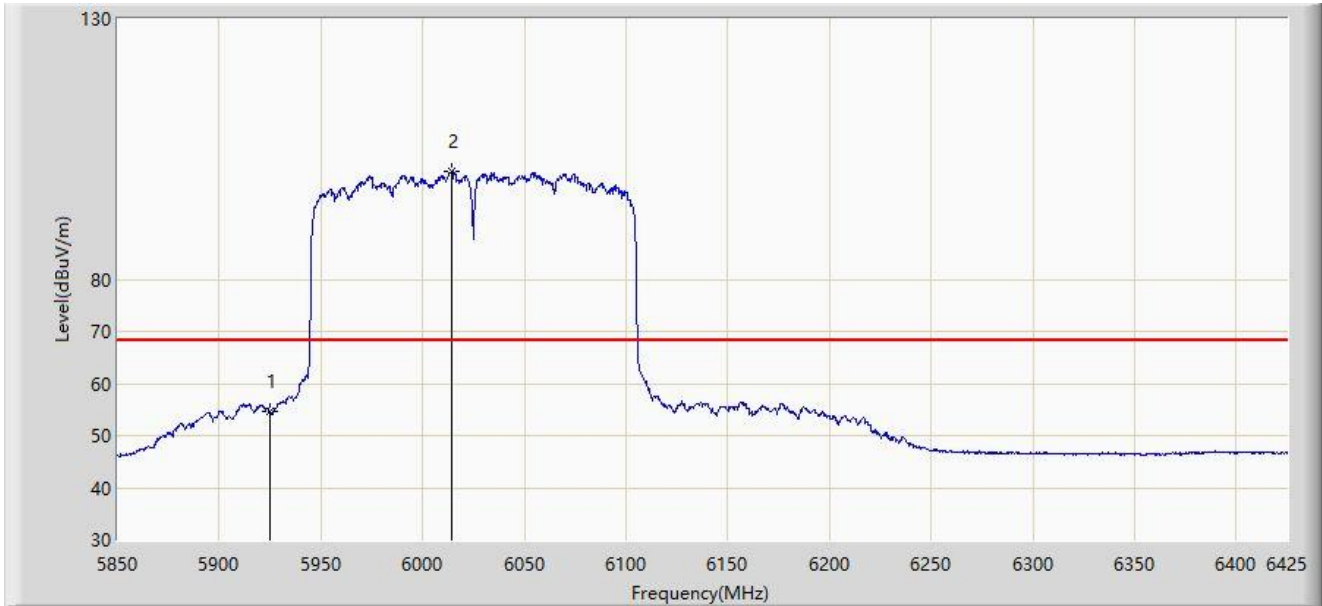


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5925.000	54.671	48.646	-13.529	68.200	6.025	AV
2		6014.163	100.721	94.382	N/A	N/A	6.339	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 18:00
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6985MHz	

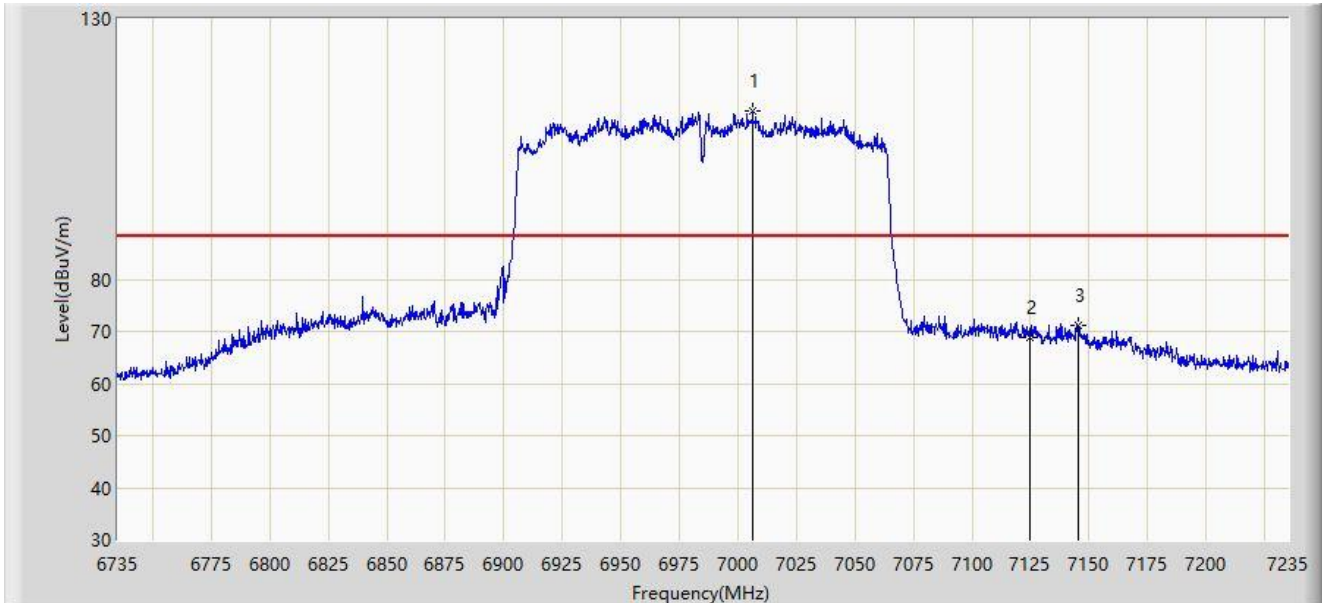


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7006.250	112.204	101.959	N/A	N/A	10.245	PK
2		7125.000	68.954	57.858	-19.246	88.200	11.096	PK
3	*	7145.500	71.293	60.128	-16.907	88.200	11.165	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 18:02
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6985MHz	

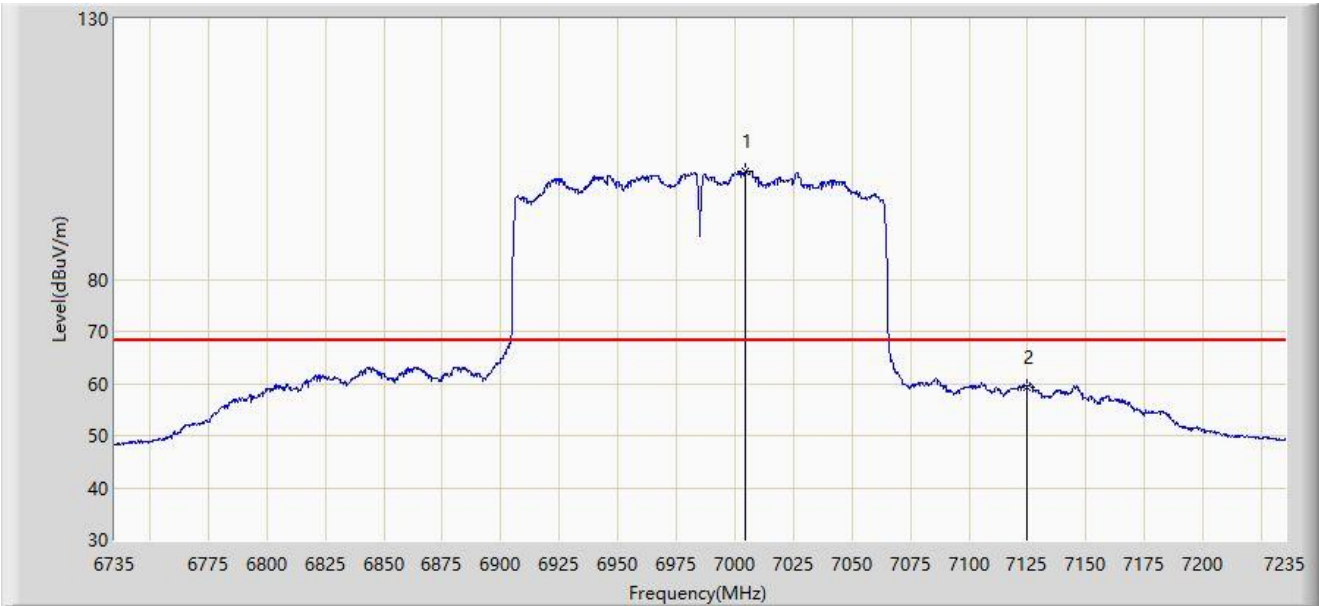


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		7004.250	100.712	90.459	N/A	N/A	10.253	AV
2	*	7125.000	59.327	48.231	-8.873	68.200	11.096	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-06-04 - 18:02
Limit: FCC 6G Bandedge(3m)PK	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6985MHz	

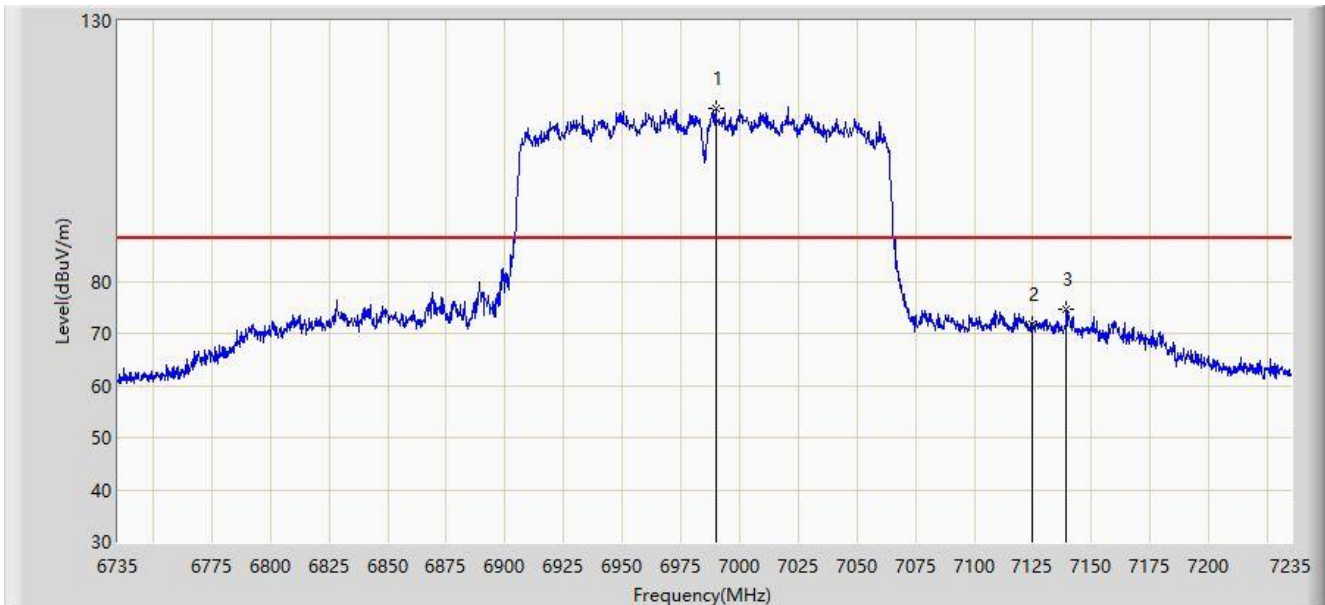

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6990.000	113.181	102.969	N/A	N/A	10.212	PK
2		7125.000	71.835	60.739	-16.365	88.200	11.096	PK
3	*	7139.250	74.689	63.519	-13.511	88.200	11.170	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: WZ-AC2	Test Date: 2022-06-04 - 18:10
Limit: FCC_Band Edge(3m)_6G_AV	Engineer: Bob Zhang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at 6985MHz	

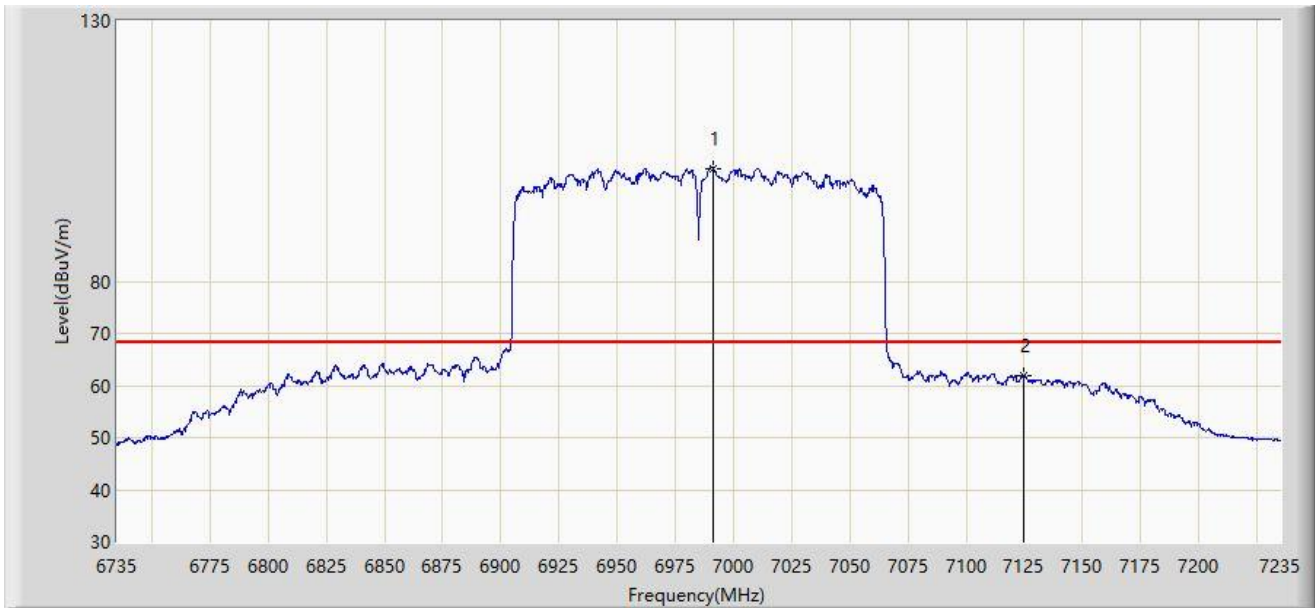

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		6991.250	101.712	91.495	N/A	N/A	10.216	AV
2	*	7125.000	61.961	50.865	-6.239	68.200	11.096	AV


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

**A.10 AC Conducted Emissions Test Result**

Site: WZ-SR2	Test Date: 2022-06-10 - 10:24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Alin Zhou
Probe: ENV216_101683_Filter Off_E	Polarity: Line
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at channel 6505MHz	

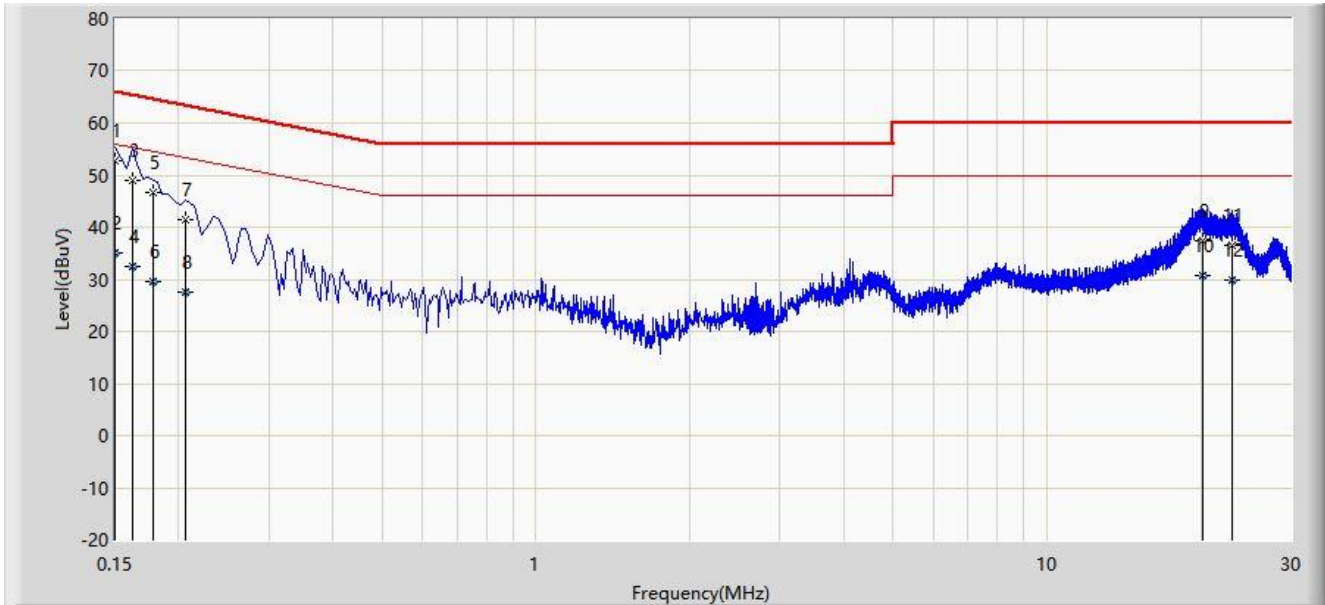


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	52.739	42.838	-13.261	66.000	9.901	QP
2			0.150	35.139	25.237	-20.861	56.000	9.901	AV
3			0.162	48.960	39.060	-16.401	65.361	9.900	QP
4			0.162	32.333	22.433	-23.028	55.361	9.900	AV
5			0.178	46.693	36.793	-17.885	64.578	9.900	QP
6			0.178	29.699	19.799	-24.880	54.578	9.900	AV
7			0.206	41.446	31.545	-21.920	63.365	9.901	QP
8			0.206	27.519	17.618	-25.846	53.365	9.901	AV
9			20.138	37.427	25.948	-22.573	60.000	11.479	QP
10			20.138	30.580	19.101	-19.420	50.000	11.479	AV
11			22.950	36.380	24.703	-23.620	60.000	11.677	QP
12			22.950	29.936	18.259	-20.064	50.000	11.677	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBuV) = Reading Level (dBuV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Test Date: 2022-06-10 - 10:24
Limit: FCC_Part15.207_CE_AC Power	Engineer: Alin Zhou
Probe: ENV216_101683_Filter Off	Polarity: Neutral
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE160 at channel 6505MHz	

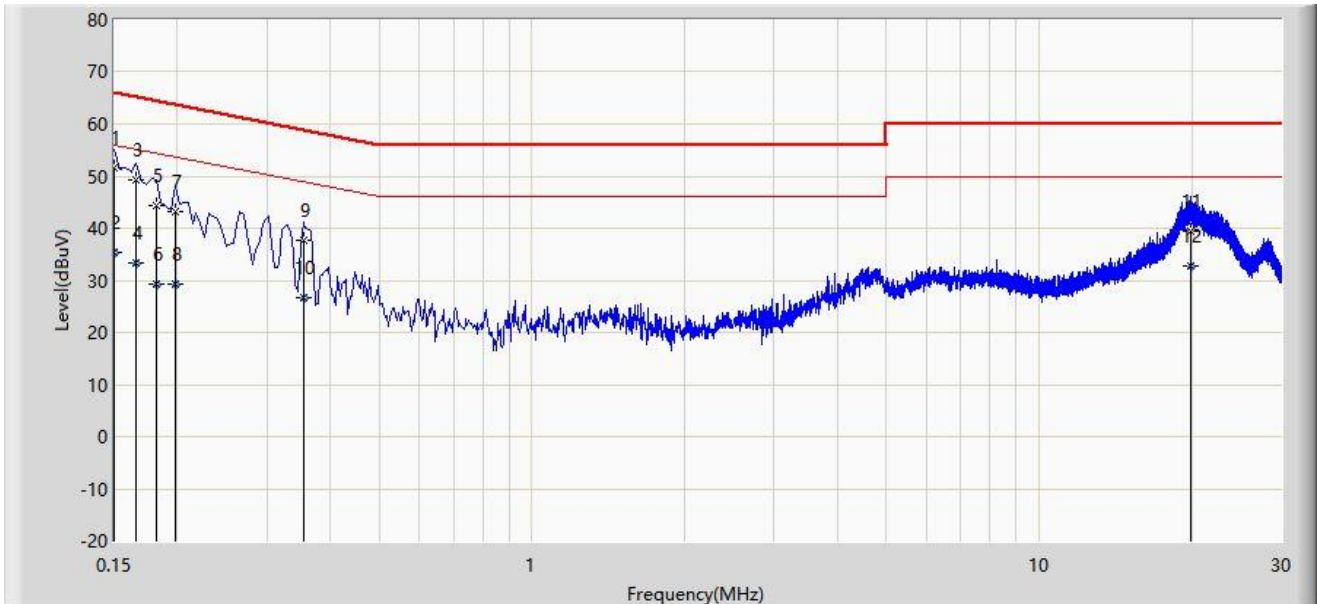

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	51.662	41.743	-14.338	66.000	9.920	QP
2			0.150	35.241	25.321	-20.759	56.000	9.920	AV
3			0.166	49.406	39.490	-15.752	65.158	9.917	QP
4			0.166	33.377	23.461	-21.781	55.158	9.917	AV
5			0.182	44.436	34.523	-19.958	64.394	9.913	QP
6			0.182	29.232	19.318	-25.162	54.394	9.913	AV
7			0.198	43.254	33.343	-20.440	63.694	9.911	QP
8			0.198	29.414	19.502	-24.281	53.694	9.911	AV
9			0.354	37.663	27.743	-21.205	58.868	9.920	QP
10			0.354	26.610	16.690	-22.258	48.868	9.920	AV
11			19.898	39.393	27.697	-20.607	60.000	11.696	QP
12			19.898	32.697	21.002	-17.303	50.000	11.696	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## Appendix B – Test Setup Photograph

Refer to “2205RSU031-UT” file.

## Appendix C – EUT Photograph

Refer to “2205RSU031-UE” file.

\_\_\_\_\_ The End \_\_\_\_\_