


Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part 15.407_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5755MHz	

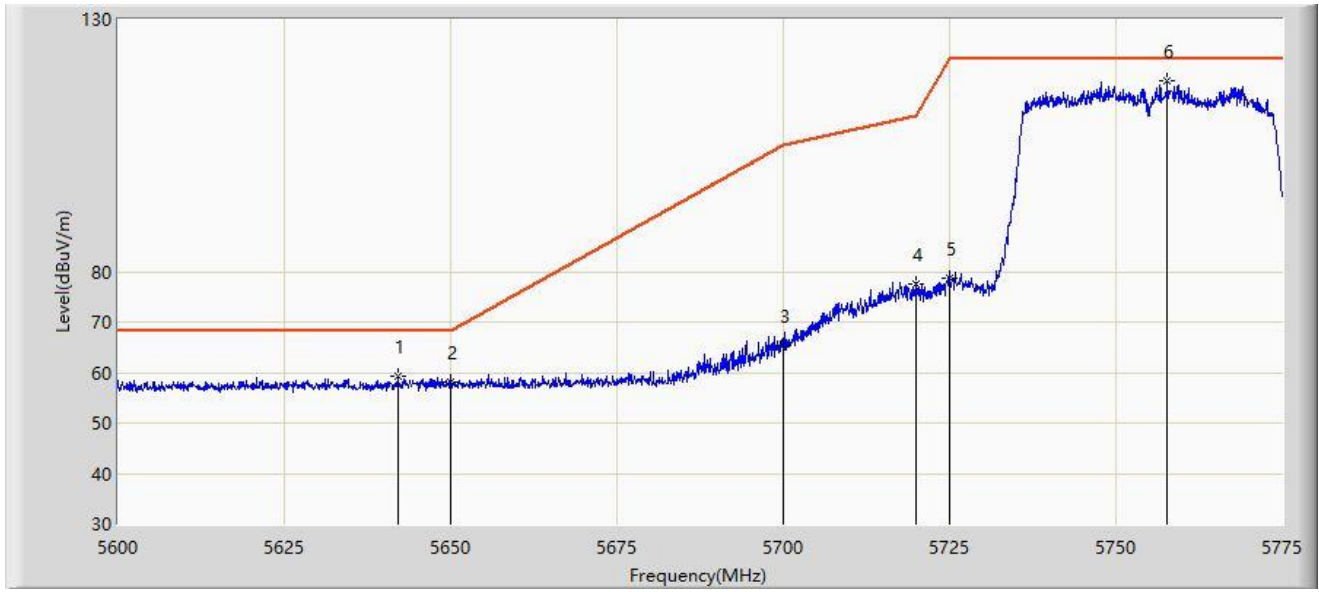


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5642.000	59.279	56.763	-8.921	68.200	2.516	PK
2		5650.000	58.062	55.569	-10.138	68.200	2.492	PK
3		5700.000	65.291	62.502	-39.909	105.200	2.790	PK
4		5720.000	77.544	74.699	-33.256	110.800	2.846	PK
5		5725.000	78.560	75.762	-43.640	122.200	2.799	PK
6		5757.763	117.869	115.033	N/A	N/A	2.836	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part 15.407_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

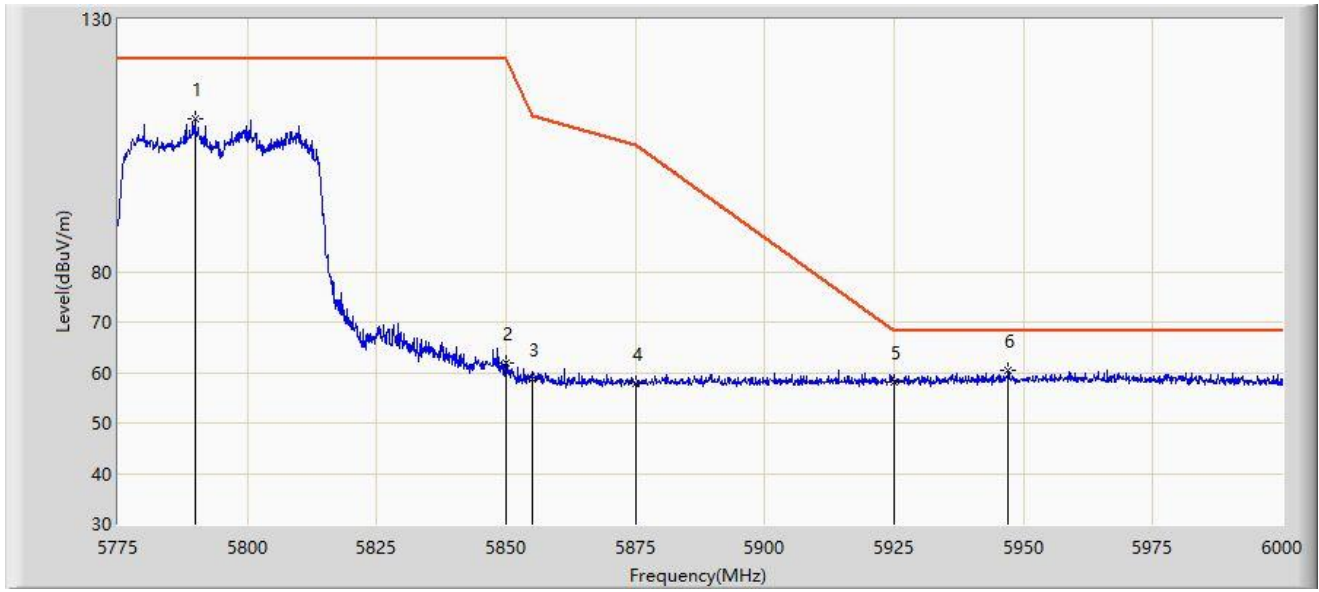


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5789.850	110.195	107.356	N/A	N/A	2.839	PK
2		5850.000	61.943	58.763	-60.257	122.200	3.179	PK
3		5855.000	58.581	55.400	-52.219	110.800	3.181	PK
4		5875.000	57.782	54.408	-47.418	105.200	3.374	PK
5		5925.000	58.121	54.679	-10.079	68.200	3.441	PK
6	*	5947.013	60.412	56.690	-7.788	68.200	3.723	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part 15.407_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 5795MHz	

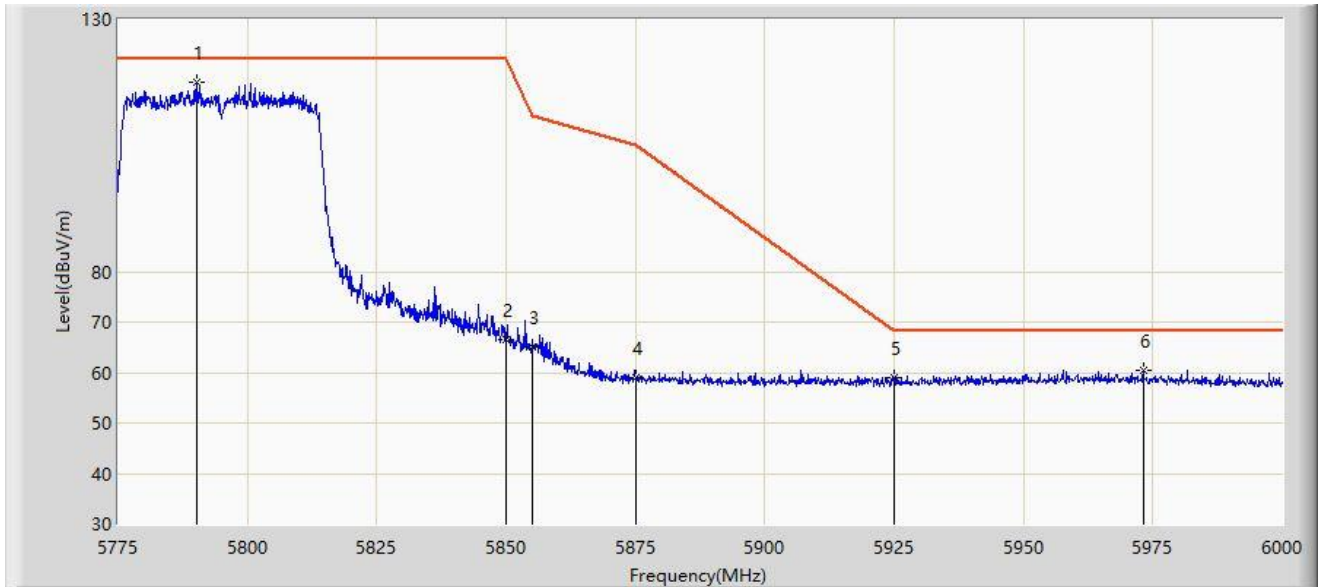


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5790.300	117.422	114.584	N/A	N/A	2.839	PK
2		5850.000	66.389	63.209	-55.811	122.200	3.179	PK
3		5855.000	65.205	62.024	-45.595	110.800	3.181	PK
4		5875.000	58.932	55.558	-46.268	105.200	3.374	PK
5		5925.000	58.895	55.453	-9.305	68.200	3.441	PK
6	*	5973.112	60.543	56.627	-7.657	68.200	3.916	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

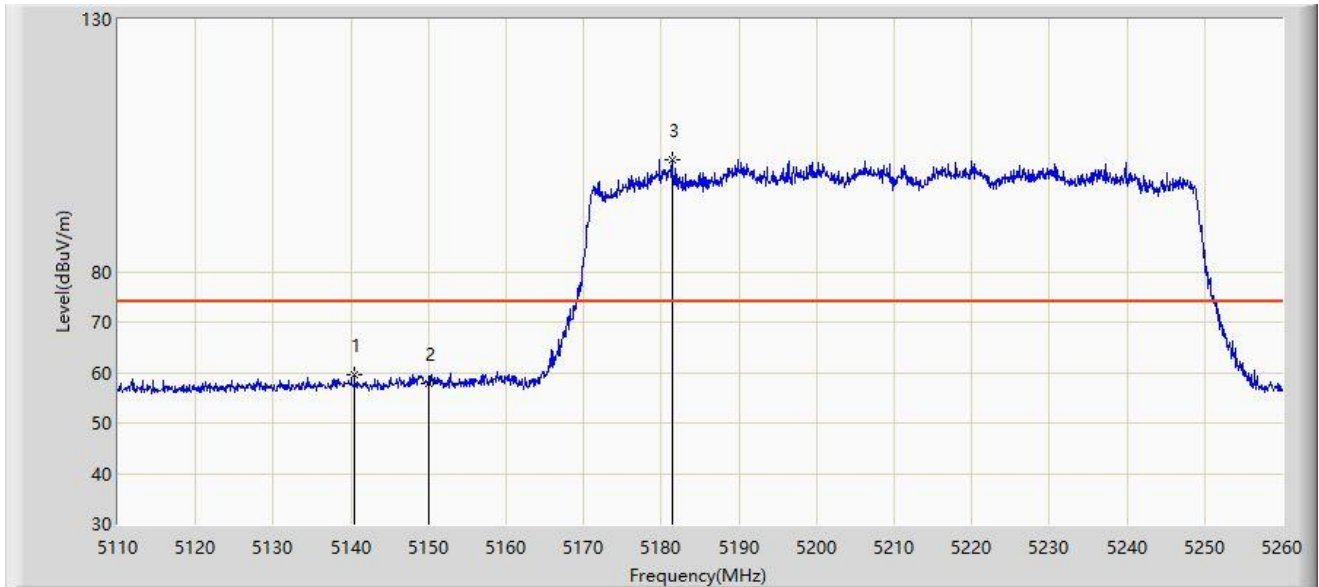


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5140.450	59.679	57.398	-14.321	74.000	2.281	PK
2		5150.000	57.772	55.484	-16.228	74.000	2.287	PK
3		5181.400	102.267	100.091	N/A	N/A	2.176	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

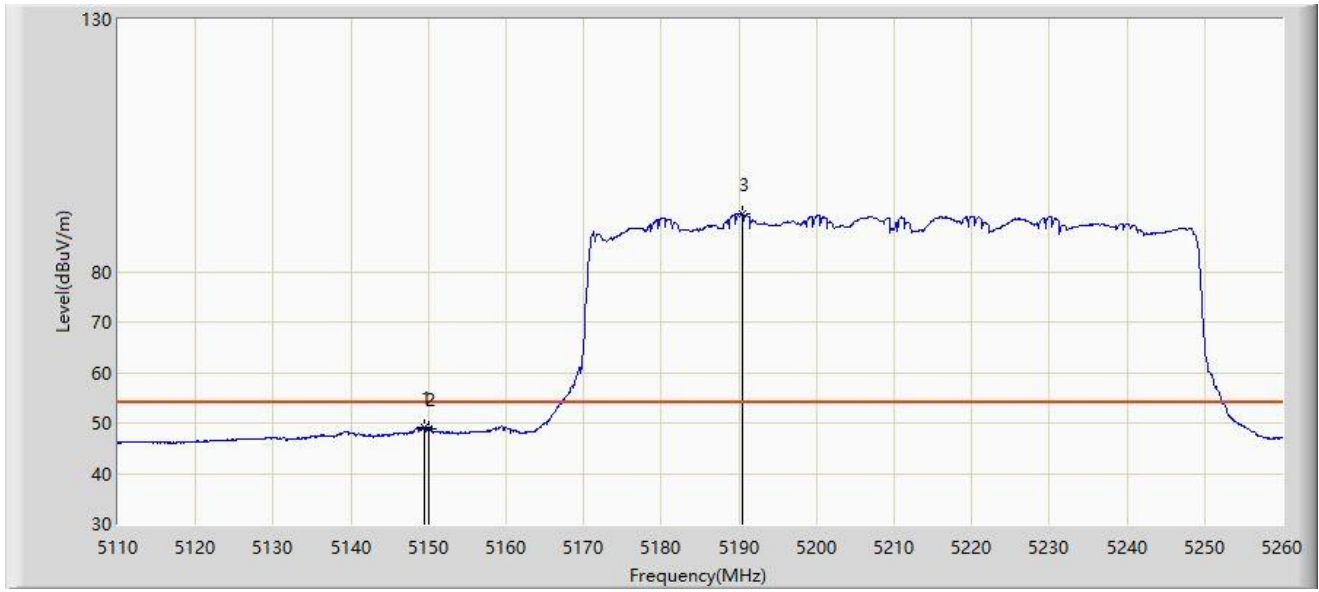


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.525	49.200	46.908	-4.800	54.000	2.292	AV
2		5150.000	48.762	46.474	-5.238	54.000	2.287	AV
3		5190.400	91.416	89.325	N/A	N/A	2.091	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

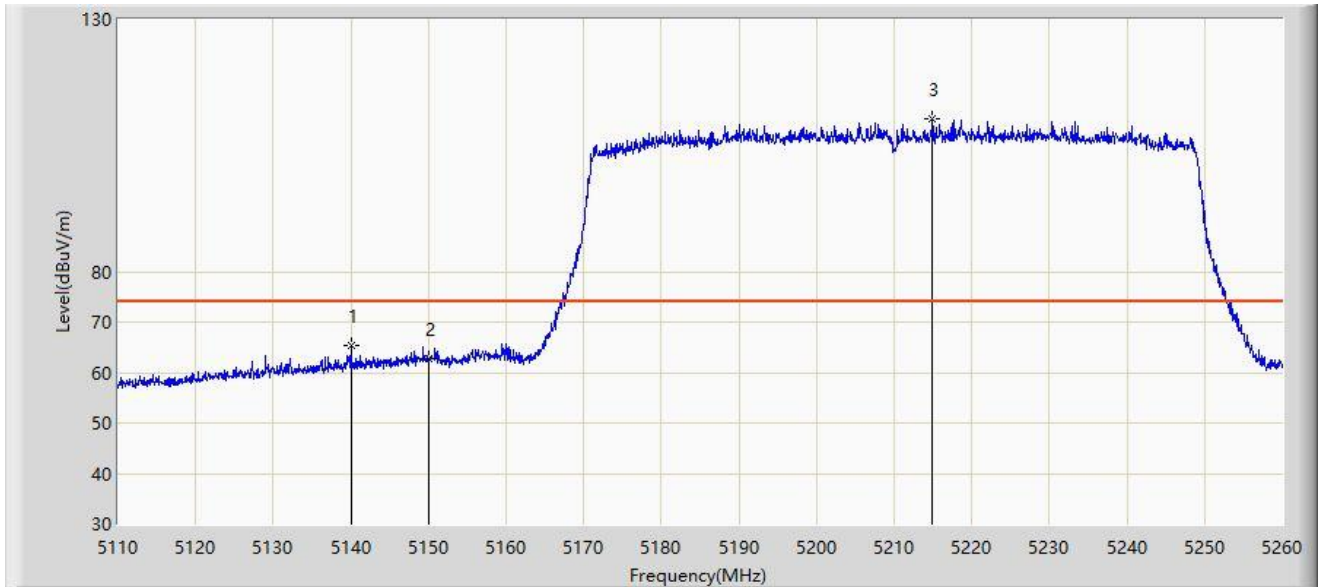


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5140.000	65.264	62.984	-8.736	74.000	2.280	PK
2		5150.000	62.646	60.358	-11.354	74.000	2.287	PK
3		5214.925	110.387	108.685	N/A	N/A	1.702	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5210MHz	

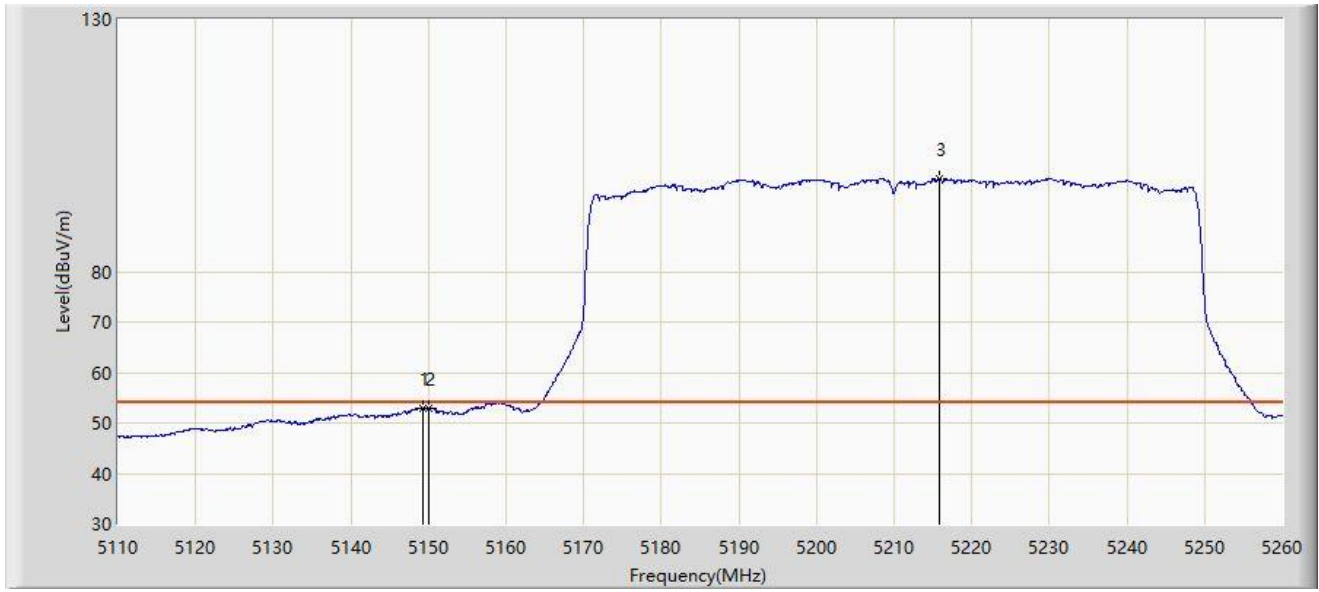


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5149.375	52.981	50.688	-1.019	54.000	2.293	AV
2		5150.000	52.788	50.500	-1.212	54.000	2.287	AV
3		5215.825	98.466	96.781	N/A	N/A	1.685	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

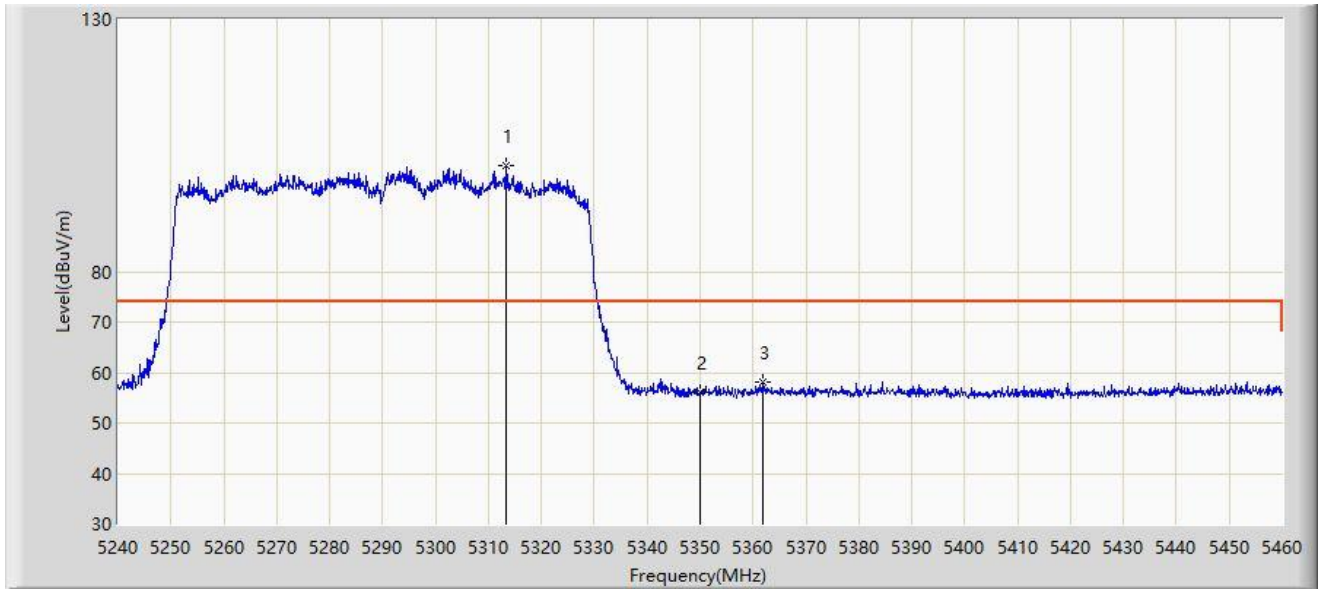


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5313.260	100.949	99.575	N/A	N/A	1.374	PK
2		5350.000	56.217	55.140	-17.783	74.000	1.078	PK
3	*	5361.990	58.105	56.767	-15.895	74.000	1.338	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

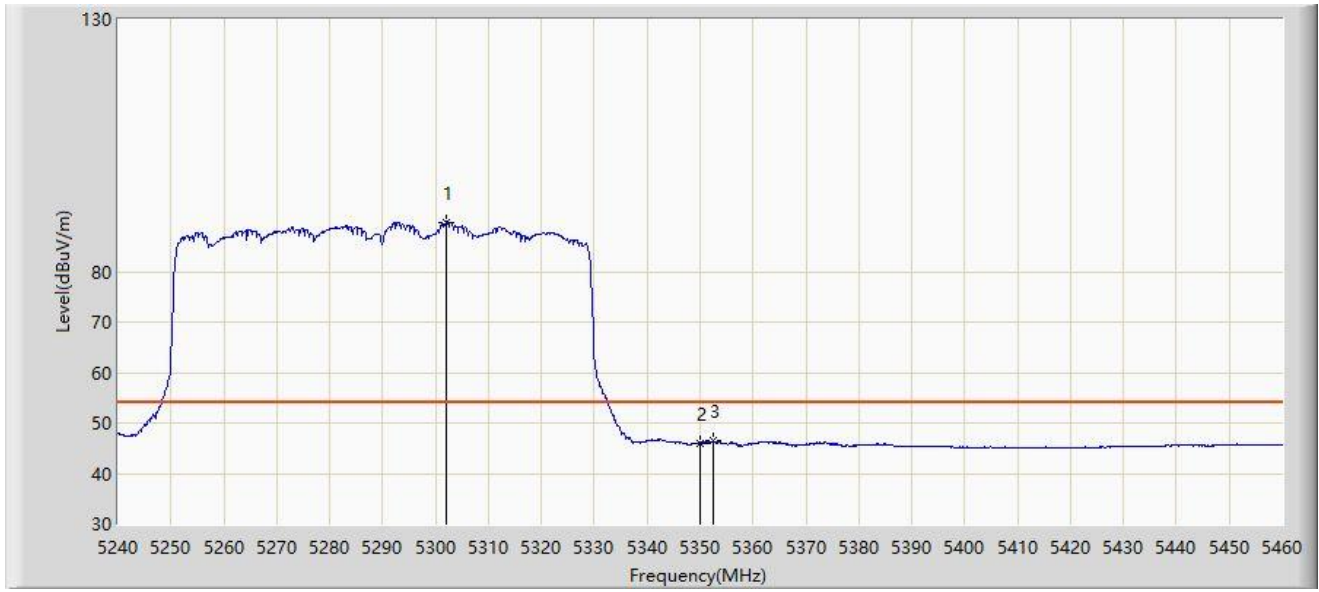


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5302.040	89.783	88.378	N/A	N/A	1.406	AV
2		5350.000	46.072	44.995	-7.928	54.000	1.078	AV
3	*	5352.530	46.386	45.320	-7.614	54.000	1.066	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

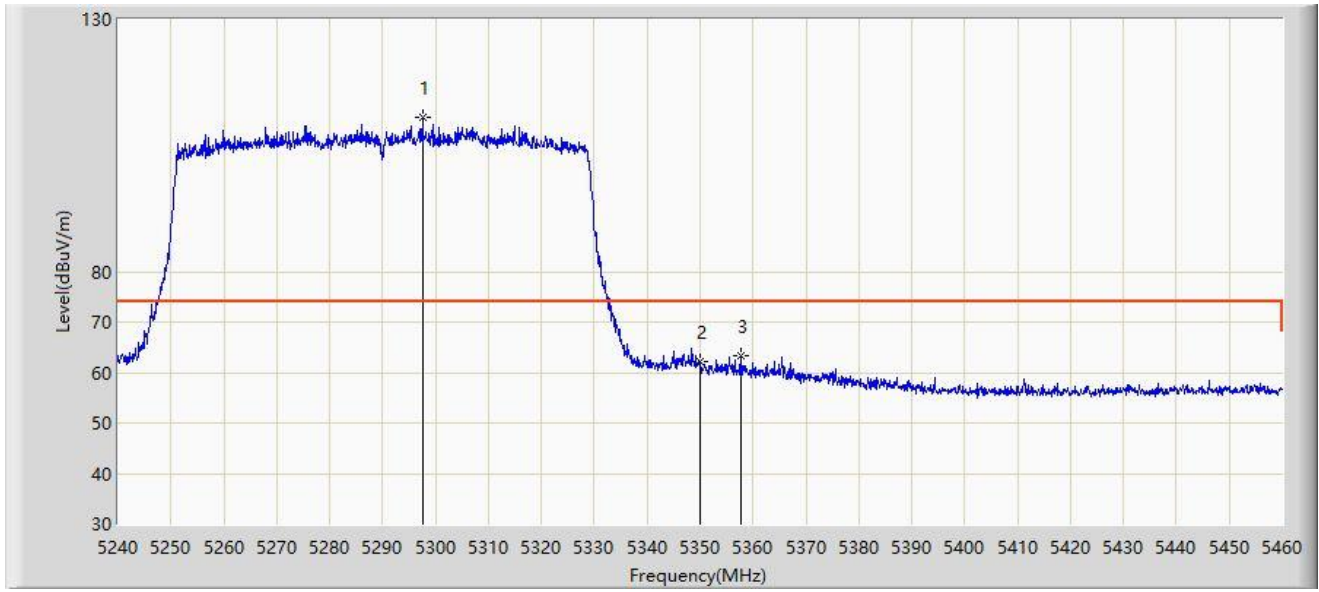


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5297.530	110.560	109.205	N/A	N/A	1.355	PK
2		5350.000	62.175	61.098	-11.825	74.000	1.078	PK
3	*	5357.810	63.261	62.043	-10.739	74.000	1.218	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5290MHz	

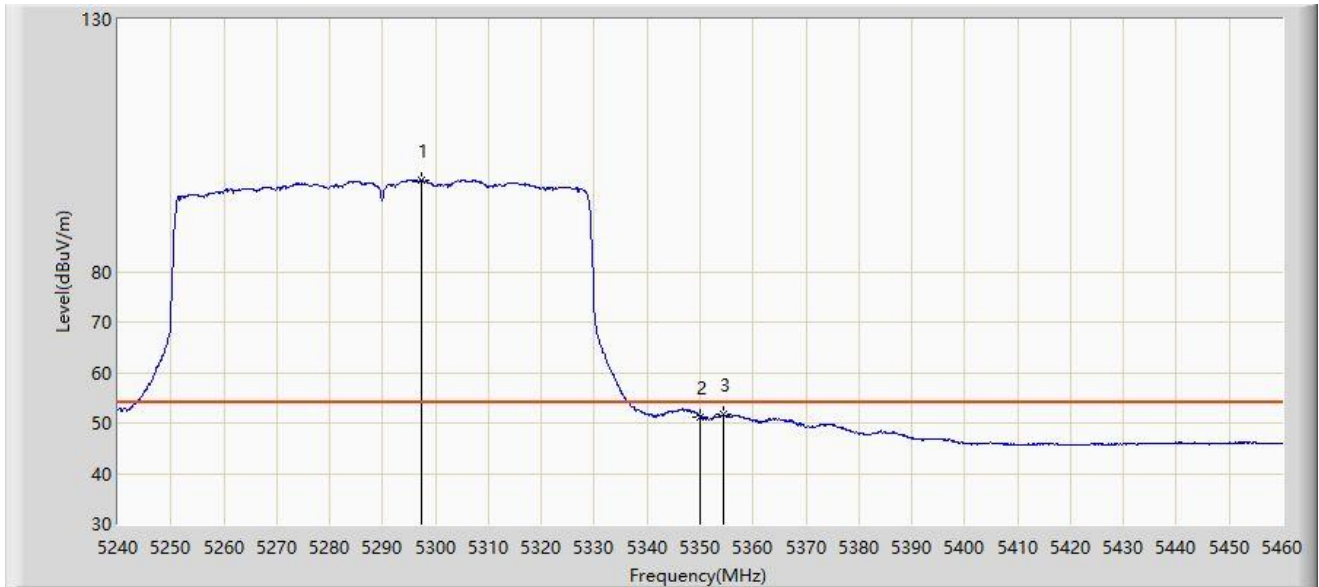


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5297.420	98.184	96.831	N/A	N/A	1.353	AV
2		5350.000	51.231	50.154	-2.769	54.000	1.078	AV
3	*	5354.290	51.606	50.489	-2.394	54.000	1.117	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

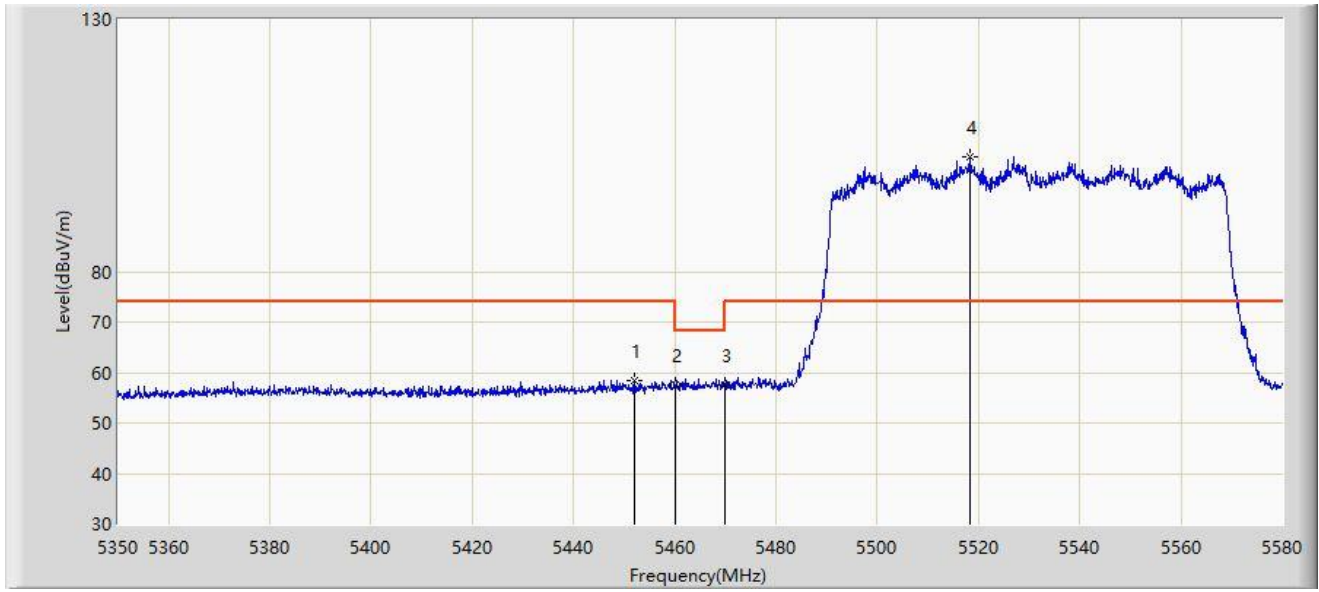


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5451.890	58.527	56.460	-15.473	74.000	2.067	PK
2		5460.000	57.427	55.356	-16.573	74.000	2.071	PK
3	*	5470.000	57.444	55.405	-10.756	68.200	2.039	PK
4		5518.360	102.839	100.728	N/A	N/A	2.112	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

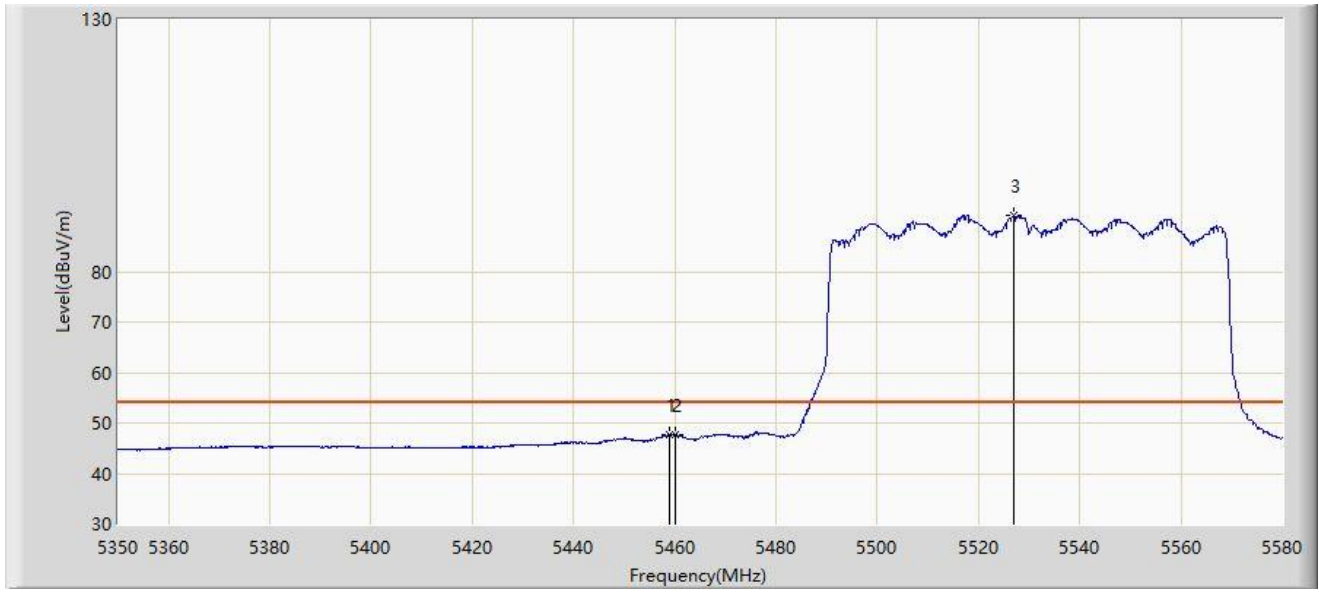


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.020	47.674	45.599	-6.326	54.000	2.075	AV
2		5460.000	47.577	45.506	-6.423	54.000	2.071	AV
3		5527.100	91.194	89.094	N/A	N/A	2.100	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

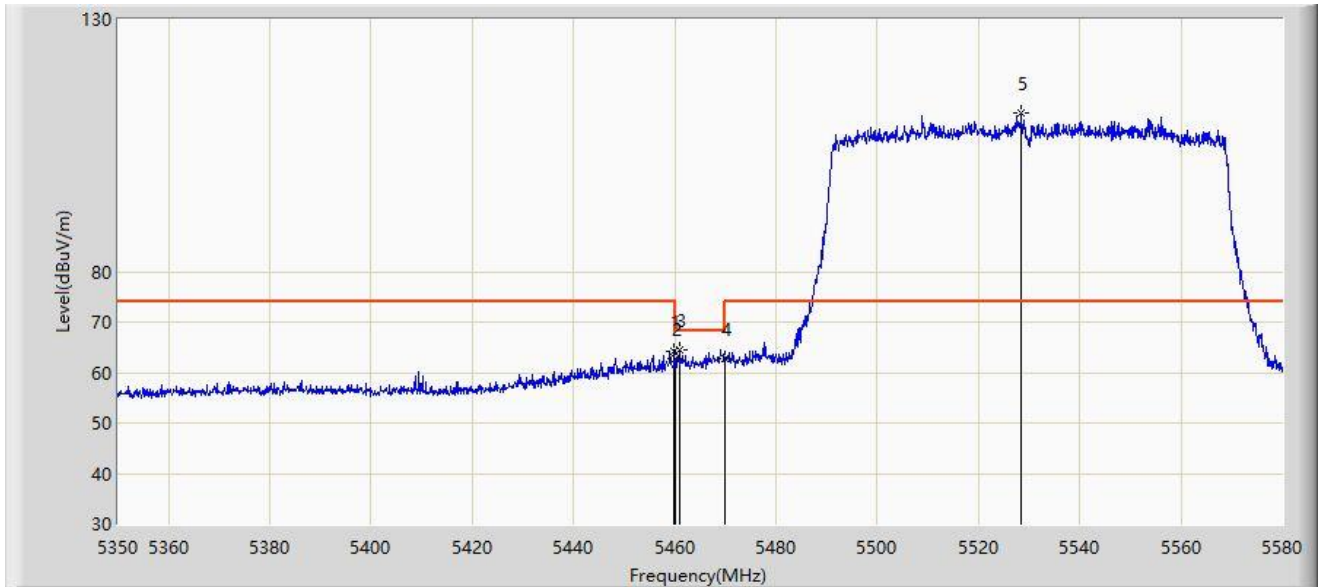


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5459.940	64.170	62.098	-9.830	74.000	2.071	PK
2		5460.000	62.720	60.649	-11.280	74.000	2.071	PK
3	*	5460.860	64.517	62.448	-3.683	68.200	2.068	PK
4		5470.000	62.781	60.742	-5.419	68.200	2.039	PK
5		5528.480	111.451	109.354	N/A	N/A	2.097	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5530MHz	

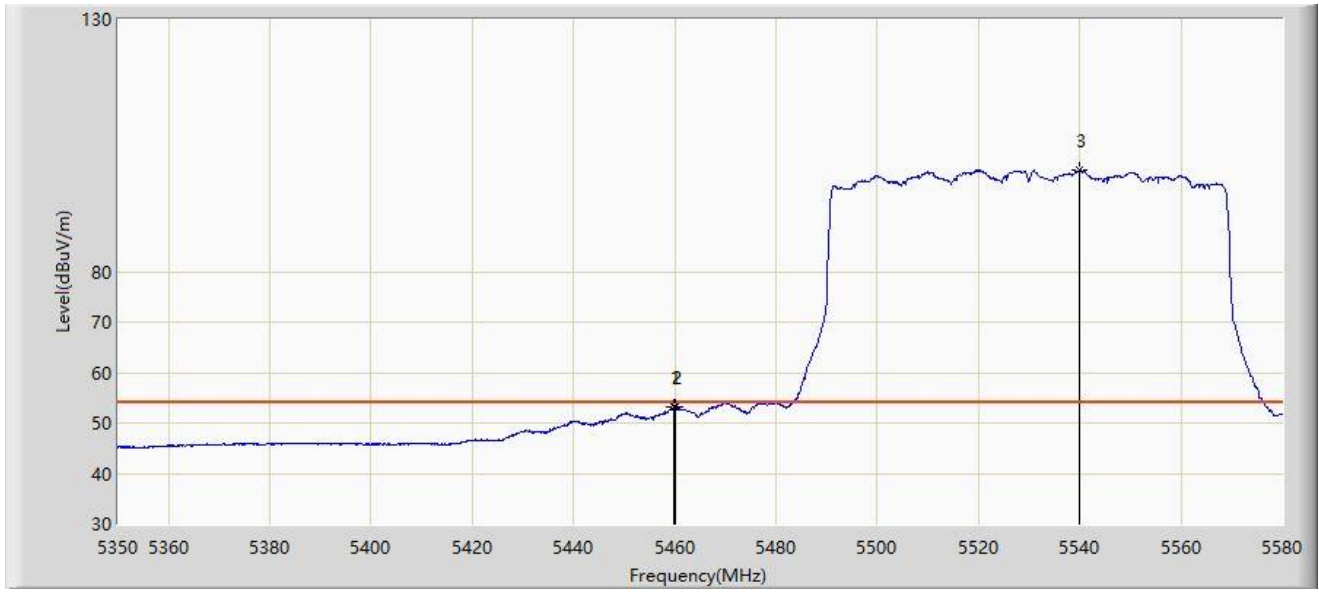


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.940	53.203	51.131	-0.797	54.000	2.071	AV
2		5460.000	53.137	51.066	-0.863	54.000	2.071	AV
3		5539.980	100.121	98.016	N/A	N/A	2.105	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

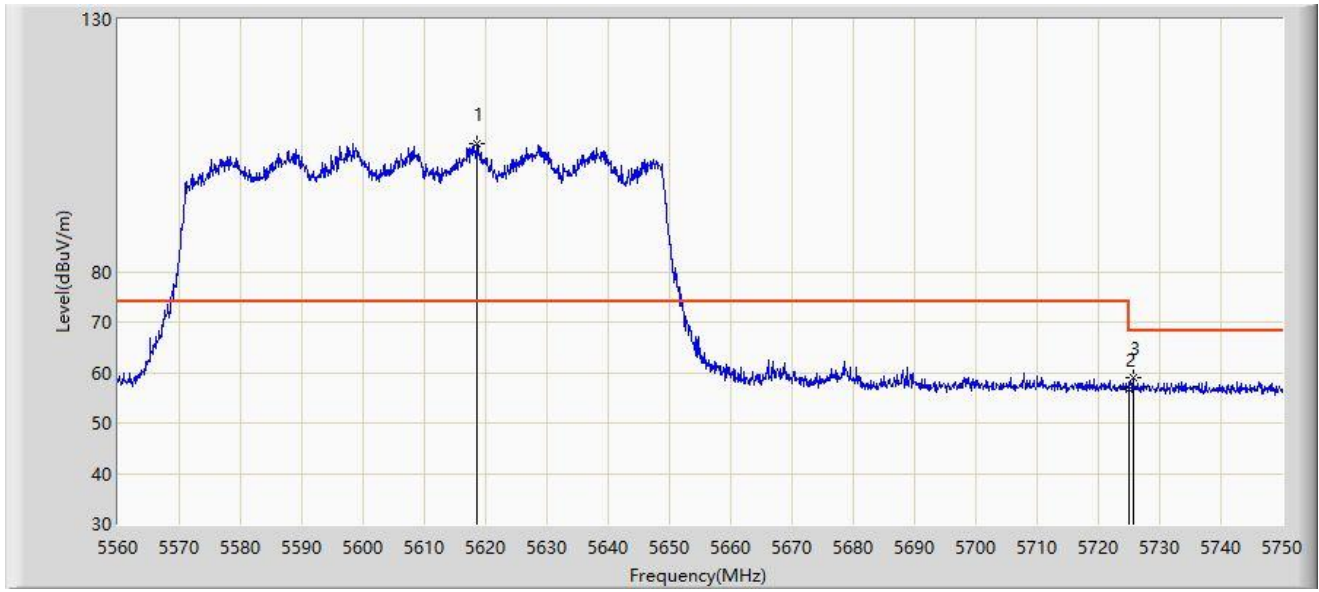


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5618.615	105.437	102.890	N/A	N/A	2.548	PK
2		5725.000	56.790	53.992	-11.410	68.200	2.799	PK
3	*	5725.680	58.864	56.072	-9.336	68.200	2.792	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part15.209_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5610MHz	

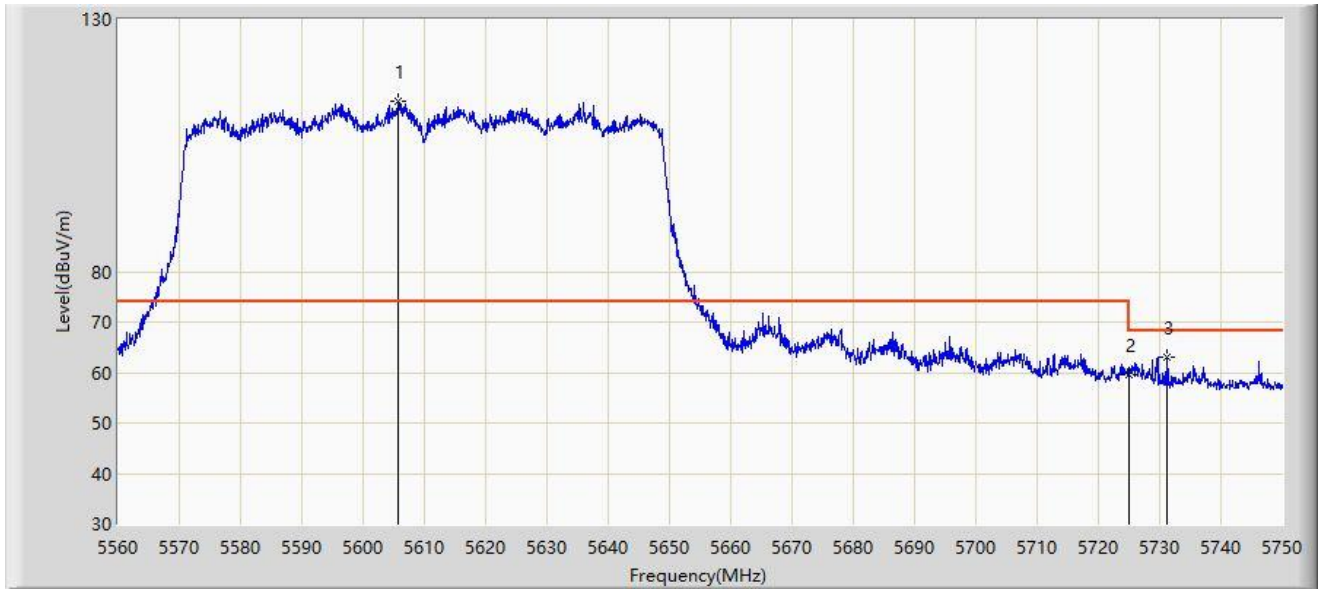


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5605.695	113.909	111.573	N/A	N/A	2.336	PK
2		5725.000	59.513	56.715	-8.687	68.200	2.799	PK
3	*	5731.095	63.126	60.398	-5.074	68.200	2.728	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part 15.407_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

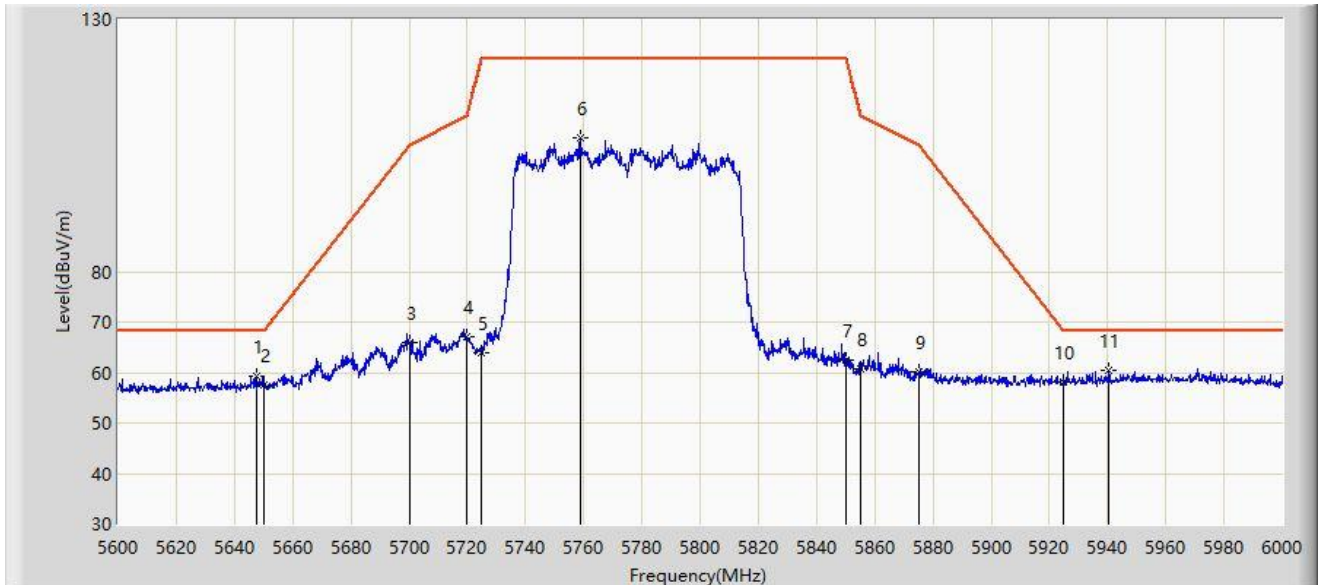


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5647.400	59.307	56.806	-8.893	68.200	2.500	PK
2		5650.000	57.546	55.053	-10.654	68.200	2.492	PK
3		5700.000	66.006	63.217	-39.194	105.200	2.790	PK
4		5720.000	67.206	64.361	-43.594	110.800	2.846	PK
5		5725.000	63.995	61.197	-58.205	122.200	2.799	PK
6		5759.000	106.504	103.647	N/A	N/A	2.857	PK
7		5850.000	62.393	59.213	-59.807	122.200	3.179	PK
8		5855.000	60.724	57.543	-50.076	110.800	3.181	PK
9		5875.000	60.038	56.664	-45.162	105.200	3.374	PK
10		5925.000	58.059	54.617	-10.141	68.200	3.441	PK
11	*	5940.600	60.384	56.775	-7.816	68.200	3.609	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: NS-AC1	Test Date: 2022-06-02
Limit: FCC_Part 15.407_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE80 at 5775MHz	

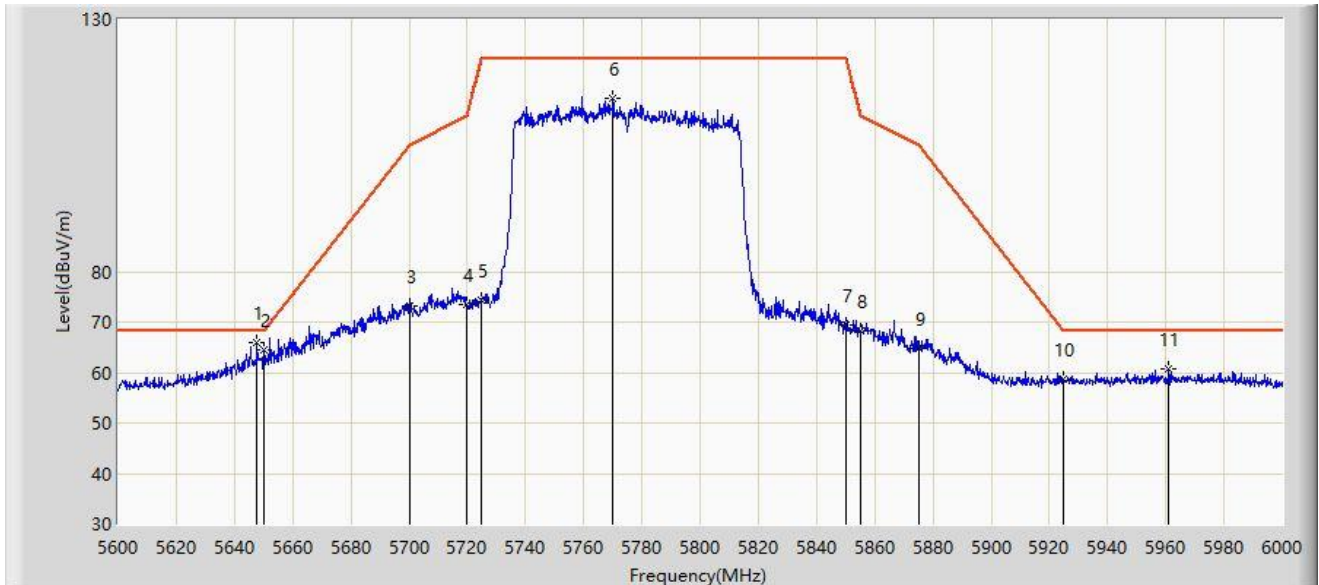

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.800	65.973	63.473	-2.227	68.200	2.500	PK
2		5650.000	64.475	61.982	-3.725	68.200	2.492	PK
3		5700.000	73.229	70.440	-31.971	105.200	2.790	PK
4		5720.000	73.481	70.636	-37.319	110.800	2.846	PK
5		5725.000	74.338	71.540	-47.862	122.200	2.799	PK
6		5770.000	114.459	111.601	N/A	N/A	2.857	PK
7		5850.000	69.437	66.257	-52.763	122.200	3.179	PK
8		5855.000	68.339	65.158	-42.461	110.800	3.181	PK
9		5875.000	64.735	61.361	-40.465	105.200	3.374	PK
10		5925.000	58.700	55.258	-9.500	68.200	3.441	PK
11		5961.000	60.657	56.825	-7.543	68.200	3.832	PK


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

Site: NS-SR2	Test Date: 2022-06-07
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_150kHz~30MHz	Polarity: Line
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5230MHz	

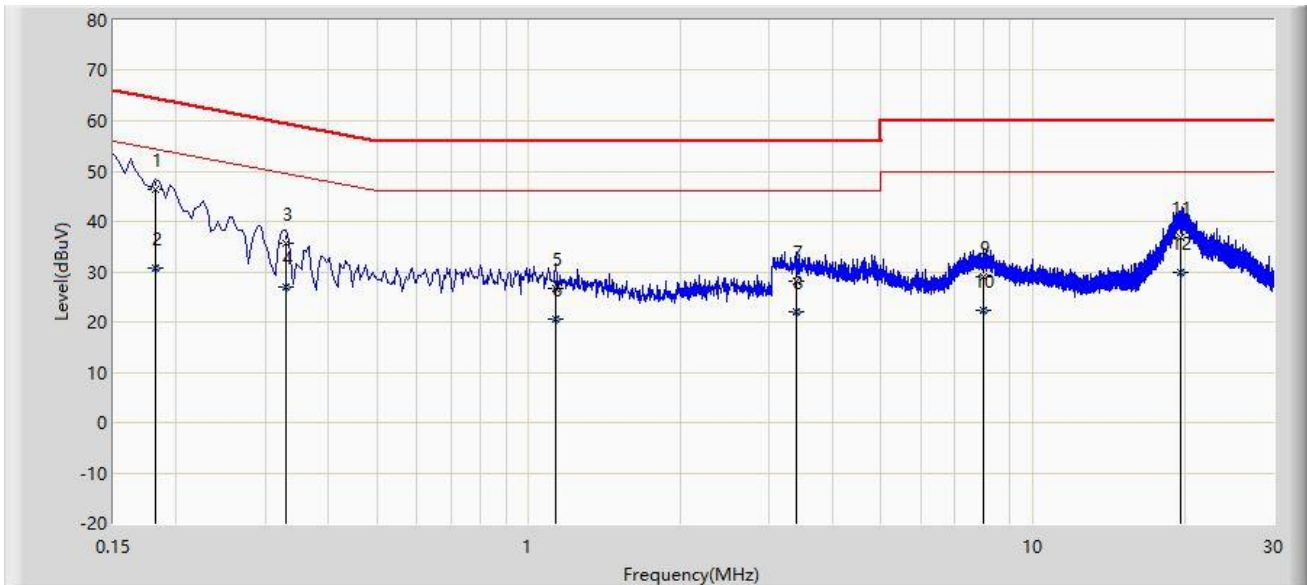


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1	*	0.182	46.426	36.700	-17.968	64.394	9.725	QP
2		0.182	30.787	21.061	-23.607	54.394	9.725	AV
3		0.330	35.710	25.913	-23.741	59.451	9.797	QP
4		0.330	27.088	17.291	-22.363	49.451	9.797	AV
5		1.130	26.678	16.946	-29.322	56.000	9.732	QP
6		1.130	20.576	10.844	-25.424	46.000	9.732	AV
7		3.386	28.029	18.216	-27.971	56.000	9.813	QP
8		3.386	21.983	12.170	-24.017	46.000	9.813	AV
9		7.966	29.066	19.106	-30.934	60.000	9.960	QP
10		7.966	22.447	12.488	-27.553	50.000	9.960	AV
11		19.571	36.754	26.616	-23.246	60.000	10.138	QP
12		19.571	29.778	19.641	-20.222	50.000	10.138	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: NS-SR2	Test Date: 2022-06-07
Limit: FCC_Part15.207_CE_AC Power	Engineer: Flag Yang
Probe: ENV216_102493_150kHz~30MHz	Polarity: Neutral
EUT: Wireless Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5230MHz	

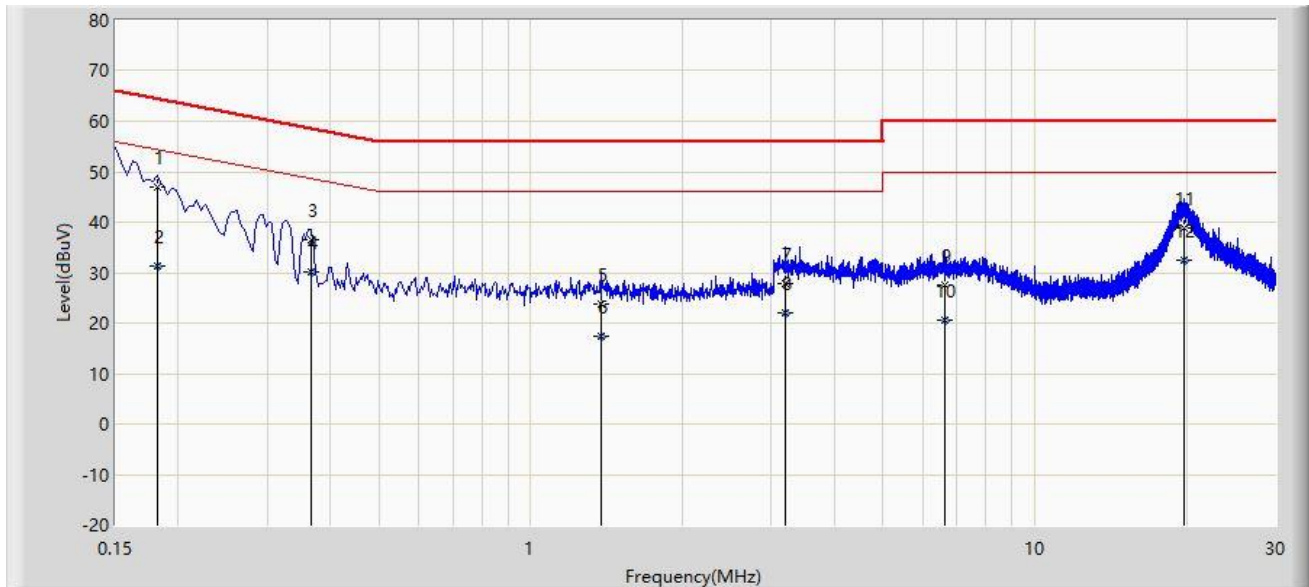

No	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V)	Factor (dB)	Type
1	*	0.182	46.828	37.153	-17.566	64.394	9.675	QP
2		0.182	31.376	21.701	-23.018	54.394	9.675	AV
3		0.366	36.421	26.591	-22.170	58.591	9.829	QP
4		0.366	30.122	20.292	-18.469	48.591	9.829	AV
5		1.382	23.880	14.200	-32.120	56.000	9.680	QP
6		1.382	17.396	7.715	-28.604	46.000	9.680	AV
7		3.202	27.953	18.204	-28.047	56.000	9.749	QP
8		3.202	22.086	12.336	-23.914	46.000	9.749	AV
9		6.634	27.455	17.560	-32.545	60.000	9.895	QP
10		6.634	20.542	10.646	-29.458	50.000	9.895	AV
11		19.730	38.742	28.305	-21.258	60.000	10.437	QP
12		19.730	32.322	21.885	-17.678	50.000	10.437	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B - Test Setup Photograph

Refer to "2205RSU031-UT" file.

Appendix C - EUT Photograph

Refer to "2205RSU031-UE" file.

_____ The End _____